

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15 SUBPART E 15.407

Report Reference No...... : **MTEB23070019-R4**

FCC ID. : **2ATYP-HK9600**

Compiled by

(position+printed name+signature): File administrators Alisa Luo



Supervised by

(position+printed name+signature): Test Engineer Sunny Deng



Approved by

(position+printed name+signature): Manager Yvette Zhou



Date of issue..... : Jul.04,2023

Representative Laboratory Name **Shenzhen Most Technology Service Co., Ltd.**

Address : No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.

Applicant's name..... : **Shiji (US) Inc.**

Address : 730 Peachtree Street NE, Suite 375, Atlanta, Georgia, 30319, United States

Test specification

Standard : **FCC Part 15 Subpart E 15.407**

Shenzhen Most Technology Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description..... : POS COMPUTER

Trade Mark: Shiji

Manufacturer.....: Shiji (US) Inc.

Model/Type reference.....: HK9600

Listed Models: HK960U, HK968, HK968U

Ratings: DC 24V (by Adapter)

Modulation: OFDM

Frequency: From 5745MHz-5825MHz

Hardware version: MTGU3BP

Software version: F4e

Result: **PASS**

TEST REPORT

Equipment under Test : POS COMPUTER

Model /Type : HK9600

Listed Models : HK960U, HK968, HK968U

Remark : All models are identical to each other, except model name.

Applicant : **Shiji (US) Inc.**

Address : 730 Peachtree Street NE, Suite 375, Atlanta, Georgia, 30319, United States

Manufacturer : **Shiji (US) Inc.**

Address : 730 Peachtree Street NE, Suite 375, Atlanta, Georgia, 30319, United States

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1</u>	<u>REVISION HISTORY</u>	<u>4</u>
<u>2</u>	<u>TEST STANDARDS</u>	<u>5</u>
<u>3</u>	<u>SUMMARY</u>	<u>6</u>
3.1	General Remarks	6
3.2	Product Description	6
3.3	Equipment Under Test	6
3.4	Short description of the Equipment under Test (EUT)	6
3.5	EUT operation mode	7
3.6	Block Diagram of Test Setup	7
3.1	Test Item (Equipment Under Test) Description*	7
3.2	Auxiliary Equipment (AE) Description	7
3.3	Antenna Information*	7
3.4	Related Submittal(s) / Grant (s)	8
3.5	EUT configuration	8
3.6	Modifications	8
<u>4</u>	<u>TEST ENVIRONMENT</u>	<u>9</u>
4.1	Address of the test laboratory	9
4.2	Test Facility	9
4.3	Environmental conditions	9
4.4	Test Description	10
4.5	Statement of the measurement uncertainty	11
4.6	Equipments Used during the Test	11
<u>5</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>13</u>
5.1	AC Power Conducted Emission	13
5.2	Radiated Emissions	18
5.3	Conduction spurious emission	27
5.4	Maximum Conducted Average Output Power	28
5.5	Power Spectral Density	29
5.6	Emission Bandwidth (26dBm Bandwidth)	30
5.7	Minimum Emission Bandwidth (6dBm Bandwidth)	31
5.8	Frequency Stability	32
5.9	Duty Cycle Information	33
<u>6</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>34</u>
<u>7</u>	<u>PHOTOS OF THE EUT</u>	<u>37</u>
	APPENDIX I.Frequency Stability	38
	APPENDIX II.Conducted Peak Output Power	49
	APPENDIX III.99% Bandwidth	51
	APPENDIX IV.6dB Bandwidth	60
	APPENDIX V.26dB Bandwidth	69
	APPENDIX VI.Conducted Out Of Band Emission	78
	APPENDIX VII.Duty Cycle	104

APPENDIX VIII. Peak Power Spectral Density

126

1 Revision History

Revision	Issue Date	Revisions	Revised By
00	2023-07-04	Initial Issue	Alisa Luo

2 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15 Subpart E](#)—Unlicensed National Information Infrastructure Devices

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB789033 D02](#): General UNII Test Procedures New Rules v01r02

3 SUMMARY

3.1 General Remarks

Date of receipt of test sample	:	2023.06.26
Testing commenced on	:	2023.06.27
Testing concluded on	:	2023.07.04

3.2 Product Description

Product Description:	POS COMPUTER			
Model:	HK9600			
Power supply:	DC 24V (by Adapter)			
Testing sample ID :	MTYP01898-1899			
WIFI				
Supported type:	20MHz system	40MHz system	80MHz system	160MHz system
	802.11a 802.11n 802.11ac	802.11n 802.11ac	802.11ac	N/A
Operation frequency:	5745MHz-5825MHz	5755MHz-5795MHz	5775MHz	N/A
Modulation:	OFDM	OFDM	OFDM	N/A
Antenna type:	FPC Antenna			
Antenna gain:	Antenna A: 1.93dBi, Antenna B:0.88dBi Remark:Antenna A and Antenna B support simultaneous firing.			

3.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 230V / 50 Hz	<input type="radio"/> 120V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 24V (by Adapter)

3.4 Short description of the Equipment under Test (EUT)

This is a HK9600 For more details, refer to the user's manual of the EUT.

3.5 EUT operation mode


The Applicant provides communication tools software (AT command) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing. All test performed at the low, middle and high of operational frequency range of each mode.

Operation Frequency List WIFI on 5G Band:

Operating band	20MHz		40MHz		80MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII 3 (5725MHz-5850MHz)	149	5745	151	5755	155	5775
	153	5765				
	157	5785	159	5795		
	161	5805				
	165	5825	--	--		

Note: The line display in grey is those Channels/Frequencies select to test in this report for each operation mode.

3.6 Block Diagram of Test Setup

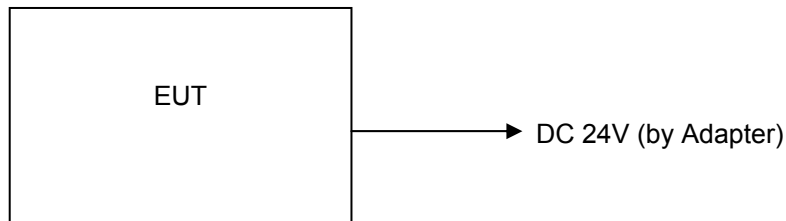

3.1 Test Item (Equipment Under Test) Description*

Short designation	EUT Name	EUT Description	Serial number	Hardware status	Software status
EUT A	Adapter	GM60-240250-F			
EUT B	Adapter	FSP060-DAAN3			
EUT C	Adapter	FSP120-AAAN3			

*: declared by the applicant. According to customers information EUTs A and B are the same devices.

3.2 Auxiliary Equipment (AE) Description

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE 1				
AE 2	-			

3.3 Antenna Information*

Short designation	Antenna Name	Antenna Type	Frequency Range	Serial number	Antenna Peak Gain
Antenna 1	---	FPC Antenna	5745MHz-5825MHz	---	Antenna A: 1.93dBi
Antenna 2	---	FPC Antenna	5745MHz-5825MHz	---	Antenna B:0.88dBi

*: declared by the applicant.

3.4 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

3.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- Supplied by the lab

<input checked="" type="radio"/>	ADAPTER 1	M/N:	GM60-240250-F
		Manufacturer:	Foshan Shunde GUANYUDA Power Supply Co., Ltd.
<input checked="" type="radio"/>	ADAPTER 2	M/N:	FSP060-DAAN3
		Manufacturer:	FSP Group Inc.
<input checked="" type="radio"/>	ADAPTER 3	M/N:	FSP120-AAAN3
		Manufacturer:	FSP Group Inc.

3.6 Modifications

No modifications were implemented to meet testing criteria.

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

Shenzhen Most Technology Service Co., Ltd.

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

4.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 0031192610

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

A2LA-Lab Cert. No.: 6343.01

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

4.3 Environmental conditions

Radiated Emission:

Temperature:	23 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

AC Main Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

4.4 Test Description

FCC Requirement		
FCC Part 15.207	AC Power Conducted Emission	N/A
FCC Part 15.407(a)	Emission Bandwidth(26dBm Bandwidth)	N/A ^{Note1}
FCC Part 15.407(e)	Minimum Emission Bandwidth(6dBm Bandwidth)	PASS ^{Note2}
FCC Part 15.407(a)	Maximum Conducted Output Power	PASS
FCC Part 15.407(a)	Peak Power Spectral Density	PASS
FCC Part 15.407(g)	Frequency Stability	PASS
FCC Part 15.407(b)	Undesirable emission	PASS
FCC Part 15.407(b)/15.205/15.209	Radiated Emissions	PASS
FCC Part 15.407(h)	Dynamic Frequency Selection	N/A ^{Note 3}
FCC Part 15.203/15.247(b)	Antenna Requirement	PASS

Note 1: Apply to U-NII 1, U-NII 2A, and U-NII 2C band.

Note 2: Apply to U-NII 3 band only.

Note 3: This device not work in DFS band.

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Conducted Output Power Power Spectral Density Emission Bandwidth(26dBm Bandwidth) Minimum Emission Bandwidth(6dBm Bandwidth) Undesirable emission Frequency Stability	11a/OFDM	54 Mbps
	11n(20MHz) /OFDM	MCS7
	11n(40MHz) /OFDM	MCS7
	11ac(20MHz)/ 11ac(40MHz)/ 11ac(80MHz) /OFDM	MCS9

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Most Technology Service Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 Db	(1)
Radiated Emission	1~18GHz	4.32 Db	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.6 Equipments Used during the Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	100093	2023/03/17	1 Year
2	Three-phase artificial power network	Schwarzback Mess	NNLK8129	8129178	2023/03/17	1 Year
3.	Receiver	R&S	ESCI	100492	2023/03/17	1 Year
4	Receiver	R&S	ESPI	101202	2023/03/17	1 Year
5	Spectrum analyzer	Agilent	9020A	MT-E306	2023/03/17	1 Year
6	Bilong Antenna	Sunol Sciences	JB3	A121206	2023/03/17	1 Year
7	Horn antenna	HF Antenna	HF Antenna	MT-E158	2023/03/17	1 Year
8	Loop antenna	Beijing Daze	ZN30900B	/	2023/03/17	1 Year
9	Horn antenna	R&S	OBH100400	26999002	2023/03/17	1 Year
10	Wireless Communication Test Set	R&S	CMW500	/	2023/03/17	1 Year
11	Spectrum analyzer	R&S	FSP	100019	2023/03/17	1 Year
12	High gain antenna	Schwarzbeck	LB-180400KF	MT-E389	2023/03/17	1 Year
13	Preamplifier	Schwarzbeck	BBV 9743	MT-E390	2023/03/17	1 Year
14	Pre-amplifier	EMCI	EMC051845S E	MT-E391	2023/03/17	1 Year
15	Pre-amplifier	Agilent	83051A	MT-E392	2023/03/17	1 Year
16	High pass filter unit	Tonscend	JS0806-F	MT-E393	2023/03/17	1 Year


17	RF Cable(below1GHz)	Times	9kHz-1GHz	MT-E394	2023/03/17	1 Year
18	RF Cable(above 1GHz)	Times	1-40G	MT-E395	2023/03/17	1 Year
19	RF Cable (9KHz-40GHz)	Tonscend	170660	N/A	2023/03/17	1 Year

Note: The Cal.Interval was one year.

5 TEST CONDITIONS AND RESULTS

5.1 AC Power Conducted Emission

TEST CONFIGURATION

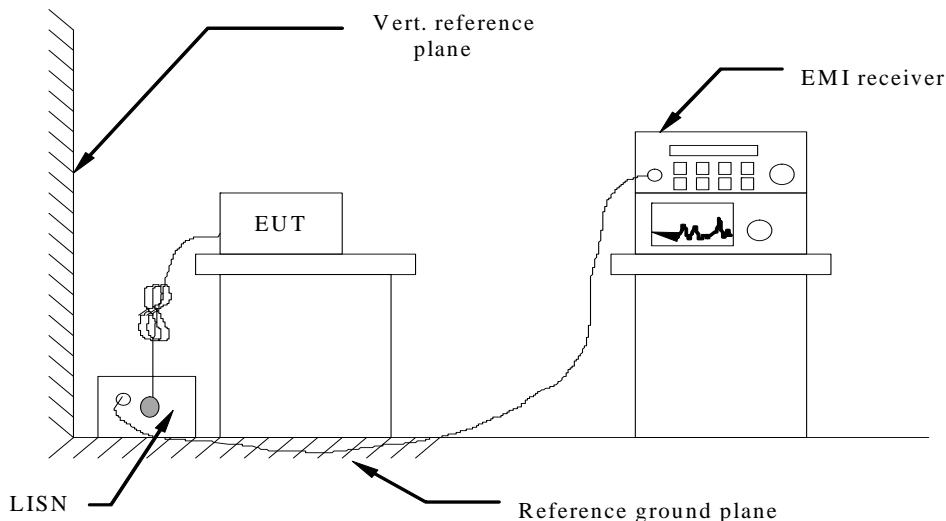

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark:

1. WIFI 5G modes were test at 802.11a, 802.11n(20), 802.11n(40), 802.11ac(20MHz) , 802.11ac(40MHz) , 802.11ac(80MHz) (Low, Middle, and High channel); only the worst result of 802.11a Middle Channel was reported as below:
2. GM60-240250-F, FSP060-DAAN3, FSP120-AAAN3 three adapters have been tested, and only the worst adapter(GM60-240250-F) test data is shown


Power supply:	DC 24V (by Adapter)	Polarization	L
M/N:	HK9600(second display: 10.1 inch)		

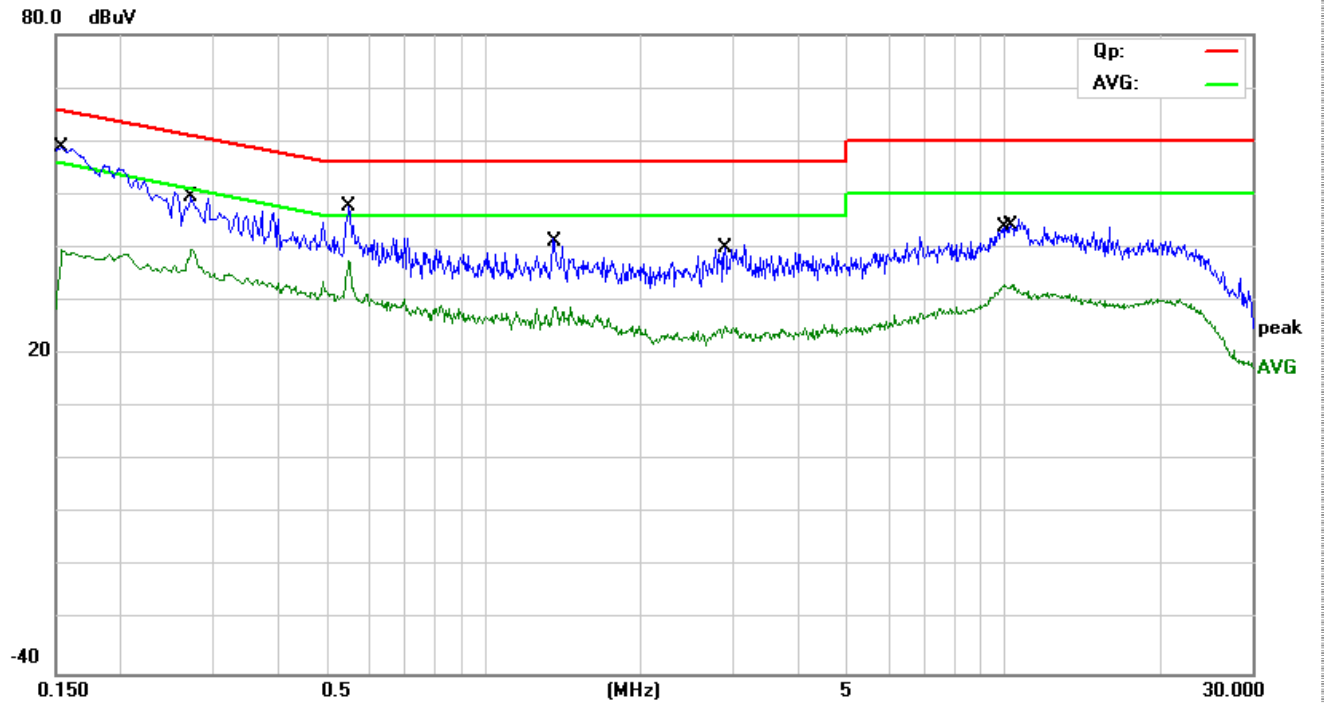

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1540	49.31	9.60	58.91	65.78	-6.87	QP	
2		0.1540	30.10	9.60	39.70	55.78	-16.08	AVG	
3		0.2740	39.88	9.60	49.48	61.00	-11.52	QP	
4		0.2740	30.14	9.60	39.74	51.00	-11.26	AVG	
5		0.5500	38.19	9.59	47.78	56.00	-8.22	QP	
6		0.5500	28.08	9.59	37.67	46.00	-8.33	AVG	
7		1.3700	31.59	9.60	41.19	56.00	-14.81	QP	
8		1.3700	19.37	9.60	28.97	46.00	-17.03	AVG	
9		2.9100	30.47	9.61	40.08	56.00	-15.92	QP	
10		2.9100	15.55	9.61	25.16	46.00	-20.84	AVG	
11		10.0380	23.40	9.69	33.09	50.00	-16.91	AVG	
12		10.3140	34.35	9.69	44.04	60.00	-15.96	QP	

*:Maximum data x:Over limit !:over margin


Power supply:	DC 24V (by Adapter)	Polarization	N
M/N:	HK9600(second display: 10.1 inch)		

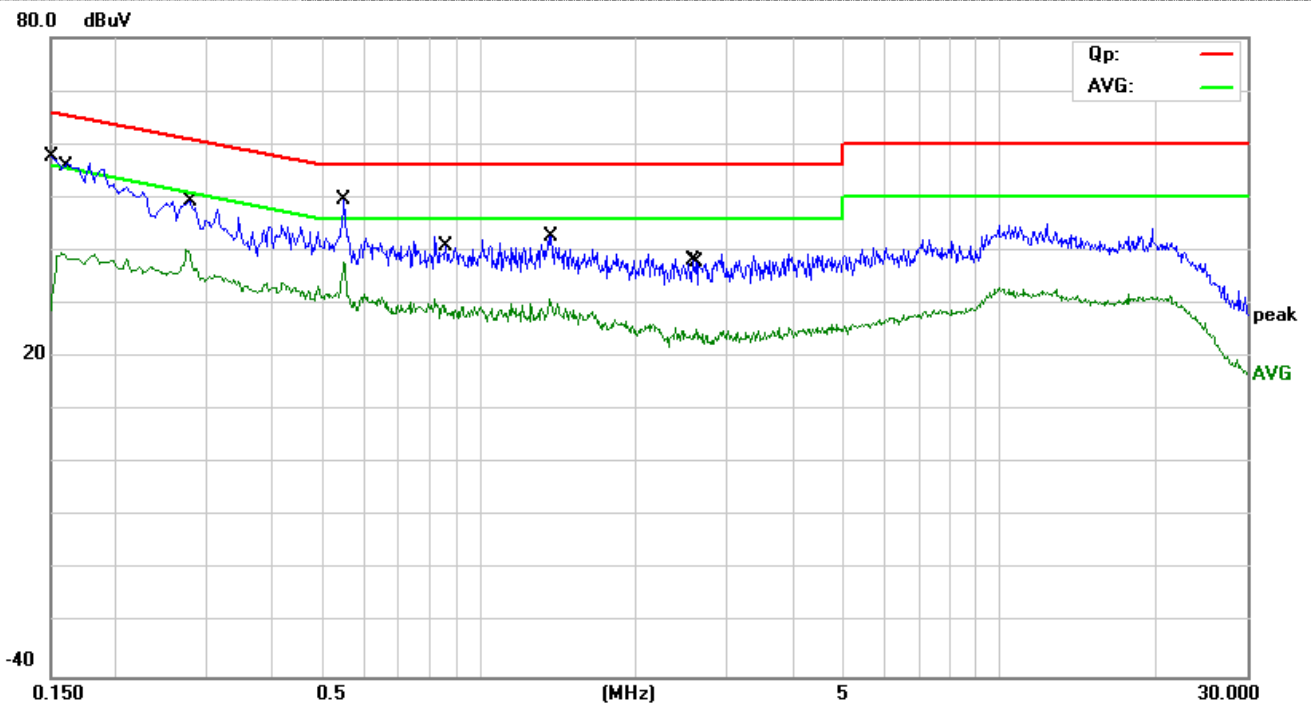

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	48.06	9.60	57.66	66.00	-8.34	QP	
2		0.1580	29.94	9.60	39.54	55.57	-16.03	AVG	
3		0.2744	30.49	9.60	40.09	50.98	-10.89	AVG	
4		0.2780	39.78	9.59	49.37	60.88	-11.51	QP	
5	*	0.5500	39.96	9.59	49.55	56.00	-6.45	QP	
6		0.5500	28.36	9.59	37.95	46.00	-8.05	AVG	
7		0.8540	20.15	9.60	29.75	46.00	-16.25	AVG	
8		0.8660	31.31	9.60	40.91	56.00	-15.09	QP	
9		1.3740	33.16	9.60	42.76	56.00	-13.24	QP	
10		1.3740	20.60	9.60	30.20	46.00	-15.80	AVG	
11		2.5780	28.40	9.61	38.01	56.00	-17.99	QP	
12		2.6220	15.57	9.61	25.18	46.00	-20.82	AVG	

*:Maximum data x:Over limit !:over margin


Power supply:	DC 24V (by Adapter)	Polarization	L
M/N:	HK9600(second display: VFD)		

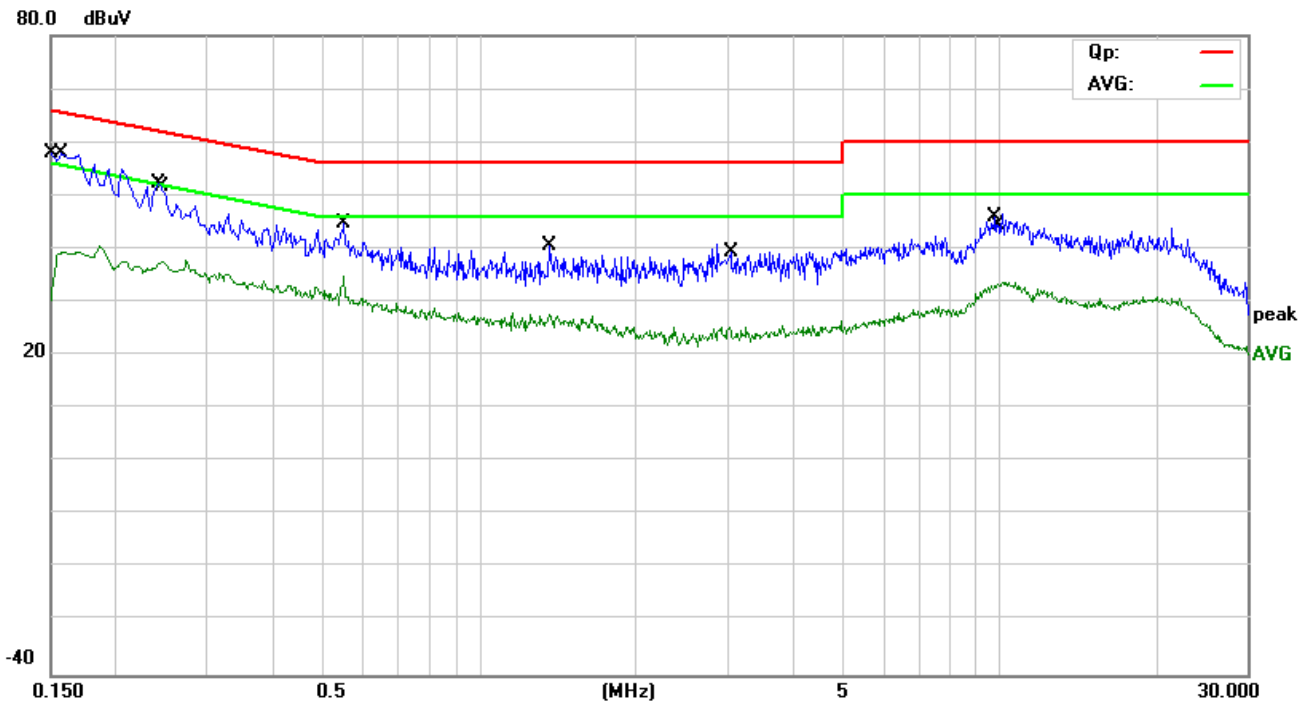

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1500	48.40	9.60	58.00	66.00	-8.00	QP	
2		0.1580	29.67	9.60	39.27	55.57	-16.30	AVG	
3		0.2420	42.64	9.60	52.24	62.03	-9.79	QP	
4		0.2460	27.98	9.60	37.58	51.89	-14.31	AVG	
5		0.5500	35.09	9.59	44.68	56.00	-11.32	QP	
6		0.5500	25.15	9.59	34.74	46.00	-11.26	AVG	
7		1.3700	30.82	9.60	40.42	56.00	-15.58	QP	
8		1.3700	18.09	9.60	27.69	46.00	-18.31	AVG	
9		3.0300	15.65	9.61	25.26	46.00	-20.74	AVG	
10		3.0420	29.61	9.61	39.22	56.00	-16.78	QP	
11		9.8500	36.15	9.69	45.84	60.00	-14.16	QP	
12		9.9460	23.80	9.69	33.49	50.00	-16.51	AVG	

*:Maximum data x:Over limit !:over margin

Power supply:	DC 24V (by Adapter)	Polarization	N
M/N:	HK9600(second display: VFD)		

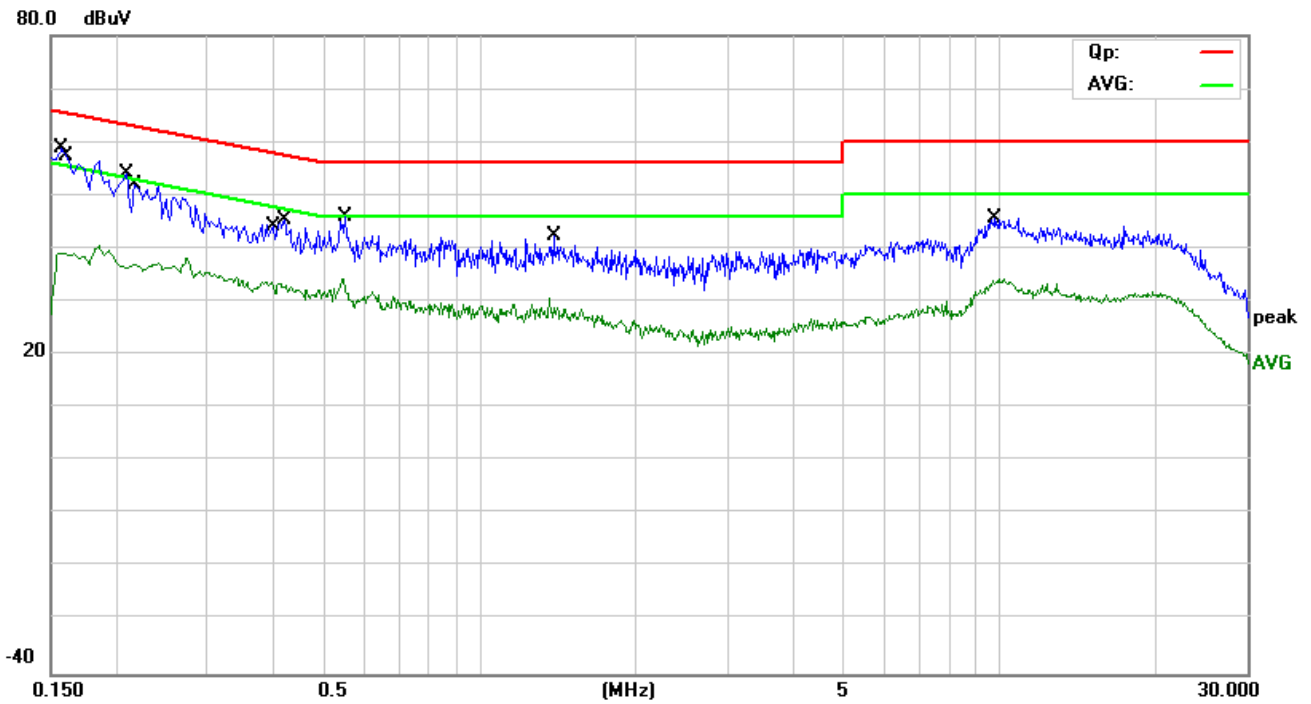

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1580	29.49	9.60	39.09	55.57	-16.48	AVG	
2	*	0.1620	47.38	9.61	56.99	65.36	-8.37	QP	
3		0.2100	44.37	9.60	53.97	63.21	-9.24	QP	
4		0.2180	27.33	9.60	36.93	52.89	-15.96	AVG	
5		0.3980	24.06	9.59	33.65	47.90	-14.25	AVG	
6		0.4220	35.88	9.59	45.47	57.41	-11.94	QP	
7		0.5500	24.76	9.59	34.35	46.00	-11.65	AVG	
8		0.5540	36.28	9.59	45.87	56.00	-10.13	QP	
9		1.3940	32.74	9.60	42.34	56.00	-13.66	QP	
10		1.3940	19.35	9.60	28.95	46.00	-17.05	AVG	
11		9.7500	24.23	9.69	33.92	50.00	-16.08	AVG	
12		9.8220	35.83	9.69	45.52	60.00	-14.48	QP	

*:Maximum data x:Over limit !:over margin

5.2 Radiated Emissions

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Undesirable emission limits

Requirement	Limit(EIRP)	Limit (Field strength at 3m) ^{Note1}
15.407(b)(1)	PK:-27(dBm/MHz)	PK:68.2(dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)		

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$


- (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209
- (6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

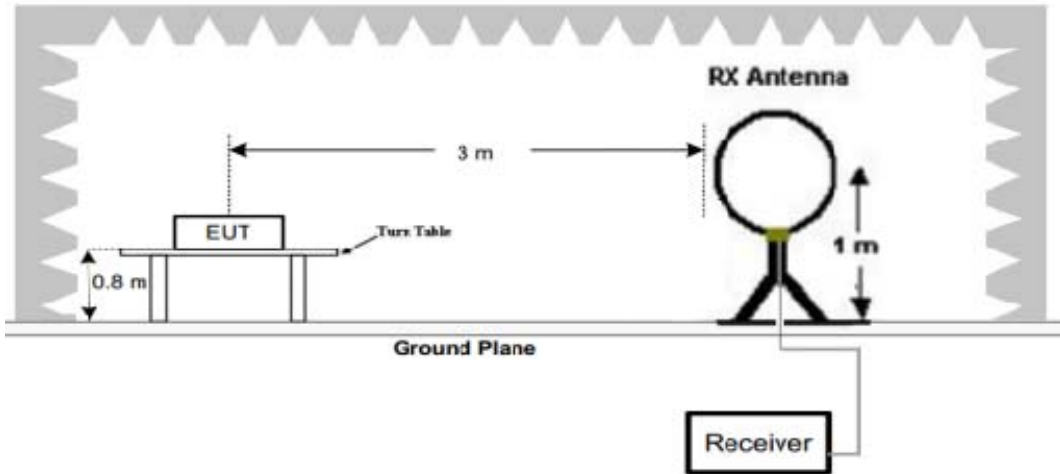

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

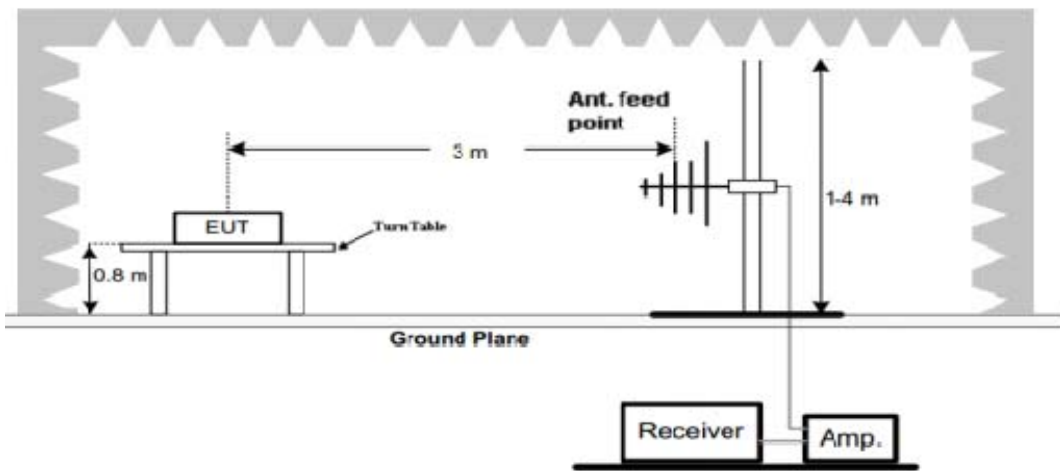

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

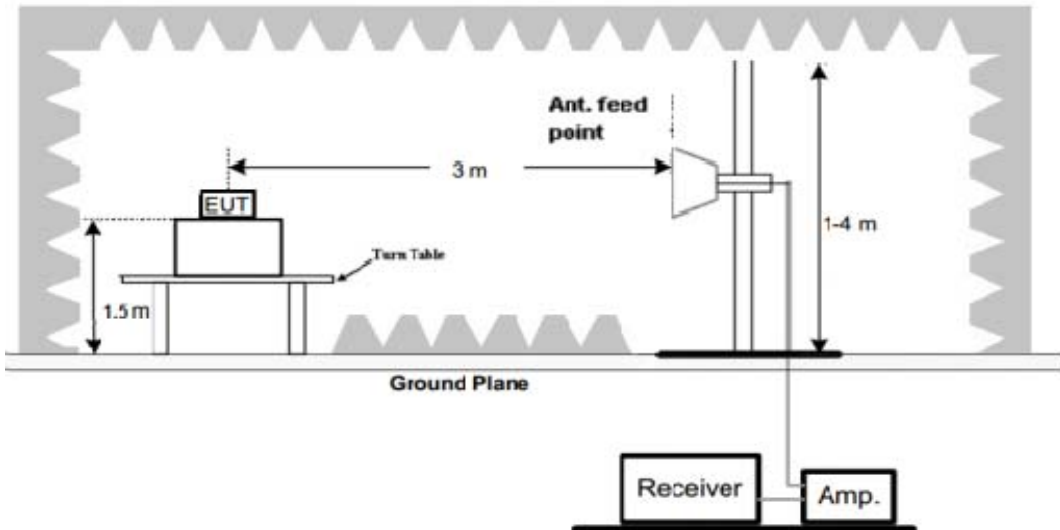

Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 40GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak


TEST RESULTS

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. All 802.11a, 802.11n(20), 802.11n(40), 802.11ac(20MHz) , 802.11ac(40MHz) , 802.11ac(80MHz) modes have been tested for below 1GHz test, only the worst case 802.11a low channel of U-NII 1 band was recorded.
3. All 802.11a, 802.11n(20), 802.11n(40), 802.11ac(20MHz) , 802.11ac(40MHz) , 802.11ac(80MHz) modes have been tested for above 1GHz test, only the worst case 802.11a was recorded.
4. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
5. Remark: Result=Reading value+Factor
6. GM60-240250-F, FSP060-DAAN3, FSP120-AAAN3 three adapters have been tested, and only the worst adapter(GM60-240250-F) test data is shown

For 30MHz-1GHz


Horizontal
HK9600(second display: 10.1 inch)

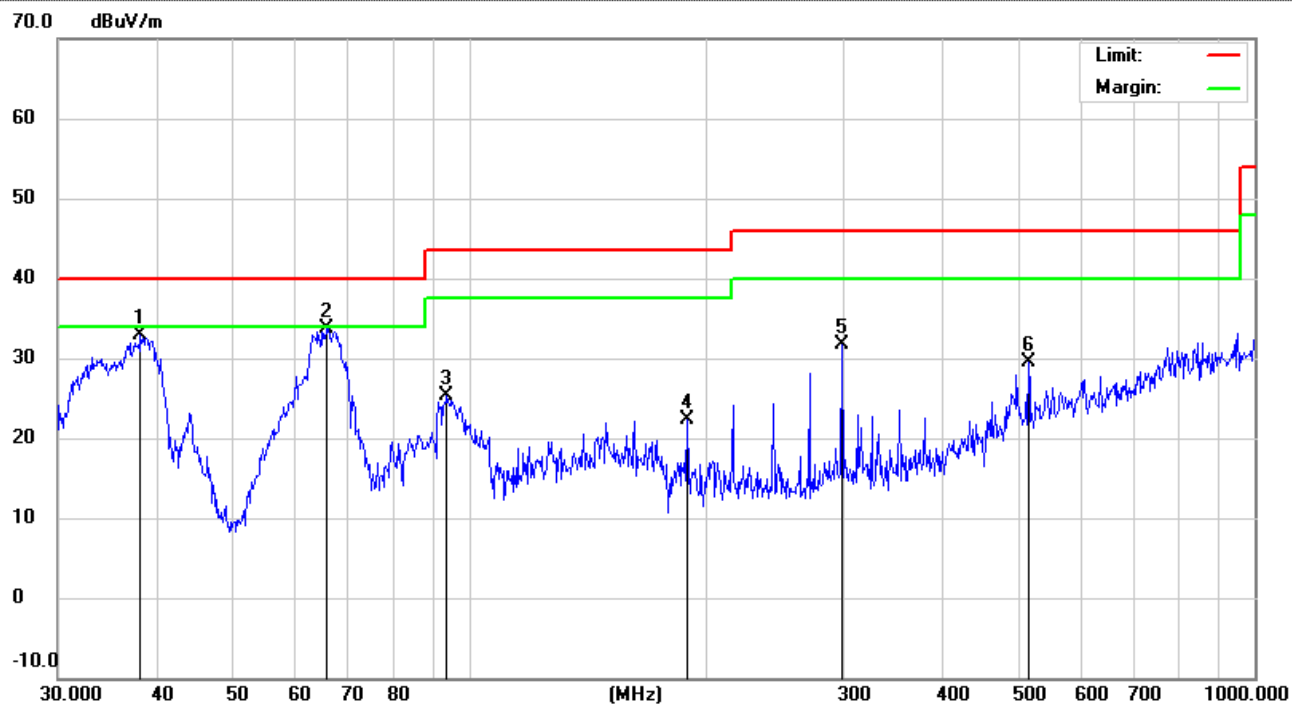

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		38.2120	17.69	15.12	32.81	40.00	-7.19	QP	200	24
2	*	66.0341	24.73	9.02	33.75	40.00	-6.25	QP	200	78
3		93.7682	14.04	11.29	25.33	43.50	-18.17	QP	200	152
4		189.7385	7.39	14.89	22.28	43.50	-21.22	QP	200	199
5		298.2681	16.27	15.44	31.71	46.00	-14.29	QP	200	254
6		515.4373	6.55	22.87	29.42	46.00	-16.58	QP	200	308

*:Maximum data x:Over limit !:over margin


Vertical
HK9600(second display: 10.1 inch)

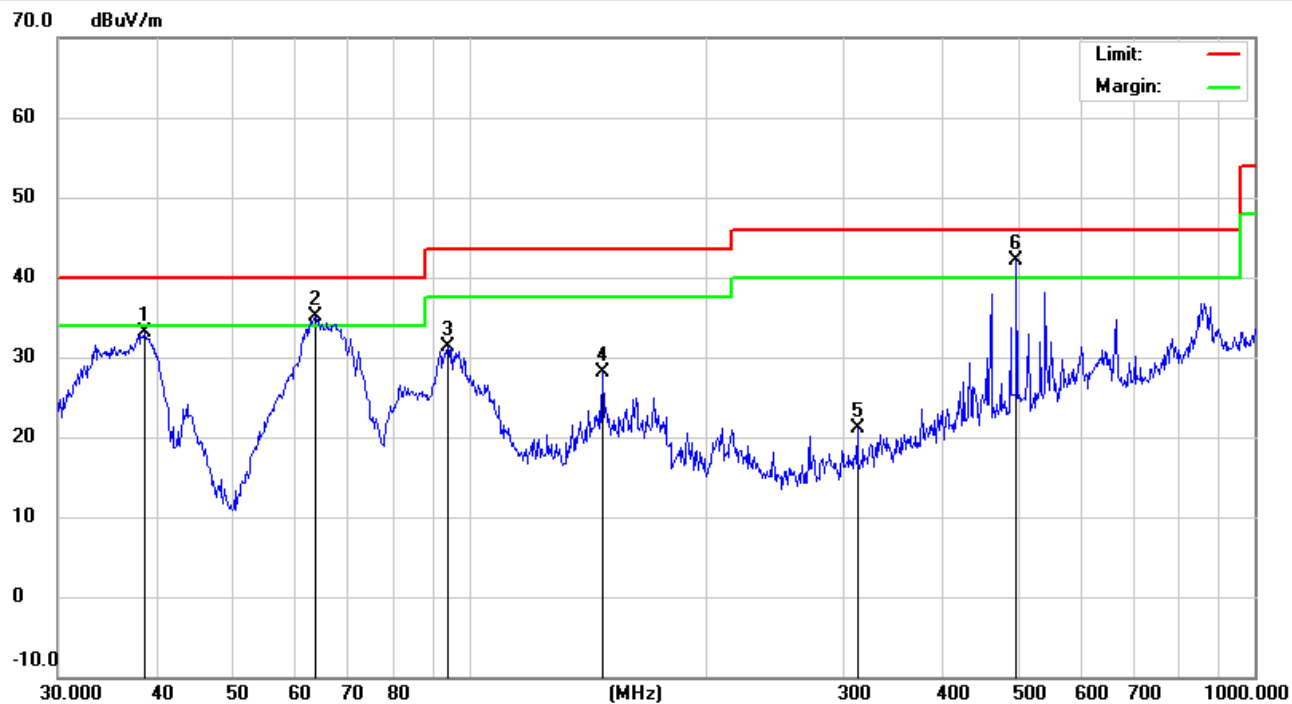

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		38.6160	18.28	14.82	33.10	40.00	-6.90	QP	100	35	
2	!	63.7588	26.20	8.86	35.06	40.00	-4.94	QP	100	89	
3		94.0978	19.89	11.42	31.31	43.50	-12.19	QP	100	174	
4		147.9214	10.59	17.43	28.02	43.50	-15.48	QP	100	205	
5		312.1792	5.34	15.73	21.07	46.00	-24.93	QP	100	268	
6	*	497.6764	19.62	22.58	42.20	46.00	-3.80	QP	100	330	

*:Maximum data x:Over limit !:over margin


Horizontal
HK9600(second display: VFD)

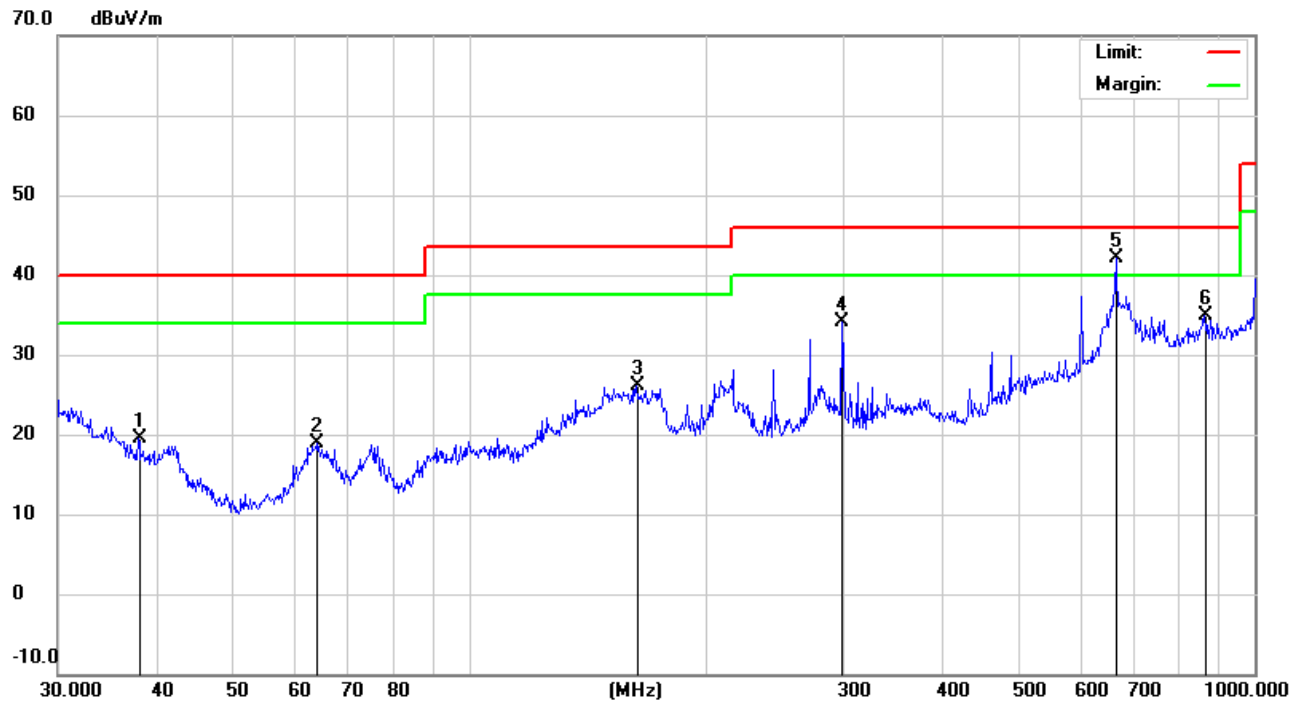

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		37.9450	4.12	15.32	19.44	40.00	-20.56	QP	200	31	
2		63.9828	9.93	8.88	18.81	40.00	-21.19	QP	200	88	
3		163.1818	8.86	17.19	26.05	43.50	-17.45	QP	200	137	
4		298.2681	18.75	15.44	34.19	46.00	-11.81	QP	200	198	
5	*	665.8035	17.48	24.66	42.14	46.00	-3.86	QP	200	235	
6		863.0562	6.39	28.59	34.98	46.00	-11.02	QP	200	306	

*:Maximum data x:Over limit !:over margin

Vertical
HK9600(second display: VFD)

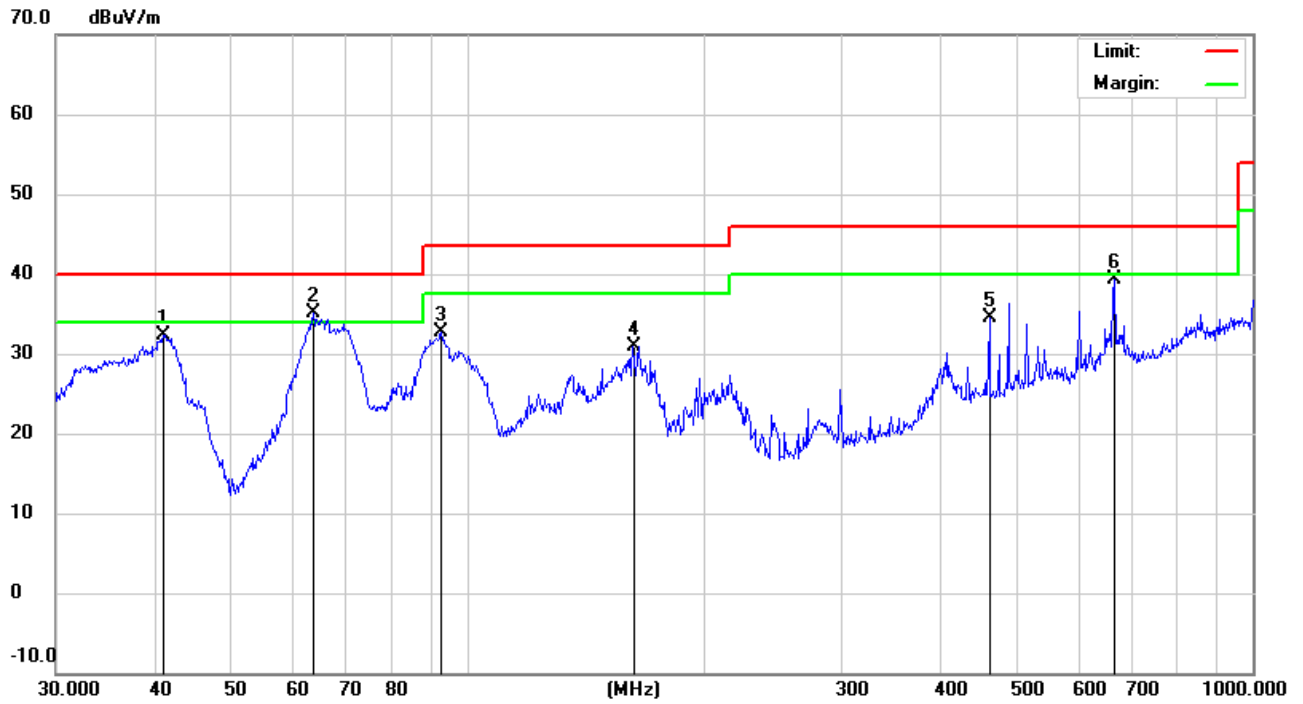

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		41.1320	19.28	13.05	32.33	40.00	-7.67	QP	100	29	
2	*	63.7588	26.22	8.86	35.08	40.00	-4.92	QP	100	88	
3		92.7871	21.71	10.93	32.64	43.50	-10.86	QP	100	136	
4		162.6106	13.73	17.21	30.94	43.50	-12.56	QP	100	187	
5		462.3455	13.89	20.70	34.59	46.00	-11.41	QP	100	234	
6		665.8035	14.73	24.66	39.39	46.00	-6.61	QP	100	305	

*:Maximum data x:Over limit !:over margin

For 1GHz to 40GHz

Note: 802.11a, 802.11n(20), 802.11n(40), 802.11ac (20), 802.11ac (40) , 802.11ac (80) modes have been tested for above 1GHz test, only the worst case 802.11a was recorded.
U-NII 3

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11a Mode -5500MHz									
V	5086	53.62	29.03	5.24	36.4	51.49	68.2	16.71	PK
V	5086	43.78	29.03	5.24	36.4	41.65	54	12.35	AV
H	5086	54.92	29.03	5.24	36.4	52.79	68.2	15.41	PK
H	5086	46.4	29.03	5.24	36.4	44.27	54	9.73	AV
V	11490	35.26	39.43	11.47	34.28	51.88	68.2	16.32	PK
V	11490	25.92	39.43	11.47	34.28	42.54	54	11.46	AV
H	11490	35.97	39.43	11.47	34.28	52.59	68.2	15.61	PK
H	11490	26.44	39.43	11.47	34.28	43.06	54	10.94	AV
802.11a Mode -5600MHz									
V	5086	53.75	29.03	5.24	36.4	51.62	68.2	16.58	PK
V	5086	42.57	29.03	5.24	36.4	40.44	54	13.56	AV
H	5086	54.38	29.03	5.24	36.4	52.25	68.2	15.95	PK
H	5086	46.93	29.03	5.24	36.4	44.8	54	9.2	AV
V	11570	37.3	39.43	11.47	34.28	53.92	68.2	14.28	PK
V	11570	26.71	39.43	11.47	34.28	43.33	54	10.67	AV
H	11570	34.85	39.43	11.47	34.28	51.47	68.2	16.73	PK
H	11570	28.89	39.43	11.47	34.28	45.51	54	8.49	AV
802.11a Mode -5700MHz									
V	5086	52.97	29.03	5.24	36.4	50.84	68.2	17.36	PK
V	5086	43.56	29.03	5.24	36.4	41.43	54	12.57	AV
H	5086	53.58	29.03	5.24	36.4	51.45	68.2	16.75	PK
H	5086	47.51	29.03	5.24	36.4	45.38	54	8.62	AV
V	11650	35.5	39.43	11.47	34.28	52.12	68.2	16.08	PK
V	11650	26.9	39.43	11.47	34.28	43.52	54	10.48	AV
H	11650	37.16	39.43	11.47	34.28	53.78	68.2	14.42	PK
H	11650	27.88	39.43	11.47	34.28	44.5	54	9.5	AV

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the other emission levels were very low against the limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Radiated Band Edge Test:

All 802.11a, 802.11n(20), 802.11n(40), 802.11ac(20MHz) , 802.11ac(40MHz) , 802.11ac(80MHz) modes have been tested for above 1GHz test, only the worst case 802.11a was recorded.

U-NII 3

Polar (H/V)	Frequency	Meter Reading	Antenna Factor	Cable loss	Preamp factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11a									
V	5460	55.31	31.22	7.62	36.5	57.65	74	16.35	PK
V	5460	38.53	31.22	7.62	36.5	40.87	54	13.13	AV
H	5460	55.59	31.22	7.62	36.5	57.93	74	16.07	PK
H	5460	43.49	31.22	7.62	36.5	45.83	54	8.17	AV
V	5850	55.59	31.56	7.83	35.82	59.16	74	14.84	PK
V	5850	39.38	31.56	7.83	35.82	42.95	54	11.05	AV
H	5850	56.16	31.56	7.83	35.82	59.73	74	14.27	PK
H	5850	40.68	31.56	7.83	35.82	44.25	54	9.75	AV

5.3 Conduction spurious emission

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW


Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

Test Configuration



TEST RESULTS

See APPENDIX VI.

5.4 Maximum Conducted Average Output Power

Limit

For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

See APPENDIX II.

5.5 Power Spectral Density

Limit

(1) For the band 5.15 - 5.25 GHz.

(i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}

(ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}

(iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

(iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band.^{note1}

(2) For the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz bands, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band.^{note1}

(3) For the band 5.725 - 5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.^{note1, note2}


Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note2: Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 1MHz for U-NII 1, U-NII 2A, U-NII C band and 510KHz for U-NII 3 band.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to encompass the entire EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.

Test Configuration



Test Results

See APPENDIX VIII

5.6 Emission Bandwidth (26dBm Bandwidth)


Limit

N/A

Test Procedure

1. Set resolution bandwidth (RBW) = approximately 1 % of the EBW.
2. Set the video bandwidth (VBW) > RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW / EBW ratio is approximately 1 %.

Test Configuration



Test Results

N/A

5.7 Minimum Emission Bandwidth (6dBm Bandwidth)


Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration



Test Results


See APPENDIX IV.

5.8 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

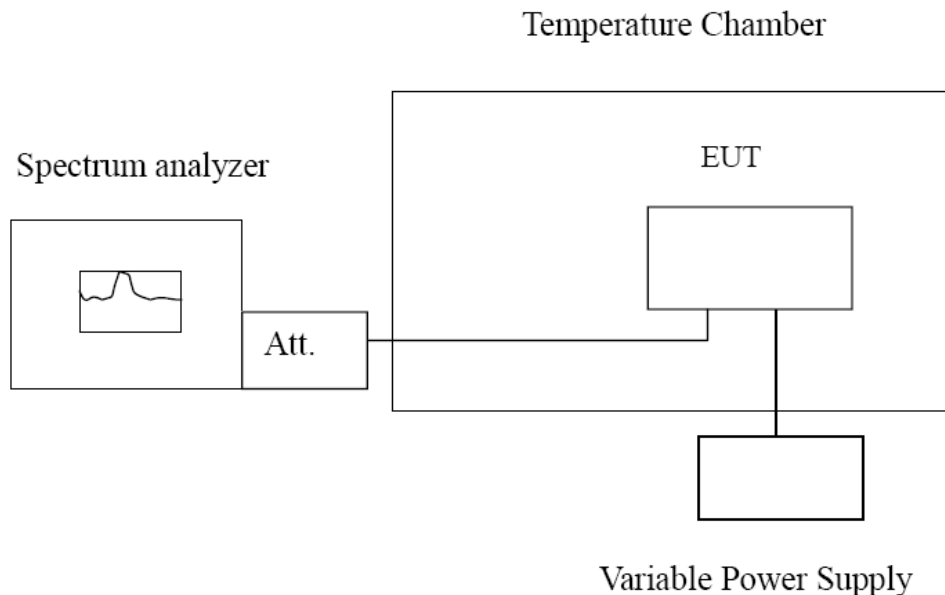

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

See APPENDIX I.

5.9 Duty Cycle Information

See APPENDIX VII.

6 Test Setup Photos of the EUT


(HK9600(second display: 10.1 inch))





(HK9600(second display: VFD))



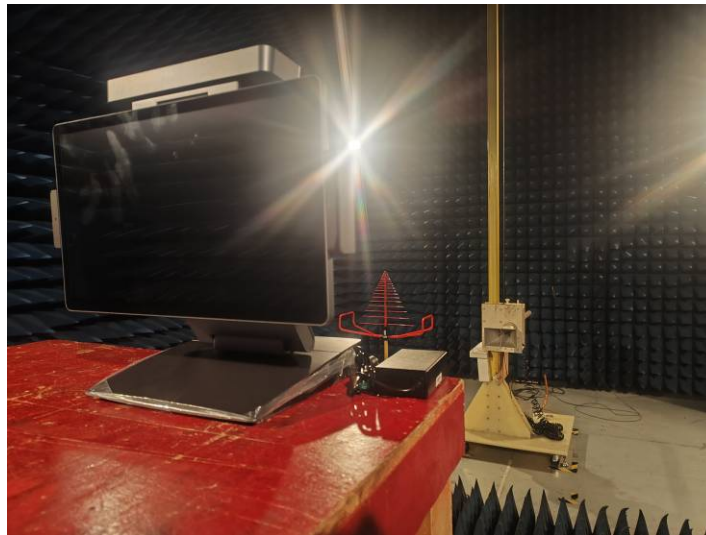

7 Photos of the EUT

see photo report.

APPENDIX I.Frequency Stability

Test Result


Antenna A:

Condition	Mode	Ch.	Antenna	Center Frequency (MHz)	Calculated Value of Center Frequency(MHz)	Result (ppm)	Limit (ppm)	State
NT/NV	IEEE 802.11a	149	0	5745.0	5744.782113	-37.93	Within authorized band	PASS
		157		5785.0	5785.250000	43.22		PASS
		165		5825.0	5825.246425	42.3		PASS
	IEEE 802.11n_20	149		5745.0	5745.234537	40.82		PASS
		157		5785.0	5785.248050	42.88		PASS
		165		5825.0	5825.249575	42.85		PASS
	IEEE 802.11n_40	151		5755.0	5755.230712	40.09		PASS
		159		5795.0	5795.209274	36.11		PASS
	IEEE 802.11ac_20	149		5745.0	5745.237350	41.31		PASS
		157		5785.0	5785.237012	40.97		PASS
		165		5825.0	5825.237112	40.71		PASS
	IEEE 802.11ac_40	151		5755.0	5755.235487	40.92		PASS
		159		5795.0	5795.227487	39.26		PASS
	IEEE 802.11ac_80	155		5775.0	5775.229462	39.73		PASS

Test Graphs

NT/NV

IEEE 802.11a

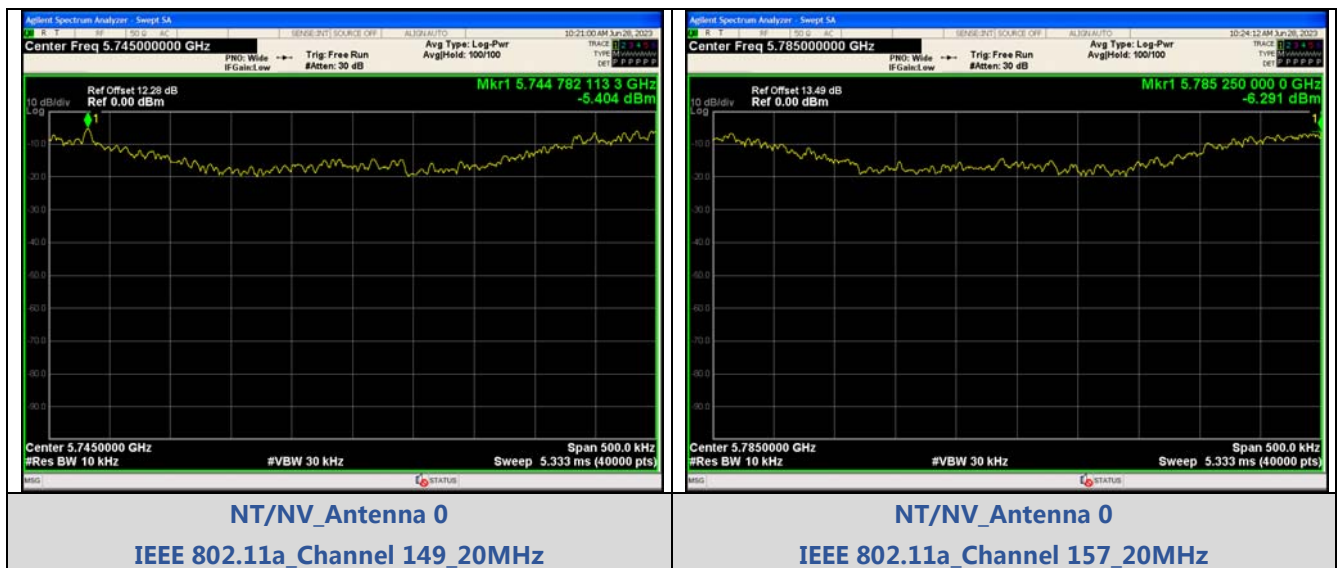



Void

NT/NV_Antenna 0
IEEE 802.11a_Channel 165_20MHz

IEEE 802.11n_20



NT/NV_Antenna 0
IEEE 802.11n_Channel 149_20MHz


NT/NV_Antenna 0
IEEE 802.11n_Channel 157_20MHz



Void

NT/NV_Antenna 0
IEEE 802.11n_Channel 165_20MHz

IEEE 802.11n_40

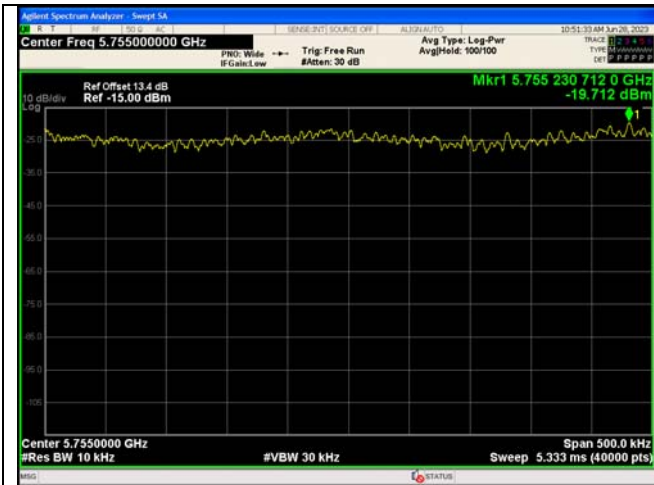

NT/NV_Antenna 0
IEEE 802.11n_Channel 151_40MHz



NT/NV_Antenna 0
IEEE 802.11n_Channel 159_40MHz

IEEE 802.11ac_20




NT/NV_Antenna 0
IEEE 802.11ac_Channel 149_20MHz



NT/NV_Antenna 0
IEEE 802.11ac_Channel 157_20MHz



NT/NV_Antenna 0
IEEE 802.11ac_Channel 165_20MHz



IEEE 802.11ac_40




NT/NV_Antenna 0
IEEE 802.11ac_Channel 151_40MHz




NT/NV_Antenna 0
IEEE 802.11ac_Channel 159_40MHz

IEEE 802.11ac_80

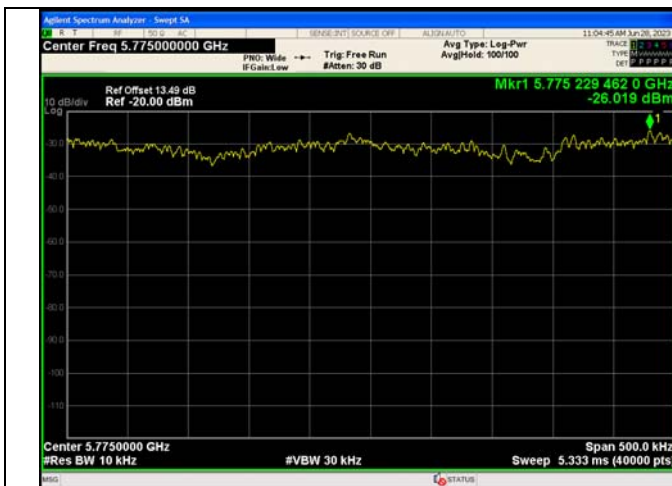

NT/NV_Antenna 0
IEEE 802.11ac_Channel 155_80MHz



Void

Test Result


Antenna B:

Condition	Mode	Ch.	Antenna	Center Frequency (MHz)	Calculated Value of Center Frequency(MHz)	Result (ppm)	Limit (ppm)	State
NT/NV	IEEE 802.11a	149	0	5745.0	5745.196336	34.18	Within authorized band	PASS
		157		5785.0	5785.245400	42.42		PASS
		165		5825.0	5824.769463	-39.58		PASS
	IEEE 802.11n_20	149		5745.0	5745.247275	43.04		PASS
		157		5785.0	5785.239625	41.42		PASS
		165		5825.0	5825.247362	42.47		PASS
	IEEE 802.11n_40	151		5755.0	5755.246337	42.8		PASS
		159		5795.0	5794.978618	-3.69		PASS
	IEEE 802.11ac_20	149		5745.0	5745.240025	41.78		PASS
		157		5785.0	5785.240212	41.52		PASS
		165		5825.0	5825.250000	42.92		PASS
	IEEE 802.11ac_40	151		5755.0	5755.239862	41.68		PASS
		159		5795.0	5795.204336	35.26		PASS
	IEEE 802.11ac_80	155		5775.0	5775.230675	39.94		PASS

Test Graphs

NT/NV

IEEE 802.11a

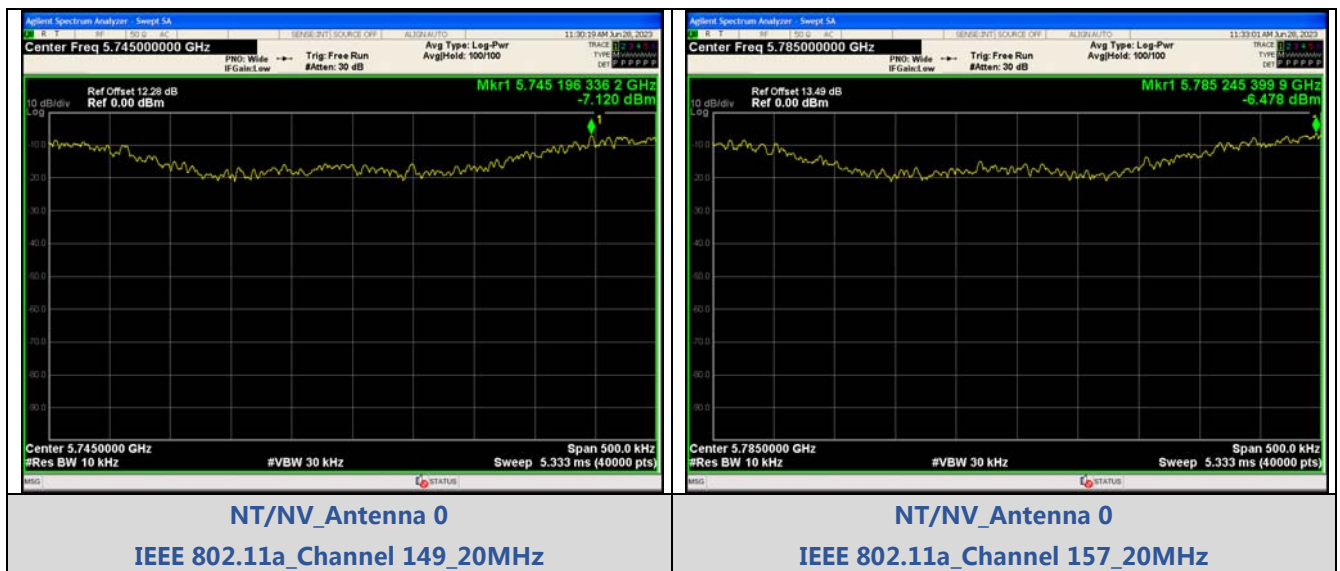



Void

NT/NV_Antenna 0
IEEE 802.11a_Channel 165_20MHz

IEEE 802.11n_20



NT/NV_Antenna 0
IEEE 802.11n_Channel 149_20MHz


NT/NV_Antenna 0
IEEE 802.11n_Channel 157_20MHz




Void

NT/NV_Antenna 0
IEEE 802.11n_Channel 165_20MHz

IEEE 802.11n_40

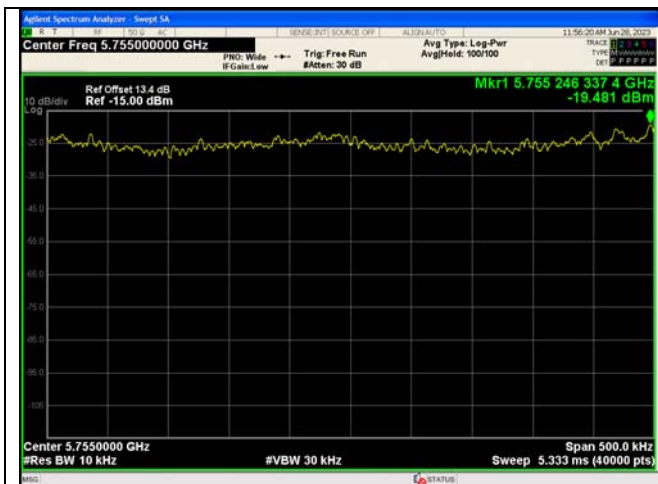

NT/NV_Antenna 0
IEEE 802.11n_Channel 151_40MHz

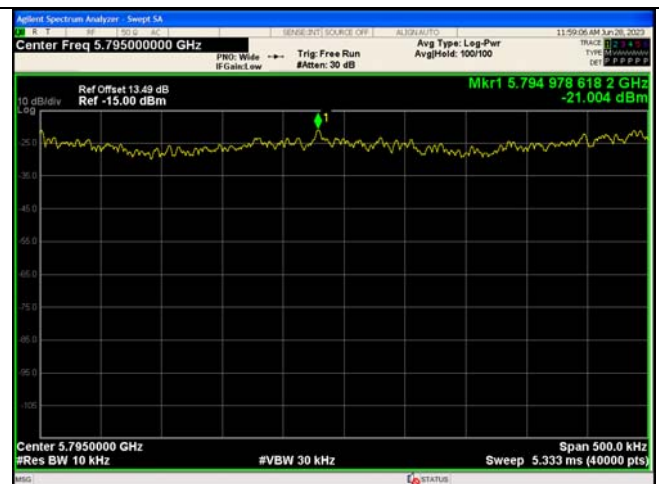

NT/NV_Antenna 0
IEEE 802.11n_Channel 159_40MHz

IEEE 802.11ac_20




NT/NV_Antenna 0
IEEE 802.11ac_Channel 149_20MHz



NT/NV_Antenna 0
IEEE 802.11ac_Channel 157_20MHz



NT/NV_Antenna 0
IEEE 802.11ac_Channel 165_20MHz



IEEE 802.11ac_40




NT/NV_Antenna 0
IEEE 802.11ac_Channel 151_40MHz




NT/NV_Antenna 0
IEEE 802.11ac_Channel 159_40MHz

IEEE 802.11ac_80

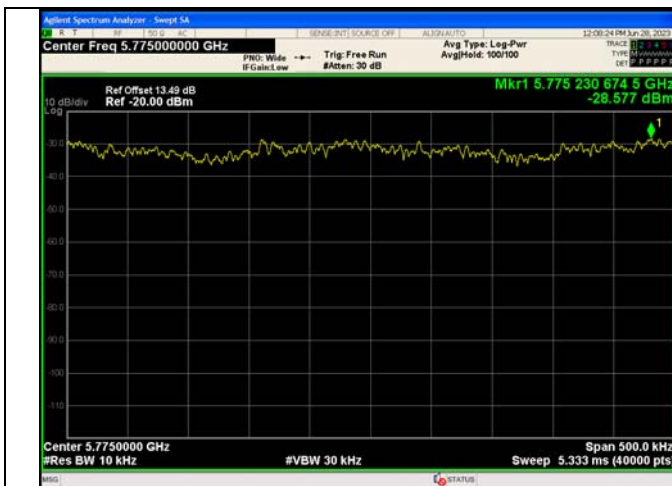

NT/NV_Antenna 0
IEEE 802.11ac_Channel 155_80MHz



Void


Antenna A+ Antenna B:
Test Result

Condition	Mode	Ch.	Antenna	Center Frequency (MHz)	Calculated Value of Center Frequency(MHz)	Result (ppm)	Limit (ppm)	State
NT/NV	IEEE 802.11n_20	149	0	5745.0	5745.224649	39.1	Within authorized band	PASS
		157		5785.0	5785.233050	40.29		PASS
		165		5825.0	5825.184286	31.64		PASS
	IEEE 802.11n_40	151		5755.0	5755.242975	42.22		PASS
		159		5795.0	5794.959843	-6.93		PASS
		IEEE 802.11ac_20		149	5745.0	5745.246912		42.98
	157			5785.0	5785.248512	42.96		PASS
	165			5825.0	5825.239012	41.03		PASS
	IEEE 802.11ac_40	151		5755.0	5754.750625	-43.33		PASS
		159		5795.0	5795.246512	42.54		PASS
	IEEE 802.11ac_80	155		5775.0	5775.220074	38.11		PASS


Test Graphs
NT/NV
IEEE 802.11n_20



IEEE 802.11n_40

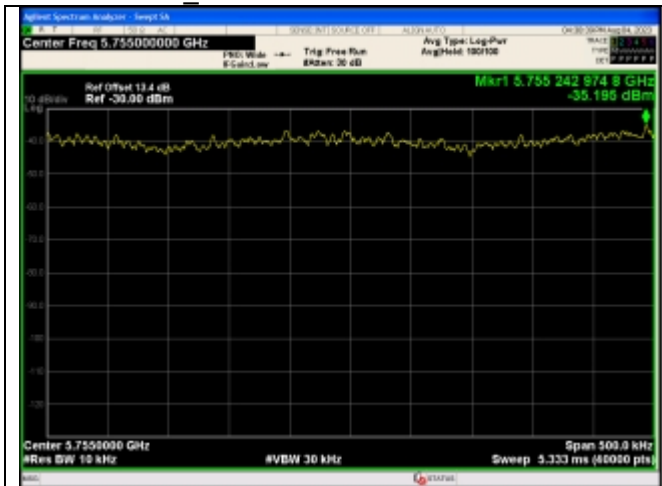

NT/NV_Antenna 0
IEEE 802.11n_Channel 151_40MHz

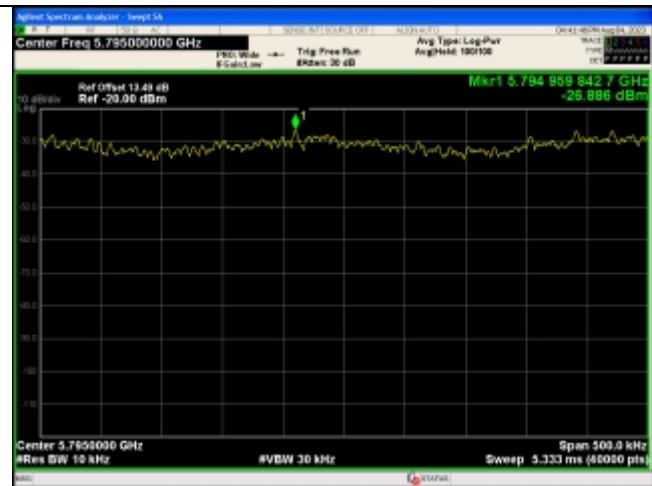


NT/NV_Antenna 0
IEEE 802.11n_Channel 159_40MHz

IEEE 802.11ac_20



NT/NV_Antenna 0
IEEE 802.11ac_Channel 149_20MHz

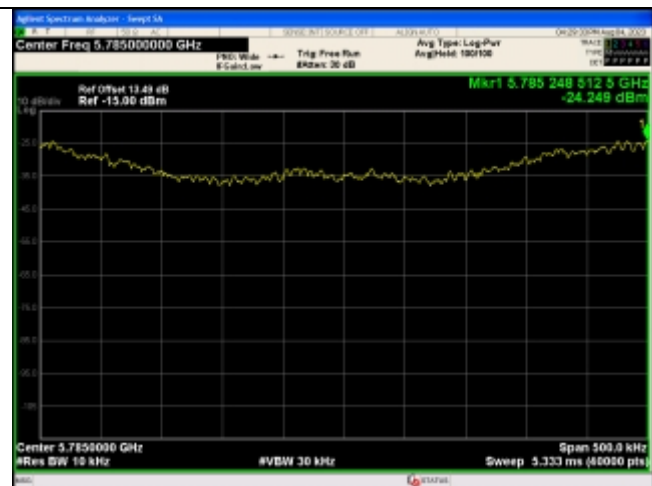


NT/NV_Antenna 0
IEEE 802.11ac_Channel 157_20MHz




NT/NV_Antenna 0
IEEE 802.11ac_Channel 165_20MHz

Void

IEEE 802.11ac_40

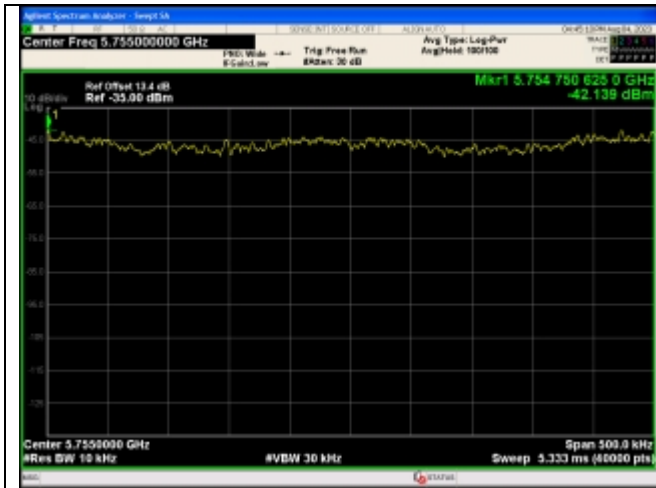


NT/NV_Antenna 0
IEEE 802.11ac_Channel 151_40MHz

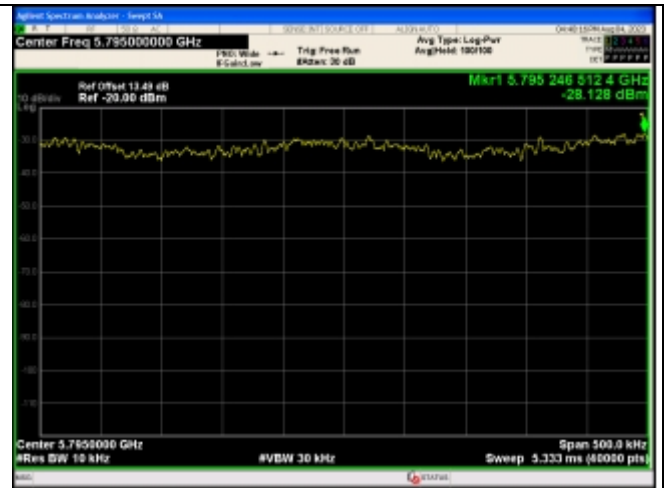

NT/NV_Antenna 0
IEEE 802.11ac_Channel 159_40MHz

IEEE 802.11ac_80

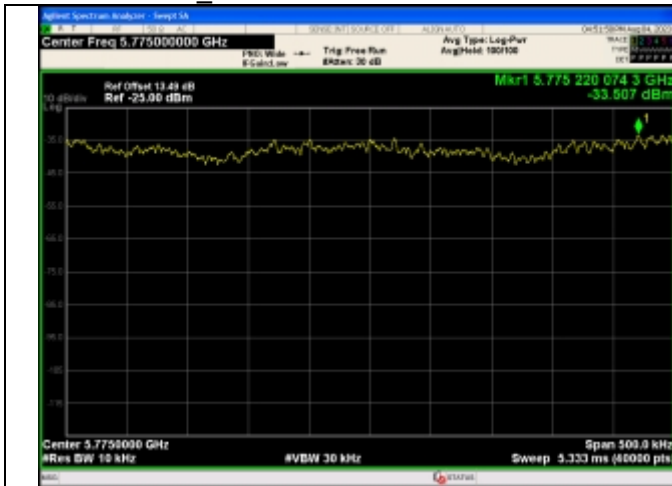

NT/NV_Antenna 0
IEEE 802.11ac_Channel 155_80MHz

Void

APPENDIX II. Conducted Peak Output Power

Antenna A:

Mode	Channel	Ant. 0 (dBm)	Corr'd Value Ant. 0 (dBm)	Limit (dBm)	Result
IEEE 802.11a	149	14.042	14.96	24	PASS
	157	12.843	13.76	24	PASS
	165	13.544	14.46	24	PASS
IEEE 802.11n_20	149	14.014	15.01	24	PASS
	157	12.840	13.83	24	PASS
	165	13.341	14.33	24	PASS
IEEE 802.11n_40	151	13.234	14.75	24	PASS
	159	12.664	14.18	24	PASS
IEEE 802.11ac_20	149	13.969	15.05	24	PASS
	157	12.768	13.85	24	PASS
	165	13.299	14.38	24	PASS
IEEE 802.11ac_40	151	18.211	19.88	24	PASS
	159	11.679	13.34	24	PASS
IEEE 802.11ac_80	155	11.526	14.05	24	PASS

Antenna B:

Mode	Channel	Ant. 0 (dBm)	Corr'd Value Ant. 0 (dBm)	Limit (dBm)	Result
IEEE 802.11a	149	13.365	14.28	24	PASS
	157	12.142	13.06	24	PASS
	165	12.564	13.48	24	PASS
IEEE 802.11n_20	149	13.212	14.21	24	PASS
	157	11.871	12.86	24	PASS
	165	12.407	13.4	24	PASS
IEEE 802.11n_40	151	12.562	14.08	24	PASS
	159	11.823	13.34	24	PASS
IEEE 802.11ac_20	149	13.186	14.26	24	PASS
	157	11.861	12.93	24	PASS
	165	12.406	13.48	24	PASS
IEEE 802.11ac_40	151	11.601	13.3	24	PASS
	159	10.833	12.54	24	PASS
IEEE 802.11ac_80	155	9.747	19.45	24	PASS

Antenna A+ Antenna B:

Mode	Channel	Ant. 0 (dBm)	Corr'd Value Ant. 0 (dBm)	Limit (dBm)	Result
IEEE 802.11n_20	149	15.482	16.402	24	PASS
	157	16.168	17.088	24	PASS
	165	16.796	17.716	24	PASS
IEEE 802.11n_40	151	12.385	13.305	24	PASS
	159	15.751	16.671	24	PASS
IEEE 802.11ac_20	149	14.703	15.623	24	PASS
	157	15.221	16.141	24	PASS
	165	13.628	14.548	24	PASS
IEEE 802.11ac_40	151	12.189	13.109	24	PASS
	159	11.377	12.297	24	PASS
IEEE 802.11ac_80	155	13.942	14.862	24	PASS