

Plot 1#: WLAN2.4G_ Body Front _Low**DUT: Smart Tablet Computer; Type: G1 TAB; Serial: 266U-1**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412MHz;Duty Cycle: 1:1.037

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.799 \text{ S/m}$; $\epsilon_r = 40.453$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 8/29/2022
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 802.11b Low/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.129 W/kg


Body Front/WLAN 802.11b Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.745 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.055 W/kg

Maximum value of SAR (measured) = 0.171 W/kg

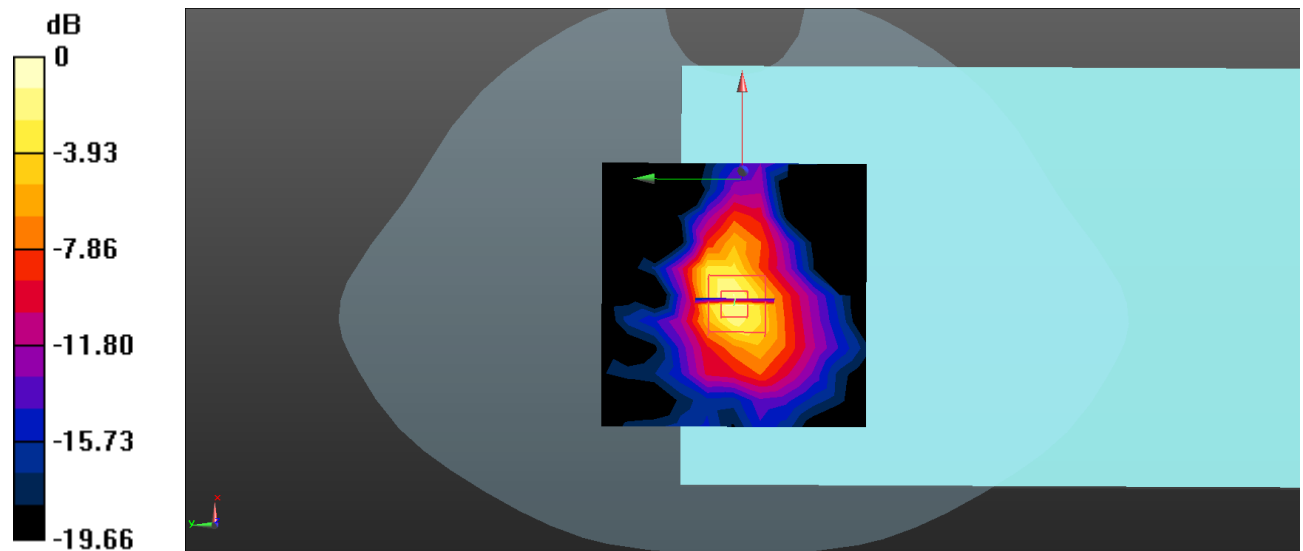

0 dB = 0.171 W/kg = -7.67 dBW/kg

Plot 2#: WLAN2.4G_ Body Back _Low**DUT: Smart Tablet Computer; Type: G1 TAB; Serial: 266U-1**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412MHz; Duty Cycle: 1:1.037

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.799 \text{ S/m}$; $\epsilon_r = 40.453$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 8/29/2022
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 802.11b Low/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.305 W/kg


Body Back/WLAN 802.11b Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.741 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.843 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.323 W/kg

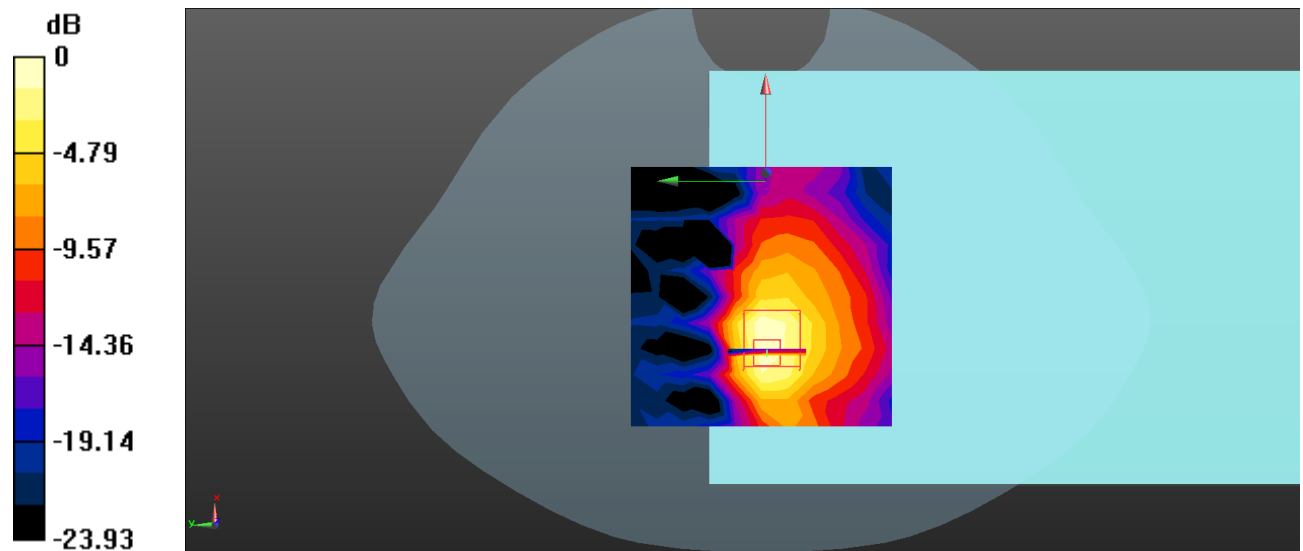

0 dB = 0.323 W/kg = -4.91 dBW/kg

Plot 3#: WLAN2.4G_ Body Top _Low**DUT: Smart Tablet Computer; Type: G1 TAB; Serial: 266U-1**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1.037

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.799 \text{ S/m}$; $\epsilon_r = 40.453$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 8/29/2022
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Top/WLAN 802.11b Low/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.511 W/kg


Body Top/WLAN 802.11b Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.05 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.186 W/kg

Maximum value of SAR (measured) = 0.579 W/kg

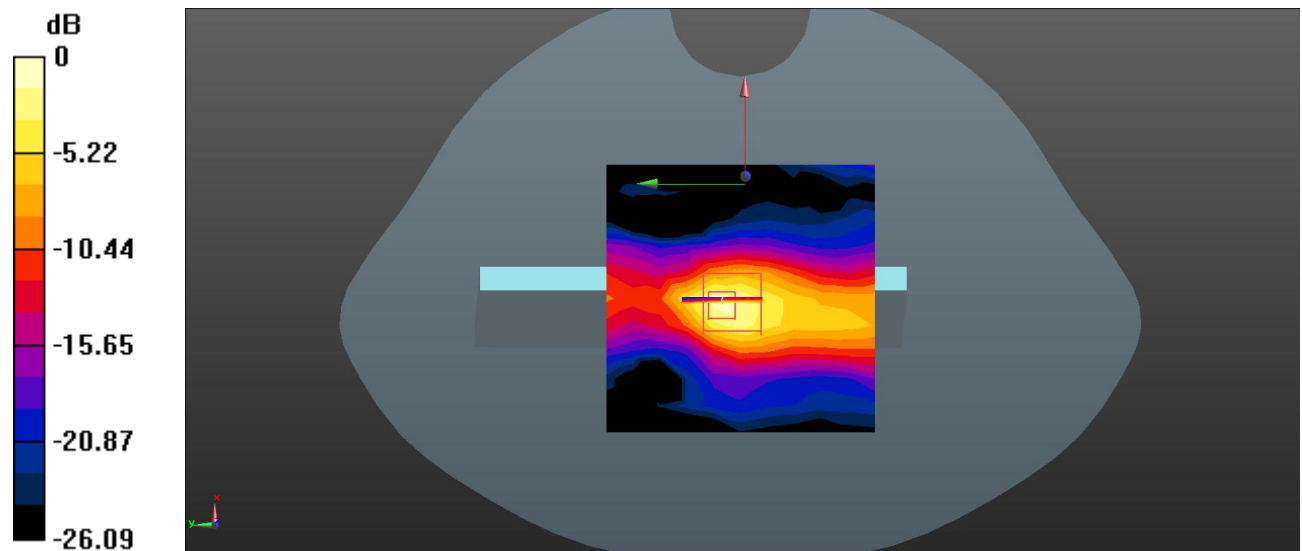

0 dB = 0.579 W/kg = -2.37 dBW/kg

Plot 4#: WLAN2.4G_ Body Top_Mid**DUT: Smart Tablet Computer; Type: G1 TAB; Serial: 266U-1**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2437MHz;Duty Cycle: 1:1.037

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.755 \text{ S/m}$; $\epsilon_r = 40.694$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 8/29/2022
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Top/WLAN 802.11b Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.297 W/kg


Body Top/WLAN 802.11b Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.47 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.839 W/kg

SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.387 W/kg

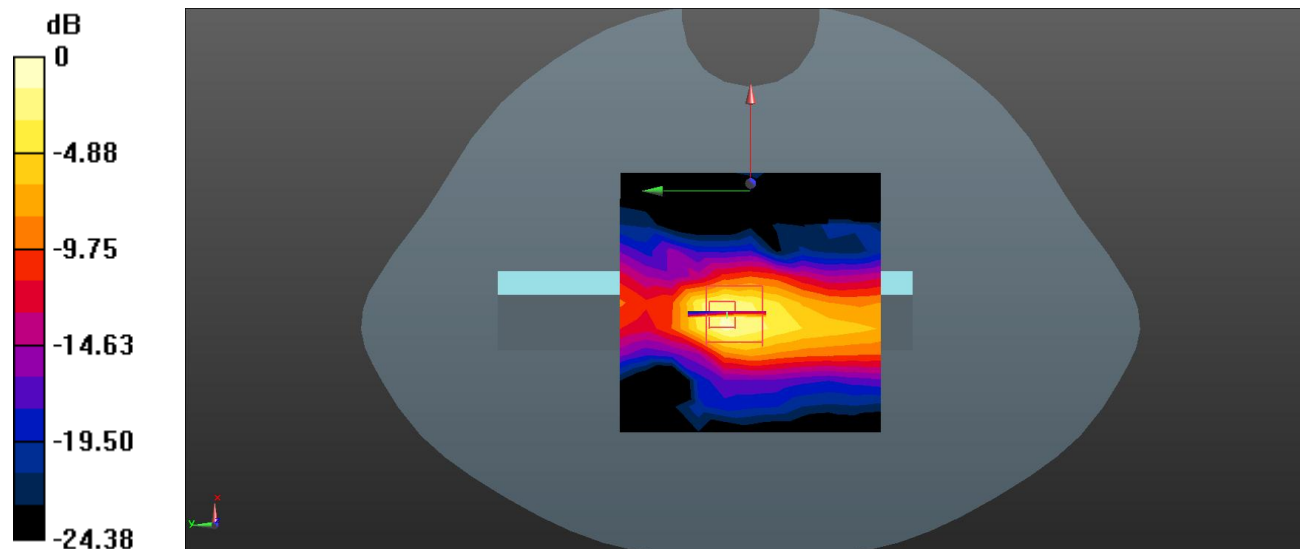

0 dB = 0.387 W/kg = -4.12 dBW/kg

Plot 5#: WLAN2.4G_ Body Top _High**DUT: Smart Tablet Computer; Type: G1 TAB; Serial: 266U-1**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2462MHz;Duty Cycle: 1:1.037

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.740 \text{ S/m}$; $\epsilon_r = 40.739$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.54, 7.54, 7.54); Calibrated: 2022/05/16
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 8/29/2022
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Top/WLAN 802.11b High/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.338 W/kg


Body Top/WLAN 802.11b High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.66 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.917 W/kg

SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.121 W/kg

Maximum value of SAR (measured) = 0.380 W/kg

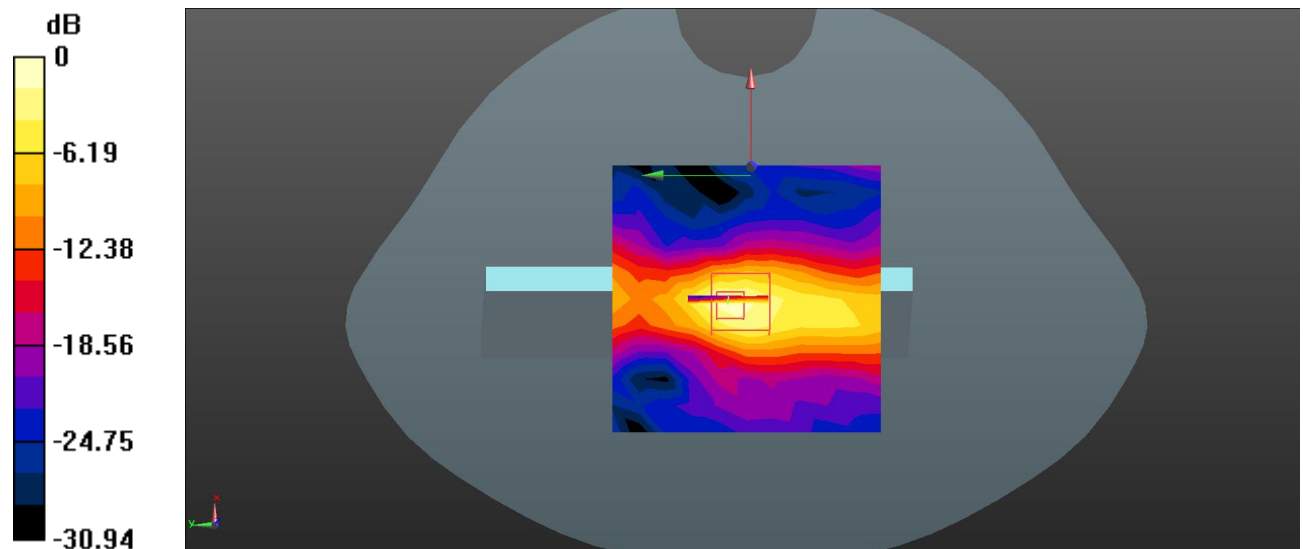

0 dB = 0.380 W/kg = -4.20 dBW/kg

Plot 6#: WLAN5.2G_ Body Front _Low**DUT: Smart Tablet Computer; Type: G1 TAB; Serial: 266U-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180MHz;Duty Cycle: 1:1.068

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.78 \text{ S/m}$; $\epsilon_r = 37.052$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.35, 5.35, 5.35); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 8/29/2022
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 5.2G 802.11a Low/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.0859 W/kg


Body Front/WLAN 5.2G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$,
 $dz=2\text{mm}$

Reference Value = 0.961 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.529 W/kg

SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.00788 W/kg

Maximum value of SAR (measured) = 0.129 W/kg

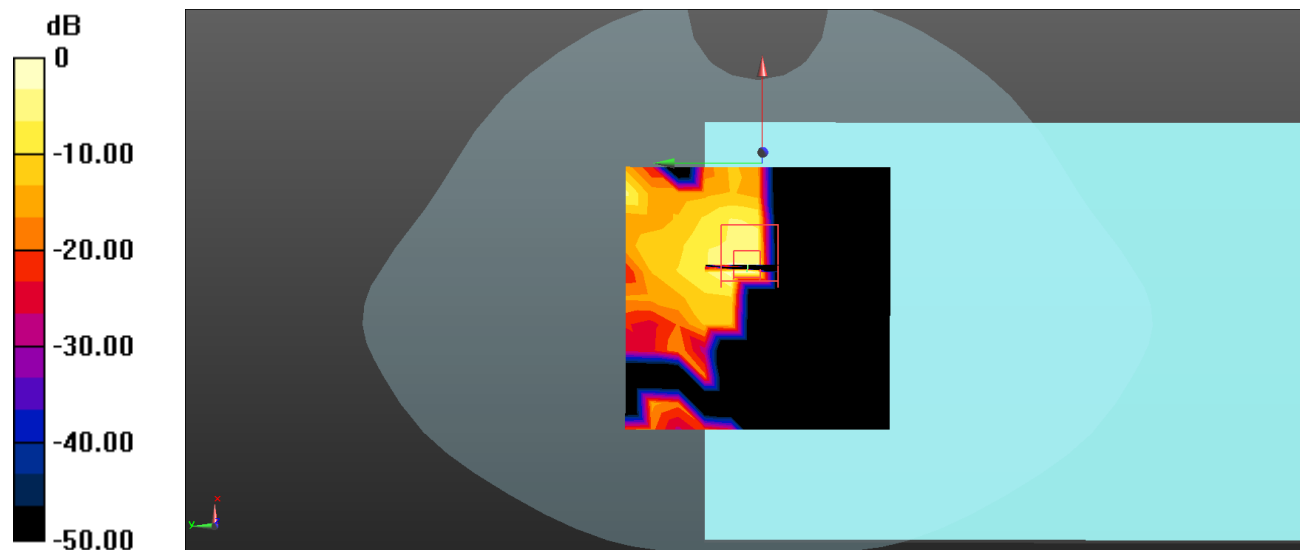

0 dB = 0.129 W/kg = -8.89 dBW/kg

Plot 7#: WLAN5.2G_ Body Back _Low**DUT: Smart Tablet Computer; Type: G1 TAB; Serial: 266U-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180MHz;Duty Cycle: 1:1.068

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.78 \text{ S/m}$; $\epsilon_r = 37.052$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.35, 5.35, 5.35); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 8/29/2022
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.2G 802.11a Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.221 W/kg


Body Back/WLAN 5.2G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.8300 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.576 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.335 W/kg

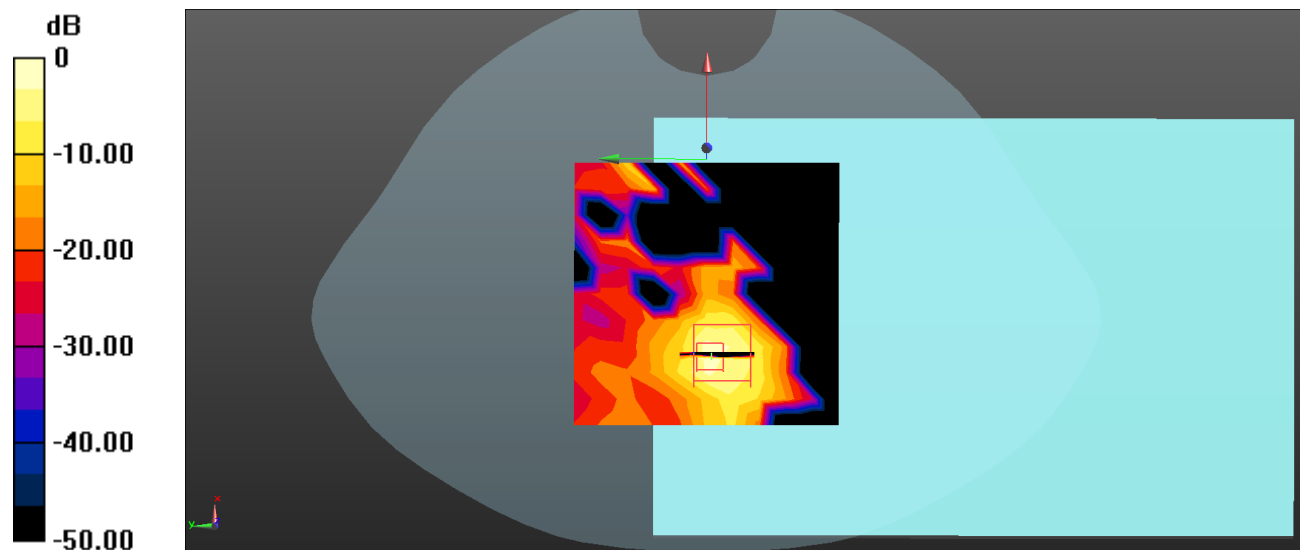

0 dB = 0.335 W/kg = -4.75 dBW/kg

Plot 8#: WLAN 5.2G _Body Top _Low**DUT: Smart Tablet Computer; Type: G1 TAB; Serial: 266U-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5180 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.78 \text{ S/m}$; $\epsilon_r = 37.052$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.35, 5.35, 5.35); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 8/29/2022
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Top/WLAN 5.2G 802.11a Low/Area Scan (13x13x1): Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$

Maximum value of SAR (measured) = 1.21 W/kg


Body Top/WLAN 5.2G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 1.453 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.57 W/kg

SAR(1 g) = 0.642 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

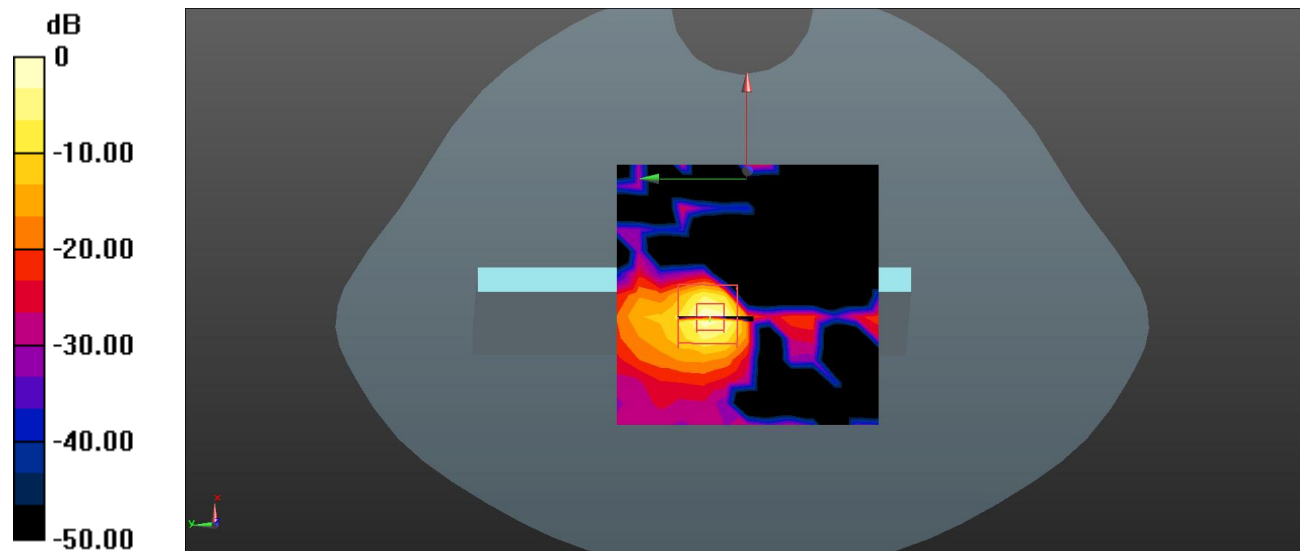

0 dB = 1.43 W/kg = 1.55 dBW/kg

Plot 9#: WLAN 5.2G_Body Top_Mid**DUT: Smart Tablet Computer; Type: G1 TAB; Serial: 266U-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5200 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.788 \text{ S/m}$; $\epsilon_r = 37.314$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.35, 5.35, 5.35); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 8/29/2022
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Top/WLAN 5.2G 802.11a Mid/Area Scan (13x13x1): Measurement grid: dx=8mm, dy=8mm

Maximum value of SAR (measured) = 1.21 W/kg


Body Top/WLAN 5.2G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.144 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 0.608 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

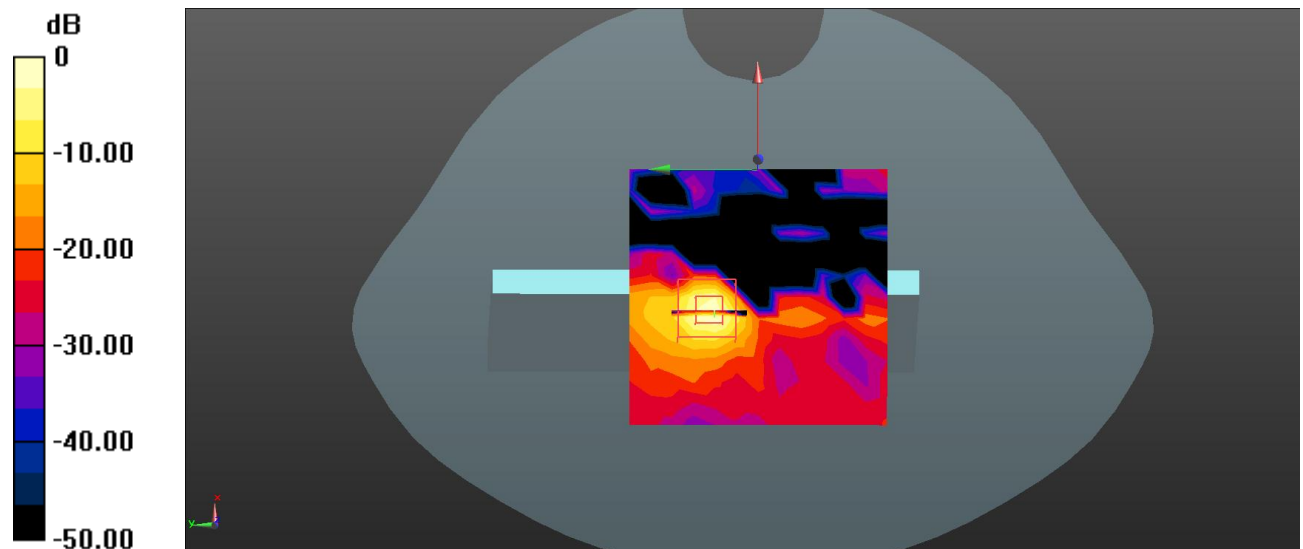

0 dB = 1.29 W/kg = 1.11 dBW/kg

Plot 10#: WLAN 5.2G_Body Top_High**DUT: Smart Tablet Computer; Type: G1 TAB; Serial: 266U-1**

Communication System: UID 0, 5.2G WiFi (0); Frequency: 5240 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5240$ MHz; $\sigma = 4.853$ S/m; $\epsilon_r = 37.075$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.35, 5.35, 5.35); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 8/29/2022
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Top/WLAN 5.2G 802.11a High/Area Scan (13x13x1): Measurement grid: dx=8mm, dy=8mm

Maximum value of SAR (measured) = 0.931 W/kg


Body Top/WLAN 5.2G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.612 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.457 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

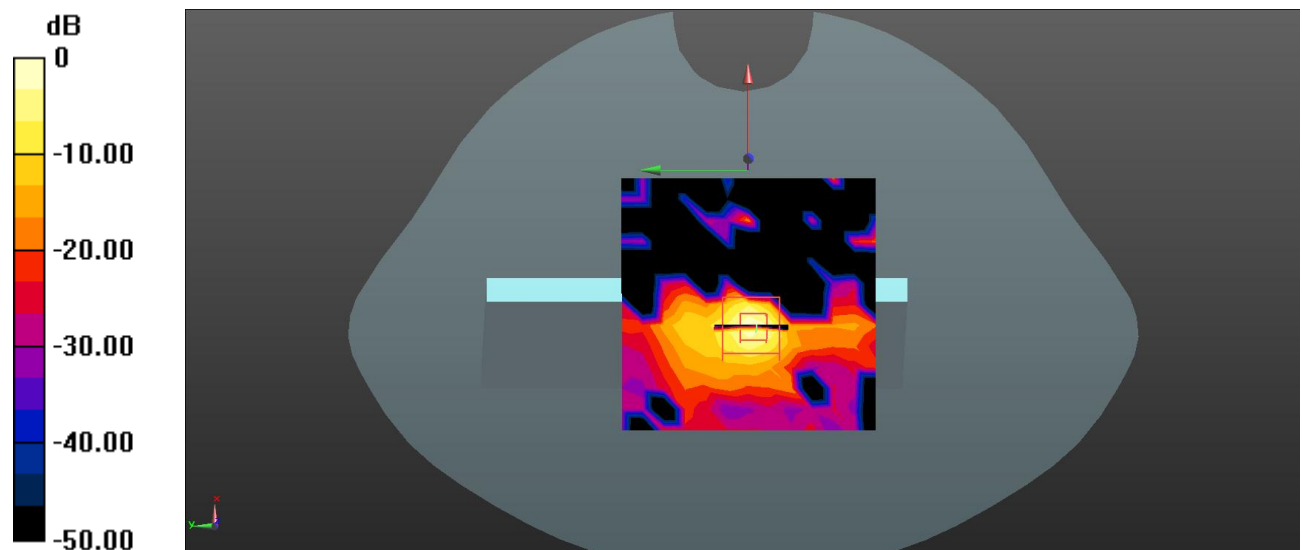

0 dB = 1.03 W/kg = 0.13 dBW/kg

Plot 11#: WLAN 5.8G _Body Front _Mid**DUT: Smart Tablet Computer; Type: G1 TAB; Serial: 266U-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.35 \text{ S/m}$; $\epsilon_r = 35.898$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.83, 4.83, 4.83); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 8/29/2022
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Front/WLAN 5.8G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.570 W/kg


Body Front/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.633 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.565 W/kg

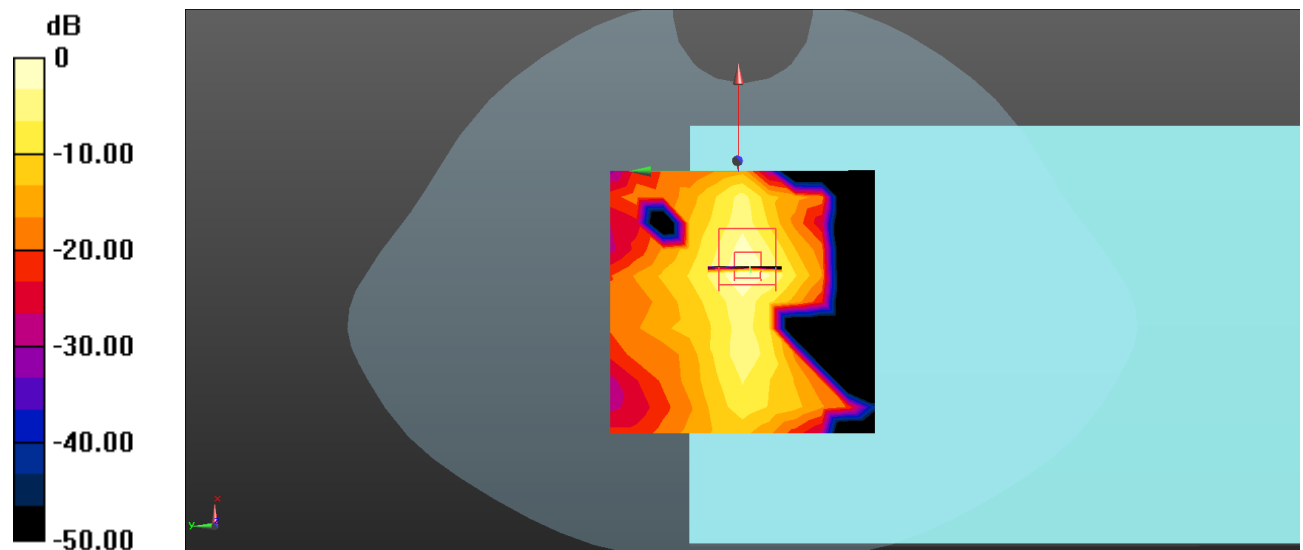

0 dB = 0.565 W/kg = -2.48 dBW/kg

Plot 12#: WLAN 5.8G _Body Back _Low**DUT: Smart Tablet Computer; Type: G1 TAB; Serial: 266U-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.258$ S/m; $\epsilon_r = 35.716$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.83, 4.83, 4.83); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 8/29/2022
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.8G 802.11a Low/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.36 W/kg


Body Back/WLAN 5.8G 802.11a Low/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.796 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 3.98 W/kg

SAR(1 g) = 0.876 W/kg; SAR(10 g) = 0.250 W/kg

Maximum value of SAR (measured) = 1.87 W/kg

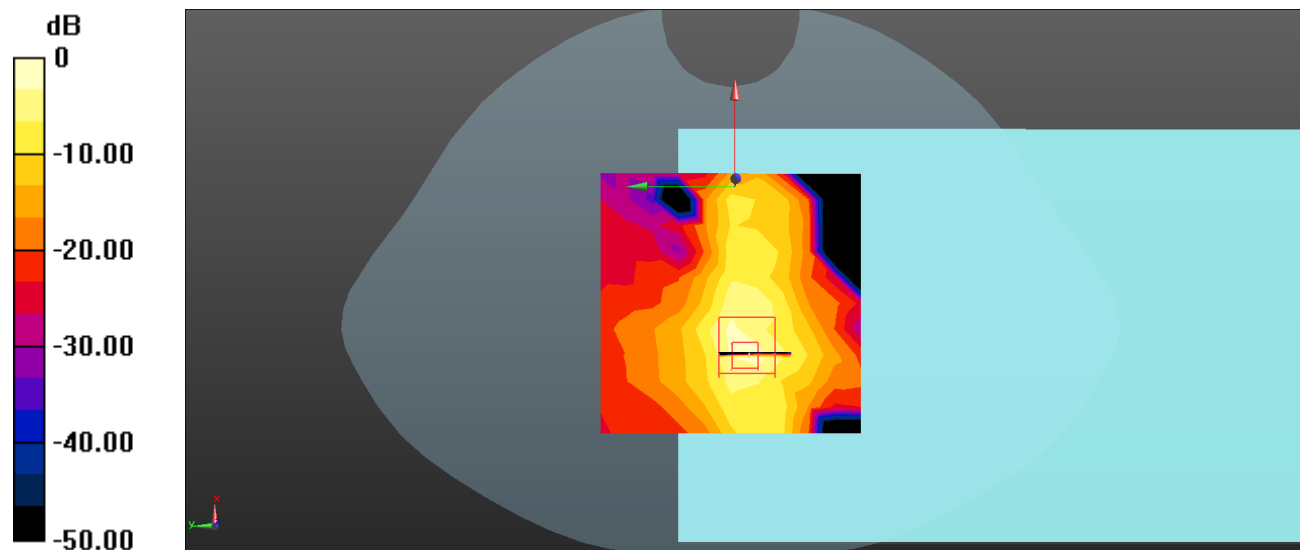

0 dB = 1.87 W/kg = 2.72 dBW/kg

Plot 13#: WLAN 5.8G _Body Back _Mid**DUT: Smart Tablet Computer; Type: G1 TAB; Serial: 266U-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.35 \text{ S/m}$; $\epsilon_r = 35.898$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.83, 4.83, 4.83); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 8/29/2022
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.8G 802.11a Mid/Area Scan (11x11x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.33 W/kg


Body Back/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 8.336 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 3.87 W/kg

SAR(1 g) = 0.860 W/kg; SAR(10 g) = 0.238 W/kg

Maximum value of SAR (measured) = 1.91 W/kg

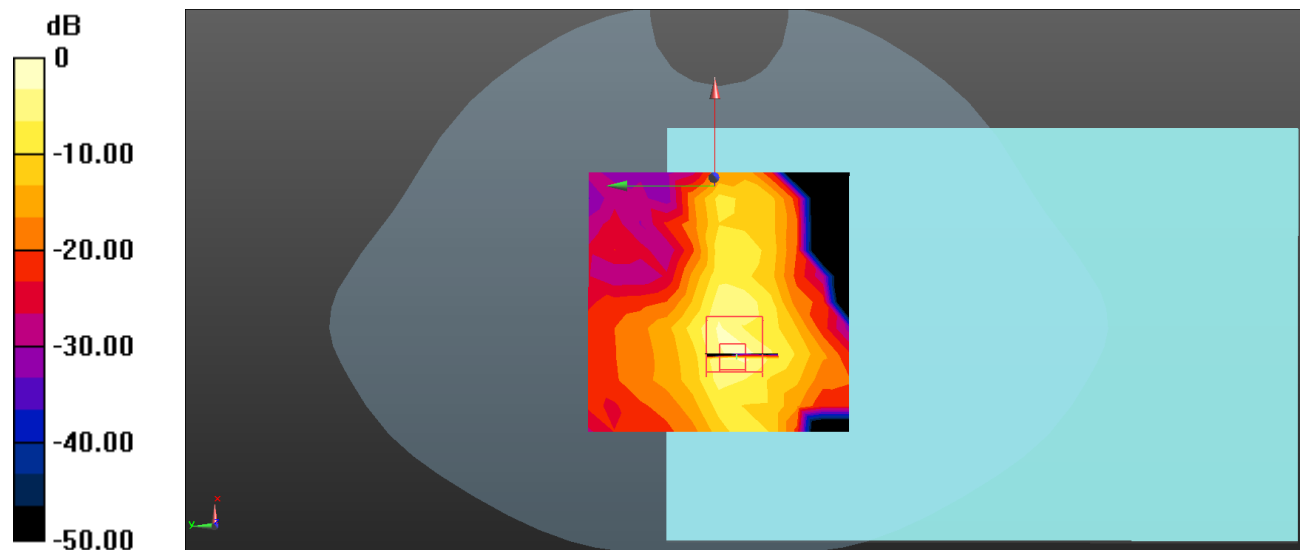

0 dB = 1.91 W/kg = 2.81 dBW/kg

Plot 14#: WLAN 5.8G_Body Back_High**DUT: Smart Tablet Computer; Type: G1 TAB; Serial: 266U-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5825 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.36$ S/m; $\epsilon_r = 36.269$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.83, 4.83, 4.83); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 8/29/2022
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WLAN 5.8G 802.11a High/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.03 W/kg


Body Back/WLAN 5.8G 802.11a High/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.979 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 5.01 W/kg

SAR(1 g) = 0.717 W/kg; SAR(10 g) = 0.189 W/kg

Maximum value of SAR (measured) = 1.83 W/kg

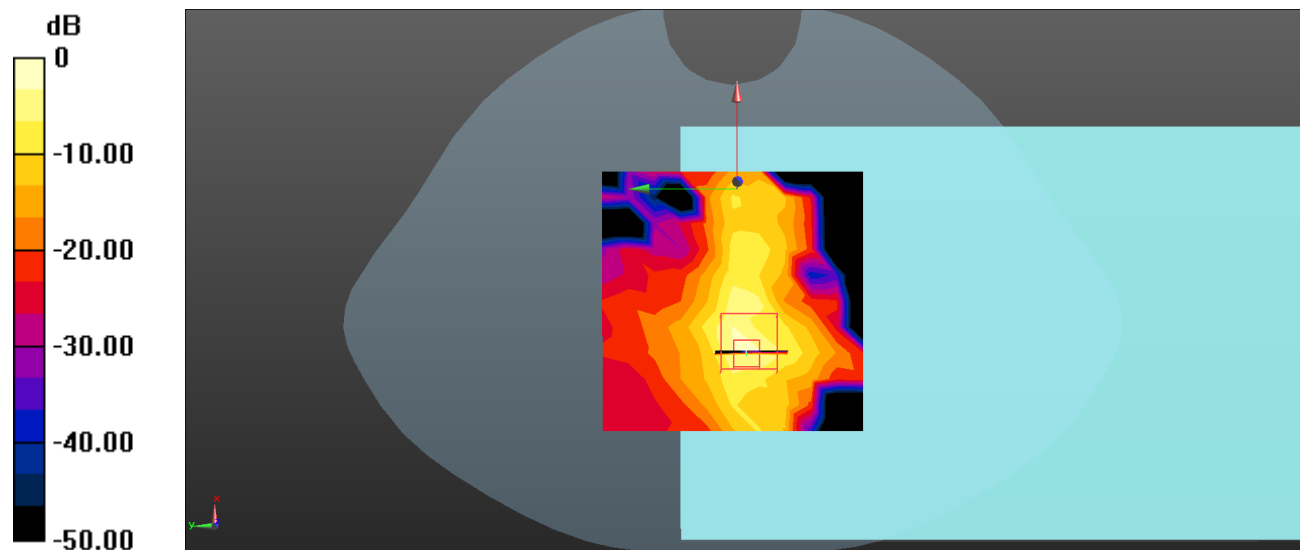

0 dB = 1.83 W/kg = 2.62 dBW/kg

Plot 15#: WLAN 5.8G _Body Top _Mid**DUT: Smart Tablet Computer; Type: G1 TAB; Serial: 266U-1**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5785 MHz; Duty Cycle: 1:1.068

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.35$ S/m; $\epsilon_r = 35.898$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.83, 4.83, 4.83); Calibrated: 2022/05/16
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1325; Calibrated: 8/29/2022
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Top/WLAN 5.8G 802.11a Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.864 W/kg


Body Top/WLAN 5.8G 802.11a Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.560 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 5.32 W/kg

SAR(1 g) = 0.653 W/kg; SAR(10 g) = 0.182 W/kg

Maximum value of SAR (measured) = 1.44 W/kg

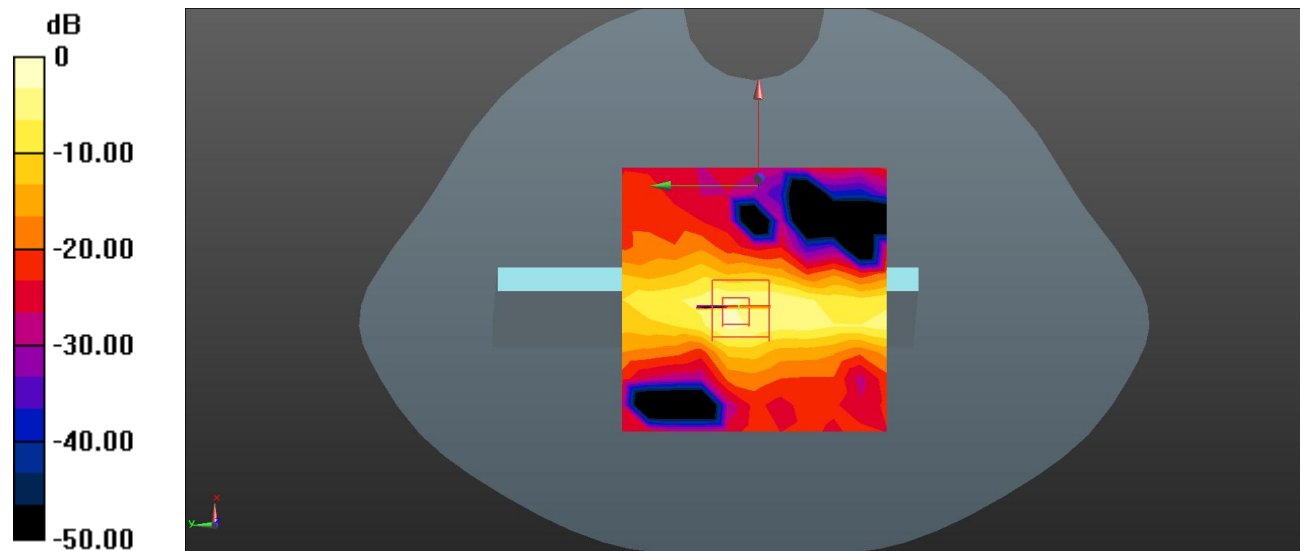

0 dB = 1.44 W/kg = 1.58 dBW/kg