

# TEST REPORT

Applicant Name : Shenzhen Youmi Intelligent Technology Co., Ltd.  
Address : 406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China  
Report Number : RA230324-14508E-RFB  
FCC ID: 2ATZ4-G3MECHA  
IC: 26074-G3MECHA

## Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2; RSS-247, ISSUE 2, FEBRUARY 2017

## Sample Description

Product Type: Smart phone  
Model No.: G3 Mecha  
Multiple Model(s) No.: N/A  
Trade Mark: UMIDIGI  
Date Received: 2023/03/24  
Report Date: 2023/04/18

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:

*Roger Ling*

Roger Ling  
EMC Engineer

## Approved By:

*Candy Li*

Candy Li  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China  
Tel: +86 755-26503290 Fax: +86-755-26503290 Web: www.atc-lab.com

## **TABLE OF CONTENTS**

<b>DOCUMENT REVISION HISTORY .....</b>	<b>4</b>
<b>GENERAL INFORMATION.....</b>	<b>5</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	5
OBJECTIVE .....	5
TEST METHODOLOGY .....	5
MEASUREMENT UNCERTAINTY .....	6
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
DESCRIPTION OF TEST CONFIGURATION .....	7
EQUIPMENT MODIFICATIONS .....	8
EUT EXERCISE SOFTWARE .....	8
DUTY CYCLE .....	8
SUPPORT EQUIPMENT LIST AND DETAILS .....	11
EXTERNAL I/O CABLE.....	12
BLOCK DIAGRAM OF TEST SETUP .....	12
<b>SUMMARY OF TEST RESULTS .....</b>	<b>13</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>14</b>
<b>FCC§15.247 (I), §1.1307 (B)(1)&amp;§2.1093 – RF EXPOSURE .....</b>	<b>15</b>
APPLICABLE STANDARD .....	15
<b>RSS-102 § 2.5.1 –EXEMPTION LIMITS FOR ROUTINE EVALUATION-SAR EVALUATION .....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
TEST RESULT: .....	17
<b>§15.203&amp;RSS-GEN §6.8ANTENNA REQUIREMENT.....</b>	<b>18</b>
APPLICABLE STANDARD .....	18
ANTENNA CONNECTOR CONSTRUCTION .....	19
<b>§15.207 (A)&amp;RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS .....</b>	<b>20</b>
APPLICABLE STANDARD .....	20
EUT SETUP .....	21
EMI TEST RECEIVER SETUP.....	21
TEST PROCEDURE .....	21
CORRECTED FACTOR & MARGIN CALCULATION .....	22
TEST DATA .....	22
<b>FCC§15.205, §15.209,§15.247(D)&amp;RSS-GEN § 8.10 &amp; RSS-247 § 5.5SPURIOUS EMISSIONS .....</b>	<b>27</b>
APPLICABLE STANDARD .....	27
EUT SETUP .....	27
EMI TEST RECEIVER& SPECTRUM ANALYZER SETUP .....	28
TEST PROCEDURE .....	29
FACTOR& MARGIN CALCULATION .....	29
TEST DATA .....	29

<b>§15.247 (A)(2)&amp;RSS-GEN§6.7RSS-247 § 5.2 (A)99% OCCUPIED BANDWIDTH &amp;6DB EMISSION BANDWIDTH.....</b>	<b>42</b>
APPLICABLE STANDARD .....	42
TEST PROCEDURE .....	42
TEST DATA .....	43
<b>§15.247(B)(3)&amp;RSS-247 § 5.4(D)MAXIMUM CONDUCTED OUTPUT POWER .....</b>	<b>63</b>
APPLICABLE STANDARD .....	63
TEST PROCEDURE .....	63
TEST DATA .....	64
<b>§15.247(D)&amp;RSS-247 § 5.5100KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>69</b>
APPLICABLE STANDARD .....	69
TEST PROCEDURE .....	69
TEST DATA .....	69
<b>§15.247(E)&amp;RSS-247 § 5.2 (B)POWER SPECTRAL DENSITY .....</b>	<b>76</b>
APPLICABLE STANDARD .....	76
TEST PROCEDURE .....	76
TEST DATA .....	77

**DOCUMENT REVISION HISTORY**

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230324-14508E-RFB	Original Report	2023/04/18

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

HVIN	G2239U-UF-V3
FVIN	UMIDIGI_G3_Mecha_V1-0
Frequency Range	BLE_1M/2M: 2402-2480MHz Wi-Fi: 2412-2462MHz
Maximum Conducted Output Power	BLE 1M: -3.68dBm, BLE 2M: -3.80dBm Wi-Fi: 16.80dBm(802.11b), 16.11dBm(802.11g),15.13dBm(802.11n-HT20) 14.14dBm(802.11 n-HT40)
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification*	1.76dBi (provided by the applicant)
Voltage Range	DC 3.87V from battery or DC 5V from adapter
Sample serial number	RE&CE: 23MG-2 RF: 23N5-2 (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter 1 information	Model: HJ-0502000W2-US Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5V, 2A
Adapter 2 information	Model: HF-0502000U Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 2A

### Objective

This report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247, Issue 2, February 2017 of the Innovation, Science and Economic Development Canada rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247, Issue 2, February 2017.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

## Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		$0.082 \times 10^{-7}$
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz -26.5GHz	5.06dB
	26.5GHz -40GHz	4.72dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For Wi-Fi mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20, EUT was tested with Channel 1, 6 and 11.

For 802.11n-HT40, EUT was tested with Channel 3, 6 and 9.

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

## Equipment Modifications

No modification was made to the EUT tested.

## EUT Exercise Software

EUT was test in engineering mode and the power level as below:

The worst case was performed under:


Mode	Data rate	Power Level*		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	Default	Default	Default
802.11g	6Mbps	Default	Default	Default
802.11n-HT20	MCS0	Default	Default	Default
802.11n-HT40	MCS0	Default	Default	Default
BLE	1Mbps	Default	Default	Default
	2Mbps	Default	Default	Default

The worse-case data rates are determined to be as follows for each mode based upon investigations by measuring the output power and PSD across all data rated bandwidths, and modulations.

The power level was provided by the applicant.

## Duty Cycle


### 802.11b Mode

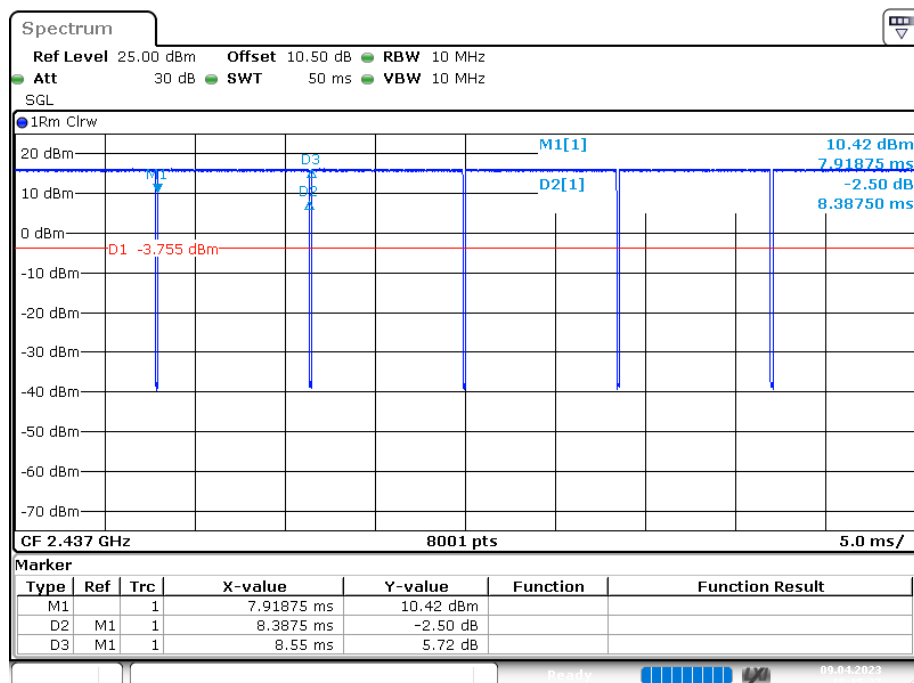

Date: 9.APR.2023 18:15:28




## 802.11g Mode

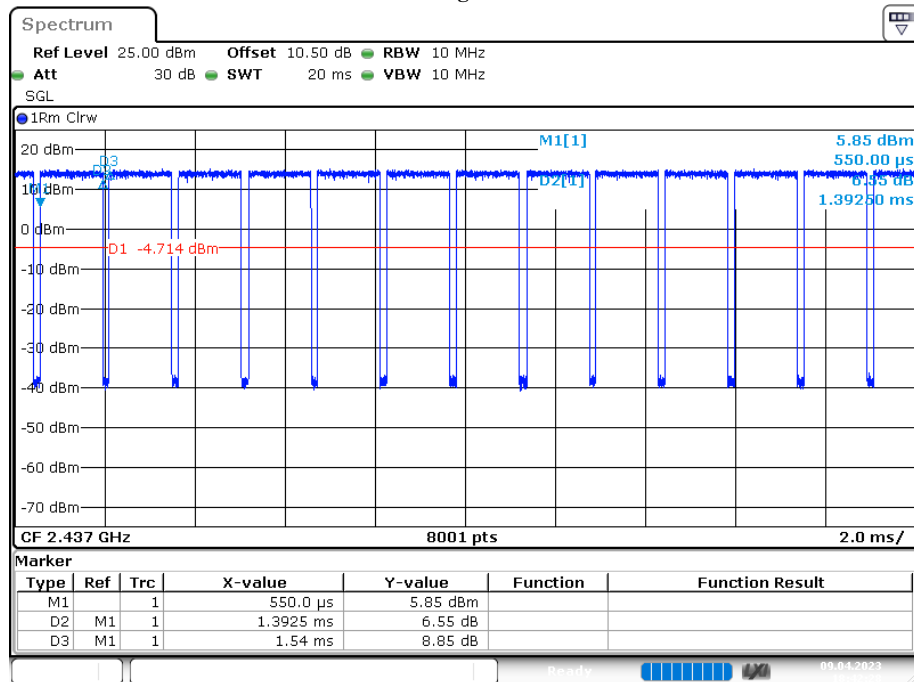


Date: 9.APR.2023 18:42:29

## 802.11n20

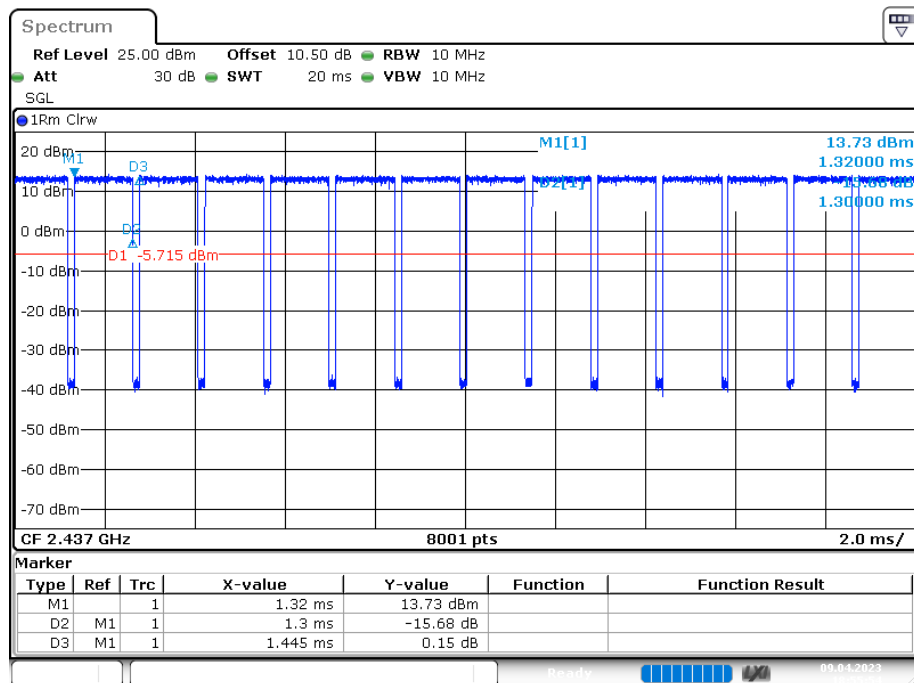


Date: 9.APR.2023 18:55:54

## 802.11n40

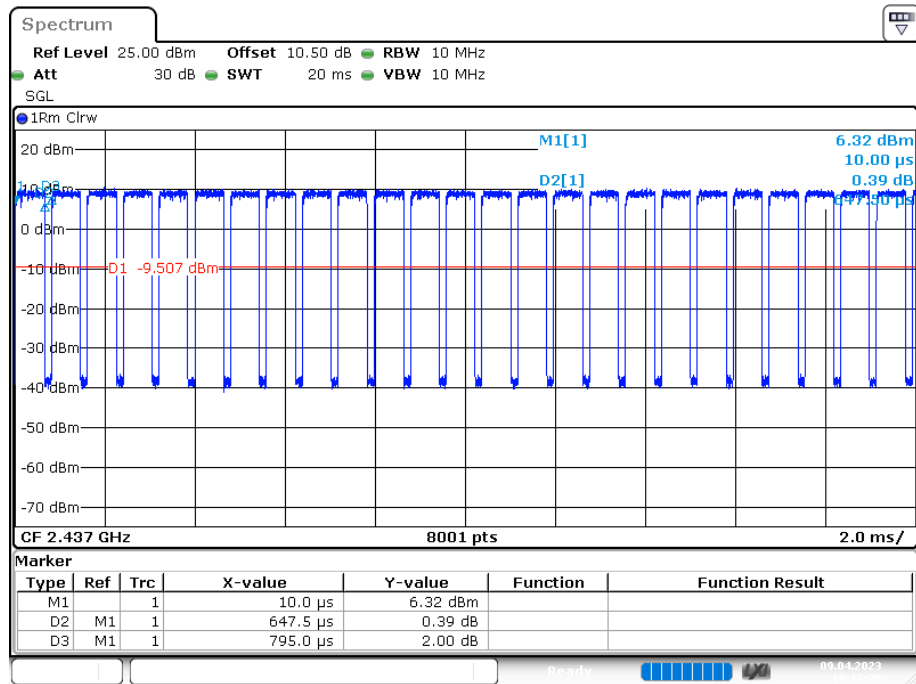


Date: 9.APR.2023 19:17:25

## BLE-1M:

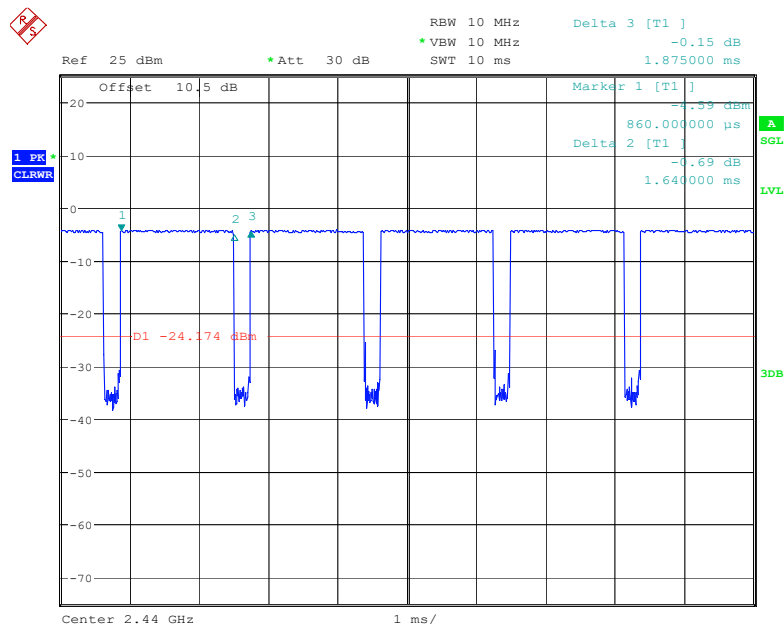

Date: 7.APR.2023 21:13:33

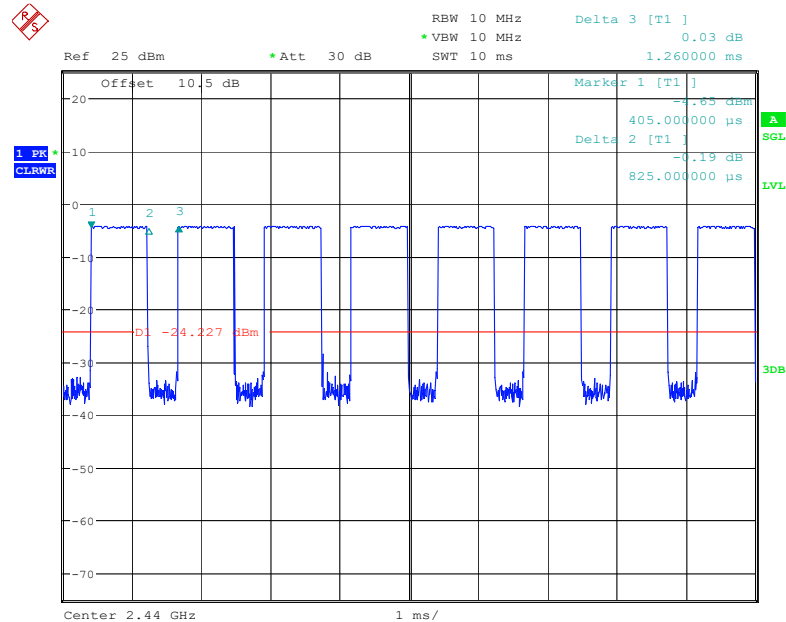**BLE-2M:**

Date: 7.APR.2023 21:29:15

Mode	Ton (ms)	Ton+off (ms)	Duty Cycle (%)	Duty cycle factor (dB)	1/T minimum VBW setting (kHz)
802.11b	8.39	8.55	98.13	-	-
802.11g	1.39	1.54	90.26	0.45	0.719
802.11n-HT20	1.30	1.45	89.66	0.47	0.769
802.11n-HT40	0.65	0.80	81.25	0.90	1.538
BLE 1M	1.640	1.875	87.47	0.58	0.610
BLE 2M	0.825	1.260	65.48	1.84	1.212

Note: duty cycle factor=10\*log(1/duty cycle)

**Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

For conducted emission

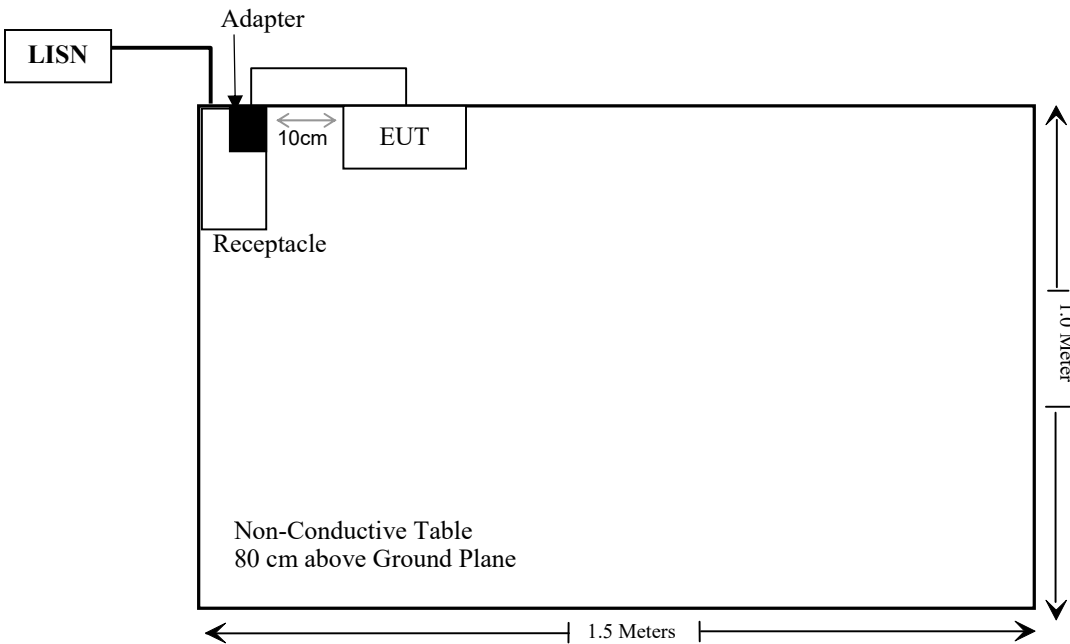

For Radiated Emissions:

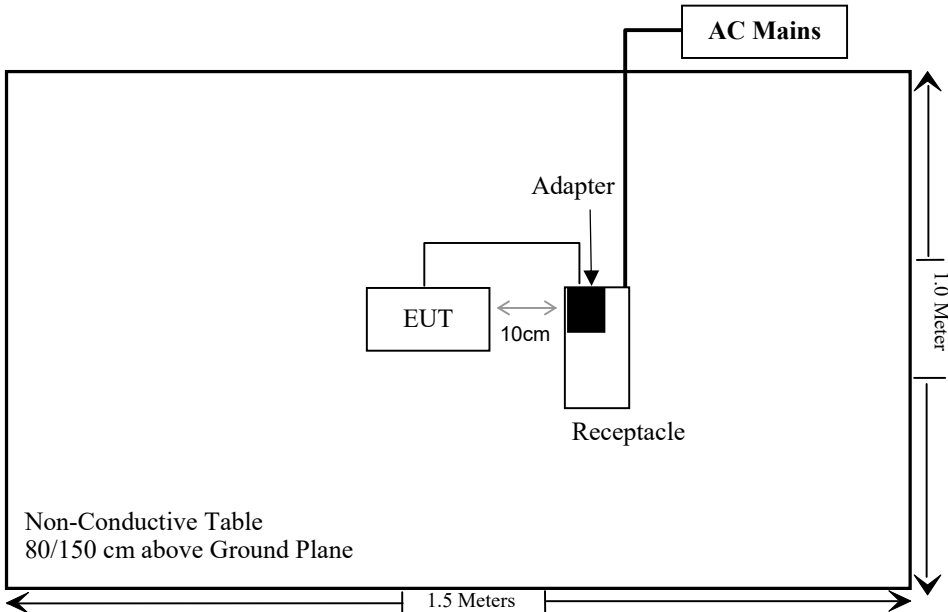

## SUMMARY OF TEST RESULTS

FCC Rules	RSS Rules	Description of Test	Result
FCC§15.247 (i), §1.1307 (b) (1) &§2.1093	/	RF Exposure	Compliant
/	RSS-102 § 2.5.1	Exemption Limits For Routine Evaluation-SAR evaluation	Compliant
§15.203	RSS-Gen§6.8	Antenna Requirement	Compliant
§15.207 (a)	RSS-Gen§8.8	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	RSS-GEN § 8.10 &RSS-247 § 5.5	Spurious Emissions	Compliant
§15.247 (a)(2)	RSS- Gen§6.7 RSS-247 § 5.2 (a)	99% Occupied Bandwidth &6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	RSS-247 § 5.4(d)	Maximum Conducted Output Power	Compliant
§15.247(d)	RSS-247 § 5.5	100kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	RSS-247 §5.2 (b)	Power Spectral Density	Compliant

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted emission test</b>					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Conducted Emission Test Software: e3 19821b (V9)					
<b>Radiated emission test</b>					
Rohde& Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2022/11/30	2025/11/29
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Radiated Emission Test Software: e3 19821b (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
<b>RF Conducted Test</b>					
Agilent	USB wideband power sensor	U2021XA	MY54250003	2022/6/27	2023/6/26
Rohde&Schwarz	Spectrum Analyzer	FSU26	200982	2022/07/04	2023/07/03
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
WEINSCHTEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24

\* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC§15.247 (i), §1.1307 (b)(1)&§2.1093 – RF EXPOSURE

### Applicable Standard

According to FCC §2.1093 and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

1.  $f(\text{GHz})$  is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test Exclusion.

### Measurement Result

For worst case:

Mode	Frequency (MHz)	Max tune-up conducted power (dBm)	Max tune-up conducted power (mW)	Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
BLE	2402-2480	-3.0	0.50	5	0.2	3.0	Yes

**Result: No SAR test is required**

For **Wi-Fi mode**, please refer to the SAR report: RA230324-14508E-20A.

## RSS-102 § 2.5.1 –EXEMPTION LIMITS FOR ROUTINE EVALUATION-SAR EVALUATION

### Applicable Standard

According to RSS-102 Issue 5§ (2.5.1), SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table 1.

**Table 1: SAR evaluation – Exemption limits for routine evaluation based on frequency and separation distance<sup>4,5</sup>**

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥50 mm
≤300	223 mW	254 mW	284 mW	315 mW	345 mW
450	141 mW	159 mW	177 mW	195 mW	213 mW
835	80 mW	92 mW	105 mW	117 mW	130 mW
1900	99 mW	153 mW	225 mW	316 mW	431 mW
2450	83 mW	123 mW	173 mW	235 mW	309 mW
3500	86 mW	124 mW	170 mW	225 mW	290 mW
5800	56 mW	71 mW	85 mW	97 mW	106 mW

4. The exemption limits in Table 1 are based on measurements and simulations of half-wave dipole antennas at separation distances of 5 mm to 25 mm from a flat phantom, providing a SAR value of approximately 0.4 W/kg for 1 g of tissue. For low frequencies (300 MHz to 835 MHz), the exemption limits are derived from a linear fit. For high frequencies (1900 MHz and above), the exemption limits are derived from a third order polynomial fit.

5. Transmitters operating between 0.003-10 MHz, meeting the exemption from routine SAR evaluation, shall demonstrate compliance to the instantaneous limits in Section 4.



Output power level shall be the higher of the maximum conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power. For controlled use devices where the 8 W/kg for 1 gram of tissue applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 5. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 2.5. If the operating frequency of the device is between two frequencies located in Table 1, linear interpolation shall be applied for the applicable separation distance. For test separation distance less than 5 mm, the exemption limits for a separation distance of 5 mm can be applied to determine if a routine evaluation is required.

For medical implants devices, the exemption limit for routine evaluation is set at 1 mW. The output power of a medical implants device is defined as the higher of the conducted or e.i.r.p to determine whether the device is exempt from the SAR evaluation.

### Test Result:

For worst case:

#### For BLE mode:

The higher of the conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power:

$$(2480-2450)/(3500-2450) = (4-P)/(4-2)$$

The exemption limit of 2480MHz is  $P = 3.94\text{mW}$

The antenna gain is 1.76dBi

The maximum tune up conducted power is -3.0dBm

The maximum tune up EIRP is -1.24dBm (0.75mW), which less than 3.94mW@2480MHz exemption limit

**So the stand-alone SAR test is not required.**

For **Wi-Fi mode**, please refer to the SAR report: RA230324-14508E-20B.

## § 15.203&RSS-Gen §6.8ANTENNA REQUIREMENT

### Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

Antenna must be permanently attached to the unit.

Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

**Antenna Connector Construction**

The EUT has one internal antenna arrangement which were permanently attached for Wi-Fi and BLE, the antenna gain is 1.76dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Antenna Gain	Impedance	Frequency Range
FPC	1.76dBi	50 $\Omega$	2.4~2.5GHz

**Result: Compliant**

## § 15.207 (a)&RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC § 15.207 (a)&RSS-GEN §8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50  $\mu$ H / 50  $\Omega$  line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.


Table 4 - AC Power Lines Conducted Emission Limits		
Frequency range (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 <sup>1</sup>	56 to 46 <sup>1</sup>
0.5 – 5	56	46
5 – 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.
- Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

## EUT Setup

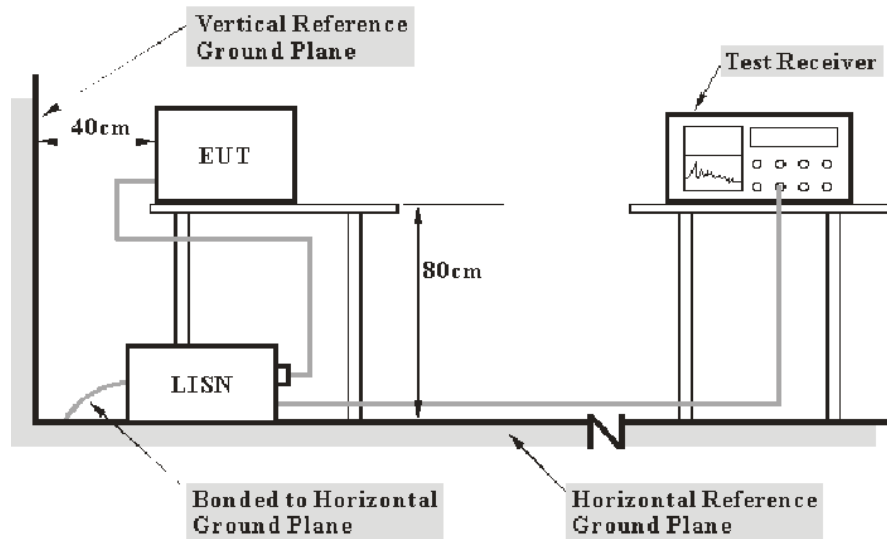

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207& RSS-247/RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data


### Environmental Conditions

Temperature:	23°C
Relative Humidity:	52%
ATM Pressure:	101.0 kPa

*The testing was performed by Lipa on 2023-04-07.*

*EUT operation mode: Transmitting (worst case is 802.11b mode, Middle channel)*


For Adapter 1(HJ-0502000W2-US)  
AC 120V/60 Hz, Line

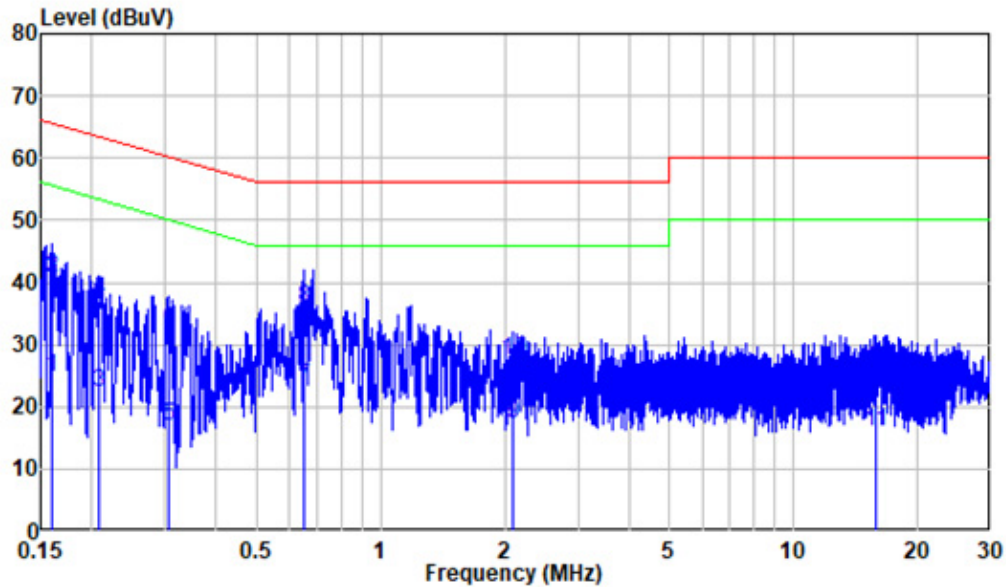

Site : Shielding Room  
Condition: Line

Mode : 2.4G WIFI Transmitting  
Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.160	10.22	14.48	24.70	55.48	-30.78	Average
2	0.160	10.22	30.57	40.79	65.48	-24.69	QP
3	0.207	10.30	11.96	22.26	53.34	-31.08	Average
4	0.207	10.30	26.69	36.99	63.34	-26.35	QP
5	0.305	10.30	6.48	16.78	50.11	-33.33	Average
6	0.305	10.30	22.14	32.44	60.11	-27.67	QP
7	0.650	10.39	12.87	23.26	46.00	-22.74	Average
8	0.650	10.39	25.61	36.00	56.00	-20.00	QP
9	2.092	10.42	6.88	17.30	46.00	-28.70	Average
10	2.092	10.42	16.97	27.39	56.00	-28.61	QP
11	15.833	10.22	5.80	16.02	50.00	-33.98	Average
12	15.833	10.22	15.86	26.08	60.00	-33.92	QP

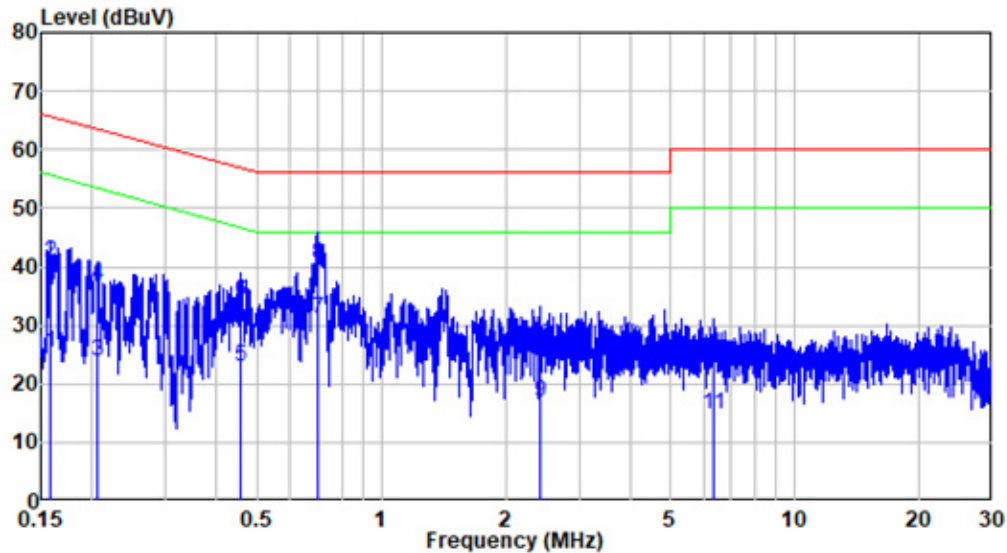**AC 120V/60 Hz, Neutral**


Site : Shielding Room  
Condition: Neutral

Mode : 2.4G WIFI Transmitting  
Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.158	9.80	15.55	25.35	55.59	-30.24	Average
2	0.158	9.80	30.85	40.65	65.59	-24.94	QP
3	0.207	9.80	13.99	23.79	53.34	-29.55	Average
4	0.207	9.80	26.94	36.74	63.34	-26.60	QP
5	0.456	9.80	13.23	23.03	46.76	-23.73	Average
6	0.456	9.80	24.18	33.98	56.76	-22.78	QP
7	0.698	9.81	21.17	30.98	46.00	-15.02	Average
8	0.698	9.81	30.63	40.44	56.00	-15.56	QP
9	2.407	9.82	7.02	16.84	46.00	-29.16	Average
10	2.407	9.82	16.84	26.66	56.00	-29.34	QP
11	6.335	9.86	5.03	14.89	50.00	-35.11	Average
12	6.335	9.86	13.91	23.77	60.00	-36.23	QP




For Adapter 2(HF-0502000U):  
AC 120V/60 Hz, Line

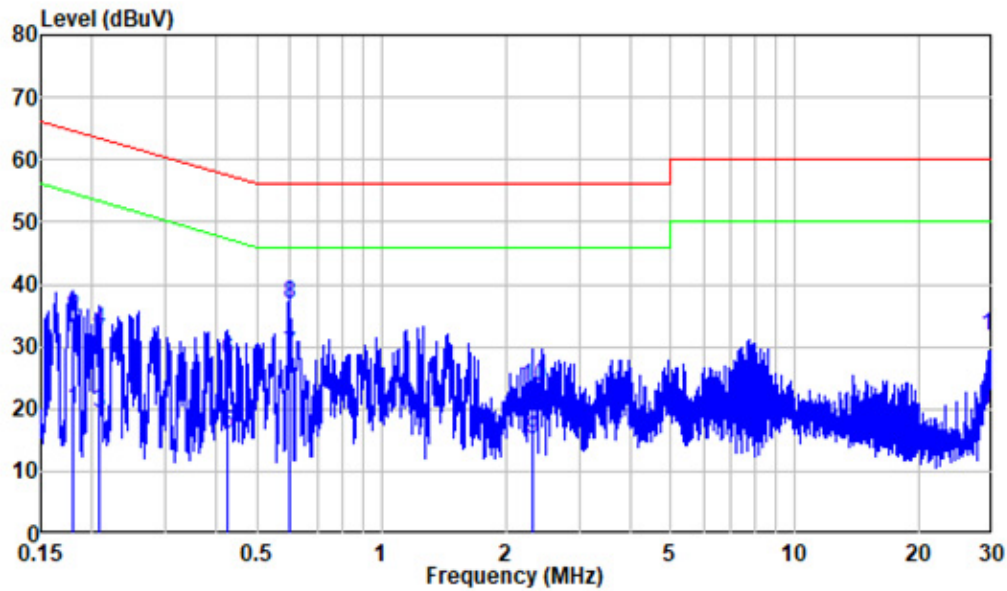

Site : Shielding Room  
Condition: Line

Mode : 2.4G WIFI Transmitting  
Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.179	10.26	9.72	19.98	54.52	-34.54	Average
2	0.179	10.26	24.55	34.81	64.52	-29.71	QP
3	0.207	10.30	9.00	19.30	53.32	-34.02	Average
4	0.207	10.30	22.43	32.73	63.32	-30.59	QP
5	0.423	10.30	5.57	15.87	47.39	-31.52	Average
6	0.423	10.30	17.33	27.63	57.39	-29.76	QP
7	0.600	10.36	18.26	28.62	46.00	-17.38	Average
8	0.600	10.36	26.41	36.77	56.00	-19.23	QP
9	2.315	10.42	4.63	15.05	46.00	-30.95	Average
10	2.315	10.42	13.03	23.45	56.00	-32.55	QP
11	29.901	9.80	10.01	19.81	50.00	-30.19	Average
12	29.901	9.80	21.76	31.56	60.00	-28.44	QP

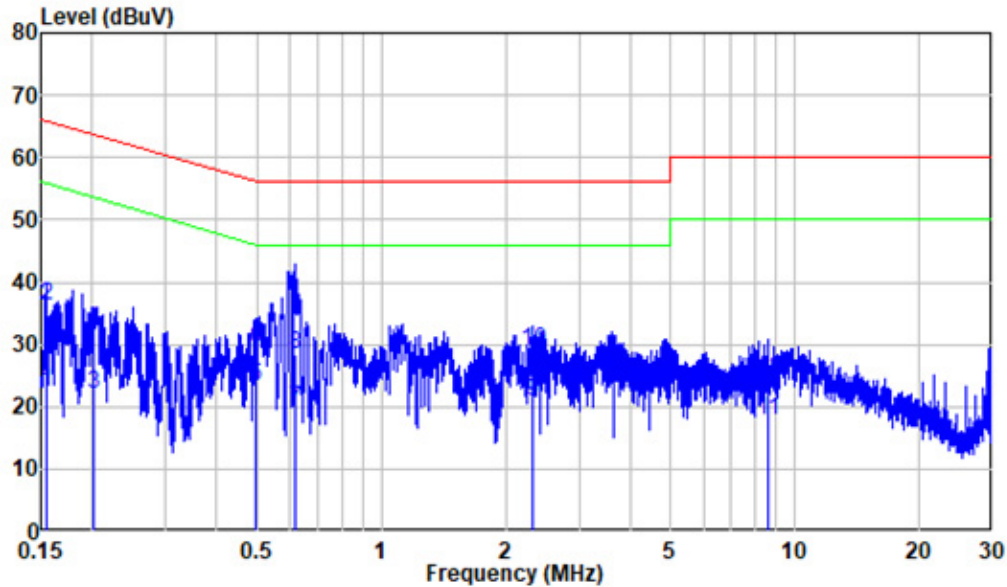**AC 120V/60 Hz, Neutral**

Site : Shielding Room  
Condition: Neutral

Mode : 2.4G WIFI Transmitting  
Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.154	9.80	12.53	22.33	55.77	-33.44	Average
2	0.154	9.80	26.40	36.20	65.77	-29.57	QP
3	0.202	9.80	12.11	21.91	53.53	-31.62	Average
4	0.202	9.80	22.47	32.27	63.53	-31.26	QP
5	0.495	9.80	13.39	23.19	46.08	-22.89	Average
6	0.495	9.80	19.62	29.42	56.08	-26.66	QP
7	0.616	9.81	9.78	19.59	46.00	-26.41	Average
8	0.616	9.81	18.68	28.49	56.00	-27.51	QP
9	2.323	9.82	11.08	20.90	46.00	-25.10	Average
10	2.323	9.82	19.20	29.02	56.00	-26.98	QP
11	8.580	9.89	7.85	17.74	50.00	-32.26	Average
12	8.580	9.89	14.63	24.52	60.00	-35.48	QP

## FCC§15.205, §15.209,§15.247(d)&RSS-GEN § 8.10 & RSS-247 § 5.5 SPURIOUS EMISSIONS

### Applicable Standard

FCC §15.247 (d); §15.209;§15.205;


According to RSS-GEN § 8.10 & RSS-247 § 5.5


Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply: (a) The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, Emergency Position Indicating Radio Beacons (EPIRB), Emergency Locator Transmitters (ELT), Personal Locator Beacons (PLB), and Maritime Survivor Locator Devices (MSLD). (b) Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6. (c) Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### EUT Setup

Below 1 GHz:

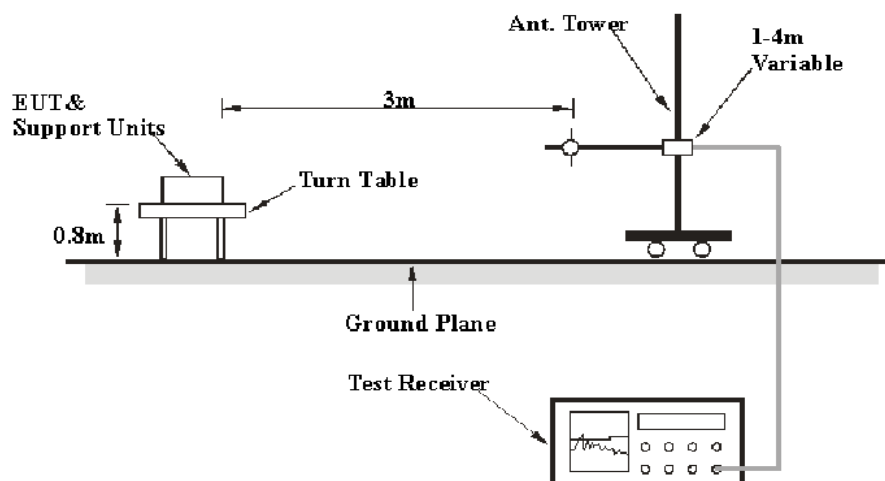

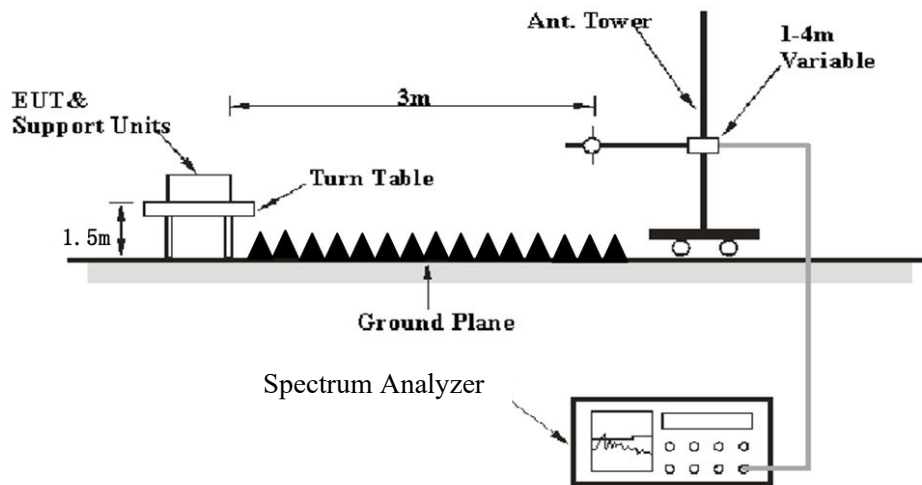**Above 1GHz:**

The radiated emission tests were performed in the 3meters test site, using the setup accordance with the ANSI C63.10-2013& RSS-Gen. The specification used was the FCC 15.209, and FCC 15.247 & RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

**EMI Test Receiver& Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30MHz – 1000 MHz	100 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz <sup>Note 1</sup>	/	Average
	1MHz	> 1/T <sup>Note 2</sup>	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

## Factor& Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data

### Environmental Conditions

Temperature:	21.7~26.5℃
Relative Humidity:	56~65%
ATM Pressure:	101.0~101.3 kPa

*The testing was performed by Jimi Zheng on 2023-04-06 for below 1GHz, and on 2023-04-13 for above 1GHz*


*EUT operation mode: Transmitting(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axes of orientation was recorded)*

**30 MHz~1 GHz:** (worst case is 802.11b mode, middle channel)

Note: When the result of Peak less than the limit of QP by more than 6dB, just the peak value was recorded.

For Adapter 1(HJ-0502000W2-US):


Horizontal

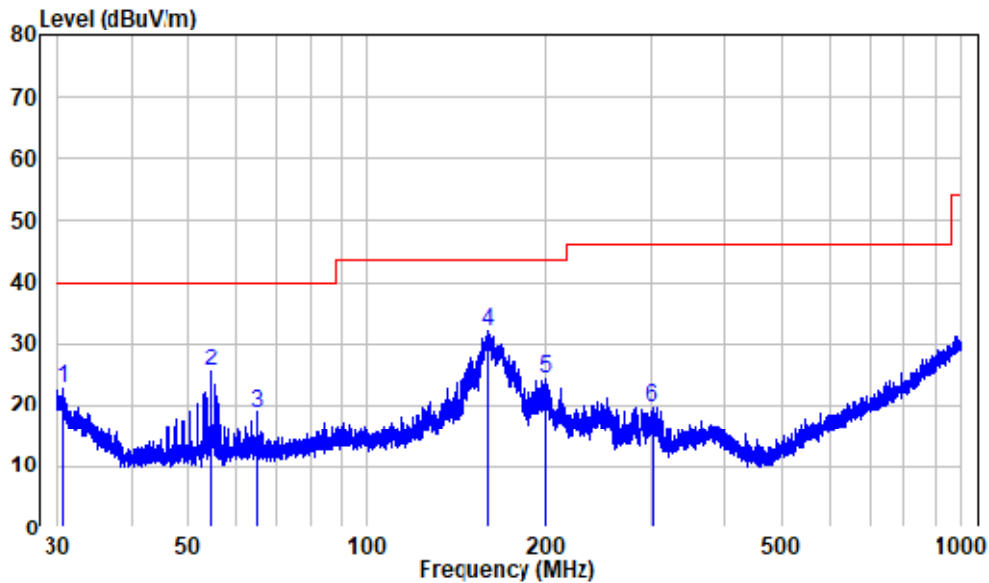

Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : RA230324-14508E-RF  
Test Mode: 2.4G WIFI  
Note : HJ-0502000W2-US

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dR/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.745	-14.36	37.04	22.68	40.00	-17.32	Peak
2	54.380	-14.14	39.50	25.36	40.00	-14.64	Peak
3	65.229	-13.76	32.46	18.70	40.00	-21.30	Peak
4	158.946	-10.30	42.18	31.88	43.50	-11.62	Peak
5	158.762	-10.52	34.76	24.24	43.50	-19.26	Peak
6	302.084	-15.52	35.18	19.66	46.00	-26.34	Peak

## Vertical

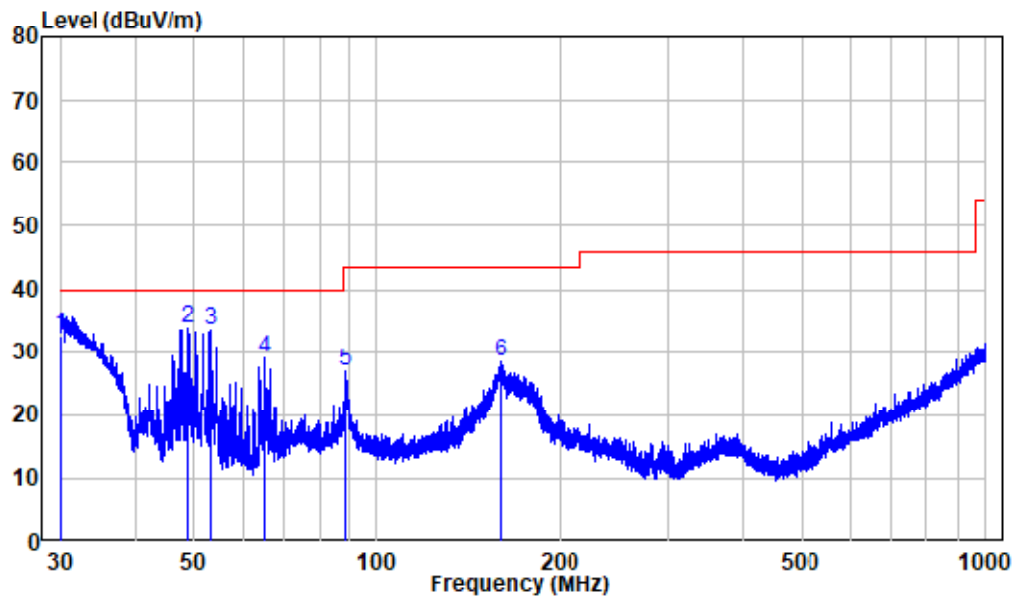


Site : chamber  
 Condition: 3m VERTICAL  
 Job No. : RA230324-14508E-RF  
 Test Mode: 2.4G WIFI  
 Note : H7-0502000W2-IIS

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.026	-14.30	46.80	32.50	40.00	-7.50	QP
2	48.907	-14.31	48.20	33.89	40.00	-6.11	Peak
3	53.015	-14.17	47.75	33.58	40.00	-6.42	Peak
4	65.290	-13.76	42.61	28.85	40.00	-11.15	Peak
5	88.925	-12.55	39.37	26.82	43.50	-16.68	Peak
6	158.946	-10.30	38.70	28.40	43.50	-15.10	Peak

For Adapter 2(HF-0502000U):

Horizontal

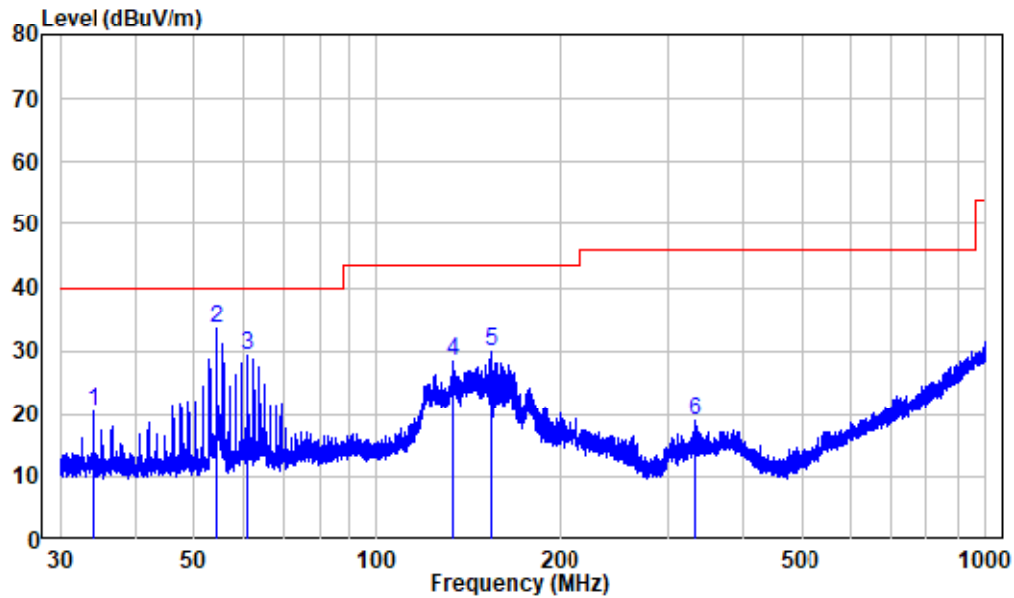


Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : RA230324-14508E-RF  
Test Mode: 2.4G WIFI  
Note : HF-0502000U

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	33.947	-14.44	35.05	20.61	40.00	-19.39	Peak
2	54.309	-14.14	47.53	33.39	40.00	-6.61	Peak
3	61.105	-13.83	42.99	29.16	40.00	-10.84	Peak
4	133.093	-10.58	38.96	28.38	43.50	-15.12	Peak
5	153.537	-10.34	40.20	29.86	43.50	-13.64	Peak
6	332.519	-13.20	32.24	19.04	46.00	-26.96	Peak



Vertical

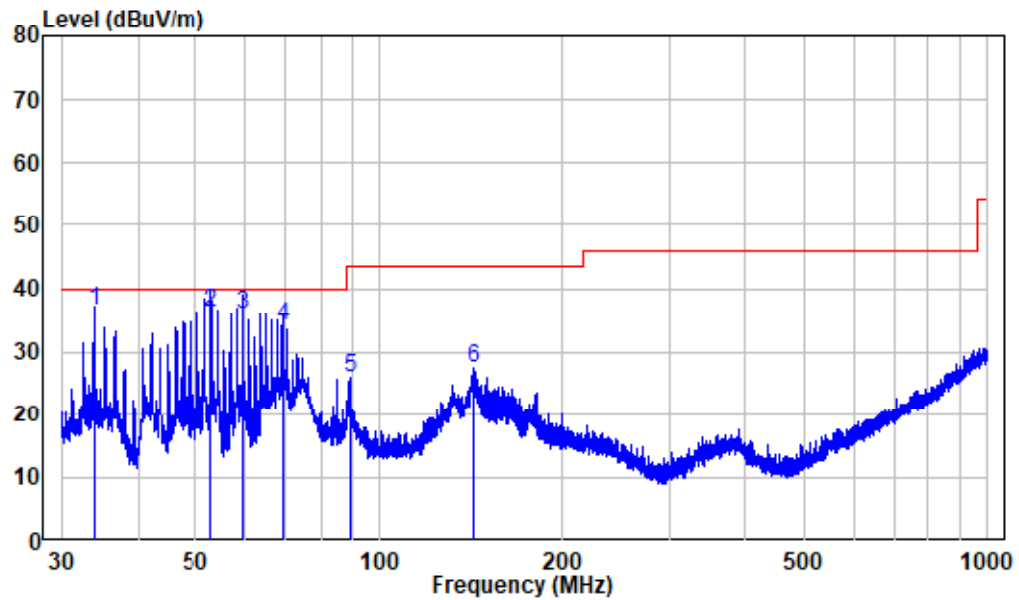

Site : chamber  
Condition: 3m VERTICAL  
Job No. : RA230324-14508E-RF  
Test Mode: 2.4G WIFI  
Note : HF-0502000U

	Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	33.962	-14.45	51.00	36.55	40.00	-3.45	QP
2	52.969	-14.17	50.50	36.33	40.00	-3.67	QP
3	59.754	-13.83	49.70	35.87	40.00	-4.13	QP
4	69.266	-13.77	48.01	34.24	40.00	-5.76	QP
5	89.159	-12.52	38.54	26.02	43.50	-17.48	Peak
6	142.699	-10.52	38.00	27.48	43.50	-16.02	Peak

**1 GHz-25 GHz: (worst case adapter 2)****Wi-Fi:**

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected. Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11b									
Low Channel2412MHz									
2336.4	66.63	PK	31	2.1	H	-10.65	55.98	74	-18.02
2336.4	52.80	AV	31	2.1	H	-10.65	42.15	54	-11.85
2386.08	67.33	PK	133	1.3	V	-10.71	56.62	74	-17.38
2386.08	54.29	AV	133	1.3	V	-10.71	43.58	54	-10.42
2390	65.67	PK	34	2.3	H	-10.70	54.97	74	-19.03
2390	53.63	AV	34	2.3	H	-10.70	42.93	54	-11.07
2390	66.62	PK	349	1.8	V	-10.70	55.92	74	-18.08
2390	53.74	AV	349	1.8	V	-10.70	43.04	54	-10.96
4824	63.28	PK	98	2.3	H	-6.10	57.18	74	-16.82
4824	56.73	AV	98	2.3	H	-6.10	50.63	54	-3.37
4824	61.70	PK	277	1.2	V	-6.10	55.60	74	-18.40
4824	51.32	AV	277	1.2	V	-6.10	45.22	54	-8.78
Middle Channel2437MHz									
4874	63.10	PK	166	2.2	H	-5.95	57.15	74	-16.85
4874	56.62	AV	166	2.2	H	-5.95	50.67	54	-3.33
4874	61.48	PK	358	1.9	V	-5.95	55.53	74	-18.47
4874	51.18	AV	358	1.9	V	-5.95	45.23	54	-8.77
High Channel(2462 MHz)									
2483.5	67.28	PK	83	2	H	-10.55	56.73	74	-17.27
2483.5	55.32	AV	83	2	H	-10.55	44.77	54	-9.23
2483.5	69.12	PK	13	2	V	-10.55	58.57	74	-15.43
2483.5	56.07	AV	13	2	V	-10.55	45.52	54	-8.48
2484.55	68.88	PK	64	1.1	H	-10.54	58.34	74	-15.66
2484.55	55.70	AV	64	1.1	H	-10.54	45.16	54	-8.84
2484.75	69.49	PK	55	1.7	V	-10.54	58.95	74	-15.05
2484.75	56.59	AV	55	1.7	V	-10.54	46.05	54	-7.95
4924	63.30	PK	114	1.5	H	-5.67	57.63	74	-16.37
4924	56.51	AV	114	1.5	H	-5.67	50.84	54	-3.16
4924	61.19	PK	348	1.6	V	-5.67	55.52	74	-18.48
4924	50.26	AV	348	1.6	V	-5.67	44.59	54	-9.41

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected. Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11g									
Low Channel(2412MHz)									
2389.44	78.49	PK	24	1.3	H	-10.70	67.79	74	-6.21
2389.44	55.56	AV	24	1.3	H	-10.70	44.86	54	-9.14
2389.68	79.02	PK	341	1.5	V	-10.70	68.32	74	-5.68
2389.68	55.52	AV	341	1.5	V	-10.70	44.82	54	-9.18
2390	77.02	PK	158	2.3	H	-10.70	66.32	74	-7.68
2390	55.45	AV	158	2.3	H	-10.70	44.75	54	-9.25
2390	77.99	PK	308	1.1	V	-10.70	67.29	74	-6.71
2390	55.67	AV	308	1.1	V	-10.70	44.97	54	-9.03
4824	63.22	PK	310	1.5	H	-6.10	57.12	74	-16.88
4824	48.47	AV	310	1.5	H	-6.10	42.37	54	-11.63
4824	62.04	PK	100	2.4	V	-6.10	55.94	74	-18.06
4824	46.88	AV	100	2.4	V	-6.10	40.78	54	-13.22
Middle Channel(2437MHz)									
4874	63.46	PK	206	1.7	H	-5.95	57.51	74	-16.49
4874	48.93	AV	206	1.7	H	-5.95	42.98	54	-11.02
4874	62.29	PK	261	1.5	V	-5.95	56.34	74	-17.66
4874	47.18	AV	261	1.5	V	-5.95	41.23	54	-12.77
High Channel(2462 MHz)									
2483.5	75.52	PK	27	1.3	H	-10.55	64.97	74	-9.03
2483.5	56.22	AV	27	1.3	H	-10.55	45.67	54	-8.33
2483.5	77.81	PK	167	1.1	V	-10.55	67.26	74	-6.74
2483.5	56.65	AV	167	1.1	V	-10.55	46.1	54	-7.90
2484.15	77.35	PK	36	1.6	H	-10.54	66.81	74	-7.19
2484.15	56.22	AV	36	1.6	H	-10.54	45.68	54	-8.32
2483.9	79.55	PK	58	1	V	-10.55	69	74	-5.00
2483.9	56.62	AV	58	1	V	-10.55	46.07	54	-7.93
4924	63.57	PK	143	1.5	H	-5.67	57.90	74	-16.10
4924	49.14	AV	143	1.5	H	-5.67	43.47	54	-10.53
4924	62.36	PK	188	1.3	V	-5.67	56.69	74	-17.31
4924	47.38	AV	188	1.3	V	-5.67	41.71	54	-12.29

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected. Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n20									
Low Channel(2412MHz)									
2389.92	71.17	PK	31	2	H	-10.70	60.47	74	-13.53
2389.92	54.43	AV	31	2	H	-10.70	43.73	54	-10.27
2389.94	70.36	PK	43	1.8	V	-10.70	59.66	74	-14.34
2389.94	54.15	AV	43	1.8	V	-10.70	43.45	54	-10.55
2390	74.27	PK	339	2	H	-10.70	63.57	74	-10.43
2390	54.24	AV	339	2	H	-10.70	43.54	54	-10.46
2390	69.79	PK	209	1.9	V	-10.70	59.09	74	-14.91
2390	53.91	AV	209	1.9	V	-10.70	43.21	54	-10.79
4824	58.96	PK	42	1.6	H	-6.10	52.86	74	-21.14
4824	46.42	AV	42	1.6	H	-6.10	40.32	54	-13.68
4824	59.14	PK	322	2.2	V	-6.10	53.04	74	-20.96
4824	46.36	AV	322	2.2	V	-6.10	40.26	54	-13.74
Middle Channel(2437MHz)									
4874	59.24	PK	171	1.2	H	-5.95	53.29	74	-20.71
4874	46.67	AV	171	1.2	H	-5.95	40.72	54	-13.28
4874	59.50	PK	331	1.3	V	-5.95	53.55	74	-20.45
4874	46.76	AV	331	1.3	V	-5.95	40.81	54	-13.19
High Channel(2462 MHz)									
2483.5	77.37	PK	139	1.7	H	-10.55	66.82	74	-7.18
2483.5	56.58	AV	139	1.7	H	-10.55	46.03	54	-7.97
2483.5	76.47	PK	257	1.3	V	-10.55	65.92	74	-8.08
2483.5	56.75	AV	257	1.3	V	-10.55	46.2	54	-7.80
2483.85	79.04	PK	1	1.9	H	-10.55	68.49	74	-5.51
2483.85	56.73	AV	1	1.9	H	-10.55	46.18	54	-7.82
2483.6	79.26	PK	195	1.5	V	-10.55	68.71	74	-5.29
2483.6	56.62	AV	195	1.5	V	-10.55	46.07	54	-7.93
4924	59.35	PK	202	1.5	H	-5.67	53.68	74	-20.32
4924	46.76	AV	202	1.5	H	-5.67	41.09	54	-12.91
4924	59.44	PK	182	1.2	V	-5.67	53.77	74	-20.23
4924	46.75	AV	182	1.2	V	-5.67	41.08	54	-12.92

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Corrected. Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n40									
Low Channel 2422MHz									
2389.56	76.62	PK	273	1.4	H	-10.70	65.92	74	-8.08
2389.56	55.31	AV	273	1.4	H	-10.70	44.61	54	-9.39
2389.95	77.22	PK	29	1.6	V	-10.70	66.52	74	-7.48
2389.95	55.83	AV	29	1.6	V	-10.70	45.13	54	-8.87
2390	76.56	PK	296	1.1	H	-10.70	65.86	74	-8.14
2390	55.44	AV	296	1.1	H	-10.70	44.74	54	-9.26
2390	77.08	PK	360	2	V	-10.70	66.38	74	-7.62
2390	55.99	AV	360	2	V	-10.70	45.29	54	-8.71
4844	59.28	PK	59	2.5	H	-6.09	53.19	74	-20.81
4844	46.35	AV	59	2.5	H	-6.09	40.26	54	-13.74
4844	58.68	PK	46	1.4	V	-6.09	52.59	74	-21.41
4844	45.77	AV	46	1.4	V	-6.09	39.68	54	-14.32
Middle Channel 2437MHz									
4874	59.62	PK	90	2.1	H	-5.95	53.67	74	-20.33
4874	46.87	AV	90	2.1	H	-5.95	40.92	54	-13.08
4874	59.09	PK	259	1.2	V	-5.95	53.14	74	-20.86
4874	46.26	AV	259	1.2	V	-5.95	40.31	54	-13.69
High Channel 2452MHz									
2483.5	79.21	PK	232	1.6	H	-10.55	68.66	74	-5.34
2483.5	57.08	AV	232	1.6	H	-10.55	46.53	54	-7.47
2483.5	80.00	PK	35	2.1	V	-10.55	69.45	74	-4.55
2483.5	57.91	AV	35	2.1	V	-10.55	47.36	54	-6.64
2483.9	79.64	PK	209	1.6	H	-10.55	69.09	74	-4.91
2483.9	57.39	AV	209	1.6	H	-10.55	46.84	54	-7.16
2483.97	80.42	PK	311	1.2	V	-10.55	69.87	74	-4.13
2483.97	57.95	AV	311	1.2	V	-10.55	47.4	54	-6.60
4904	66.61	PK	286	1.9	H	-5.77	60.84	74	-13.16
4904	53.35	AV	286	1.9	H	-5.77	47.58	54	-6.42
4904	64.47	PK	79	2.4	V	-5.77	58.70	74	-15.30
4904	50.92	AV	79	2.4	V	-5.77	45.15	54	-8.85

**Note:**

Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is 20dB to the limit or in the noise floor level was not recorded.

**BLE:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Factor (dB/m)	Corrected. Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
BLE1M									
Low Channel 2402MHz									
2365	67.78	PK	205	2.3	H	-10.76	57.02	74	-16.98
2365	54.34	AV	205	2.3	H	-10.76	43.58	54	-10.42
2378.8	67.35	PK	329	1.2	V	-10.73	56.62	74	-17.38
2378.8	54.25	AV	329	1.2	V	-10.73	43.52	54	-10.48
2390	65.24	PK	321	1.6	H	-10.70	54.54	74	-19.46
2390	53.61	AV	321	1.6	H	-10.70	42.91	54	-11.09
2390	65.92	PK	192	1.7	V	-10.70	55.22	74	-18.78
2390	53.75	AV	192	1.7	V	-10.70	43.05	54	-10.95
4804	59.37	PK	222	1.3	H	-6.11	53.26	74	-20.74
4804	59.23	PK	146	1.1	V	-6.11	53.12	74	-20.88
Middle Channel 2440MHz									
4880	59.60	PK	325	1.3	H	-5.91	53.69	74	-20.31
4880	58.93	PK	295	1	V	-5.91	53.02	74	-20.98
High Channel 2480MHz									
2483.5	66.31	PK	9	1.3	H	-10.55	55.76	74	-18.24
2483.5	54.13	AV	9	1.3	H	-10.55	43.58	54	-10.42
2483.5	65.88	PK	118	1.8	V	-10.55	55.33	74	-18.67
2483.5	54.37	AV	118	1.8	V	-10.55	43.82	54	-10.18
2487.52	68.65	PK	54	1.6	H	-10.52	58.13	74	-15.87
2487.52	54.77	AV	54	1.6	H	-10.52	44.25	54	-9.75
2483.62	68.69	PK	221	2	V	-10.55	58.14	74	-15.86
2483.62	55.05	AV	221	2	V	-10.55	44.5	54	-9.50
4960	59.45	PK	252	2.4	H	-5.47	53.98	74	-20.02
4960	58.33	PK	235	2.2	V	-5.47	52.86	74	-21.14

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Factor (dB/m)	Corrected. Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
BLE2M									
Low Channel 2402MHz									
2336.9	66.57	PK	316	2.1	H	-10.65	55.92	74	-18.08
2336.9	55.04	AV	316	2.1	H	-10.65	44.39	54	-9.61
2388.1	67.40	PK	30	1.9	V	-10.71	56.69	74	-17.31
2388.1	55.89	AV	30	1.9	V	-10.71	45.18	54	-8.82
2390	65.87	PK	47	2.3	H	-10.70	55.17	74	-18.83
2390	54.94	AV	47	2.3	H	-10.70	44.24	54	-9.76
2390	66.49	PK	172	1.5	V	-10.70	55.79	74	-18.21
2390	55.60	AV	172	1.5	V	-10.70	44.90	54	-9.10
4804	59.21	PK	215	1	H	-6.11	53.10	74	-20.90
4804	59.02	PK	259	1.4	V	-6.11	52.91	74	-21.09
Middle Channel 2440MHz									
4880	59.03	PK	303	2	H	-5.91	53.12	74	-20.88
4880	59.10	PK	242	1.7	V	-5.91	53.19	74	-20.81
High Channel 2480MHz									
2483.5	66.56	PK	55	1.8	H	-10.55	56.01	74	-17.99
2483.5	55.73	AV	55	1.8	H	-10.55	45.18	54	-8.82
2483.5	67.01	PK	271	1.7	V	-10.55	56.46	74	-17.54
2483.5	55.75	AV	271	1.7	V	-10.55	45.2	54	-8.80
2493.85	68.27	PK	39	2.1	H	-10.47	57.8	74	-16.20
2493.85	56.26	AV	39	2.1	H	-10.47	45.79	54	-8.21
2483.68	68.25	PK	198	2.4	V	-10.55	57.7	74	-16.30
2483.68	56.56	AV	198	2.4	V	-10.55	46.01	54	-7.99
4960	58.56	PK	80	1	H	-5.47	53.09	74	-20.91
4960	58.62	PK	120	2.2	V	-5.47	53.15	74	-20.85

**Note:**

Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit


The other spurious emission which is 20dB to the limit or in the noise floor level was not recorded.

When the test result of peak was less than the limit of average, just peak values were recorded.


1-18 GHz:

## Pre-scan for 802.11b High Channel

Horizontal

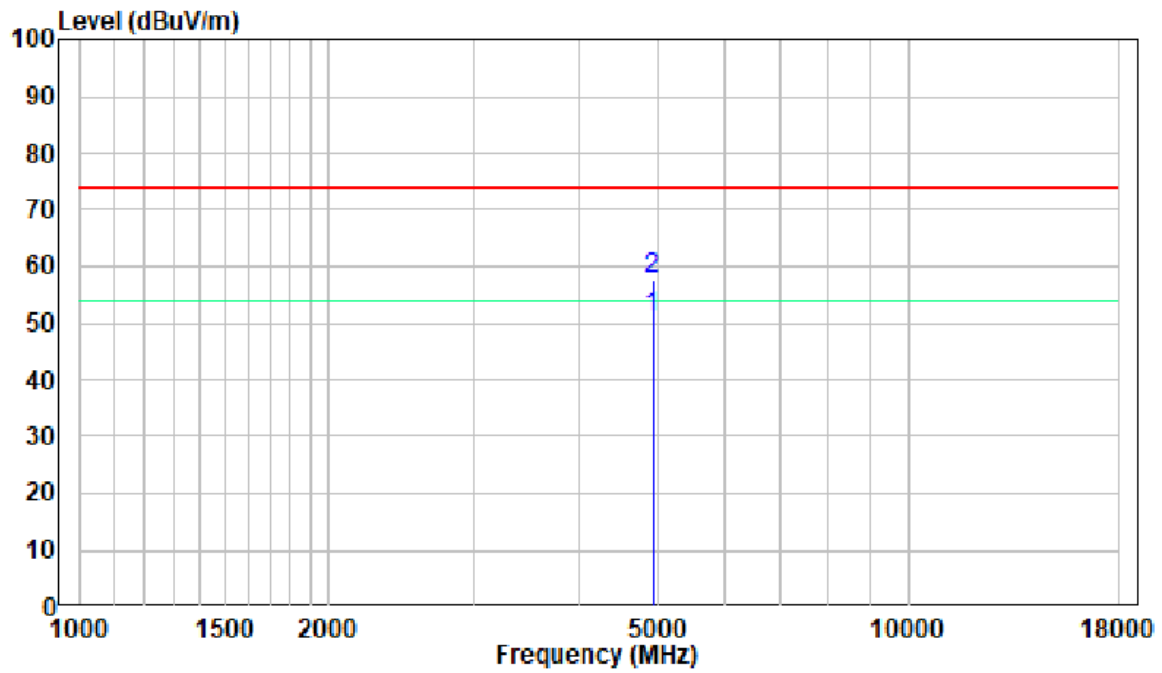

Vertical

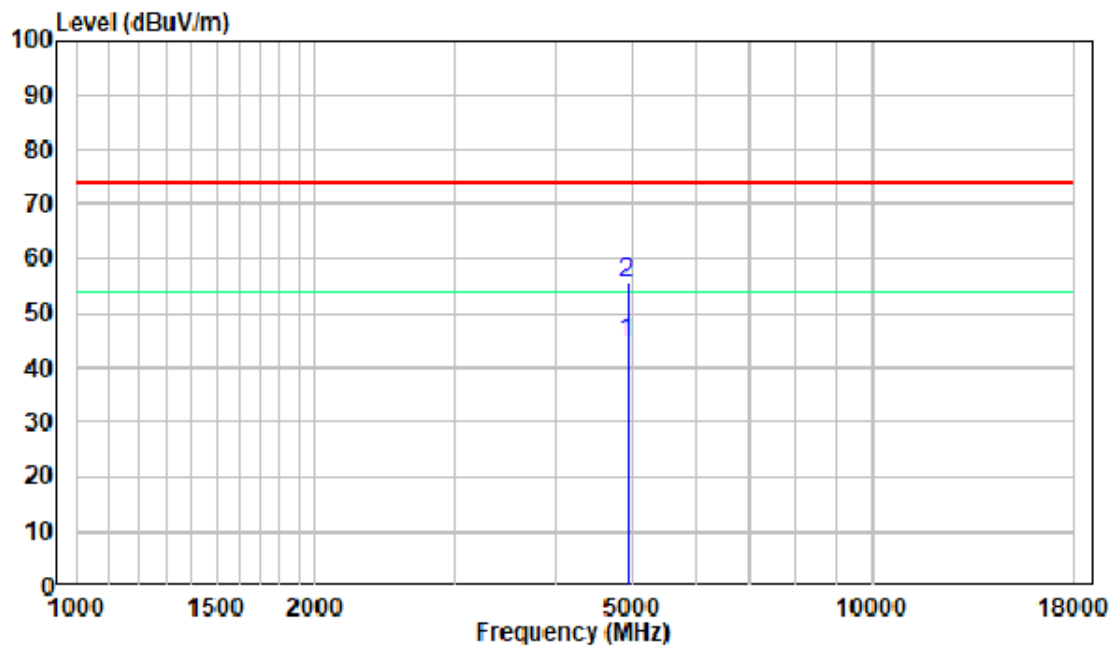





18 -25GHz:

Pre-scan for 802.11b High Channel

Horizontal

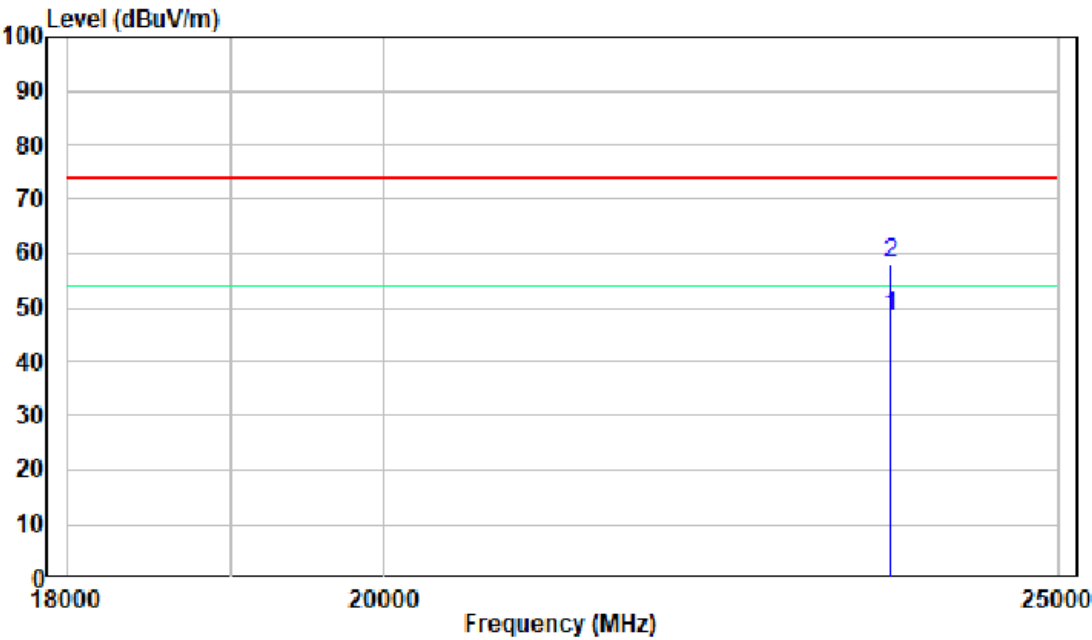

Vertical

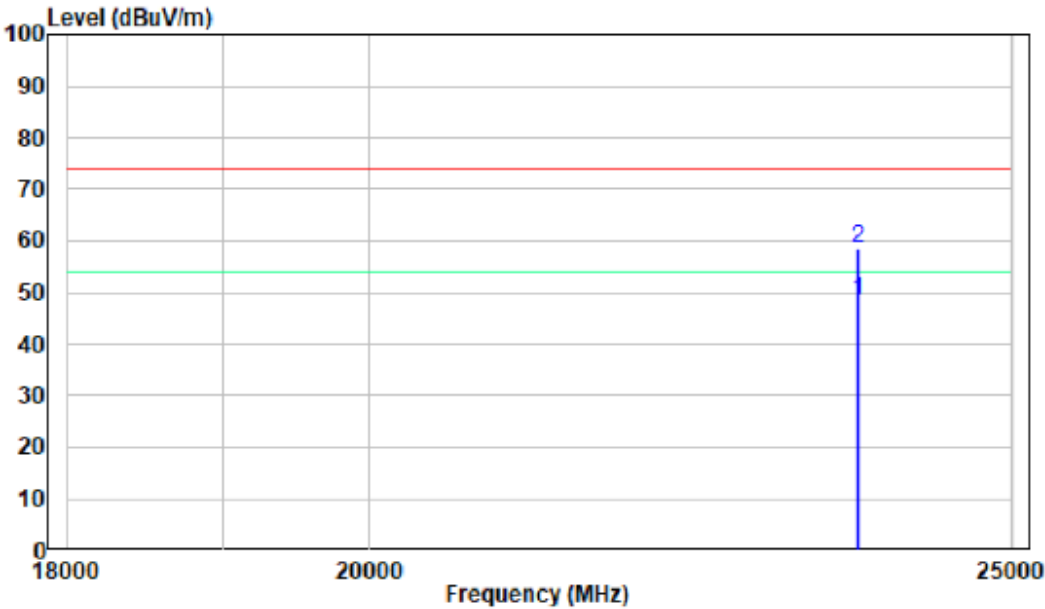

## **§15.247 (a)(2)&RSS-Gen§6.7RSS-247 § 5.2 (a)99% OCCUPIED BANDWIDTH &6dB EMISSION BANDWIDTH**

### **Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “6 dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated 6 dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

### **Test Procedure**


Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

The following conditions shall be observed for measuring the occupied bandwidth and 6 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 6 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 6 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



## Test Data

### Environmental Conditions

Temperature:	25.7~26.8℃
Relative Humidity:	47~54%
ATM Pressure:	100.2~101.0 kPa

*The testing was performed by Roger Ling from 2023-04-09 to 2023-04-17 for WIFI and by Jacob Huang on 2023-04-07 for BLE.*

*EUT operation mode: Transmitting*


Test Result Compliant.

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99%Emission Bandwidth (MHz)	6dB BW Limit (kHz)
802.11b mode				
Low	2412	10.11	13.55	≥500
Middle	2437	10.11	13.63	≥500
High	2462	10.11	12.95	≥500
802.11g mode				
Low	2412	16.38	17.26	≥500
Middle	2437	16.35	17.42	≥500
High	2462	16.38	17.18	≥500
802.11n-HT20 mode				
Low	2412	17.37	18.34	≥500
Middle	2437	16.98	18.26	≥500
High	2462	17.16	18.30	≥500
802.11n-HT40 mode				
Low	2422	35.64	36.60	≥500
Middle	2437	35.46	36.84	≥500
High	2452	35.58	36.52	≥500

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Emission Bandwidth (MHz)	Limit (kHz)
BLE 1M				
Low	2402	0.672	1.011	≥500
Middle	2440	0.672	1.014	≥500
High	2480	0.672	1.011	≥500
BLE 2M				
Low	2402	1.176	2.022	≥500
Middle	2440	1.176	2.034	≥500
High	2480	1.176	2.028	≥500


**6dB Bandwidth:  
BLE 1M:**

### Low Channel

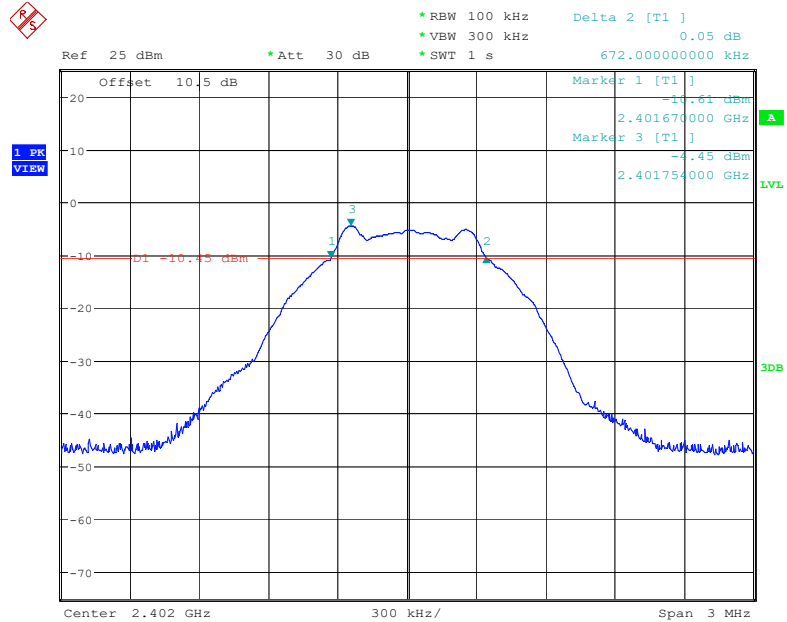


Date: 7.APR.2023 21:11:29

### Middle Channel

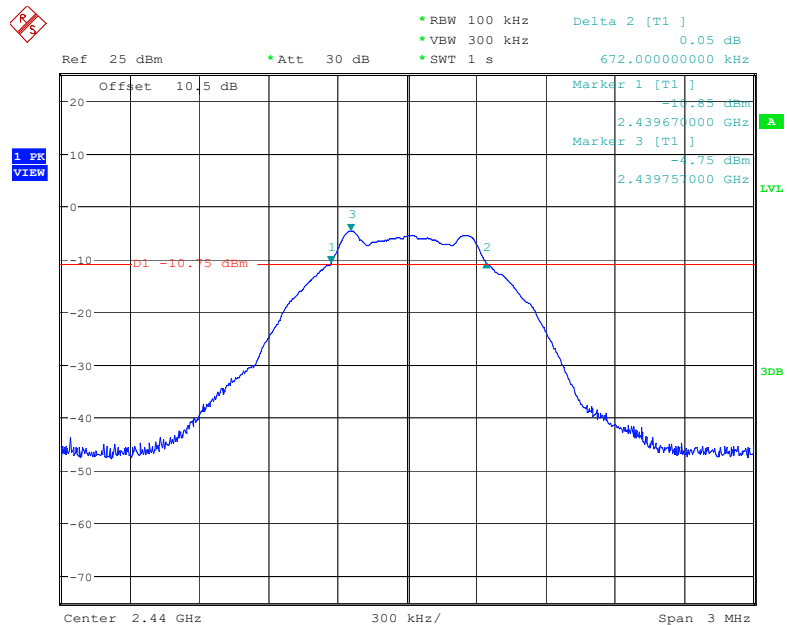


Date: 7.APR.2023 21:15:20

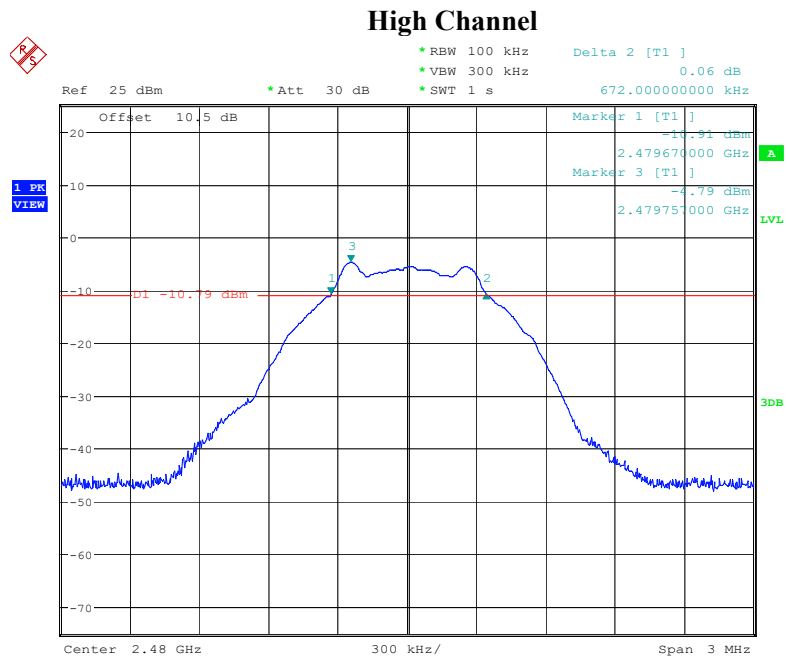


Date: 7.APR.2023 21:17:33

**BLE 2M:**

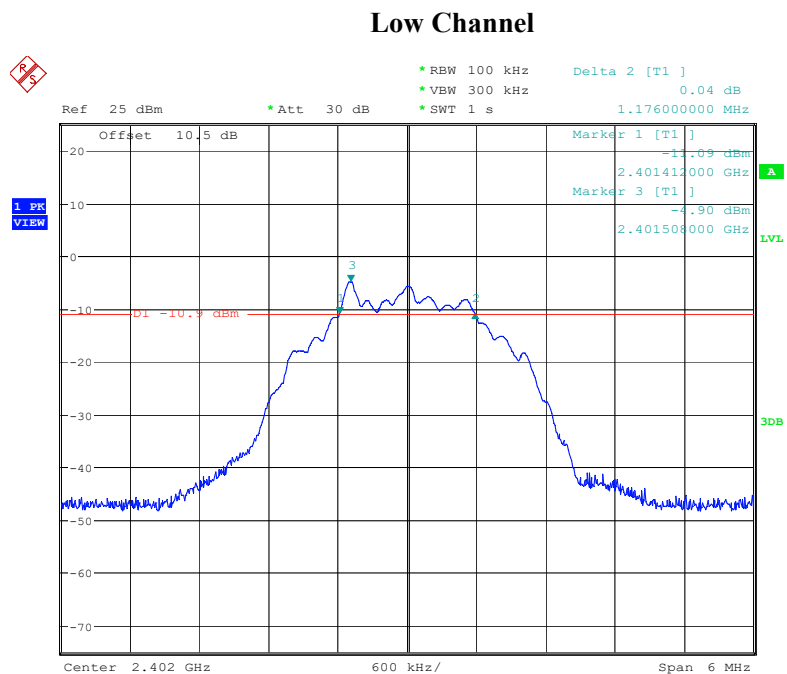


Date: 7.APR.2023 21:27:34

## Middle Channel

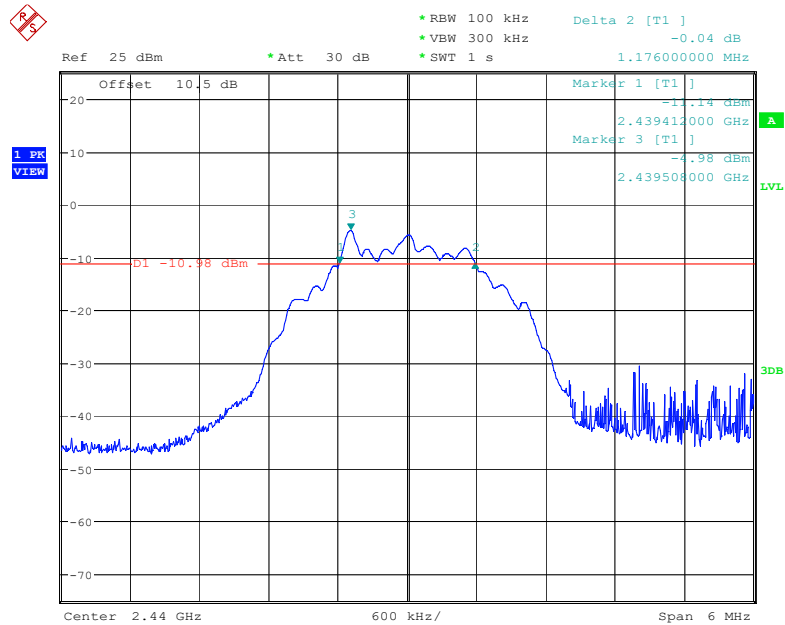

Date: 7.APR.2023 21:31:50


## High Channel

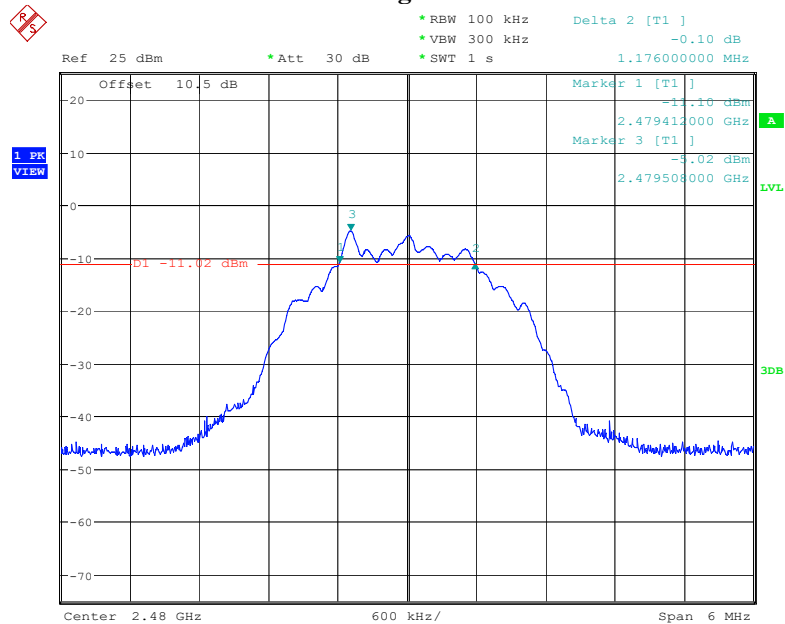

Date: 7.APR.2023 21:34:22


## 802.11b Mode:

## Low Channel

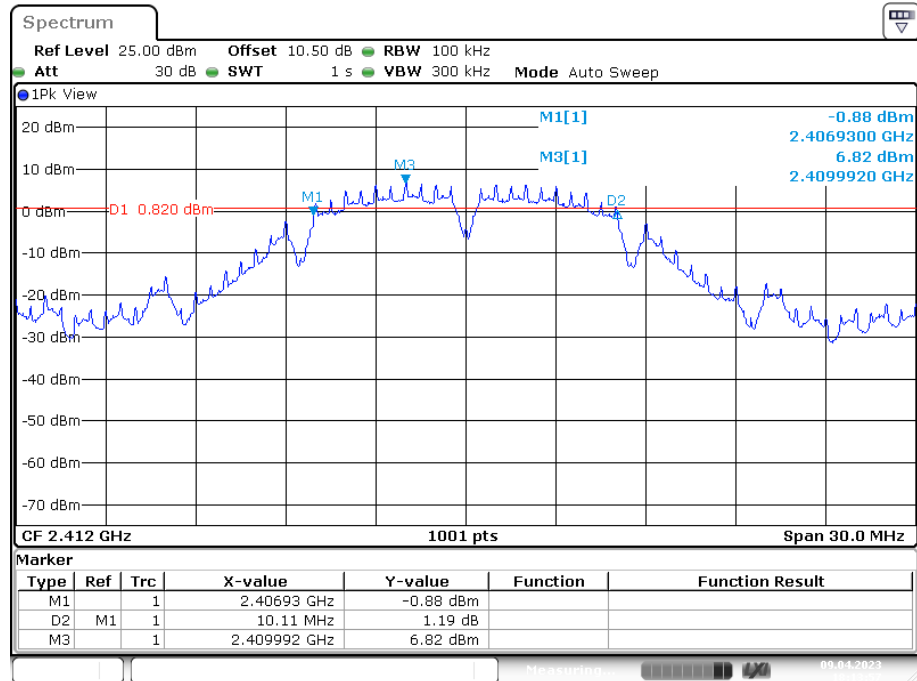

Date: 9.APR.2023 18:13:57


## Middle Channel

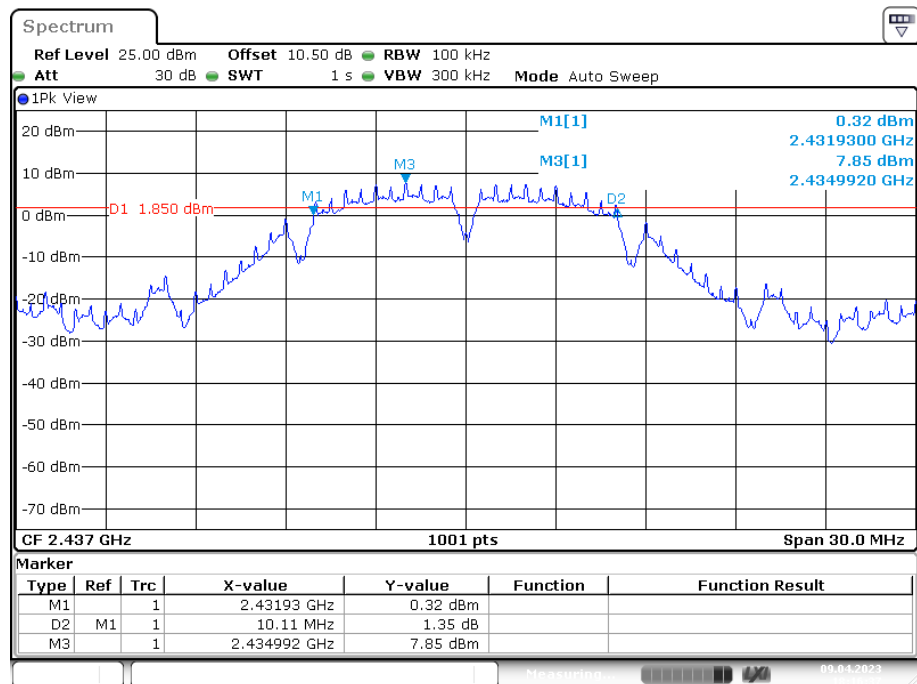

Date: 9.APR.2023 18:16:38




## High Channel

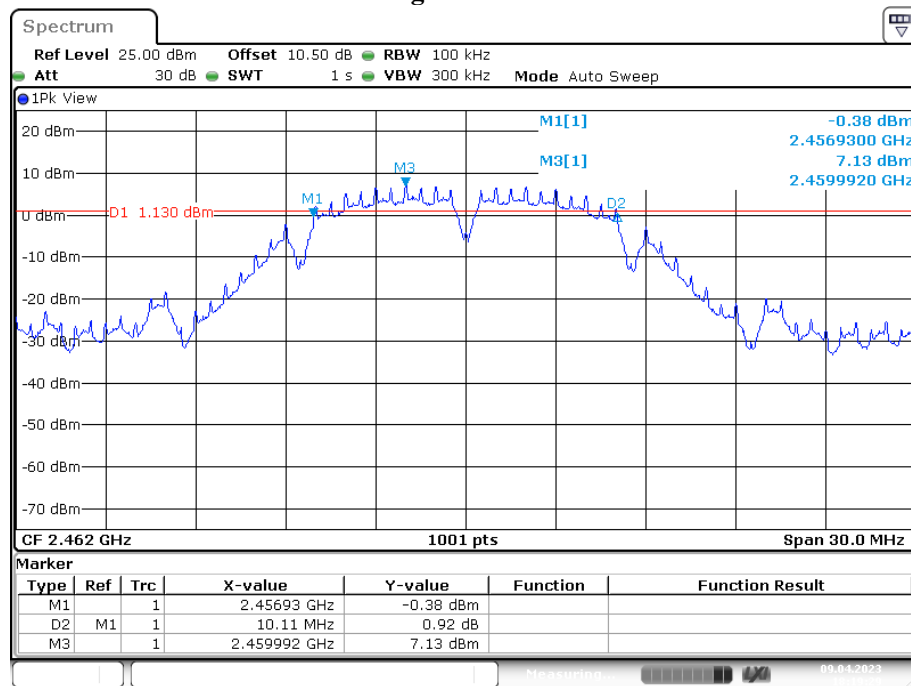

Date: 9.APR.2023 18:19:30


## 802.11g Mode:

## Low Channel

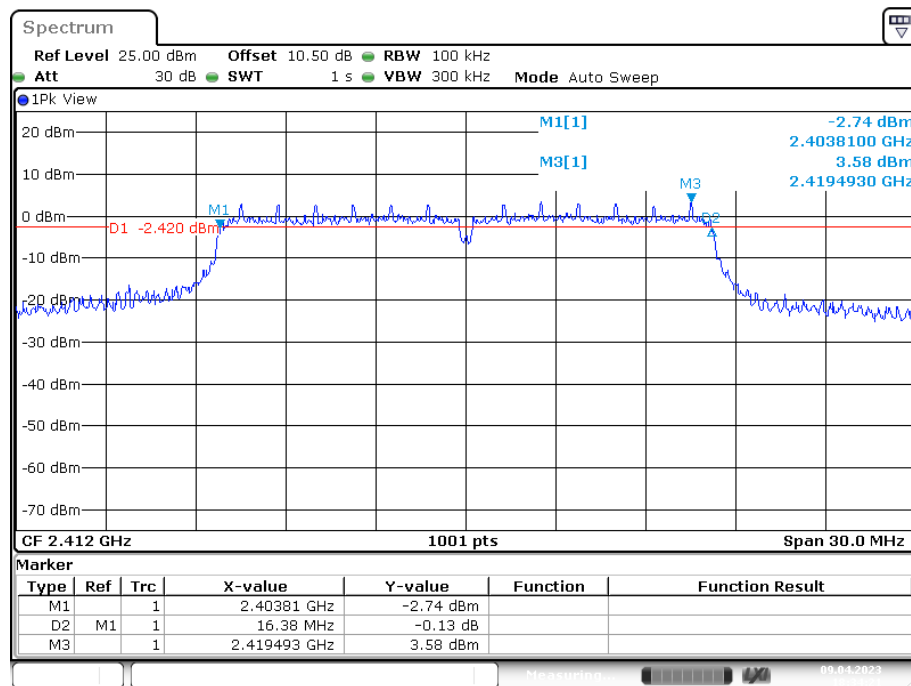


Date: 9.APR.2023 18:34:21

## Middle Channel

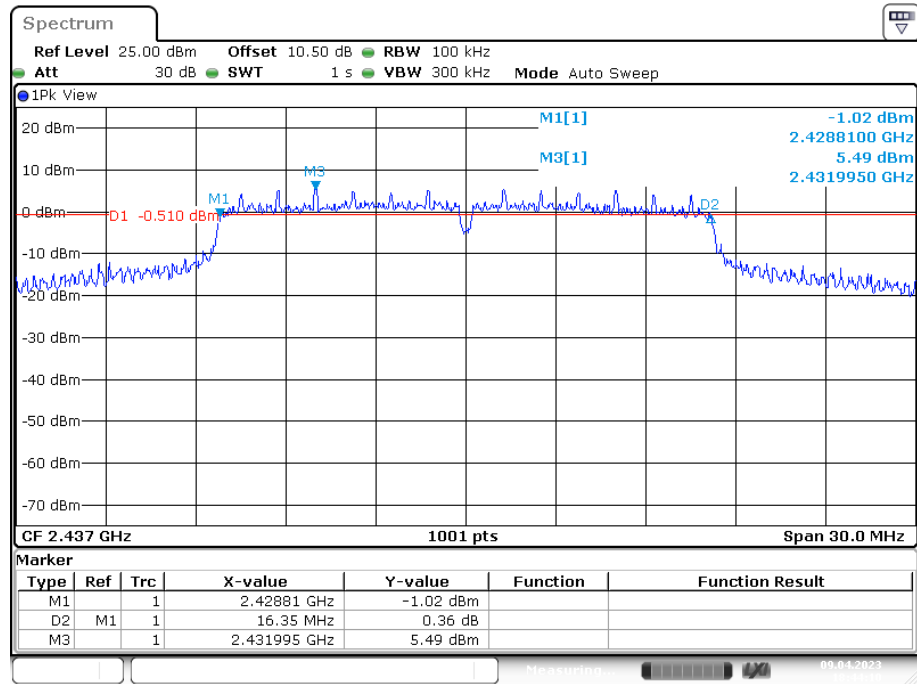

Date: 9.APR.2023 18:44:11


## High Channel

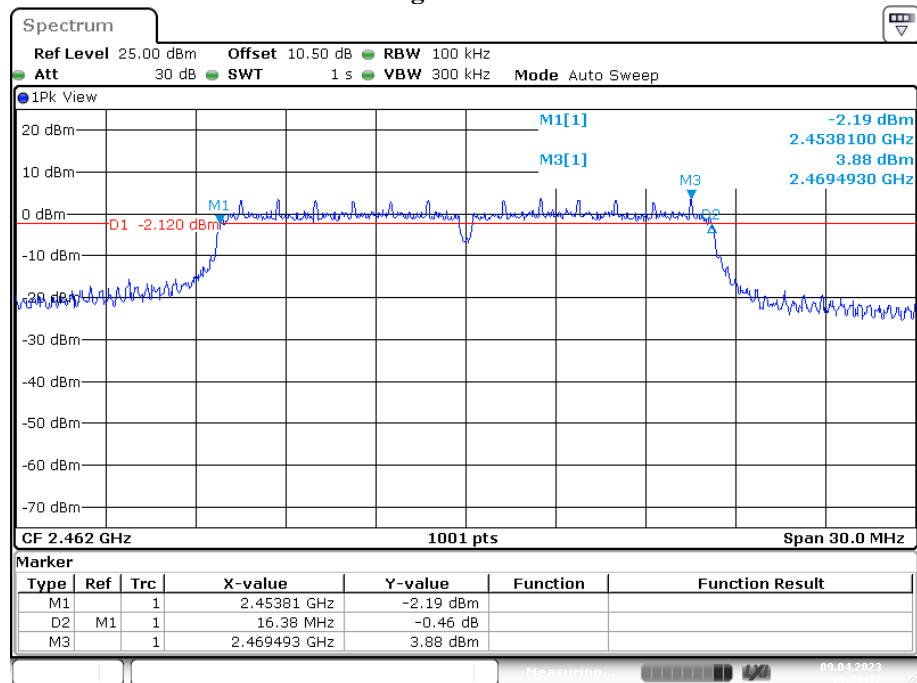

Date: 9.APR.2023 18:49:17


## 802.11n-20 Mode:

## Low Channel

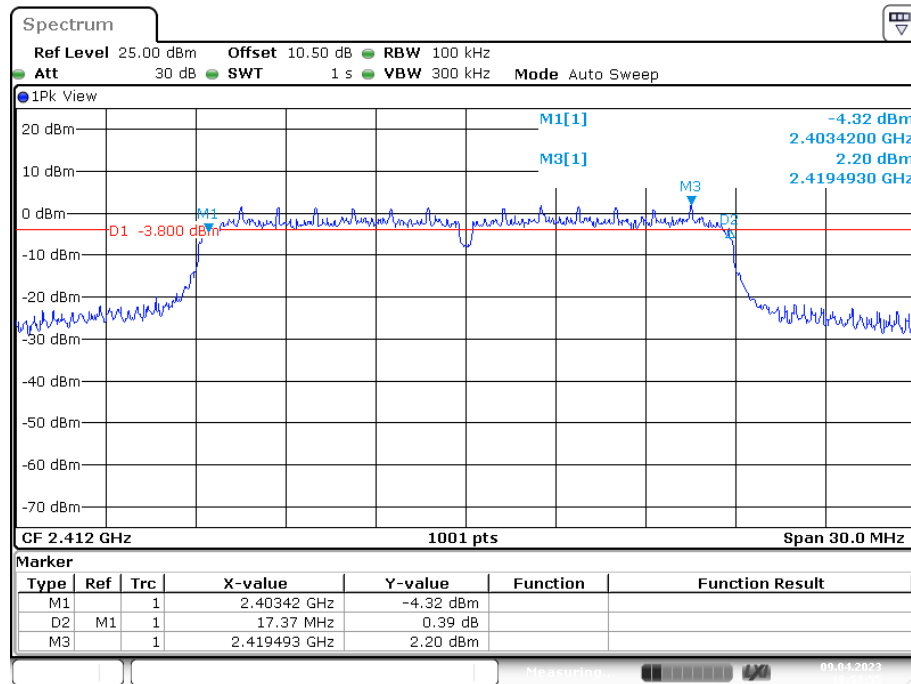


Date: 9.APR.2023 18:53:55

## Middle Channel

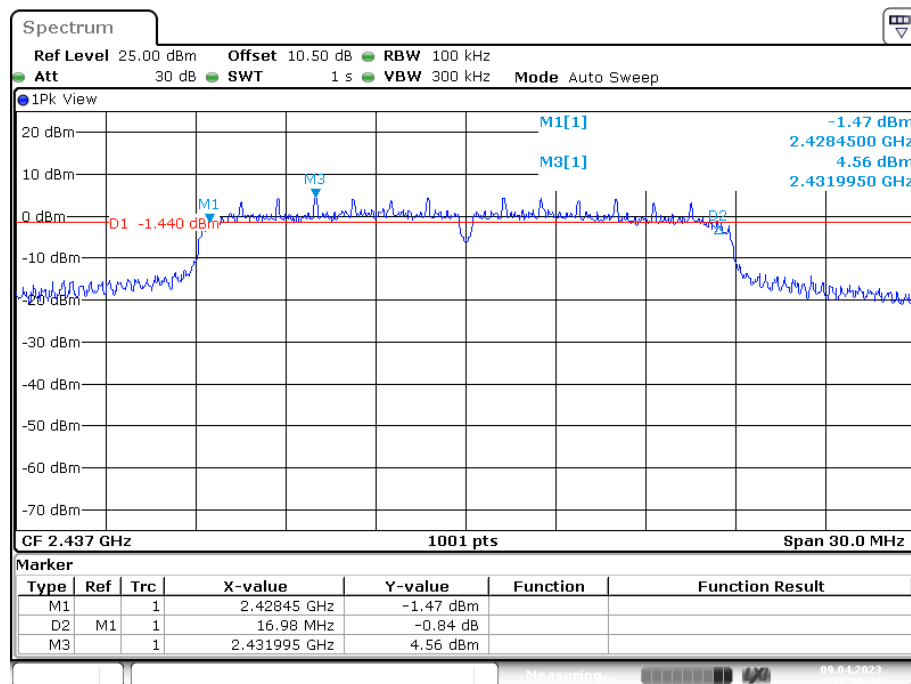

Date: 9.APR.2023 18:58:40


## High Channel

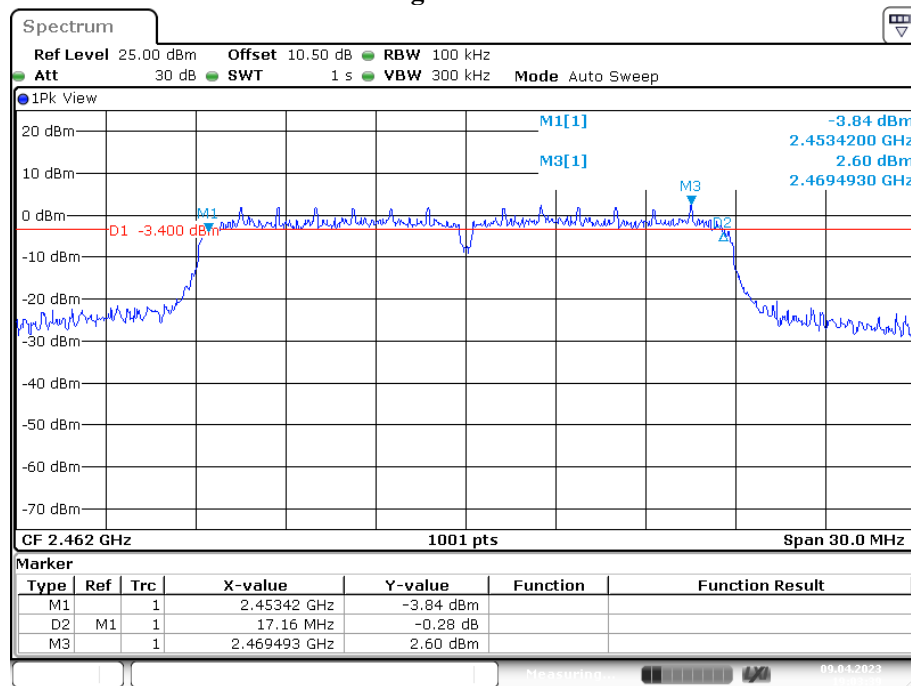

Date: 9.APR.2023 19:03:39


## 802.11n-40Mode:

## Low Channel

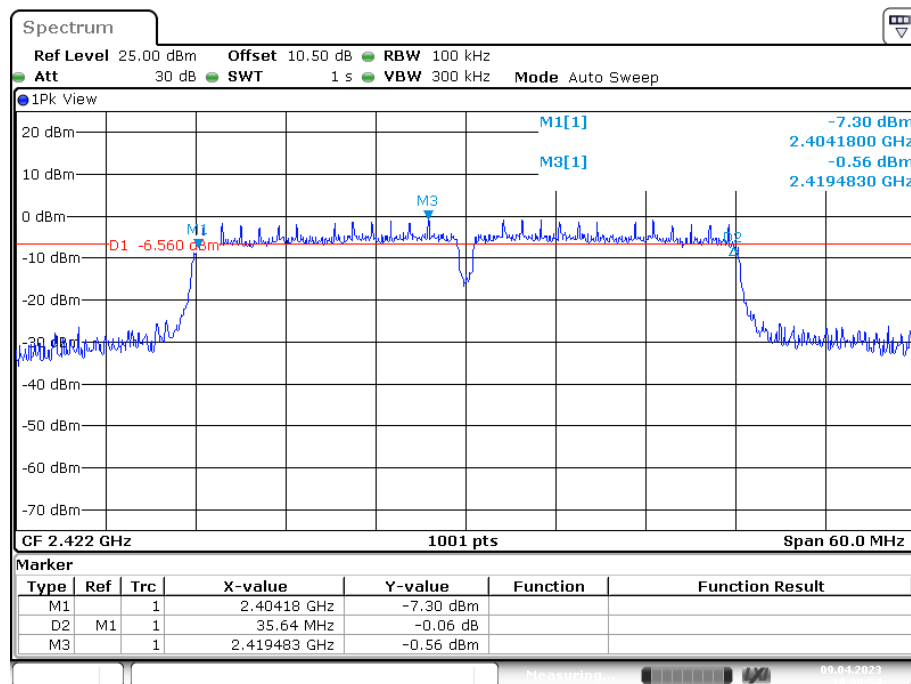


Date: 9.APR.2023 19:08:55

## Middle Channel

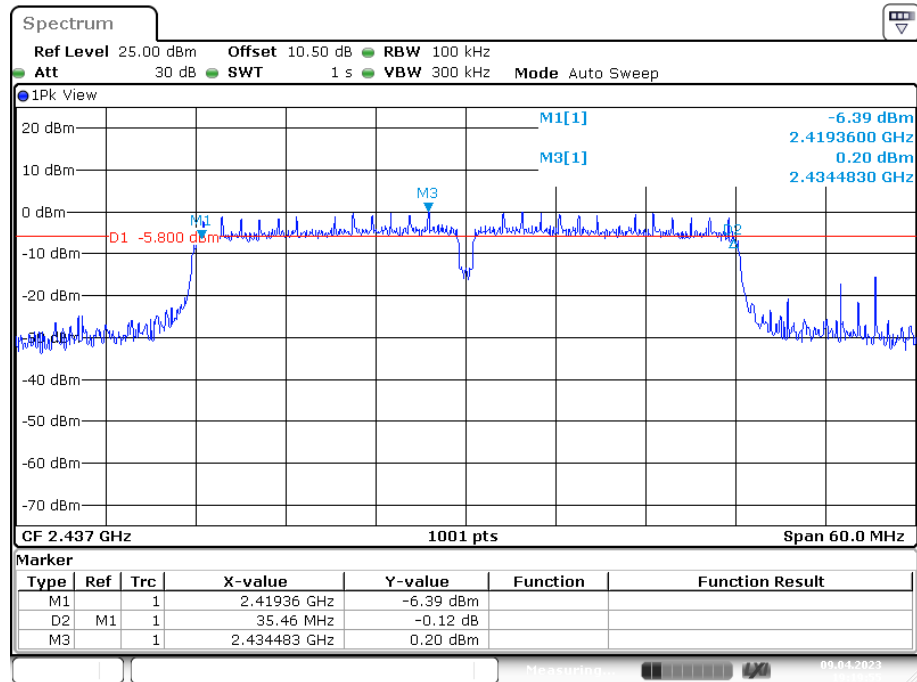


Date: 9.APR.2023 19:19:55


## High Channel

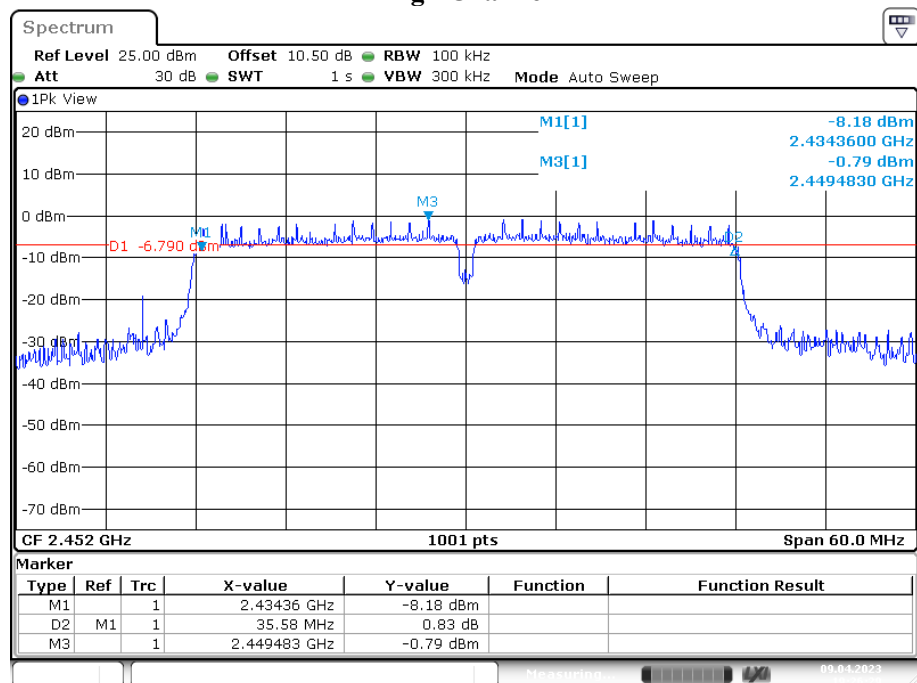


Date: 9.APR.2023 19:26:29

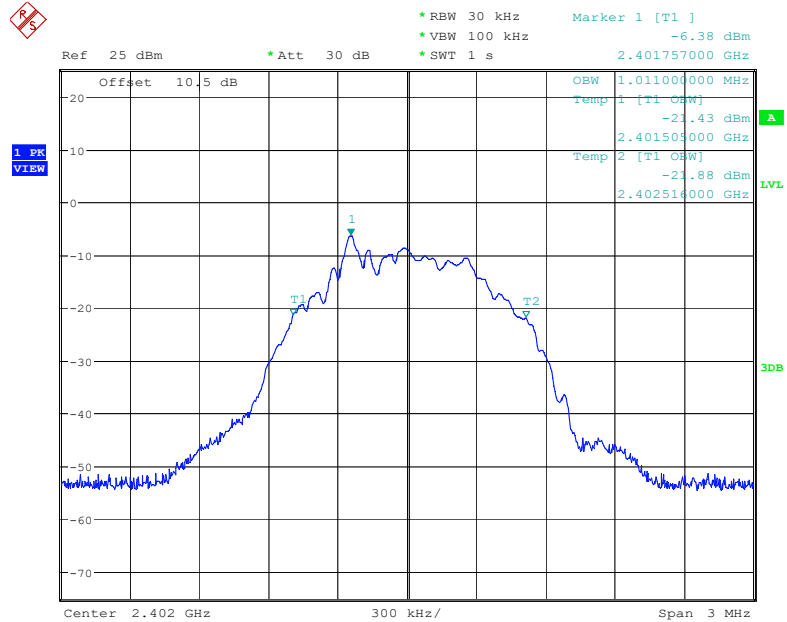**99%Emission Bandwidth:  
BLE 1M:****Low Channel**

Date: 7.APR.2023 21:10:54

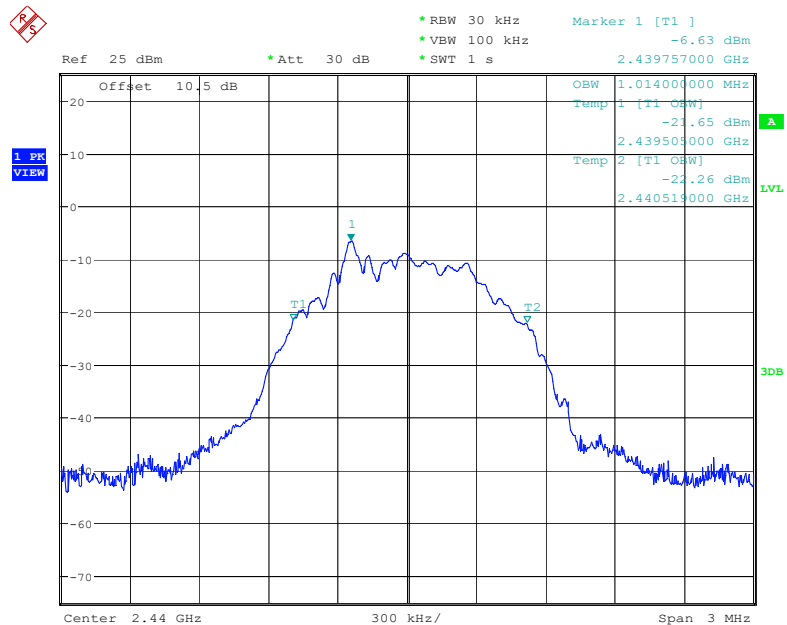
**Middle Channel**

Date: 7.APR.2023 21:14:45

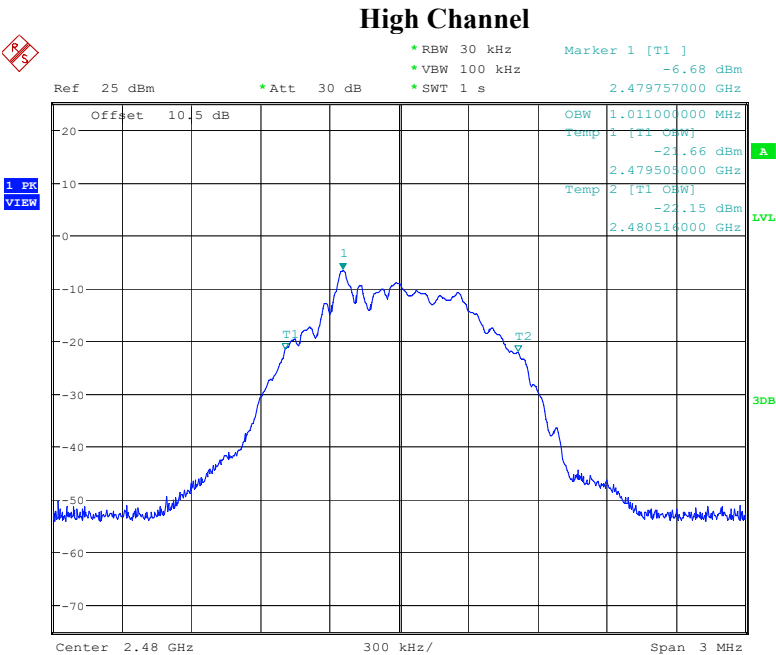


Date: 7.APR.2023 21:17:10

**BLE 2M:**

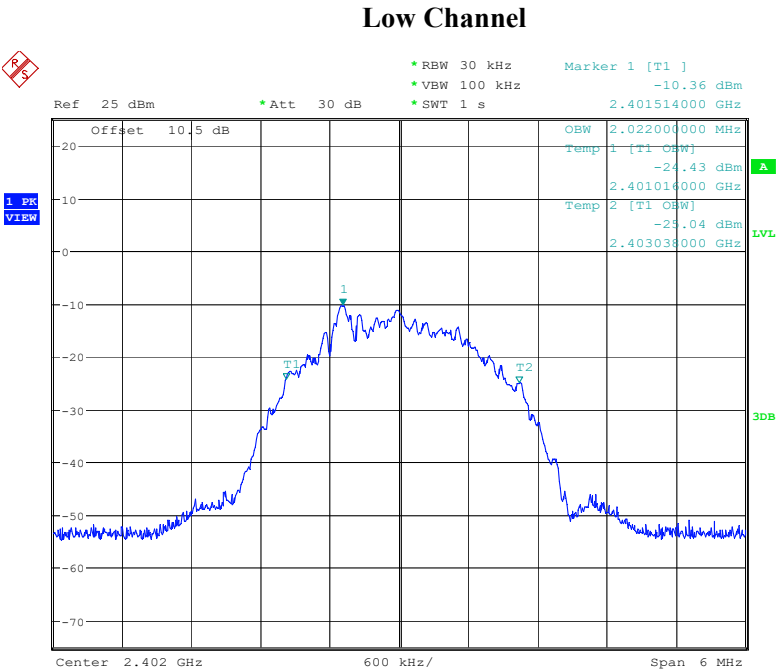


Date: 7.APR.2023 21:27:11

## Middle Channel

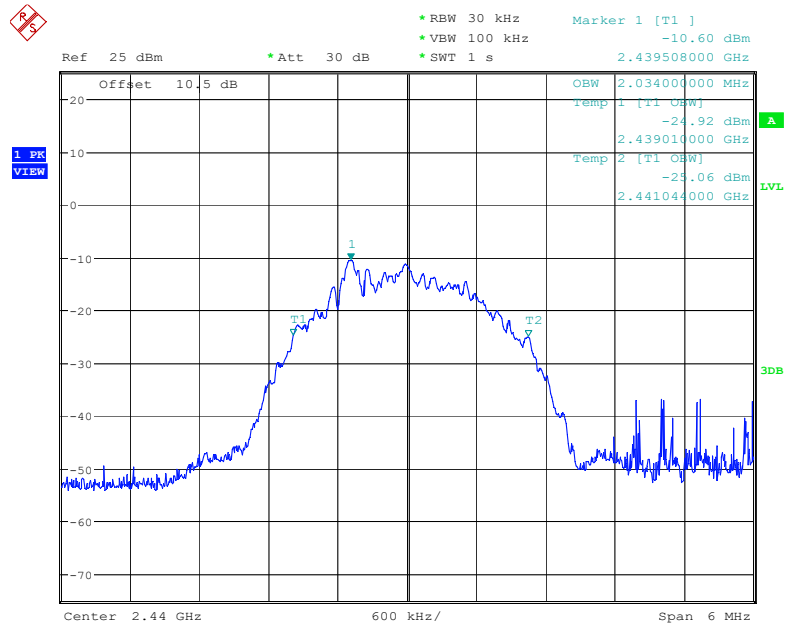

Date: 7.APR.2023 21:30:39

## High Channel

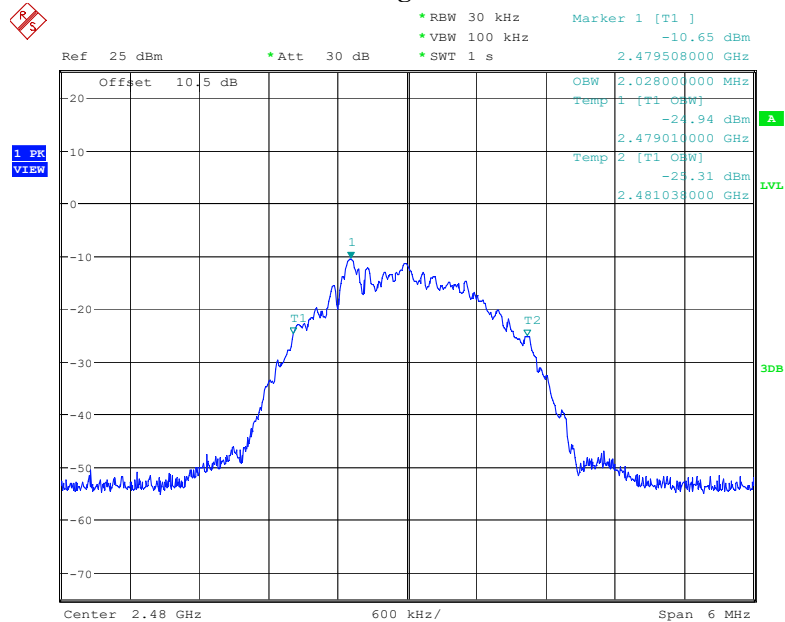


Date: 7.APR.2023 21:33:47




## 802.11b Mode:

## Low Channel

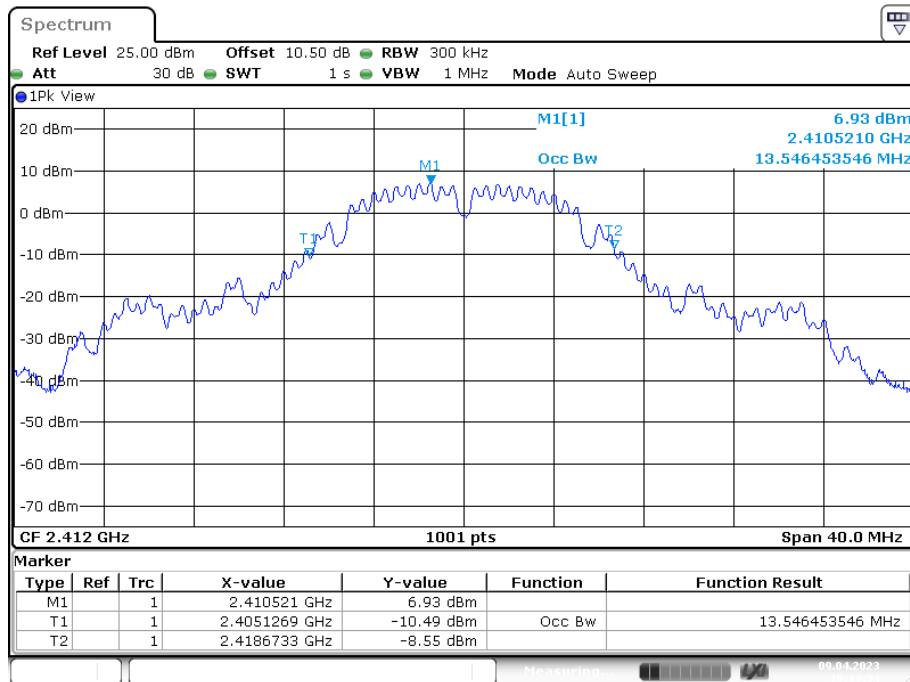


Date: 9.APR.2023 18:13:34

## Middle Channel

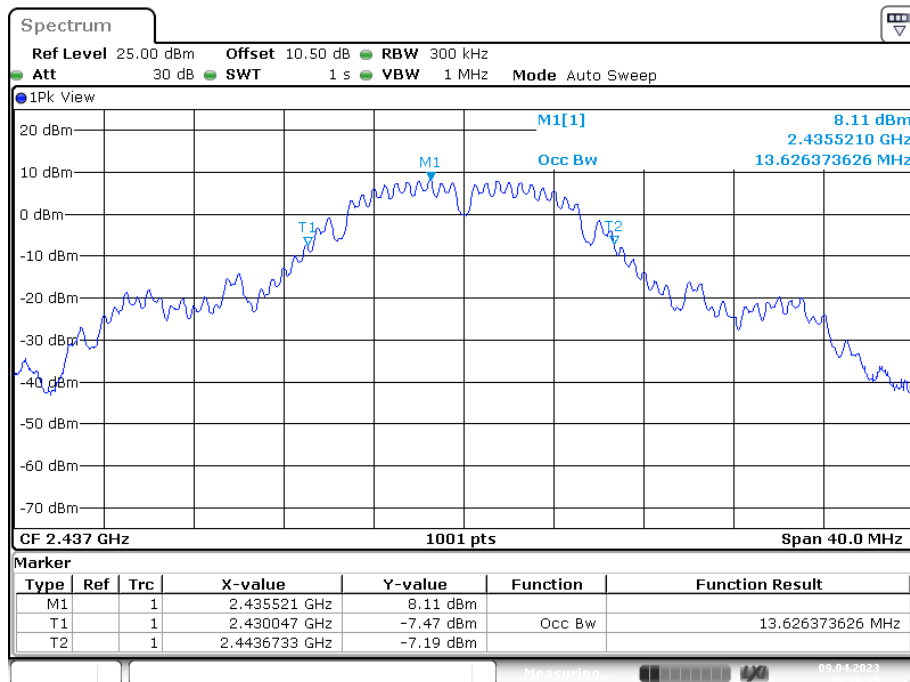

Date: 9.APR.2023 18:16:16


## High Channel

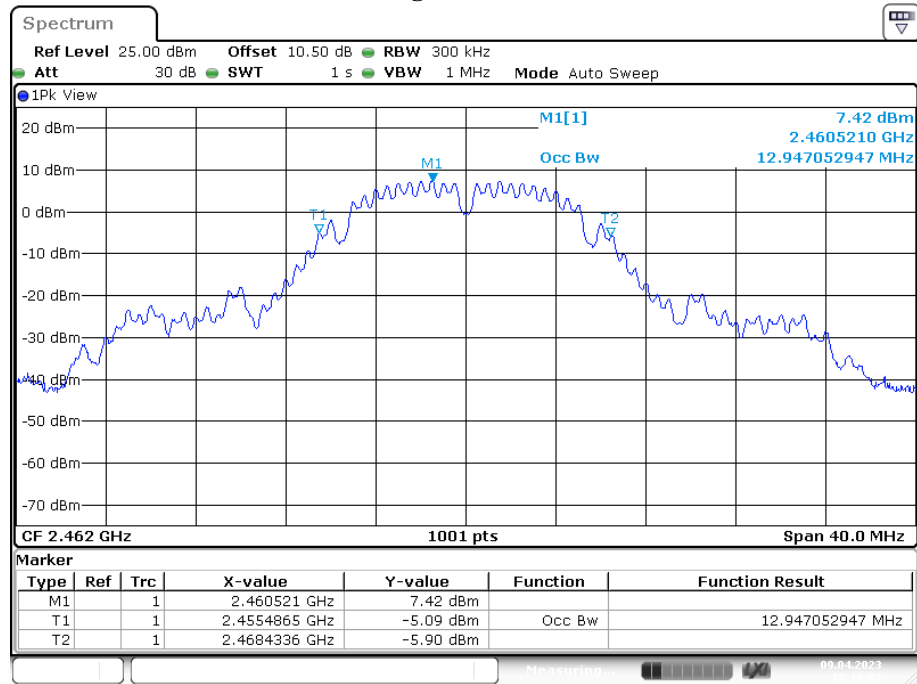

Date: 9.APR.2023 18:19:08


## 802.11g Mode:

## Low Channel

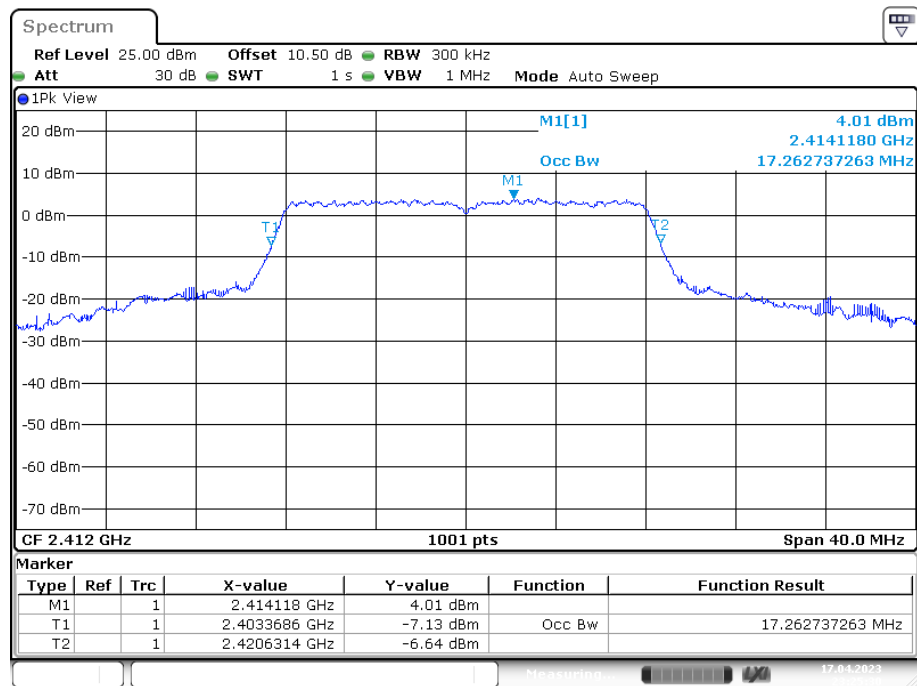


Date: 17.APR.2023 23:25:30

## Middle Channel

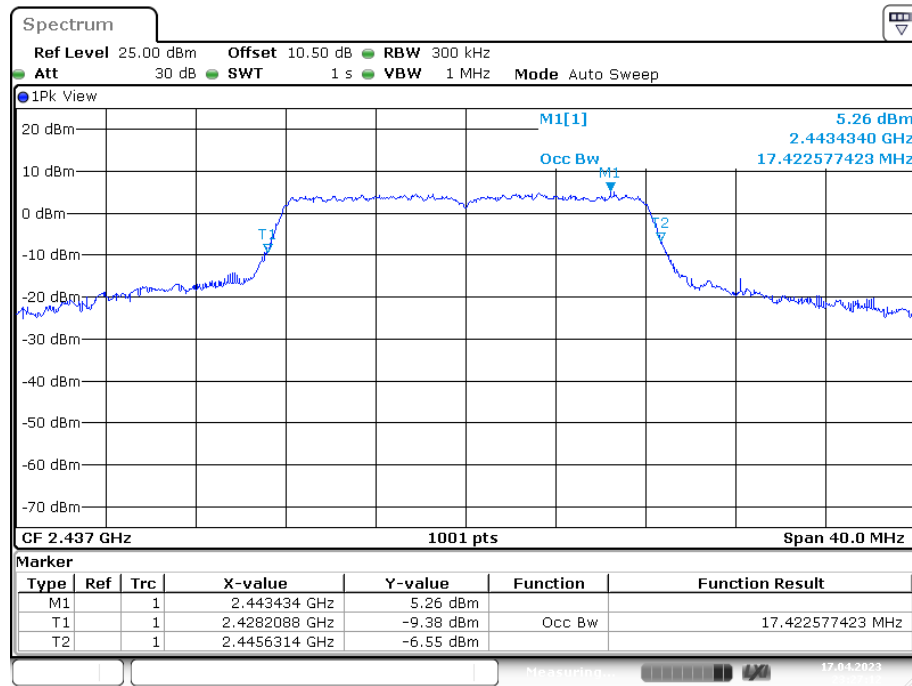

Date: 17.APR.2023 23:27:12


## High Channel

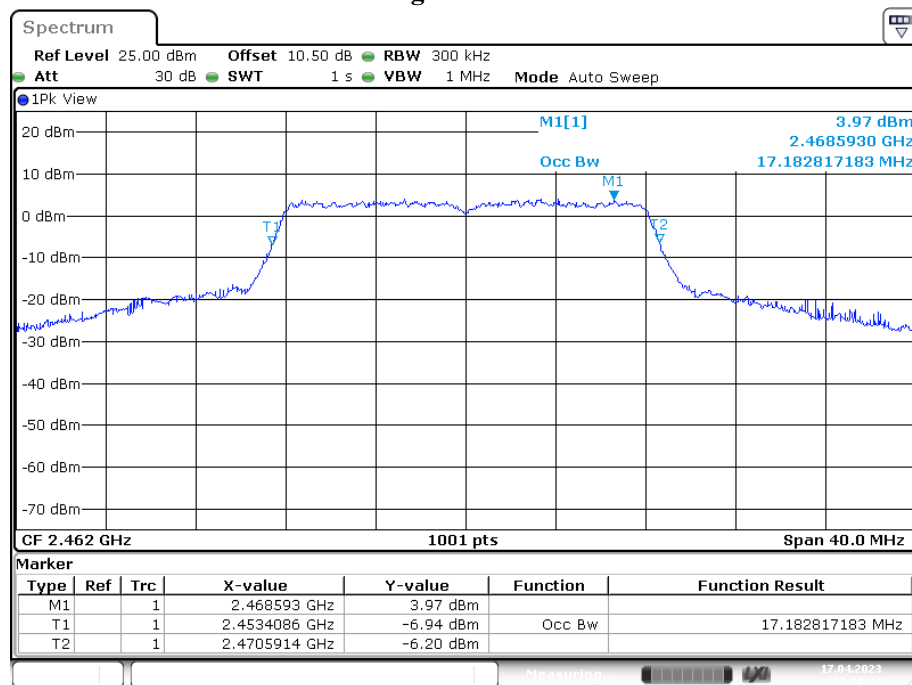

Date: 17.APR.2023 23:28:24


## 802.11n-20 Mode:

## Low Channel

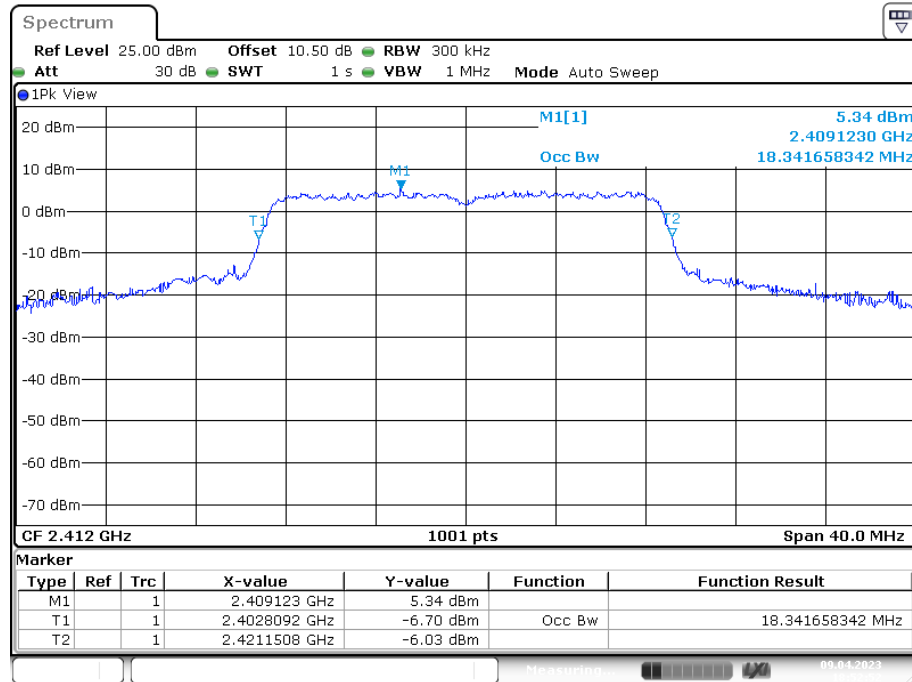


Date: 9.APR.2023 18:52:52

## Middle Channel

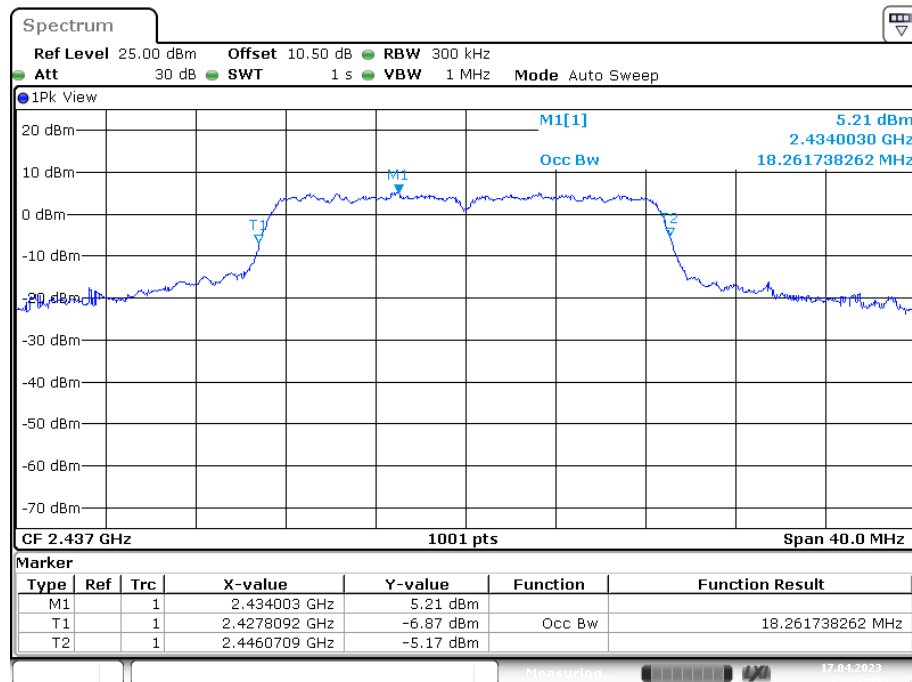

Date: 17.APR.2023 23:22:49


## High Channel

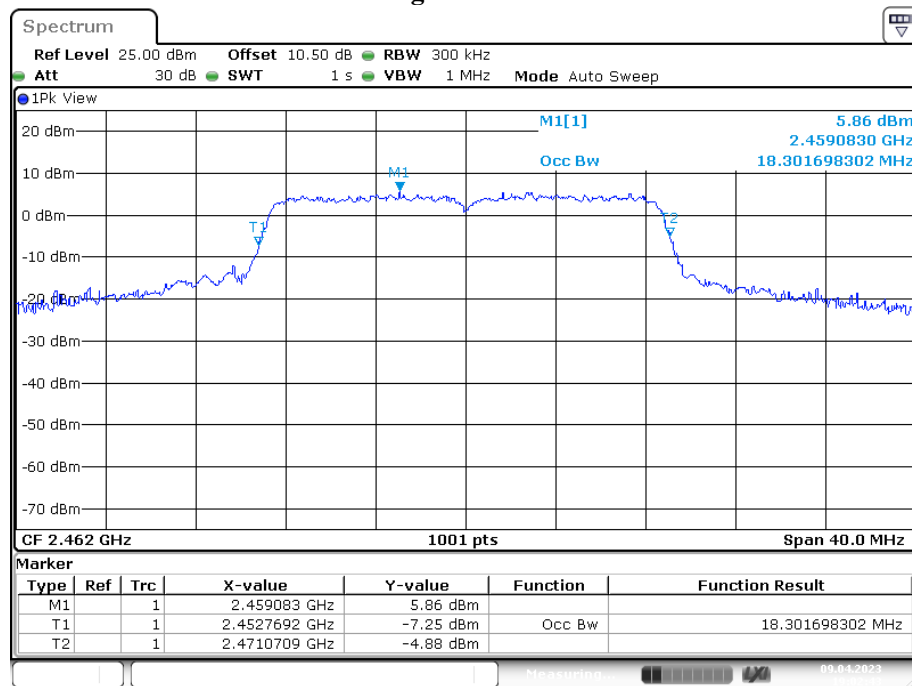

Date: 9.APR.2023 19:02:43


## 802.11n-40 Mode:

## Low Channel

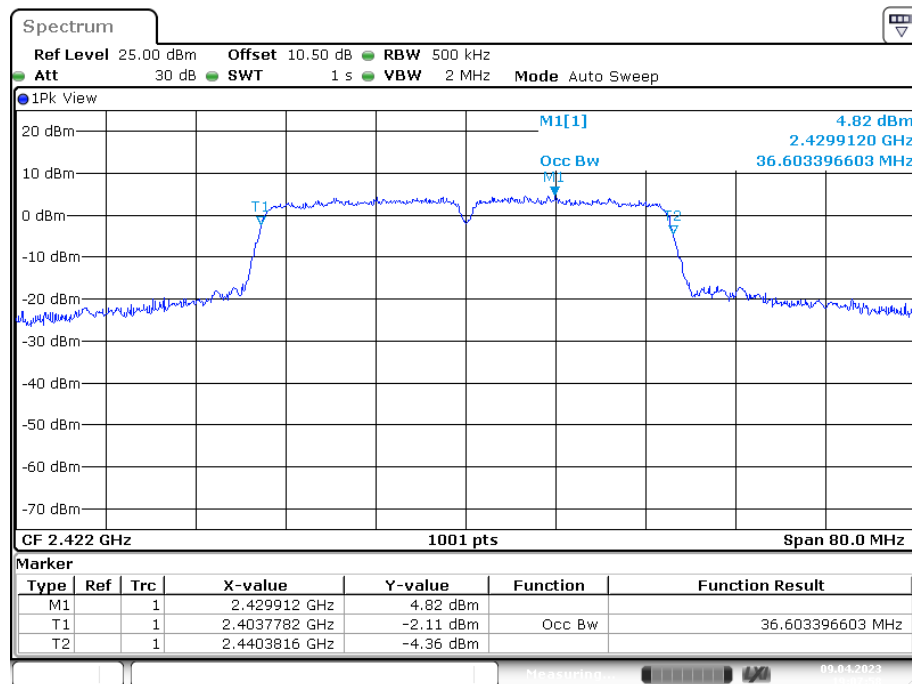


Date: 9.APR.2023 19:07:58

## Middle Channel

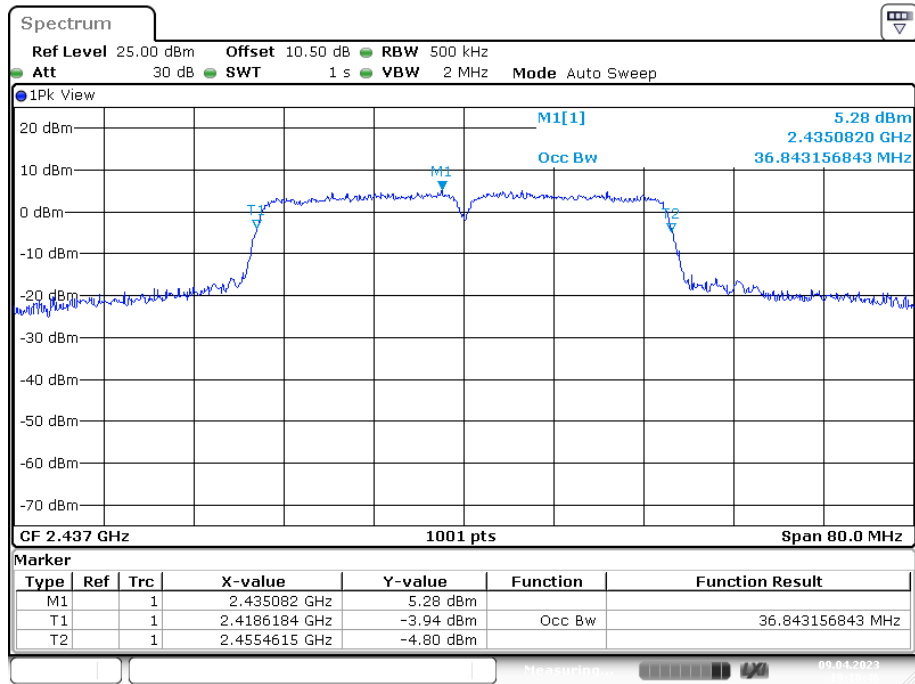

Date: 9.APR.2023 19:18:46

## High Channel

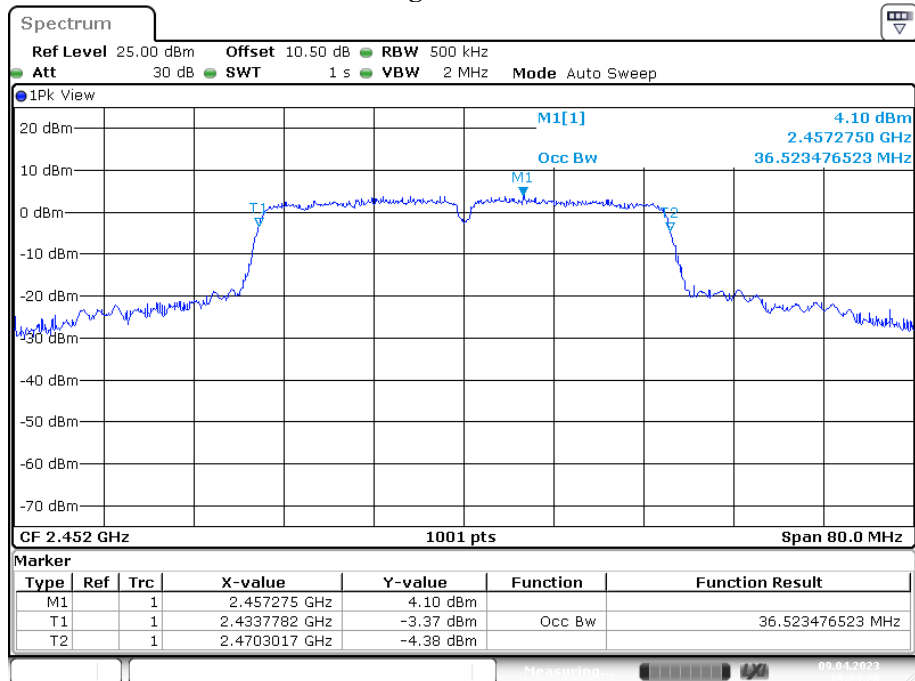

Date: 9.APR.2023 19:24:26

## §15.247(b)(3)&RSS-247 § 5.4(d)MAXIMUM CONDUCTED OUTPUT POWER

### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).


As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure


Test Method: ANSI C63.10-2013 Clause 11.9.1.1 for BLE & Clause 11.9.2.3.2 for Wi-Fi

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

For Wi-Fi mode:

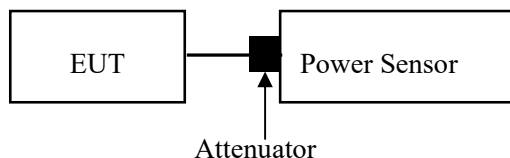

For BLE mode:



**Test Data****Environmental Conditions**

<b>Temperature:</b>	25.7~26.8℃
<b>Relative Humidity:</b>	47~54%
<b>ATM Pressure:</b>	100.2~101.0 kPa

The testing was performed by Roger Ling from 2023-04-09 to 2023-04-17 for WIFI and by Jacob Huang on 2023-04-07 for BLE.

EUT operation mode: Transmitting


Test Result Compliant.

Channel	Frequency (MHz)	Max Conducted Average Output Power (dBm)	Limit (dBm)
802.11b mode			
Low	2412	15.65	30
Middle	2437	<b>16.80</b>	30
High	2462	16.07	30
802.11g mode			
Low	2412	14.60	30
Middle	2437	<b>16.11</b>	30
High	2462	15.01	30
802.11n HT20 mode			
Low	2412	13.27	30
Middle	2437	<b>15.13</b>	30
High	2462	13.81	30
802.11n HT40 mode			
Low	2422	13.35	30
Middle	2437	<b>14.14</b>	30
High	2452	12.89	30


Note: antenna gain=1.76dBi, the maximum EIRP=18.56dBm<36dBm




Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)
BLE 1M			
Low	2402	-3.68	30
Middle	2440	-3.96	30
High	2480	-3.99	30
BLE 2M			
Low	2402	-3.80	30
Middle	2440	-4.03	30
High	2480	-4.08	30
Note: antenna gain=1.76dBi, the maximum EIRP=-1.92dBm<36dBm			

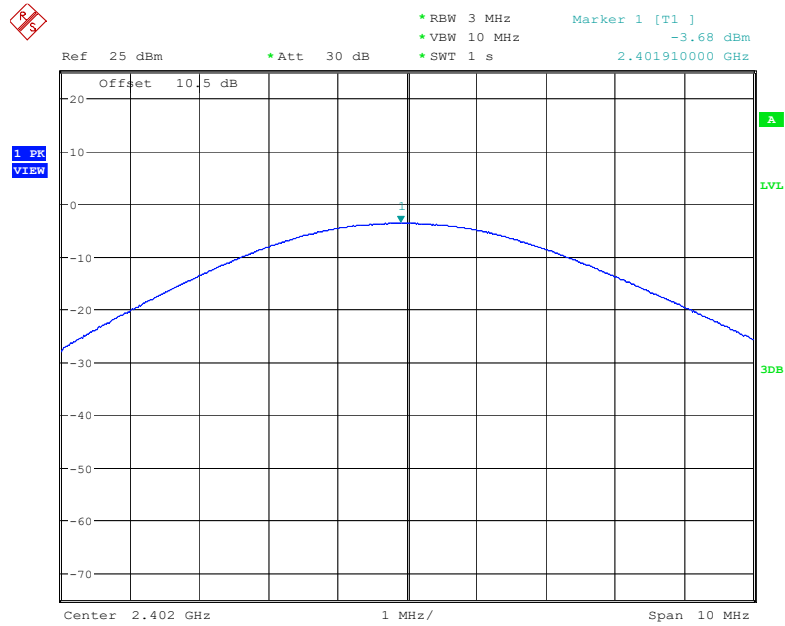**BLE 1M:****Low Channel**

Date: 7.APR.2023 21:10:19

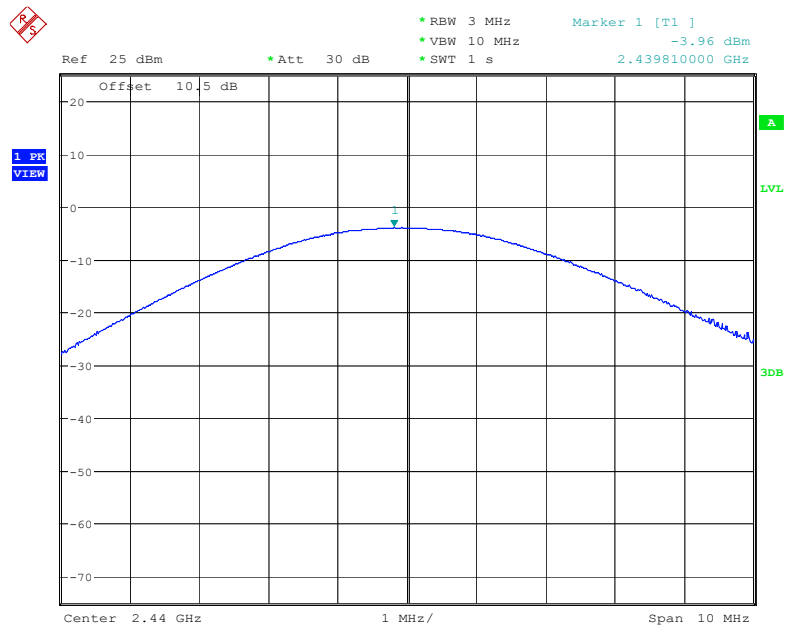
**Middle Channel**

Date: 7.APR.2023 21:13:58

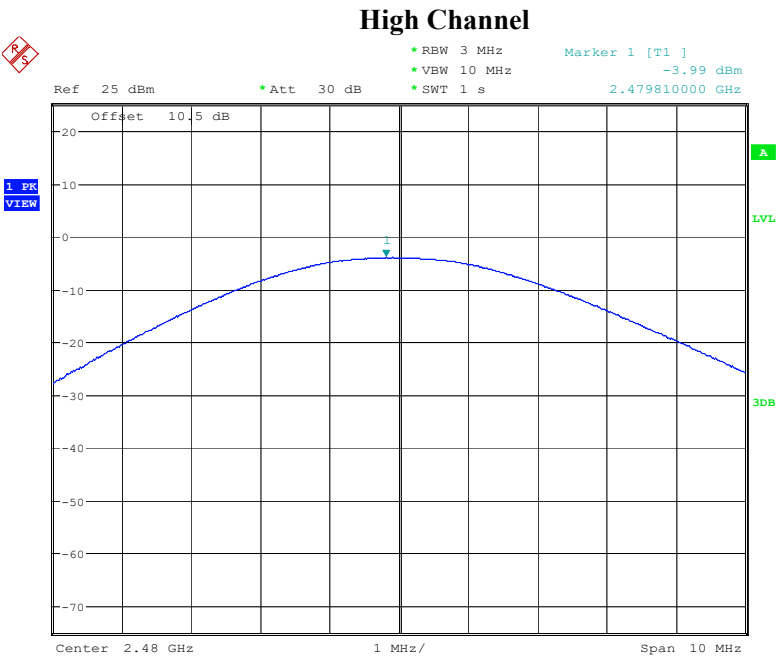


Date: 7.APR.2023 21:16:35

**BLE 2M:**

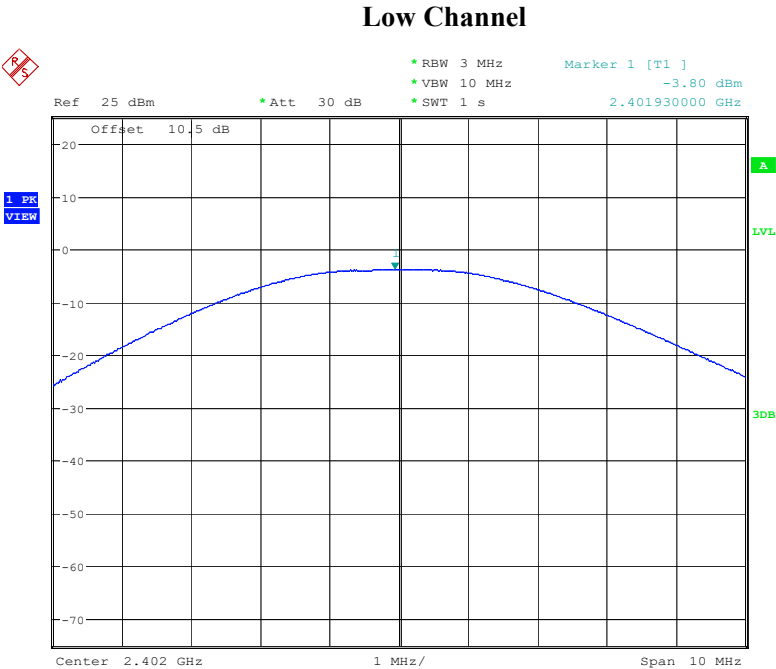


Date: 7.APR.2023 21:26:36

## Middle Channel

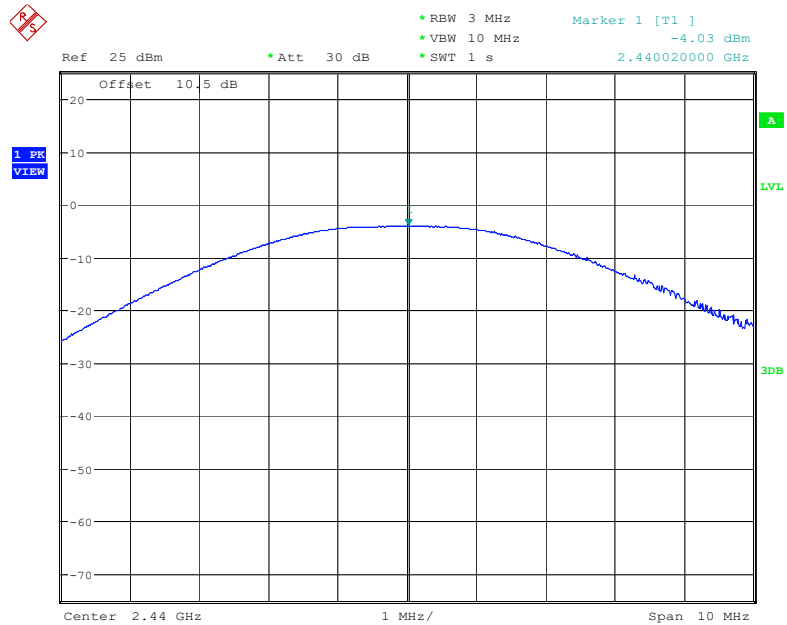

Date: 7.APR.2023 21:29:40

## High Channel

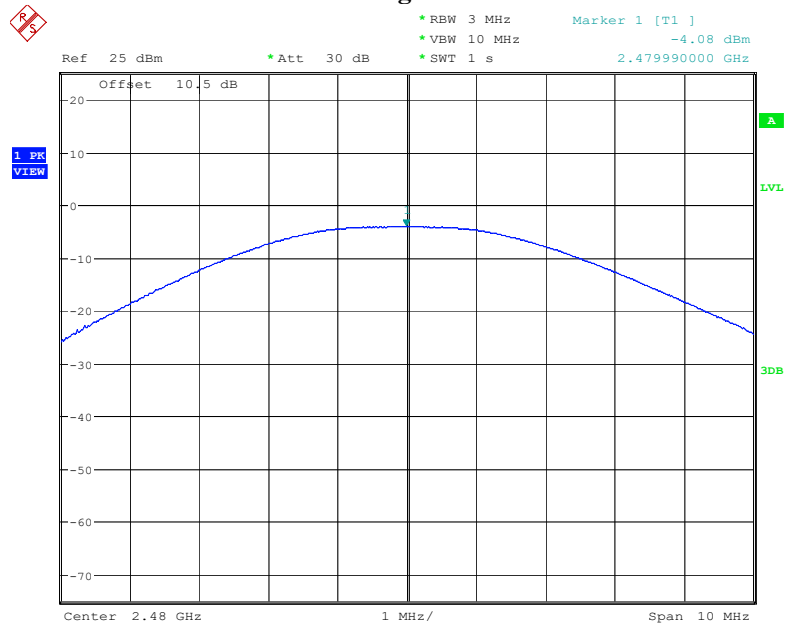

Date: 7.APR.2023 21:33:24

## § 15.247(d)&RSS-247 § 5.5100kHz BANDWIDTH OF FREQUENCY BAND EDGE


### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



### Test Data

#### Environmental Conditions

Temperature:	25.7~26.8℃
Relative Humidity:	47~54%
ATM Pressure:	100.2~101.0 kPa


*The testing was performed by Roger Ling from 2023-04-17 to 2023-04-18 for WIFI and by Jacob Huang on 2023-04-07 for BLE.*

*EUT operation mode: Transmitting*

Test Result Compliant.


BLE 1M:

Band Edge, Left Side

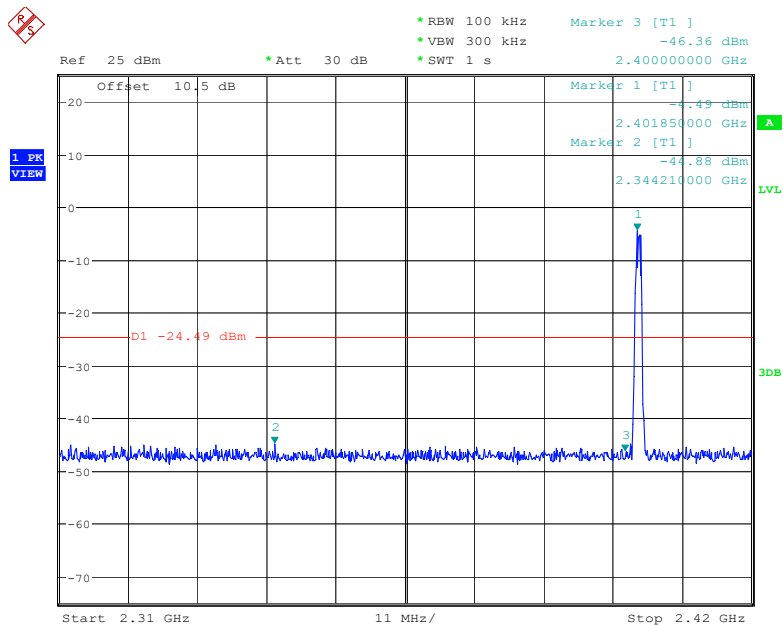

Date: 7.APR.2023 21:12:14


Band Edge, Right Side

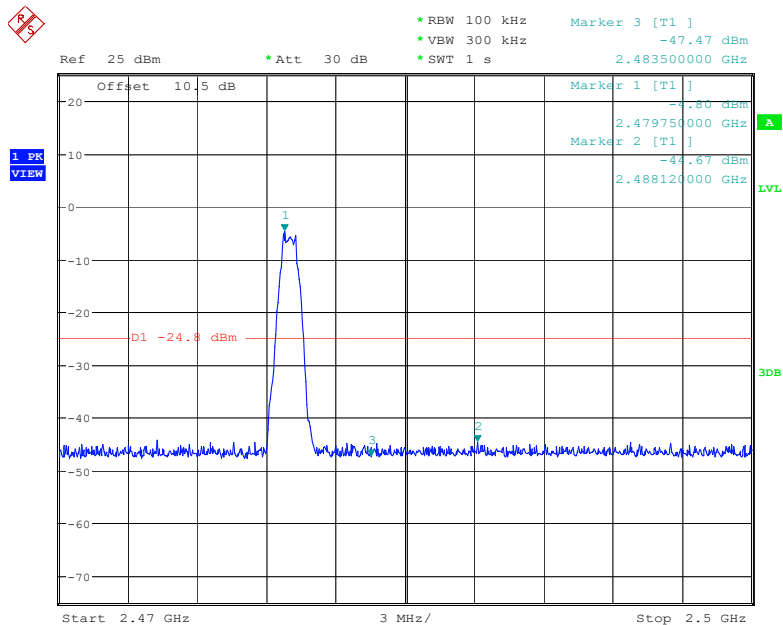

Date: 7.APR.2023 21:18:30


BLE 2M:

Band Edge, Left Side

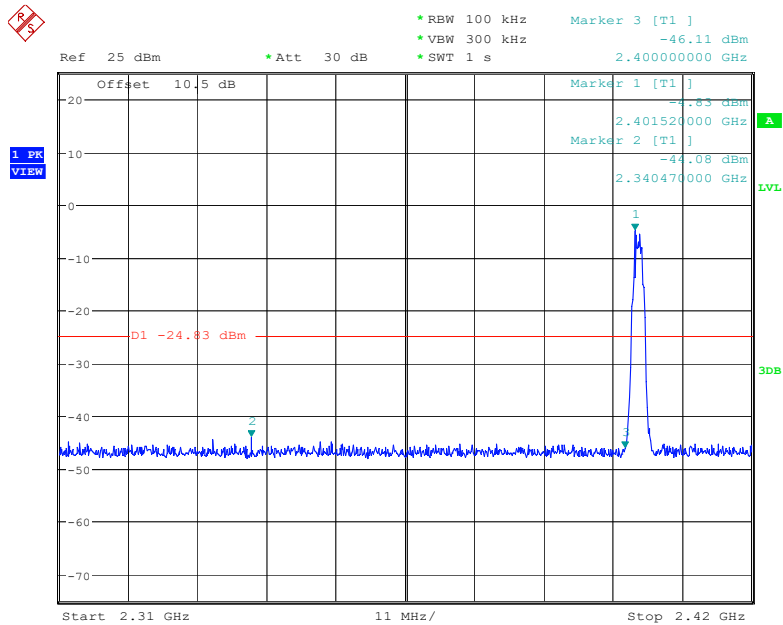


Date: 7.APR.2023 21:28:32

Band Edge, Right Side

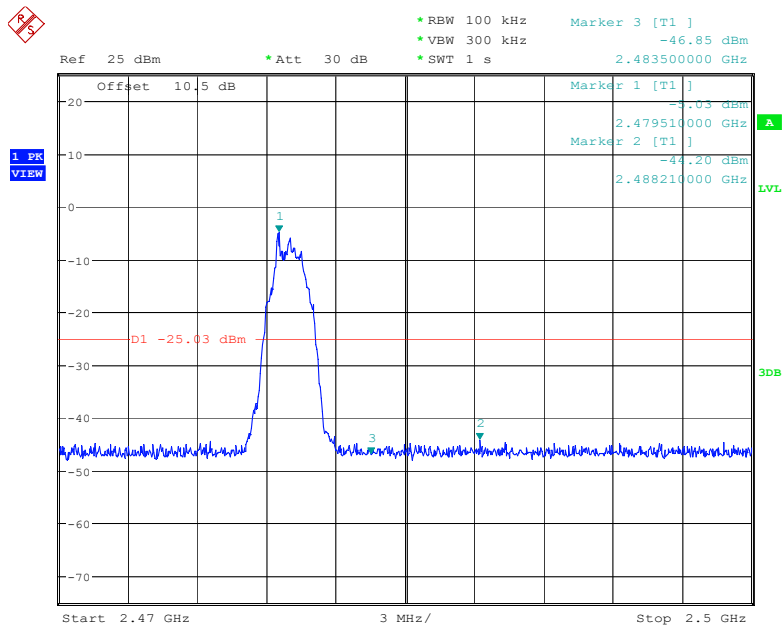

Date: 7.APR.2023 21:35:19

## 802.11b mode Left Side

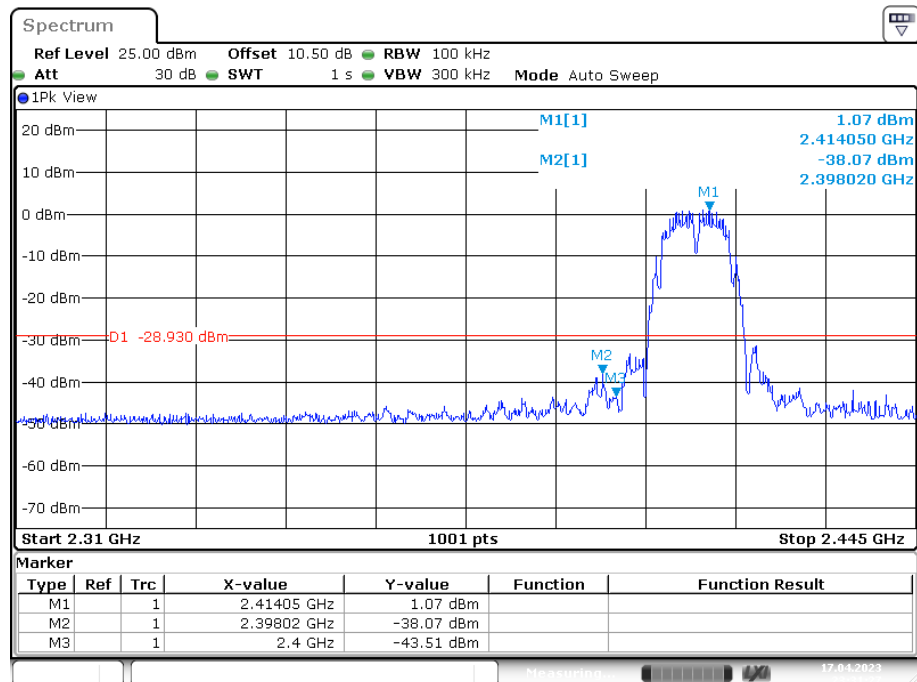

Date: 17.APR.2023 23:31:27


## 802.11b mode Right Side



Date: 17.APR.2023 23:32:17




## 802.11g mode Left Side

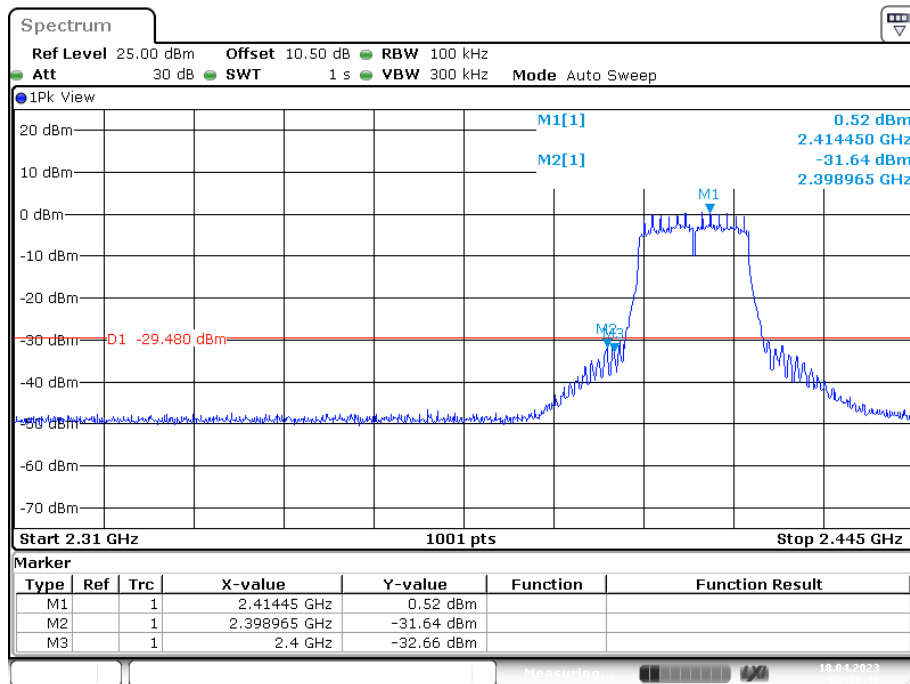


Date: 18.APR.2023 02:30:48

## 802.11g mode Right Side

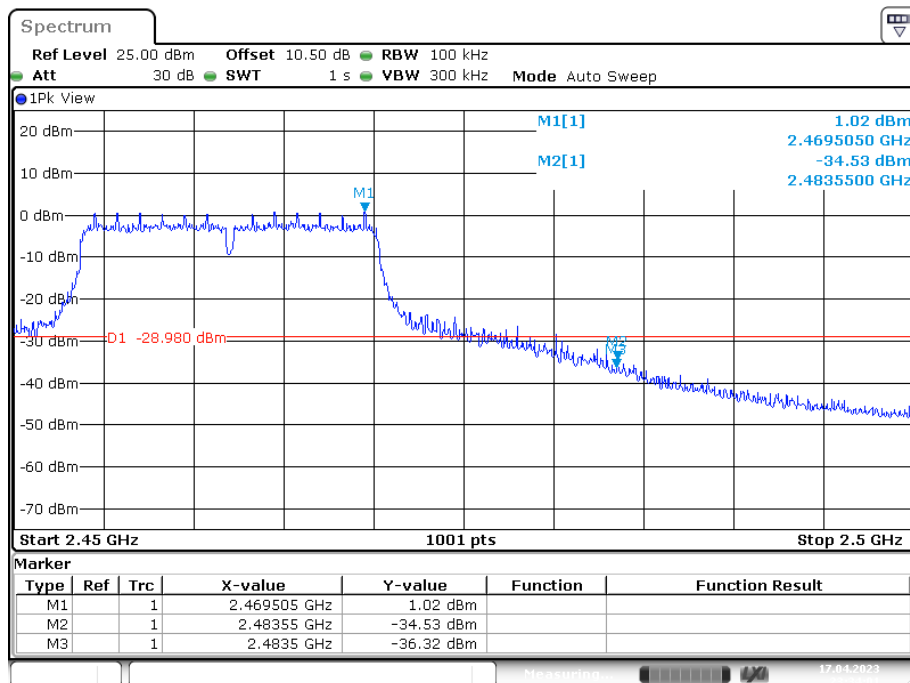


Date: 17.APR.2023 23:34:02

## 802.11n-20 mode Left Side

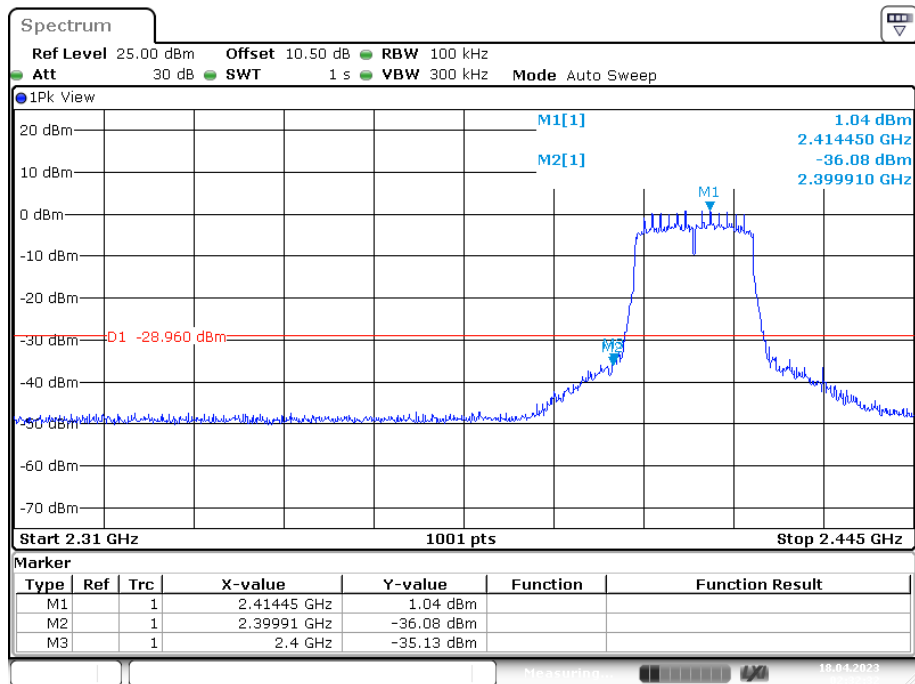


Date: 18.APR.2023 02:32:33

## 802.11n-20 mode Right Side

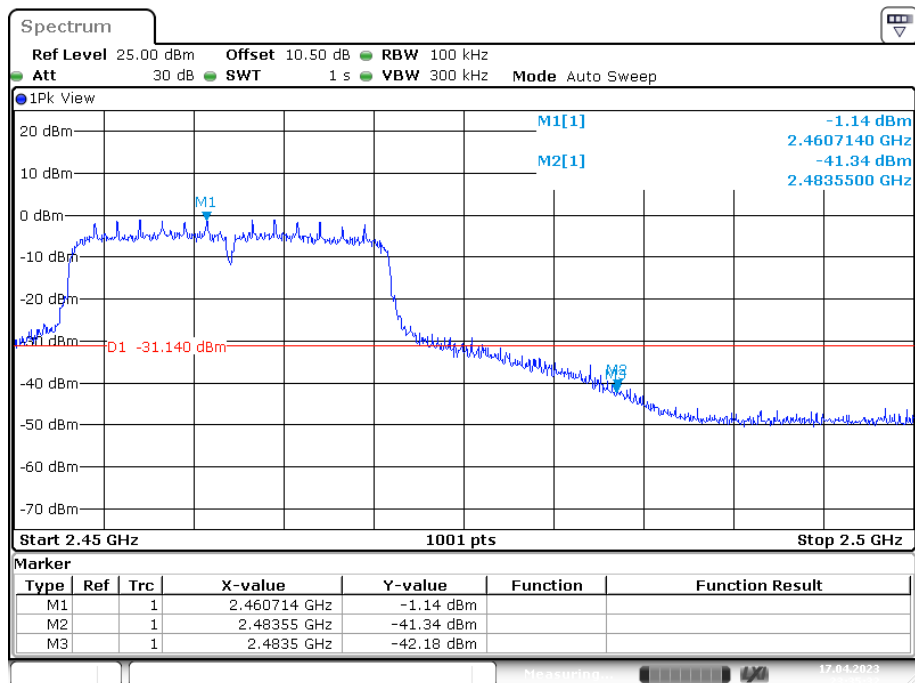


Date: 17.APR.2023 23:35:33

## 802.11n-40 mode Left Side

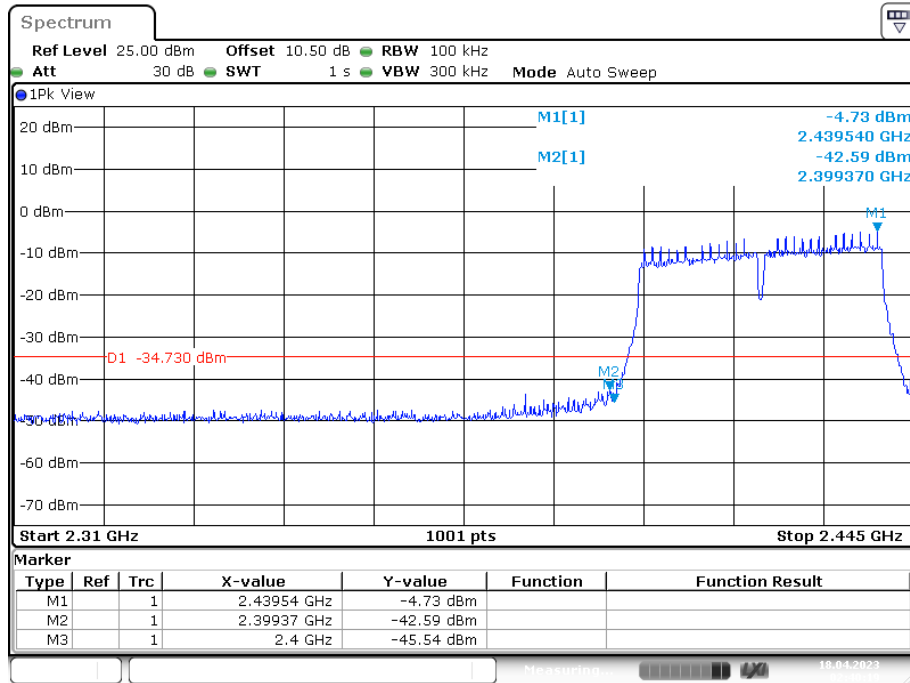

Date: 18.APR.2023 02:40:20

## 802.11n-40 mode Right Side

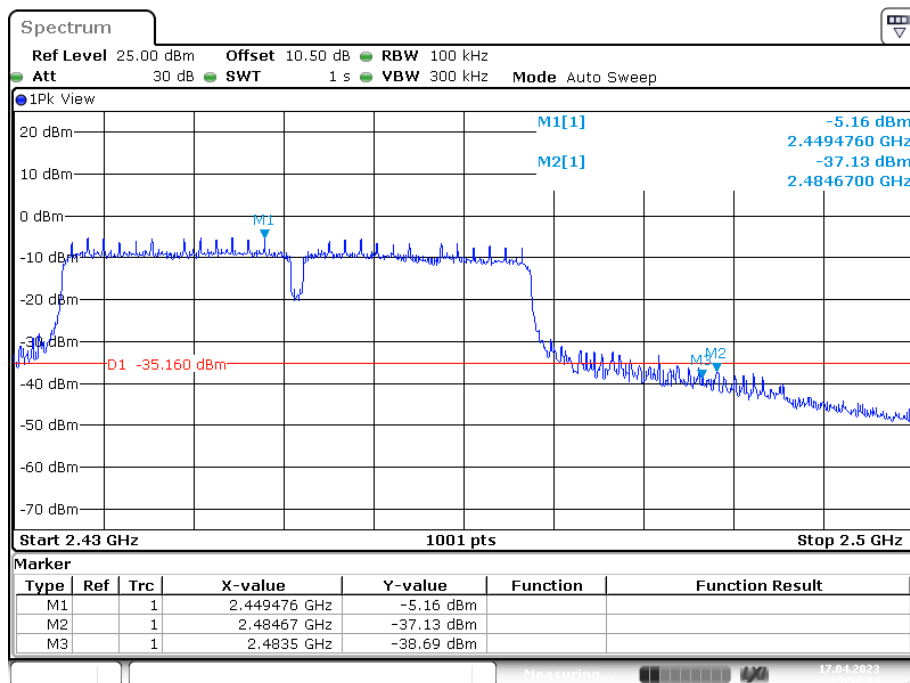

Date: 17.APR.2023 23:37:25

---

## §15.247(e)&RSS-247 § 5.2 (b)POWER SPECTRAL DENSITY

---

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.

Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .

1. Set the VBW  $\geq 3 \times \text{RBW}$ .
2. Set the span to 1.5 times the DTS bandwidth.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level within the RBW.


If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Method: ANSI C63.10-2013 Clause 11.10.3 & 11.10.5

Use this procedure when the maximum average conducted output power in the fundamental emission is used to demonstrate compliance.

1. Measure the duty cycle ( $D$ ) of the transmitter output signal as described in ANSI C63.10-2013 11.6.
2. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
3. Set the VBW  $\geq 3 \times \text{RBW}$ .
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = Power Averaging (rms).
6. Ensure that the number of measurement points in the sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .
7. Sweep time = auto couple.
8. Trace mode = trace averaging (rms) mode over a minimum of 100 traces.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum amplitude level.
11. When the EUT cannot be configured to transmit continuously (i.e.,  $D < 98\%$ ), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level, and when the transmission duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2\%$ ), add  $[10 \log (1 / D)]$ , where  $D$  is the duty cycle measured in step 1), to the measured PSD to compute the average PSD during the actual transmission time.

12. When the EUT transmits continuously (or with a  $D \geq 98\%$ ), step 11 is not required.  
 13. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

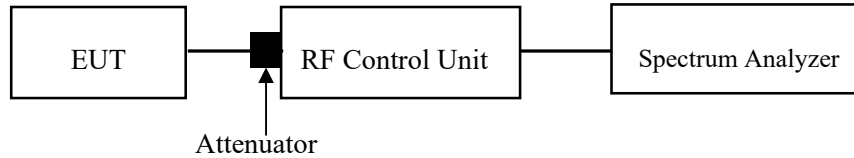

## Test Data

### Environmental Conditions

Temperature:	25.7~26.8℃
Relative Humidity:	47~54%
ATM Pressure:	100.2~101.0 kPa


The testing was performed by Roger Ling on 2023-04-09 for WIFI and by Jacob Huang on 2023-04-07 for BLE.

EUT operation mode: Transmitting


Test Result: Compliant.

Channel	Frequency (MHz)	Reading (dBm/10kHz)	Duty Cycle factor	PSD (dBm/10kHz)	Limit (dBm/3kHz)
802.11b mode					
Low	2412	-11.86	/	-11.86	$\leq 8$
Middle	2437	-10.40	/	-10.40	$\leq 8$
High	2462	-10.79	/	-10.79	$\leq 8$
802.11g mode					
Low	2412	-14.90	0.45	-14.45	$\leq 8$
Middle	2437	-12.87	0.45	-12.42	$\leq 8$
High	2462	-14.53	0.45	-14.08	$\leq 8$
802.11n-HT20 mode					
Low	2412	-16.17	0.47	-15.70	$\leq 8$
Middle	2437	-13.70	0.47	-13.23	$\leq 8$
High	2462	-15.12	0.47	-14.65	$\leq 8$
802.11n-HT40 mode					
Low	2422	-18.91	0.90	-18.01	$\leq 8$
Middle	2437	-17.69	0.90	-16.79	$\leq 8$
High	2452	-19.23	0.90	-18.33	$\leq 8$

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
BLE 1M			
Low	2402	-20.02	$\leq 8$
Middle	2440	-20.47	$\leq 8$
High	2480	-20.31	$\leq 8$
BLE 2M			
Low	2402	-23.65	$\leq 8$
Middle	2440	-23.74	$\leq 8$
High	2480	-23.84	$\leq 8$

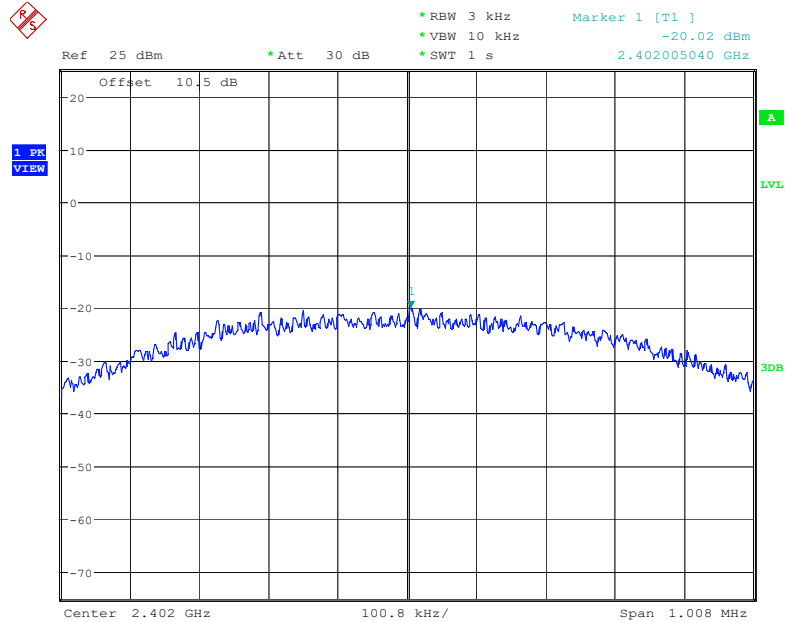
**BLE 1M:****Power Spectral Density, Low Channel**

Date: 7.APR.2023 21:11:52

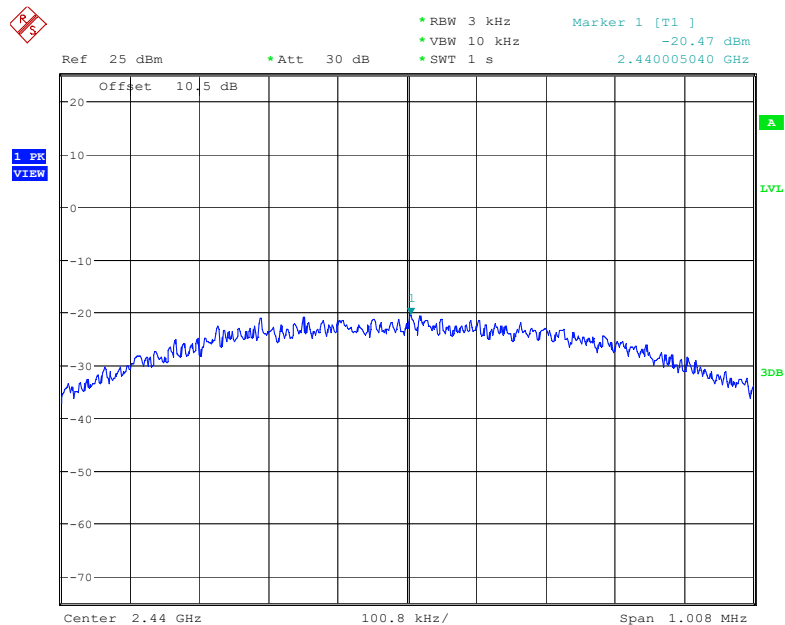**Power Spectral Density, Middle Channel**

Date: 7.APR.2023 21:15:43


## Power Spectral Density, High Channel

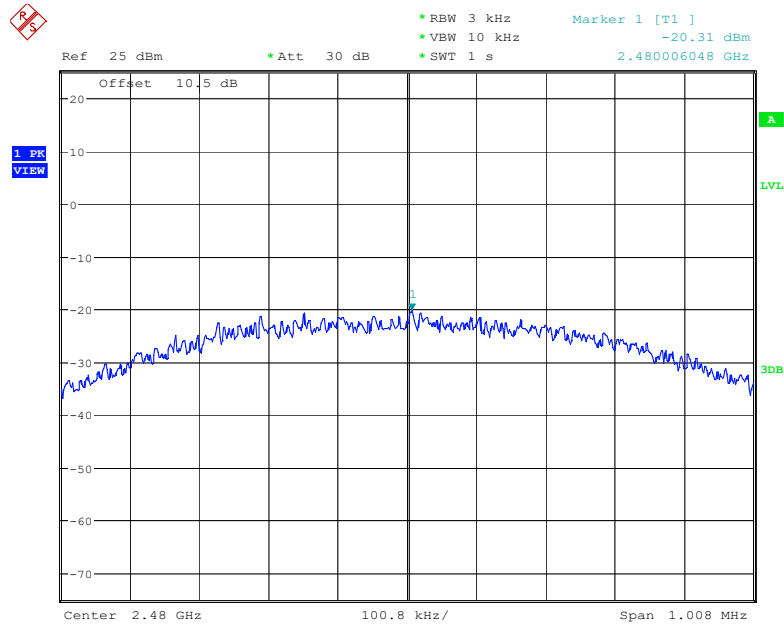

Date: 7.APR.2023 21:17:56

## BLE 2M:


## Power Spectral Density, Low Channel

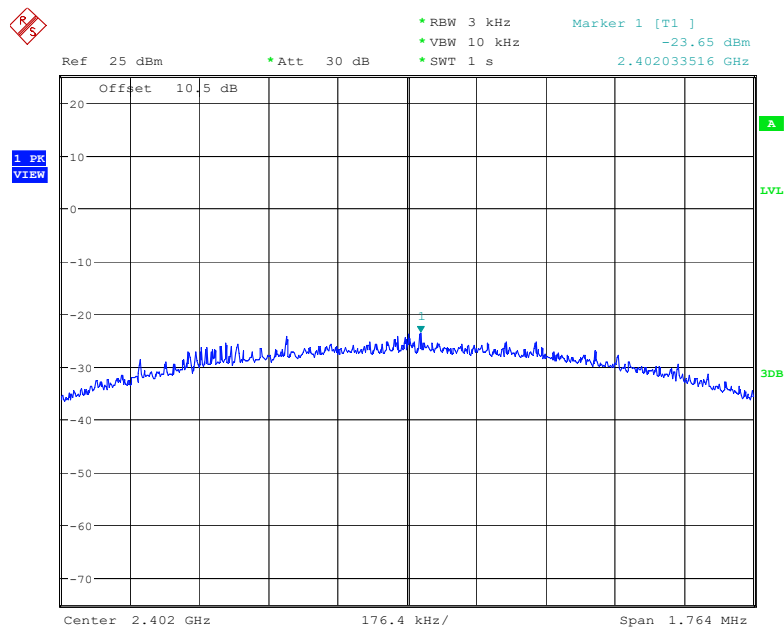

Date: 7.APR.2023 21:27:57




## Power Spectral Density, Middle Channel

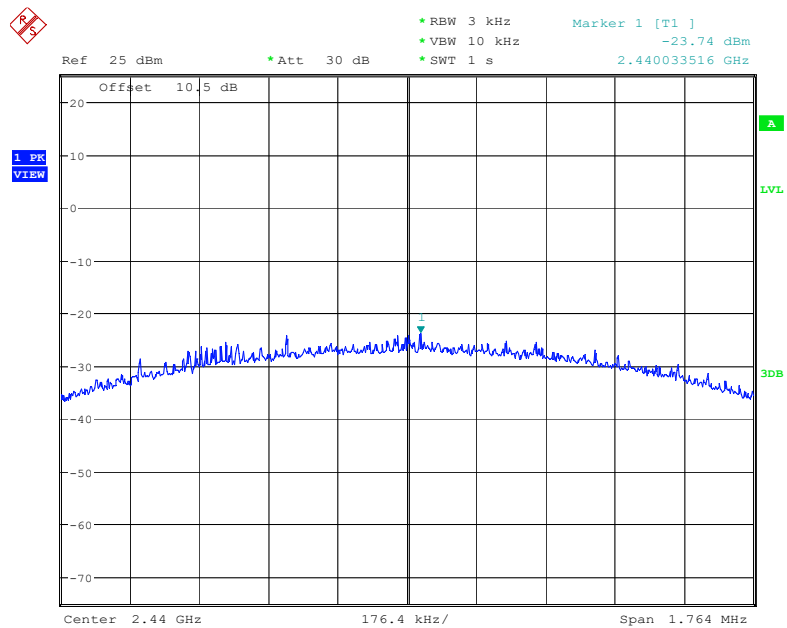

Date: 7.APR.2023 21:32:13


## Power Spectral Density, High Channel

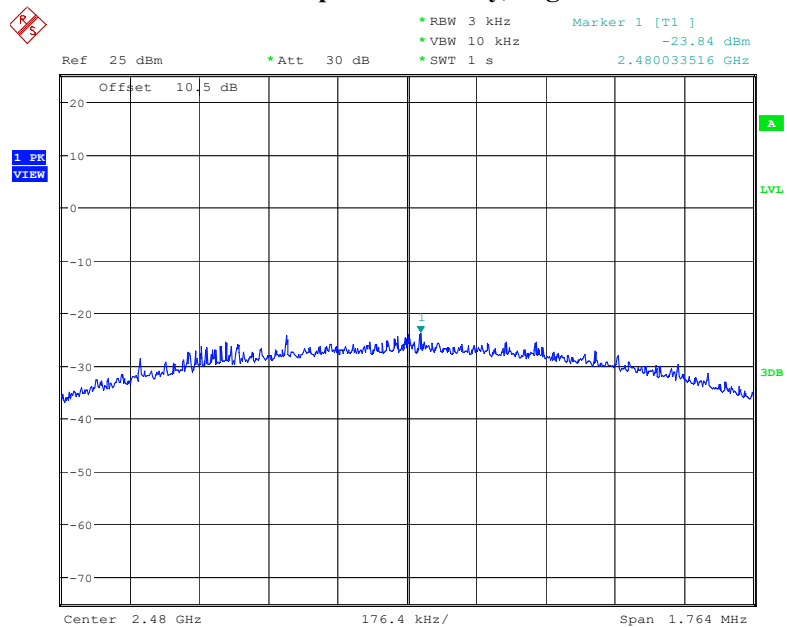

Date: 7.APR.2023 21:34:45


## 802.11 b mode:

## Power Spectral Density, Low Channel

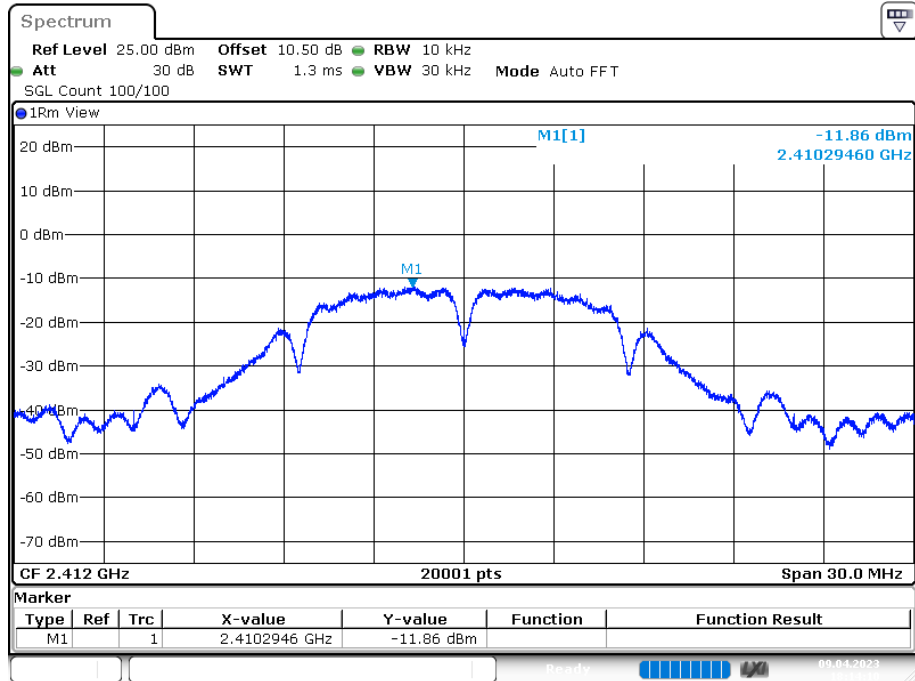


Date: 9.APR.2023 18:14:11

## Power Spectral Density, Middle Channel

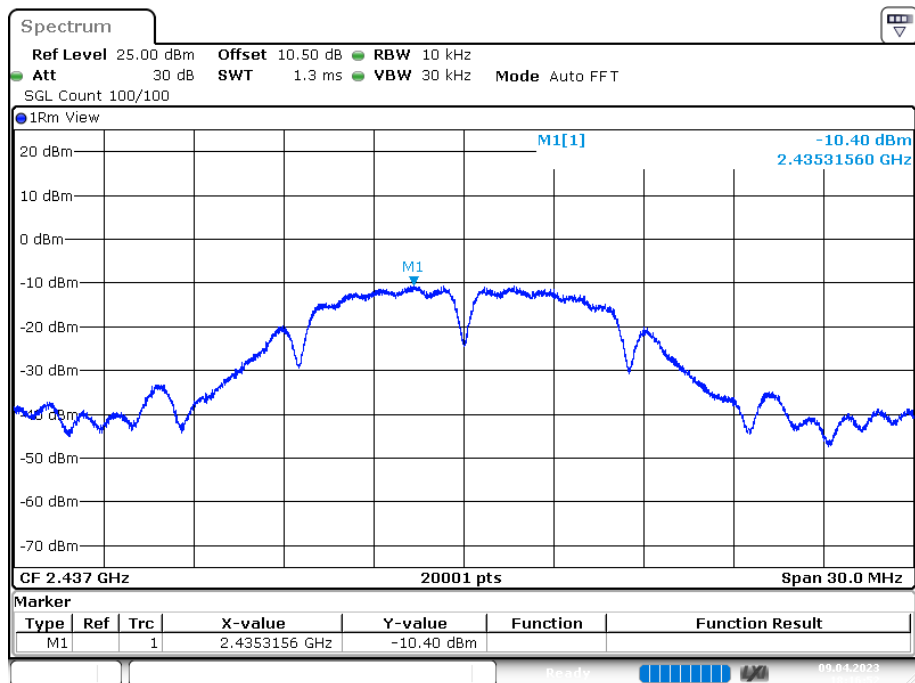

Date: 9.APR.2023 18:16:53


## Power Spectral Density, High Channel

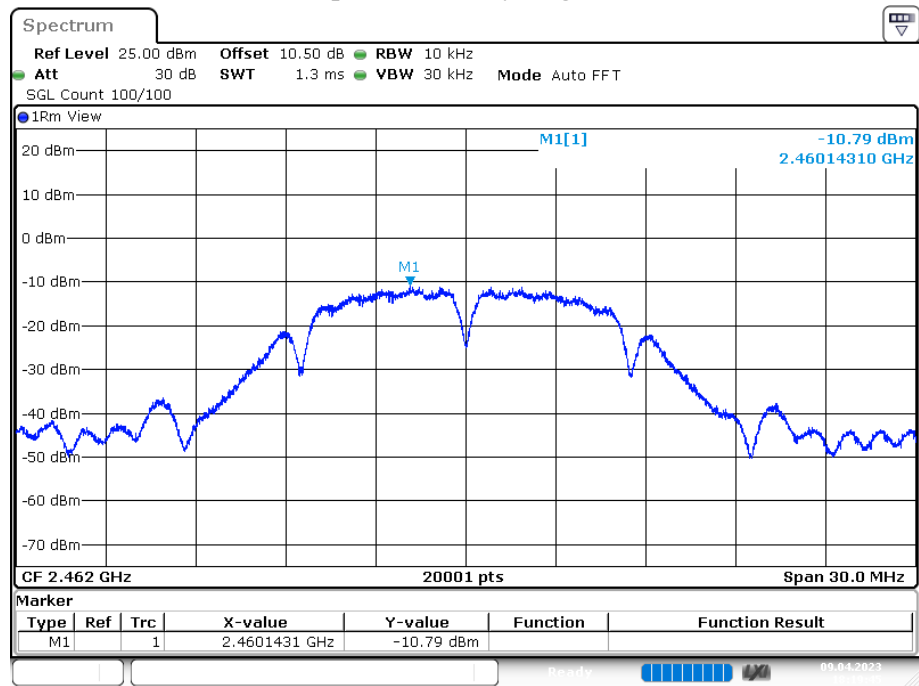

Date: 9.APR.2023 18:19:45


802.11 g mode:

## Power Spectral Density, Low Channel

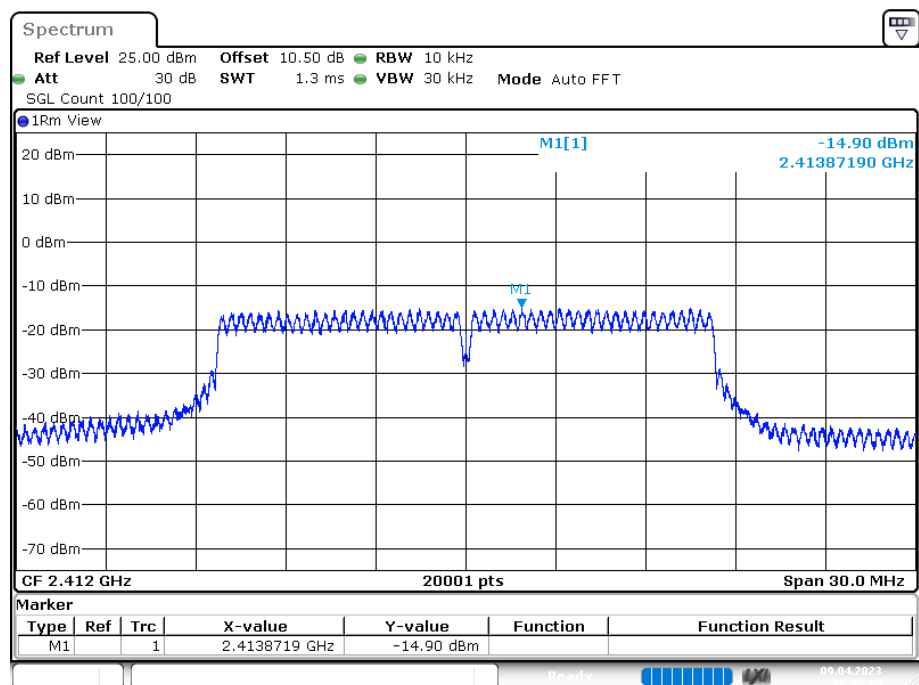


Date: 9.APR.2023 18:35:10

## Power Spectral Density, Middle Channel

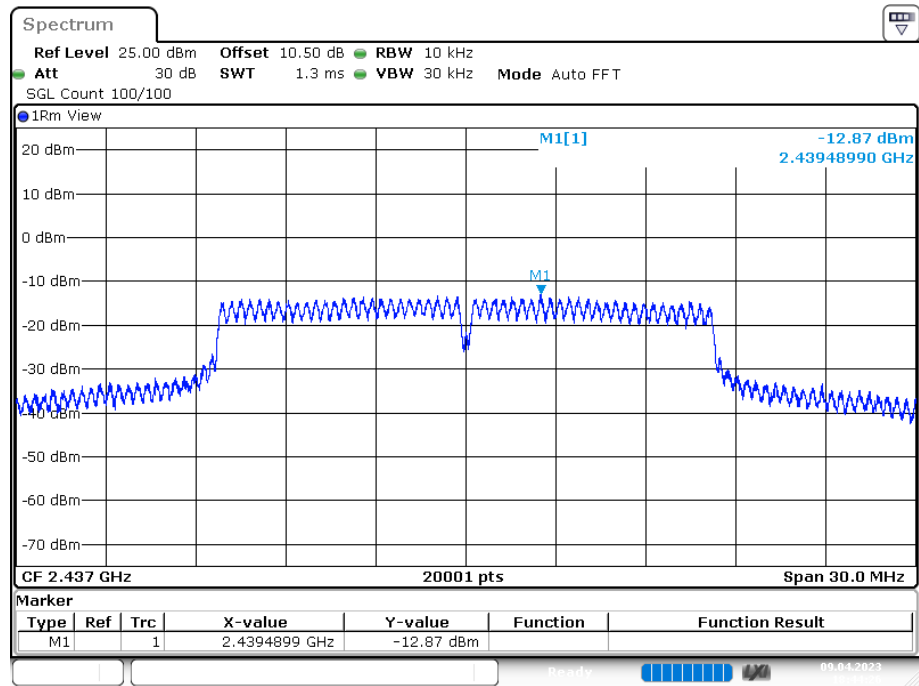

Date: 9.APR.2023 18:44:26


## Power Spectral Density, High Channel

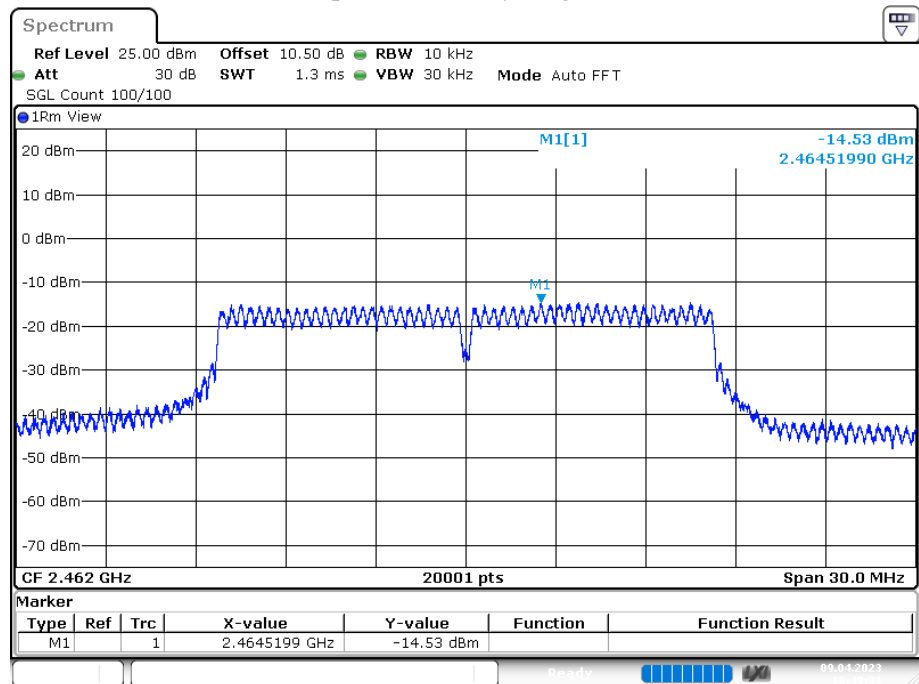

Date: 9.APR.2023 18:49:32


## 802.11n-20 mode:

## Power Spectral Density, Low Channel

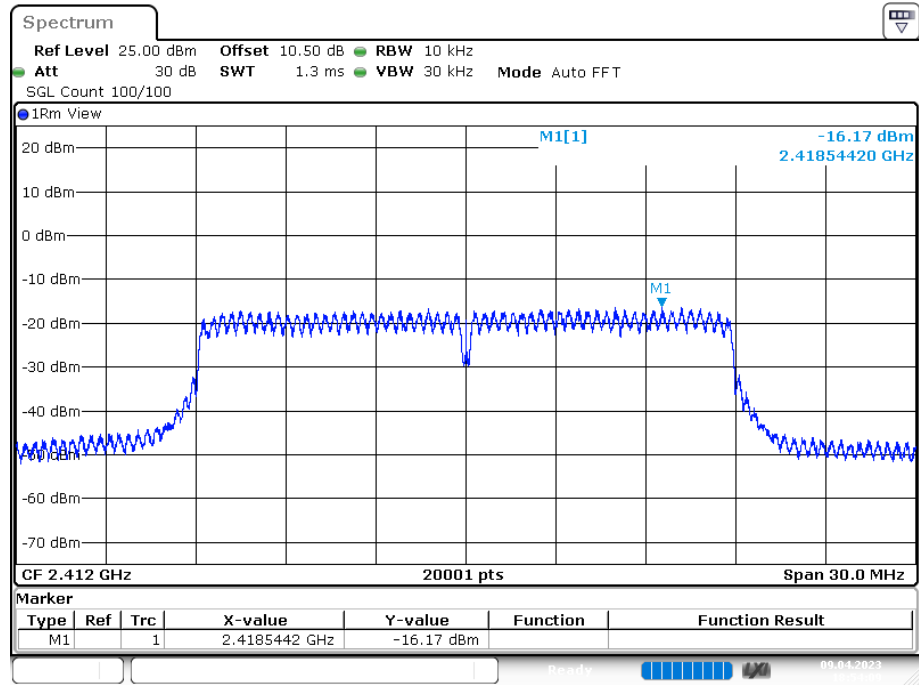


Date: 9.APR.2023 18:54:09

## Power Spectral Density, Middle Channel

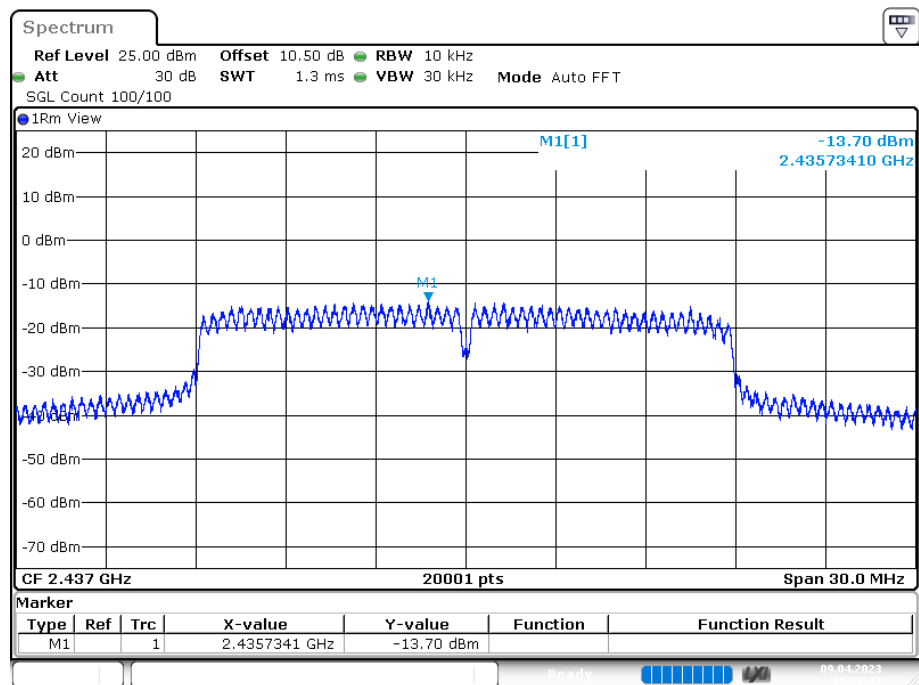

Date: 9.APR.2023 18:59:27


## Power Spectral Density, High Channel

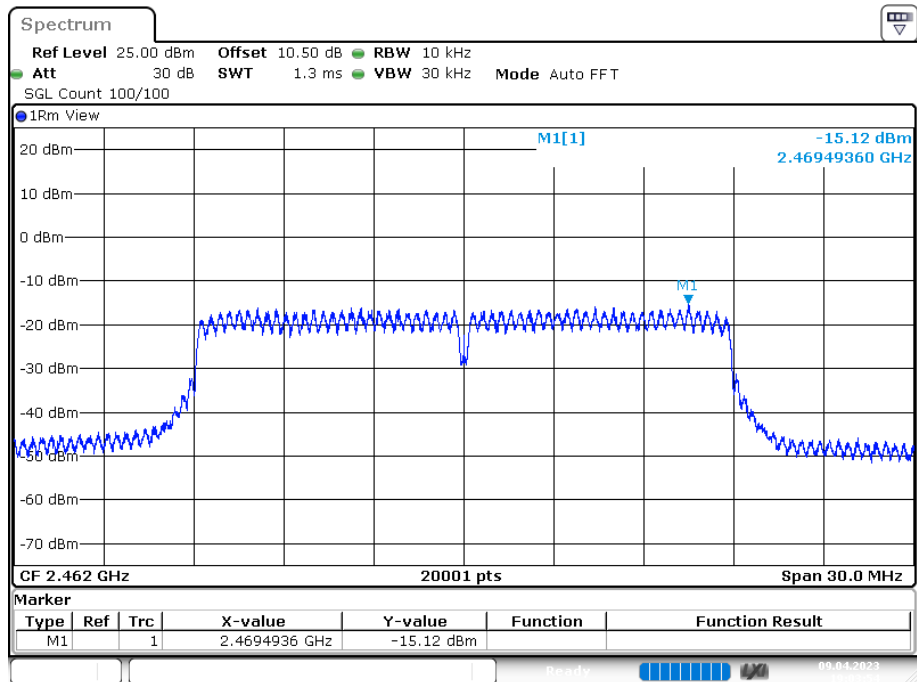

Date: 9.APR.2023 19:03:54


802.11n-40 mode:

## Power Spectral Density, Low Channel

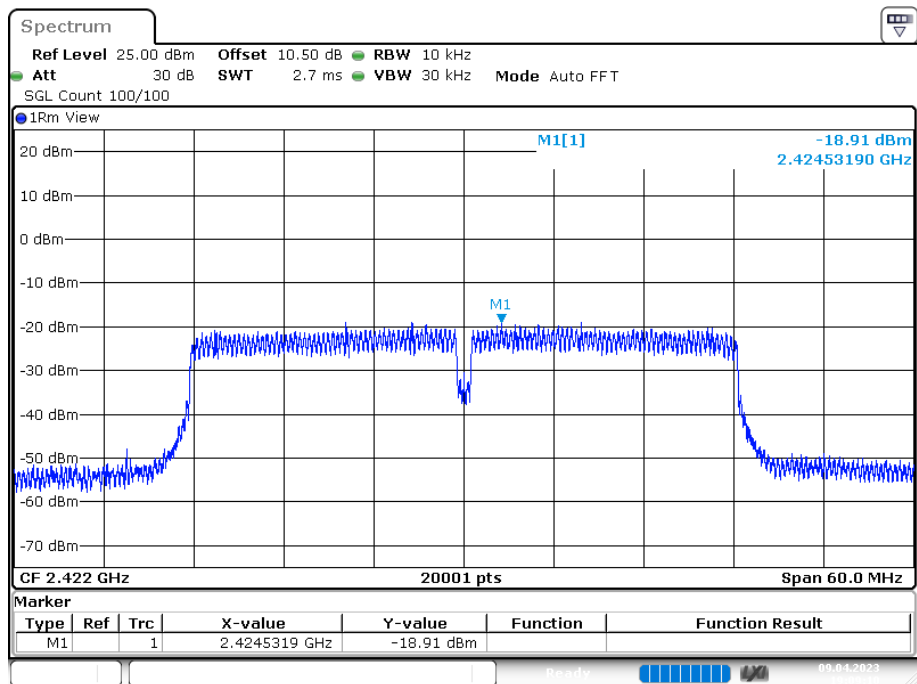


Date: 9.APR.2023 19:09:10

## Power Spectral Density, Middle Channel

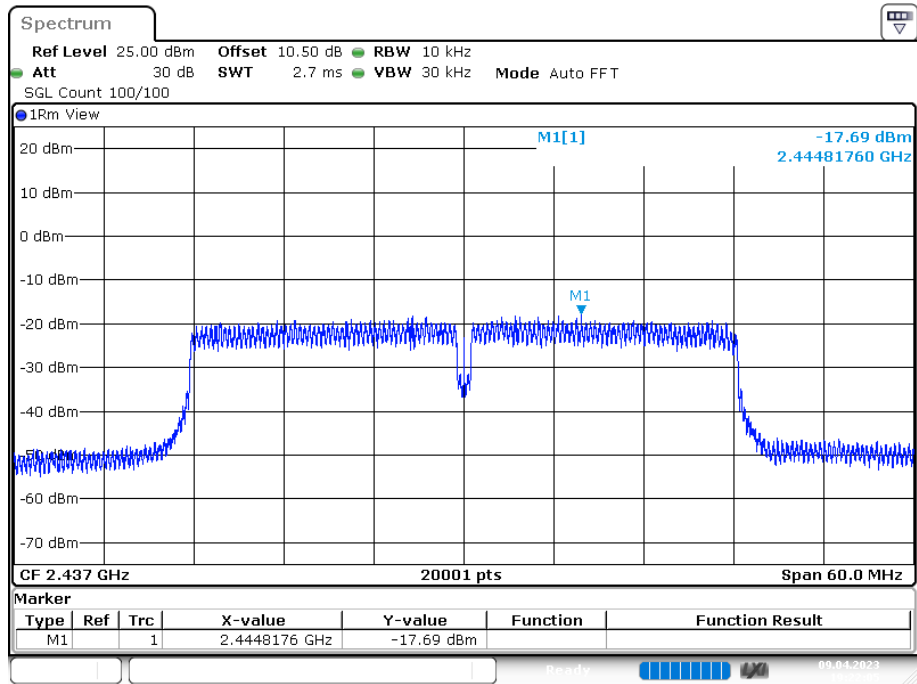

Date: 9.APR.2023 19:22:06

## Power Spectral Density, High Channel

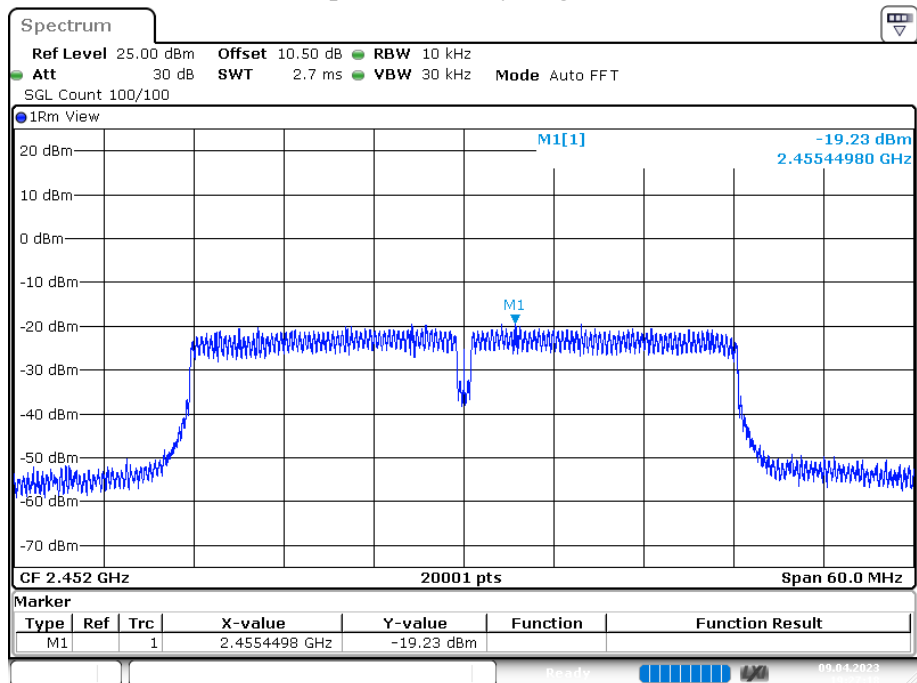

Date: 9.APR.2023 19:27:18

\*\*\*\*\* END OF REPORT \*\*\*\*\*