

FCC Test Report

Report No.: RWAZ202300119D
Applicant: Shenzhen Youmi Intelligent Technology Co., Ltd.
Address: 406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China
Product Name: Smart Tablet
Product Model: TG2404GBA
Multiple Models: N/A
Trade Mark: UMIDIGI
FCC ID: 2ATZ4-G6TAB
Standards: FCC CFR Title 47 Part 15E (§15.407)
Test Date: 2023/12/23~2024/02/26
Test Result: Complied
Issue Date: 2024-03-08

Reviewed by: *Abel Chen*

Approved by: *Jacob Kong*

Abel Chen
Project Engineer

Jacob Kong
Manager

Prepared by:

World Alliance Testing and Certification (Shenzhen) Co., Ltd

No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China



This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk “★”

Announcement

1. This test report shall not be reproduced in full or partial, without the written approval of World Alliance Testing and Certification (Shenzhen) Co., Ltd
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
5. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

Revision History

Version No.	Issued Date	Description
00	2024-03-08	Original

Contents

1	General Information	4
1.1	Client Information	4
1.2	Product Description of EUT	4
1.3	Antenna information	4
1.4	Related Submittal(s)/Grant(s).....	5
1.5	Measurement Uncertainty	5
1.6	Laboratory Location.....	5
1.7	Test Methodology	5
2	Description of Measurement.....	6
2.1	Test Configuration.....	6
2.2	Test Auxiliary Equipment	8
2.3	Test Setup.....	8
2.4	Test Procedure	10
2.5	Measurement Method.....	11
2.6	Measurement Equipment	12
3	Test Results	13
3.1	Test Summary.....	13
3.2	Limit	14
3.3	AC Line Conducted Emissions Test Data.....	16
3.4	Radiated emission Test Data.....	18
3.5	RF Conducted Test Data	32
3.5.1	26dB/6dB Emission Bandwidth and 99% Occupied Bandwidth	32
3.5.2	Maximum conducted output power	33
3.5.3	Power Spectral Density.....	34
3.5.4	Duty Cycle	34
4	Test Setup Photo.....	48
5	E.U.T Photo.....	49

1 General Information

1.1 Client Information

Applicant:	Shenzhen Youmi Intelligent Technology Co., Ltd.
Address:	406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China
Manufacturer:	Shenzhen Youmi Intelligent Technology Co., Ltd.
Address:	406-407 Jinqi Zhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China

1.2 Product Description of EUT

The EUT is Smart Tablet that contains Classic Bluetooth (BDR/EDR), BLE, 2.4G/5G WLAN, GSM/GPRS/EGPRS/WCDMA/LTE radios, this report covers the full testing of the 5G WLAN radio.

Sample Serial number	30-2 for CE&RE test, 30-1 for RF test conducted test (assigned by WATC)
Sample Received Date	2023/12/12
Sample Status	Good Condition
Frequency Range	5150 MHz - 5250MHz 5725 MHz - 5850MHz
Maximum Conducted Output Power	5150 MHz - 5250MHz: 15.60dBm 5725 MHz - 5850MHz: 12.84dBm
Modulation Technology	OFDM
Spatial Streams	SISO
Antenna Gain [#]	5150 MHz - 5250MHz: 2.09dBi 5725 MHz - 5850MHz: 3.91dBi
Power Supply	DC5V from adapter or DC3.8 V from battery
Adapter 1 Information	Model: HF-0502000U Input: AC100-240V~ 50/60Hz 0.3A Output: DC 5.0V 2A
Adapter 2 Information	Model: HJ-0502000W2-US Input: AC100-240V~ 50/60Hz 0.3A Output: DC 5V 2A
Modification	Sample No Modification by the test lab

1.3 Antenna information

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Device Antenna information:

The Wi-Fi antenna is an internal antenna which cannot replace by end-user. Please see the product internal photos for details.

1.4 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart C, Equipment Class: DTS, FCC ID: 2ATZ4-G6TAB
FCC Part 15, Subpart C, Equipment Class: DSS, FCC ID: 2ATZ4-G6TAB
FCC Part 22, Subpart H/Part 24, Subpart E/Part 27, Equipment Class: PCB, FCC ID: 2ATZ4-G6TAB

1.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))	
AC Power Lines Conducted Emissions	±3.14dB	
Emissions, Radiated	Below 30MHz	±2.78dB
	Below 1GHz	±4.84dB
	Above 1GHz	±5.44dB
Conducted Power	0.74dB	
Frequency Error	150Hz	
Bandwidth	0.34%	
Power Spectral Density	0.74dB	

Note 1: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Note 2: The Decision Rule is based on simple acceptance with ISO Guide 98-4:2012 Clause 8.2 (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

1.6 Laboratory Location

<p>World Alliance Testing and Certification (Shenzhen) Co., Ltd</p> <p>No. 1002, East Block, Laobing Building, Xingye Road 3012, Xixiang street, Bao'an District, Shenzhen, Guangdong, People's Republic of China</p> <p>Tel: +86-755-29691511, Email: qa@watc.com.cn</p> <p>The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 463912, the FCC Designation No. : CN5040.</p> <p>The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0160.</p>
--

1.7 Test Methodology

FCC CFR 47 Part 2

FCC CFR 47 Part 15

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

ANSI C63.10-2020

2 Description of Measurement

2.1 Test Configuration

Operating channels: (5150-5250MHz)					
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
36	5180	42	5210	48	5240
38	5190	44	5220	/	/
40	5200	46	5230	/	/
According to ANSI C63.10-2020 chapter 5.6.1 Table 11 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:					
802.11a, 802.11n-HT20, 802.11ac-VHT20					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
36	5180	40	5200	48	5240
802.11n-HT40, 802.11ac-VHT40					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
38	5190	/	/	46	5230
802.11ac-VHT80					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
/	/	42	5210	/	/

Operating channels: (5725-5850MHz)					
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
149	5745	155	5775	161	5805
151	5755	157	5785	165	5825
153	5765	159	5795	/	/
According to ANSI C63.10-2020 chapter 5.6.1 Table 11 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:					
802.11a, 802.11n-HT20, 802.11ac-VHT20					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
149	5745	157	5785	165	5825
802.11n-HT40, 802.11ac-VHT40					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
151	5755	/	/	159	5795
802.11ac-VHT80					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
/	/	155	5775	/	/

Test Mode:					
Transmitting mode:		Keep the EUT in continuous transmitting with modulation			
Exercise software#:		Engineering mode			
5150-5250MHz Band					
Mode	Data rate	Powel Level Setting [#]			
		Low Channel	Middle Channel	High Channel	
802.11a	6Mbps	14	14	14	
802.11ac-HT20	MCS0	14	14	14	
802.11ac-HT40	MCS0	14	14	14	
802.11ac-VHT80	MCS0	14	14	14	
5725-5850MHz Band					
Mode	Data rate	Powel Level Setting [#]			
		Low Channel	Middle Channel	High Channel	
802.11a	6Mbps	24	24	24	
802.11ac-HT20	MCS0	24	24	24	
802.11ac-HT40	MCS0	24	24	24	
802.11ac-VHT80	MCS0	24	24	24	
The exercise software and the maximum power setting that provided by manufacturer.					

Worst-Case Configuration:

For radiated emissions, EUT was investigated in three orthogonal orientation, the worst-case orientation was recorded in report

For AC power line conducted emission and radiated emission 9kHz-1GHz and above 18GHz were performed with the EUT transmits at the channel with highest output power as worst-case scenario.


The n-ht20/n-ht40 were reduced test since the identical parameters with ac vht20/ac vht40.

2.2 Test Auxiliary Equipment

Manufacturer	Description	Model	Serial Number
/	/	/	/

2.3 Test Setup


1) Conducted emission measurement:

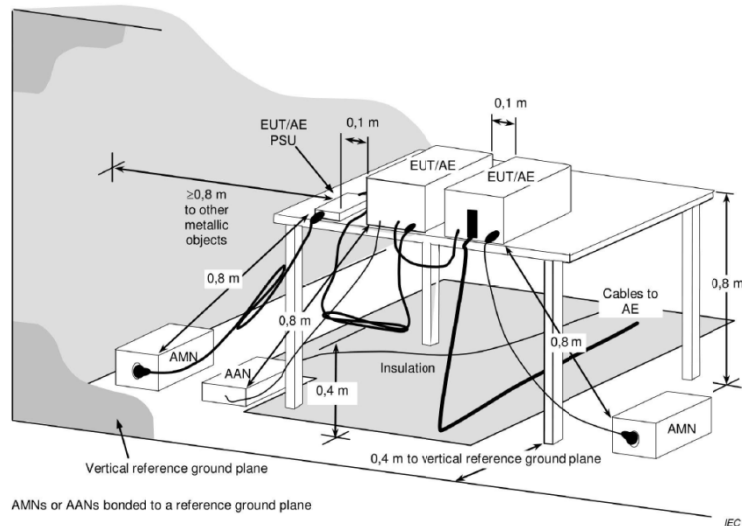


Note: The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.


2) Radiated emission measurement:

Below 30MHz (3m SAC)

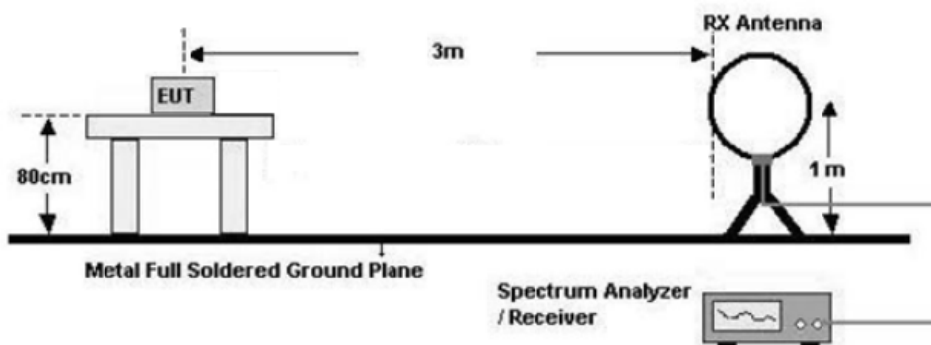

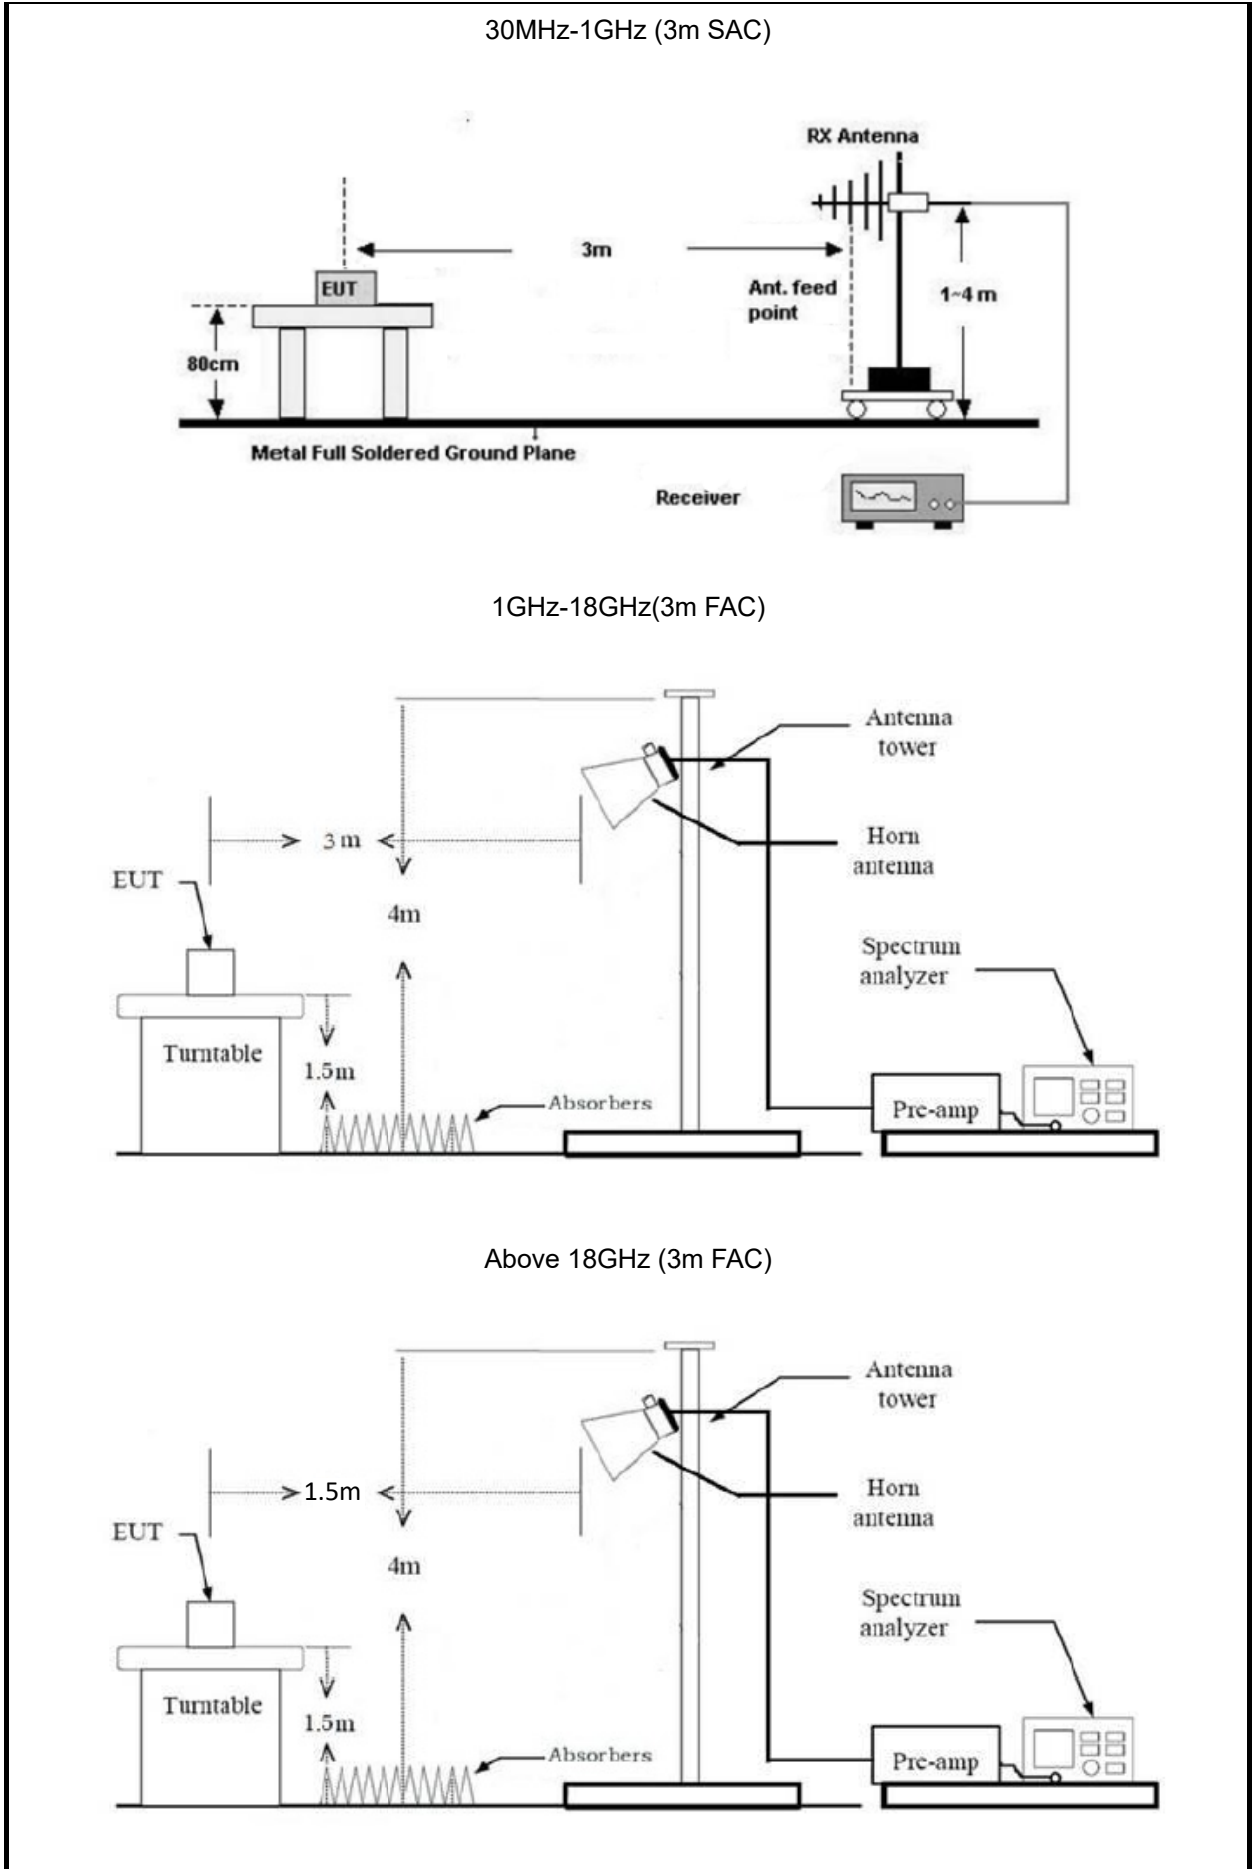

3) RF Conducted Test

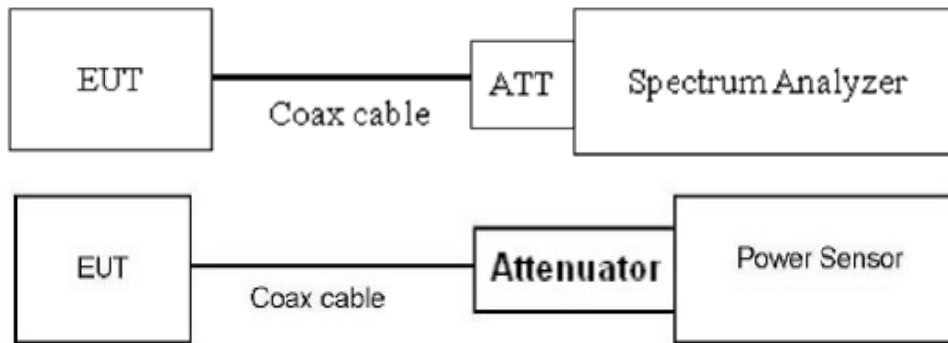

2.4 Test Procedure

Conducted emission:

1. The E.U.T is placed on a non-conducting table 40cm from the vertical ground plane and 80cm above the horizontal ground plane (Please refer to the block diagram of the test setup and photographs).
2. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
3. Line conducted data is recorded for both Line and Neutral

Radiated Emission Procedure:

a) For below 30MHz

1. All measurements were made at a test distance of 3 m. The measured data was extrapolated from the test distance (3m) to the specification distance (300 m from 9-490 kHz and 30 m from 490 kHz- 30 MHz) to clearly show the relative levels of fundamental and spurious emissions and demonstrate compliance with the requirement that the level of any spurious emissions be below the level of the intentionally transmitted signal. The extrapolation factor for the limits were $40 \cdot \log(\text{test distance} / \text{specification distance})$.
2. Loop antenna use, investigation was done on the three antenna orientations (parallel, perpendicular, ground-parallel)

b) For 30MHz-1GHz:

1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.
2. EUT works in each mode of operation that needs to be tested. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.

c) For above 1GHz:

1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m (1-18GHz) and 1.5 m (above

18GHz).

2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.
3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
4. Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

RF Conducted Test:

1. The antenna port of EUT was connected to the RF port of the test equipment (Power Meter or Spectrum analyzer) through Attenuator and RF cable.
2. The cable assembly insertion loss of 10.5dB (including 10.0 dB Attenuator and 0.5 dB cable) was entered as an offset in the power meter. Note: Actual cable loss was unavailable at the time of testing, therefore a loss of 0.5dB was assumed as worst case. This was later verified to be true by laboratory. (if the RF cable provided by client, the cable loss declared by client)
3. The EUT is keeping in continuous transmission mode and tested in all modulation modes.

2.5 Measurement Method

Description of Test	Measurement Method
AC Line Conducted Emissions	ANSI C63.10-2020 Section 6.2
Maximum Conducted Output Power	KDB 789033 D02 v02r01 section E.3. b)
Power Spectral Density	KDB 789033 D02 v02r01 section F
26 dB Emission Bandwidth	KDB 789033 D02 v02r01 section C.1
6 dB Emission Bandwidth	KDB 789033 D02 v02r01 section C.2
99% Occupied Bandwidth	KDB 789033 D02 v02r01 section D.
Unwanted Emissions	KDB 789033 D02 v02r01 section G.
Duty Cycle	KDB 789033 D02 v02r01 section B.

2.6 Measurement Equipment

Manufacturer	Description	Model	Management No.	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
ROHDE& SCHWARZ	EMI TEST RECEIVER	ESR	101817	2023/7/3	2024/7/2
R&S	LISN	ENV216	101748	2023/8/1	2024/7/30
N/A	Coaxial Cable	NO.12	N/A	2023/7/3	2024/7/2
Farad	Test Software	EZ-EMC	Ver. EMEC-3A1	/	/
Radiated Emission Test					
R&S	EMI test receiver	ESR3	102758	2023/7/3	2024/7/2
ROHDE& SCHWARZ	SPECTRUM ANALYZER	FSV40-N	101608	2023/7/3	2024/7/2
SONOMA INSTRUMENT	Low frequency amplifier	310	186014	2023/7/12	2024/7/11
COM-POWER	preamplifier	PAM-118A	18040152	2023/8/21	2024/8/20
COM-POWER	Amplifier	PAM-840A	461306	2023/8/8	2024/8/7
ETS	Passive Loop Antenna	6512	29604	2023/7/7	2024/7/6
SCHWARZBECK	Log - periodic wideband antenna	VULB 9163	9163-872	2023/7/7	2024/7/6
Astro Antenna Ltd	Horn antenna	AHA-118S	3015	2023/7/6	2024/7/5
Ducommun technologies	Horn Antenna	ARH-4223-02	1007726-03	2023/7/10	2024/7/9
Ducommun technologies	Horn Antenna	ARH-2823-02	1007726-03	2023/7/10	2024/7/9
Oulitong	Band Reject Filter	OBSF-5150-585 0-S	OE02104371	2023/9/15	2024/9/14
N/A	Coaxial Cable	N/A	NO.9	2023/8/8	2024/8/7
N/A	Coaxial Cable	N/A	NO.10	2023/8/8	2024/8/7
N/A	Coaxial Cable	N/A	NO.11	2023/8/8	2024/8/7
Audix	Test Software	E3	191218 V9	/	/
RF Conducted Test					
R&S	Spectrum Analyzer	FSV40	101590	2023/11/16	2024/11/15
MARCONI	10dB Attenuator	1692595	2942	2023/10/25	2024/10/24
ANRITSU	USB Power Sensor	MA24418A	12620	2023/7/12	2024/7/11
R&S	Spectrum Analyzer	FSU26	200680/026	2023/7/12	2024/7/11

Note: All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or International standards.

3 Test Results

3.1 Test Summary

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a) §15.407 (b)(9)	AC Line Conducted Emissions	Compliance
§15.407 (a)(1)(iv),(3)(i)	Conducted Peak Output Power Power Spectral Density	Compliance
§15.407 (a)(12)	99% Occupied Bandwidth	Compliance
§15.407 (a)	26 dB Emission Bandwidth	Compliance
§15.407 (e)	6 dB Emission Bandwidth	Compliance
§15.205, §15.209, §15.407 (b)(1), (4), (9), (10)	Unwanted Emissions	Compliance
/	Duty Cycle	Report only


3.2 Limit


Test items	Limit
AC Power Line Conducted Emission	See details §15.207 (a)
Conducted Peak Output Power Power Spectral Density	<p>For the band 5.150-5.250 GHz Band:</p> <p>For client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> <p>For the band 5.725-5.895 GHz Band:</p> <p>For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, Fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.</p>
26dB Emission Bandwidth 99% Occupied Bandwidth	N/A
6dB Emission Bandwidth	Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Unwanted Emissions	<p>Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209</p> <p>For the band 5.150-5.250 GHz Band:</p> <p>All emissions outside of the 5.15–5.35 GHz band shall not exceed an e.i.r.p. of –27 dBm/MHz.</p> <p>For the band 5.725-5.895 GHz Band:</p> <p>All emissions shall be limited to a level of –27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p>
--------------------	---

3.3 AC Line Conducted Emissions Test Data

Test Date:	2024-1-23	Test By:	Lirou Li
Environment condition:	Temperature: 21.8°C; Relative Humidity:37%; ATM Pressure: 101.3kPa		

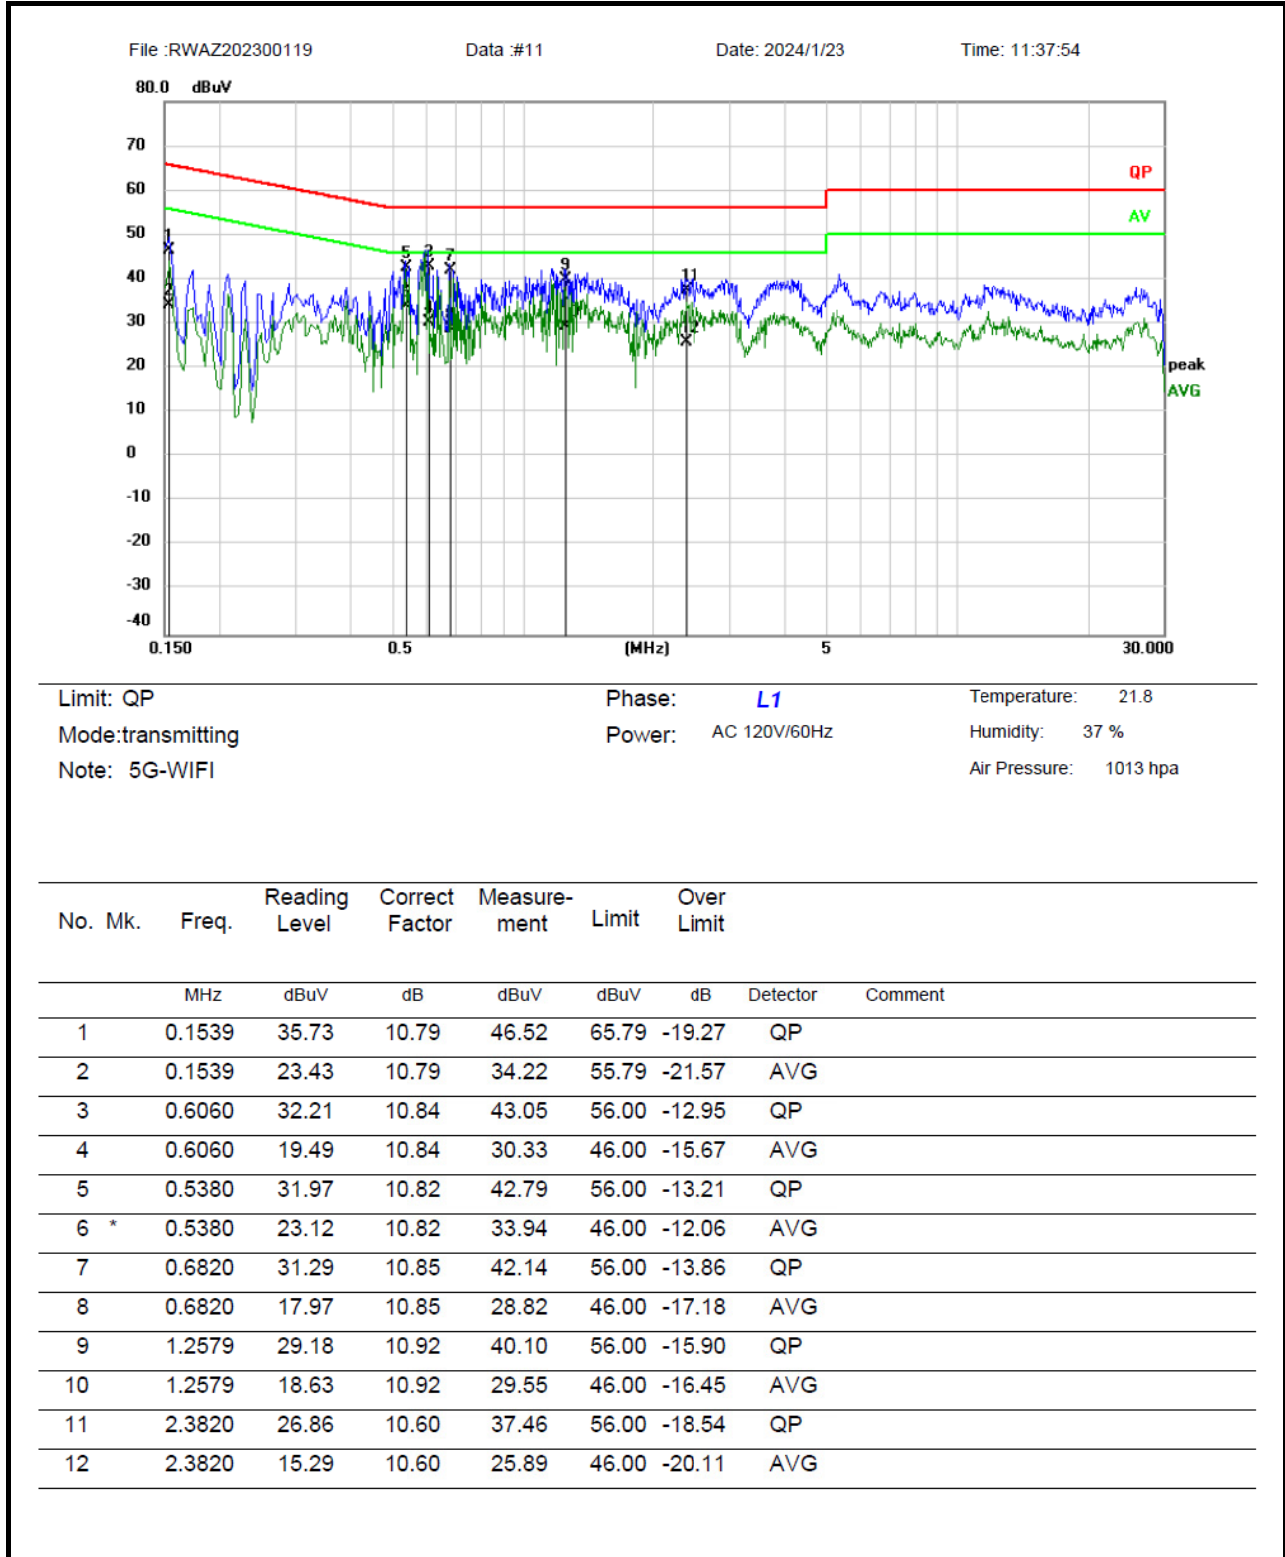

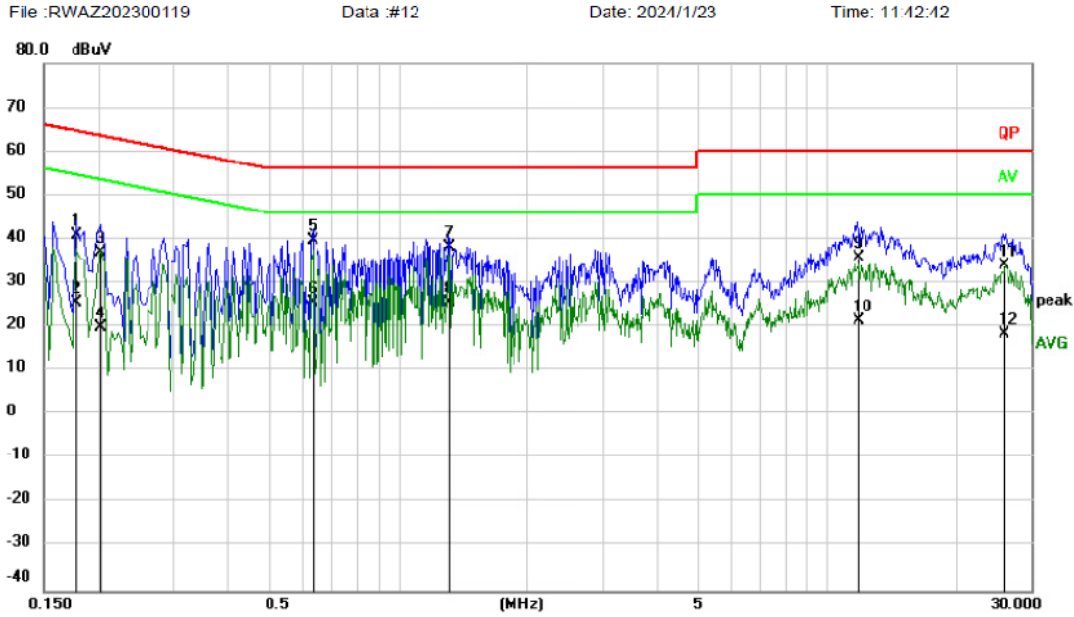

Limit: QP Phase: **N** Temperature: 21.8
 Mode:transmitting Power: AC 120V/60Hz Humidity: 37 %
 Note: 5G-WIFI Air Pressure: 1013 hpa

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over Limit		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1780	30.45	10.50	40.95	64.58	-23.63	QP	
2	0.1780	14.97	10.50	25.47	54.58	-29.11	AVG	
3	0.2020	26.63	10.41	37.04	63.53	-26.49	QP	
4	0.2020	9.57	10.41	19.98	53.53	-33.55	AVG	
5 *	0.6340	29.04	10.62	39.66	56.00	-16.34	QP	
6	0.6340	14.86	10.62	25.48	46.00	-20.52	AVG	
7	1.3140	27.45	10.67	38.12	56.00	-17.88	QP	
8	1.3140	14.74	10.67	25.41	46.00	-20.59	AVG	
9	11.7620	25.12	10.78	35.90	60.00	-24.10	QP	
10	11.7620	10.68	10.78	21.46	50.00	-28.54	AVG	
11	25.8420	23.27	10.73	34.00	60.00	-26.00	QP	
12	25.8420	7.63	10.73	18.36	50.00	-31.64	AVG	

Remark:

Measurement (dBuV)= Reading Level (dBuV) + Correct Factor(dB)

Correct Factor(dB)= LISN Voltage Division Factor (dB)+ Cable loss(dB)

Over Limit = Measurement – Limit

3.4 Radiated emission Test Data


9 kHz-30MHz:


Test Date:	2024-01-19	Test By:	Bard Huang
Environment condition:	Temperature:24.1°C; Relative Humidity:60%; ATM Pressure: 100.9kPa		

For radiated emissions below 30MHz, there were no emissions found within 20dB of limit.

30MHz-1GHz:

Test Date:	2024-01-19	Test By:	Bard Huang
Environment condition:	Temperature:24.1°C; Relative Humidity:60%; ATM Pressure: 100.9kPa		

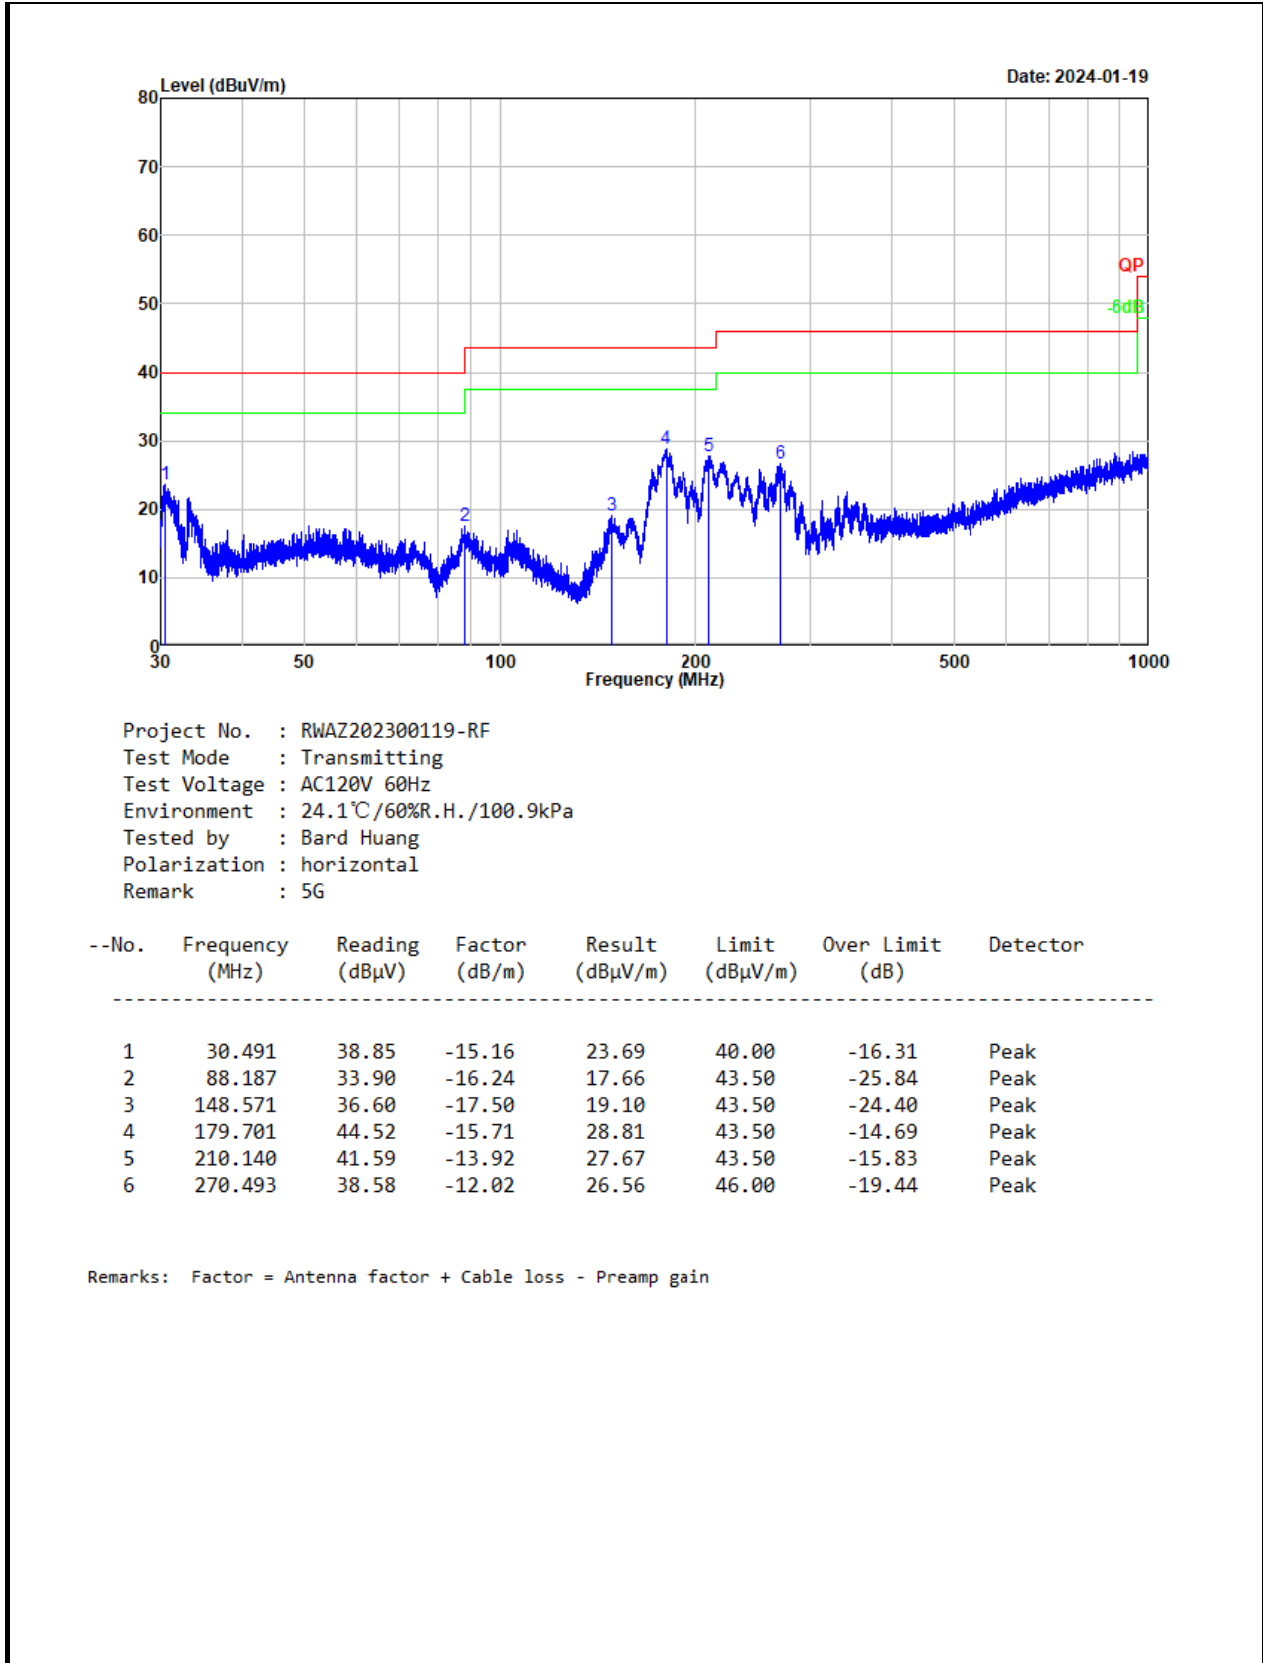

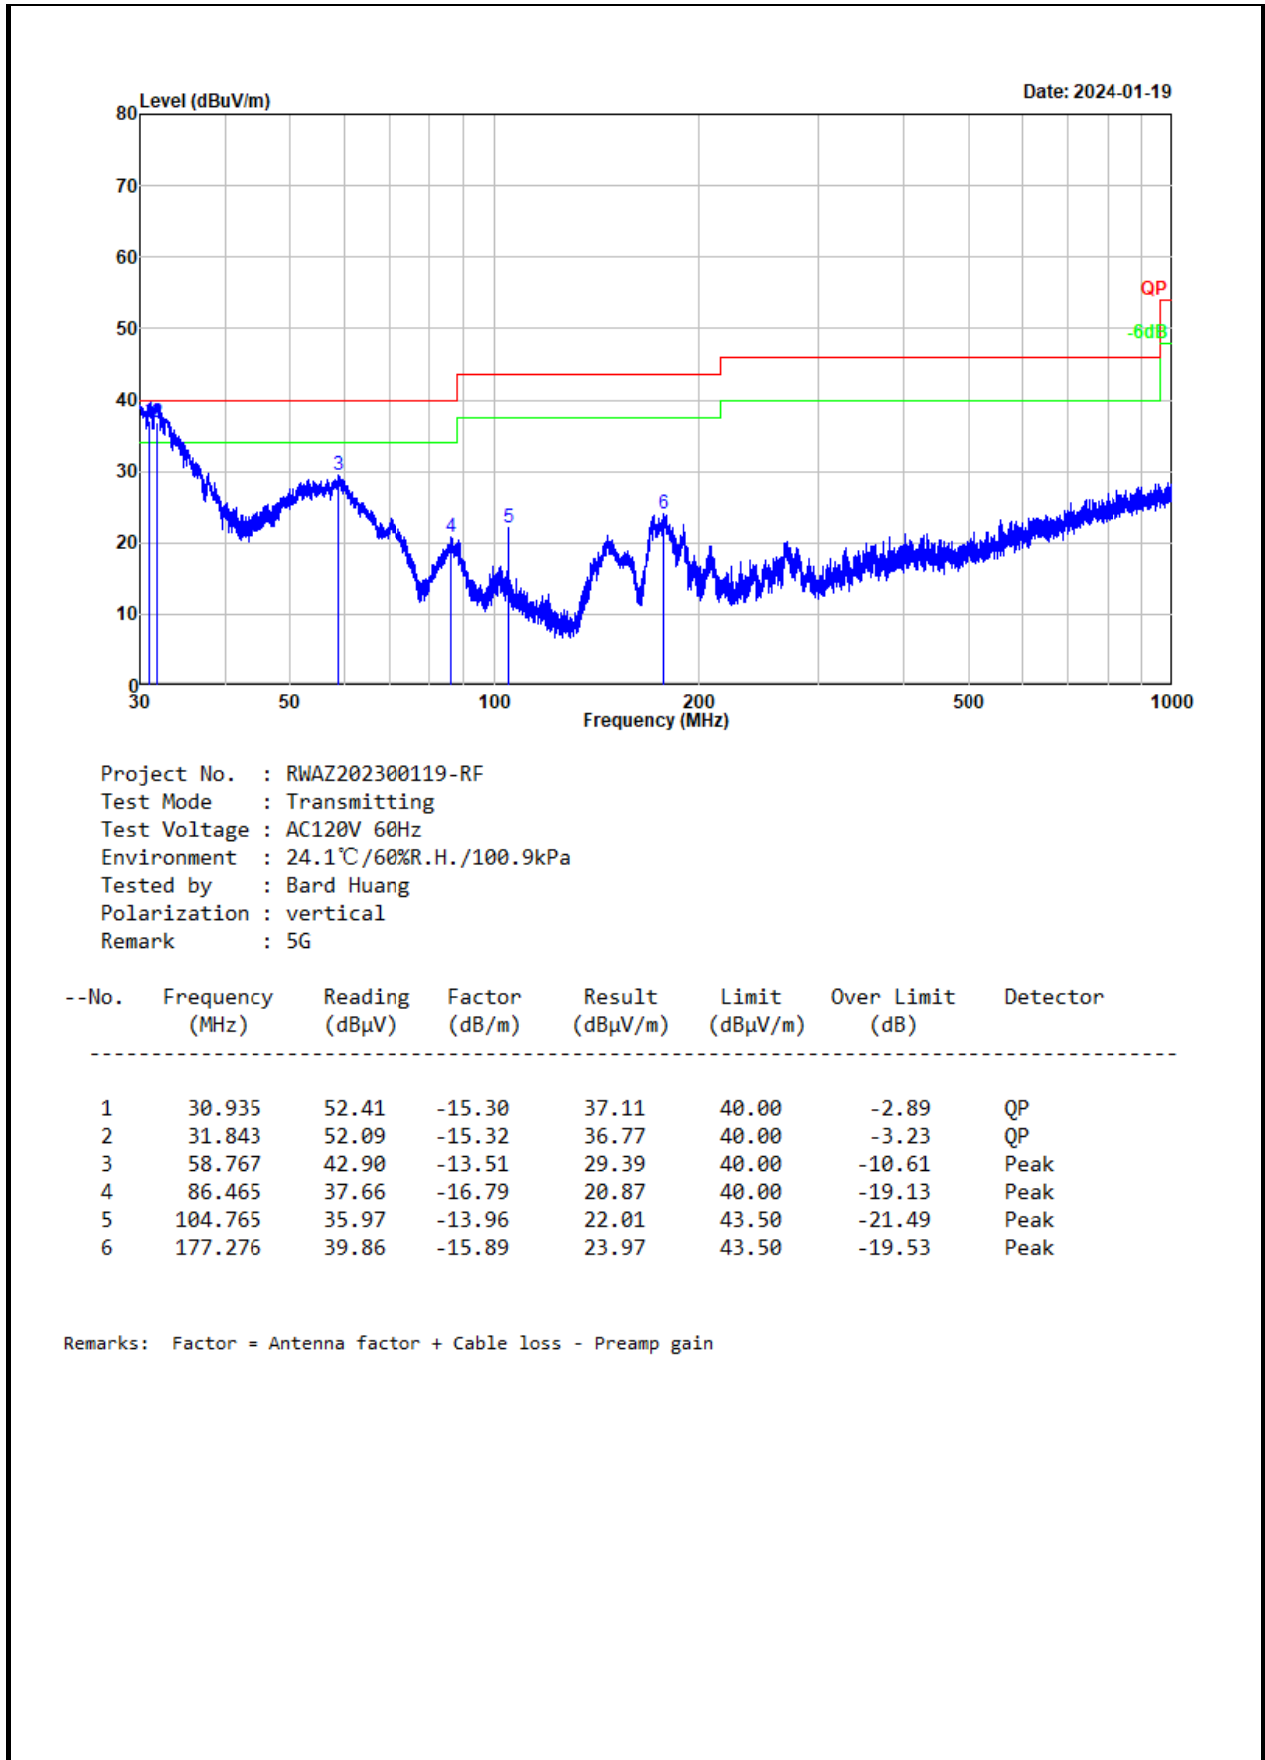

Remark:

Result = Reading + Factor

Factor = Antenna factor + Cable loss – Amplifier gain

Over Limit = Level – Limit

Above 1GHz:

Test Date:	2024-01-22~2024-01-23	Test By:	Bard Huang
Environment condition:	Temperature:23.9~24.6°C; Relative Humidity:45~48%; ATM Pressure: 101.4~101.6kPa		

5150-5250MHz Band:

Frequency (MHz)	Reading level (dB μ V)	Polar (H/V)	Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
802.11a							
Low Channel							
4500	49.63	horizontal	7.83	57.46	74	-16.54	Peak
4500	36.84	horizontal	7.83	44.67	54	-9.33	Average
4500	49.5	vertical	7.83	57.33	74	-16.67	Peak
4500	36.68	vertical	7.83	44.51	54	-9.49	Average
5150	55.75	horizontal	11.57	67.32	74	-6.68	Peak
5150	39.01	horizontal	11.57	50.58	54	-3.42	Average
5150	55.39	vertical	11.57	66.96	74	-7.04	Peak
5150	38.76	vertical	11.57	50.33	54	-3.67	Average
10360	48.74	Horizontal	5.5	54.24	68.2	-13.96	Peak
10360	48.99	Vertical	5.5	54.49	68.2	-13.71	Peak
Middle Channel							
10400	48.85	Horizontal	5.7	54.55	68.2	-13.65	Peak
10400	50.03	Vertical	5.7	55.73	68.2	-12.47	Peak
High Channel							
5350	48.97	horizontal	11.44	60.41	74	-13.59	Peak
5350	37.06	horizontal	11.44	48.5	54	-5.5	Average
5350	49.78	vertical	11.44	61.22	74	-12.78	Peak
5350	37.92	vertical	11.44	49.36	54	-4.64	Average
5460	48.41	horizontal	11.55	59.96	74	-14.04	Peak
5460	38.82	horizontal	11.55	50.37	54	-3.63	Average
5460	48.26	vertical	11.55	59.81	74	-14.19	Peak
5460	38.7	vertical	11.55	50.25	54	-3.75	Average
10480	48.84	Horizontal	5.74	54.58	68.2	-13.62	Peak
10480	50.02	Vertical	5.74	55.76	68.2	-12.44	Peak
802.11 ac20							
Low Channel							

4500	49.81	horizontal	7.83	57.64	74	-16.36	Peak
4500	37.99	horizontal	7.83	45.82	54	-8.18	Average
4500	49.65	vertical	7.83	57.48	74	-16.52	Peak
4500	37.83	vertical	7.83	45.66	54	-8.34	Average
5150	56.98	horizontal	11.57	68.55	74	-5.45	Peak
5150	39.41	horizontal	11.57	50.98	54	-3.02	Average
5150	56.52	vertical	11.57	68.09	74	-5.91	Peak
5150	39.14	vertical	11.57	50.71	54	-3.29	Average
10360	49.67	Horizontal	5.5	55.17	68.2	-13.03	Peak
10360	49.9	Vertical	5.5	55.4	68.2	-12.8	Peak
Middle Channel							
10400	49.74	Horizontal	5.7	55.44	68.2	-12.76	Peak
10400	49.91	Vertical	5.7	55.61	68.2	-12.59	Peak
High Channel							
5350	49.29	horizontal	11.44	60.73	74	-13.27	Peak
5350	37.37	horizontal	11.44	48.81	54	-5.19	Average
5350	50.1	vertical	11.44	61.54	74	-12.46	Peak
5350	37.24	vertical	11.44	48.68	54	-5.32	Average
5460	46.59	horizontal	11.55	58.14	74	-15.86	Peak
5460	37.02	horizontal	11.55	48.57	54	-5.43	Average
5460	46.46	vertical	11.55	58.01	74	-15.99	Peak
5460	36.87	vertical	11.55	48.42	54	-5.58	Average
10480	49.7	Horizontal	5.74	55.44	68.2	-12.76	Peak
10480	48.89	Vertical	5.74	54.63	68.2	-13.57	Peak
802.11 ac40							
Low Channel							
4500	49.87	horizontal	7.83	57.7	74	-16.3	Peak
4500	38.14	horizontal	7.83	45.97	54	-8.03	Average
4500	49.72	vertical	7.83	57.55	74	-16.45	Peak
4500	38	vertical	7.83	45.83	54	-8.17	Average
5150	57.32	horizontal	11.57	68.89	74	-5.11	Peak
5150	39.17	horizontal	11.57	50.74	54	-3.26	Average
5150	56.79	vertical	11.57	68.36	74	-5.64	Peak
5150	38.95	vertical	11.57	50.52	54	-3.48	Average
10380	50.26	Horizontal	5.6	55.86	68.2	-12.34	Peak
10380	50.45	Vertical	5.6	56.05	68.2	-12.15	Peak
High Channel							
5350	49.72	horizontal	11.44	61.16	74	-12.84	Peak

5350	37.54	horizontal	11.44	48.98	54	-5.02	Average
5350	50.51	vertical	11.44	61.95	74	-12.05	Peak
5350	37.39	vertical	11.44	48.83	54	-5.17	Average
5460	50.39	horizontal	11.55	61.94	74	-12.06	Peak
5460	37.11	horizontal	11.55	48.66	54	-5.34	Average
5460	50.26	vertical	11.55	61.81	74	-12.19	Peak
5460	36.98	vertical	11.55	48.53	54	-5.47	Average
10460	49.73	Horizontal	5.73	55.46	68.2	-12.74	Peak
10460	48.92	Vertical	5.73	54.65	68.2	-13.55	Peak
802.11 ac80							
Low Channel							
4500	58.88	horizontal	7.83	66.71	74	-7.29	Peak
4500	38.09	horizontal	7.83	45.92	54	-8.08	Average
4500	58.56	vertical	7.83	66.39	74	-7.61	Peak
4500	37.85	vertical	7.83	45.68	54	-8.32	Average
5150	48.99	horizontal	11.57	60.56	74	-13.44	Peak
5150	36.87	horizontal	11.57	48.44	54	-5.56	Average
5150	48.48	vertical	11.57	60.05	74	-13.95	Peak
5150	36.56	vertical	11.57	48.13	54	-5.87	Average
5350	48.64	Horizontal	11.44	60.08	74	-13.92	Peak
5350	37.43	Horizontal	11.44	48.87	54	-5.13	Average
5350	50.5	Vertical	11.44	61.94	74	-12.06	Peak
5350	37.27	Vertical	11.44	48.71	54	-5.29	Average
5460	51.89	horizontal	11.55	63.44	74	-10.56	Peak
5460	39.35	horizontal	11.55	50.9	54	-3.1	Average
5460	51.56	vertical	11.55	63.11	74	-10.89	Peak
5460	38.98	vertical	11.55	50.53	54	-3.47	Average
10420	53.33	Horizontal	5.71	59.04	68.2	-9.16	Peak
10420	50.38	Vertical	5.71	56.09	68.2	-12.11	Peak

Remark:


Corrected Amplitude= Reading level + corrected Factor

Corrected Factor = Antenna factor + Cable loss – Amplifier gain


Margin = Corrected Amplitude – Limit

For emissions in 18GHz-40GHz range, all emissions were investigated and in the noise floor level.

Test plot for example as below:

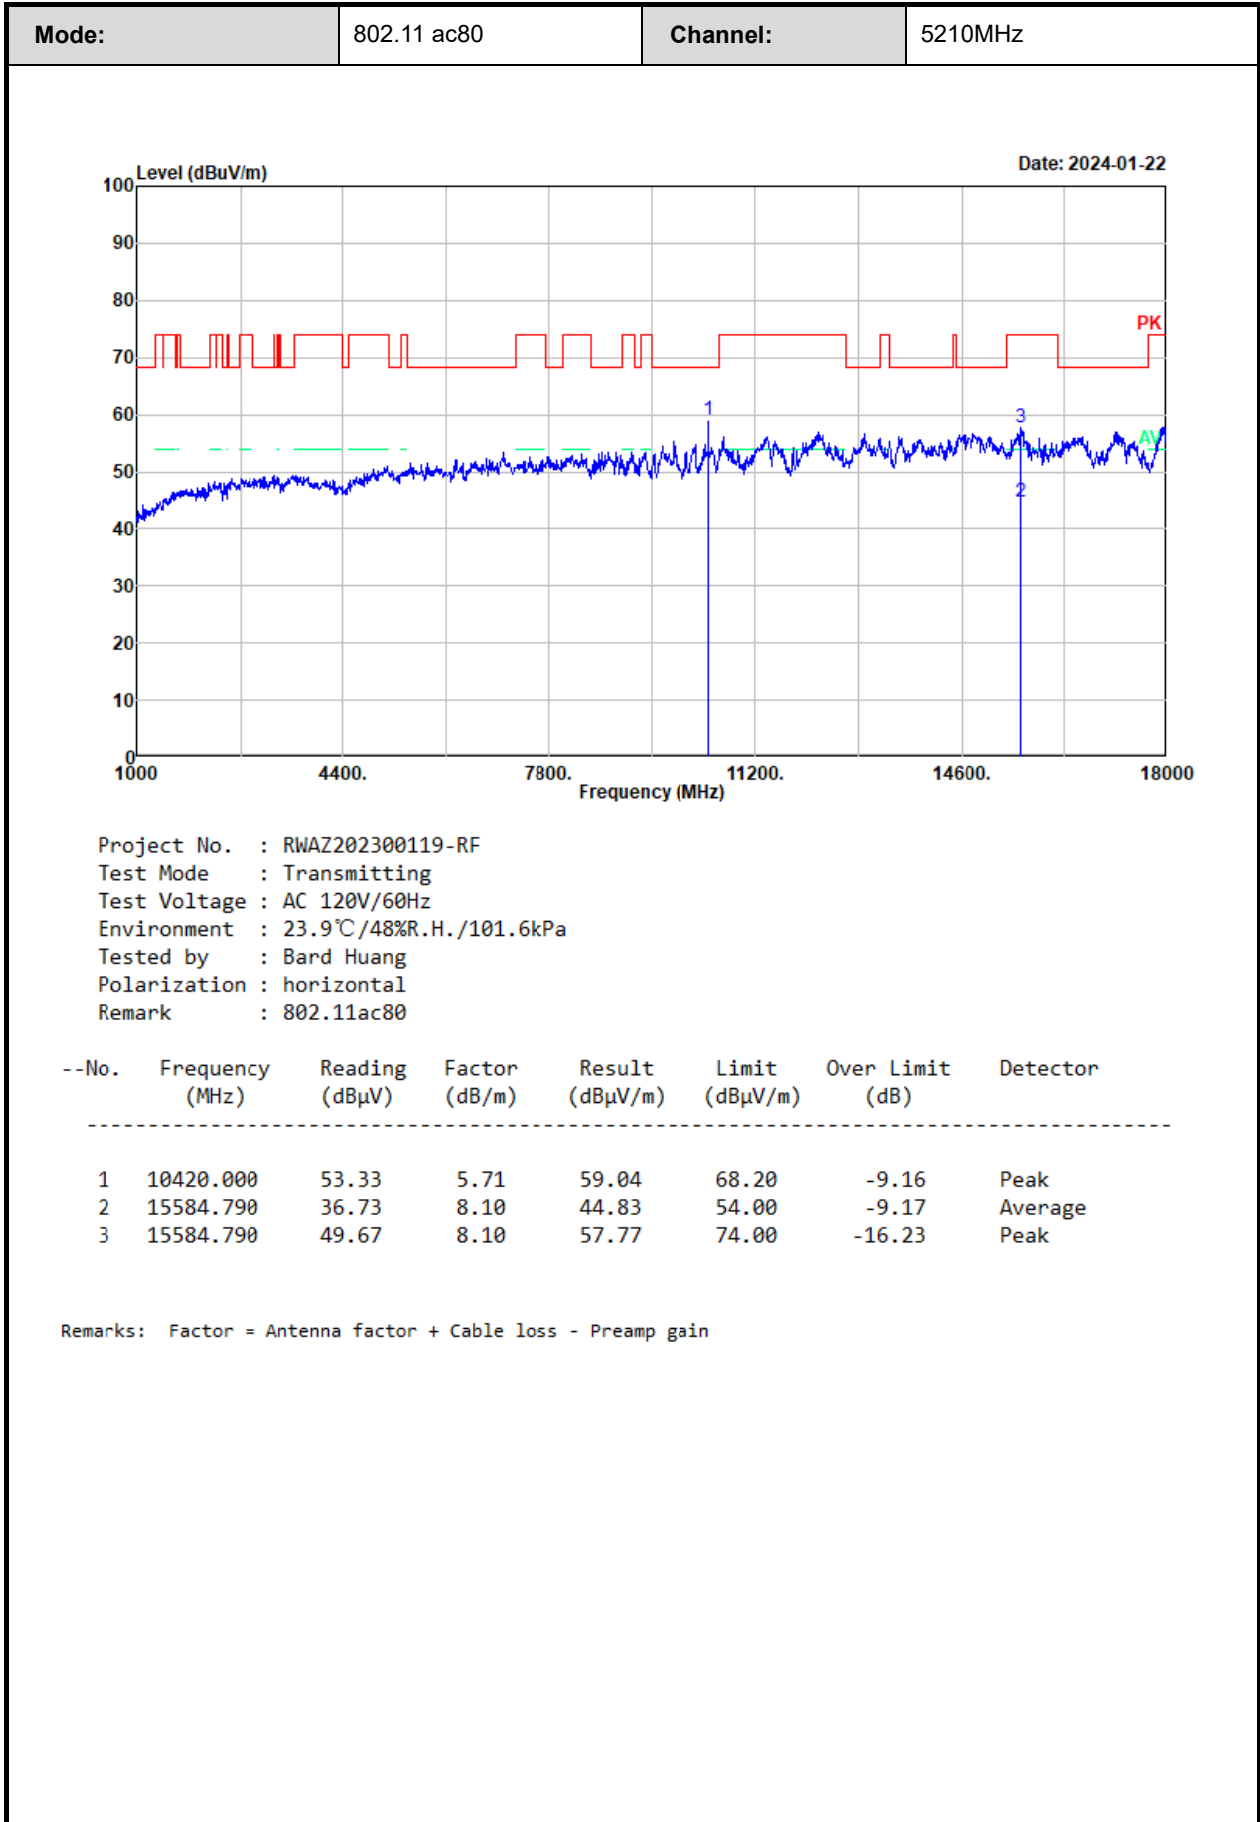

Mode:	802.11 ac80	Channel:	5210MHz
--------------	-------------	-----------------	---------

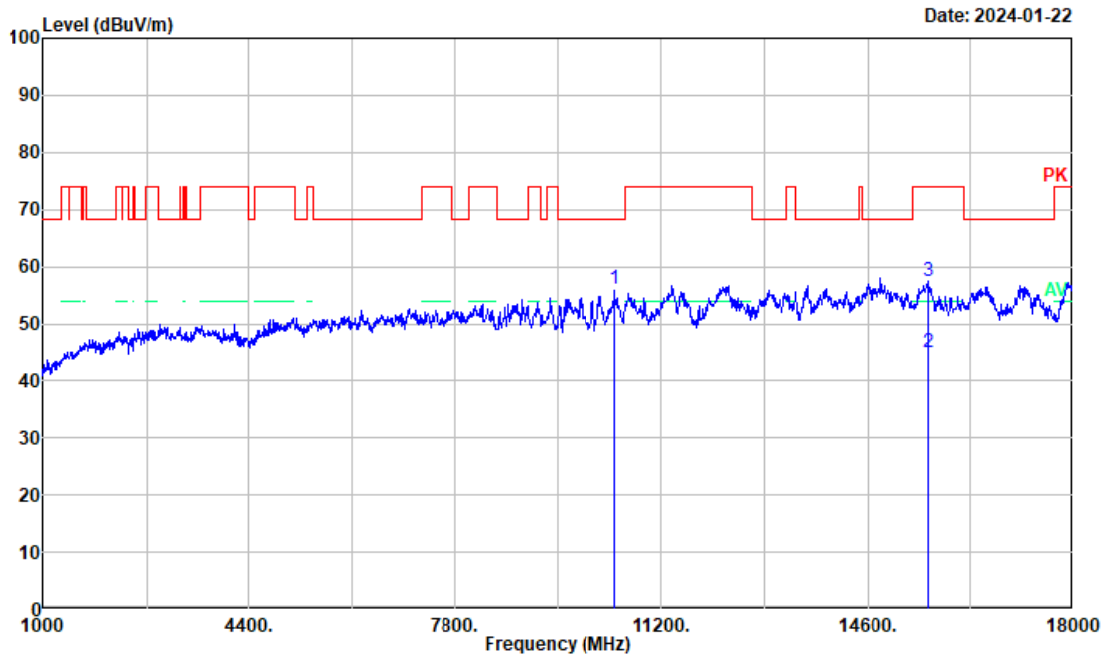

Project No. : RWAZ202300119-RF
 Test Mode : Transmitting
 Test Voltage : AC 120V/60Hz
 Environment : 23.9°C/48%R.H./101.6kPa
 Tested by : Bard Huang
 Polarization : vertical
 Remark : 802.11ac80

--No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Detector
1	10420.000	50.38	5.71	56.09	68.20	-12.11	Peak
2	15601.800	36.90	8.09	44.99	54.00	-9.01	Average
3	15601.800	49.30	8.09	57.39	74.00	-16.61	Peak

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

5725-5850MHz Band:

Frequency (MHz)	Reading level (dB μ V)	Polar (H/V)	Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
802.11a							
Low Channel							
5650	49.54	Horizontal	11.9	61.44	68.2	-6.76	Peak
5700	48.98	Horizontal	11.95	60.93	89.42	-28.49	Peak
5720	52.85	Horizontal	12.02	64.87	109.61	-44.74	Peak
5725	65.25	Horizontal	12.03	77.28	119.61	-42.33	Peak
5650	47.26	Vertical	11.9	59.16	68.2	-9.04	Peak
5700	48.22	Vertical	11.99	60.21	101.42	-41.21	Peak
5720	51.42	Vertical	12.03	63.45	110.46	-47.01	Peak
5725	63.79	Vertical	12.03	75.82	120.59	-44.77	Peak
11490	50.48	Horizontal	6.46	56.94	74	-17.06	Peak
11490	38.36	Horizontal	6.46	44.82	54	-9.18	Average
11490	49.63	Vertical	6.46	56.09	74	-17.91	Peak
11490	37.57	Vertical	6.46	44.03	54	-9.97	Average
Middle Channel							
11570	49.97	Horizontal	6.52	56.49	74	-17.51	Peak
11570	37.73	Horizontal	6.52	44.25	54	-9.75	Average
11570	50.14	Vertical	6.52	56.66	74	-17.34	Peak
11570	37.91	Vertical	6.52	44.43	54	-9.57	Average
High Channel							
5850	58.04	Horizontal	12.31	70.35	119.24	-48.89	Peak
5855	55.08	Horizontal	12.32	67.4	110.48	-43.08	Peak
5875	48.47	Horizontal	12.41	60.88	100.21	-39.33	Peak
5925	46.84	Horizontal	12.42	59.26	68.2	-8.94	Peak
5850	56.86	Vertical	12.31	69.17	120.03	-50.86	Peak
5855	53.92	Vertical	12.32	66.24	110.5	-44.26	Peak
5875	47.94	Vertical	12.39	60.33	102.81	-42.48	Peak
5925	46.67	Vertical	12.41	59.08	68.2	-9.12	Peak
11650	50.18	Horizontal	6.55	56.73	74	-17.27	Peak
11650	37.86	Horizontal	6.55	44.41	54	-9.59	Average
11650	50.34	Vertical	6.55	56.89	74	-17.11	Peak
11650	38	Vertical	6.55	44.55	54	-9.45	Average
802.11 ac20							
Low Channel							

5650	47.87	Horizontal	11.9	59.77	68.2	-8.43	Peak
5700	49.86	Horizontal	11.98	61.84	91.04	-29.2	Peak
5720	55.21	Horizontal	12.02	67.23	110.08	-42.85	Peak
5725	68.55	Horizontal	12.03	80.58	121.21	-40.63	Peak
5650	47.59	Vertical	11.91	59.5	68.2	-8.7	Peak
5700	49.11	Vertical	12	61.11	104.19	-43.08	Peak
5720	53.74	Vertical	12.03	65.77	110.46	-44.69	Peak
5725	67.02	Vertical	12.03	79.05	120.59	-41.54	Peak
11490	49.67	Horizontal	6.46	56.13	74	-17.87	Peak
11490	38.39	Horizontal	6.46	44.85	54	-9.15	Average
11490	49.81	Vertical	6.46	56.27	74	-17.73	Peak
11490	38.46	Vertical	6.46	44.92	54	-9.08	Average
Middle Channel							
11570	50.08	Horizontal	6.52	56.6	74	-17.4	Peak
11570	37.74	Horizontal	6.52	44.26	54	-9.74	Average
11570	50.22	Vertical	6.52	56.74	74	-17.26	Peak
11570	37.86	Vertical	6.52	44.38	54	-9.62	Average
High Channel							
5850	59.42	Horizontal	12.31	71.73	118.76	-47.03	Peak
5855	55.95	Horizontal	12.32	68.27	110.56	-42.29	Peak
5875	49.15	Horizontal	12.41	61.56	101.62	-40.06	Peak
5925	47.03	Horizontal	12.42	59.45	68.2	-8.75	Peak
5850	58.03	Vertical	12.31	70.34	120.03	-49.69	Peak
5855	54.56	Vertical	12.32	66.88	110.48	-43.6	Peak
5875	48.33	Vertical	12.39	60.72	104.19	-43.47	Peak
5925	46.8	Vertical	12.41	59.21	68.2	-8.99	Peak
11650	50.25	Horizontal	6.55	56.8	74	-17.2	Peak
11650	37.83	Horizontal	6.55	44.38	54	-9.62	Average
11650	50.39	Vertical	6.55	56.94	74	-17.06	Peak
11650	37.97	Vertical	6.55	44.52	54	-9.48	Average
802.11 ac40							
Low Channel							
5650	48.34	Horizontal	11.9	60.24	68.2	-7.96	Peak
5700	51.57	Horizontal	12	63.57	100.47	-36.9	Peak
5720	67.34	Horizontal	12.01	79.35	109.28	-29.93	Peak
5725	69.75	Horizontal	12.03	81.78	120.09	-38.31	Peak
5650	48.16	Vertical	11.9	60.06	68.2	-8.14	Peak
5700	50.23	Vertical	12	62.23	103.72	-41.49	Peak

5720	65.91	Vertical	12.01	77.92	110.07	-32.15	Peak
5725	68.27	Vertical	12.03	80.3	121.64	-41.34	Peak
11510	49.88	Horizontal	6.48	56.36	74	-17.64	Peak
11510	37.93	Horizontal	6.48	44.41	54	-9.59	Average
11510	49.67	Vertical	6.48	56.15	74	-17.85	Peak
11510	37.79	Vertical	6.48	44.27	54	-9.73	Average
High Channel							
5850	53.07	Horizontal	12.31	65.38	119.19	-53.81	Peak
5855	50.92	Horizontal	12.32	63.24	110.31	-47.07	Peak
5875	49.07	Horizontal	12.39	61.46	104.04	-42.58	Peak
5925	47.4	Horizontal	12.41	59.81	68.2	-8.39	Peak
5850	51.86	Vertical	12.31	64.17	112.9	-48.73	Peak
5855	50	Vertical	12.32	62.32	109.33	-47.01	Peak
5875	48.45	Vertical	12.39	60.84	102.29	-41.45	Peak
5925	47.13	Vertical	12.4	59.53	68.2	-8.67	Peak
11590	49.5	Horizontal	6.53	56.03	74	-17.97	Peak
11590	38.36	Horizontal	6.53	44.89	54	-9.11	Average
11590	50.33	Vertical	6.53	56.86	74	-17.14	Peak
11590	38.19	Vertical	6.53	44.72	54	-9.28	Average
802.11ac80							
5650	49.71	Horizontal	11.9	61.61	68.2	-6.59	Peak
5700	57.38	Horizontal	12	69.38	103.58	-34.2	Peak
5720	64.51	Horizontal	12.02	76.53	108.84	-32.31	Peak
5725	66.84	Horizontal	12.03	78.87	118.28	-39.41	Peak
5650	49.04	Vertical	12.32	61.36	112.2	-50.84	Peak
5700	56.43	Vertical	12.38	68.81	106.62	-37.81	Peak
5720	62.7	Vertical	12.4	75.1	102.31	-27.21	Peak
5725	65.02	Vertical	12.41	77.43	68.2	9.23	Peak
5850	60.08	Horizontal	11.9	71.98	68.2	3.78	Peak
5855	57.73	Horizontal	12	69.73	103.44	-33.71	Peak
5875	52.82	Horizontal	12.02	64.84	108.83	-43.99	Peak
5925	48.33	Horizontal	12.03	60.36	118.43	-58.07	Peak
5850	58.19	Vertical	12.32	70.51	112.2	-41.69	Peak
5855	55.95	Vertical	12.32	68.27	110.57	-42.3	Peak
5875	50.93	Vertical	12.39	63.32	102.31	-38.99	Peak
5925	47.69	Vertical	12.41	60.1	68.2	-8.1	Peak
11550	50.21	Horizontal	6.5	56.71	74	-17.29	Peak
11550	38.09	Horizontal	6.5	44.59	54	-9.41	Average

11550	50.03	Vertical	6.5	56.53	74	-17.47	Peak
11550	37.94	Vertical	6.5	44.44	54	-9.56	Average

Remark:


Corrected Amplitude= Reading level + corrected Factor

Corrected Factor = Antenna factor + Cable loss – Amplifier gain


Margin = Corrected Amplitude – Limit

For emissions in 18GHz-40GHz range, all emissions were investigated and in the noise floor level.

Test plot for example as below:

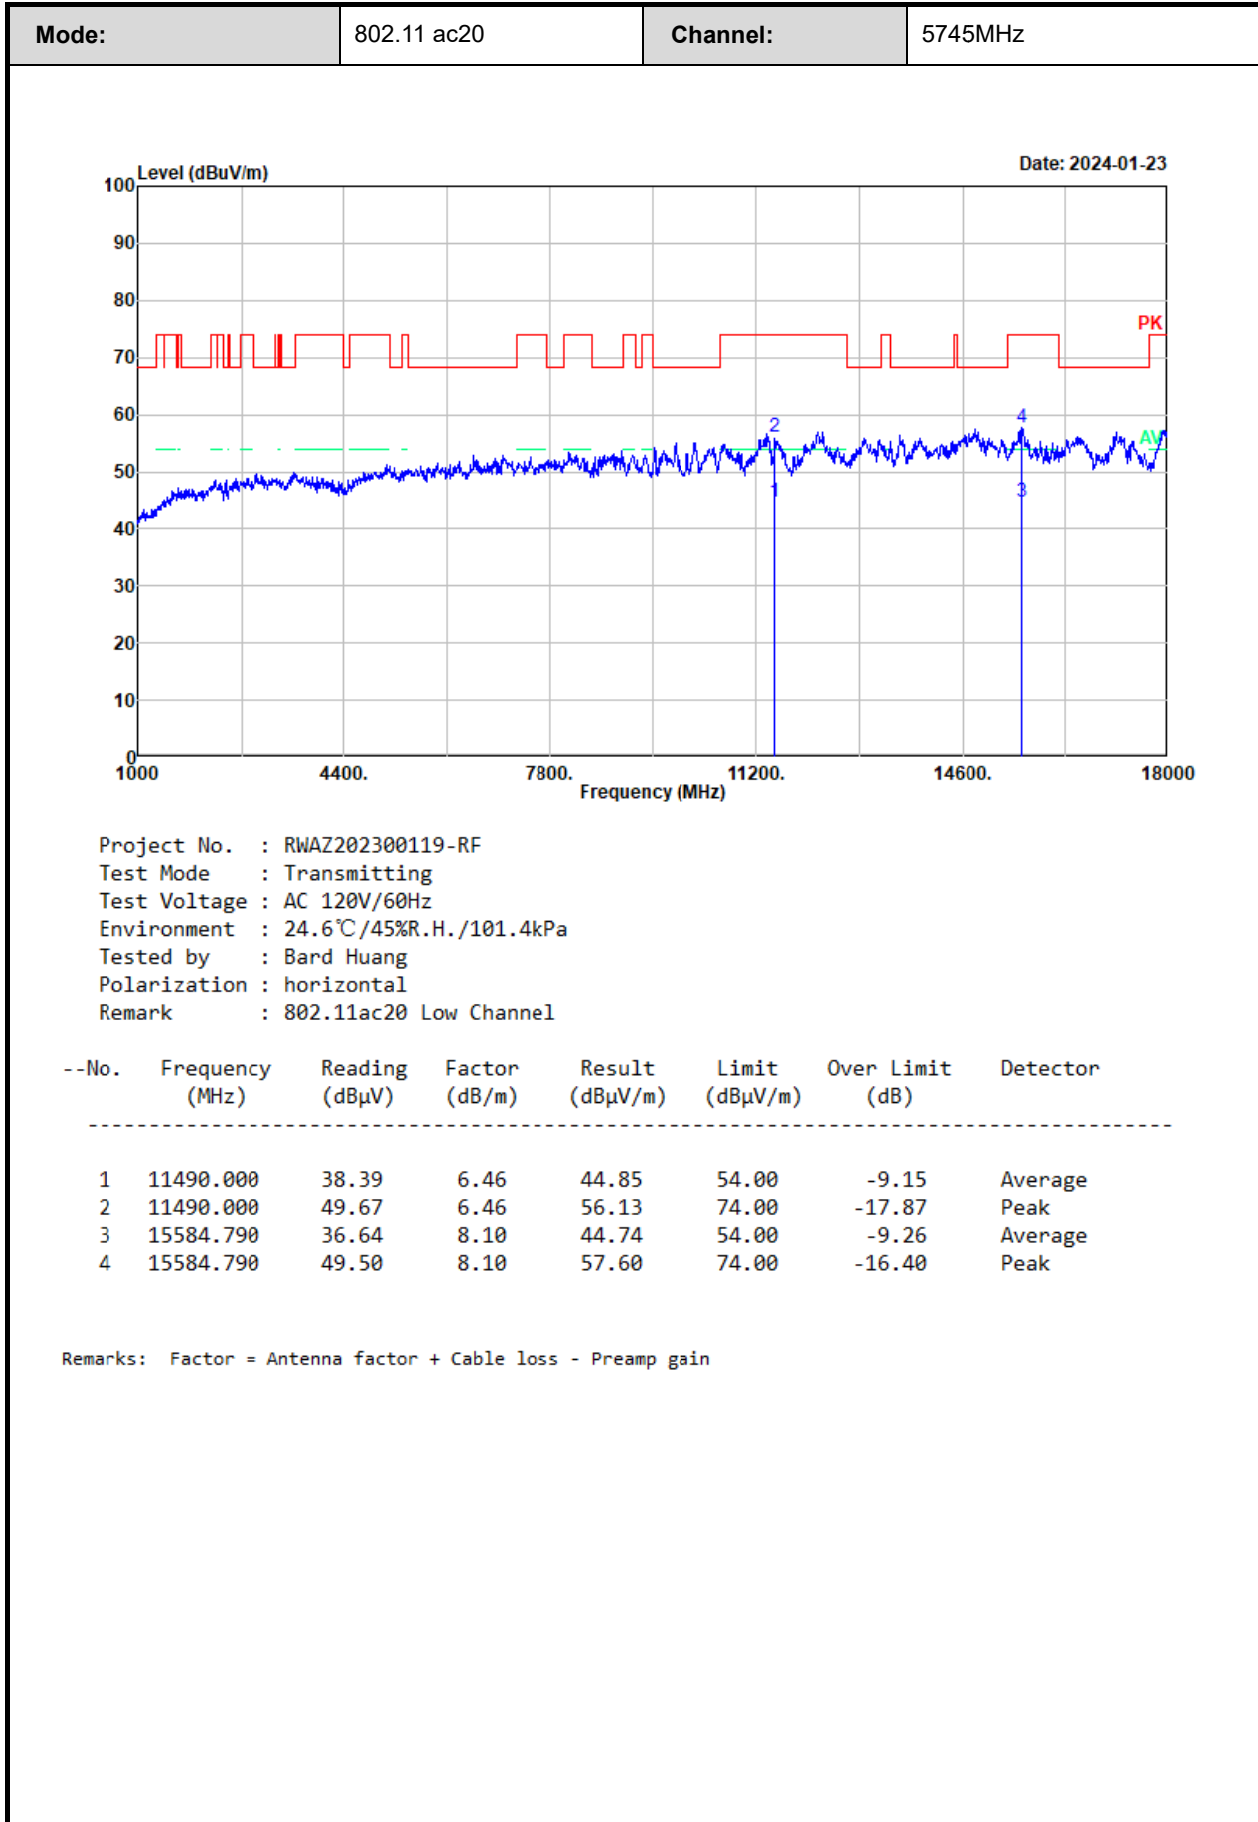

Mode:	802.11 ac20	Channel:	5745MHz
--------------	-------------	-----------------	---------

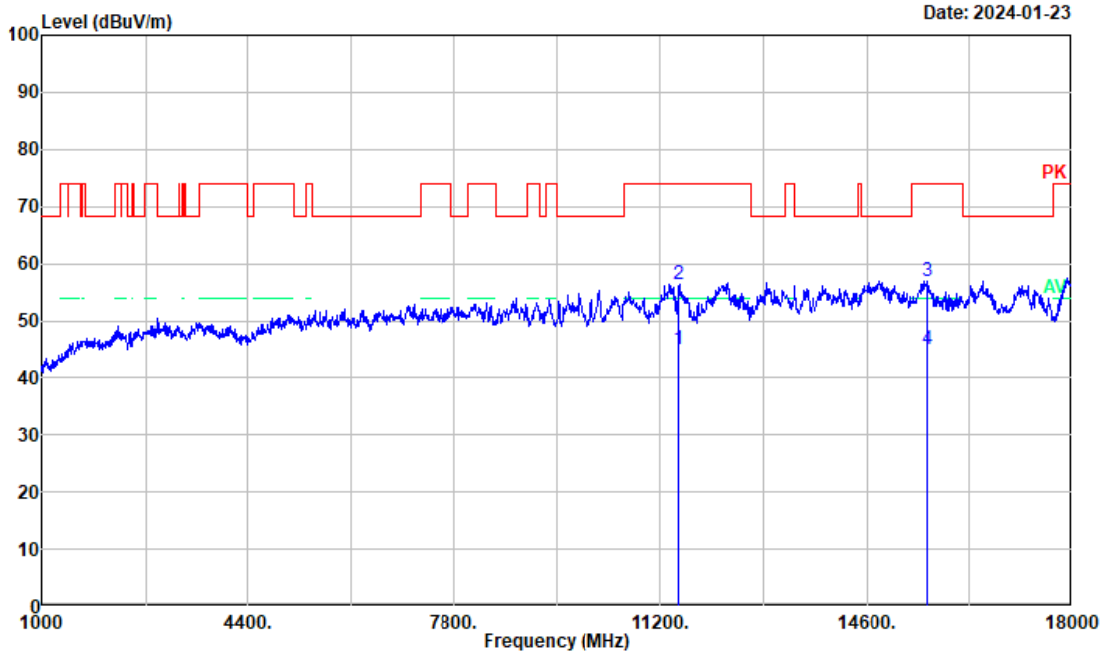

Project No. : RWAZ202300119-RF
 Test Mode : Transmitting
 Test Voltage : AC 120V/60Hz
 Environment : 24.6°C/45%R.H./101.4kPa
 Tested by : Bard Huang
 Polarization : vertical
 Remark : 802.11ac20 Low Channel

--No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Detector
1	11490.000	38.46	6.46	44.92	54.00	-9.08	Average
2	11490.000	49.81	6.46	56.27	74.00	-17.73	Peak
3	15593.300	48.94	8.10	57.04	74.00	-16.96	Peak
4	15593.300	36.77	8.10	44.87	54.00	-9.13	Average

Remarks: Factor = Antenna factor + Cable loss - Preamp gain

3.5 RF Conducted Test Data

Test Date:	2023-12-23~2024-02-26	Test By:	Ryan Zhang
Environment condition:	Temperature: 24-25°C; Relative Humidity:44-46%; ATM Pressure: 101.54kPa		

3.5.1 26dB/6dB Emission Bandwidth and 99% Occupied Bandwidth

5150- 5250MHz:

Test Mode	Channel	26dB BW [MHz]	99% OBW [MHz]
802.11a	5180	33.24	17.22
	5200	31.92	17.26
	5240	32.22	17.22
802.11 ac20	5180	35.10	18.18
	5200	35.34	18.18
	5240	33.96	18.18
802.11 ac40	5190	70.44	36.92
	5230	70.08	36.76
802.11 ac80	5210	115.80	75.92

Note: the 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% occupied bandwidth.

5725 - 5850MHz:

Test Mode	Channel	6dB BW [MHz]	99% OBW [MHz]
802.11a	5745	16.44	17.18
	5785	16.44	17.10
	5825	16.44	17.14
802.11 ac20	5745	17.36	18.10
	5785	17.48	18.06
	5825	17.36	18.02
802.11 ac40	5755	36.16	36.44
	5795	35.84	36.44
802.11 ac80	5775	75.84	75.76

Note:
 1. 6dB Emission Bandwidth Limit: ≥ 0.5 MHz
 2. the 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.

3.5.2 Maximum conducted output power

5150- 5250MHz:

Test Mode	Channel [MHz]	Result [dBm]	Limit [dBm]	Verdict
802.11a	5180	14.60	24	Pass
	5200	15.14	24	Pass
	5240	15.01	24	Pass
802.11 ac20	5180	14.58	24	Pass
	5200	15.07	24	Pass
	5240	14.96	24	Pass
802.11 ac40	5190	15.60	24	Pass
	5230	15.55	24	Pass
802.11 ac80	5210	15.49	24	Pass

Note: The device is a client device.

5725 - 5850MHz:

Test Mode	Channel [MHz]	Result [dBm]	Limit [dBm]	Verdict
802.11a	5745	10.49	30	Pass
	5785	10.75	30	Pass
	5825	12.84	30	Pass
802.11 ac20	5745	12.08	30	Pass
	5785	12.30	30	Pass
	5825	12.83	30	Pass
802.11 ac40	5755	12.07	30	Pass
	5795	12.30	30	Pass
802.11 ac80	5775	11.46	30	Pass

3.5.3 Power Spectral Density

5150- 5250MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/MHz)	Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/MHz)	
				Result	Limit
802.11a	5180	3.12	0.50	3.62	11
	5200	3.93	0.50	4.43	11
	5240	3.70	0.50	4.20	11
802.11 ac20	5180	2.53	0.50	3.03	11
	5200	3.08	0.50	3.58	11
	5240	2.97	0.50	3.47	11
802.11 ac40	5190	0.33	1.00	1.33	11
	5230	0.20	1.00	1.20	11
802.11 ac80	5210	-2.54	1.98	-0.56	11

5725 - 5850MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/500kHz)	Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/500kHz)	
				Result	Limit
802.11a	5745	-4.25	0.50	-3.75	30
	5785	-2.16	0.50	-1.66	30
	5825	-1.80	0.50	-1.30	30
802.11 ac20	5745	-2.74	0.50	-2.24	30
	5785	-2.74	0.50	-2.24	30
	5825	-1.46	0.50	-0.96	30
802.11 ac40	5755	-5.86	1.00	-4.86	30
	5795	-4.92	1.00	-3.92	30
802.11 ac80	5775	-9.43	1.98	-7.45	30


3.5.4 Duty Cycle


Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)	Duty Cycle Factor (dB)	1/T (Hz)	VBW Setting* (Hz)
802.11a	1.3925	1.56375	89.05	0.50	718	1000
802.11 ac20	1.185	1.33	89.10	0.50	844	1000
802.11 ac40	0.590625	0.743125	79.48	1.00	1693	3000
802.11 ac80	0.295375	0.466125	63.37	1.98	3386	10000

Note*: Radiated emission test with average value, the Spectrum analyzer VBW setting information.

Test Plots:


26dB Emission Bandwidth

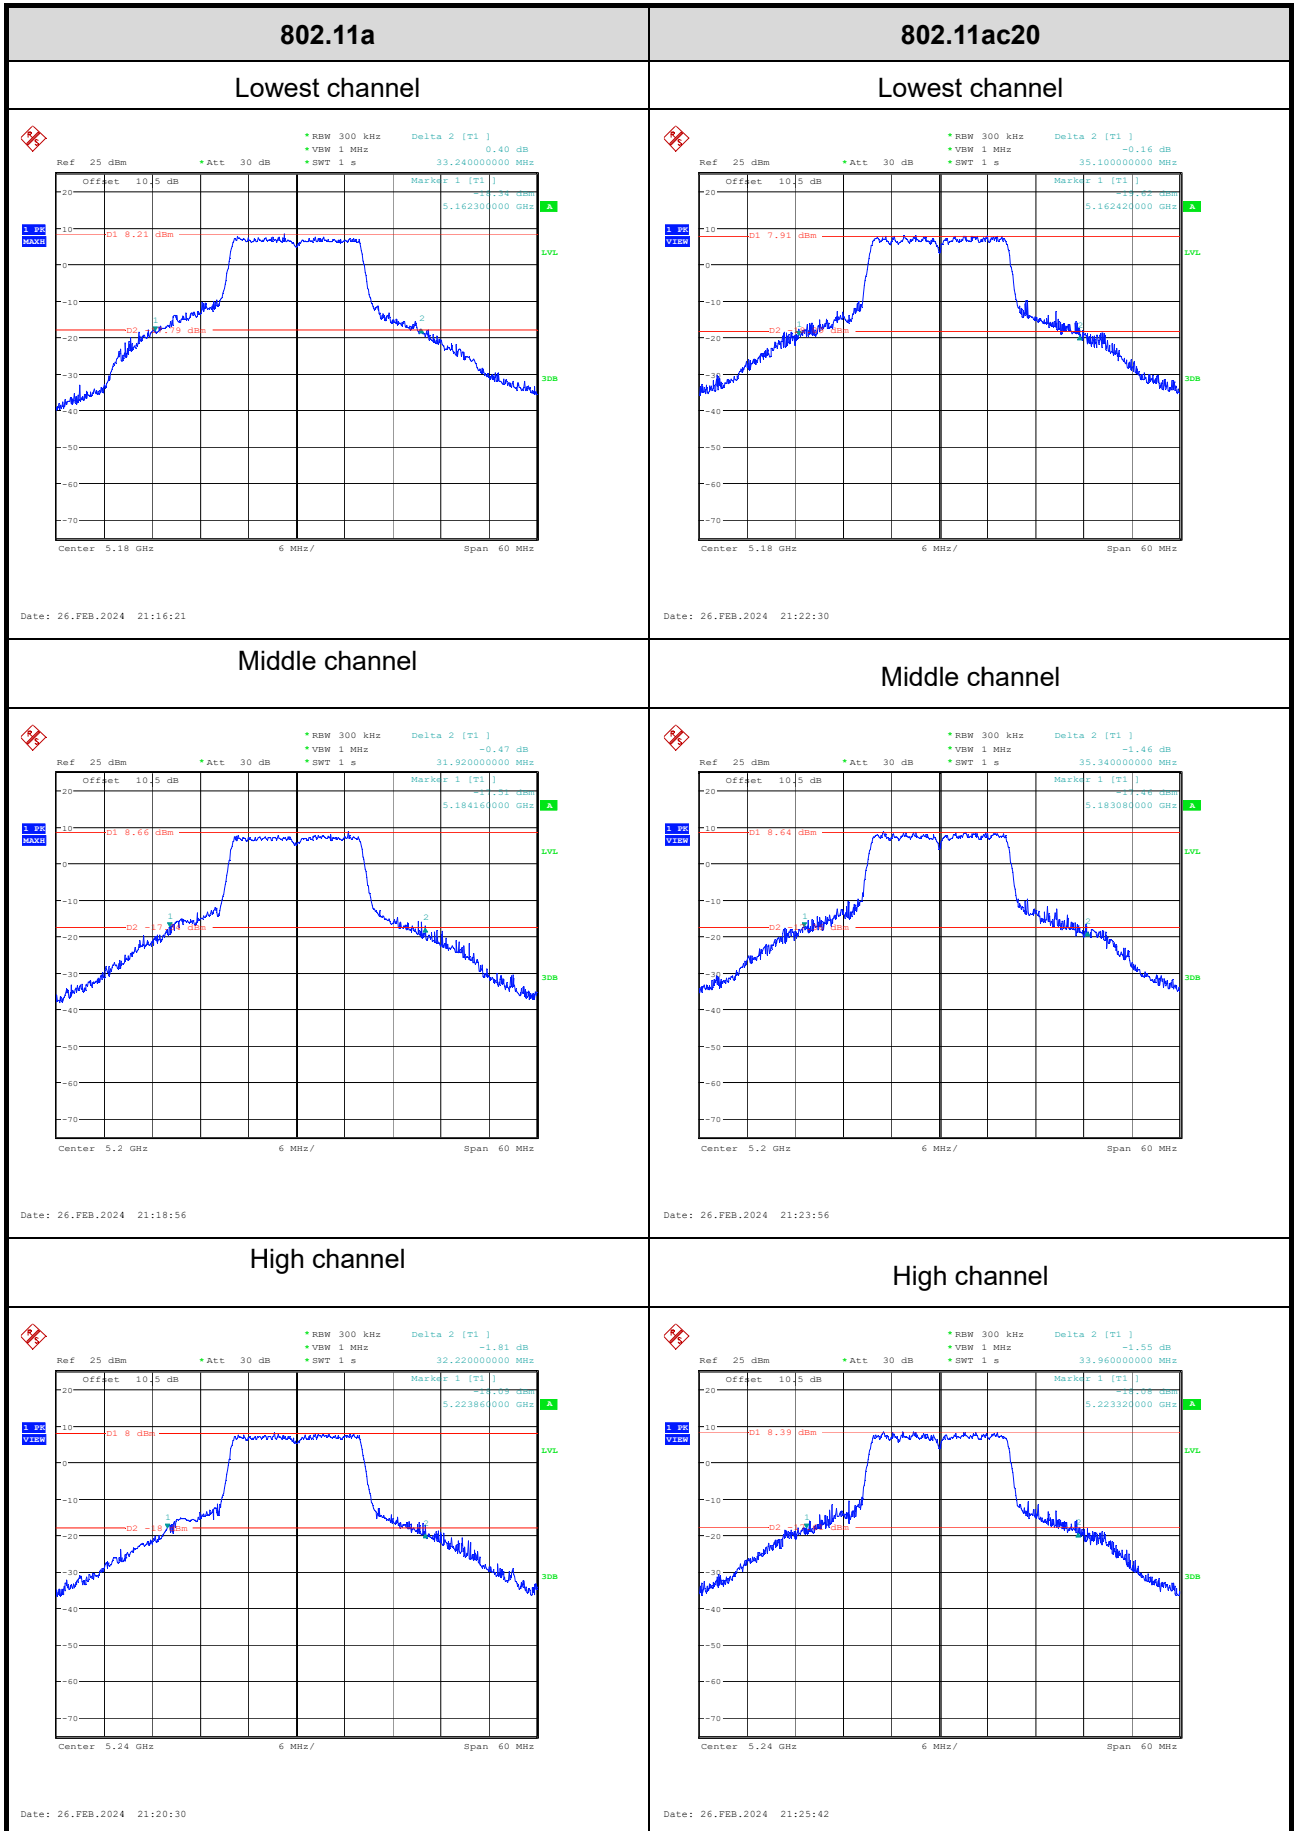


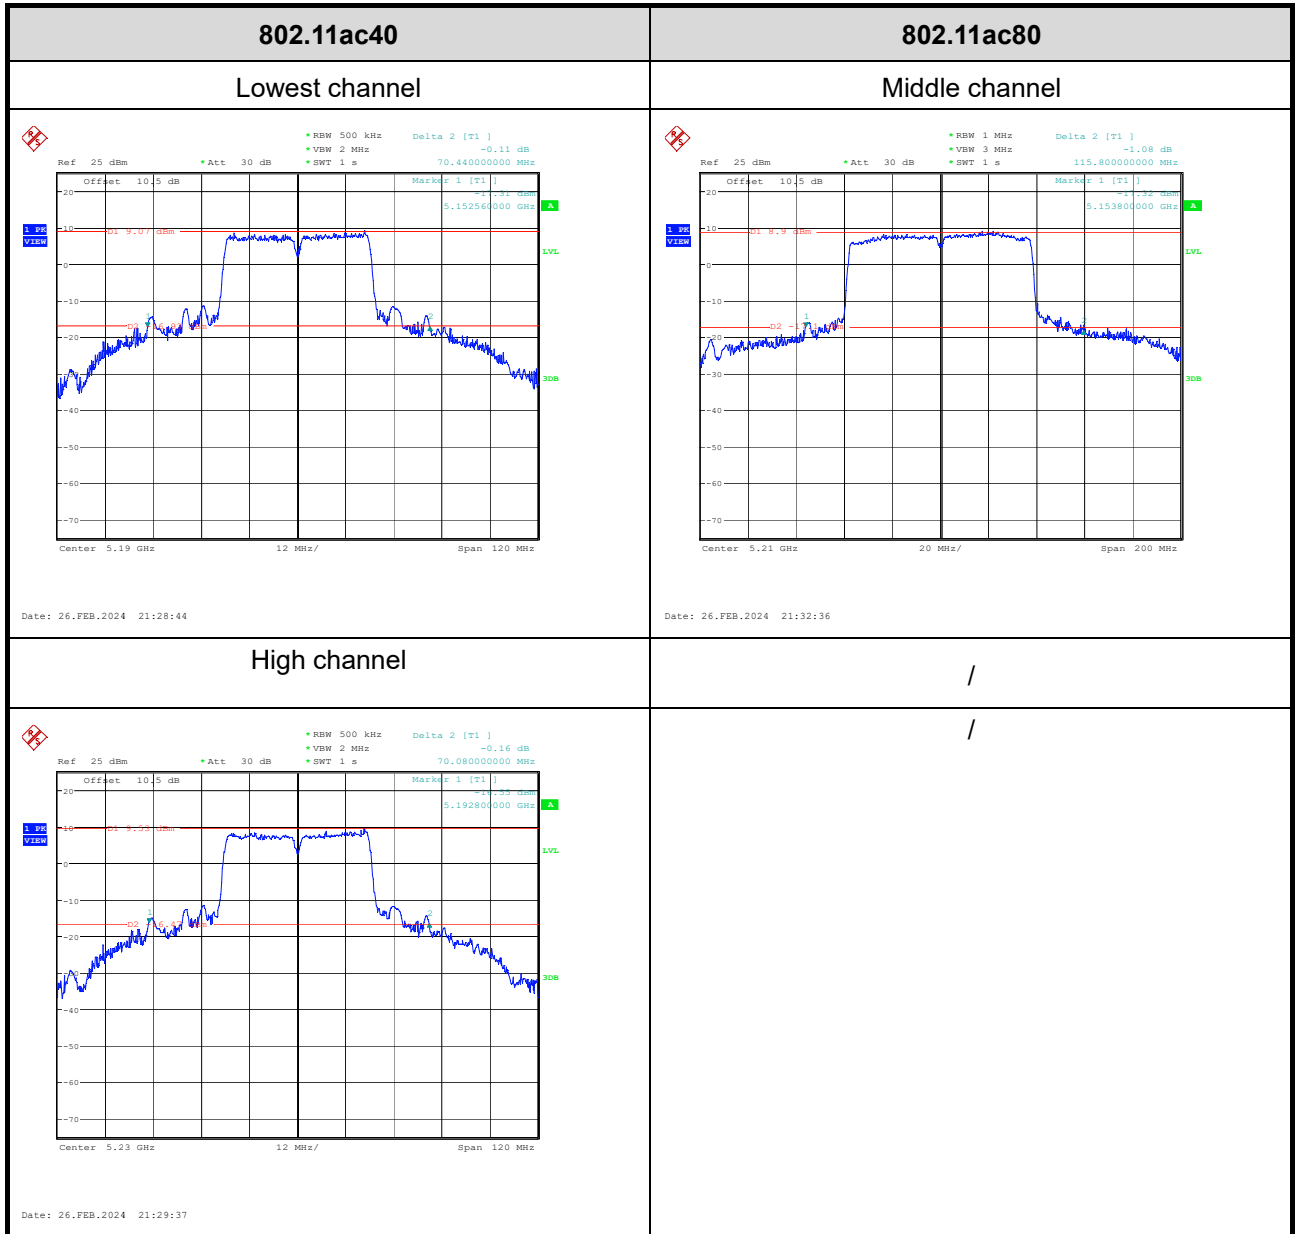


99% Occupied Bandwidth


5150-5250MHz Band:

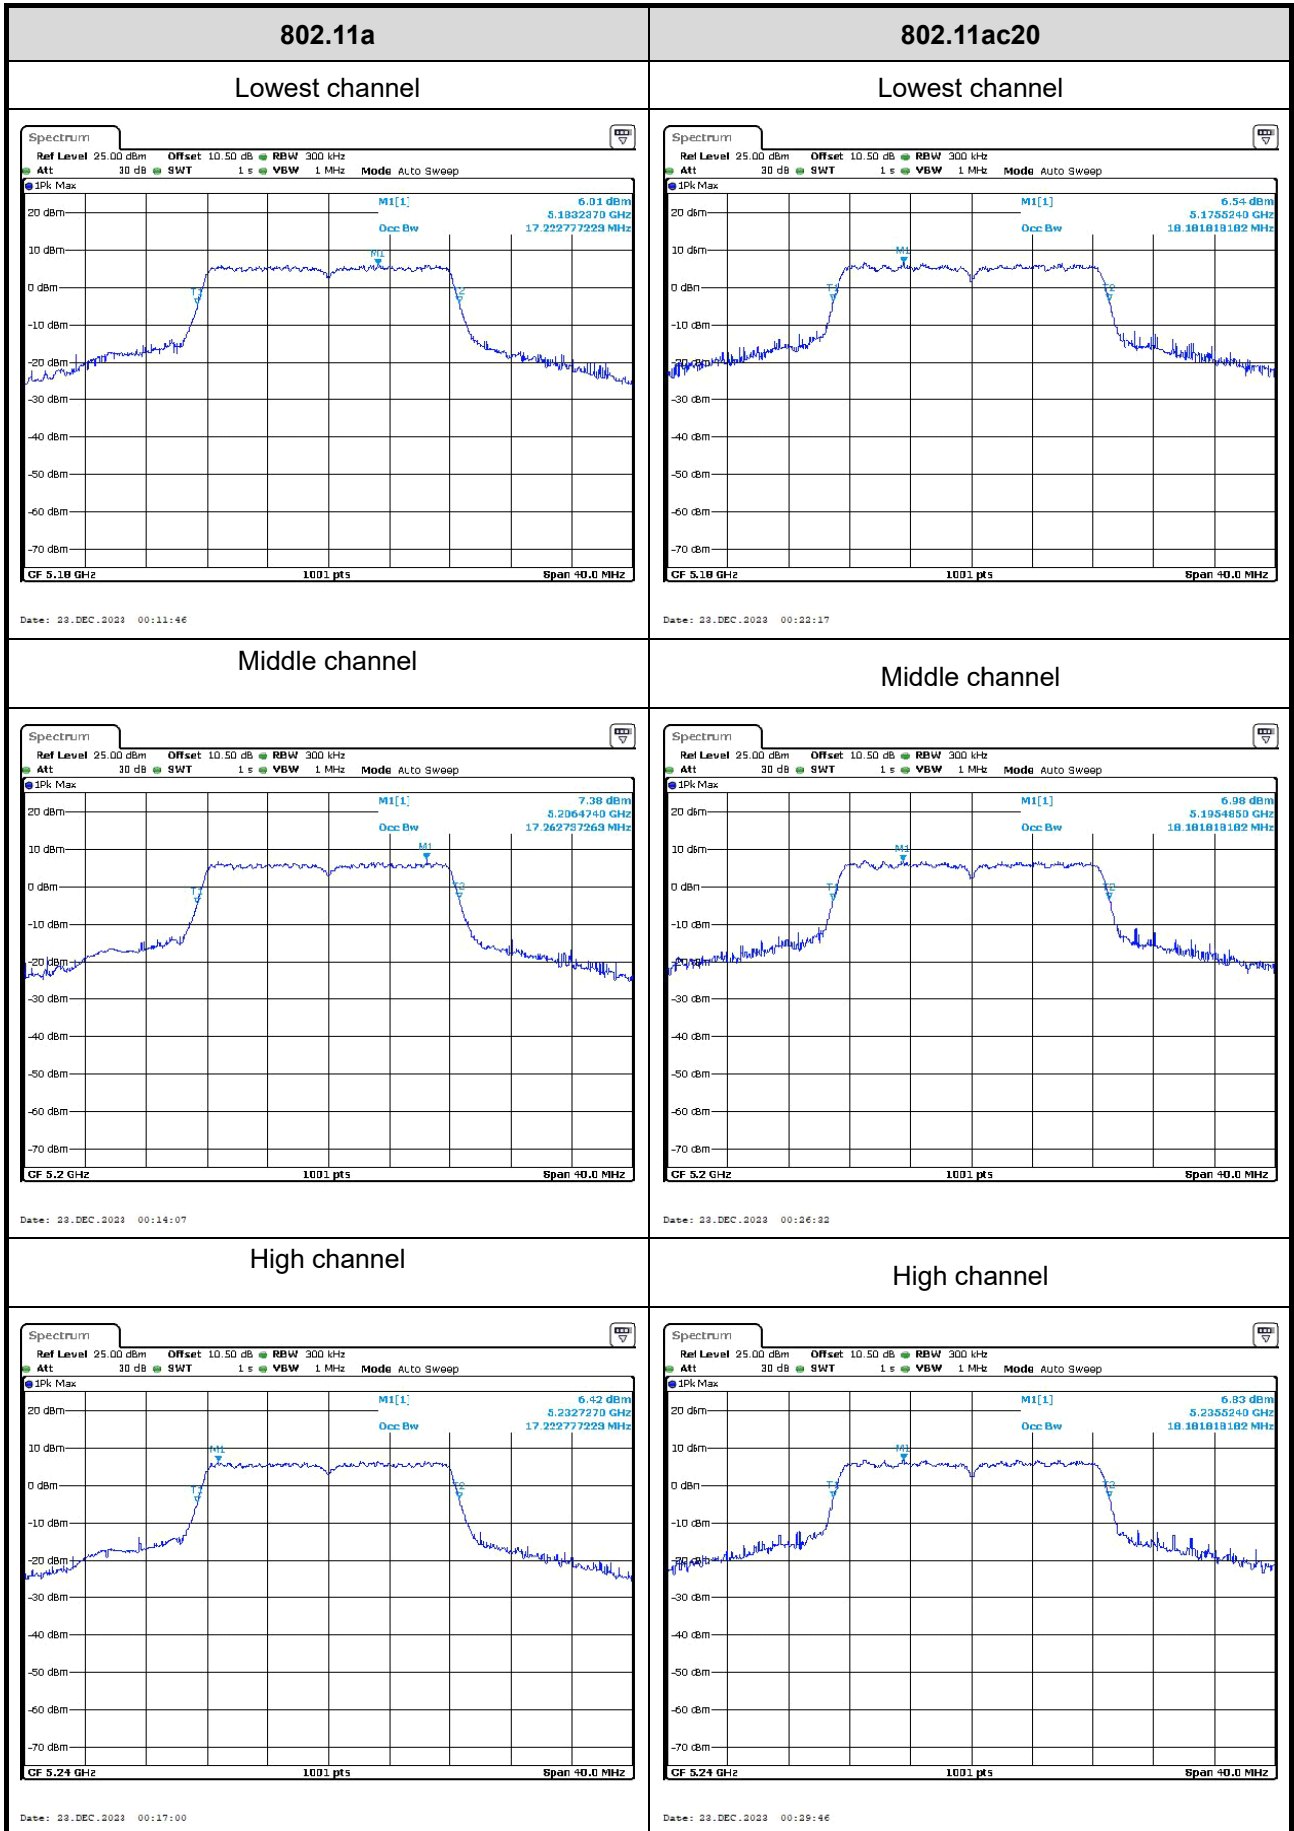

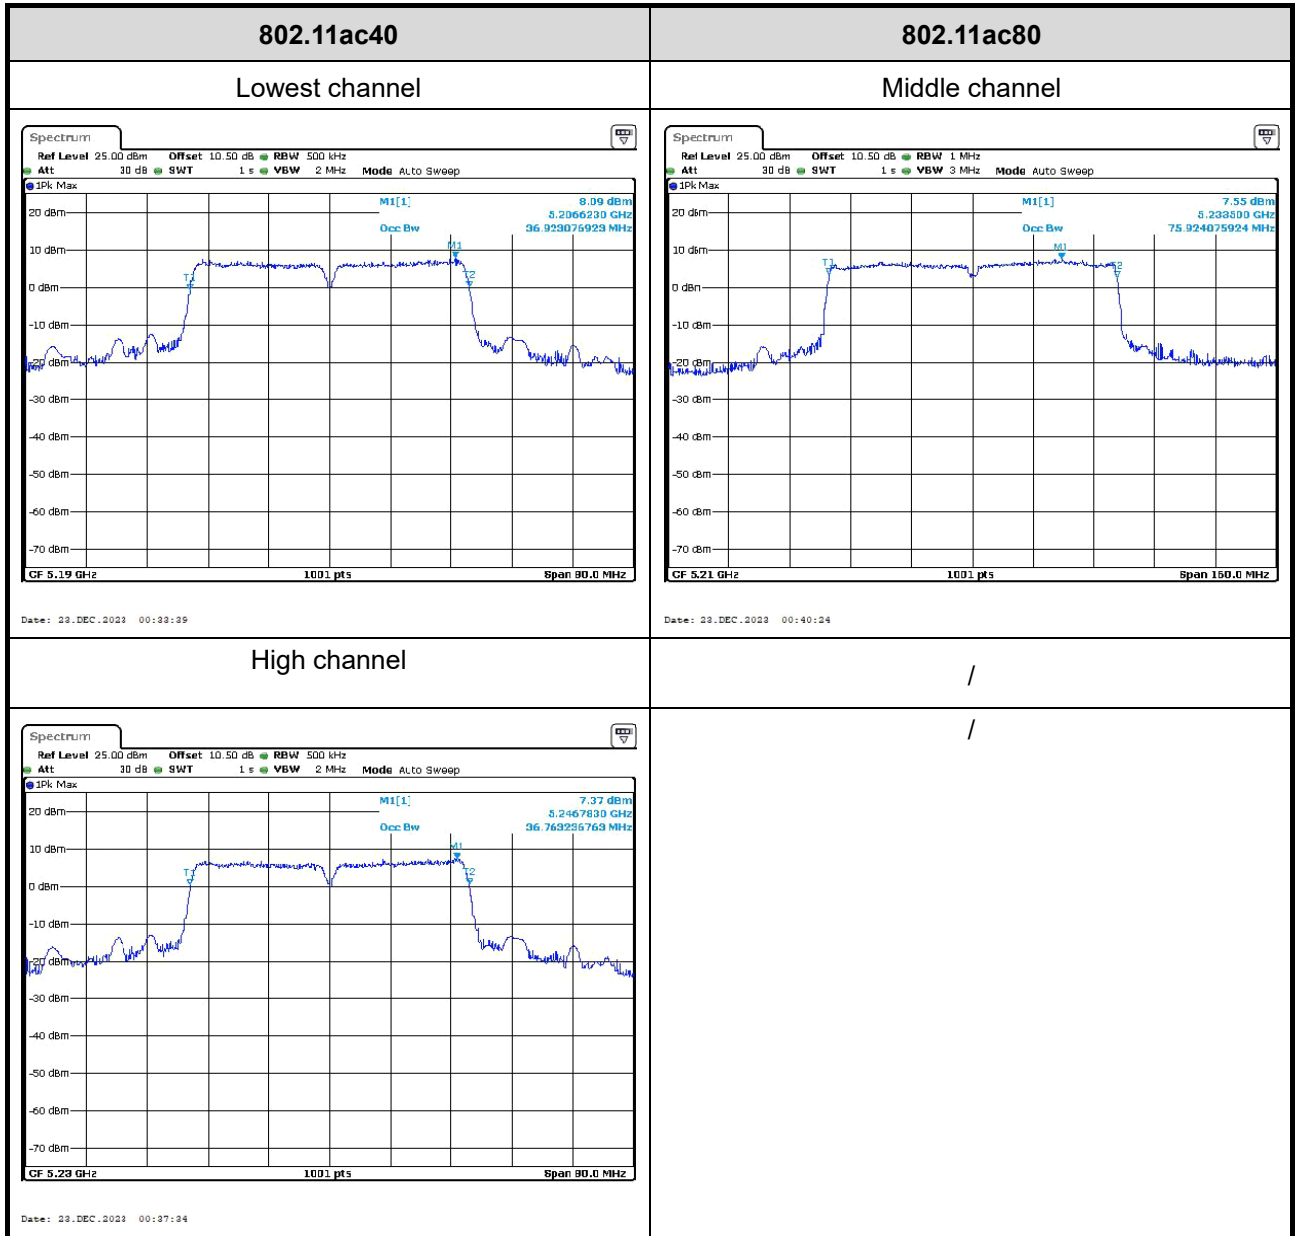



5725-5850MHz Band:

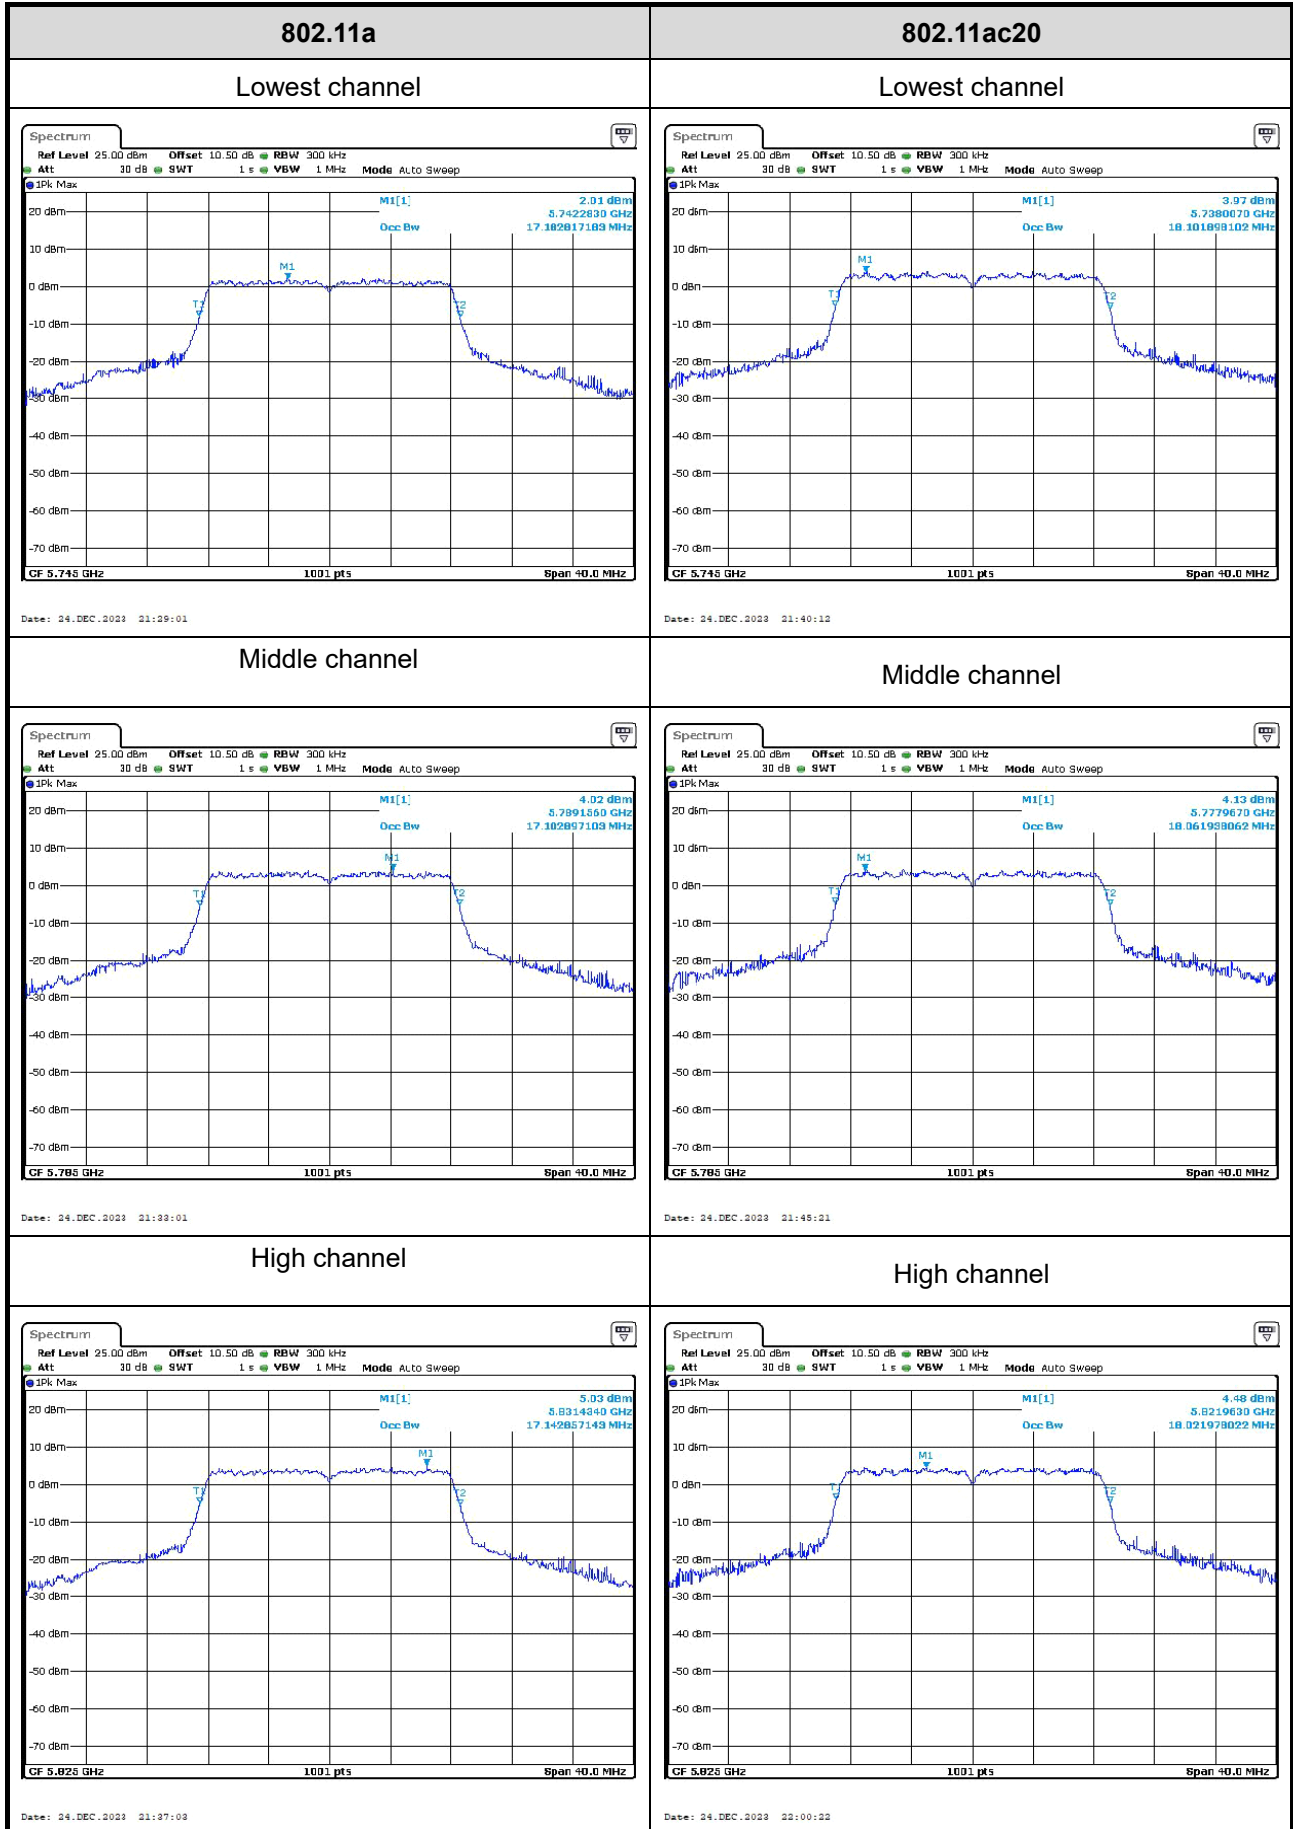

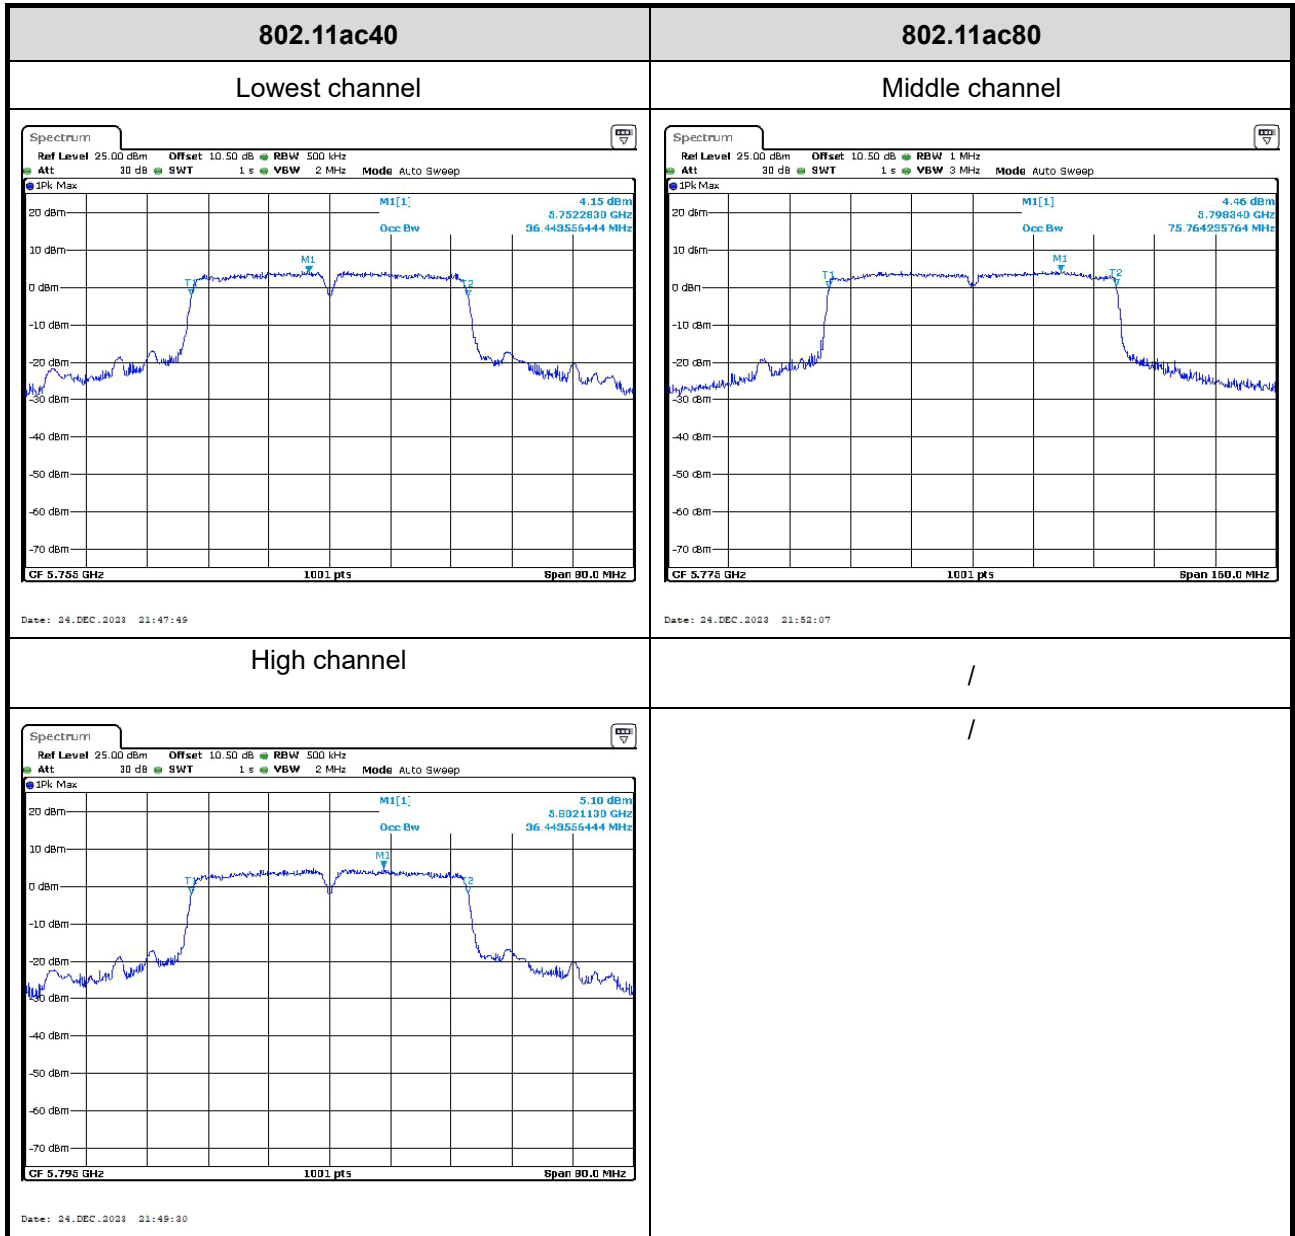


6dB Emission Bandwidth

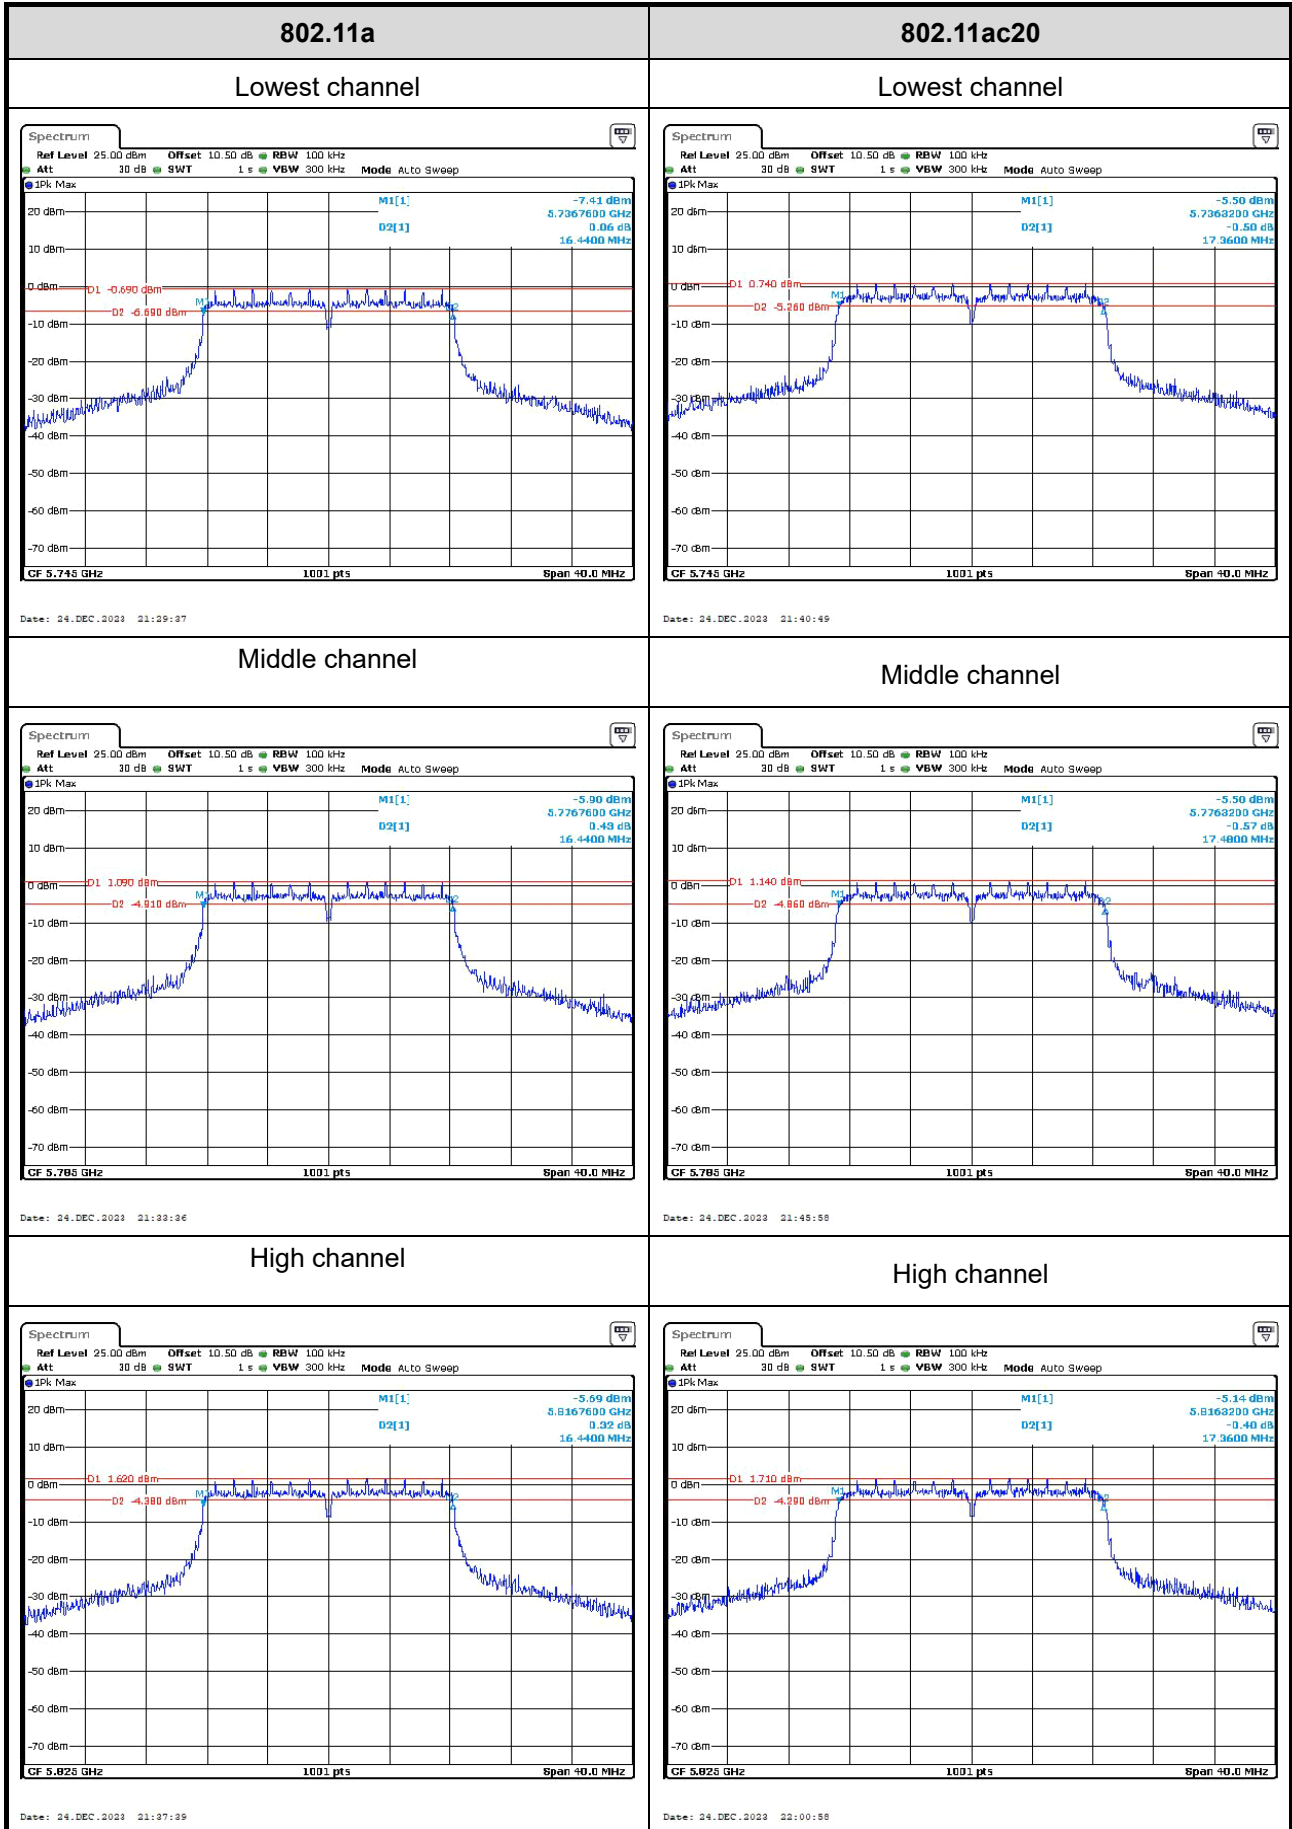


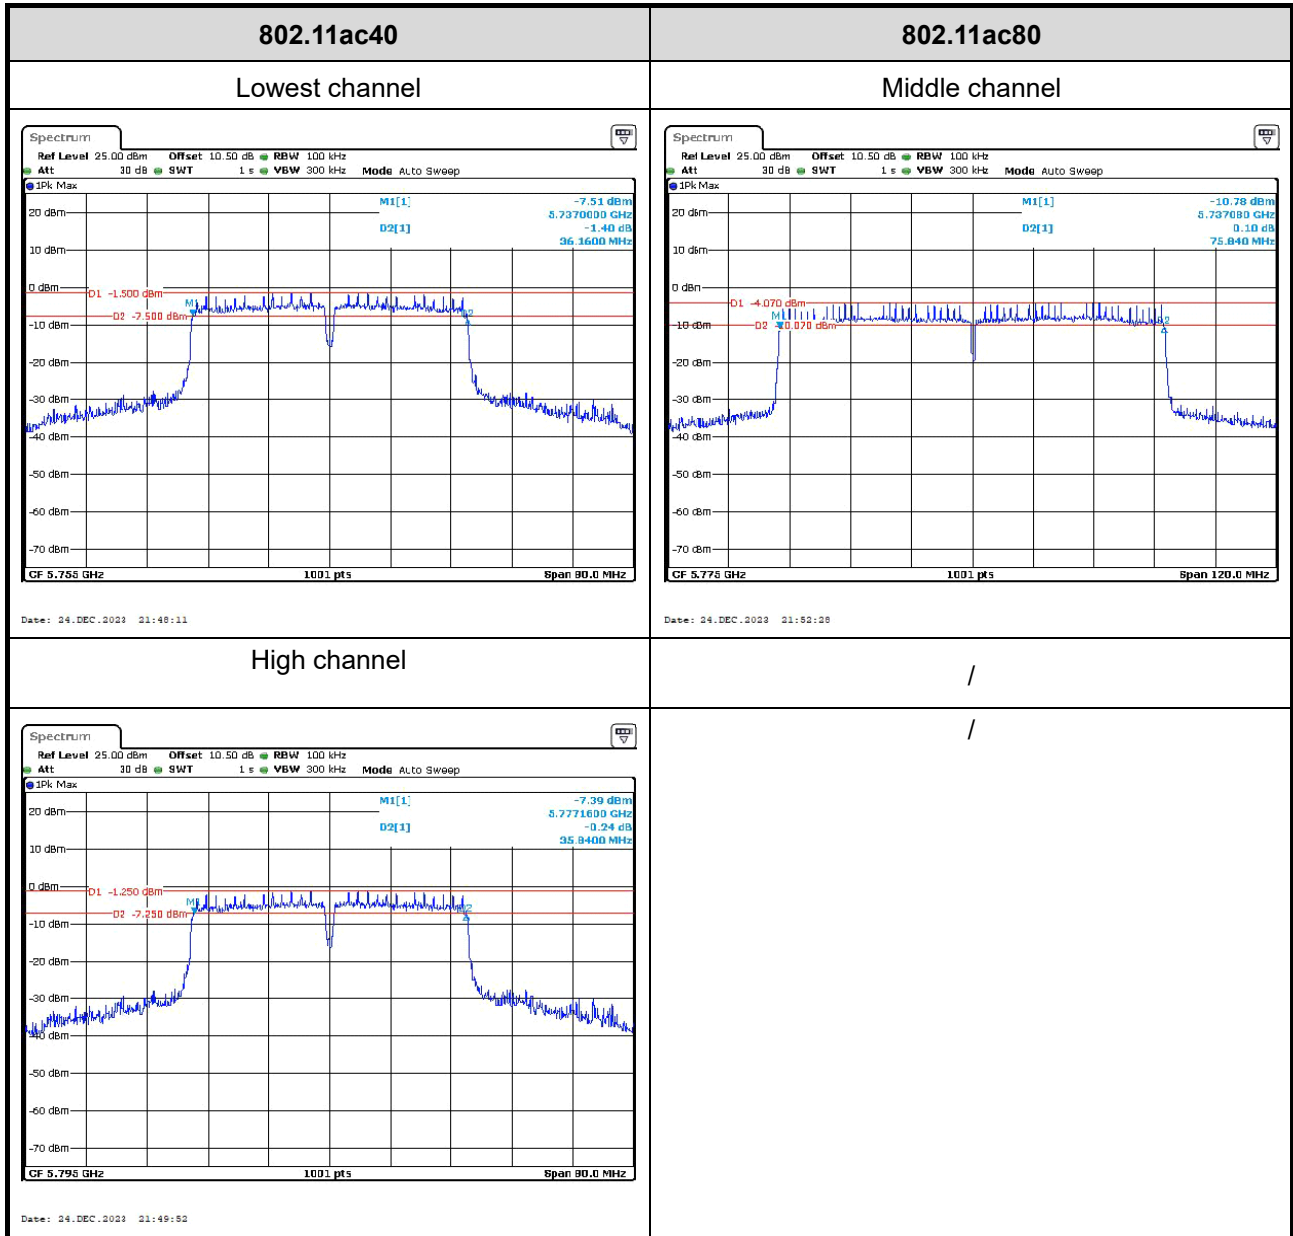


Power Spectral Density


5150-5250MHz Band:

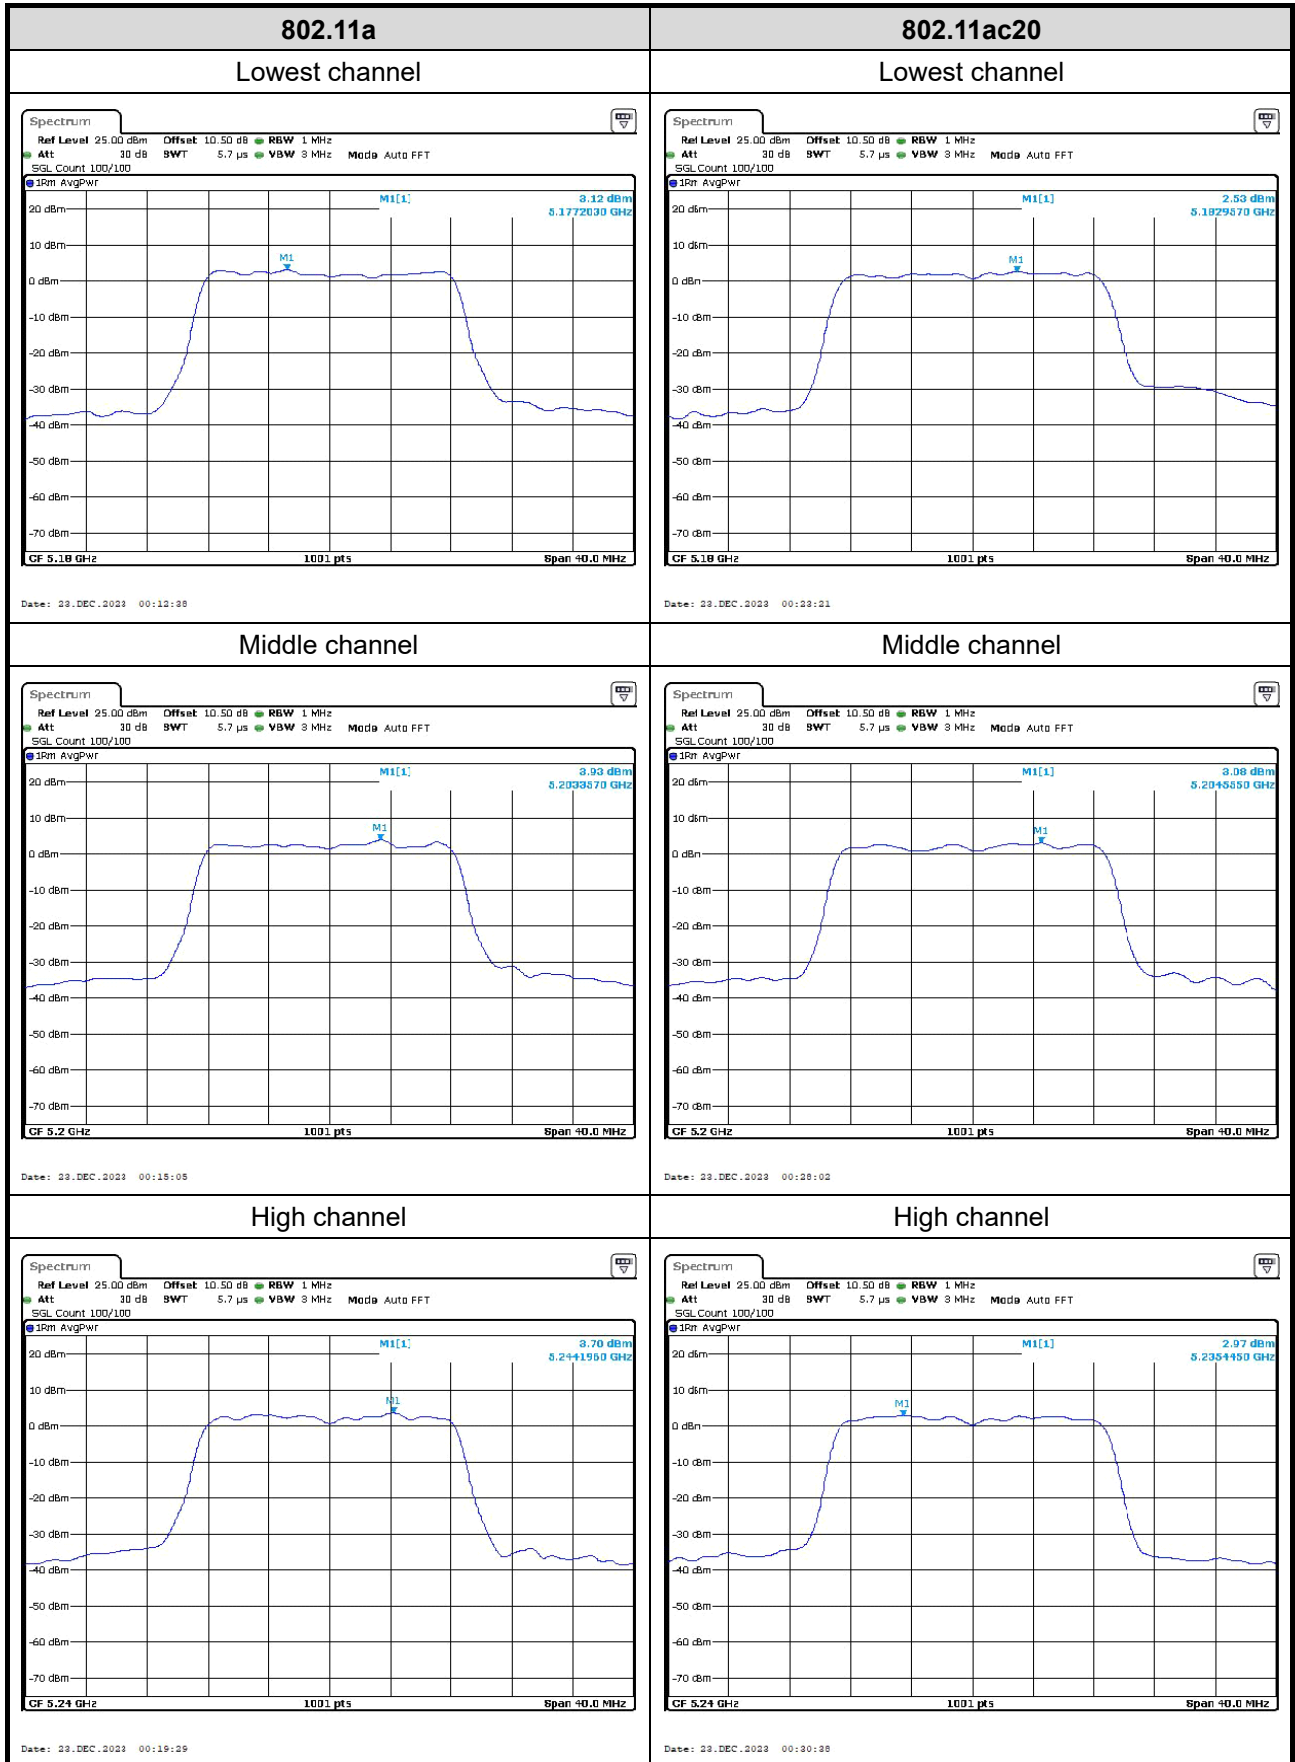

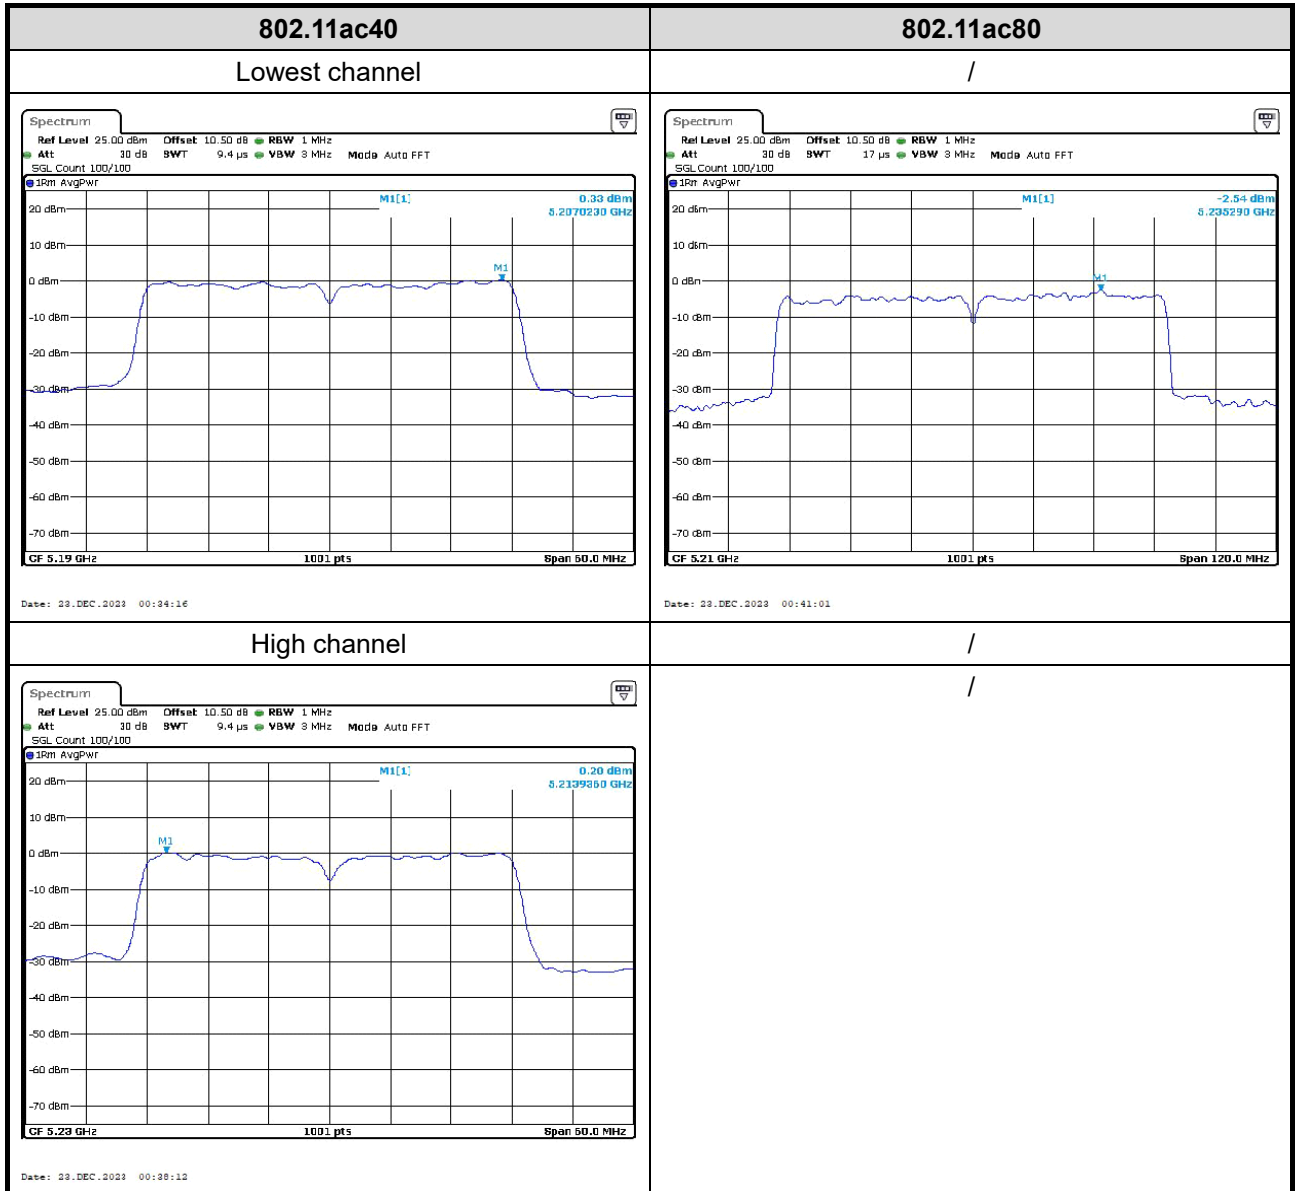


5725-5850MHz Band:

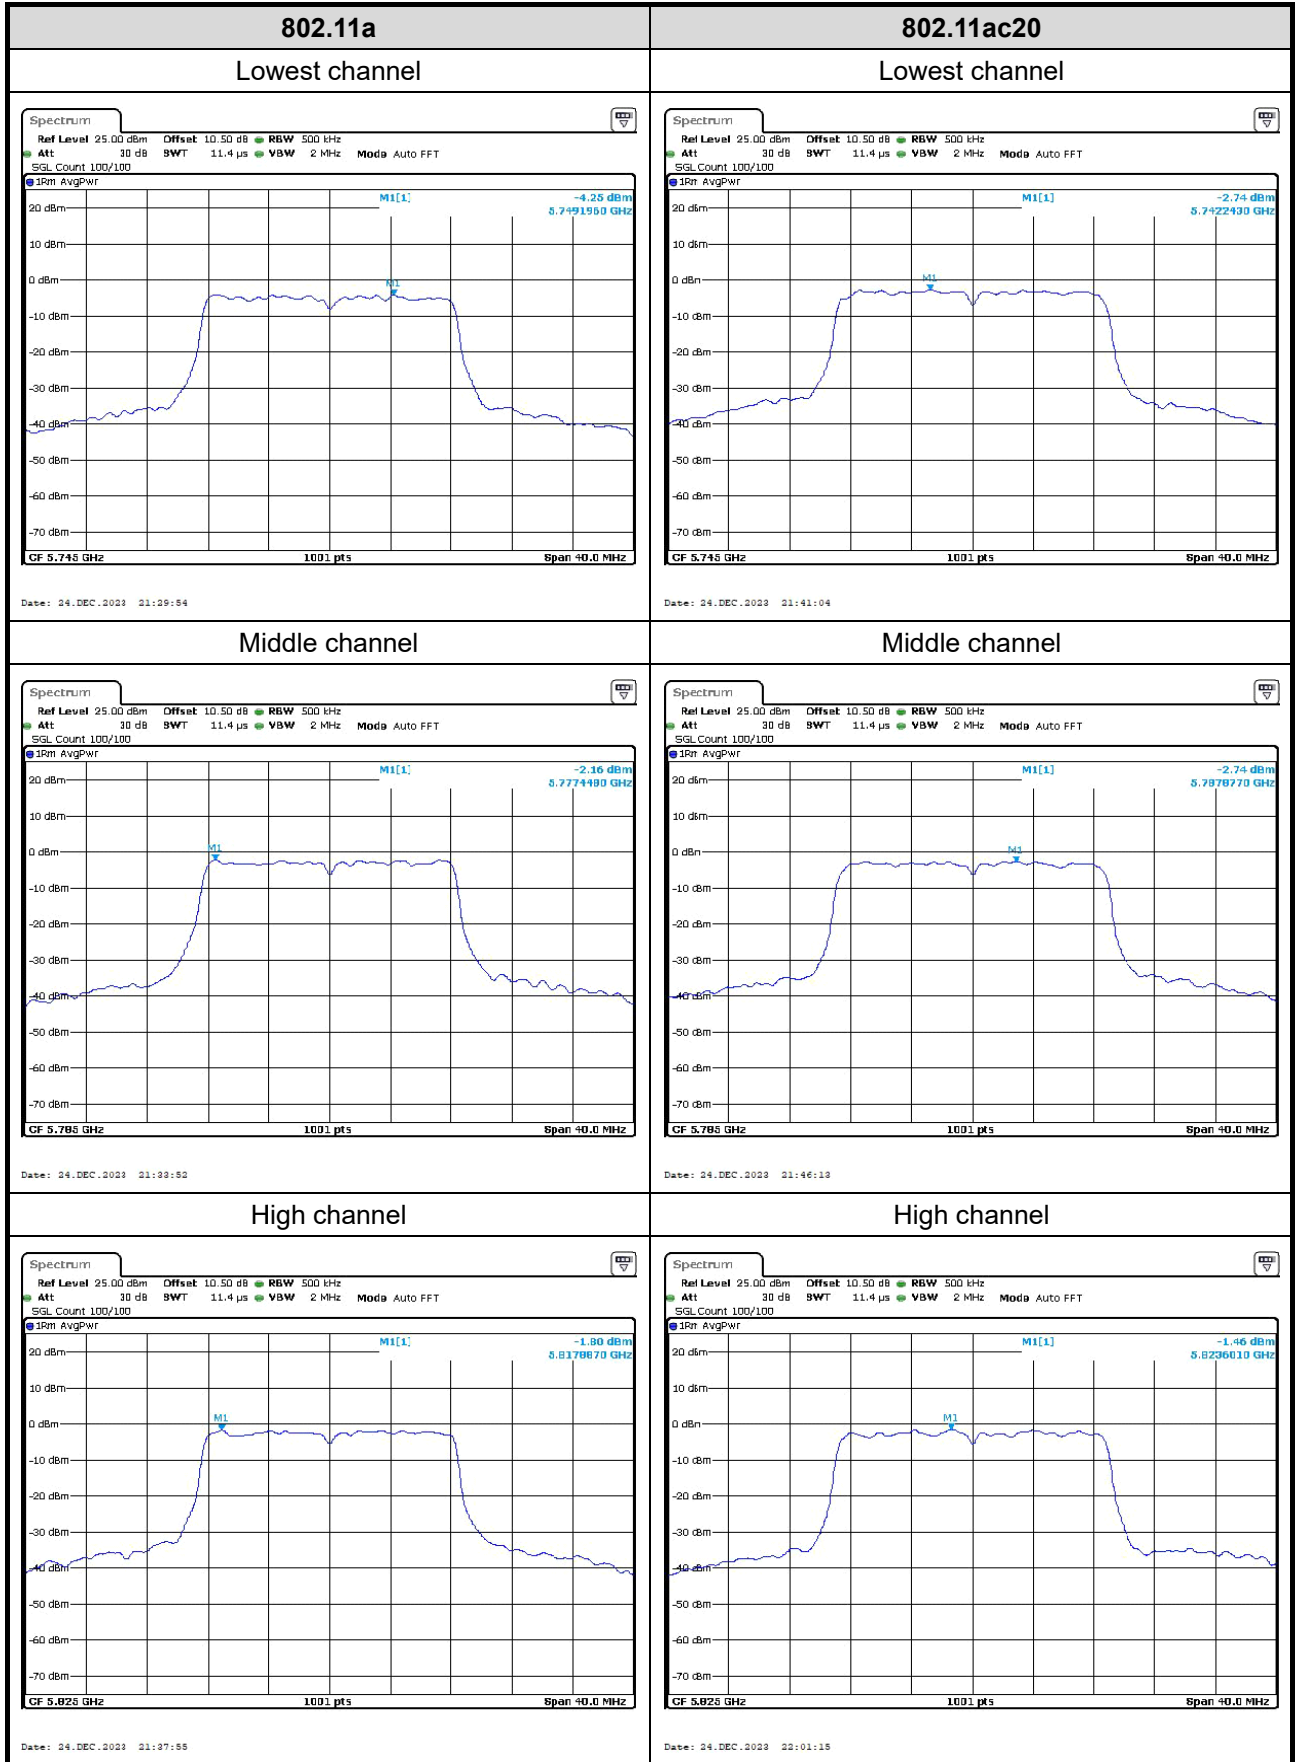

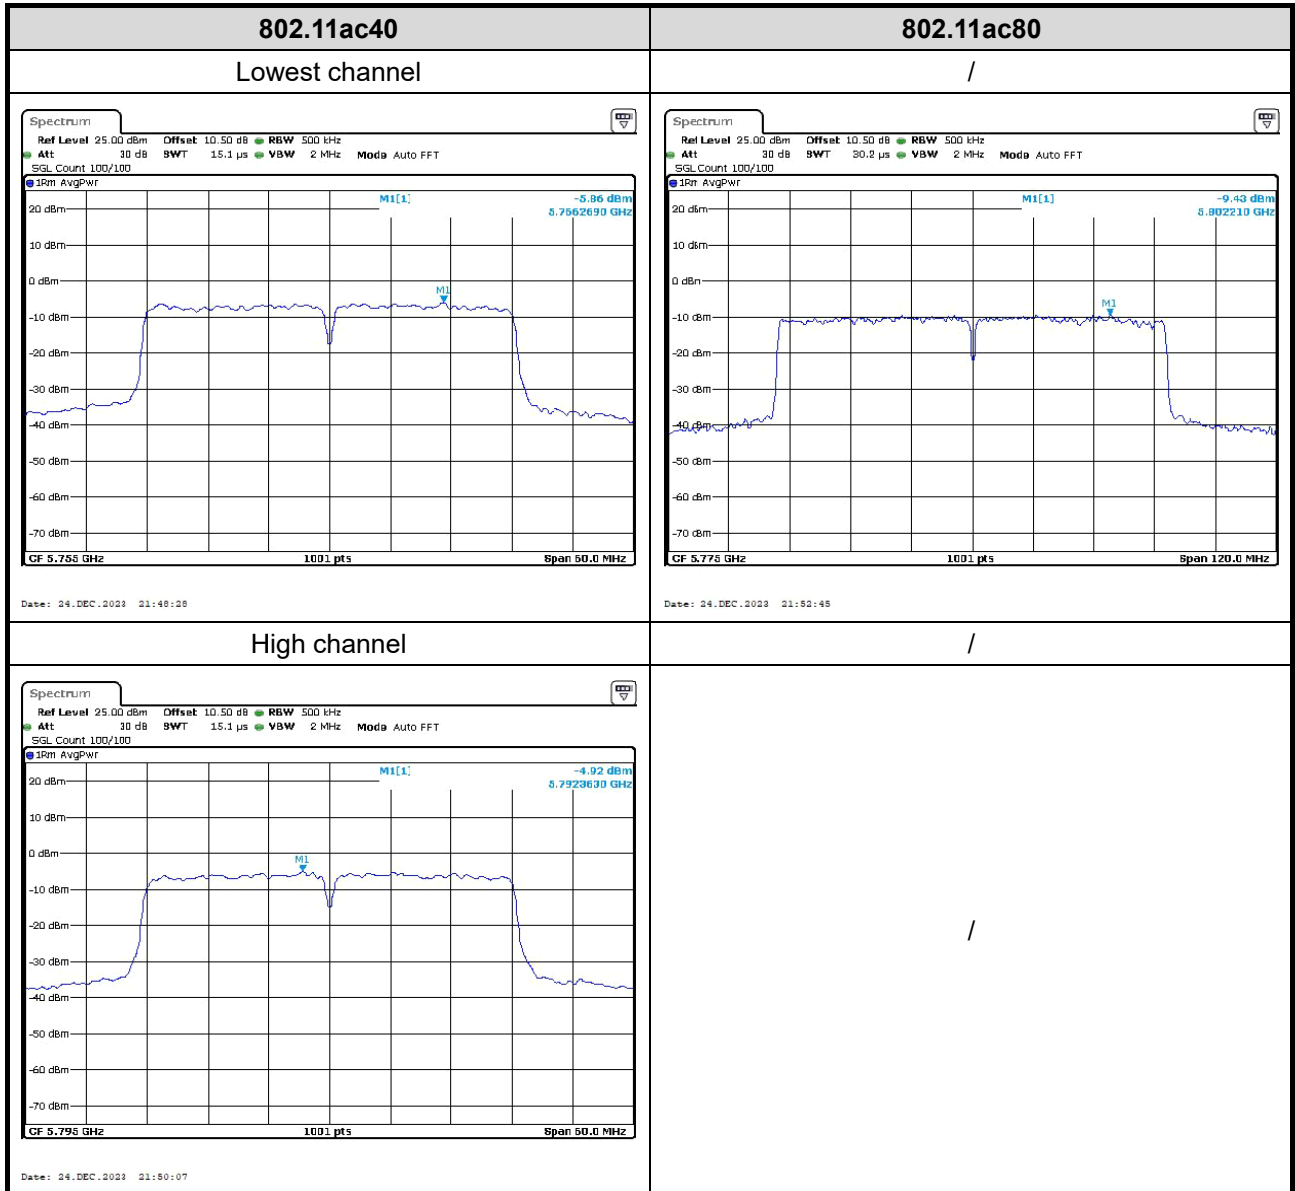

Duty Cycle

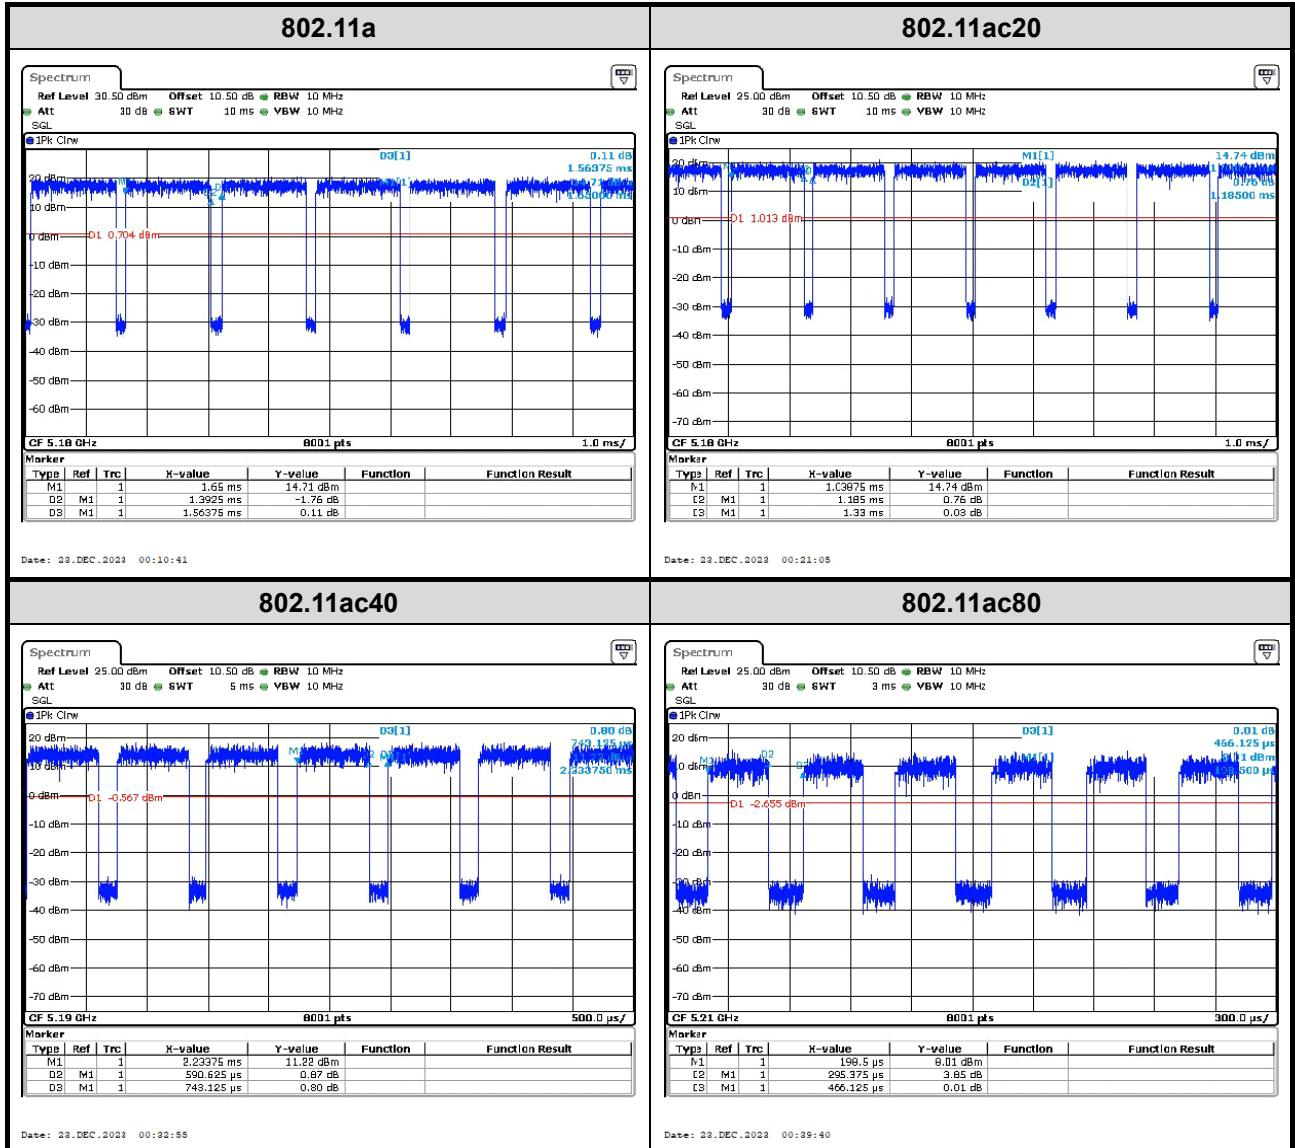

4 Test Setup Photo

Please refer to the attachment RWAZ202300119 Test Setup photo.

5 E.U.T Photo

Please refer to the attachment RWAZ202300119 External photo and RWAZ202300119 Internal photo.

---End of Report---