



FCC ID: 2ATZ6-AT11-22-11
Report No.: T201116W03-RP1

Page: 1 / 132
Rev.: 01

FCC 47 CFR PART 24 SUBPART E

TEST REPORT

For

ActiveTrack

Model No.: AT11-22-11

Trade Name: Upstream S.A

Issued to

UPSTREAM S.A
Rue de Gosselies 13/9 Jumet 6040 Belgium

Issued by

Compliance Certification Services Inc.
Wugu Laboratory
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City, Taiwan. (R.O.C.)
Issued Date: May 5, 2021

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T201116W03-RP1

Page: 2 / 132

Rev.: 01

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	April 13, 2021	Initial Issue	ALL	Allison Chen
01	May 5, 2021	See the following Note Rev.(01)	P.A-2	Allison Chen

Note:

Rev.(01)

1. Revised test setup photo above 1GHz.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION.....	5
3. TEST METHODOLOGY.....	6
3.1 EUT CONFIGURATION	6
3.2 DESCRIPTION OF TEST MODES.....	6
4. TEST SUMMARY	8
5. INSTRUMENT CALIBRATION	9
5.1 MEASURING INSTRUMENT CALIBRATION	9
5.2 MEASUREMENT EQUIPMENT USED	9
5.3 MEASUREMENT UNCERTAINTY	11
6. FACILITIES AND ACCREDITATIONS.....	12
6.1 FACILITIES	12
6.2 EQUIPMENT	12
7. SETUP OF EQUIPMENT UNDER TEST	13
7.1 SETUP CONFIGURATION OF EUT	13
7.2 SUPPORT EQUIPMENT	13
8. FCC PART 24 REQUIREMENTS	14
8.1 EIRP MEASUREMENT	14
8.2 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT.....	21
8.3 OCCUPIED BANDWIDTH MEASUREMENT	23
8.4 PEAK TO AVERAGE POWER RATIO	73
8.5 CONDUCTED BAND EDGE MEASUREMENT.....	87
8.6 CONDUCTED SPURIOUS EMISSIONS	100
8.7 SPURIOUS RADIATION MEASUREMENT	125
9. APPENDIX A PHOTOGRAPHS OF TEST SETUP	A-1

APPENDIX 1 - PHOTOGRAPHS OF EUT



Report No.: T201116W03-RP1

Page: 4 / 132

Rev.: 01

1. TEST RESULT CERTIFICATION

Applicant: UPSTREEM S.A
Rue de Gosselies 13/9 Jumet 6040 Belgium

Manufacturer: IMEC Taiwan Co.
4F. No.6-2, Dusing Rd., Hsinchu Science Park, Hsinchu,
Taiwan

Equipment Under Test: ActiveTrack

Trade Name: Upstream S.A

Model No.: AT11-22-11

Date of Test: January 25 ~ 29, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR PART 24 SUBPART E	No non-compliance noted
Statements of Conformity	
Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.	

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA -603-E and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rule FCC PART 22 Subpart H, and PART 24 Subpart E.

Approved by:

Kevin Tsai
Deputy Manager
Compliance Certification Services Inc.

2. EUT DESCRIPTION

Product	ActiveTrack	
Model No.	AT11-22-11	
Model Discrepancy	N/A	
Trade	Upstream S.A	
Received Date	November 16, 2020	
Power Supply	1. Power from Adapter. Microsoft Japan Co., Ltd / 1621 I/P: 100-240VAC, 50/60Hz, 0.18A O/P: 5.0VDC, 1.2A 2. Power from Battery. Rating: 3.7Vdc, 650mAh	
Frequency Range	Cat-M1 LTE Band 2 Channel Bandwidth: 1.4MHz	1850.7MHz ~1909.2MHz
	Cat-M1 LTE Band 2 Channel Bandwidth: 3MHz	1851.5 MHz ~ 1908.4 MHz
	Cat-M1 LTE Band 2 Channel Bandwidth: 5MHz	1852.5MHz ~1907.5MHz
	Cat-M1 LTE Band 2 Channel Bandwidth: 10MHz	1855MHz ~1905MHz
	Cat-M1 LTE Band 2 Channel Bandwidth: 15MHz	1857.5 MHz ~ 1902.5 MHz
	Cat-M1 LTE Band 2 Channel Bandwidth: 20MHz	1860MHz ~1900MHz
Modulation Technique	Cat-M1 LTE Band 2	QPSK, 16QAM
Antenna Specification	Antenna type: FPC Antenna Low CH Gain: 1.26 dBi Mid CH Gain: 1 dBi High CH Gain: 0.29 dBi	

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. Disclaimer: Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.

3. TEST METHODOLOGY

Both conducted and radiated testing were performed according to TIA -603-E, FCC CFR 47, Part 2 and Part 24 Subpart E.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 DESCRIPTION OF TEST MODES

The EUT (Model: AT11-22-11) had been tested under operating condition.
The EUT be set in maximum power transmission via call box during testing.

LTE Band 2: 1850MHz ~ 1910MHz

Three channels had been tested for each channel bandwidth.

Channel	1.4MHz		3MHz		5MHz	
	Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
Lowest	18607	1850.7	18615	1851.5	18625	1852.5
Middle	18900	1880.0	18900	1880.0	18900	1880.0
Highest	19193	1909.2	19184	1908.4	19175	1907.5
Channel	10MHz		15MHz		20MHz	
	Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
Lowest	18650	1855.0	18675	1857.5	18700	1860.0
Middle	18900	1880.0	18900	1880.0	18900	1880.0
Highest	19150	1905.0	19125	1902.5	19100	1900.0

3.2.1 The worst mode of measurement

Radiated Emission Measurement Above 1G	
Test Condition	Radiated Emission Above 1G
Power supply Mode	Mode 1: EUT power by Adapter Mode 2: EUT power by Battery
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4
Worst Position	☒ Placed in fixed position at X-Plane (E2-Plane)

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by Adapter Mode 2: EUT power by Battery
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in axis X and two polarity, for radiated measurement. The worst case(X-Plane) were recorded in this report



Report No.: T201116W03-RP1

Page: 8 / 132

Rev.: 01

4. TEST SUMMARY

FCC Standard Sec.	Report Section	Test Item	Result
-	2	Antenna Requirement	Pass
24.232(c)	8.1	EIRP Measurement	Pass
2.1055, 24.235	8.2	Frequency Stability v.s. temperature measurement	Pass
2.1049	8.3	Occupied Bandwidth Measurement	Pass
24.232(d)	8.4	Peak to Average Ratio	Pass
24.238(a)	8.5	Conducted Band Edge	Pass
24.238(a)	8.6	Conducted Spurious Emission	Pass
24.238(a)	8.7	Spurious Radiation Measurement	Pass

5. INSTRUMENT CALIBRATION

5.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

5.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/25/2020	02/24/2021
Bilog Antenna	Sunol Sciences	JB3	A030105	07/24/2020	07/23/2021
Coaxial Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/25/2020	02/24/2021
Coaxial Cable	EMCI	EMC105	190914+327109/4	09/19/2020	09/18/2021
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/06/2021	01/05/2022
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	09/30/2020	09/29/2021
Loop Ant	COM-POWER	AL-130	121051	03/27/2020	03/26/2021
Pre-Amplifier	EMEC	EM330	060609	02/25/2020	02/24/2021
Pre-Amplifier	HP	8449B	3008A00965	02/25/2020	02/24/2021
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	07/24/2020	07/23/2021
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 6.11-20180413				

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Radio Communication Analyzer	Anritsu	MT-8820C	6201240043	07/17/2020	07/16/2021
Signal Analyzer	R&S	FSV 40	101073	09/17/2020	09/16/2021
Wideband Radio Communication Tester	R&S	CMW 500	116875	07/19/2020	07/18/2021
Software	e3 6.11-20180413				



Report No.: T201116W03-RP1

Page: 10 / 132

Rev.: 01

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Coaxial Cable	Woken	WC12	CC001	06/29/2020	06/28/2021
Coaxial Cable	Woken	WC12	CC003	06/29/2020	06/28/2021
Power Divider	Solvang Technology	STI08-0015	008	08/05/2020	08/04/2021
Signal Analyzer	R&S	FSV 40	101561	08/17/2020	08/16/2021
Thermostatic/Humidity Chamber	GWINSTEK	GTC-288MH-CC	TH160402	05/07/2020	05/06/2021
Radio Communication Analyzer	Anritsu	MT-8821C	6201300618	05/27/2020	05/26/2021
Software	N/A				



Report No.: T201116W03-RP1

Page: 11 / 132

Rev.: 01

5.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

6. FACILITIES AND ACCREDITATIONS

6.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2299-9721

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2013 and CISPR Publication 22.

6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



Report No.: T201116W03-RP1

Page: 13 / 132

Rev.: 01

7. SETUP OF EQUIPMENT UNDER TEST

7.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

7.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID
1.	DC Power Source	Agilent	E3640A	N/A	N/A

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8. FCC PART 24 REQUIREMENTS

8.1 EIRP MEASUREMENT

LIMIT

According to FCC §2.1046

FCC 24.232(b):

The equivalent Isotropic Radiated Power (EIRP) must not exceed 2 Watts.

TEST PROCEDURES

CONDUCTED POWER MEASUREMENT:

1. The transmitter output power was connected to the call box.
2. Set EUT at maximum output power via call box.
3. Set Call box at lowest, middle and highest channels for each band and modulation.

TEST RESULTS

No non-compliance noted.

Report No.: T201116W03-RP1

Temperature: 21.5°C

Humidity: 54% RH

Tested by: Dally Hong

Test Date: January 29, 2021

LTE Band 2

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power (dBm)	E.I.R.P. Power (dBm)
Band 2	1.4M	18607	1850.7	QPSK	1	0	0	22.85	24.11
					1	2	0	22.90	24.16
					1	5	0	22.69	23.95
					3	0	1	21.89	23.15
					3	2	1	21.91	23.17
					3	3	1	21.96	23.22
					6	0	2	21.00	22.26
				16QAM	1	0	1	22.03	23.29
					1	2	1	22.19	23.45
					1	4	1	21.90	23.16
					3	0	2	21.08	22.34
					3	2	2	21.11	22.37
					3	3	2	20.98	22.24
					5	0	2	21.16	22.42
		18900	1880.0	QPSK	1	0	0	23.13	24.13
					1	2	0	23.17	24.17
					1	5	0	22.73	23.73
					3	0	1	22.24	23.24
					3	2	1	22.28	23.28
					3	3	1	21.85	22.85
					6	0	2	21.35	22.35
				16QAM	1	0	1	22.39	23.39
					1	2	1	22.32	23.32
					1	4	1	22.12	23.12
					3	0	2	21.70	22.70
					3	2	2	21.37	22.37
					3	3	2	20.97	21.97
					5	0	2	21.37	22.37
		19192	1909.2	QPSK	1	0	0	22.73	23.02
					1	2	0	22.69	22.98
					1	5	0	22.76	23.05
					3	0	1	21.91	22.20
					3	2	1	21.90	22.19
					3	3	1	21.88	22.17
					6	0	2	21.12	21.41
				16QAM	1	0	1	21.86	22.15
					1	2	1	21.89	22.18
					1	4	1	21.92	22.21
					3	0	2	21.07	21.36
					3	2	2	20.97	21.26
					3	3	2	21.01	21.30
					5	0	2	21.14	21.43

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power (dBm)	E.I.R.P. Power (dBm)
Band 2	3M	18615	1851.5	QPSK	1	0	0	22.92	24.18
					1	2	0	22.86	24.12
					1	5	0	22.95	24.21
					3	0	1	22.19	23.45
					3	2	1	22.09	23.35
					3	3	1	22.10	23.36
					6	0	2	21.16	22.42
				16QAM	1	0	1	22.08	23.34
					1	2	1	21.99	23.25
					1	4	1	22.05	23.31
					3	0	2	21.20	22.46
					3	2	2	20.89	22.15
					3	3	2	20.99	22.25
					5	0	2	21.11	22.37
		18900	1880.0	QPSK	1	0	0	23.34	24.34
					1	2	0	23.24	24.24
					1	5	0	22.71	23.71
					3	0	1	22.64	23.64
					3	2	1	22.29	23.29
					3	3	1	21.96	22.96
					6	0	2	21.47	22.47
				16QAM	1	0	1	22.42	23.42
					1	2	1	22.55	23.55
					1	4	1	22.13	23.13
					3	0	2	21.45	22.45
					3	2	2	21.35	22.35
					3	3	2	20.82	21.82
					5	0	2	21.38	22.38
		19184	1908.4	QPSK	1	0	0	22.96	23.25
					1	2	0	22.83	23.12
					1	5	0	22.85	23.14
					3	0	1	22.13	22.42
					3	2	1	21.92	22.21
					3	3	1	21.97	22.26
					6	0	2	21.26	21.55
				16QAM	1	0	1	22.16	22.45
					1	2	1	22.12	22.41
					1	4	1	21.86	22.15
					3	0	2	20.99	21.28
					3	2	2	20.94	21.23
					3	3	2	21.02	21.31
					5	0	2	21.23	21.52

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power (dBm)	E.I.R.P. Power (dBm)
Band 2	5M	18625	1852.5	QPSK	1	0	0	23.13	24.39
					1	2	0	22.85	24.11
					1	5	0	23.06	24.32
					3	0	1	22.20	23.46
					3	2	1	22.23	23.49
					3	3	1	22.10	23.36
				16QAM	6	0	1	22.15	23.41
					1	0	0	23.02	24.28
					1	2	0	22.96	24.22
					1	4	0	22.75	24.01
					3	0	1	22.20	23.46
					3	2	1	21.87	23.13
		18900	1880.0	QPSK	3	3	1	22.10	23.36
					5	0	2	21.15	22.41
					1	0	0	23.31	24.31
					1	2	0	23.03	24.03
					1	5	0	22.58	23.58
					3	0	1	22.36	23.36
				16QAM	3	2	1	22.45	23.45
					3	3	1	22.03	23.03
					6	0	1	22.58	23.58
					1	0	0	23.13	24.13
					1	2	0	22.91	23.91
					1	4	0	22.37	23.37
		19175	1907.5	QPSK	3	0	1	22.39	23.39
					3	2	1	22.30	23.30
					3	3	1	21.98	22.98
					5	0	2	21.54	22.54
				16QAM	1	0	0	22.83	23.12
					1	2	0	22.70	22.99
					1	5	0	22.83	23.12
					3	0	1	22.16	22.45
					3	2	1	21.91	22.20
					3	3	1	21.85	22.14
					6	0	1	22.20	22.49
				16QAM	1	0	0	22.54	22.83
					1	2	0	22.17	22.46
					1	4	0	22.18	22.47
					3	0	1	22.18	22.47
					3	2	1	22.06	22.35
					3	3	1	22.05	22.34
					5	0	2	21.17	21.46

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power (dBm)	E.I.R.P. Power (dBm)
Band 2	10M	18650	1855.0	QPSK	1	0	0	22.92	24.18
					1	2	0	22.87	24.13
					1	5	0	23.03	24.29
					3	0	0	22.59	23.85
					3	2	0	22.66	23.92
					3	3	0	22.91	24.17
					6	0	1	21.95	23.21
				16QAM	1	0	0	22.75	24.01
					1	2	0	22.70	23.96
					1	4	0	22.92	24.18
					3	0	0	22.50	23.76
					3	2	0	22.33	23.59
					3	3	0	22.33	23.59
		18900	1880.0	QPSK	5	0	1	22.16	23.42
					1	0	0	23.32	24.32
					1	2	0	23.28	24.28
					1	5	0	22.72	23.72
					3	0	0	23.00	24.00
					3	2	0	22.84	23.84
					3	3	0	22.60	23.60
					6	0	1	22.41	23.41
				16QAM	1	0	0	23.07	24.07
					1	2	0	22.92	23.92
					1	4	0	22.47	23.47
					3	0	0	23.13	24.13
					3	2	0	22.99	23.99
					3	3	0	22.33	23.33
		19150	1905.0	QPSK	5	0	1	22.38	23.38
					1	0	0	22.84	23.13
					1	2	0	22.86	23.15
					1	5	0	22.97	23.26
					3	0	0	22.50	22.79
					3	2	0	22.20	22.49
					3	3	0	22.20	22.49
					6	0	1	22.06	22.35
				16QAM	1	0	0	22.50	22.79
					1	2	0	22.39	22.68
					1	4	0	22.47	22.76
					3	0	0	22.51	22.80
					3	2	0	22.45	22.74
					3	3	0	22.22	22.51
					5	0	1	21.95	22.24

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power (dBm)	E.I.R.P. Power (dBm)
Band 2	15M	18675	1857.5	QPSK	1	0	0	23.02	24.28
					1	2	0	22.79	24.05
					1	5	0	22.93	24.19
					3	0	0	22.52	23.78
					3	2	0	22.76	24.02
					3	3	0	22.82	24.08
					6	0	0	22.94	24.20
				16QAM	1	0	0	22.78	24.04
					1	2	0	22.81	24.07
					1	4	0	22.84	24.10
					3	0	0	22.45	23.71
					3	2	0	22.37	23.63
					3	3	0	22.62	23.88
					5	0	0	22.61	23.87
		18900	1880.0	QPSK	1	0	0	23.29	24.29
					1	2	0	23.27	24.27
					1	5	0	22.70	23.70
					3	0	0	23.17	24.17
					3	2	0	22.90	23.90
					3	3	0	22.40	23.40
					6	0	0	23.16	24.16
				16QAM	1	0	0	22.91	23.91
					1	2	0	22.83	23.83
					1	4	0	22.51	23.51
					3	0	0	23.13	24.13
					3	2	0	22.91	23.91
					3	3	0	22.63	23.63
					5	0	0	22.37	23.37
		19125	1902.5	QPSK	1	0	0	22.89	23.18
					1	2	0	22.92	23.21
					1	5	0	22.95	23.24
					3	0	0	22.50	22.79
					3	2	0	22.24	22.53
					3	3	0	22.41	22.70
					6	0	0	22.45	22.74
				16QAM	1	0	0	22.70	22.99
					1	2	0	22.40	22.69
					1	4	0	22.21	22.50
					3	0	0	22.51	22.80
					3	2	0	22.27	22.56
					3	3	0	22.37	22.66
					5	0	0	22.27	22.56

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Average power (dBm)	E.I.R.P. Power (dBm)
Band 2	20M	18700	1860.0	QPSK	1	0	0	23.15	24.41
					1	2	0	22.92	24.18
					1	5	0	23.10	24.36
					3	0	0	22.75	24.01
					3	2	0	22.81	24.07
					3	3	0	22.76	24.02
					6	0	0	22.91	24.17
				16QAM	1	0	0	22.84	24.10
					1	2	0	22.81	24.07
					1	4	0	22.95	24.21
					3	0	0	22.43	23.69
					3	2	0	22.33	23.59
					3	3	0	22.59	23.85
					5	0	0	22.37	23.63
		18900	1880.0	QPSK	1	0	0	23.37	24.37
					1	2	0	23.13	24.13
					1	5	0	22.89	23.89
					3	0	0	23.12	24.12
					3	2	0	23.04	24.04
					3	3	0	22.48	23.48
					6	0	0	23.27	24.27
				16QAM	1	0	0	22.95	23.95
					1	2	0	22.95	23.95
					1	4	0	22.57	23.57
					3	0	0	23.06	24.06
					3	2	0	22.85	23.85
					3	3	0	22.54	23.54
		19100	1900.0	QPSK	5	0	0	22.65	23.65
					1	0	0	23.08	23.37
					1	2	0	22.96	23.25
					1	5	0	22.90	23.19
					3	0	0	22.60	22.89
					3	2	0	22.34	22.63
					3	3	0	22.55	22.84
					6	0	0	22.58	22.87
				16QAM	1	0	0	22.79	23.08
					1	2	0	22.55	22.84
					1	4	0	22.34	22.63
					3	0	0	22.70	22.99
					3	2	0	22.31	22.60
					3	3	0	22.39	22.68
					5	0	0	22.43	22.72

8.2 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT

LIMIT

According to FCC §2.1055, FCC §24.235.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure

Use Anritsu 8821 with frequency Error measurement capability.

Temp = -20°C to +50°C

Voltage= 85% to 115% of the nominal value for AC powered equipment.

NOTE: The frequency error was recorded frequency error from the communication simulator.

TEST RESULTS

No non-compliance noted.

TEST RESULTS

Temperature: 22.3°C

Humidity: 57% RH

Tested by: Dally Hong

Test Date: January 28, 2021

FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT:

Band2_10M_QPSK_Full RB																									
Channel	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	
Freq. (MHz)	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	
Test Time	0 Minutes			2 Minutes			5 Minutes			10 Minutes			0 Minutes			2 Minutes			5 Minutes			10 Minutes			
Temp.	Deviation																								Limit
(°C)	(Hz)												(ppm)												
-20	-5.8	7.6	-6.2	-7.9	8.2	-4.3	-5.3	8.5	-5.6	-7.5	7.8	-5.0	-0.003	0.004	-0.003	-0.004	0.004	-0.002	-0.003	0.005	-0.003	-0.004	0.004	-0.003	0.1
-10	-4.8	12.1	-6.9	-5.4	9.9	-5.3	-8.1	10.9	-6.2	-6.3	10.1	-7.2	-0.003	0.006	-0.004	-0.003	0.005	-0.003	-0.004	0.006	-0.003	-0.003	0.005	-0.004	0.1
0	-5.7	8.7	-8.2	-8.4	13.1	-5.5	-7.5	9.0	-5.5	-7.4	10.6	-5.4	-0.003	0.005	-0.004	-0.005	0.007	-0.003	-0.004	0.005	-0.003	-0.004	0.006	-0.003	0.1
10	-4.4	7.8	-5.7	-6.4	9.1	-6.4	-7.0	11.5	-8.7	-7.0	10.1	-8.2	-0.002	0.004	-0.003	-0.003	0.005	-0.003	-0.004	0.006	-0.005	-0.004	0.005	-0.004	0.1
20	-5.2	6.0	-6.7	-7.7	7.6	-5.2	-7.4	6.0	2.9	-6.8	5.7	-3.0	-0.003	0.003	-0.003	-0.004	0.004	-0.003	-0.004	0.003	0.002	-0.004	0.003	-0.002	0.1
30	-6.1	2.9	4.3	-9.8	3.7	-3.7	-6.6	7.8	-4.5	-8.0	8.2	-4.1	-0.003	0.002	0.002	-0.005	0.002	-0.002	-0.004	0.004	-0.002	-0.004	0.004	-0.002	0.1
40	-6.7	3.6	-5.6	-9.4	6.4	3.1	-4.8	4.6	3.5	-6.7	6.6	4.1	-0.004	0.002	-0.003	-0.005	0.003	0.002	-0.003	0.002	0.002	-0.004	0.003	0.002	0.1
50	-10.2	5.4	5.1	-6.9	7.1	4.2	-10.1	4.8	4.3	-9.2	4.9	3.6	-0.006	0.003	0.003	-0.004	0.004	0.002	-0.005	0.003	0.002	-0.005	0.003	0.002	0.1

FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT:

Band2_10M_QPSK_Full RB																									
Channel	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	18650	18900	19150	
Freq. (MHz)	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	1855	1880	1905	
Test Time	0 Minutes			2 Minutes			5 Minutes			10 Minutes			0 Minutes			2 Minutes			5 Minutes			10 Minutes			
Voltage	Deviation																								Limit
[V]	(Hz)												(ppm)												
Low	-6.0	3.0	4.3	-9.6	3.7	-3.6	-6.3	8.0	-4.5	-8.0	8.3	-4.0	-0.003	0.002	0.002	-0.005	0.002	-0.002	-0.003	0.004	-0.002	-0.004	0.004	-0.002	0.1
Normal	-5.2	6.0	-6.7	-7.7	7.6	-5.2	-7.4	6.0	2.9	-6.8	5.7	-3.0	-0.003	0.003	-0.003	-0.004	0.004	-0.003	-0.004	0.003	0.002	-0.004	0.003	-0.002	0.1
High	-5.0	6.1	-6.6	-7.7	7.6	-5.0	-7.3	6.1	3.0	-6.7	5.9	-2.8	-0.003	0.003	-0.003	-0.004	0.004	-0.003	-0.004	0.003	0.002	-0.004	0.003	-0.001	0.1

8.3 OCCUPIED BANDWIDTH MEASUREMENT

Limits

For Reporting purposes only.

TEST PROCEDURES

KDB 971168 D01

1. The occupied bandwidth was measured with the spectrum analyzer at the lowest, middle and highest channels in each band and different modulation. The 99% and -26dB bandwidth was measured and recorded.
2. RBW = 1-5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max. hold


Test Result**Temperature:** 23.4°C**Humidity:** 55.2% RH**Tested by:** Dally Hong**Test Date:** January 27, 2021**Temperature:** 22.3°C**Humidity:** 57% RH**Tested by:** Dally Hong**Test Date:** January 28, 2021**LTE Band 2**

Frequency (MHz)	Channel	99%BW(MHz)		26dB BW(MHz)	
		QPSK	16QAM	QPSK	16QAM
Band 2 Channel Bandwidth 1.4MHz					
1850.7	18607	1.10	0.93	1.31	1.14
1880	18900	1.10	0.93	1.32	1.13
1909.3	19193	1.10	0.93	1.33	1.15
Band 2 Channel Bandwidth 3MHz					
1851.5	18615	1.20	1.02	1.67	1.35
1880	18900	1.20	1.02	1.66	1.35
1908.5	19185	1.17	1.03	1.43	1.46
Band 2 Channel Bandwidth 5MHz					
1852.5	18625	1.17	1.06	1.42	1.39
1880	18900	1.22	1.06	1.39	1.33
1907.5	19175	1.17	1.09	1.43	1.85
Band 2 Channel Bandwidth 10MHz					
1855	18650	1.29	1.24	2.72	2.08
1880	18900	1.29	1.24	3.01	2.00
1905	19150	1.30	1.30	2.69	2.34
Band 2 Channel Bandwidth 15MHz					
1857.5	18675	1.65	1.52	3.47	2.56
1880	18900	1.78	1.56	3.86	2.78
1902.5	19125	1.74	1.87	3.78	3.00
Band 2 Channel Bandwidth 20MHz					
1860	18700	1.85	2.72	2.37	4.63
1880	18900	1.79	2.55	2.37	4.46
1900	19100	1.85	2.60	2.43	4.46

Report No.: T201116W03-RP1


LTE Band 2 26dB / QPSK

BW: 1.4MHz
CH Low

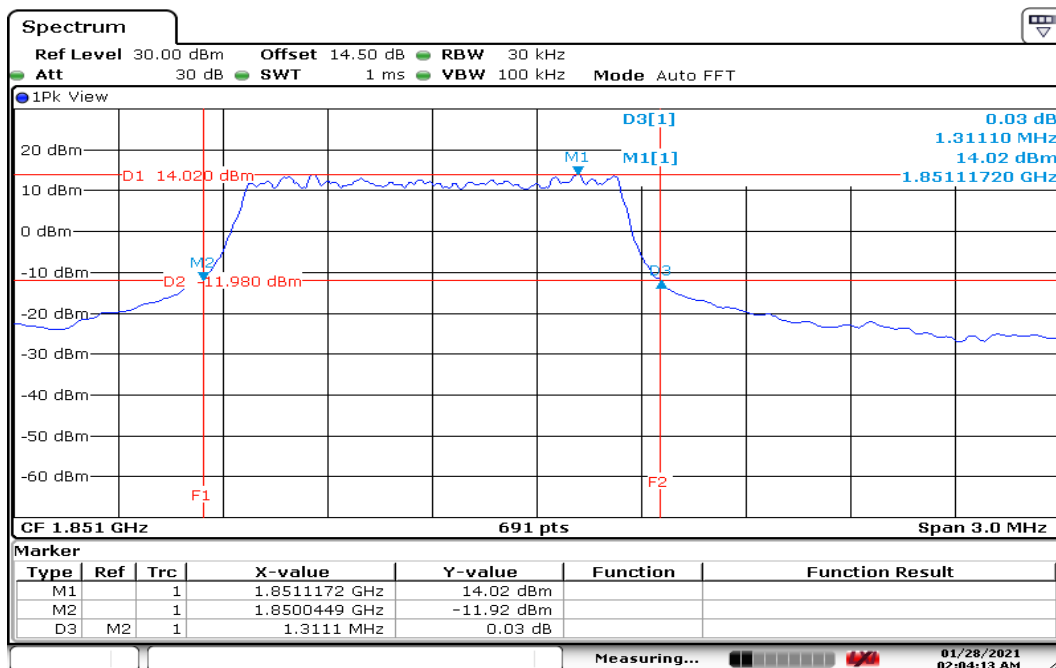

Date: 28 JAN 2021 02:04:13

CH Mid

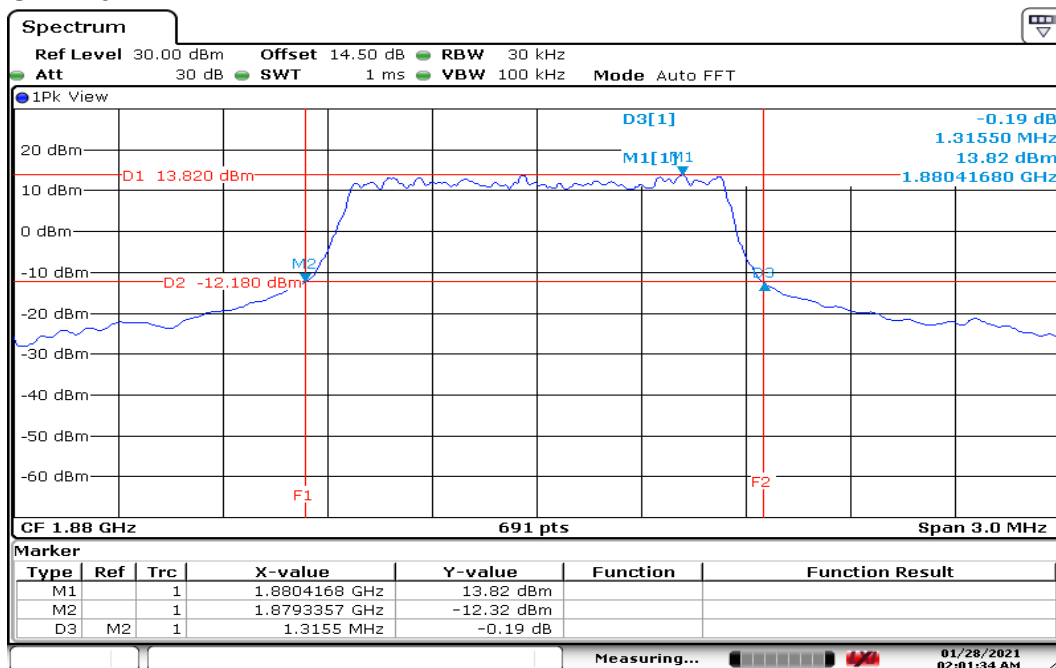


Date: 28 JAN 2021 02:01:35



Report No.: T201116W03-RP1

CH High

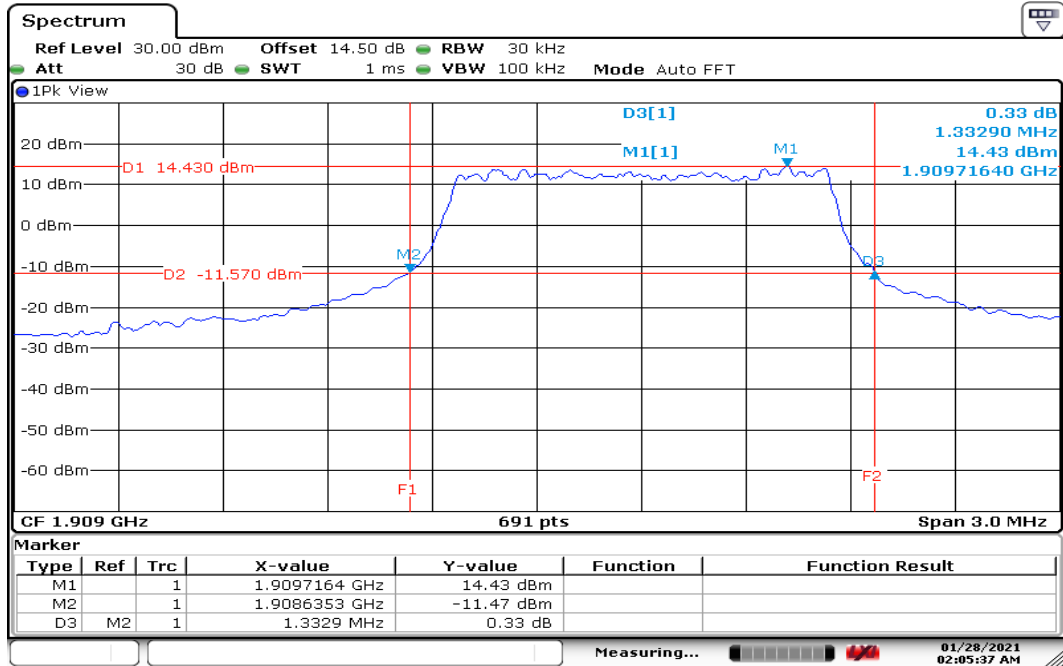


Date: 28 JAN 2021 02:05:38



Report No.: T201116W03-RP1


BW: 3MHz

CH Low

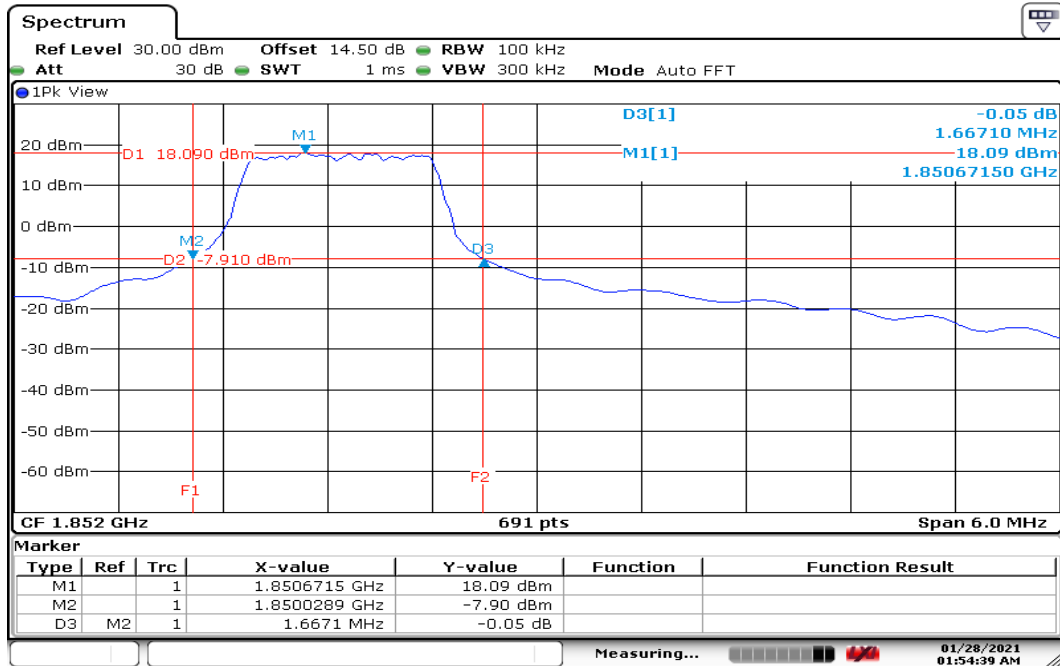


Date: 28 JAN 2021 01:54:40

CH Mid

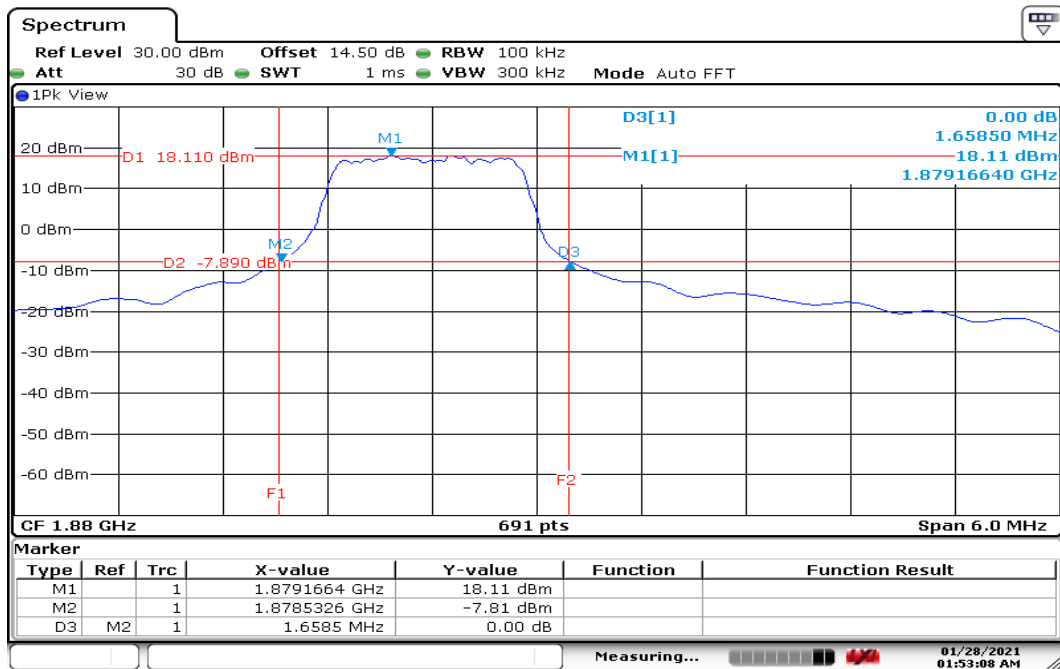

Date: 28 JAN 2021 01:53:08

CH High

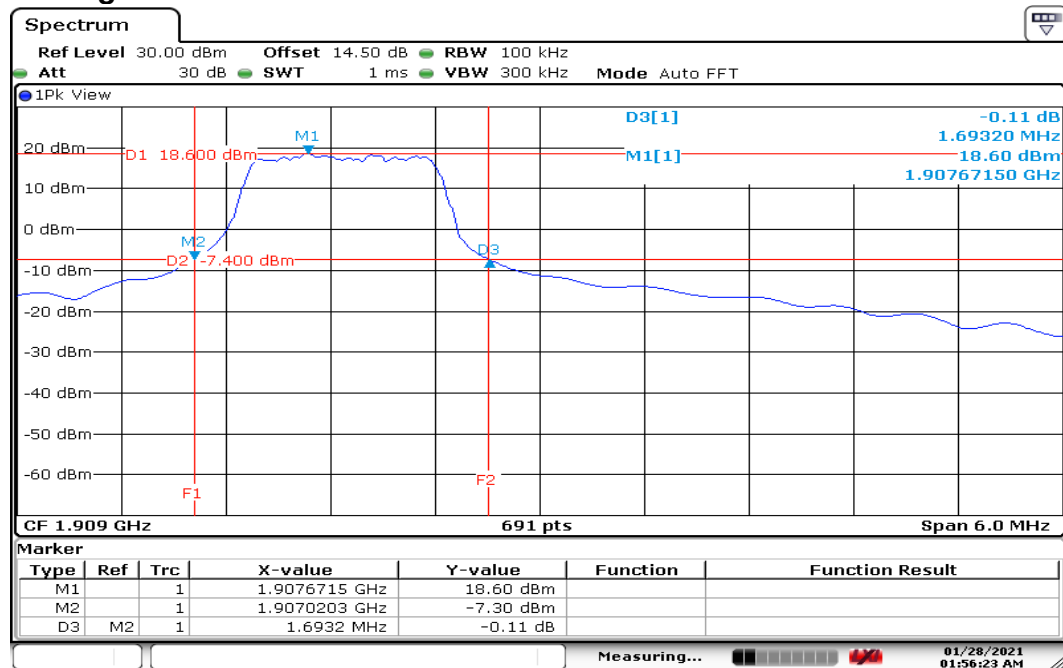


Date: 28 JAN 2021 01:56:23

Report No.: T201116W03-RP1


BW: 5MHz

CH Low

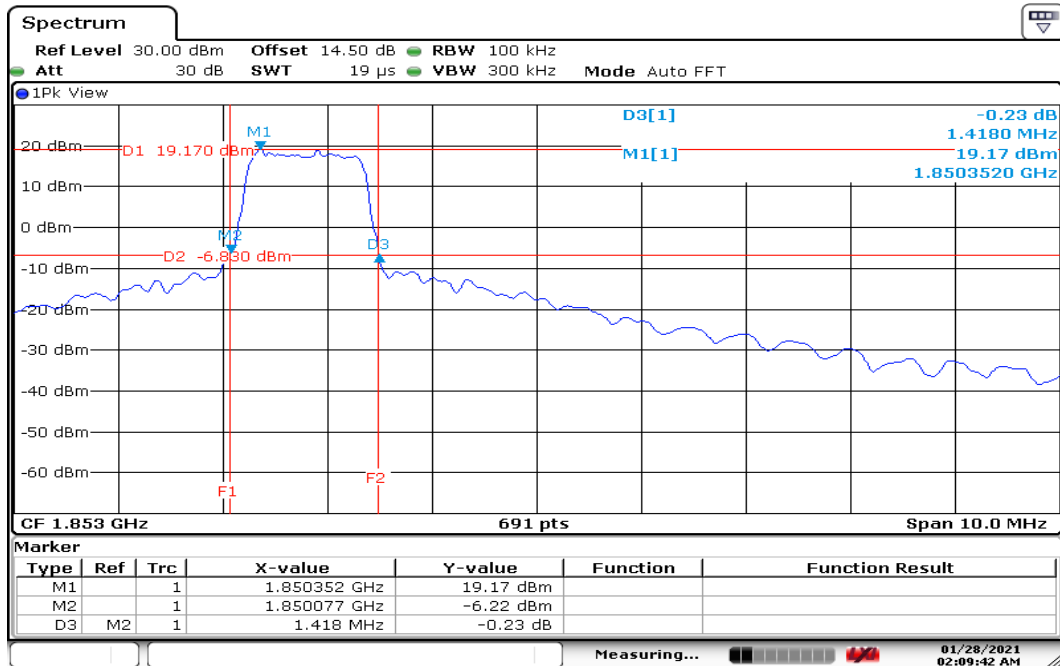

Date: 28 JAN 2021 02:09:42

CH Mid

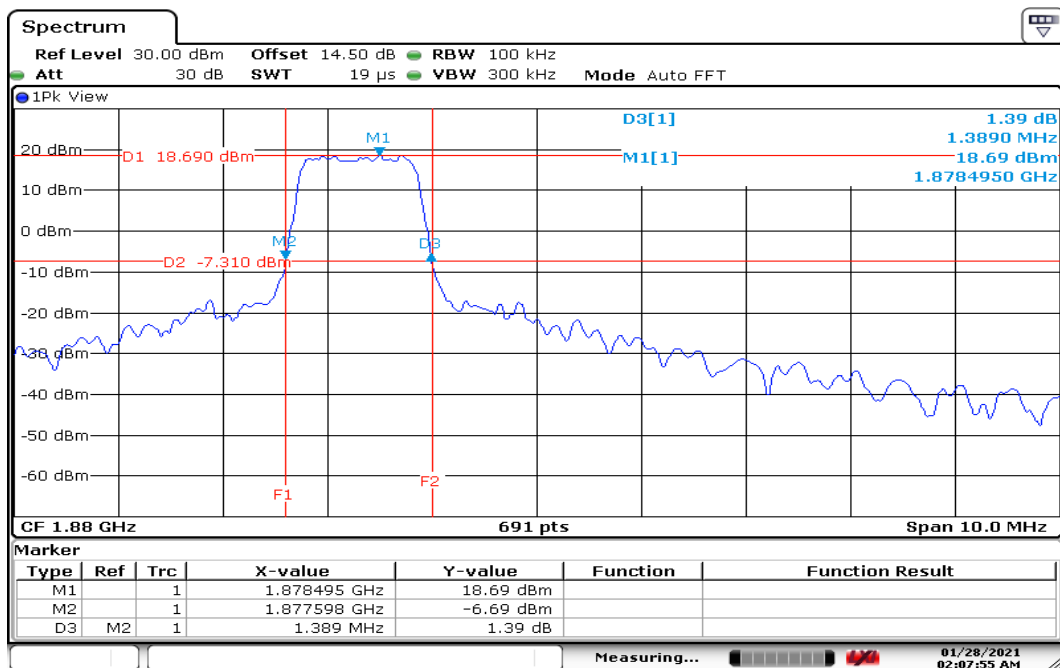

Date: 28 JAN 2021 02:07:56




Report No.: T201116W03-RP1

Page: 30 / 132


Rev.: 01

CH High

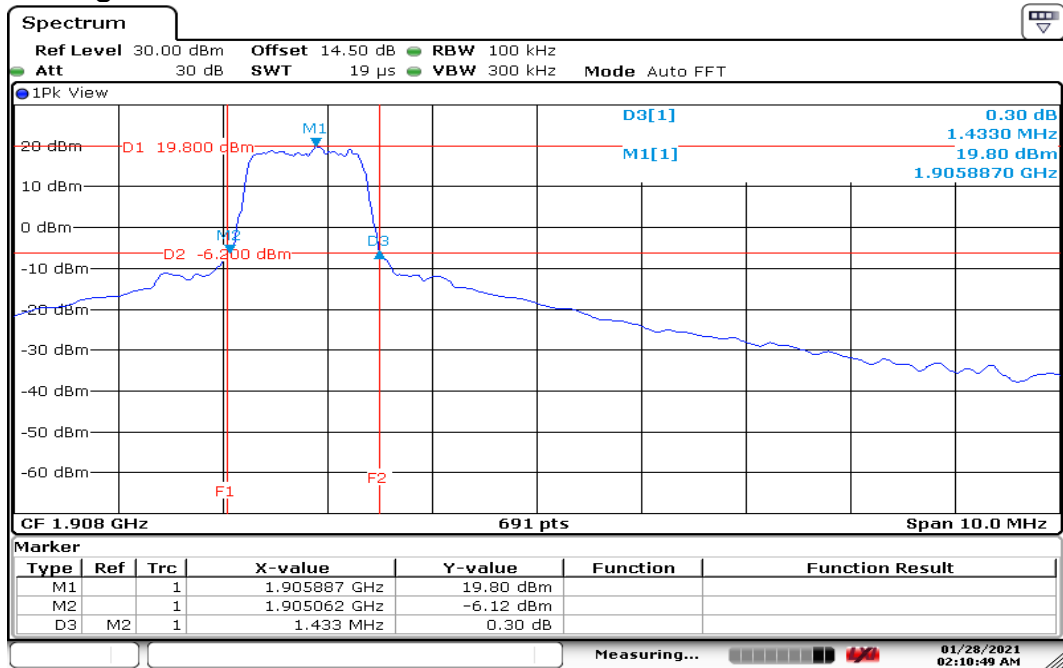


Date: 28 JAN 2021 02:10:49

Report No.: T201116W03-RP1

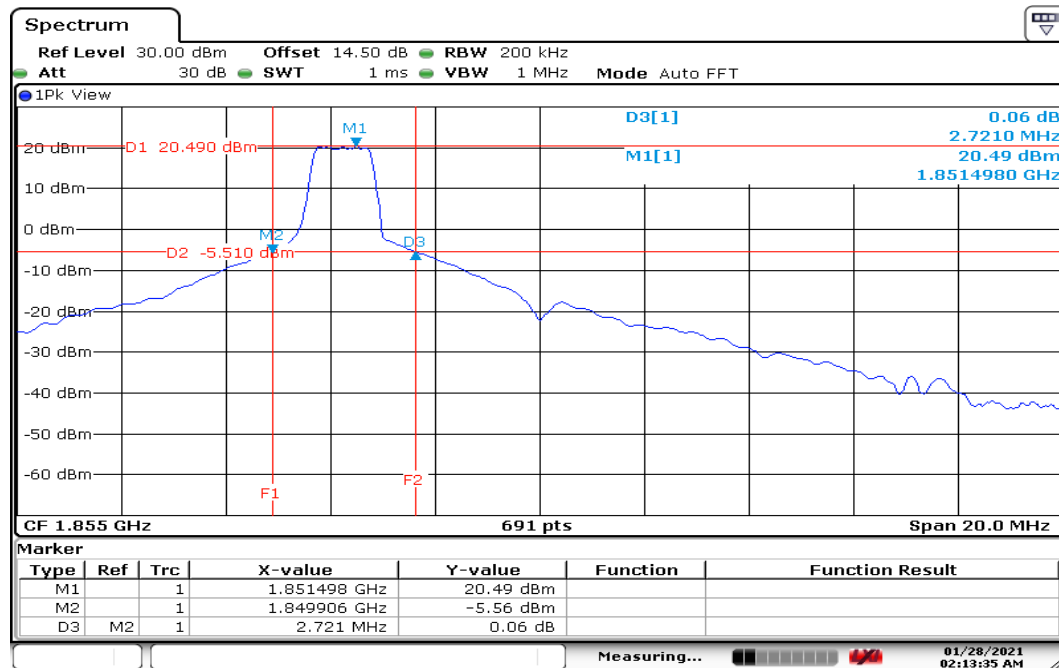BW: 10MHz
CH Low


Date: 28 JAN 2021 02:13:35

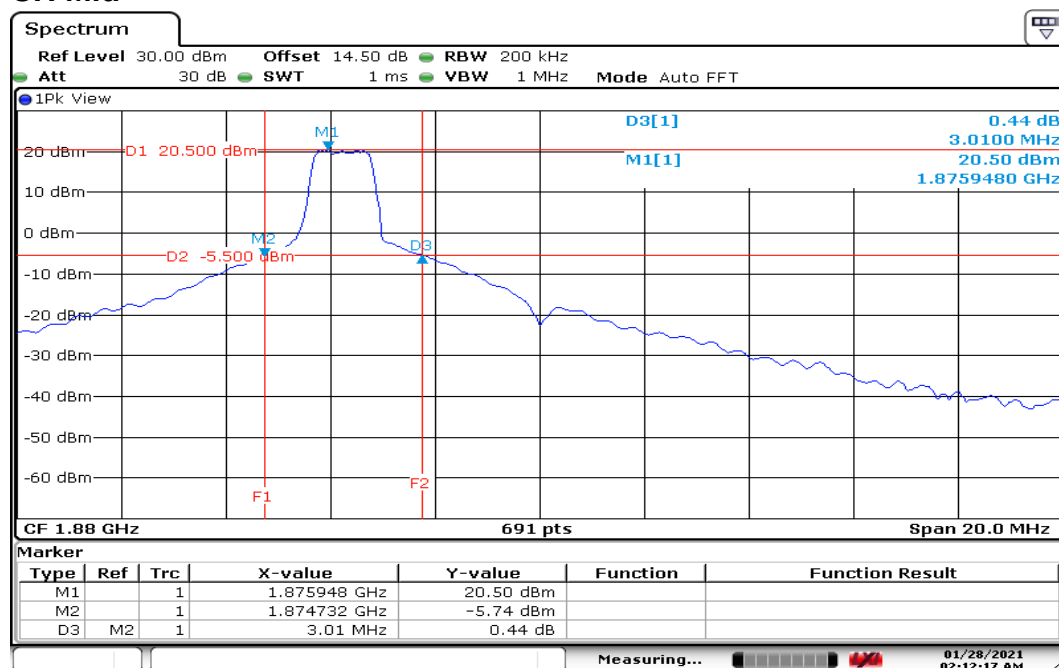
CH Mid


Date: 28 JAN 2021 02:12:17



Report No.: T201116W03-RP1


CH High

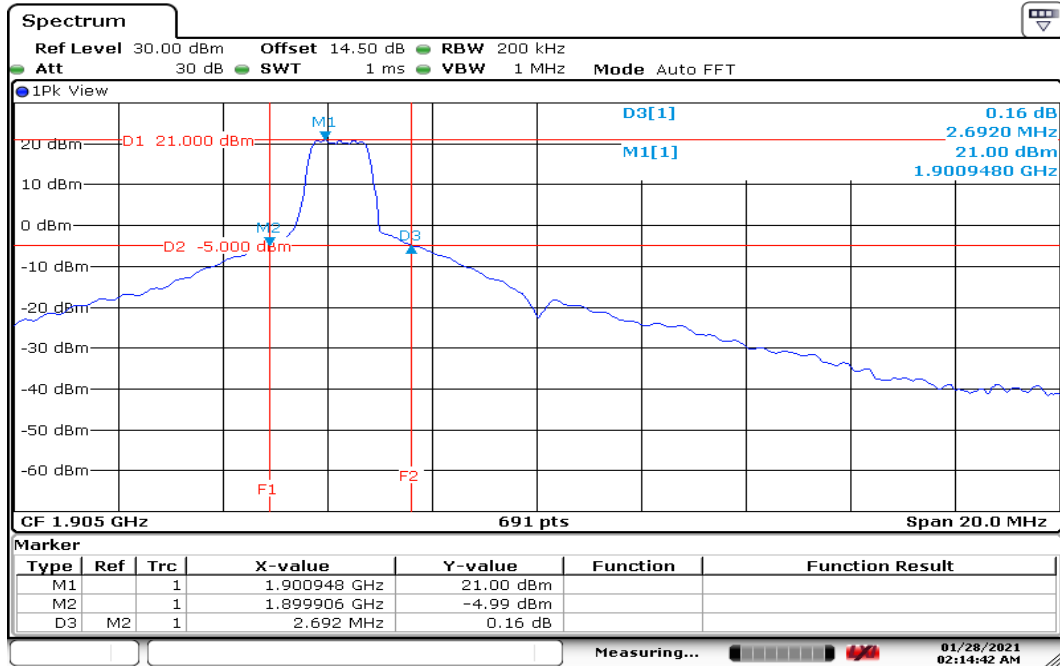

Date: 28 JAN 2021 02:14:42


BW: 15MHz

CH Low

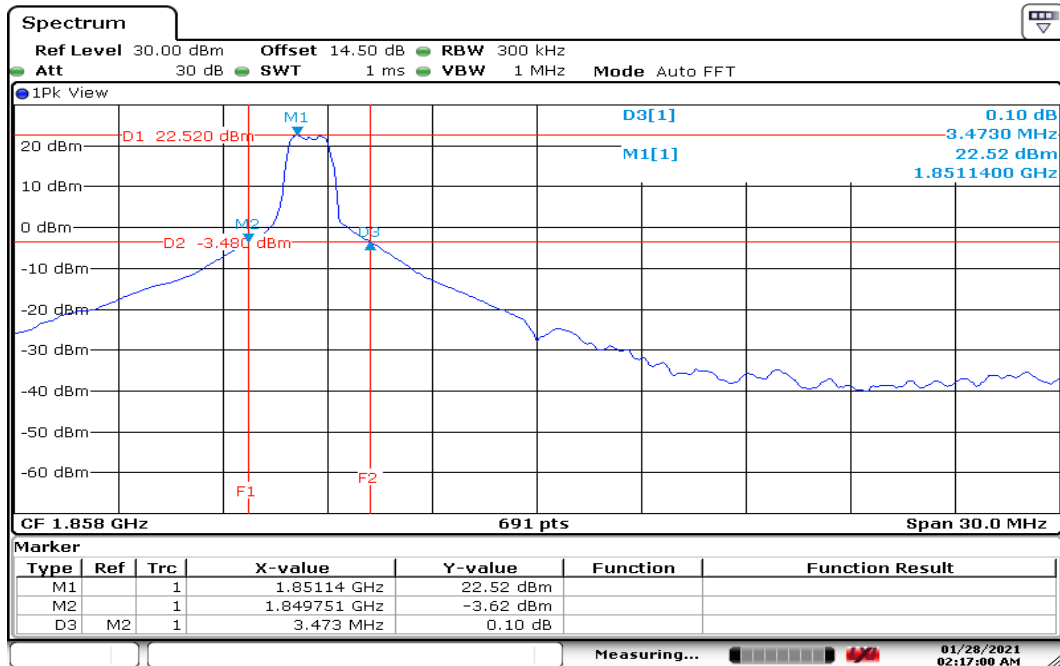

Date: 28 JAN 2021 02:17:00

CH Mid

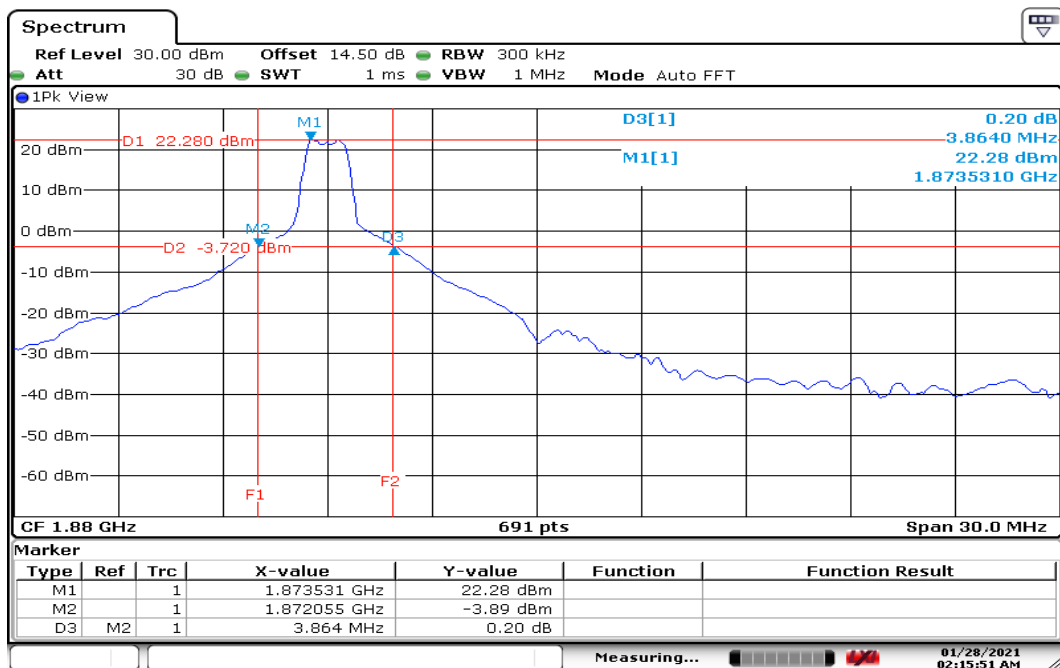


Date: 28 JAN 2021 02:15:52




Report No.: T201116W03-RP1

CH High

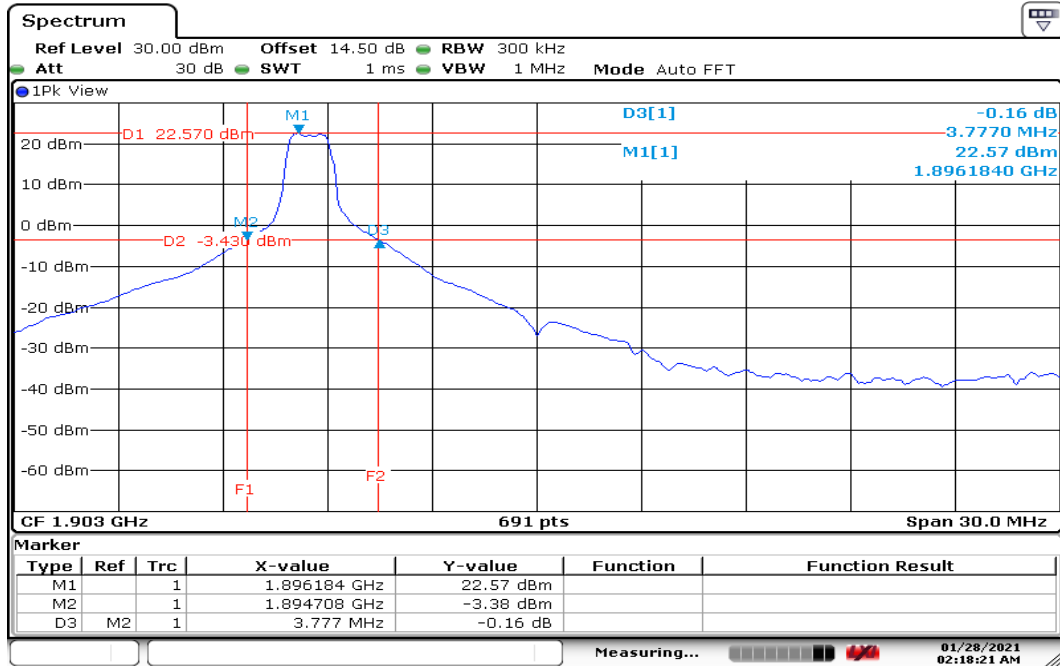


Date: 28 JAN 2021 02:18:21

Report No.: T201116W03-RP1

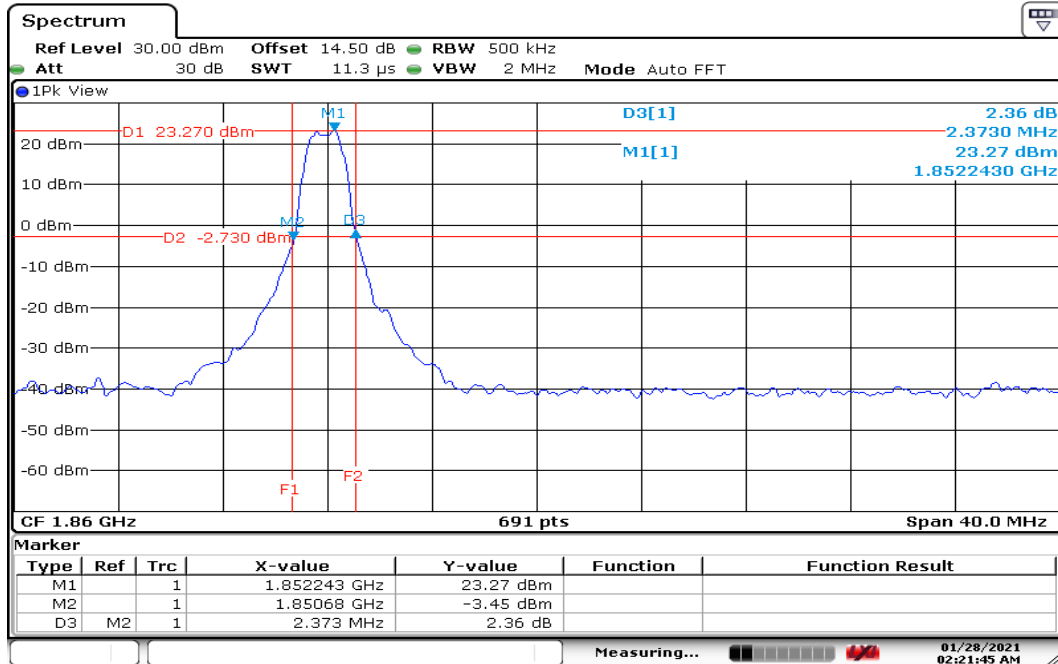BW: 20MHz
CH Low


Date: 28 JAN 2021 02:21:45

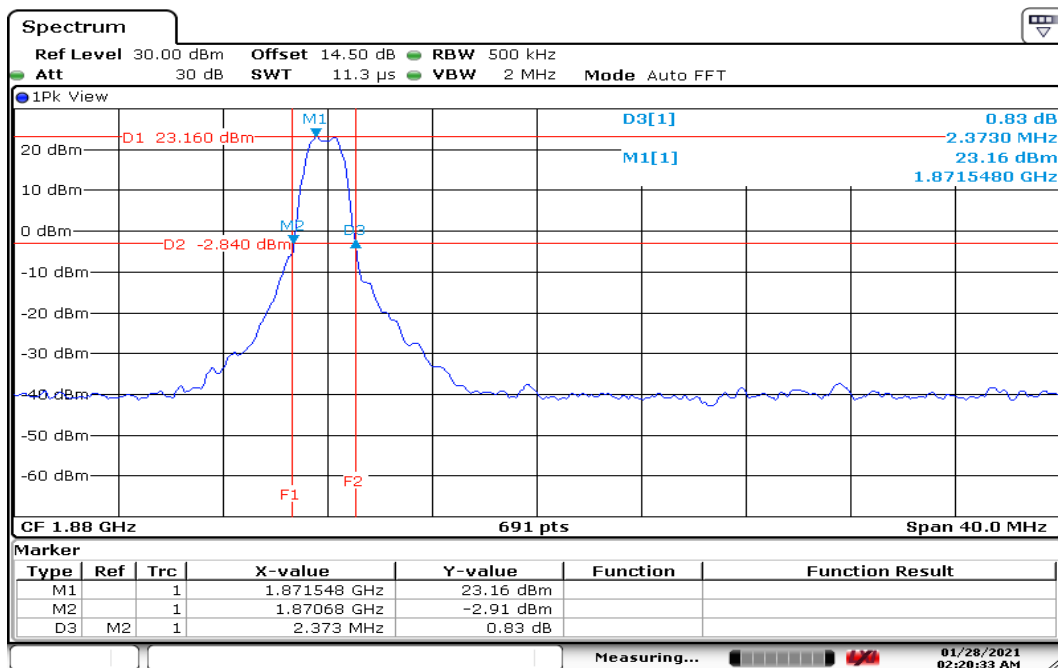CH Mid


Date: 28 JAN 2021 02:20:33




Report No.: T201116W03-RP1

Page: 36 / 132


Rev.: 01

CH High

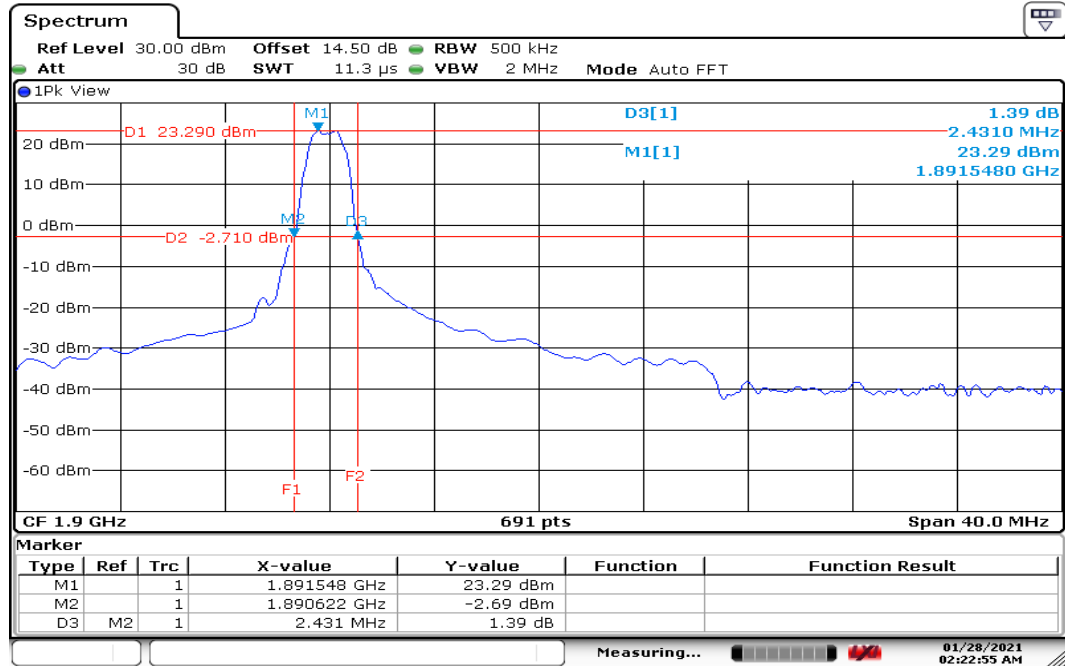


Date: 28 JAN 2021 02:22:55

Report No.: T201116W03-RP1

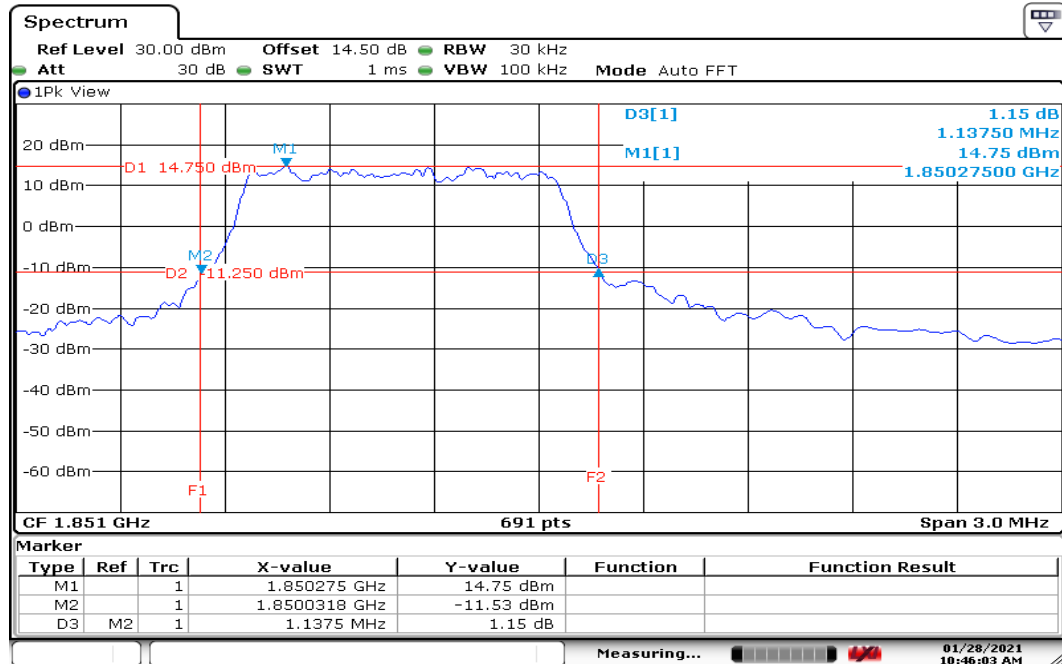
26dB / 16QAM**BW: 1.4MHz****CH Low**

Date: 28 JAN 2021 10:46:04

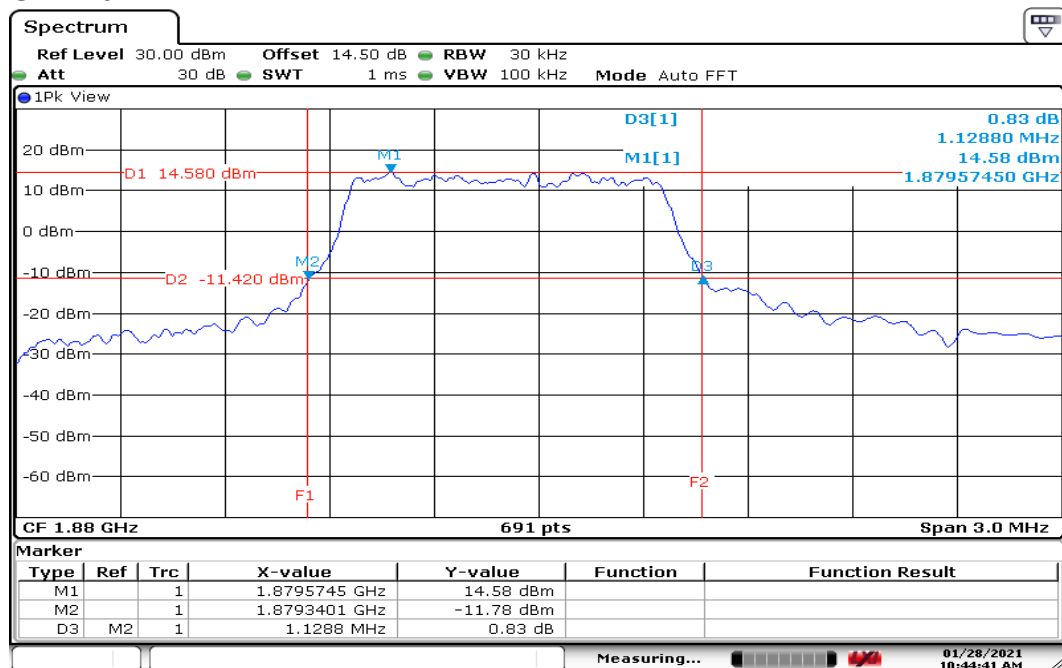CH Mid


Date: 28 JAN 2021 10:44:41

CH High

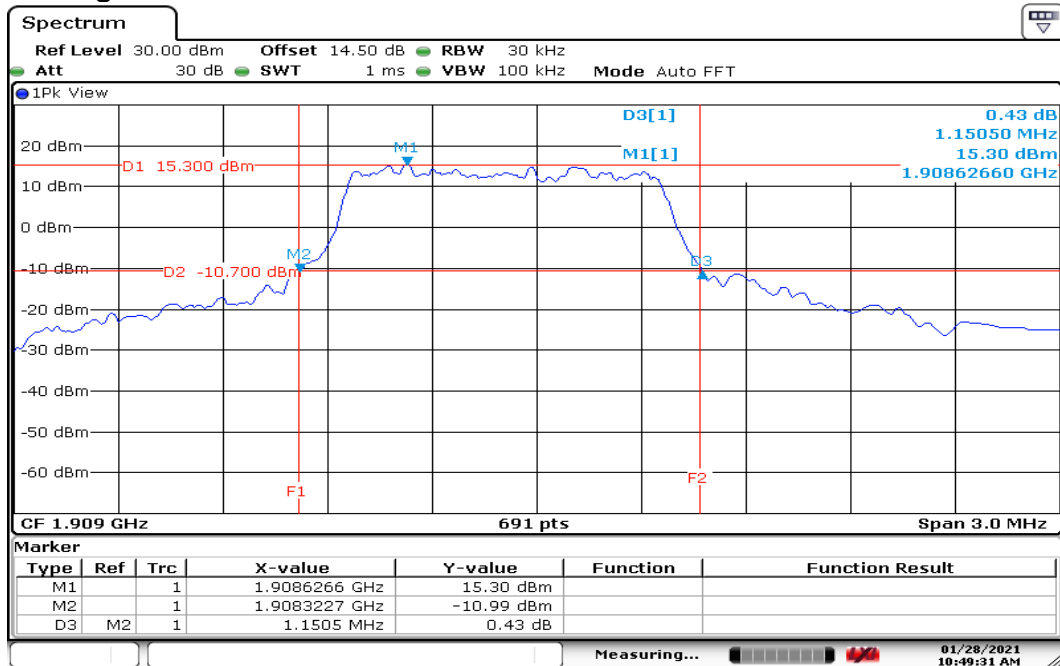


Date: 28 JAN 2021 10:49:31

Report No.: T201116W03-RP1

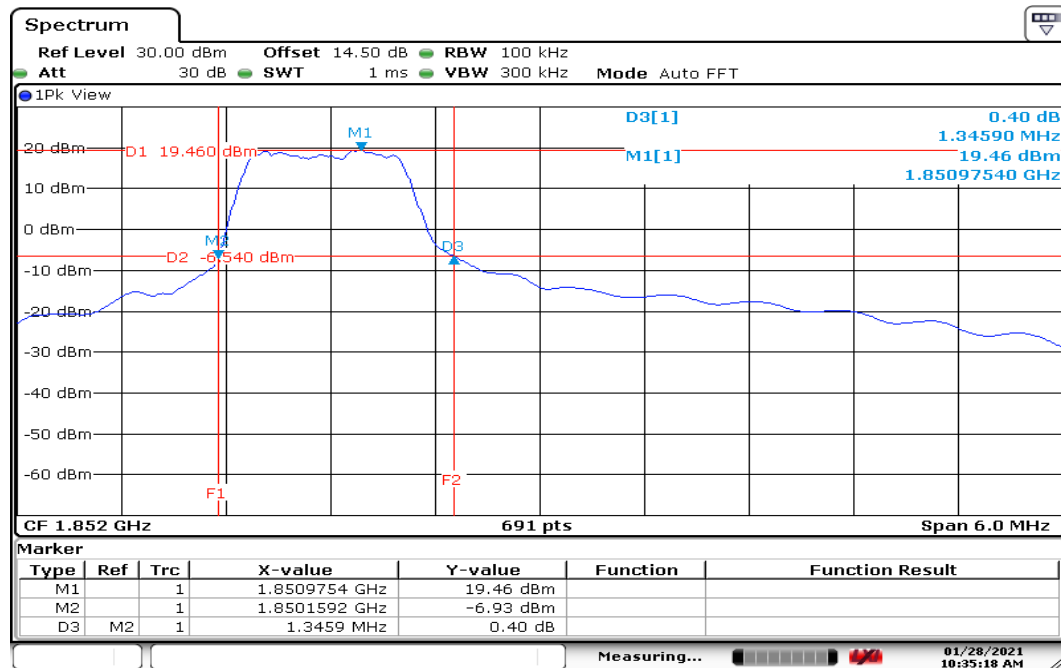
BW: 3MHz
CH Low


Date: 28 JAN 2021 10:35:18

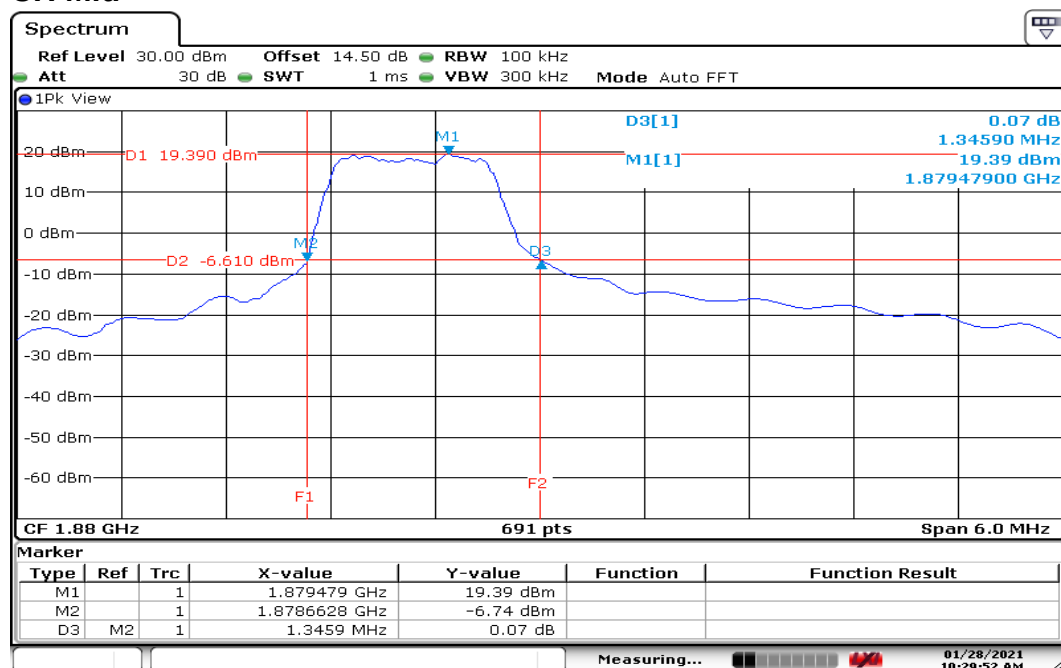CH Mid


Date: 28 JAN 2021 10:29:52

CH High

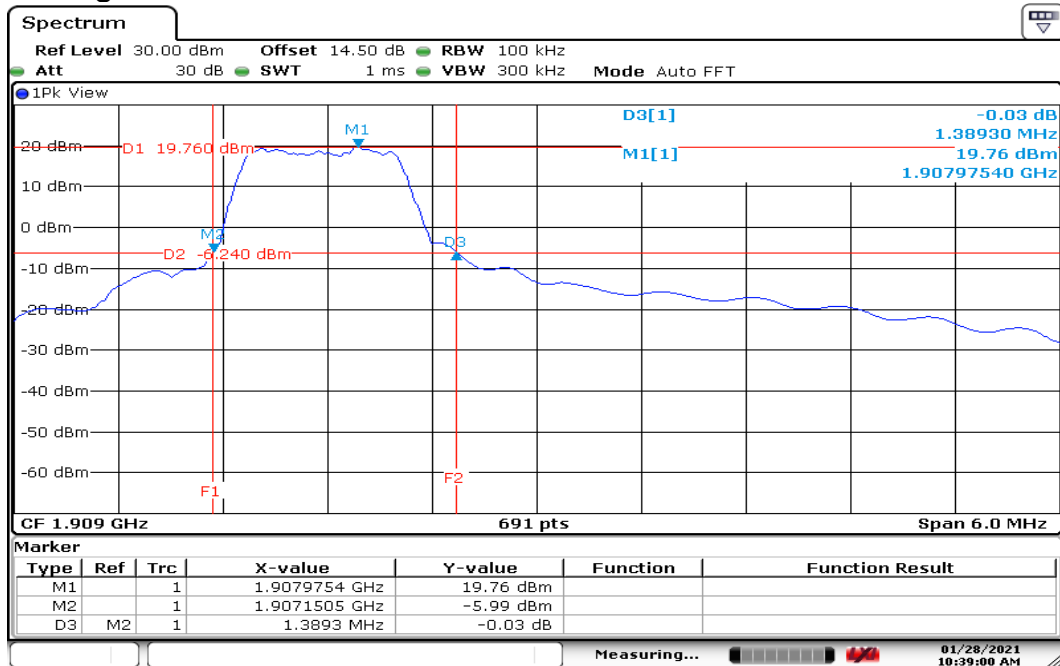


Date: 28 JAN 2021 10:39:01

Report No.: T201116W03-RP1


BW: 5MHz

CH Low

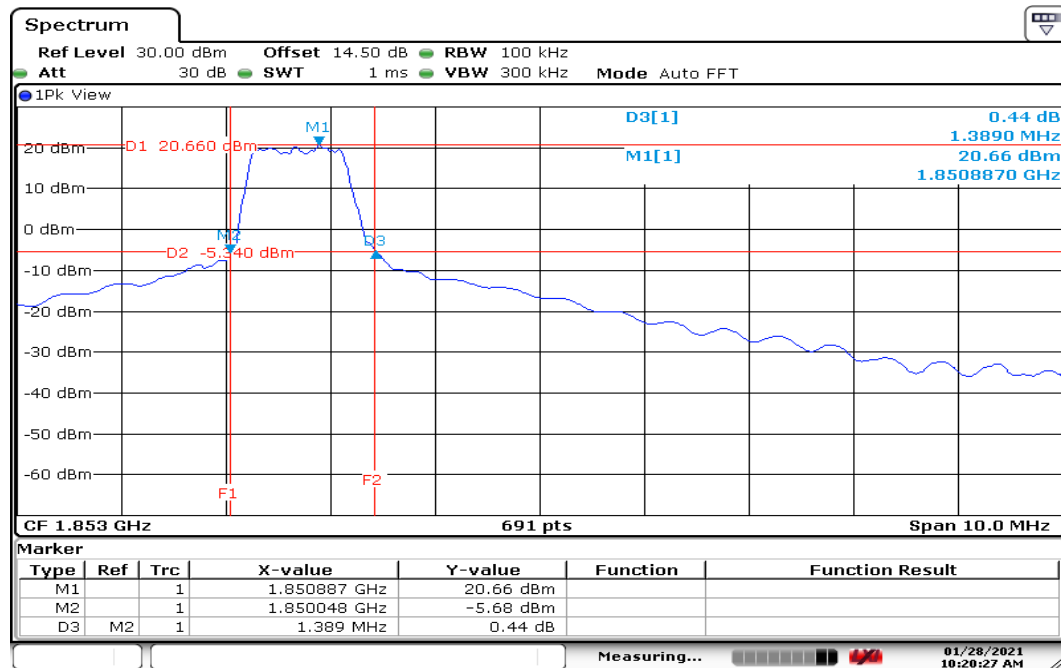

Date: 28 JAN 2021 10:20:27

CH Mid

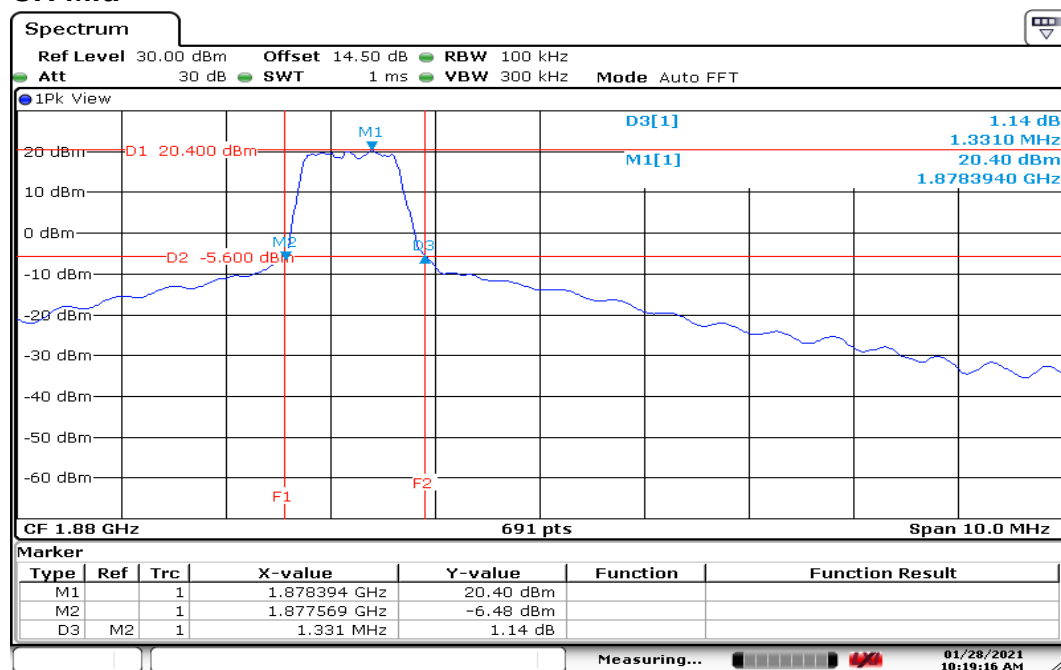

Date: 28 JAN 2021 10:19:16




Report No.: T201116W03-RP1

Page: 42 / 132


Rev.: 01

CH High

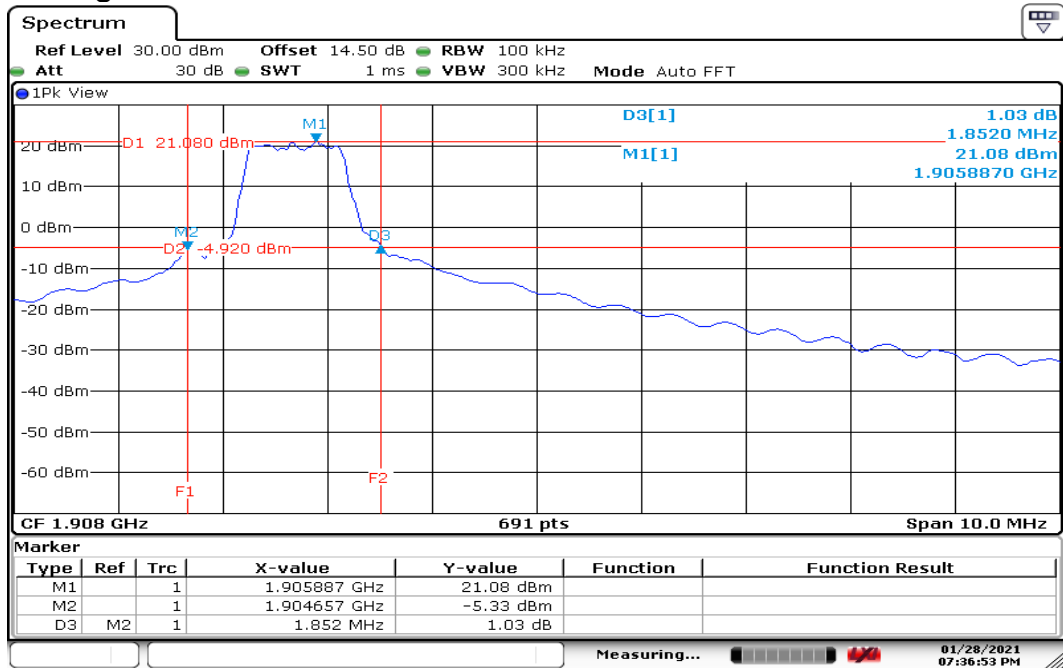


Date: 28 JAN 2021 19:36:53

Report No.: T201116W03-RP1

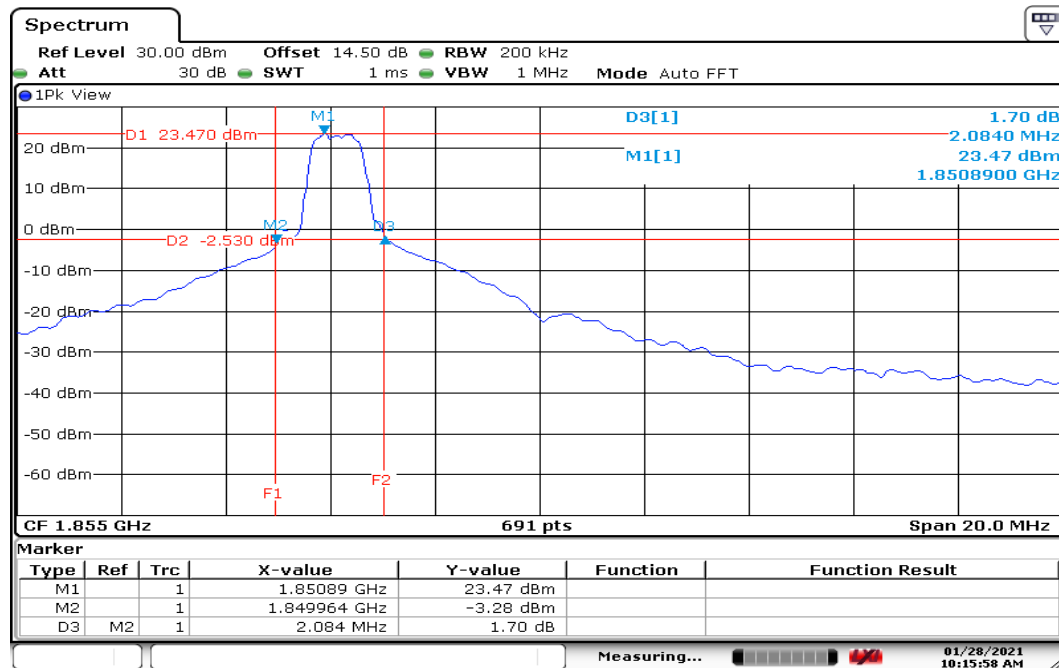
BW: 10MHz
CH Low


Date: 28 JAN 2021 10:15:58

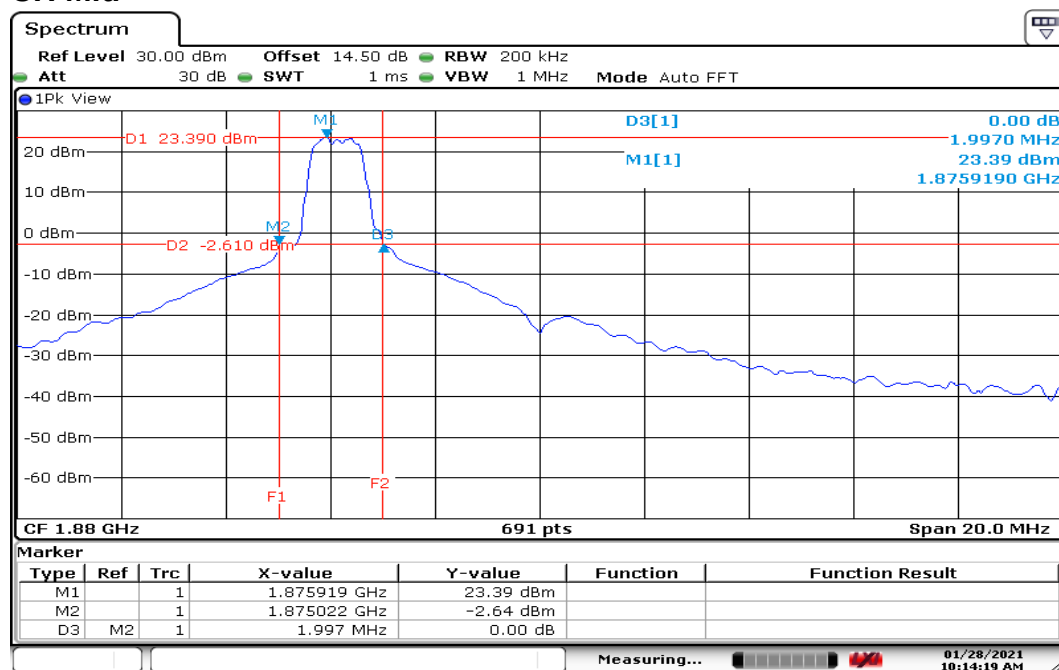CH Mid


Date: 28 JAN 2021 10:14:19


CH High

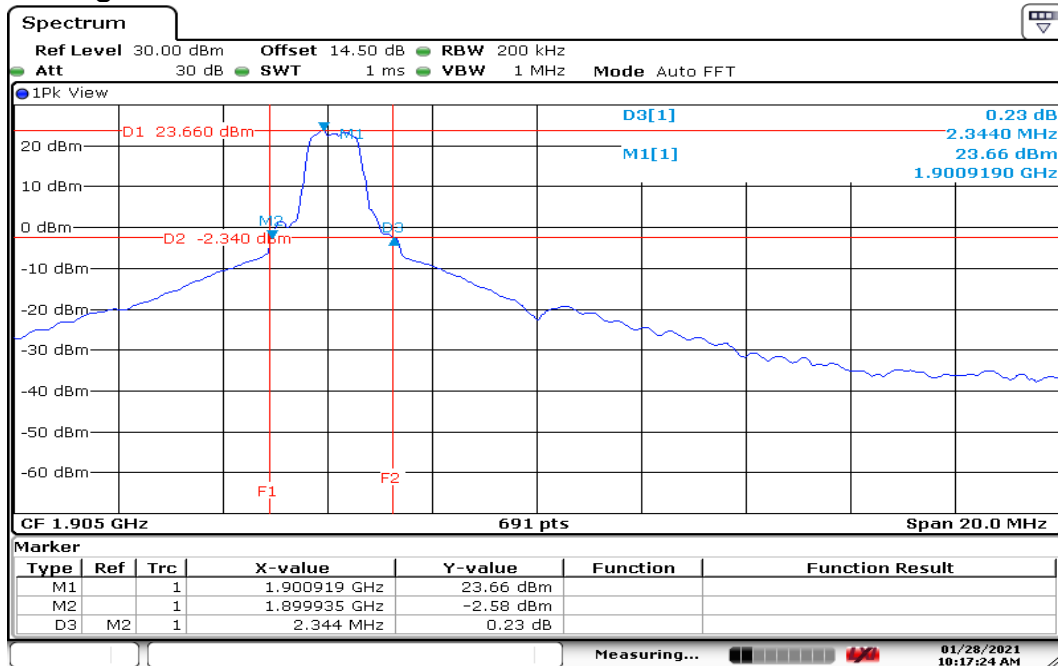

Date: 28 JAN 2021 10:17:25


BW: 15MHz

CH Low

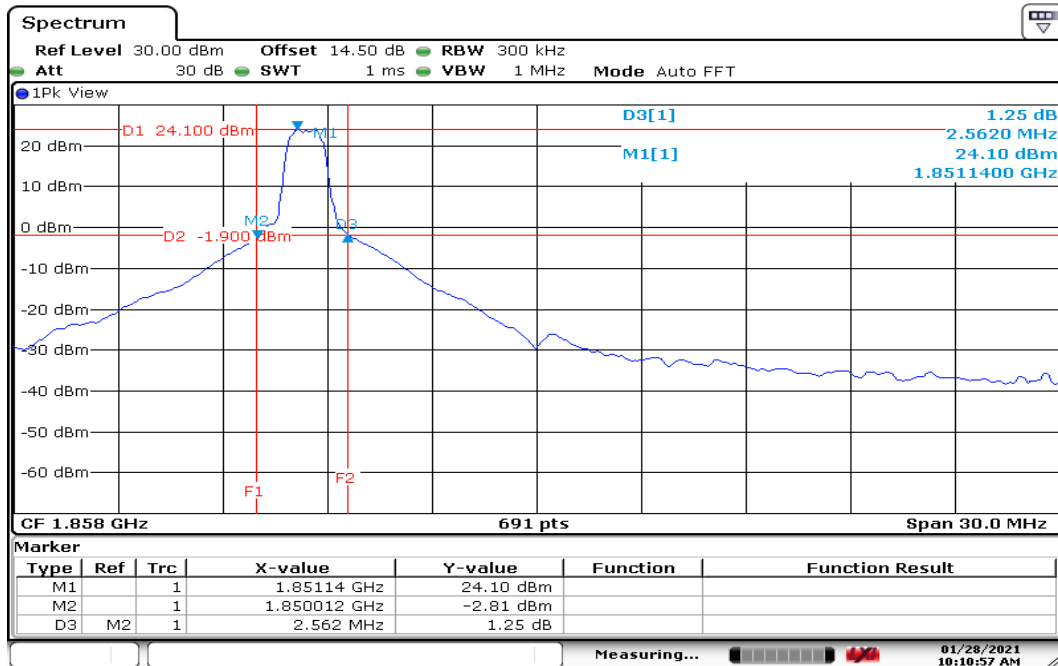


Date: 28 JAN 2021 10:10:58

CH Mid

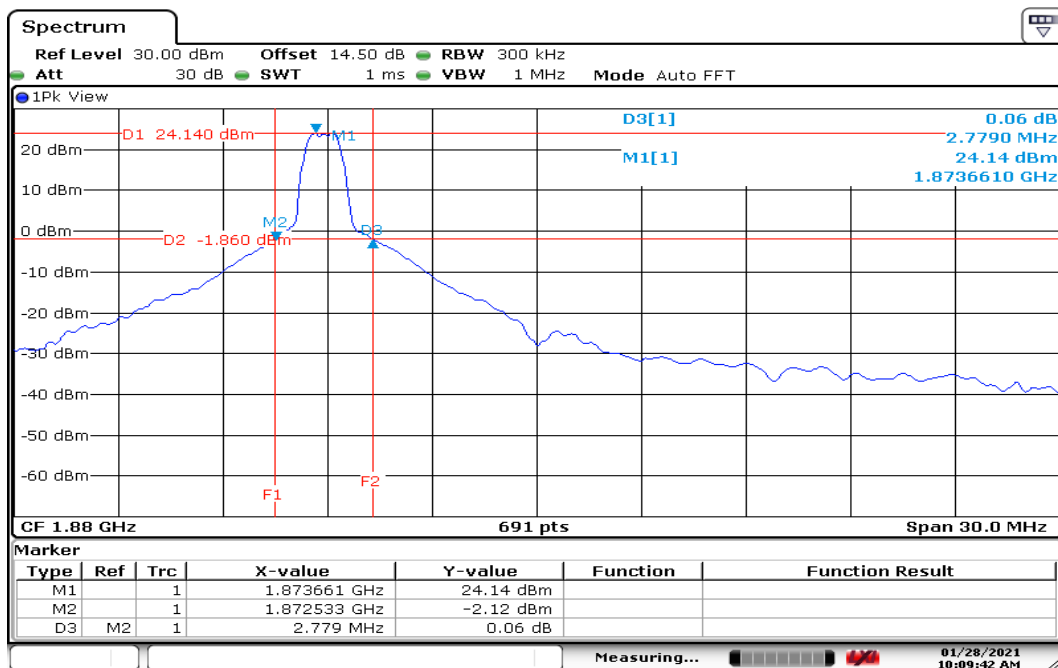


Date: 28 JAN 2021 10:09:42

CH High

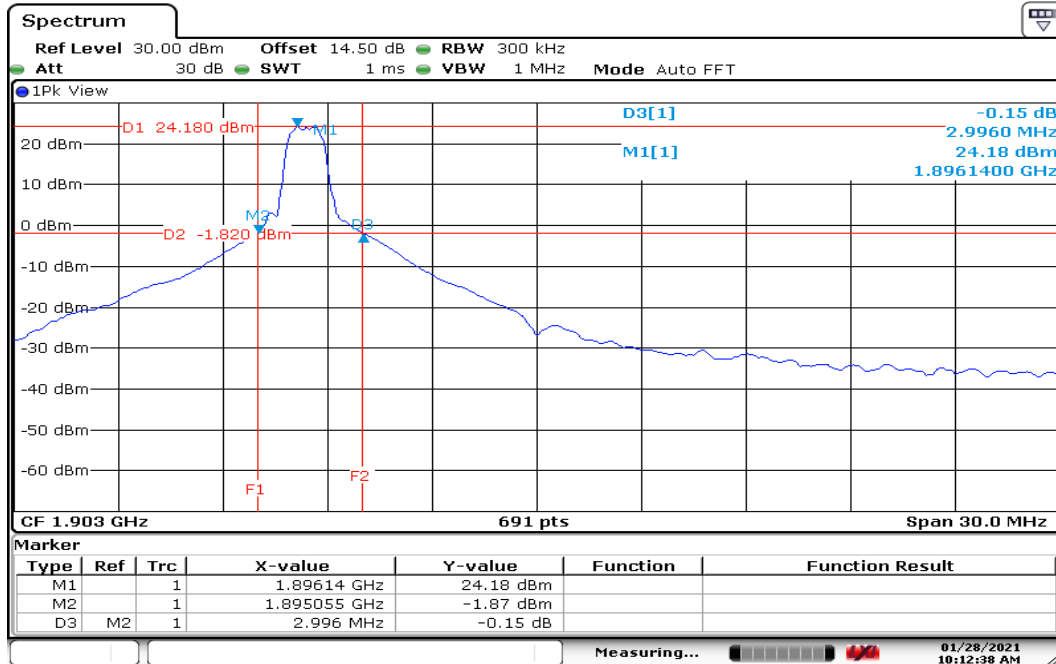


Date: 28 JAN 2021 10:12:38

Report No.: T201116W03-RP1

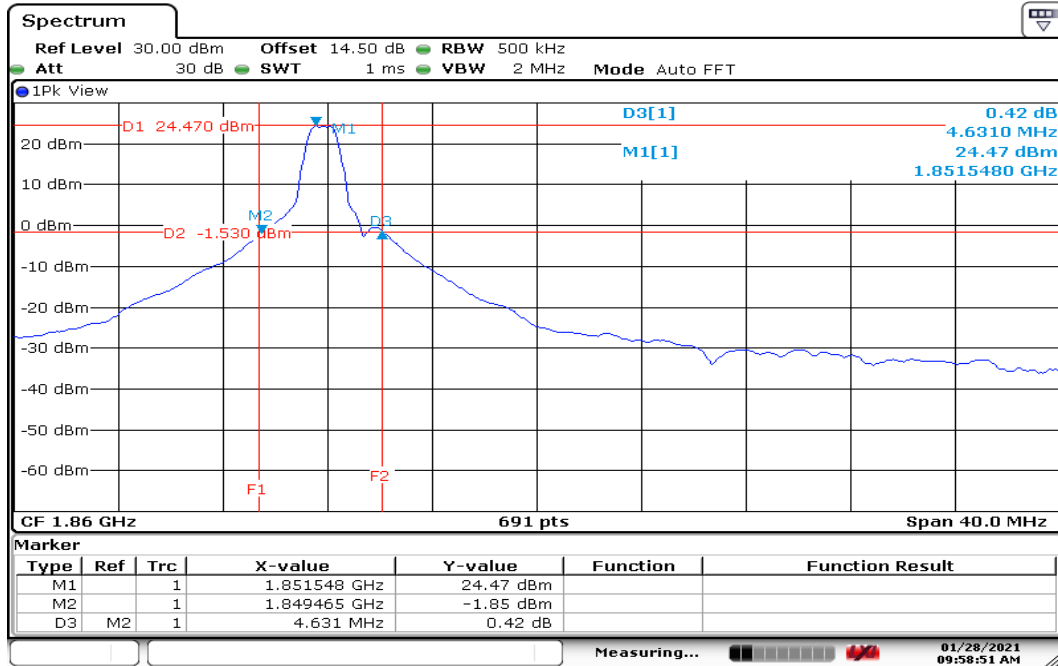
BW: 20MHz
CH Low


Date: 28 JAN 2021 09:58:51

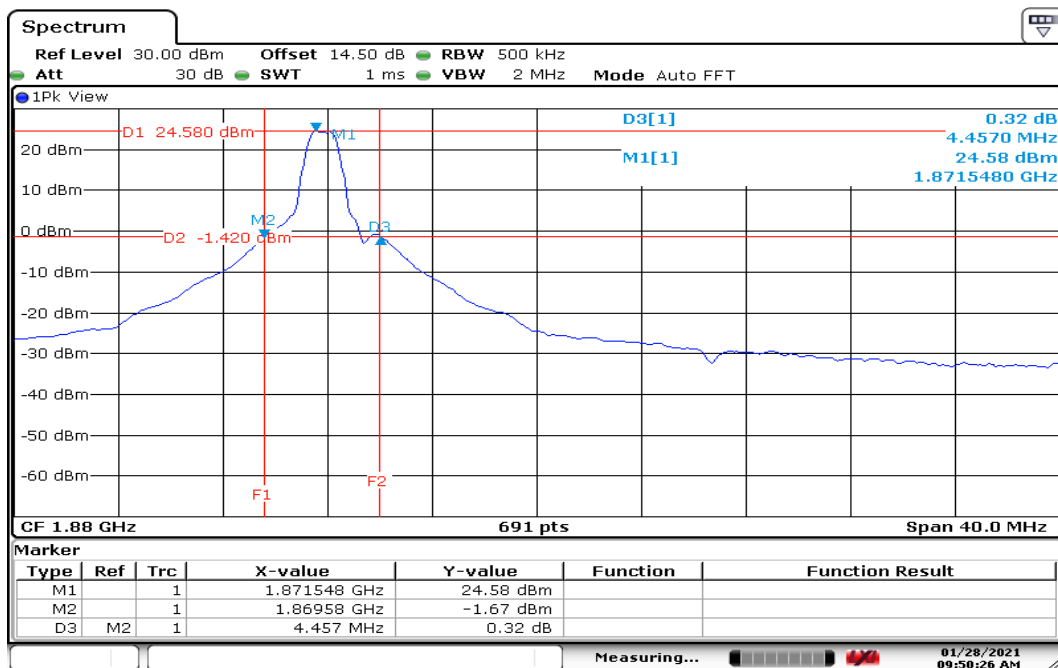CH Mid


Date: 28 JAN 2021 09:50:26

CH High

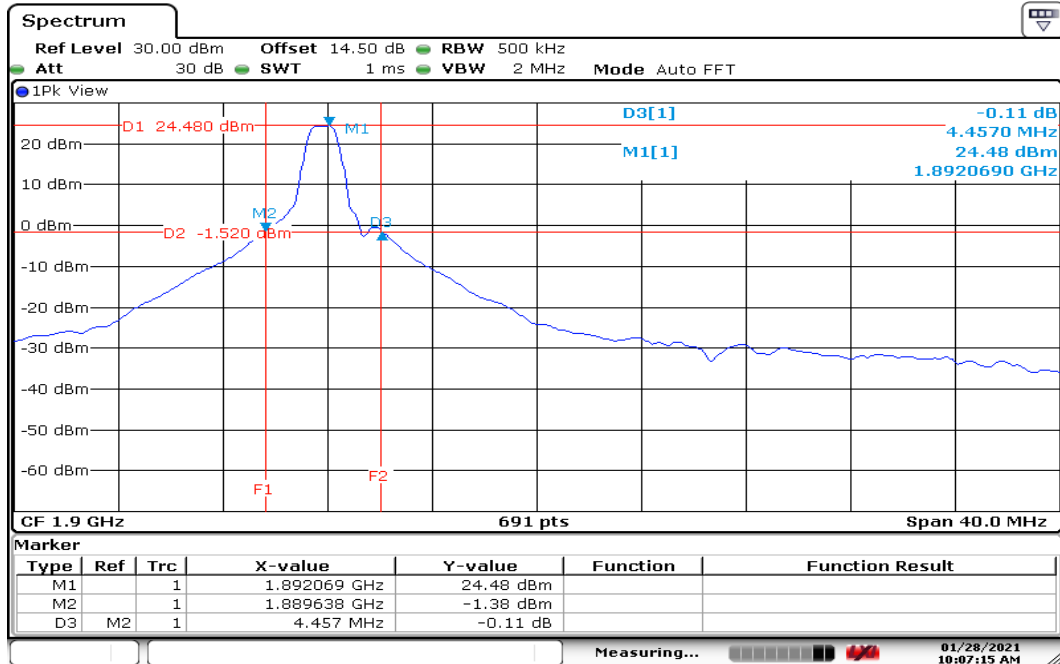


Date: 28 JAN 2021 10:07:15

Report No.: T201116W03-RP1

OBW (99%) / QPSK


BW: 1.4MHz

CH Low

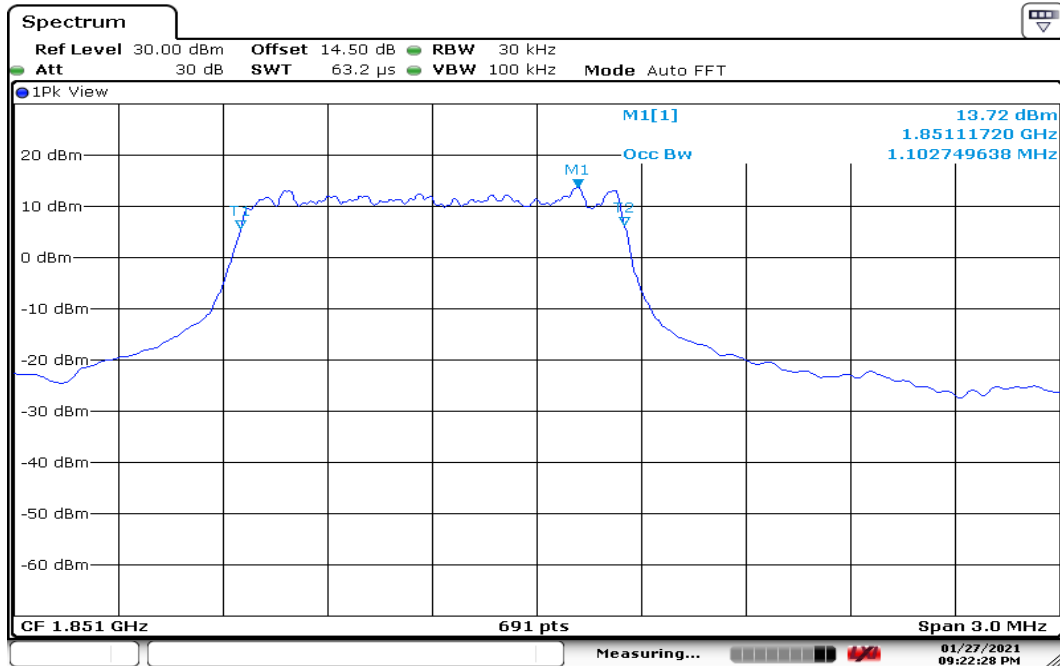

Date: 27 JAN 2021 21:22:28

CH Mid

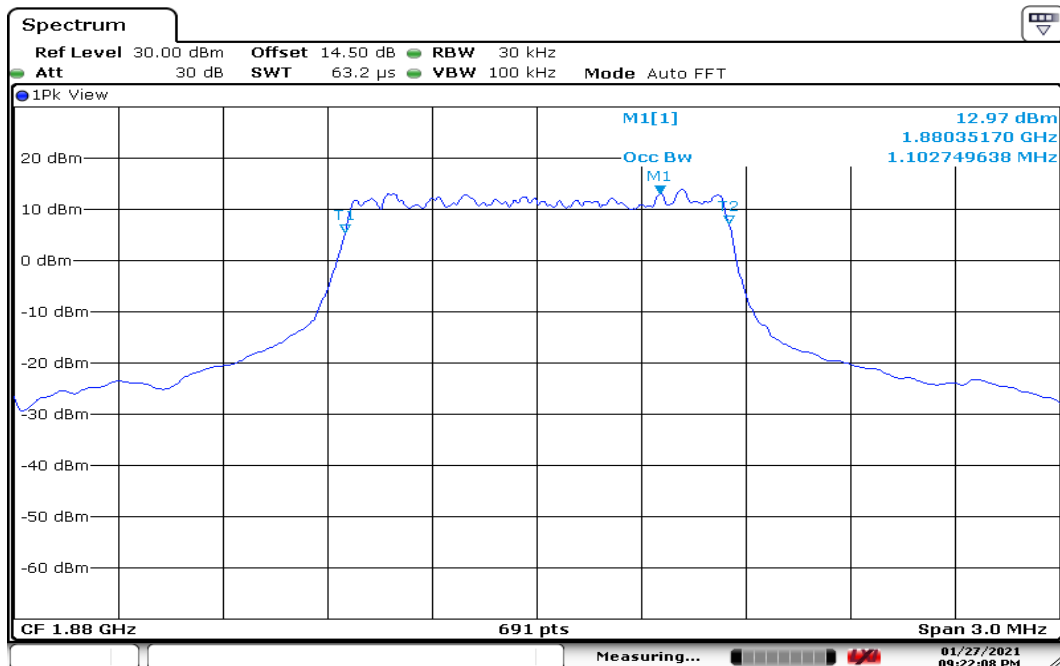

Date: 27 JAN 2021 21:22:09




Report No.: T201116W03-RP1

Page: 50 / 132


Rev.: 01

CH High

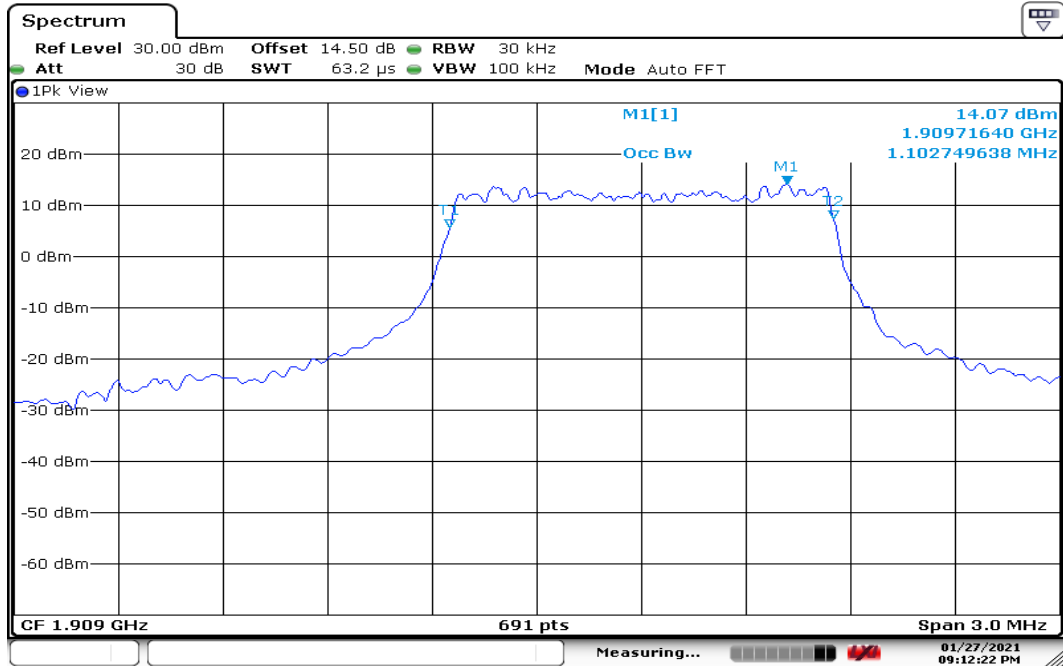


Date: 27 JAN 2021 21:12:23

Report No.: T201116W03-RP1

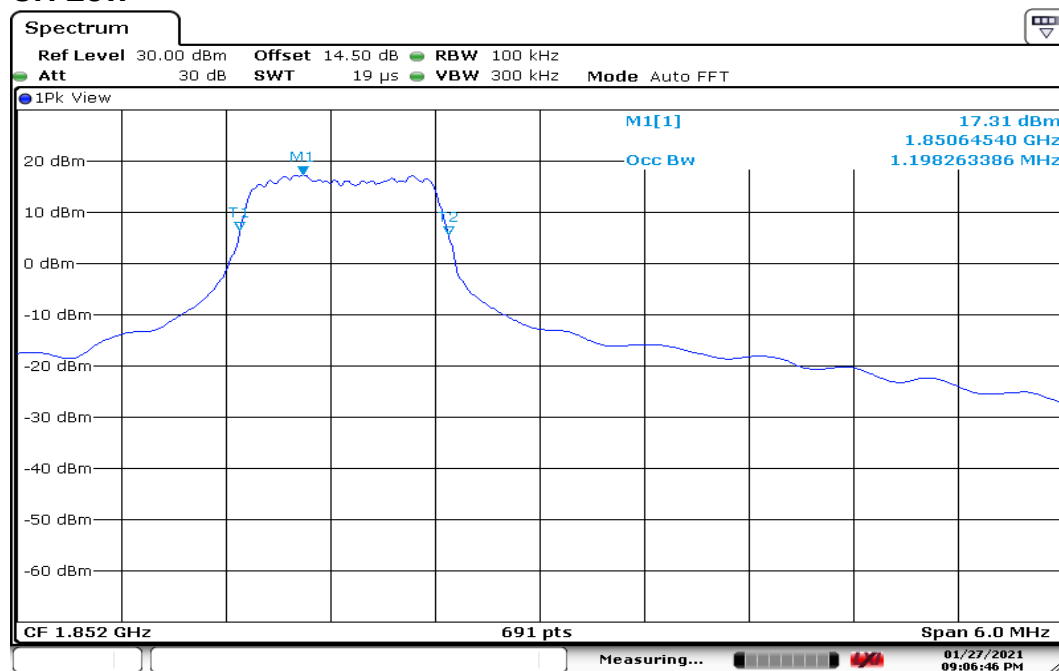BW: 3MHz
CH Low


Date: 27 JAN 2021 21:06:46

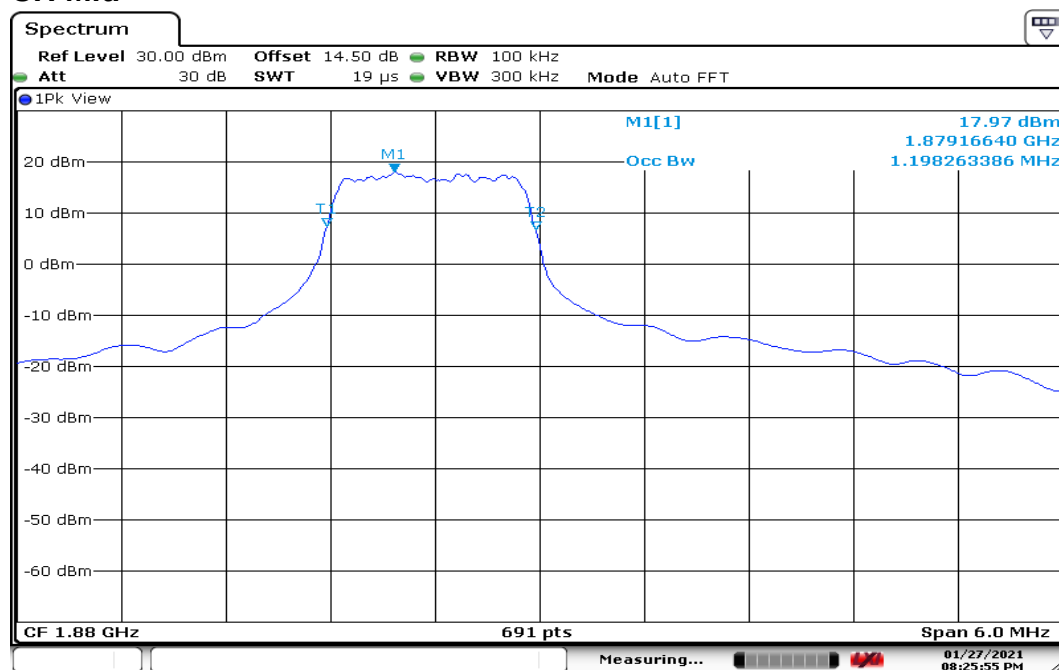CH Mid


Date: 27 JAN 2021 20:25:55




Report No.: T201116W03-RP1

Page: 52 / 132


Rev.: 01

CH High

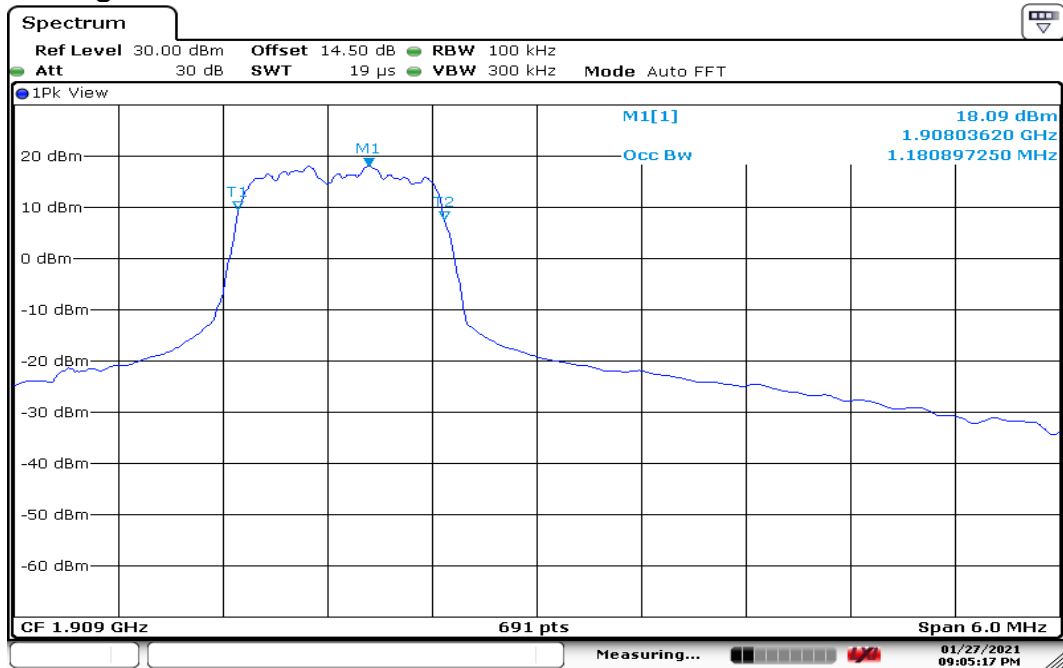


Date: 27 JAN 2021 21:05:18

Report No.: T201116W03-RP1

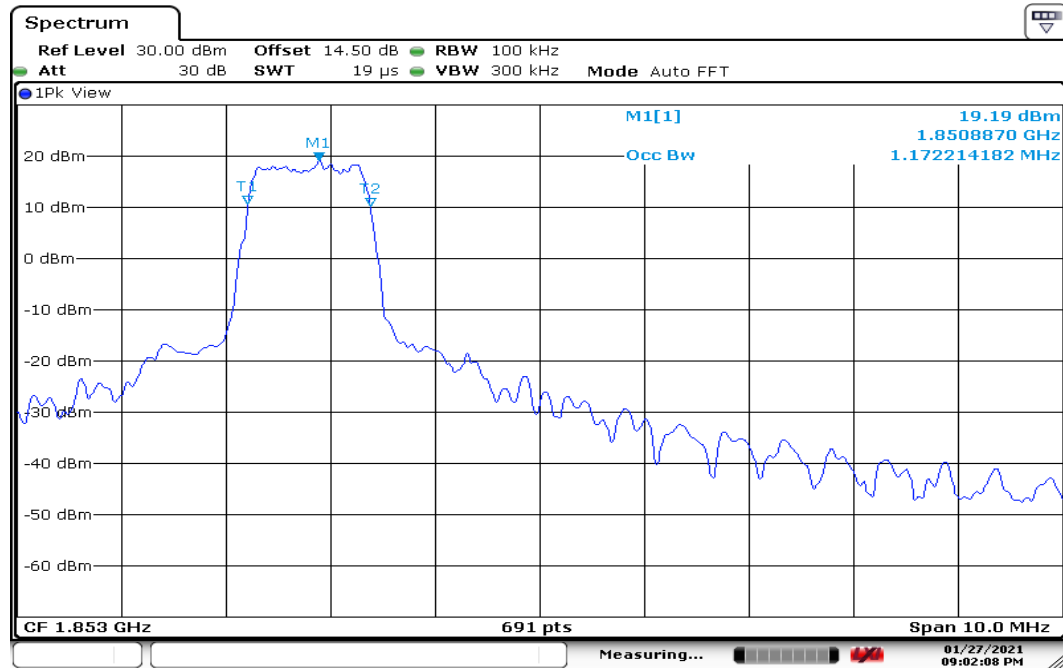BW: 5MHz
CH Low


Date: 27 JAN 2021 21:02:08

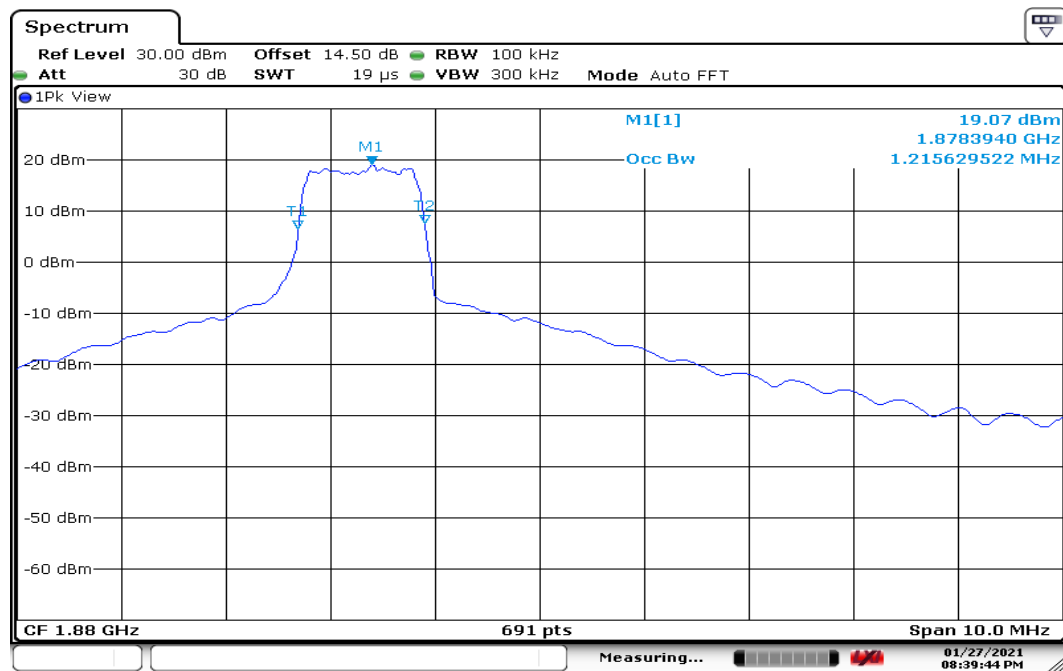CH Mid


Date: 27 JAN 2021 20:39:45




Report No.: T201116W03-RP1

Page: 54 / 132


Rev.: 01

CH High

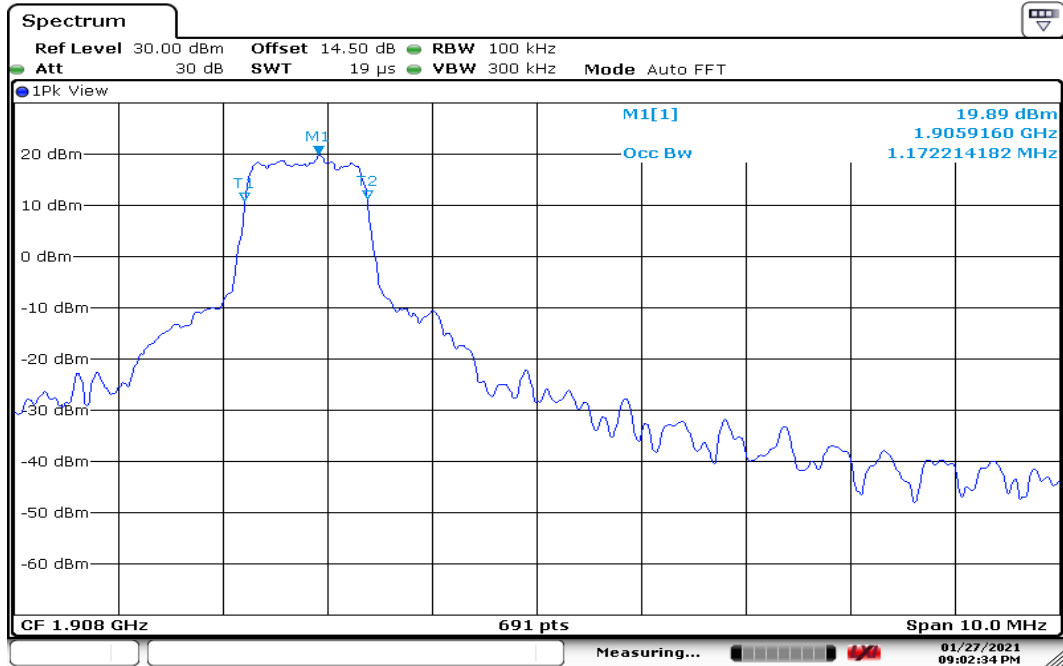


Date: 27 JAN 2021 21:02:35

Report No.: T201116W03-RP1

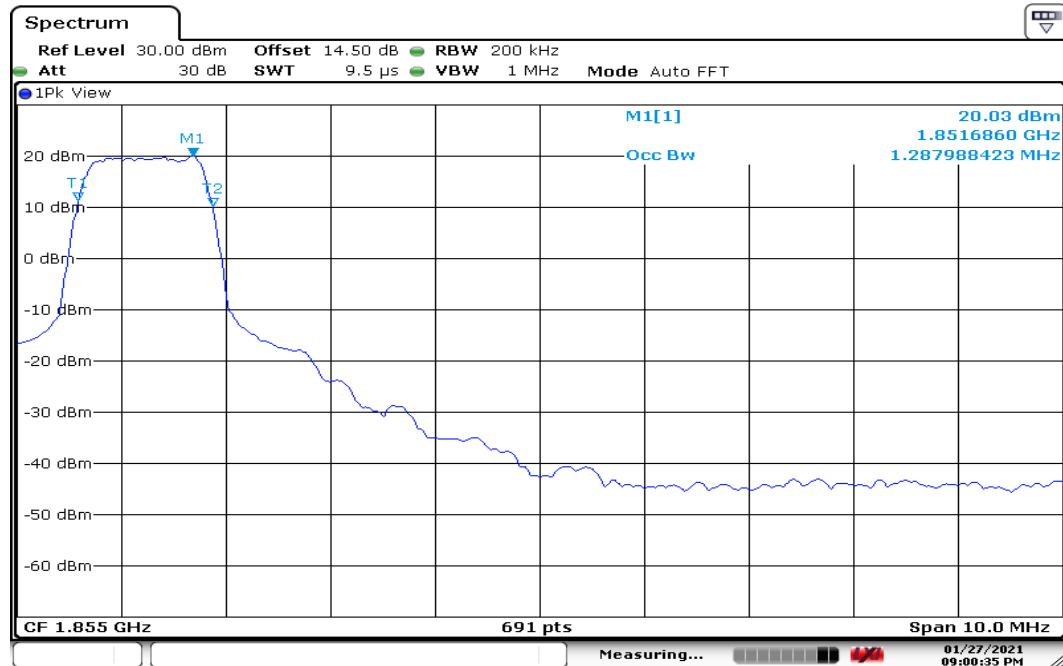BW: 10MHz
CH Low


Date: 27 JAN 2021 21:00:34

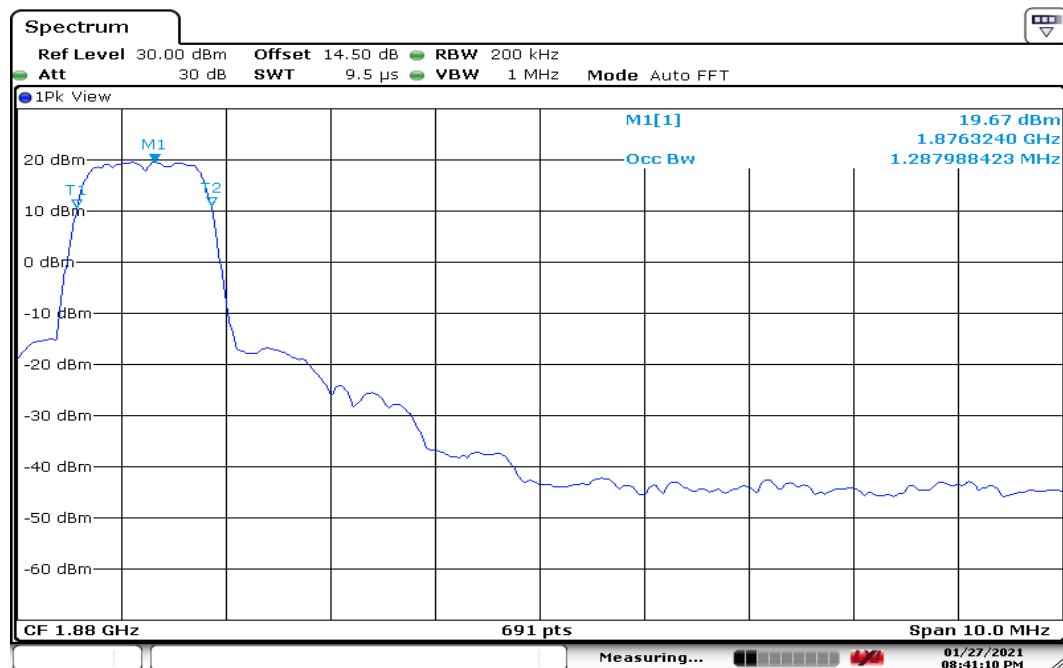CH Mid


Date: 27 JAN 2021 20:41:11




Report No.: T201116W03-RP1

Page: 56 / 132


Rev.: 01

CH High

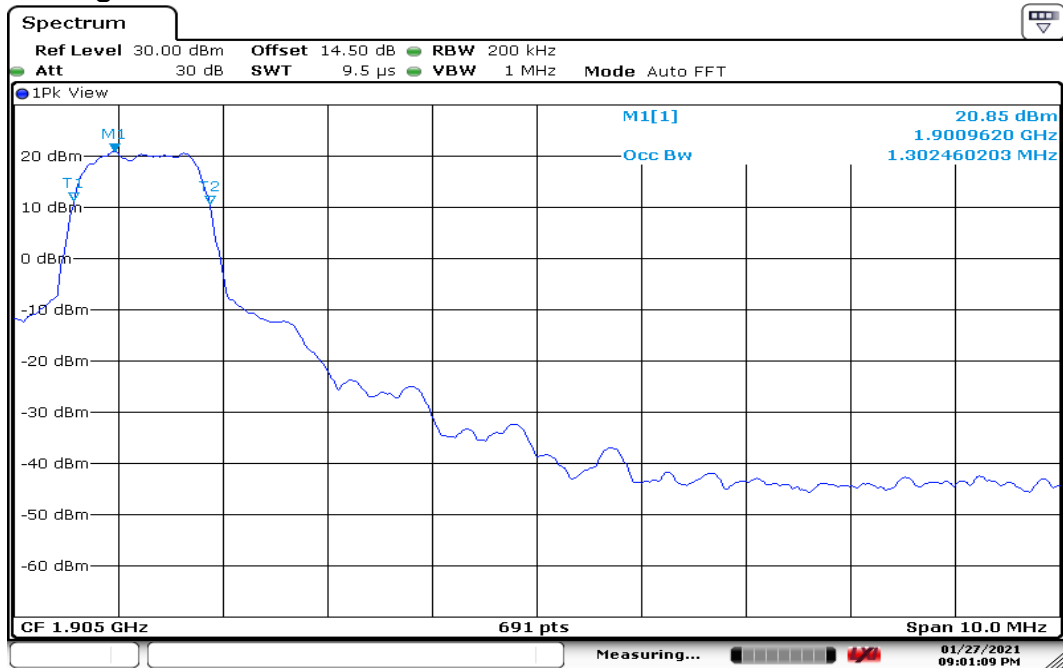


Date: 27 JAN 2021 21:01:09

Report No.: T201116W03-RP1

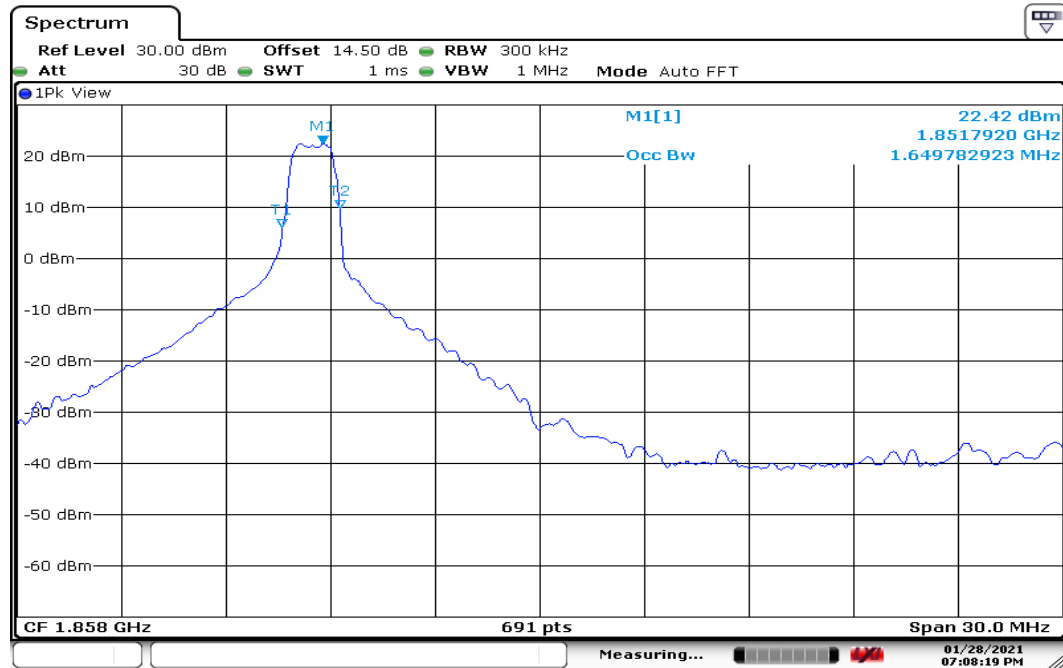BW: 15MHz
CH Low


Date: 28 JAN 2021 19:08:20

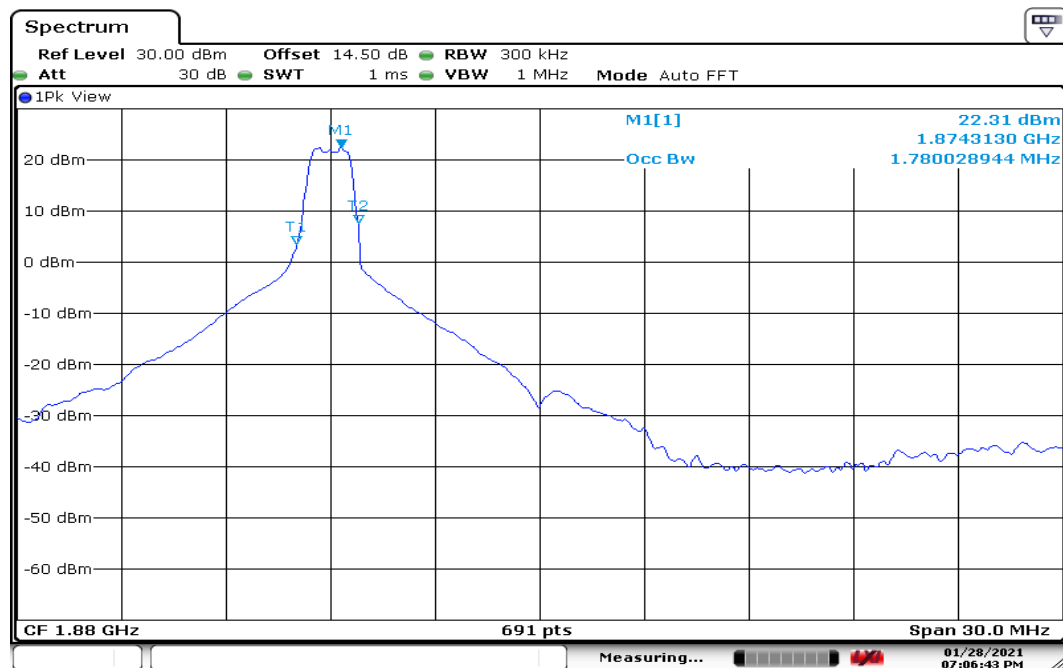CH Mid


Date: 28 JAN 2021 19:06:44




Report No.: T201116W03-RP1

Page: 58 / 132

Rev.: 01

CH High

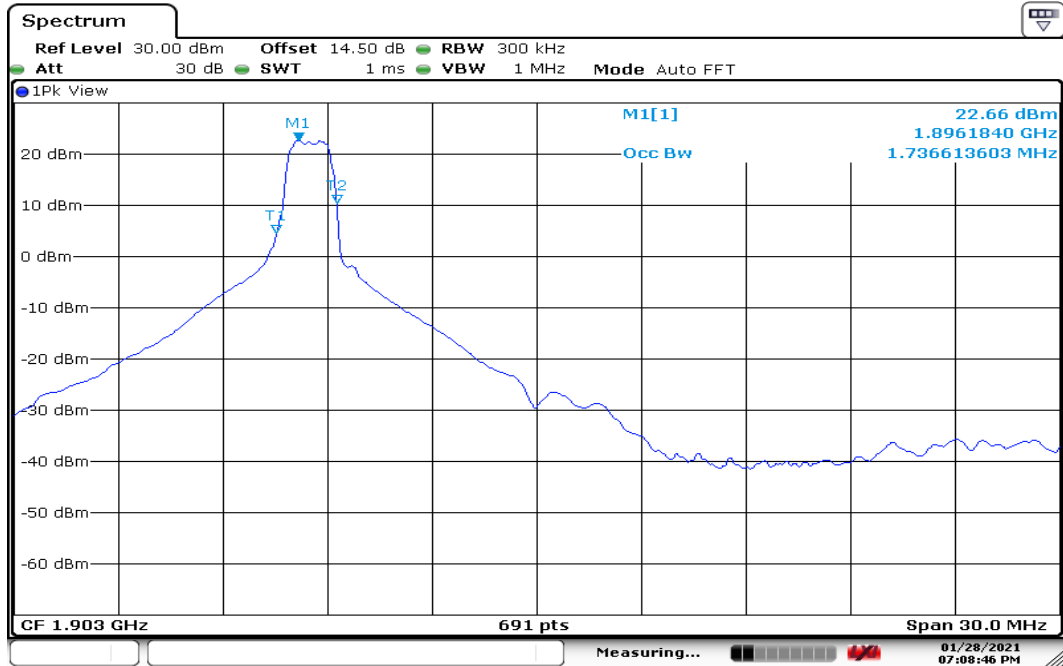


Date: 28 JAN 2021 19:08:46

Report No.: T201116W03-RP1


BW: 20MHz

CH Low

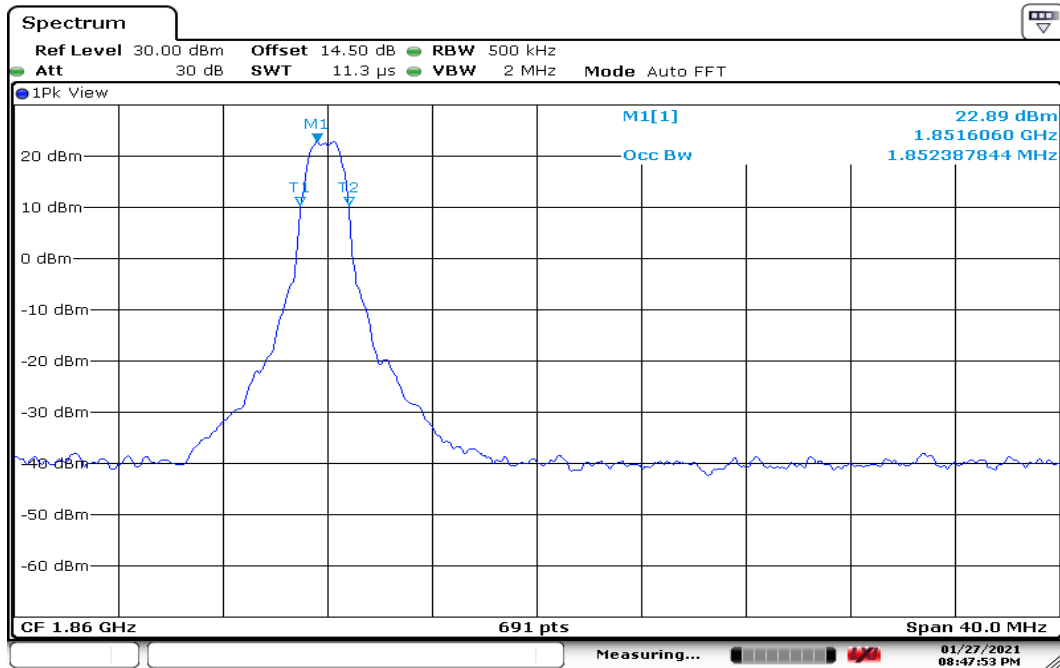

Date: 27 JAN 2021 20:47:53

CH Mid

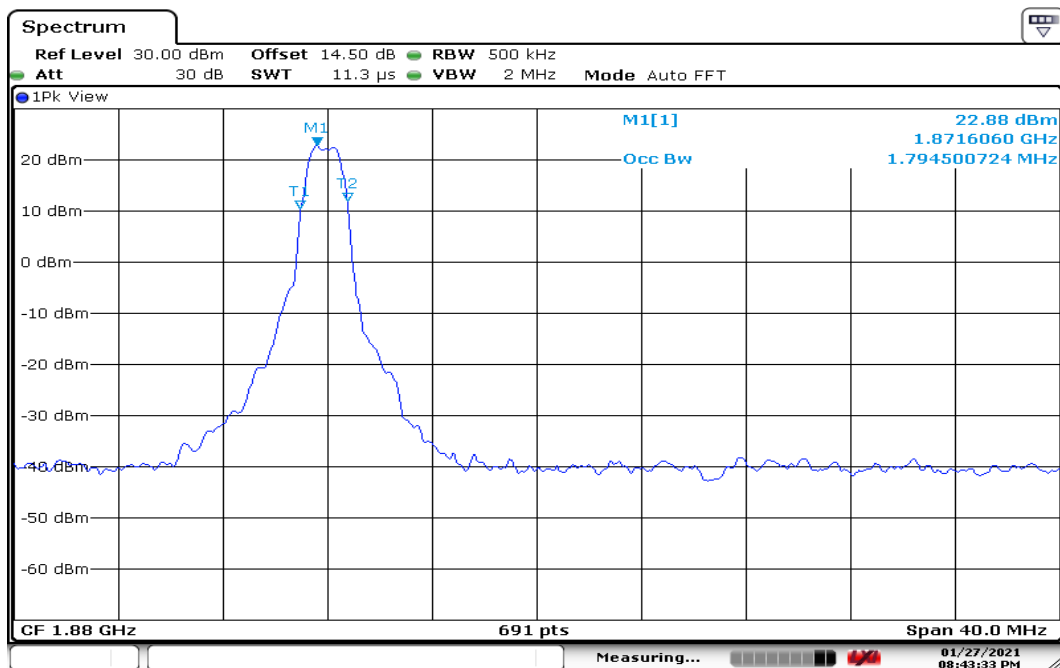

Date: 27 JAN 2021 20:43:34




Report No.: T201116W03-RP1

Page: 60 / 132

Rev.: 01

CH High

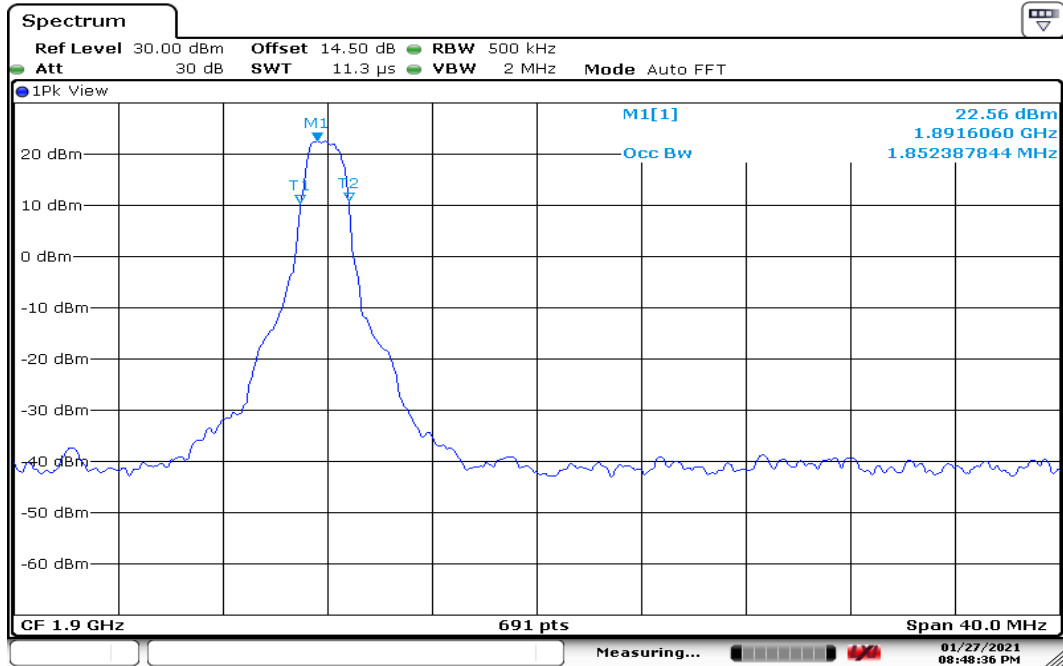


Date: 27 JAN 2021 20:48:36

Report No.: T201116W03-RP1

OBW (99%) / 16QAM


BW: 1.4MHz

CH Low

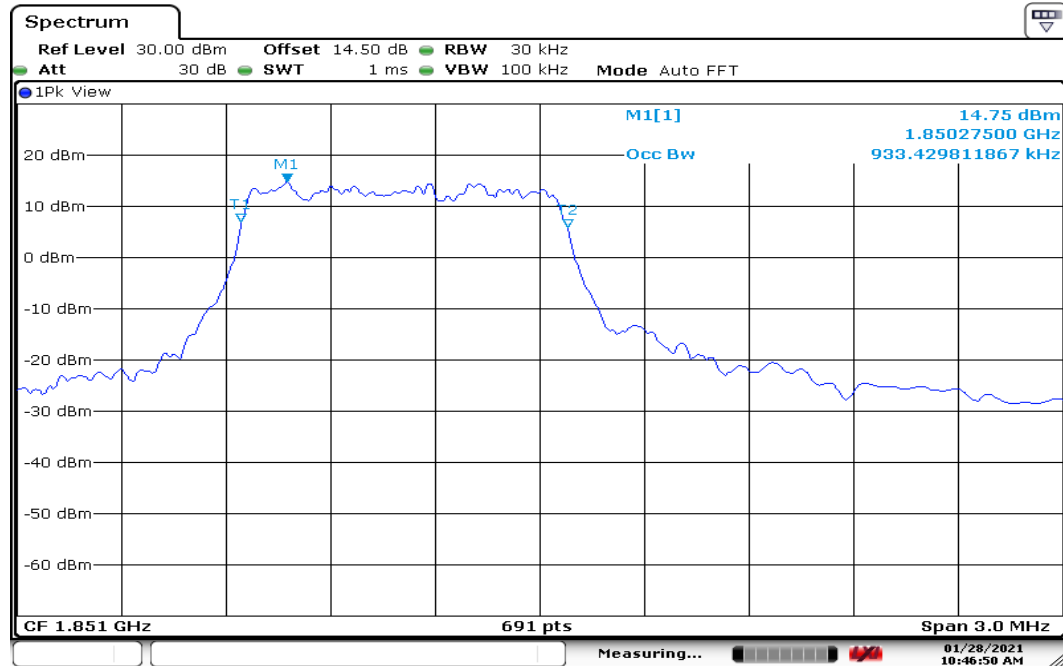

Date: 28 JAN 2021 10:46:50

CH Mid

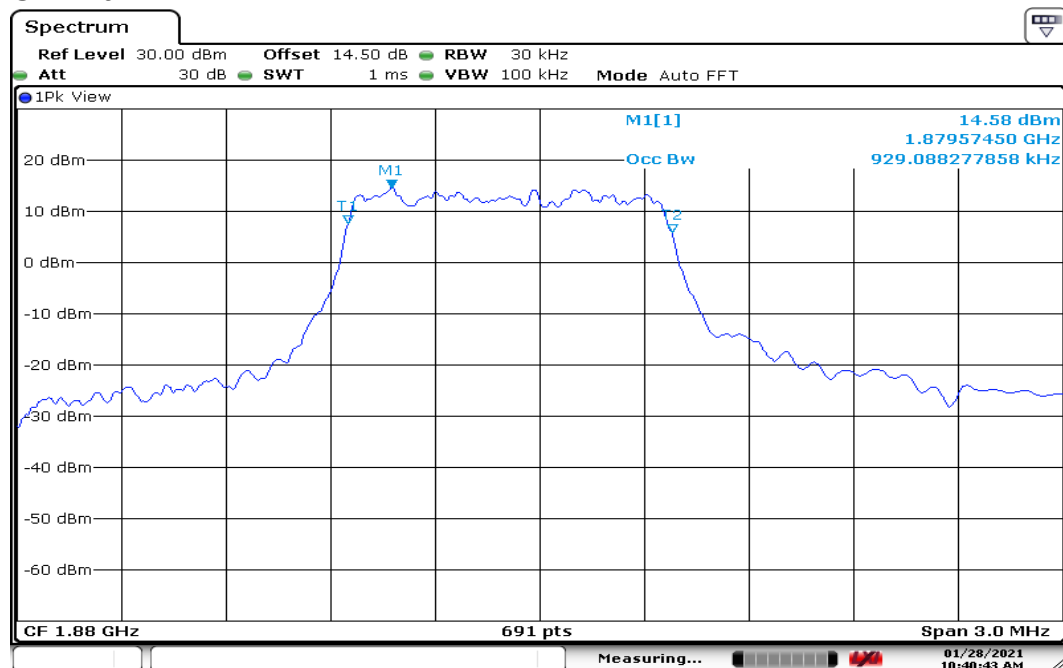

Date: 28 JAN 2021 10:40:43




Report No.: T201116W03-RP1

Page: 62 / 132

Rev.: 01


CH High

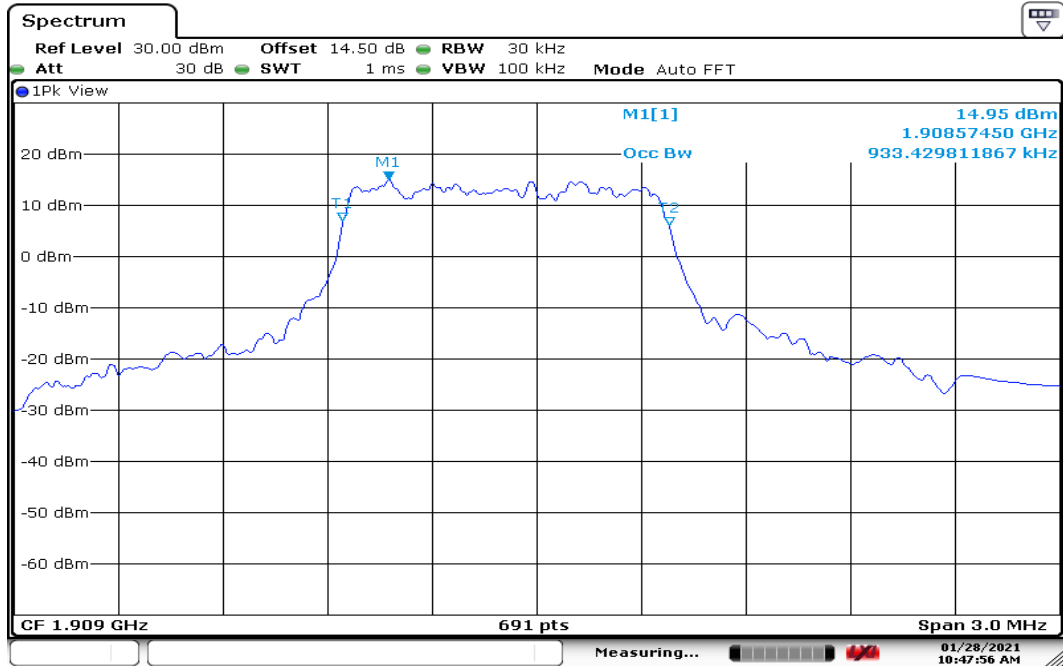

Date: 28 JAN 2021 10:47:56


BW: 3MHz

CH Low

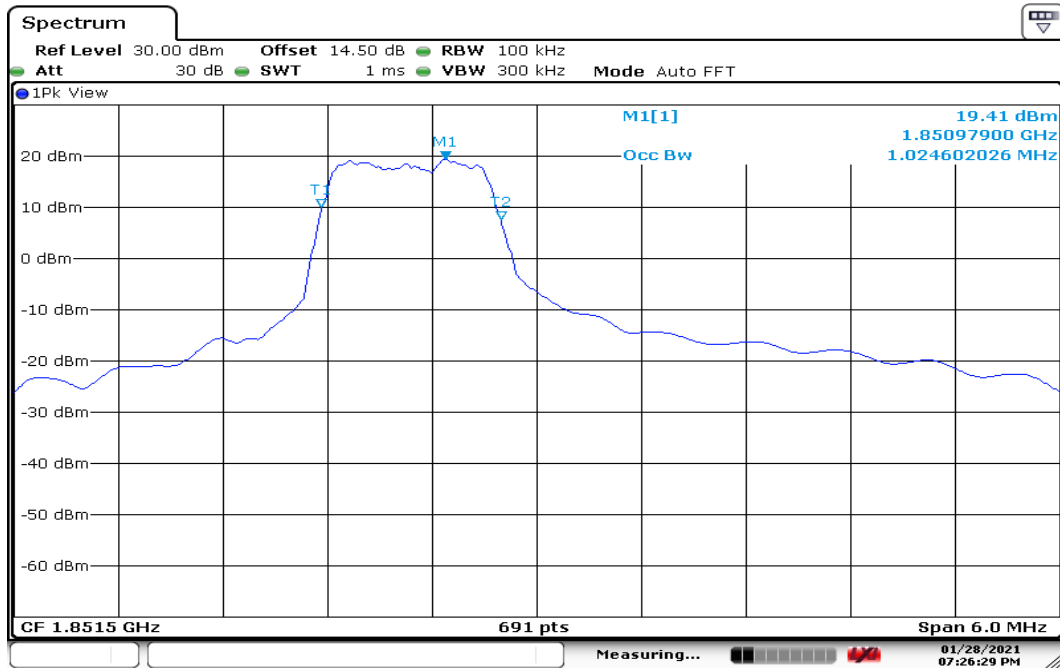

Date: 28 JAN 2021 19:26:28

CH Mid

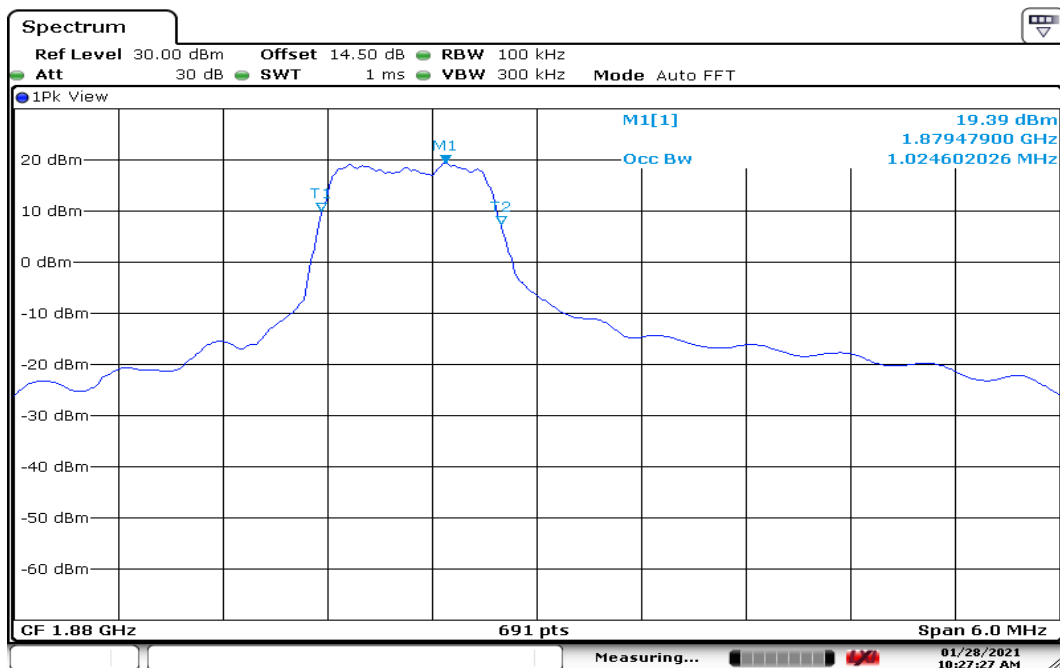

Date: 28 JAN 2021 10:27:28




Report No.: T201116W03-RP1

Page: 64 / 132

Rev.: 01


CH High

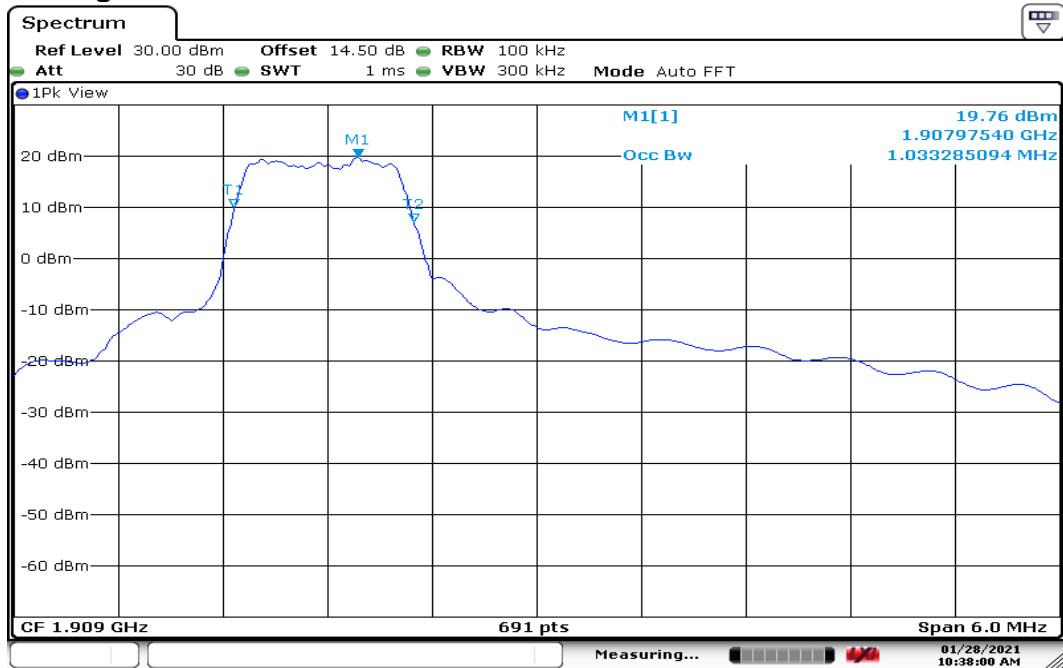

Date: 28 JAN 2021 10:38:01


BW: 5MHz

CH Low

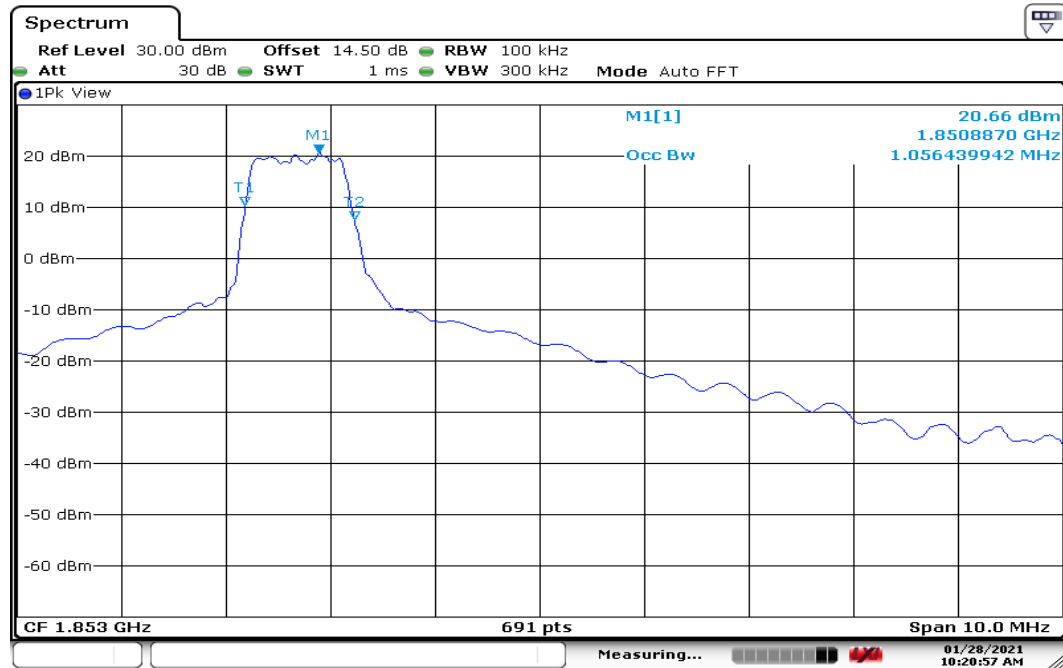

Date: 28 JAN 2021 10:20:58

CH Mid

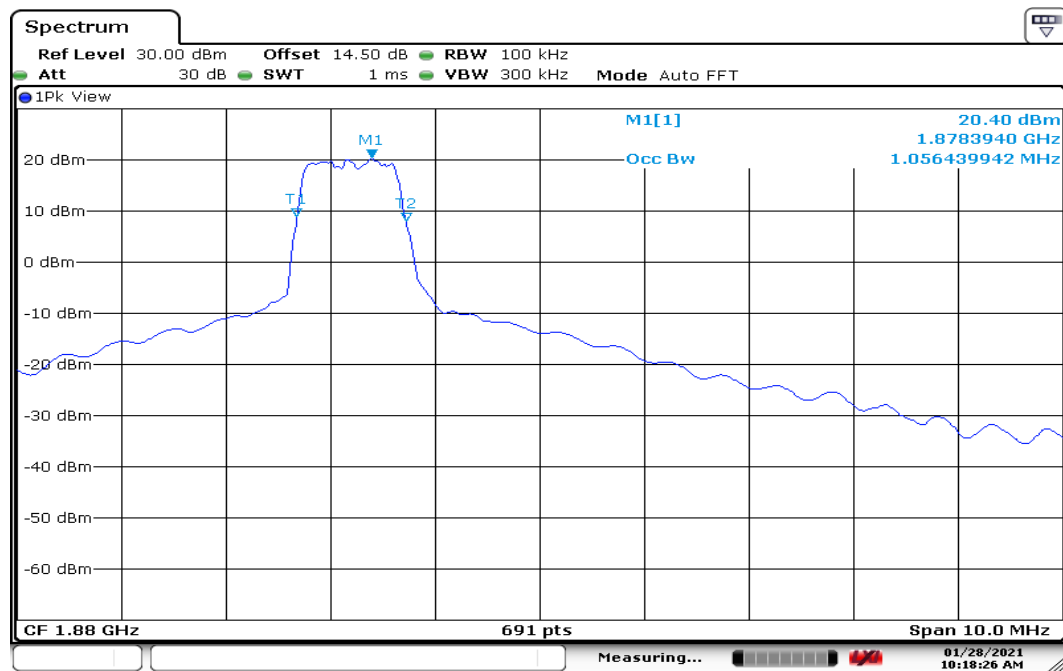

Date: 28 JAN 2021 10:18:26




Report No.: T201116W03-RP1

Page: 66 / 132


Rev.: 01

CH High

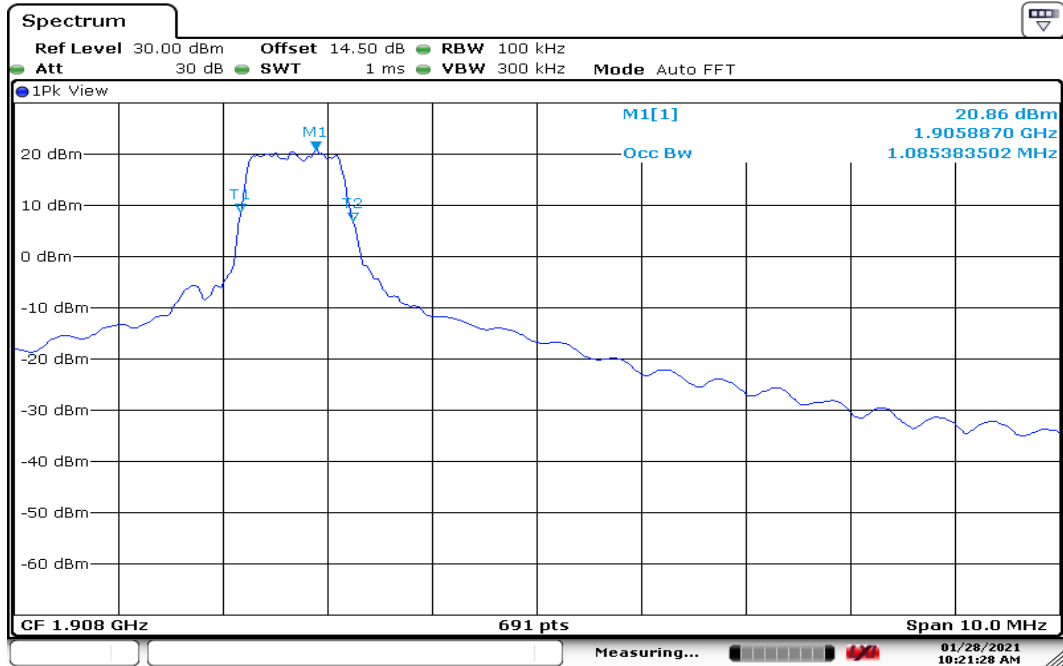


Date: 28 JAN 2021 10:21:28

Report No.: T201116W03-RP1

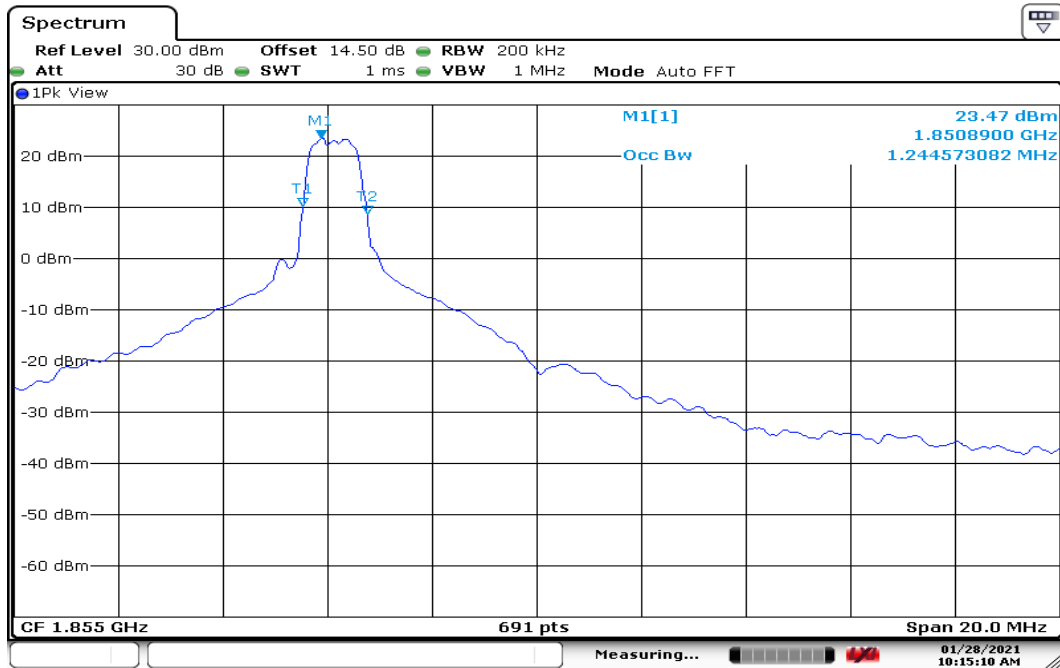BW: 10MHz
CH Low


Date: 28 JAN 2021 10:15:11

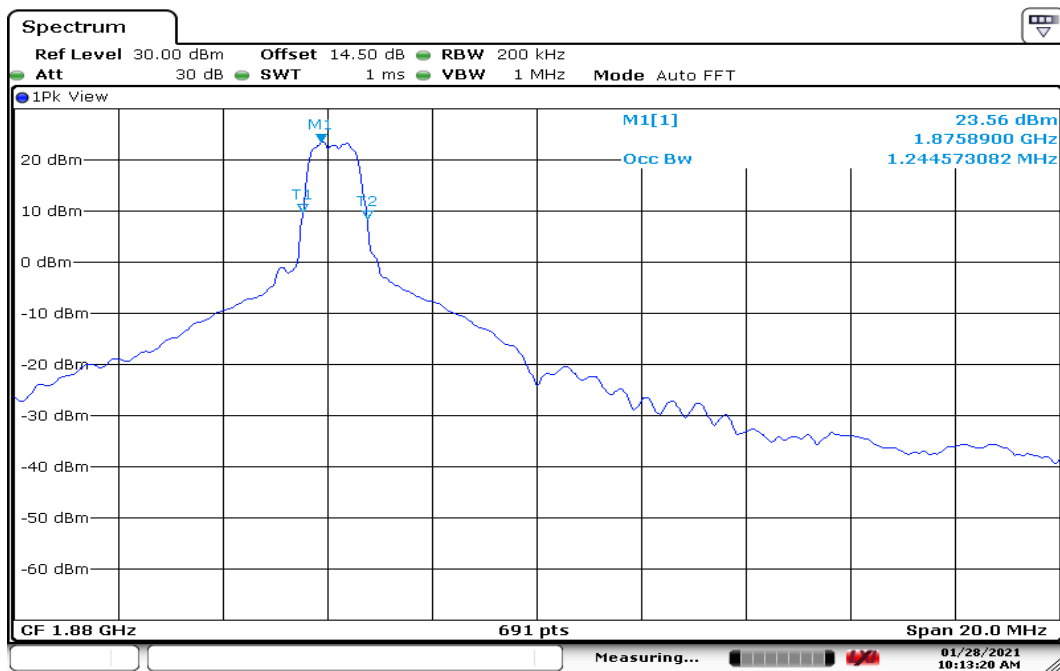CH Mid


Date: 28 JAN 2021 10:15:20




Report No.: T201116W03-RP1

Page: 68 / 132

Rev.: 01


CH High

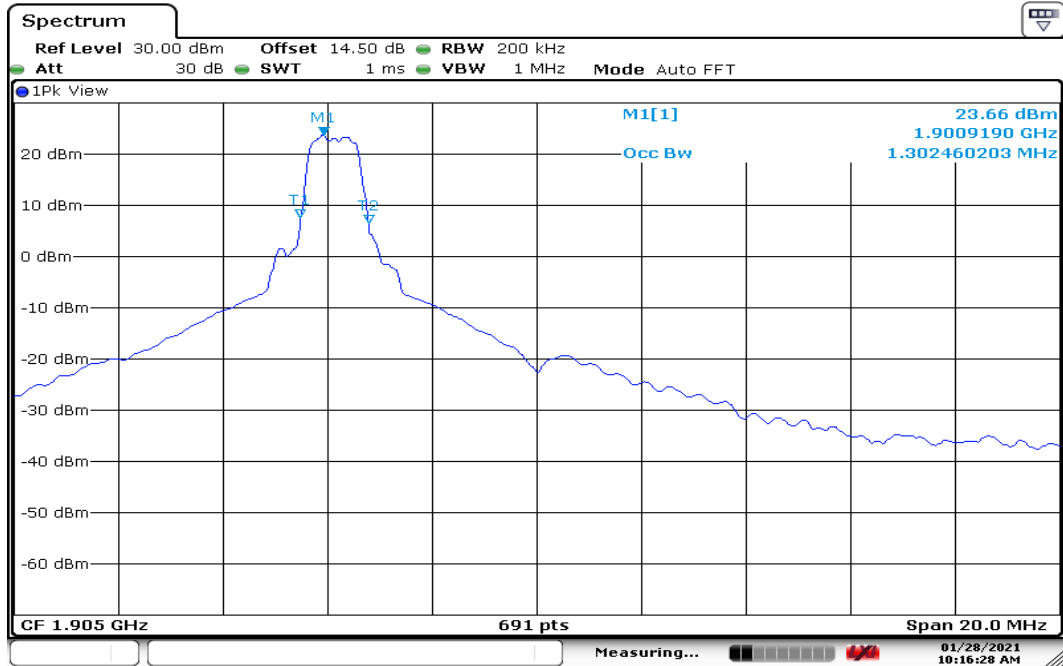

Date: 28 JAN 2021 10:16:28

BW: 15MHz

CH Low

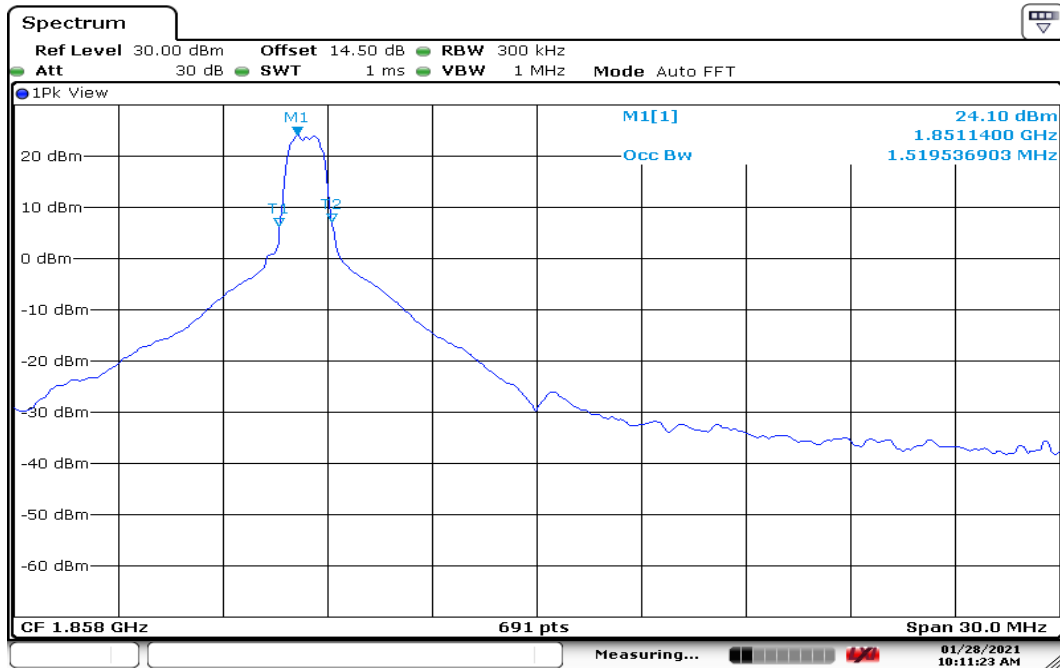


Date: 28 JAN 2021 10:11:24

CH Mid




Date: 28 JAN 2021 10:08:48

CH High

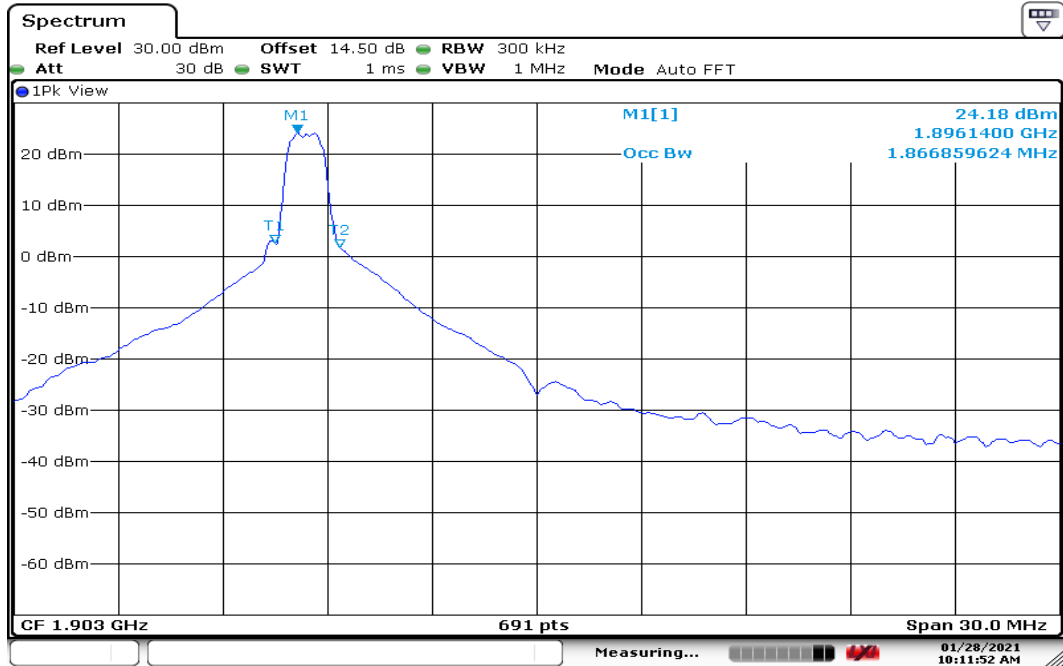


Date: 28 JAN 2021 10:11:52

Report No.: T201116W03-RP1

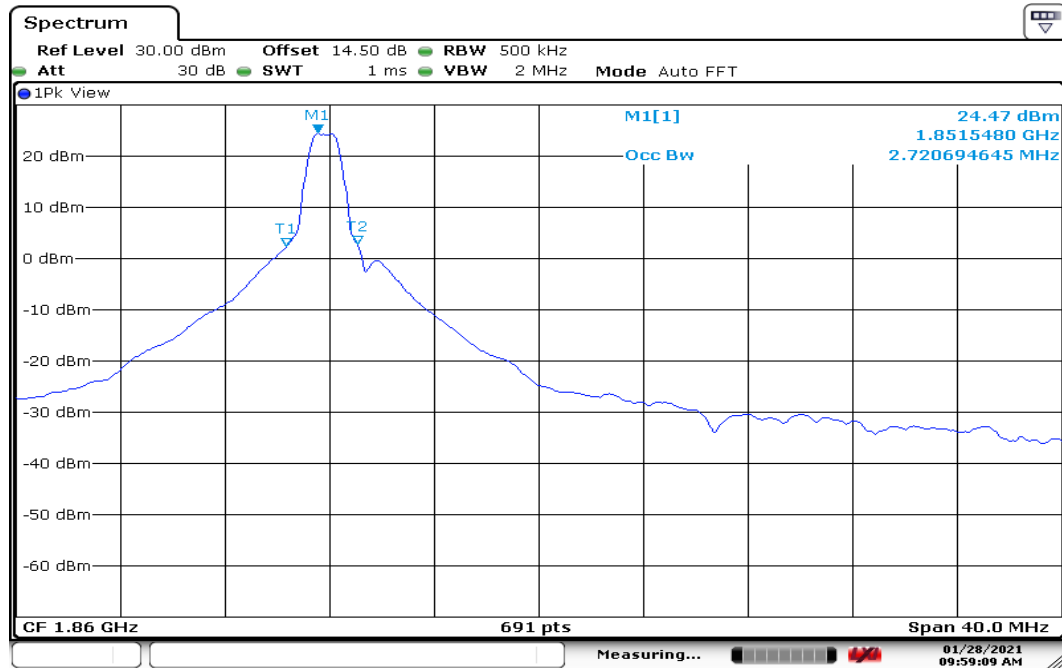BW: 20MHz
CH Low


Date: 28 JAN 2021 09:59:09

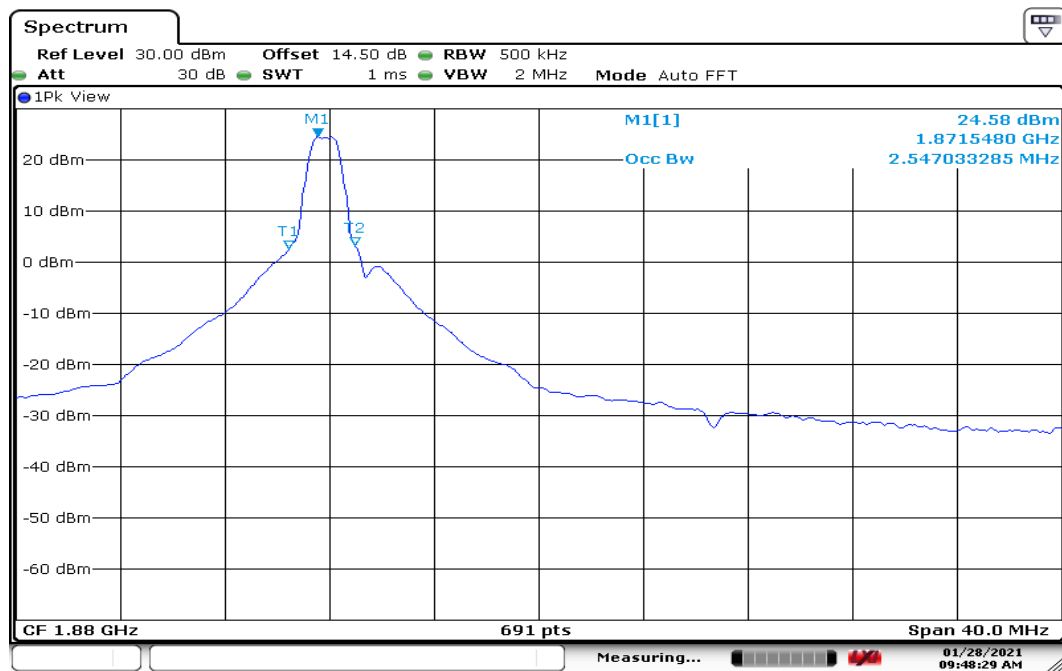CH Mid


Date: 28 JAN 2021 09:48:29




Report No.: T201116W03-RP1

Page: 72 / 132

Rev.: 01

CH High

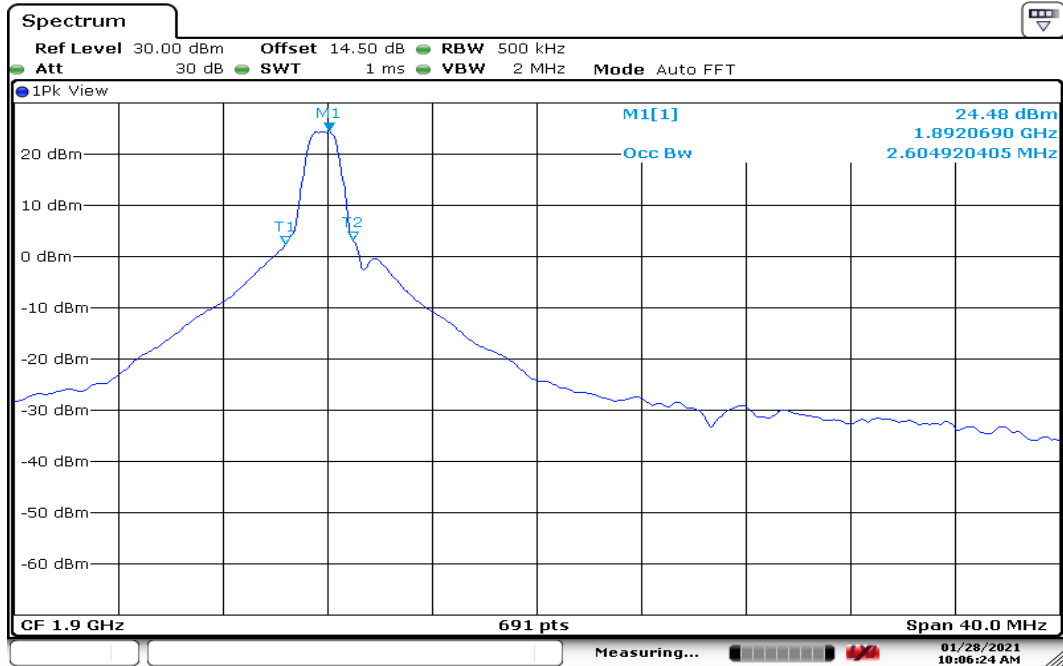

Date: 28 JAN 2021 10:06:25

8.4 PEAK TO AVERAGE POWER RATIO

Limit

In measuring transmissions in this band using an average power technique, the peak to average power ratio (PAPR) of the transmission may not exceed 13 dB.

Test Procedures

1. According to KDB 971168 D01,
2. The EUT was connect to spectrum analyzer and call box.
3. Set the CCDF function in spectrum analyzer.
4. The highest RF output power were measured and recorded the maximum PAPR level associated with a probability of 0.1%.
5. Record the Peak to Average Power Ratio.

Note: We selected worst case to performed test in middle channel, the results can be meet other channel.

TEST RESULTS

LTE Band 2

Temperature: 23.8°C

Humidity: 55.7% RH

Tested by: Dally Hong

Test Date: January 26, 2021

CHANNEL BANDWIDTH: 1.4MHz / QPSK / Full RB

Frequency (MHz)	Channel	PEAK TO AVERAGE RATIO (dB)
1850.7	18607	6.38
1880	18900	4.78
1909.3	19193	6.06

CHANNEL BANDWIDTH: 3MHz / QPSK / Full RB

Frequency (MHz)	Channel	PEAK TO AVERAGE RATIO (dB)
1851.5	18615	6.55
1880	18900	6.23
1908.5	19185	6.03

CHANNEL BANDWIDTH: 5MHz / QPSK / Full RB

Frequency (MHz)	Channel	PEAK TO AVERAGE RATIO (dB)
1852.5	18625	5.83
1880	18900	4.29
1907.5	19175	2.64

CHANNEL BANDWIDTH: 10MHz / QPSK / Full RB

Frequency (MHz)	Channel	PEAK TO AVERAGE RATIO (dB)
1855	18650	4.87
1880	18900	5.83
1905	19150	2.78

CHANNEL BANDWIDTH: 15MHz / QPSK / Full RB

Frequency (MHz)	Channel	PEAK TO AVERAGE RATIO (dB)
1857.5	18675	8.35
1880	18900	6.20
1902.5	19125	8.35

CHANNEL BANDWIDTH: 20MHz / QPSK / Full RB


Frequency (MHz)	Channel	PEAK TO AVERAGE RATIO (dB)
1860	18700	8.49
1880	18900	8.41
1900	19100	8.35

LTE Band 2

QPSK / RB = 6, RB Offset = 0


BW: 1.4MHz

CH Low

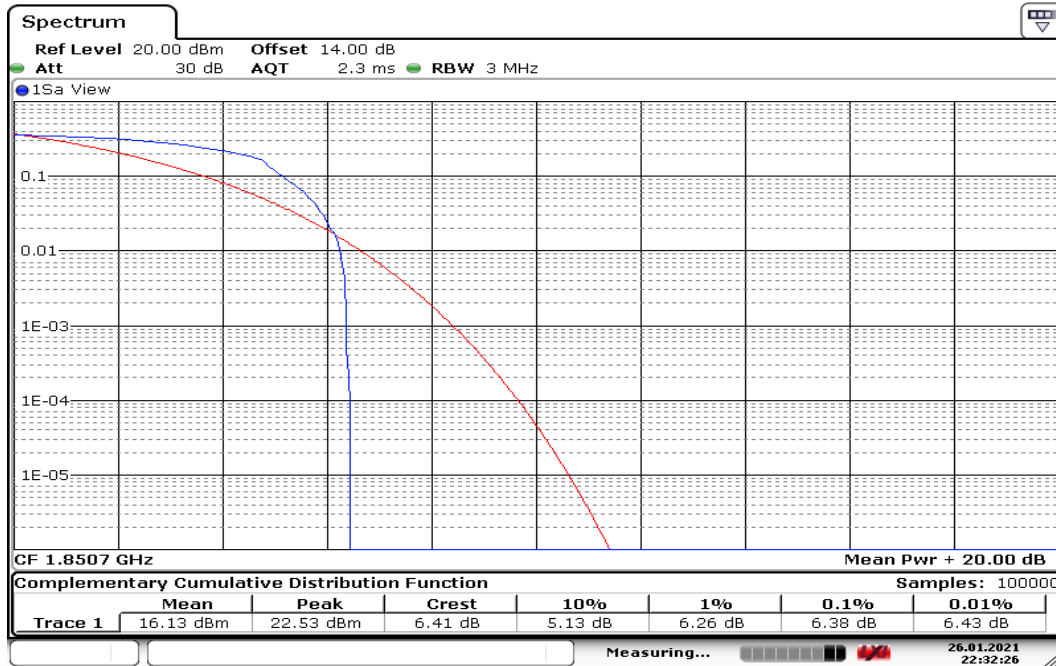

Date: 26 JAN 2021 22:32:27

CH Mid

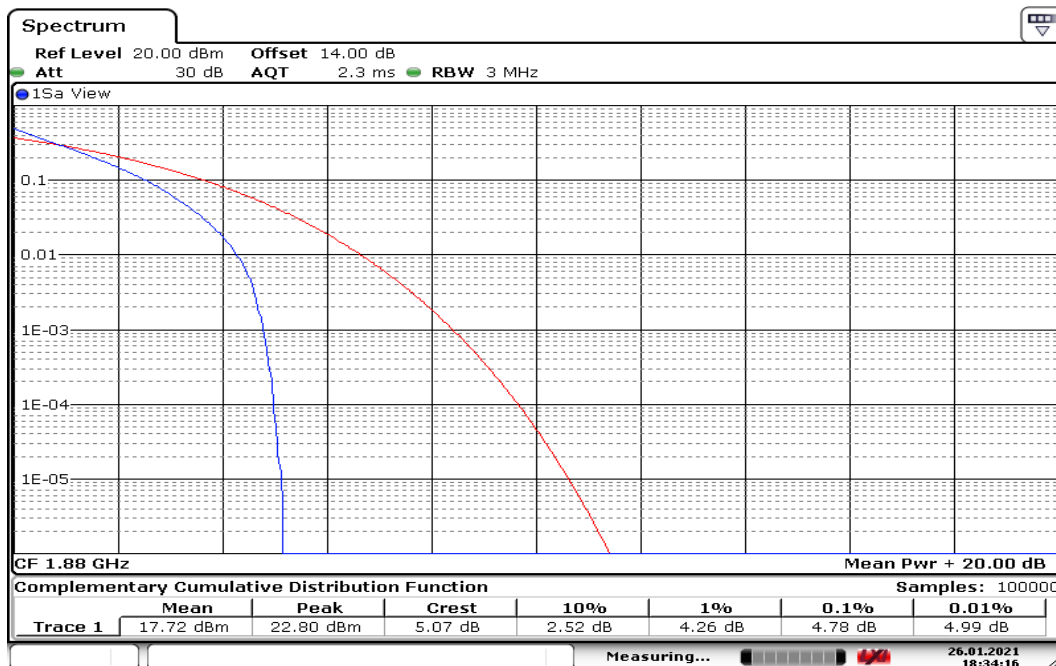

Date: 26 JAN 2021 18:34:16




Report No.: T201116W03-RP1

Page: 76 / 132

Rev.: 01


CH High

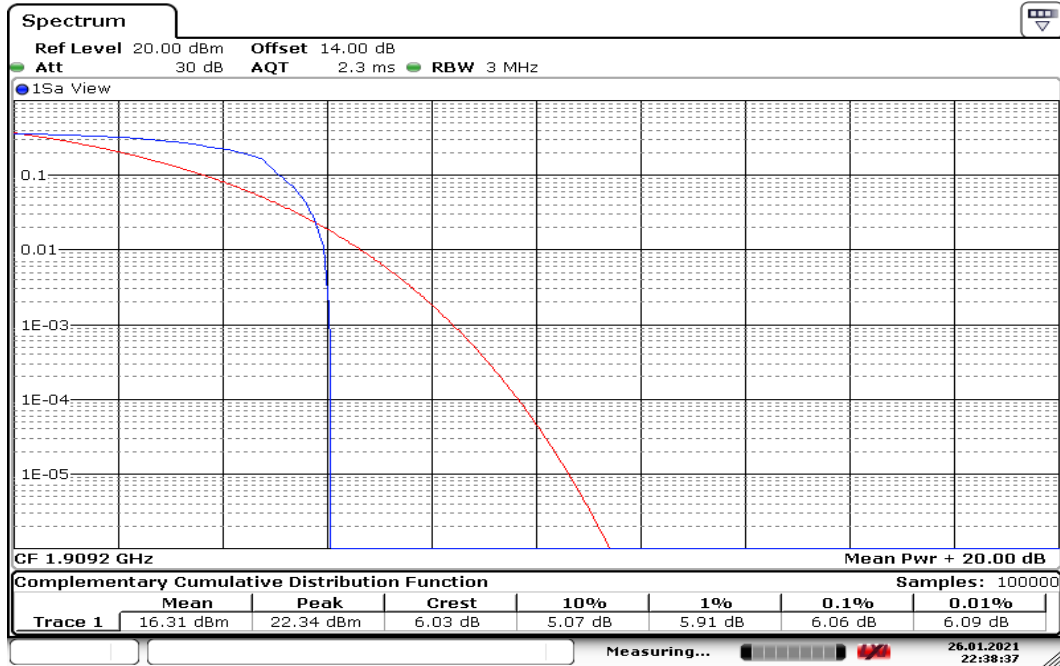

Date: 26 JAN 2021 22:38:37


BW: 3MHz

CH Low

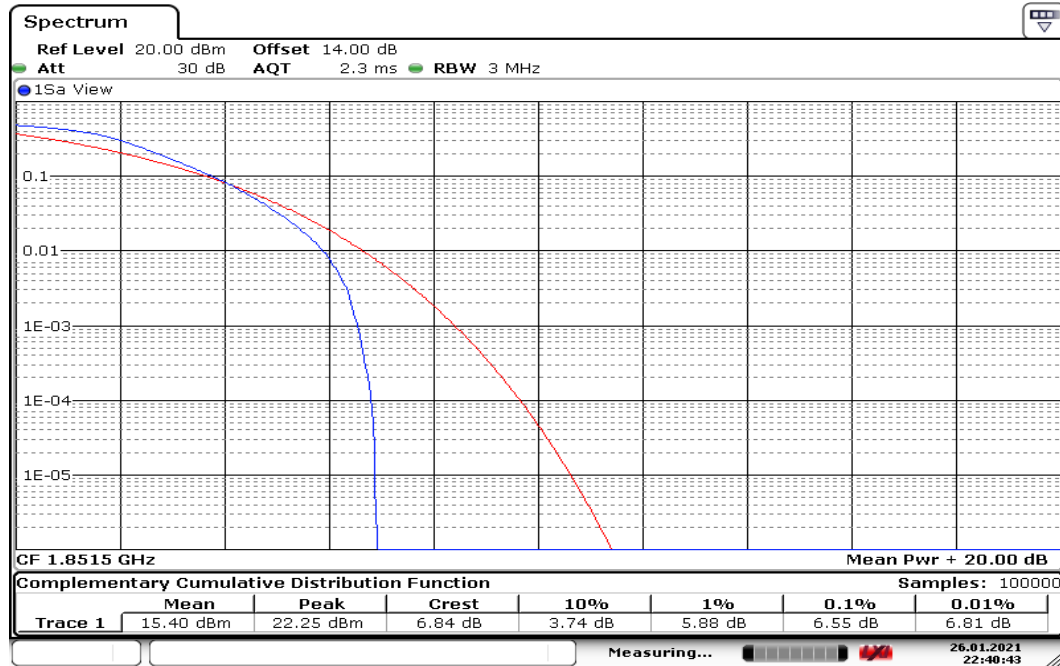

Date: 26 JAN 2021 22:40:44

CH Mid

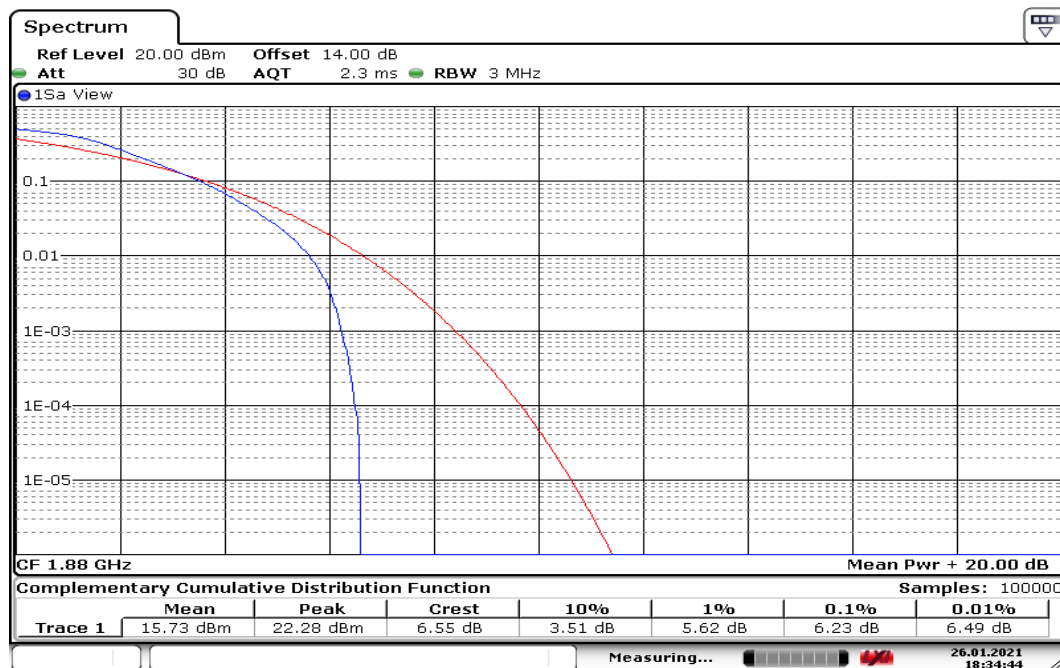

Date: 26 JAN 2021 18:34:44




Report No.: T201116W03-RP1

Page: 78 / 132

Rev.: 01


CH High

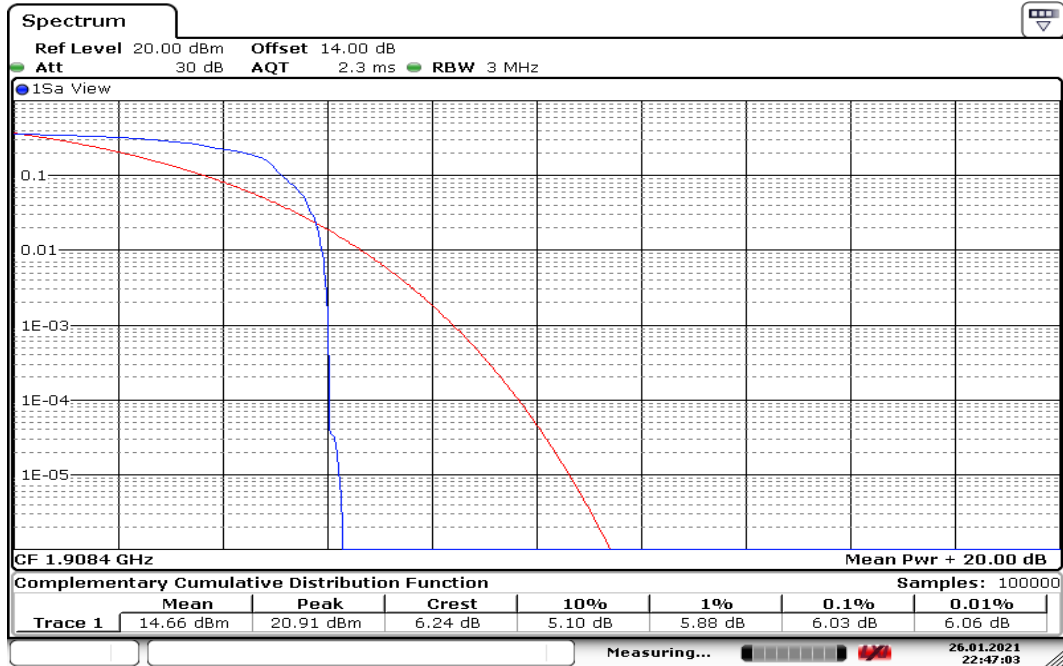

Date: 26 JAN 2021 22:47:04


BW: 5MHz

CH Low

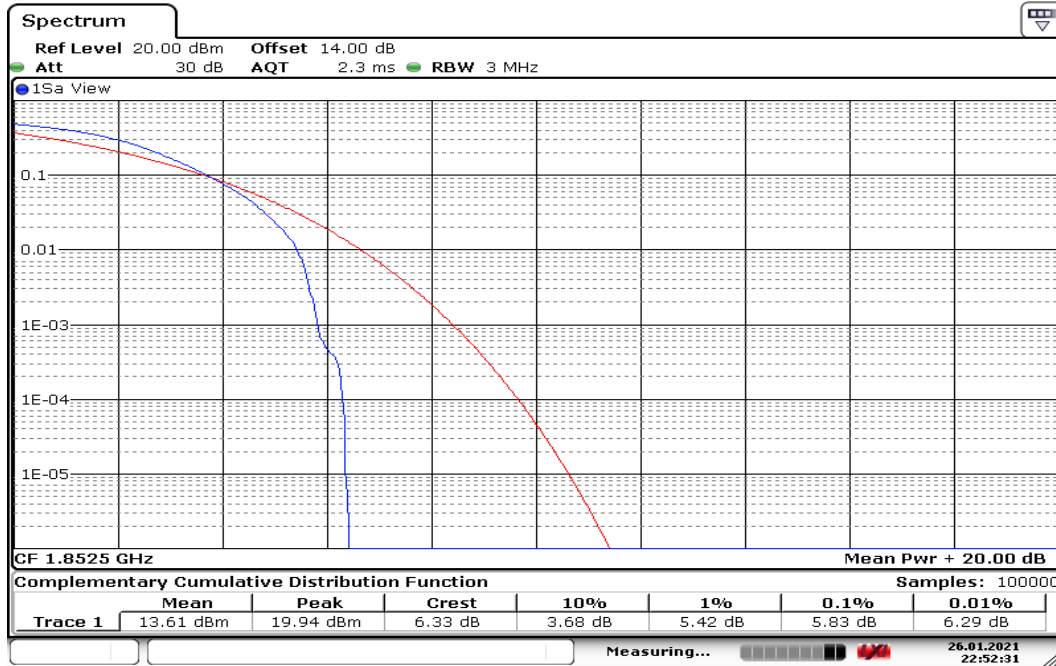

Date: 26 JAN 2021 22:52:32

CH Mid

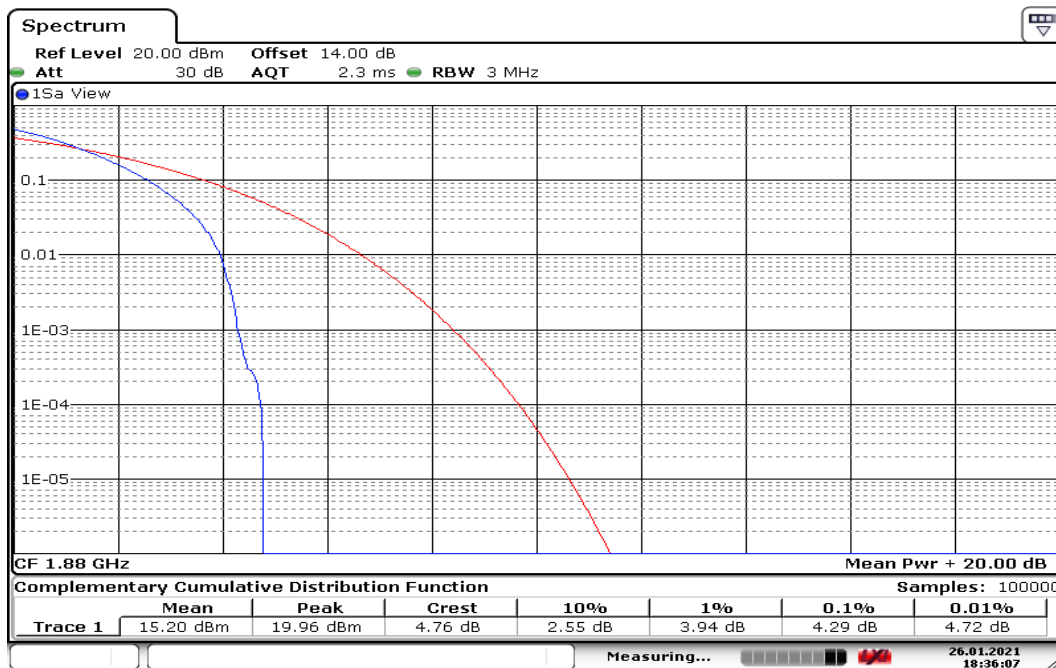

Date: 26 JAN 2021 18:36:07




Report No.: T201116W03-RP1

Page: 80 / 132

Rev.: 01


CH High

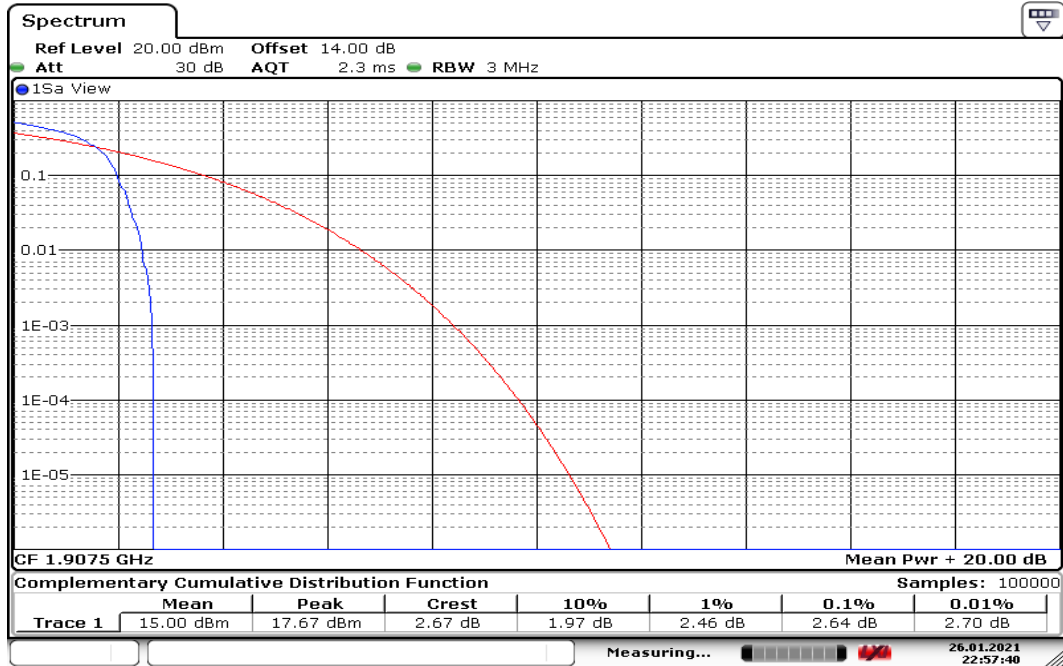

Date: 26 JAN 2021 22:57:40


BW: 10MHz

CH Low

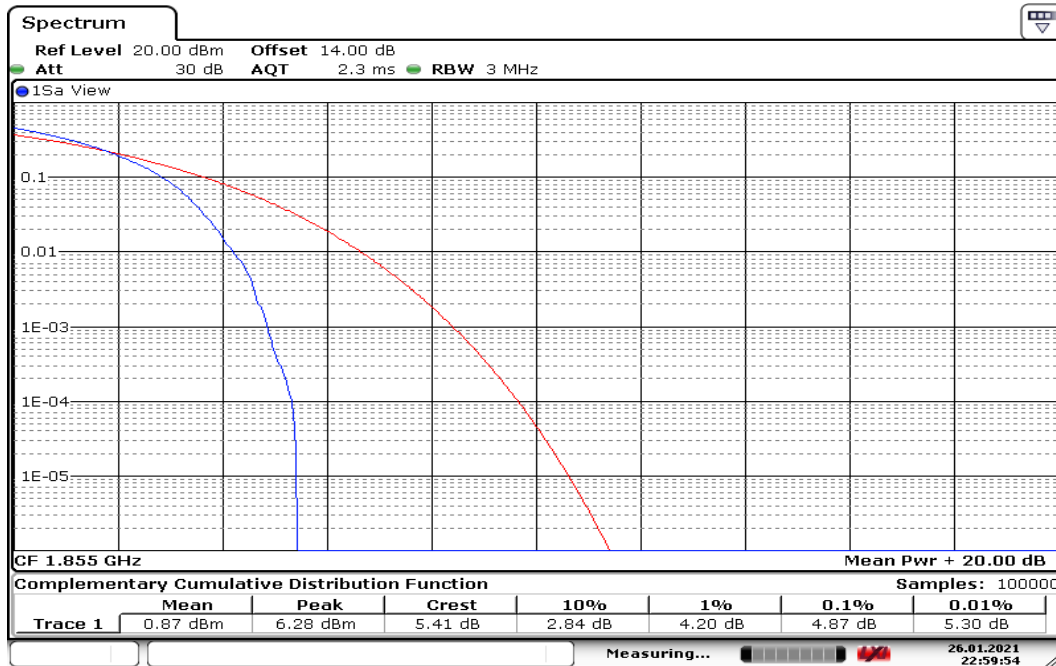


Date: 26 JAN 2021 22:59:55

CH Mid

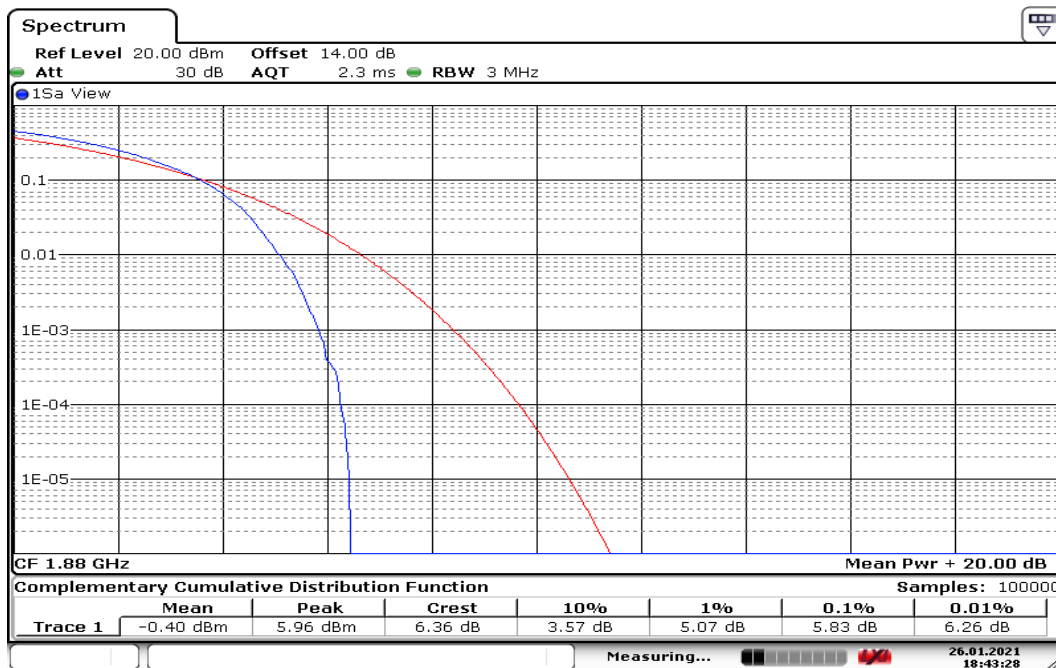

Date: 26 JAN 2021 18:43:29


CH High

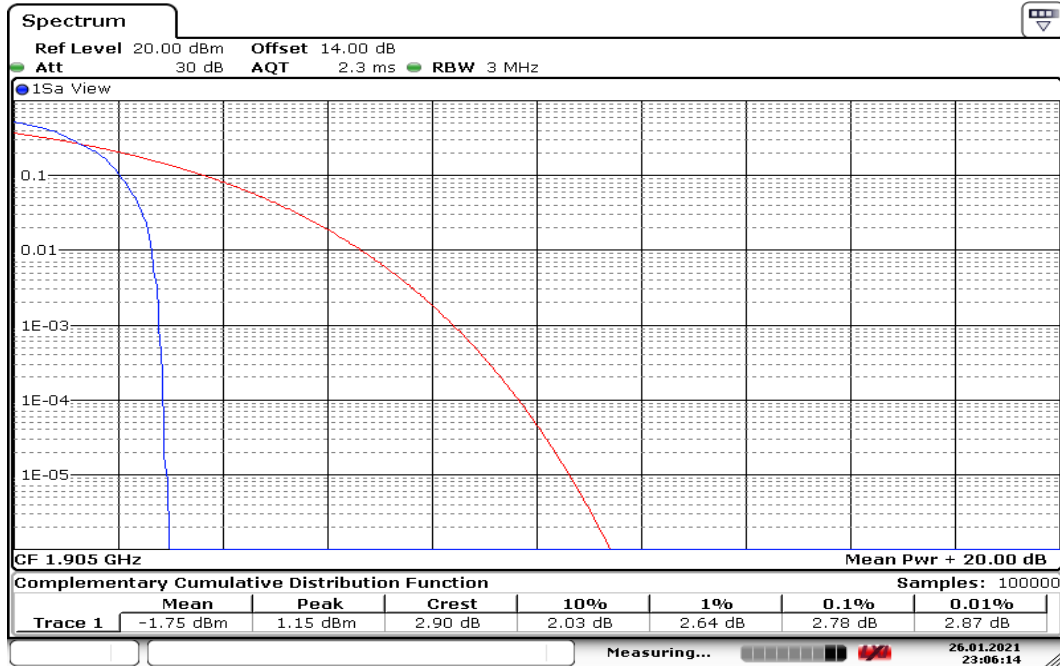

Date: 26 JAN 2021 23:06:15


BW: 15MHz

CH Low

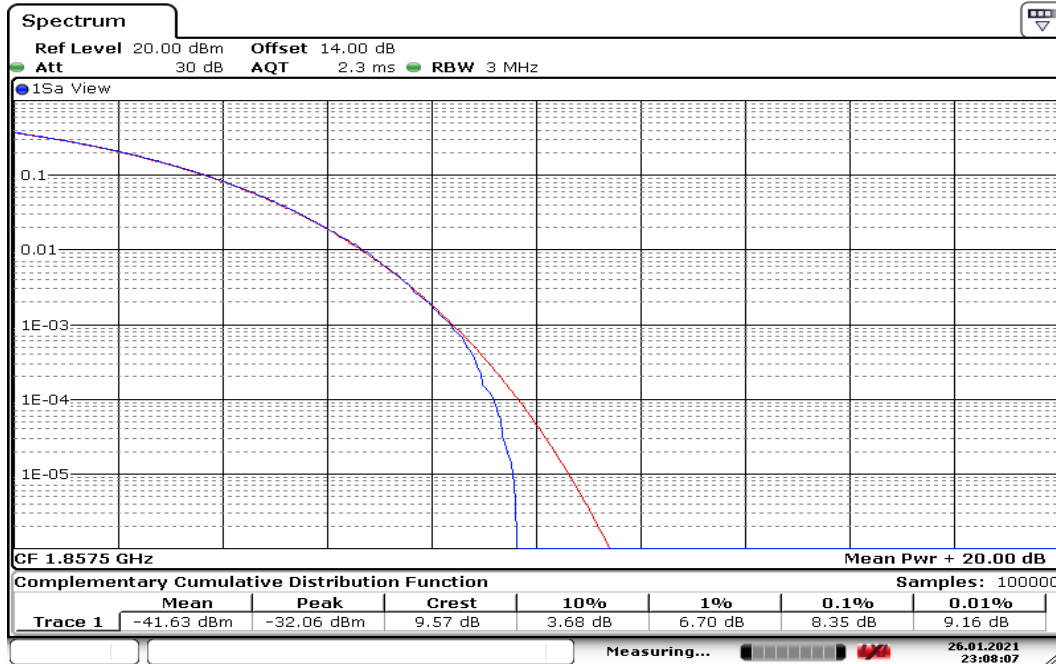

Date: 26 JAN 2021 23:08:07

CH Mid

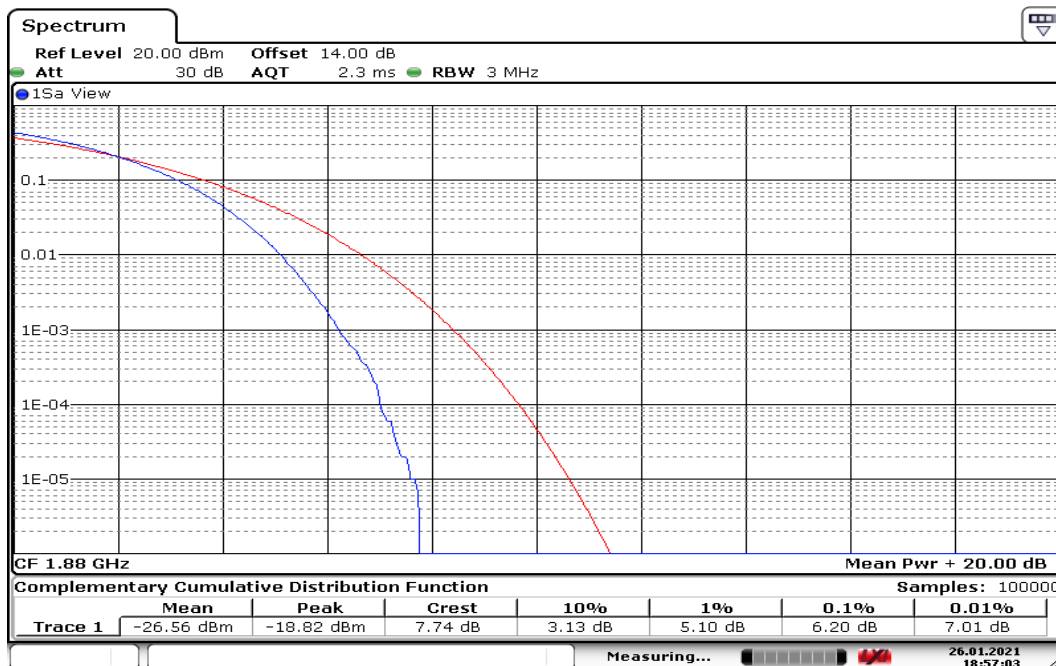

Date: 26 JAN 2021 18:57:04




Report No.: T201116W03-RP1

Page: 84 / 132

Rev.: 01


CH High

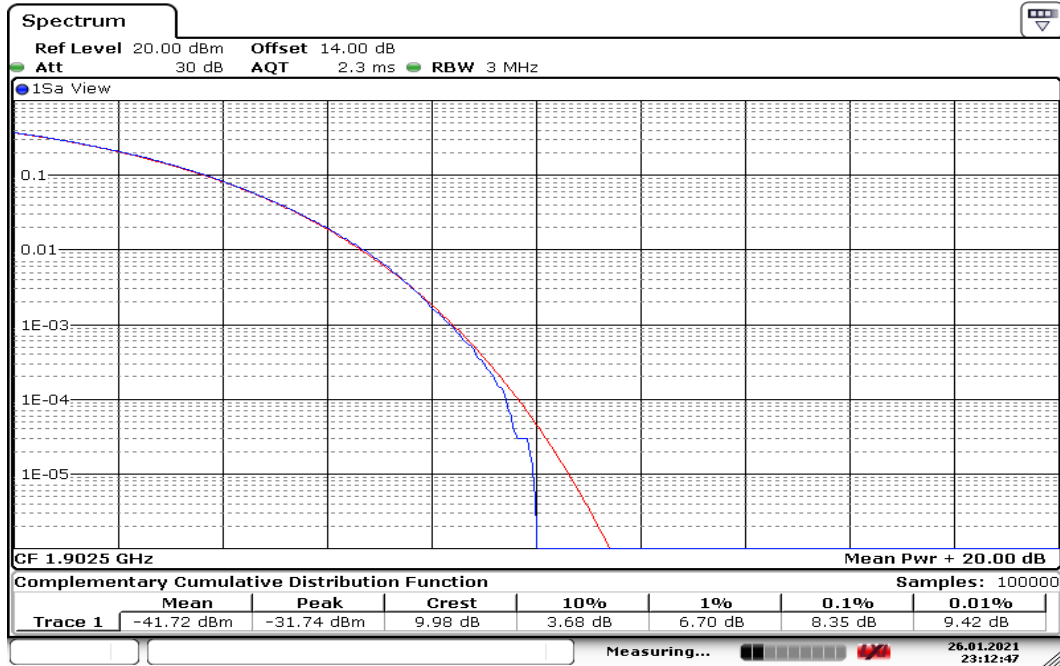

Date: 26 JAN 2021 23:12:47


BW: 20MHz

CH Low

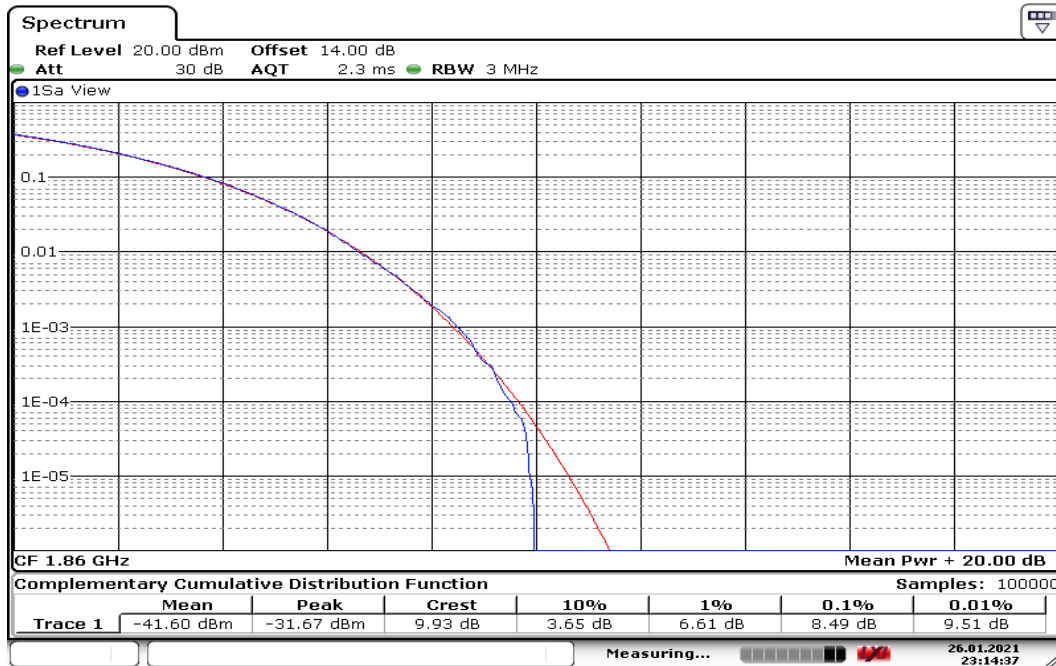

Date: 26 JAN 2021 23:14:38

CH Mid

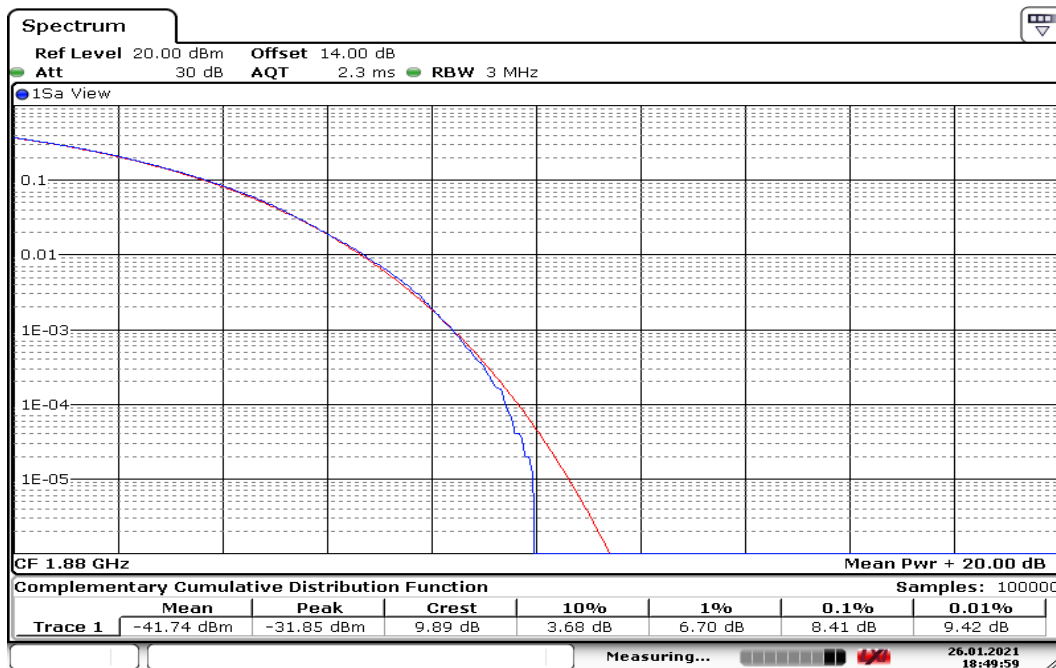

Date: 26 JAN 2021 18:49:59




Report No.: T201116W03-RP1

Page: 86 / 132

Rev.: 01

CH High

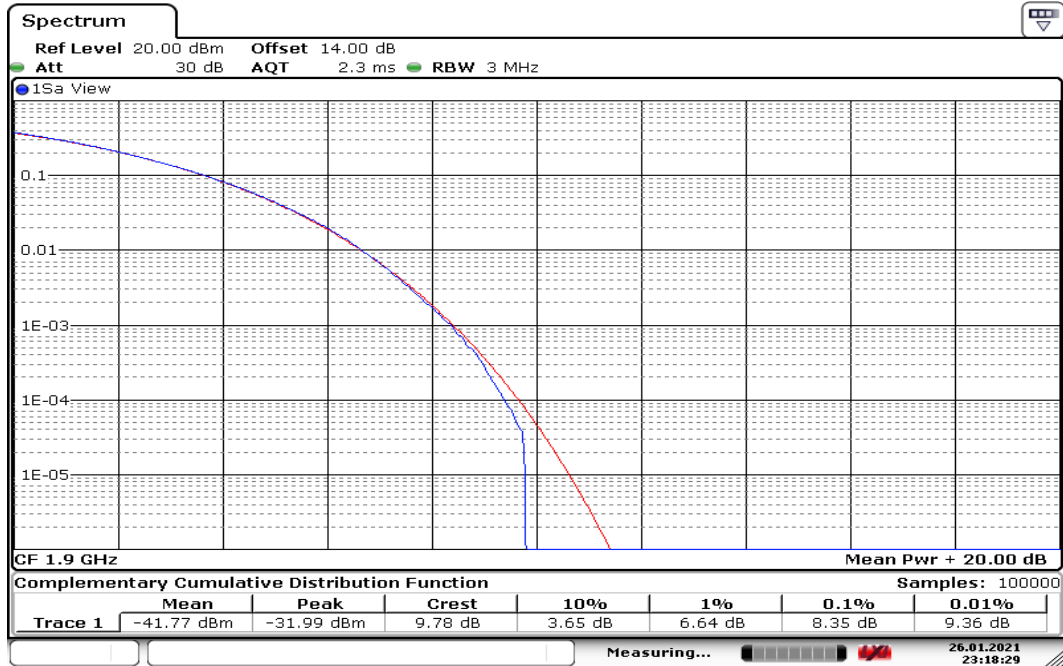

Date: 26 JAN 2021 23:18:30

8.5 CONDUCTED BAND EDGE MEASUREMENT

Limit

FCC §24.238(a), Band 2

For operations in the 1850-1910 and 1930-1950 MHz band , Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Test Procedures

KDB 971168 D01,

1. RBW $\geq$ 1% of the emission bandwidth
2. VBW $\geq$ 3 x RBW
3. Span was set large enough so as to capture all out of emissions near the band edge.


Test Results:

Temperature: 22.3°C


Humidity: 57% RH

Tested by: Dally Hong

Test Date: January 28, 2021

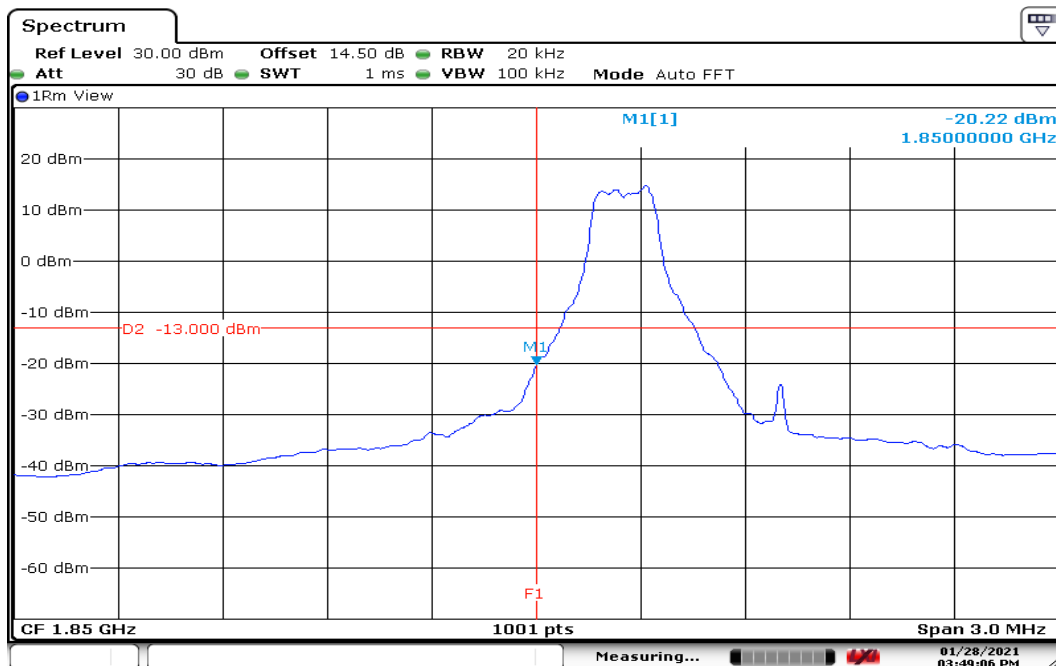LTE Band 2**CHANNEL BANDWIDTH: 1.4MHz / QPSK / 1RB ALLOCATED****LOWER BAND EDGE**


Date: 28 JAN 2021 15:49:06

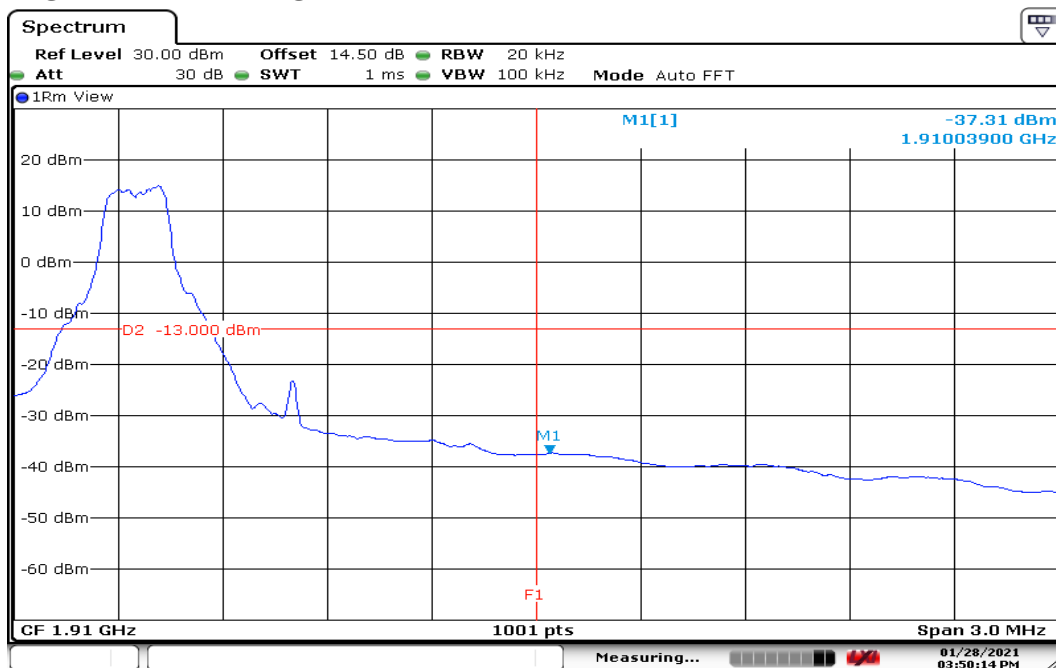HIGHER BAND EDGE

Date: 28 JAN 2021 15:50:14


Report No.: T201116W03-RP1

CHANNEL BANDWIDTH: 3MHz / QPSK / 1RB ALLOCATED LOWER BAND EDGE

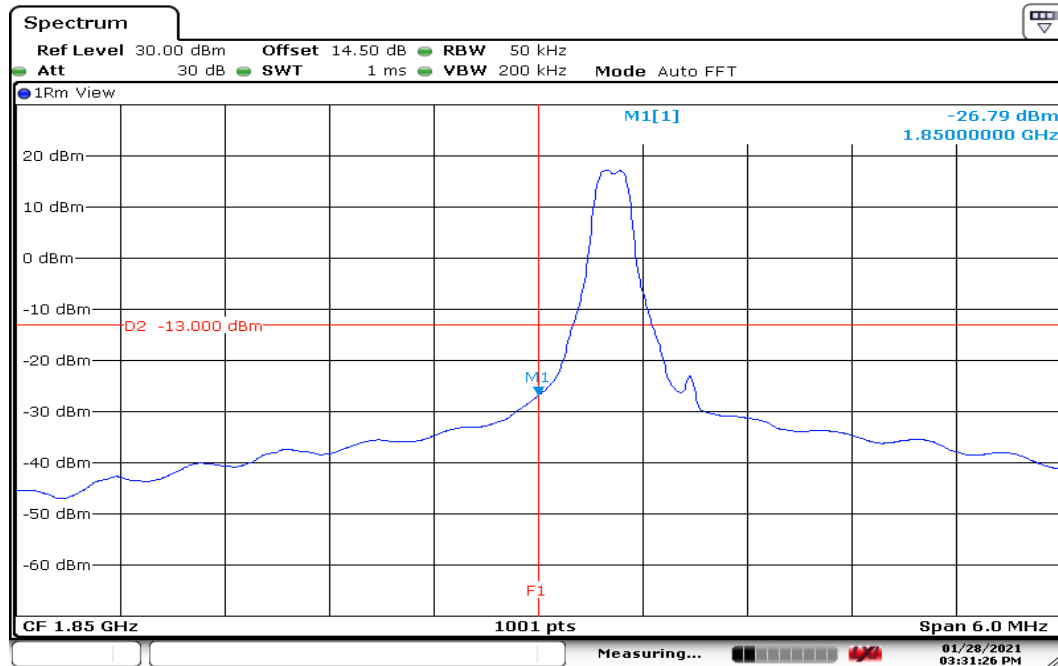

Date: 28 JAN 2021 15:31:27


HIGHER BAND EDGE

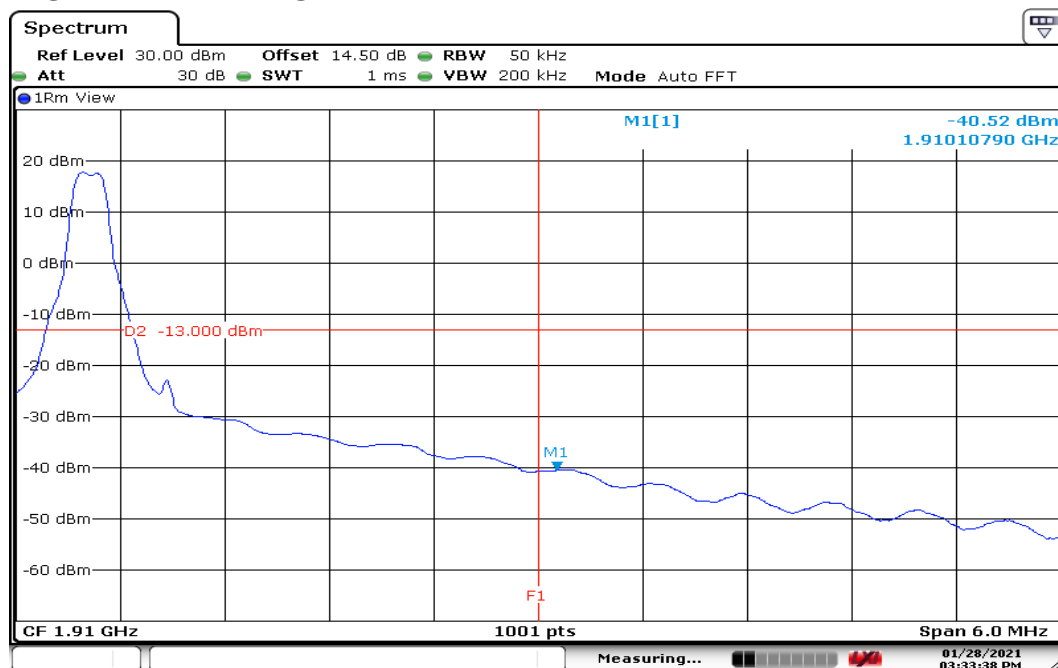

Date: 28 JAN 2021 15:33:39


Report No.: T201116W03-RP1

CHANNEL BANDWIDTH: 5MHz / QPSK / 1RB ALLOCATED LOWER BAND EDGE

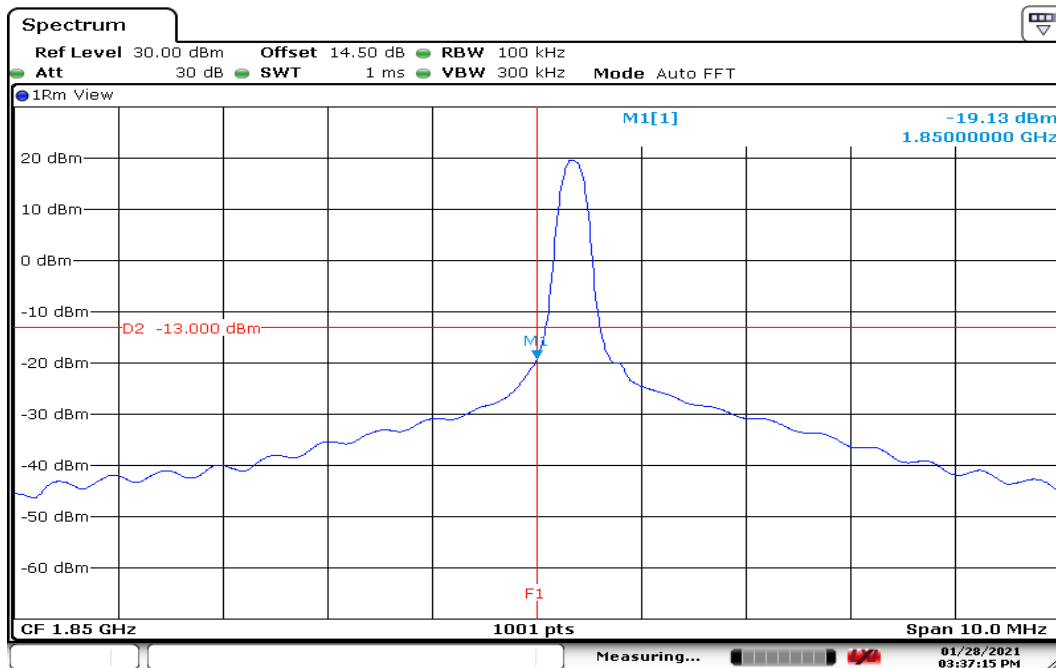

Date: 28 JAN 2021 15:37:16


HIGHER BAND EDGE

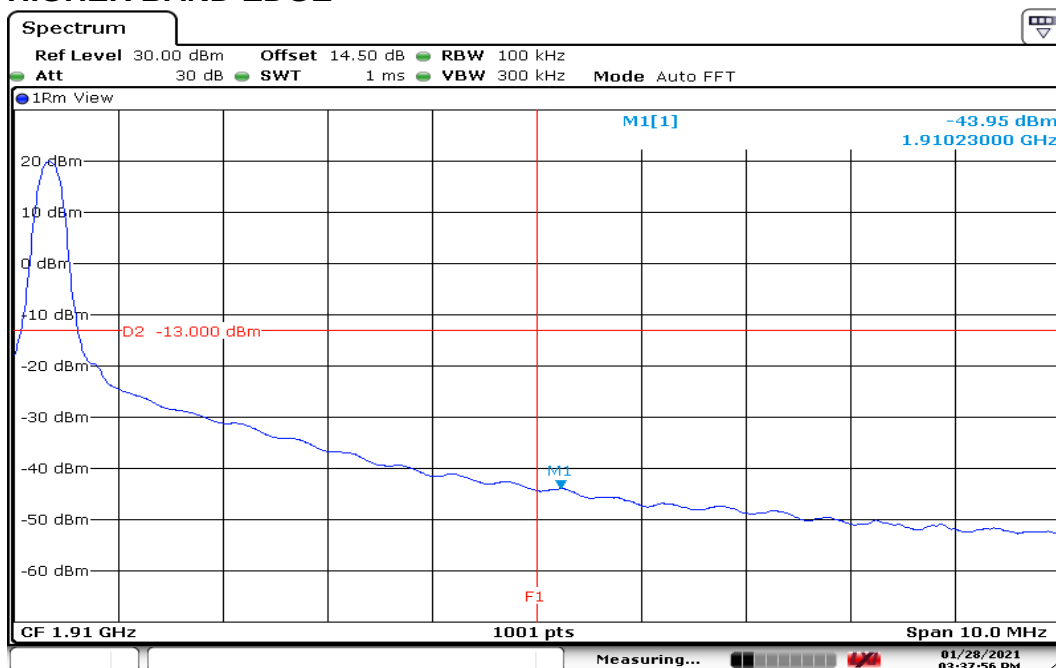

Date: 28 JAN 2021 15:37:56


Report No.: T201116W03-RP1

CHANNEL BANDWIDTH: 10MHz / QPSK / 1RB ALLOCATED LOWER BAND EDGE

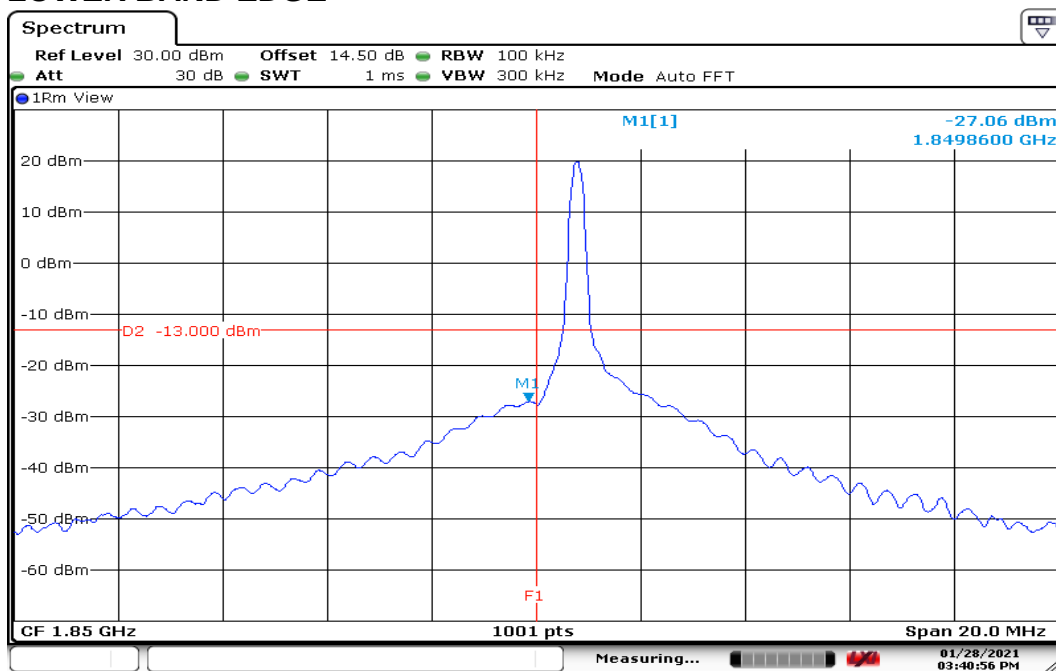

Date: 28 JAN 2021 15:40:57


HIGHER BAND EDGE

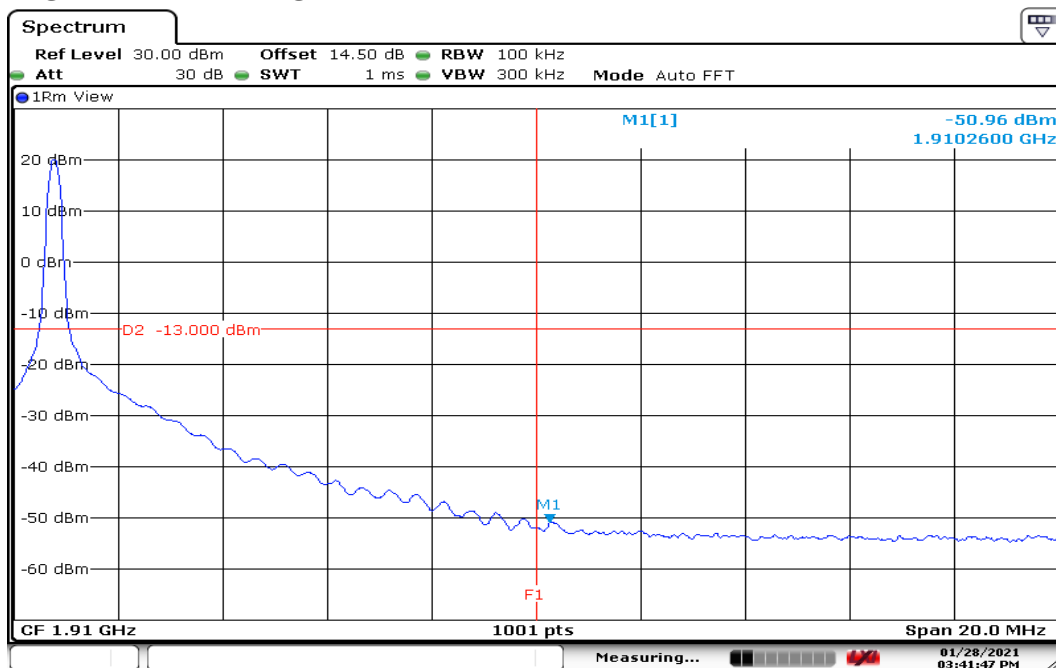

Date: 28 JAN 2021 15:41:47


Report No.: T201116W03-RP1

CHANNEL BANDWIDTH: 15MHz / QPSK / 1RB ALLOCATED LOWER BAND EDGE

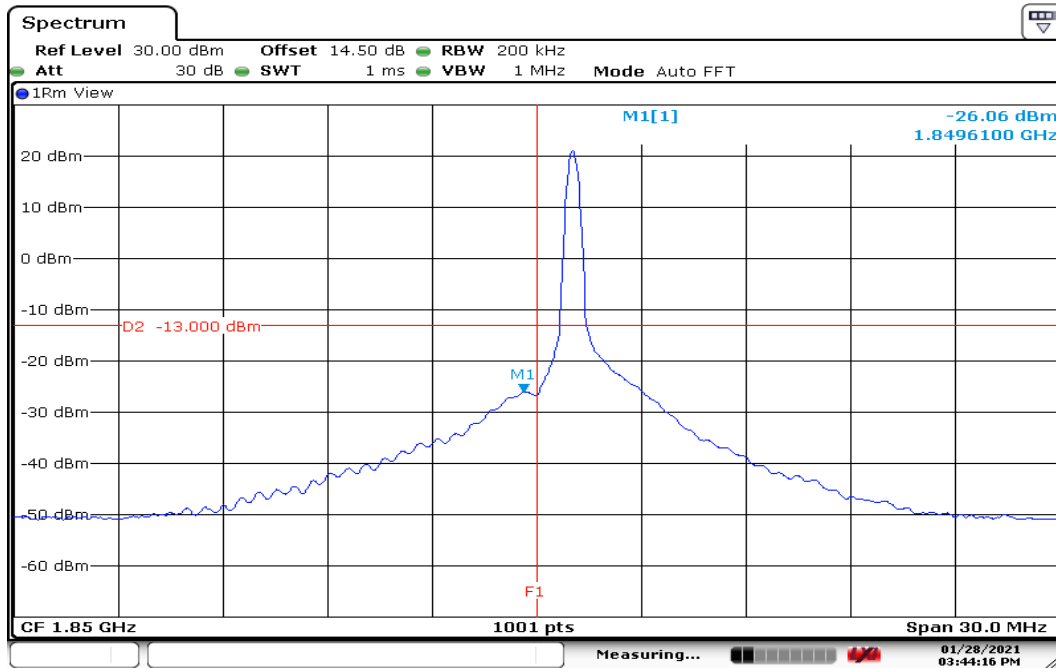

Date: 28 JAN 2021 15:44:17


HIGHER BAND EDGE

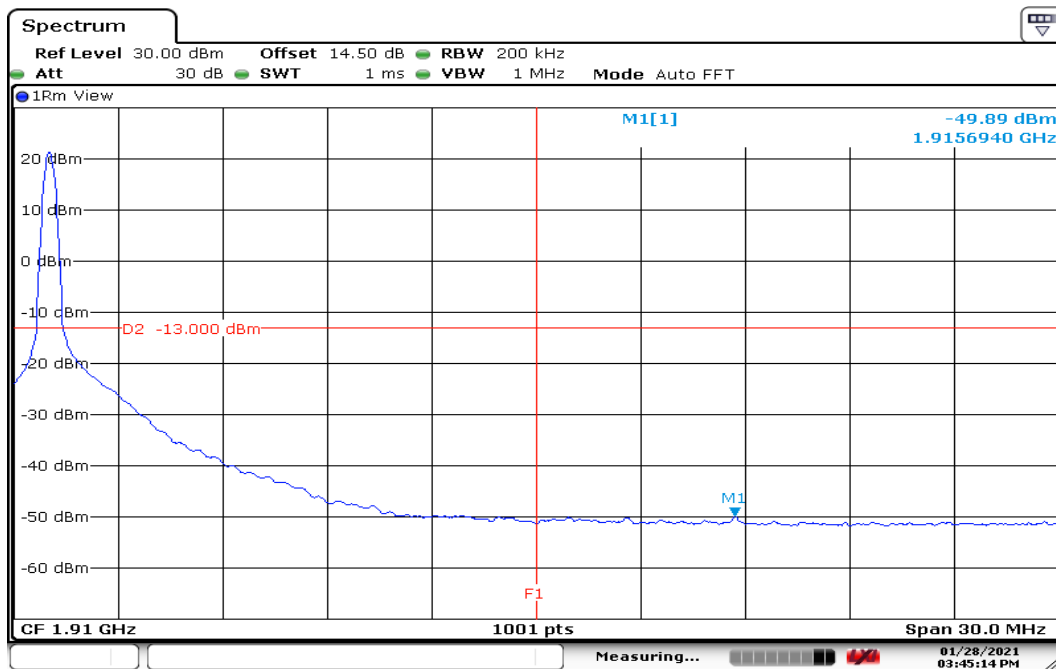

Date: 28 JAN 2021 15:45:14


Report No.: T201116W03-RP1

CHANNEL BANDWIDTH: 20MHz / QPSK / 1RB ALLOCATED LOWER BAND EDGE

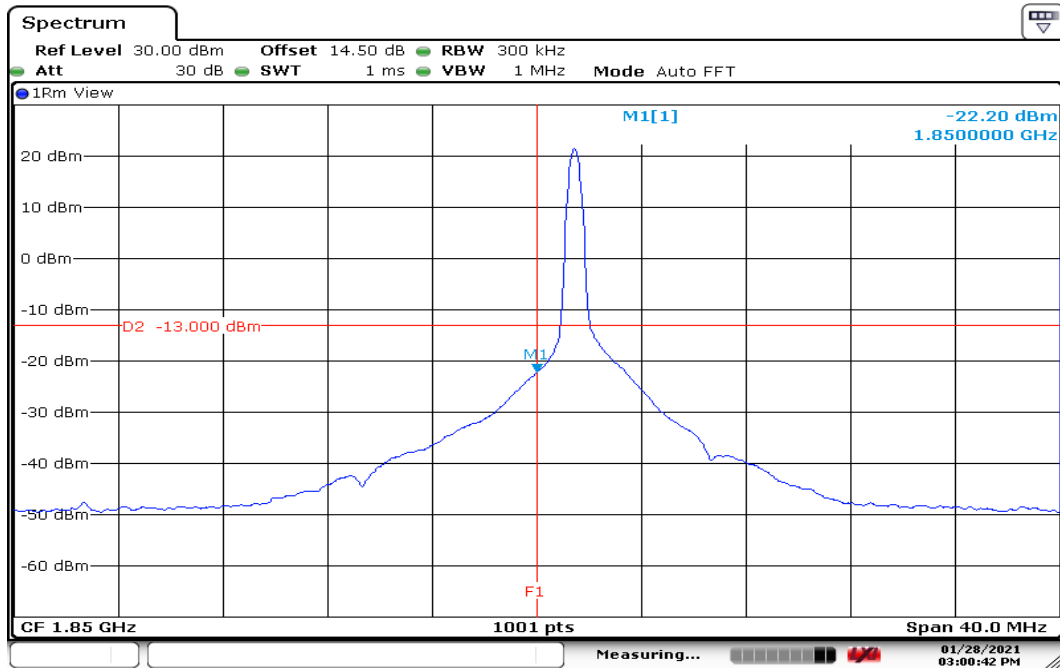

Date: 28 JAN 2021 15:00:42


HIGHER BAND EDGE

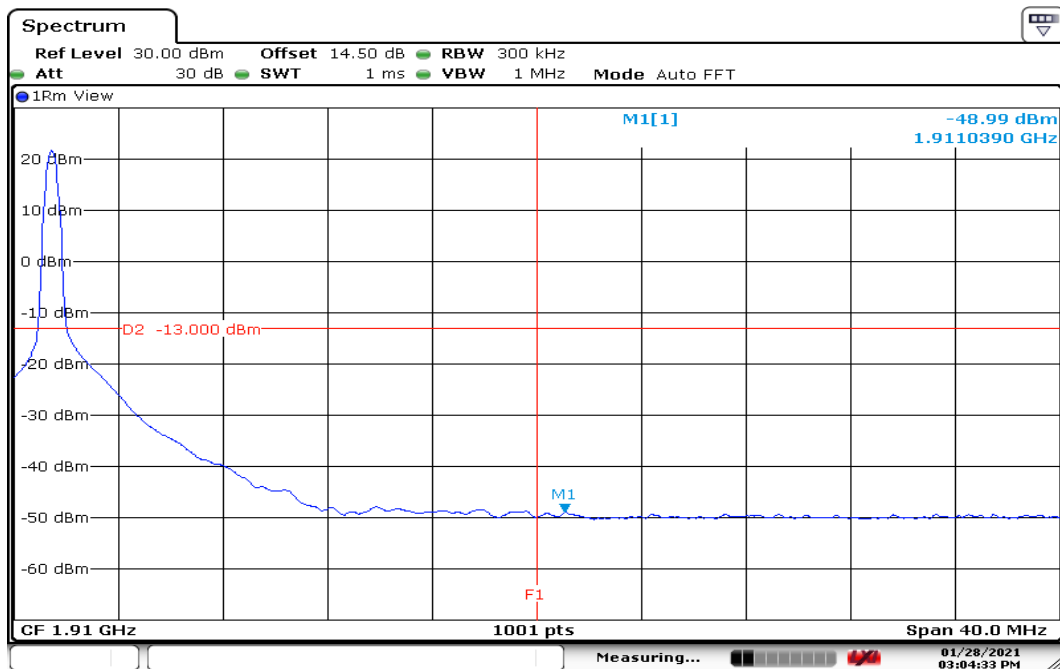

Date: 28 JAN 2021 15:04:33


Report No.: T201116W03-RP1

CHANNEL BANDWIDTH: 1.4MHz / QPSK / 100%RB ALLOCATED LOWER BAND EDGE

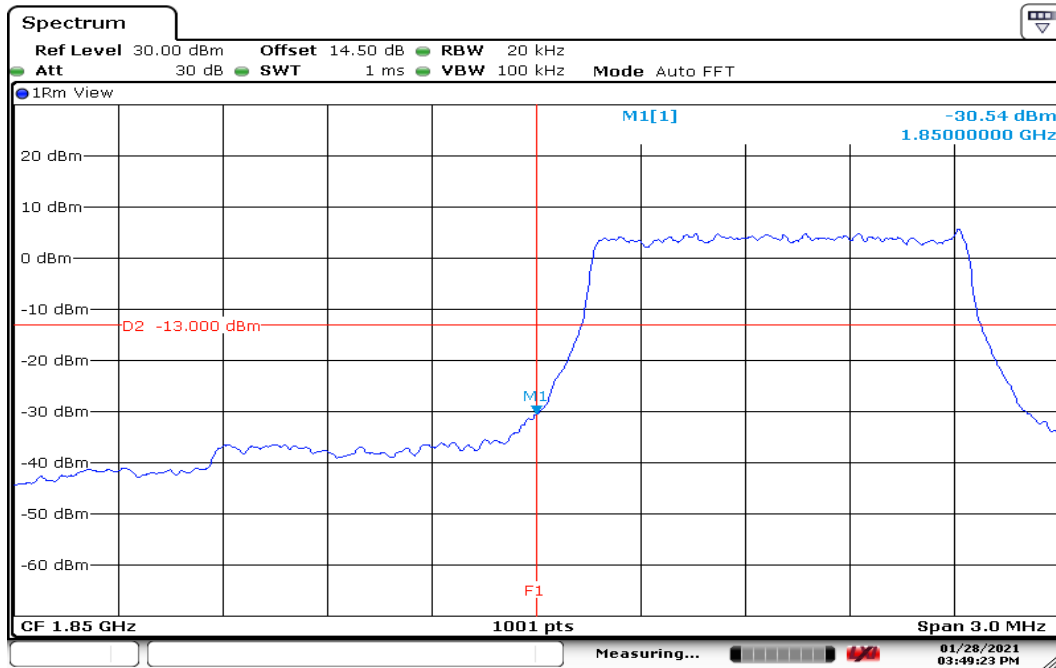

Date: 28 JAN 2021 15:49:23


HIGHER BAND EDGE

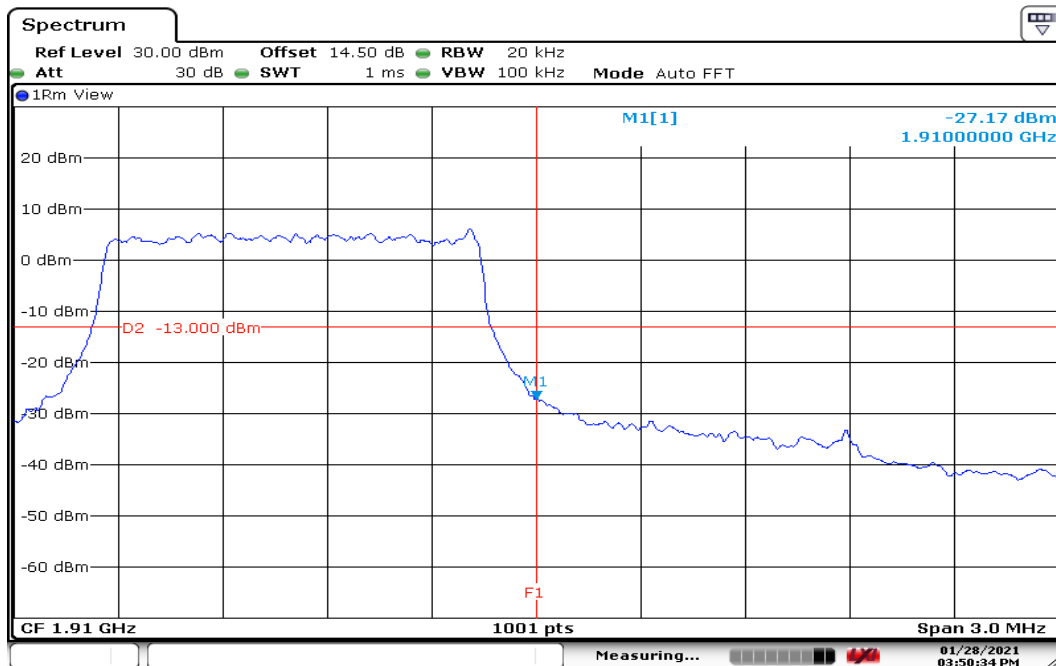

Date: 28 JAN 2021 15:50:35


Report No.: T201116W03-RP1

CHANNEL BANDWIDTH: 3MHz / QPSK / 100%RB ALLOCATED LOWER BAND EDGE

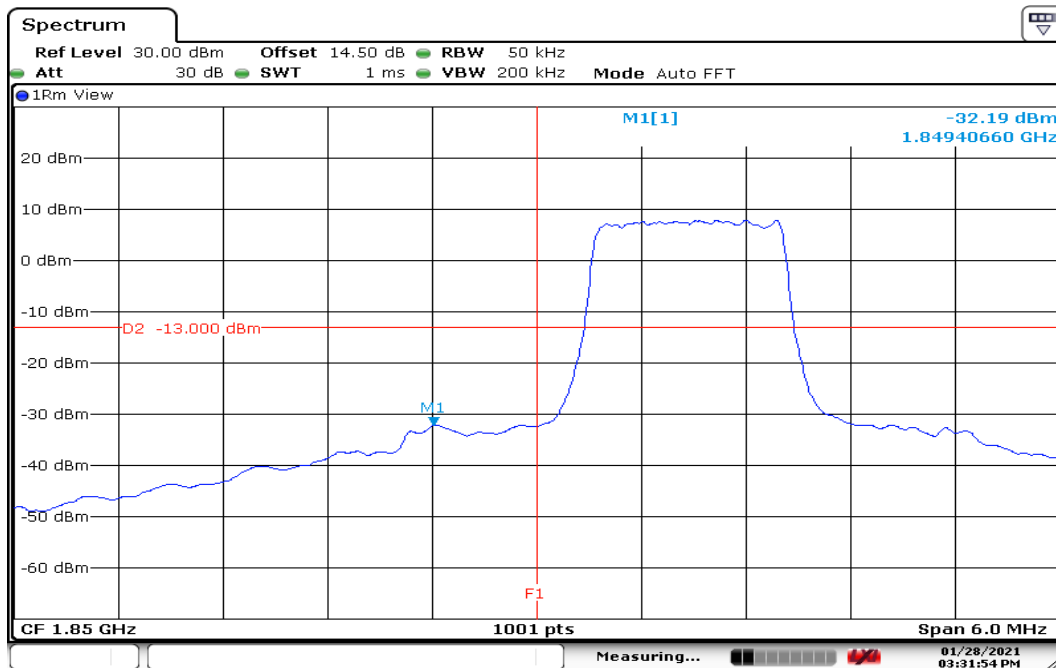

Date: 28 JAN 2021 15:31:54


HIGHER BAND EDGE

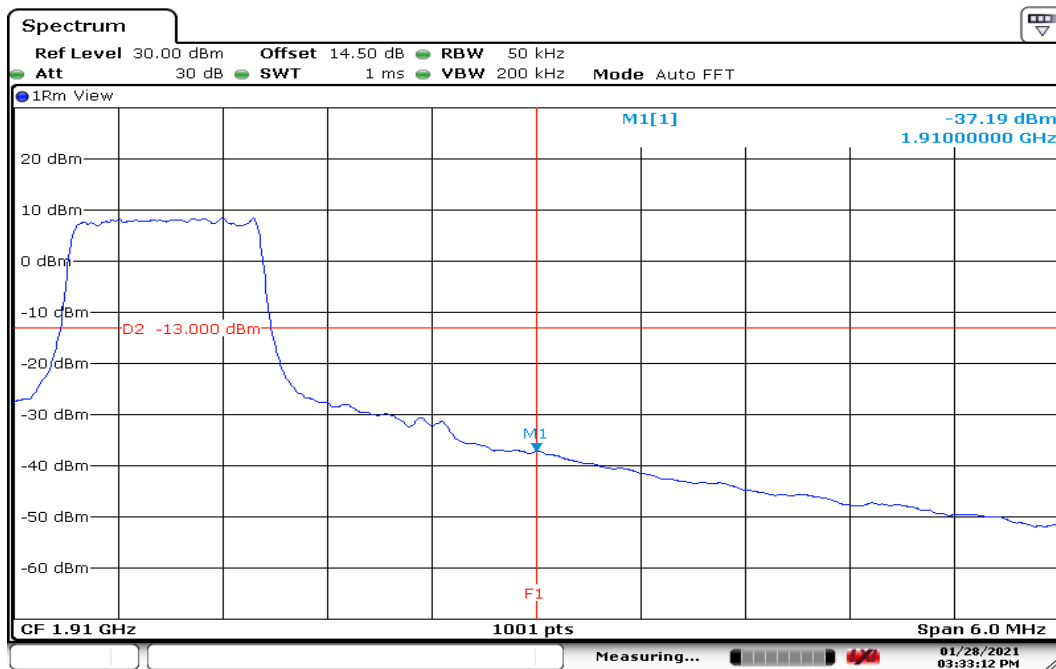

Date: 28 JAN 2021 15:33:12


Report No.: T201116W03-RP1

CHANNEL BANDWIDTH: 5MHz / QPSK / 100%RB ALLOCATED LOWER BAND EDGE

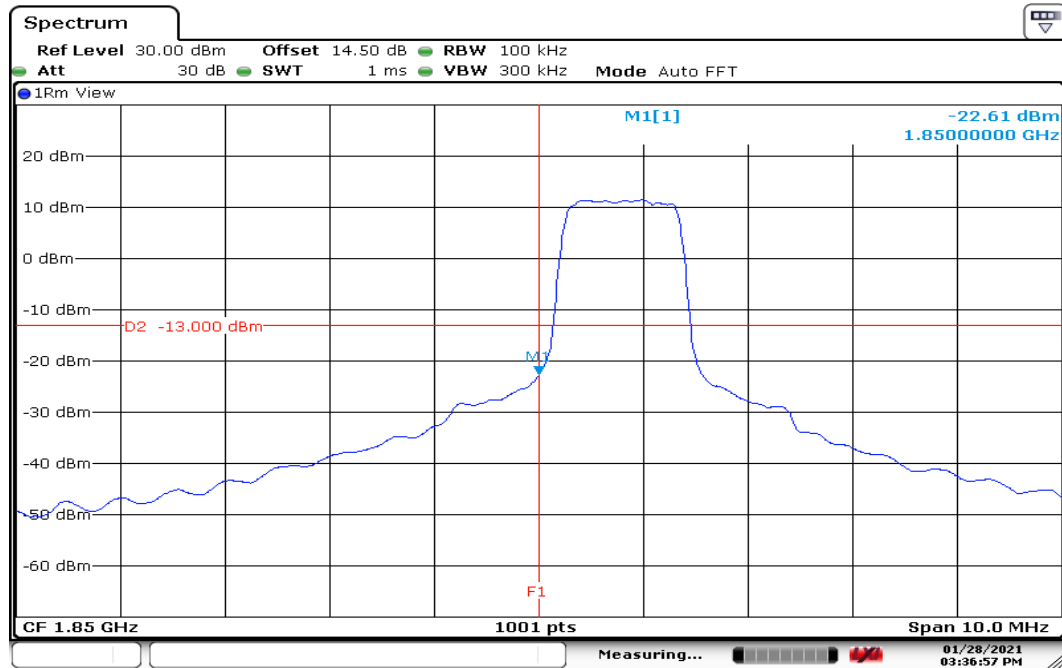

Date: 28 JAN 2021 15:36:57


HIGHER BAND EDGE

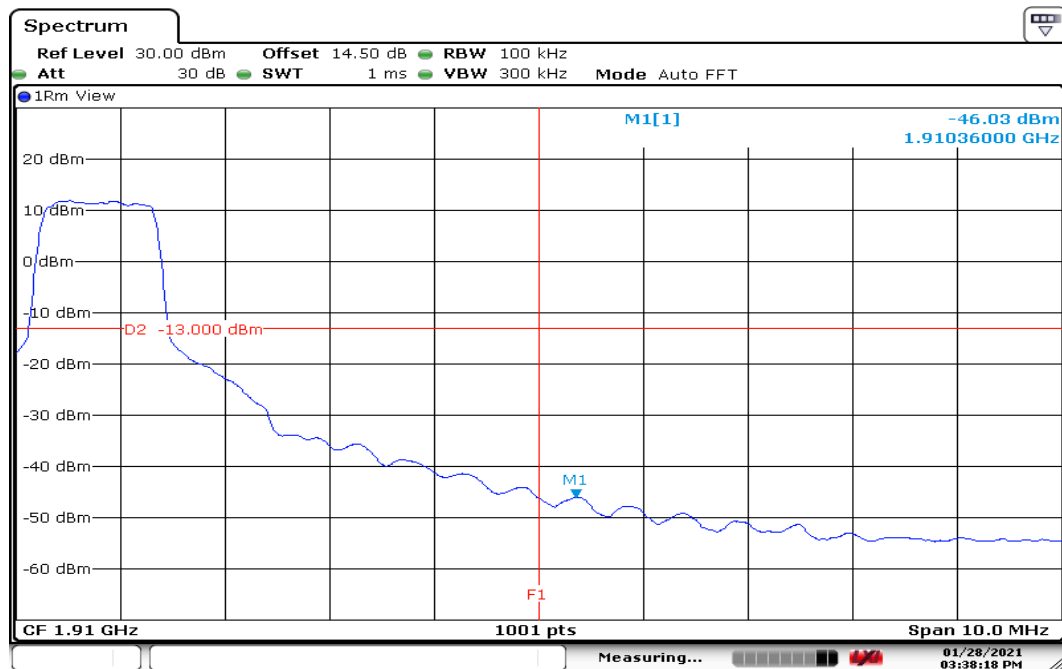

Date: 28 JAN 2021 15:38:18


Report No.: T201116W03-RP1

CHANNEL BANDWIDTH: 10MHz / QPSK / 100%RB ALLOCATED LOWER BAND EDGE

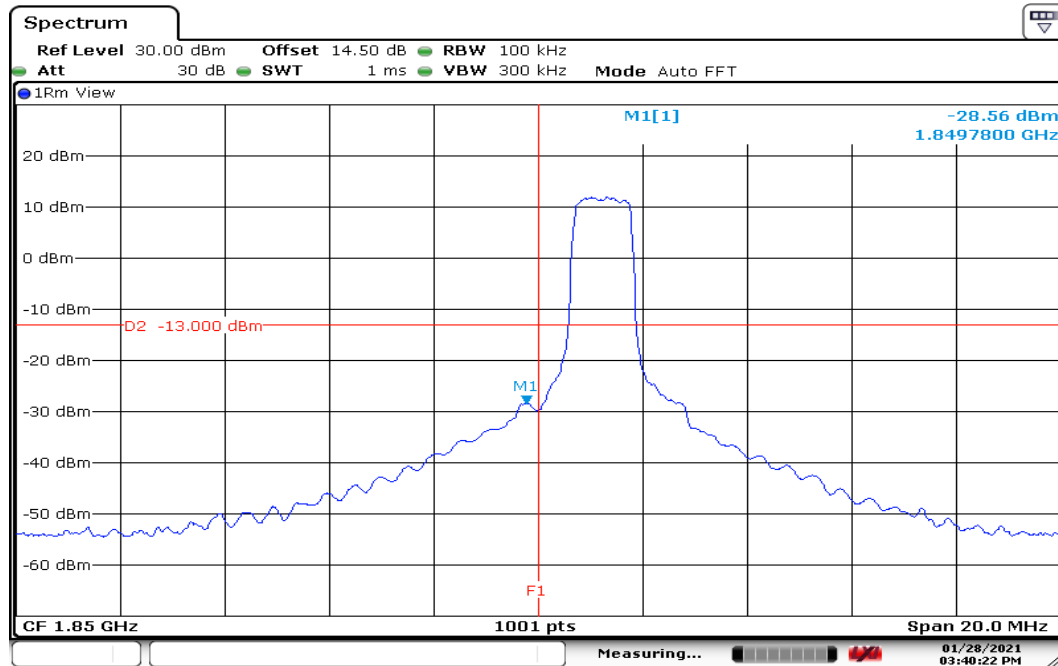

Date: 28 JAN 2021 15:40:22


HIGHER BAND EDGE

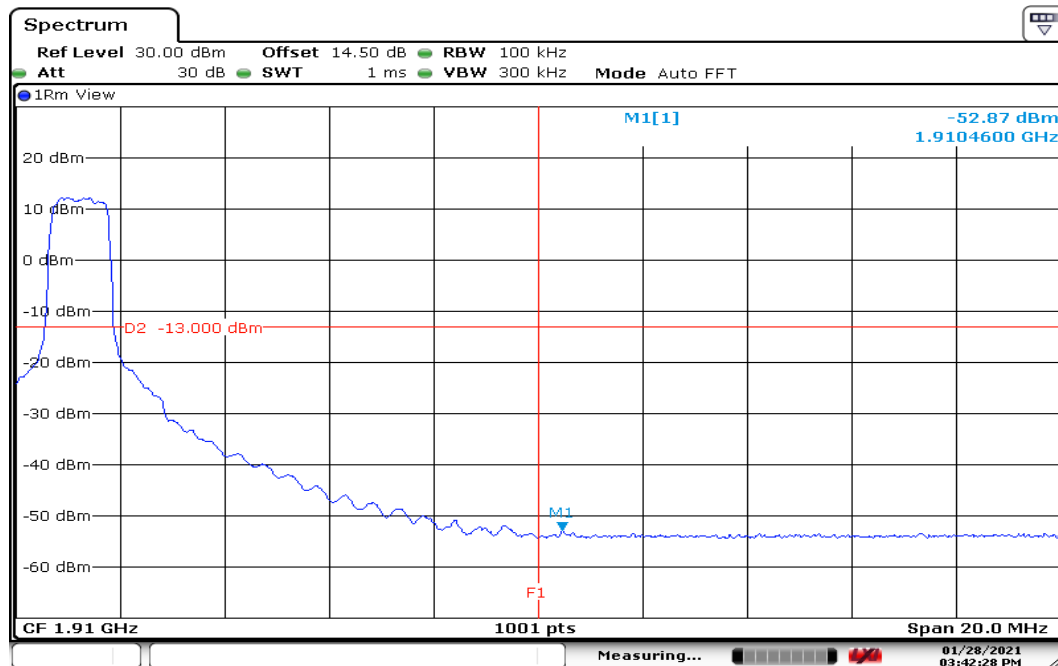

Date: 28 JAN 2021 15:42:29


Report No.: T201116W03-RP1

CHANNEL BANDWIDTH: 15MHz / QPSK / 100%RB ALLOCATED LOWER BAND EDGE

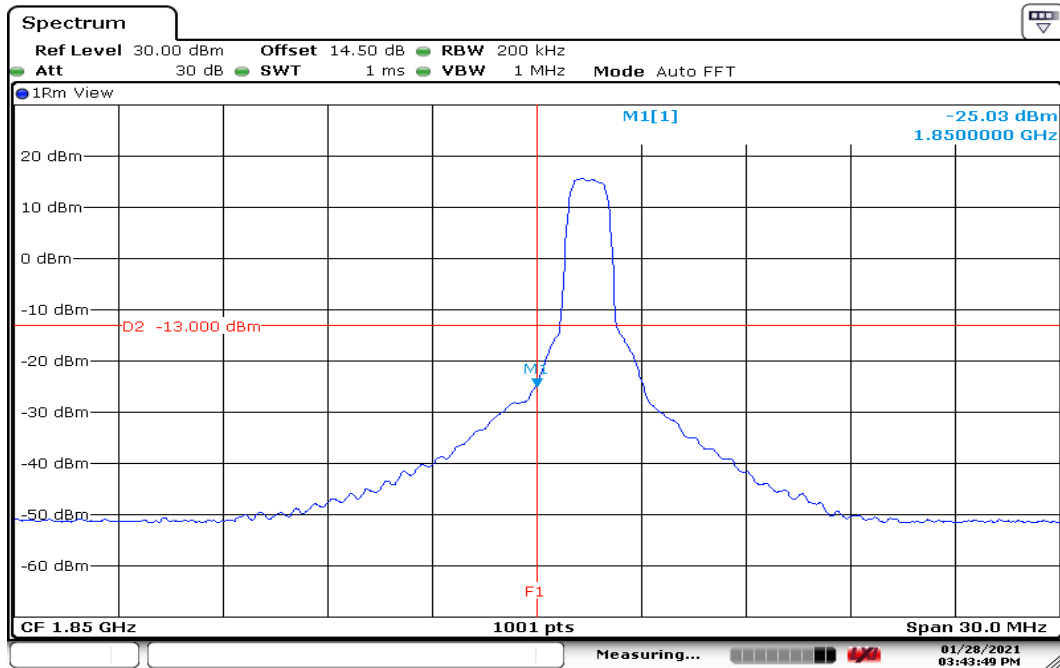

Date: 28 JAN 2021 15:43:48


HIGHER BAND EDGE

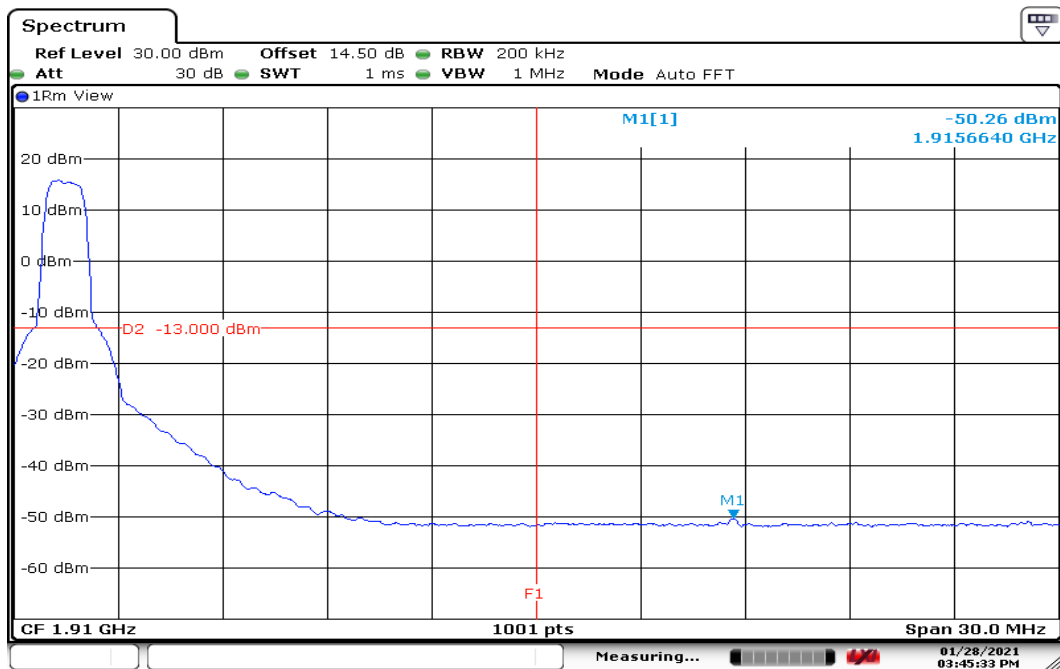

Date: 28 JAN 2021 15:45:33


Report No.: T201116W03-RP1

CHANNEL BANDWIDTH: 20MHz / QPSK / 100%RB ALLOCATED LOWER BAND EDGE

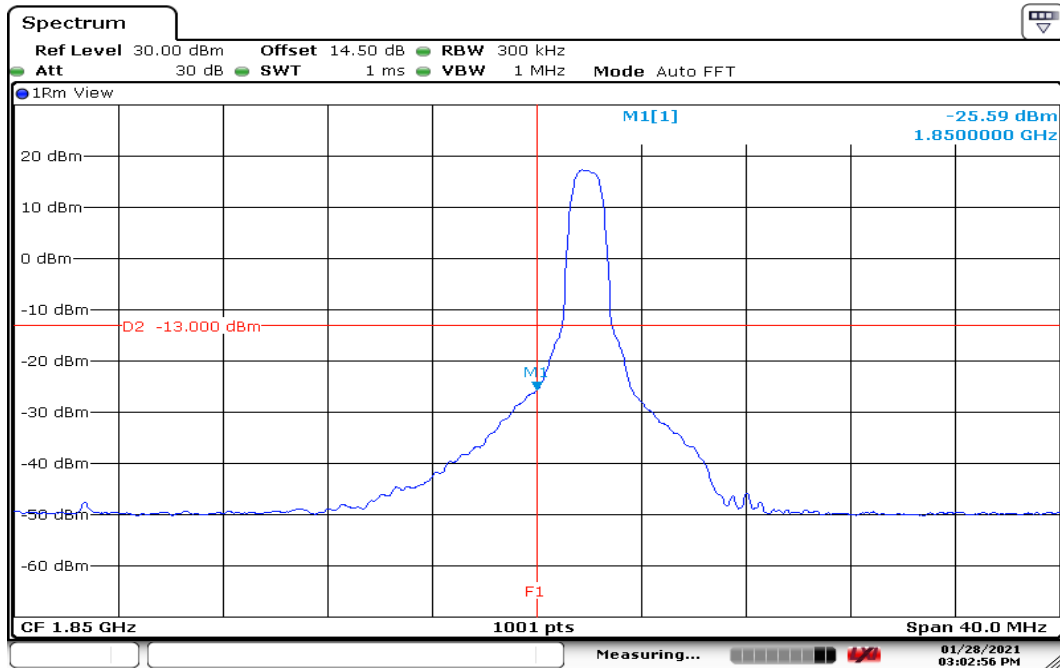

Date: 28 JAN 2021 15:02:56

HIGHER BAND EDGE

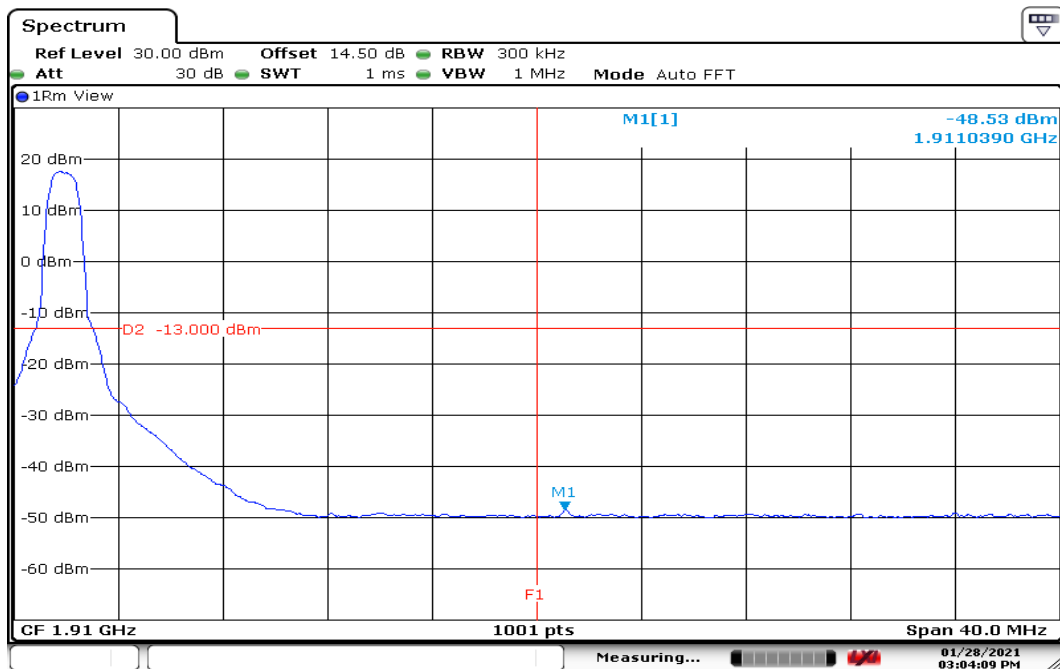

Date: 28 JAN 2021 15:04:09



Report No.: T201116W03-RP1

Page: 100 / 132

Rev.: 01

8.6 CONDUCTED SPURIOUS EMISSIONS

Limits

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

Test Procedures

1. According to KDB 971168 D01,
2. The EUT was connect to spectrum analyzer and call box.
3. The RF output of EUT was connected to the spectrum analyzer.
4. Set the spectrum analyzer , RBW=1MHz, VBW=3MHz.
5. Record the maximum spurious emission.
6. The fundamental frequency should be excluded against the limit in operating band.

Test Results

Temperature: 23.4°C

Humidity: 55.2% RH

Tested by: Dally Hong


Test Date: January 27, 2021

LTE Band 2

QPSK / 1RB


CHANNEL BANDWIDTH: 1.4MHz / 30MHz-3GHz

CH Low

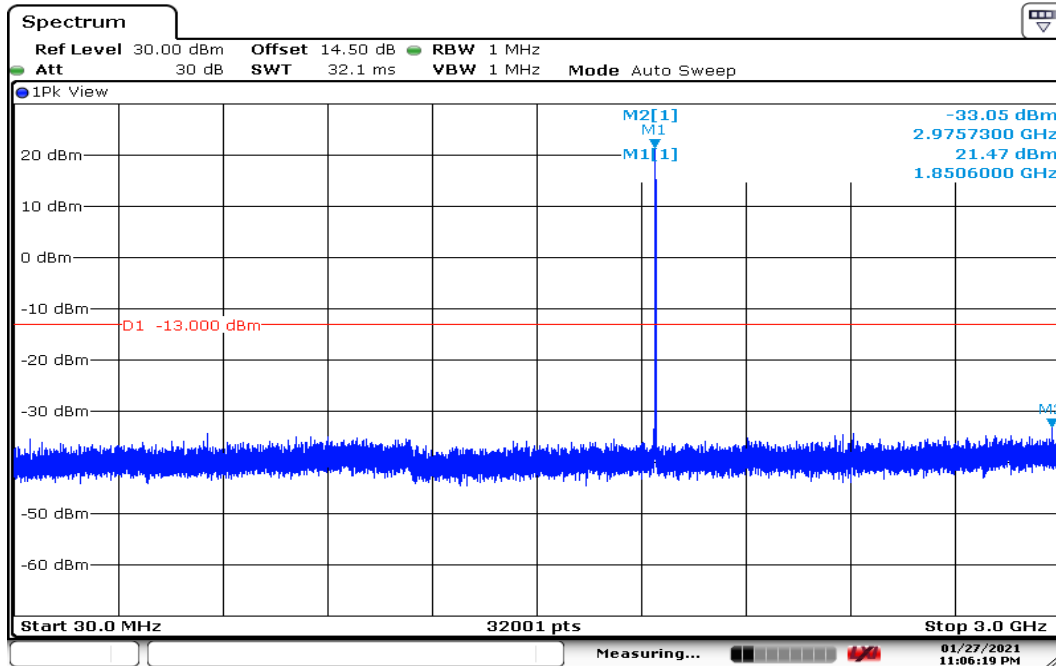

Date: 27 JAN 2021 23:06:19

CH Mid

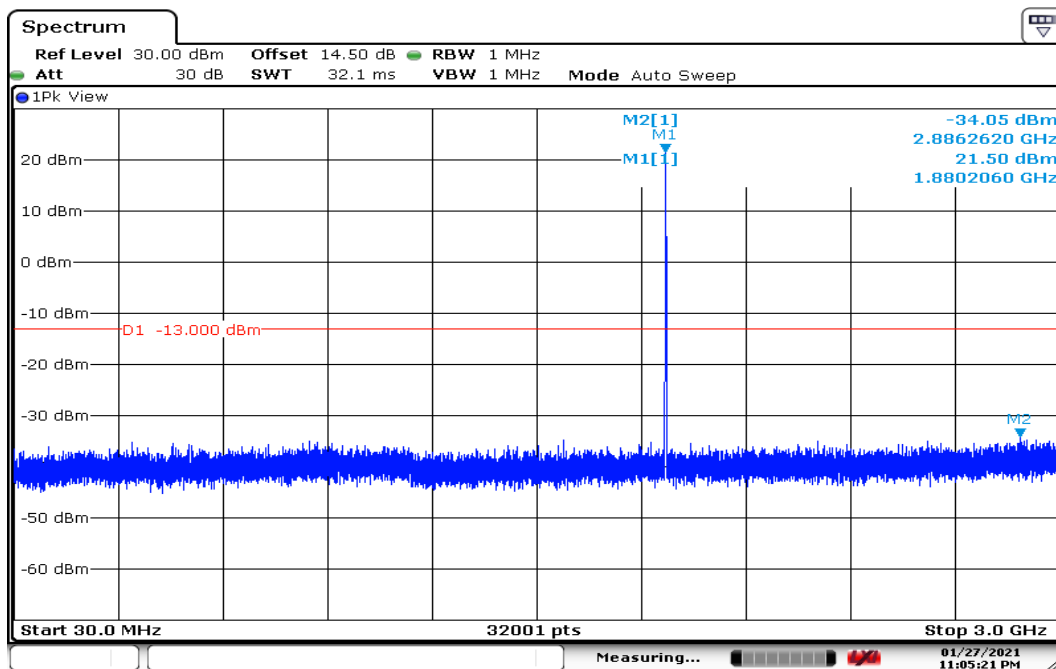

Date: 27 JAN 2021 23:05:22




Report No.: T201116W03-RP1

Page: 102 / 132

Rev.: 01


CH High

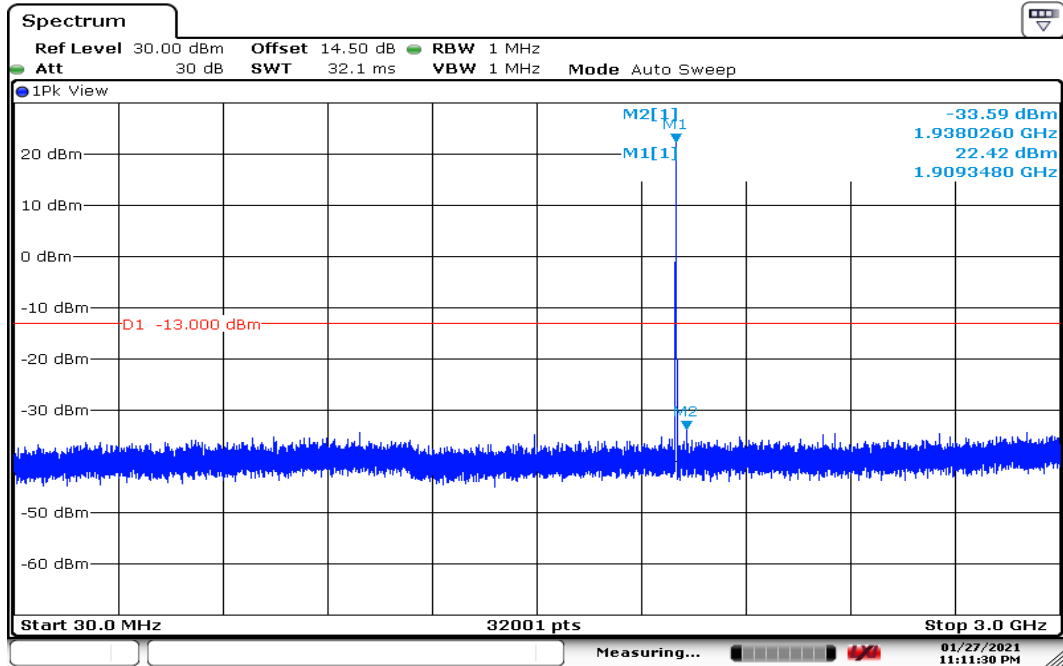


Date: 27 JAN 2021 23:11:30



Report No.: T201116W03-RP1

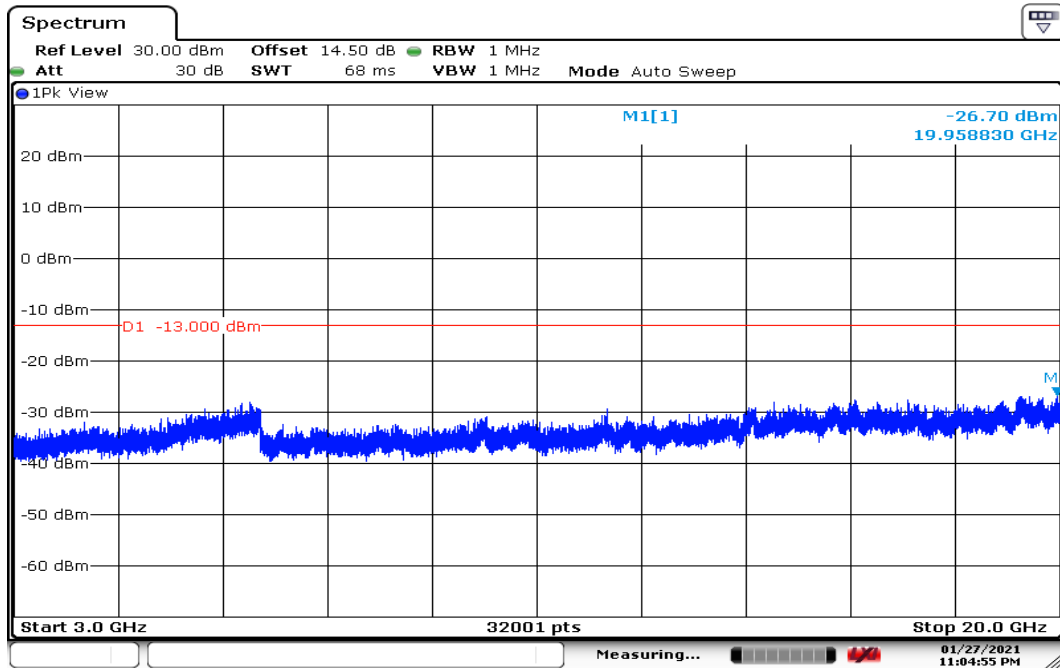CHANNEL BANDWIDTH: 1.4MHz / 3GHz-20GHz**CH Low**

Date: 27 JAN 2021 23:04:55

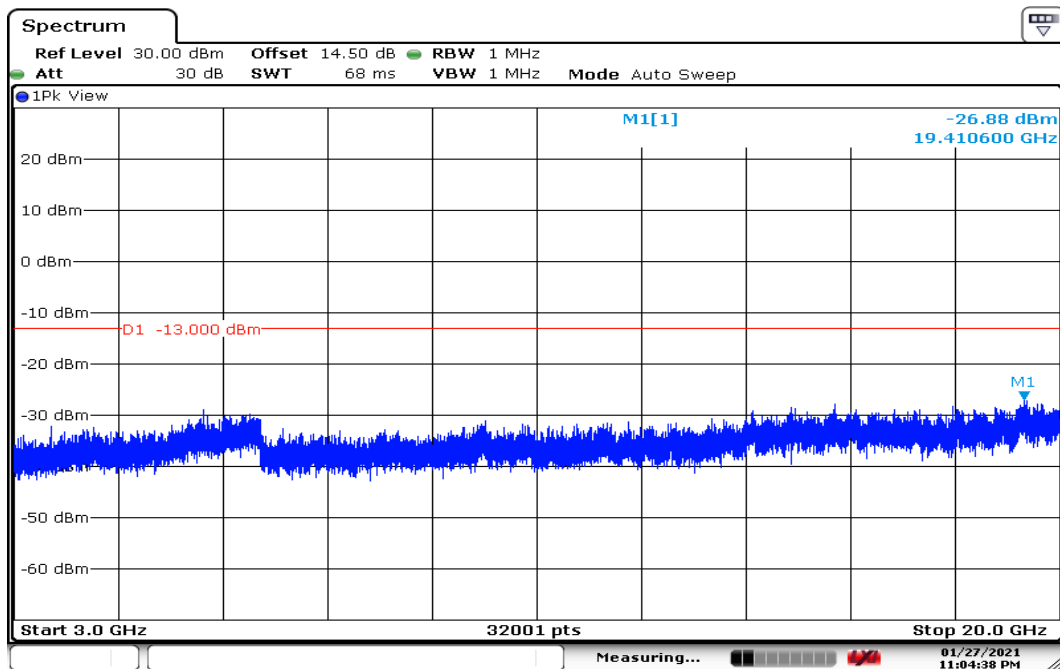CH Mid

Date: 27 JAN 2021 23:04:38




Report No.: T201116W03-RP1

Page: 104 / 132

Rev.: 01


CH High

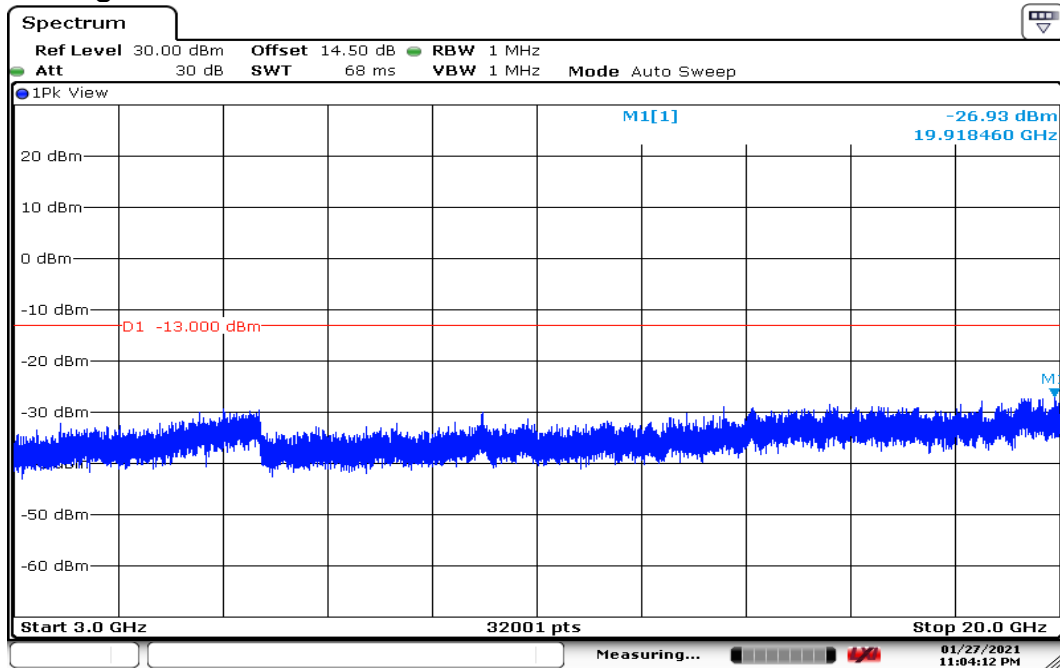

Date: 27 JAN 2021 23:04:13


CHANNEL BANDWIDTH: 3MHz / 30MHz-3GHz

CH Low

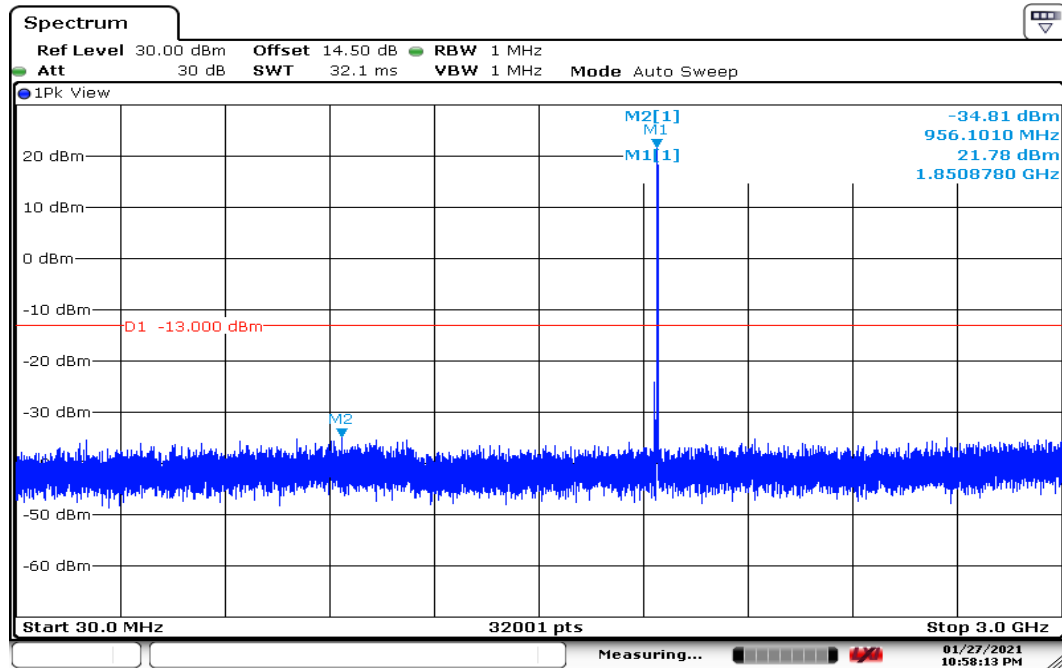

Date: 27 JAN 2021 22:58:13

CH Mid

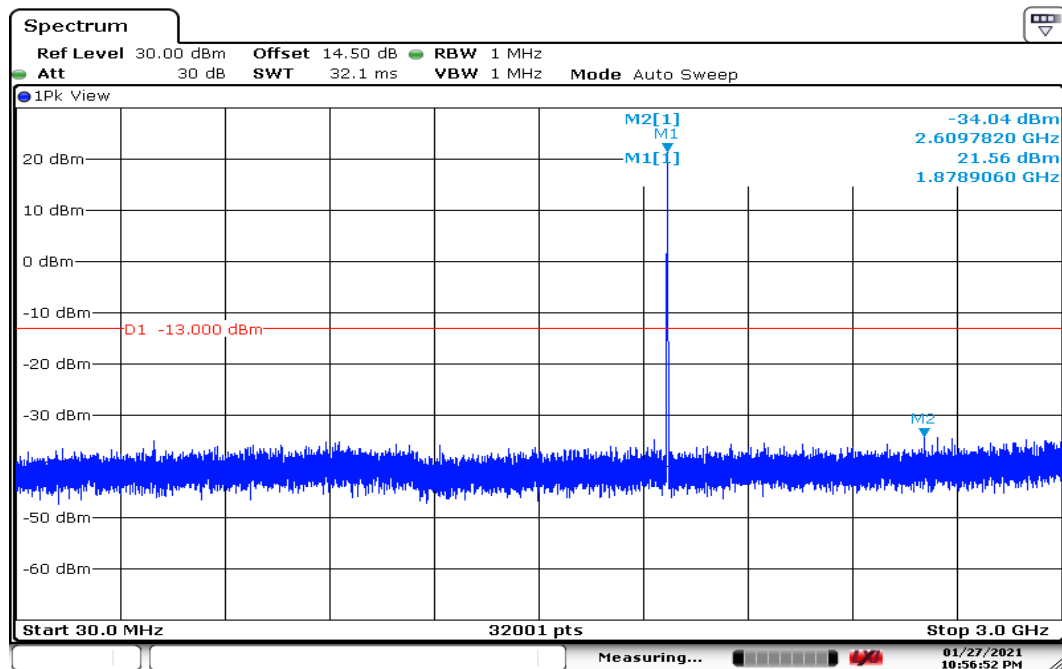

Date: 27 JAN 2021 22:56:52




Report No.: T201116W03-RP1

Page: 106 / 132

Rev.: 01


CH High

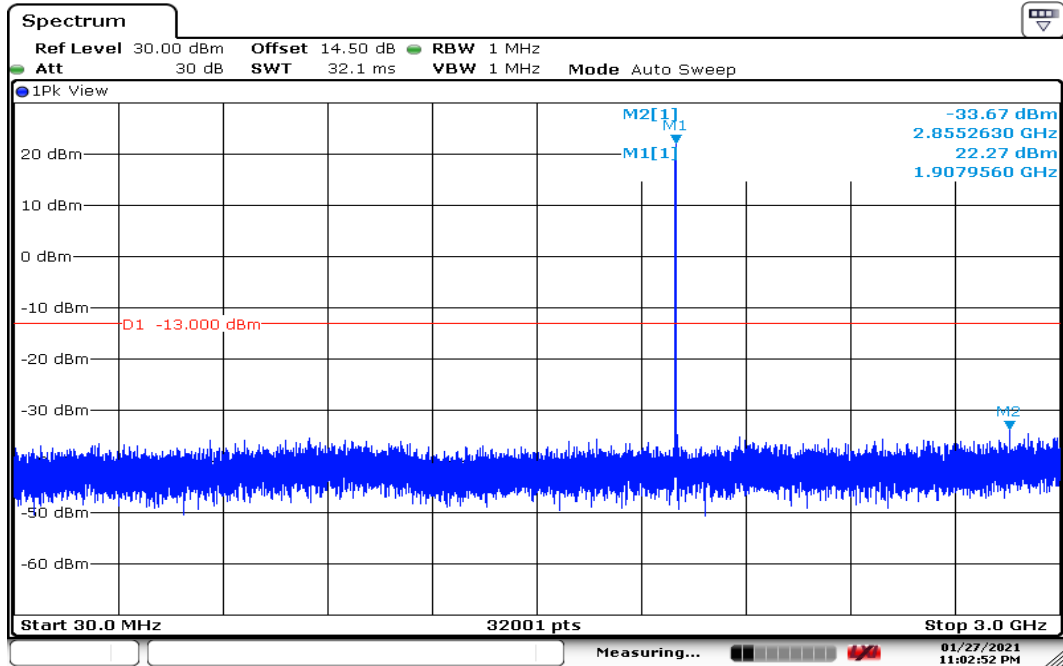


Date: 27 JAN 2021 23:02:52



Report No.: T201116W03-RP1

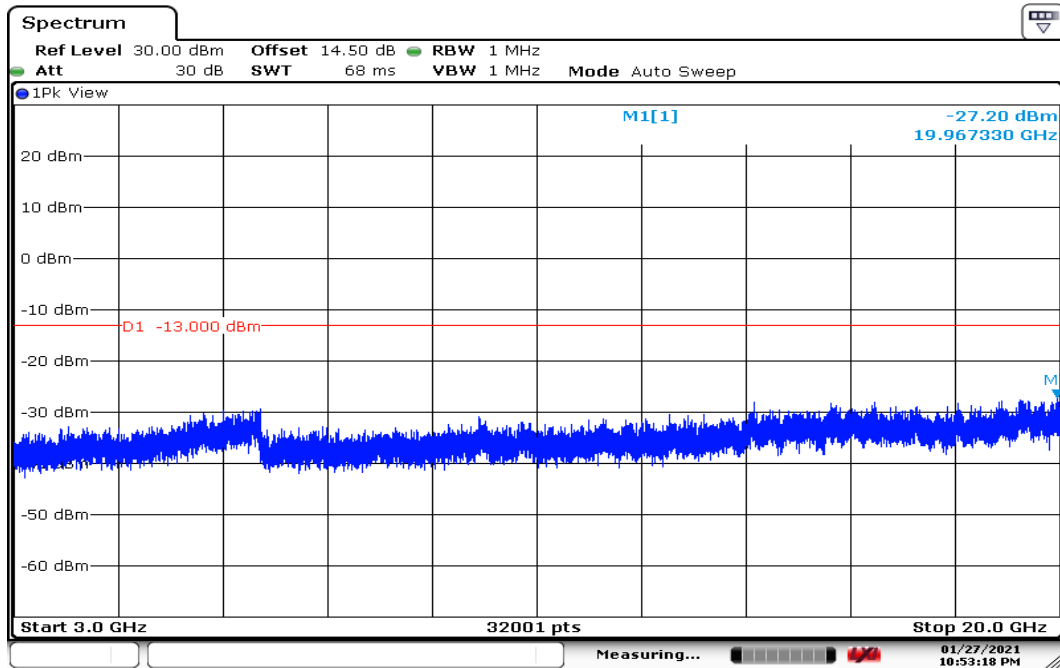CHANNEL BANDWIDTH: 3MHz / 3GHz-20GHz**CH Low**

Date: 27 JAN 2021 22:53:19

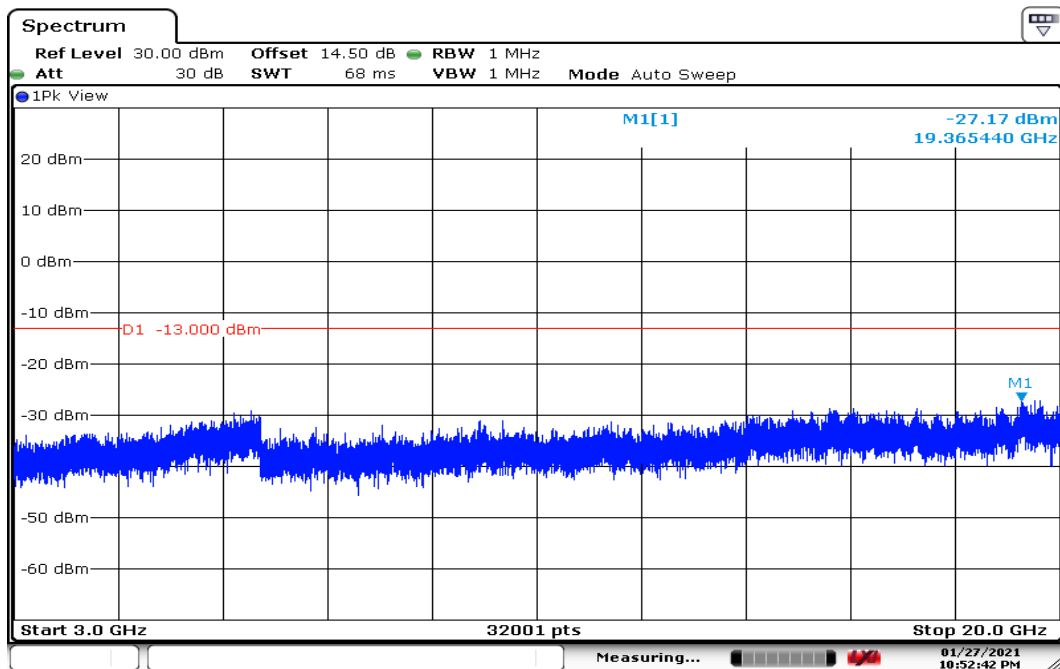CH Mid

Date: 27 JAN 2021 22:52:42




Report No.: T201116W03-RP1

Page: 108 / 132

Rev.: 01


CH High

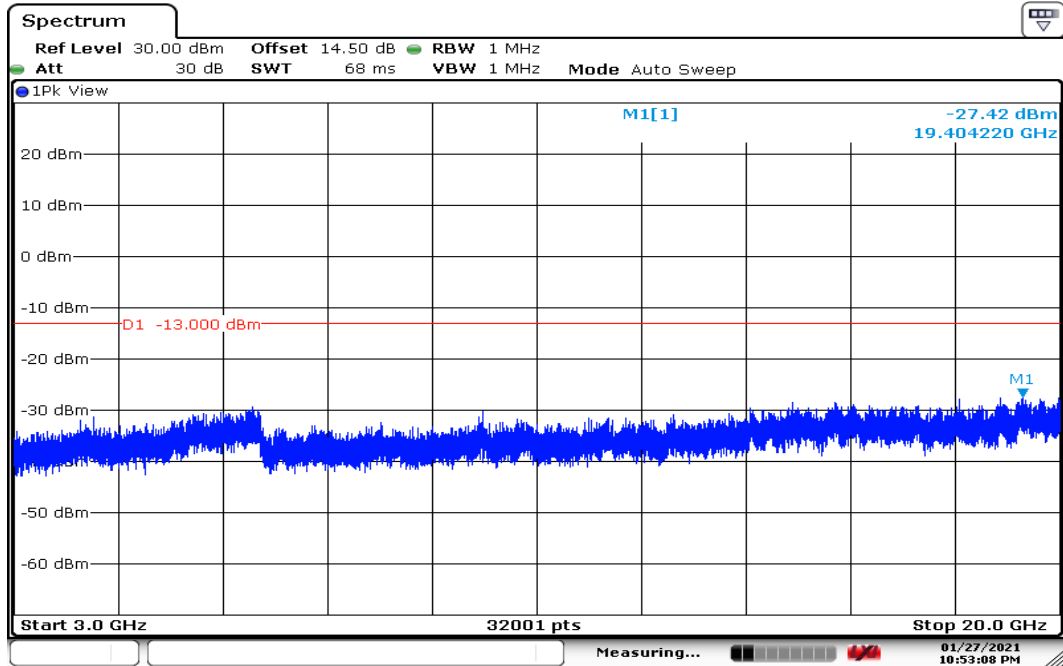

Date: 27 JAN 2021 22:53:09


CHANNEL BANDWIDTH: 5MHz / 30MHz-3GHz

CH Low

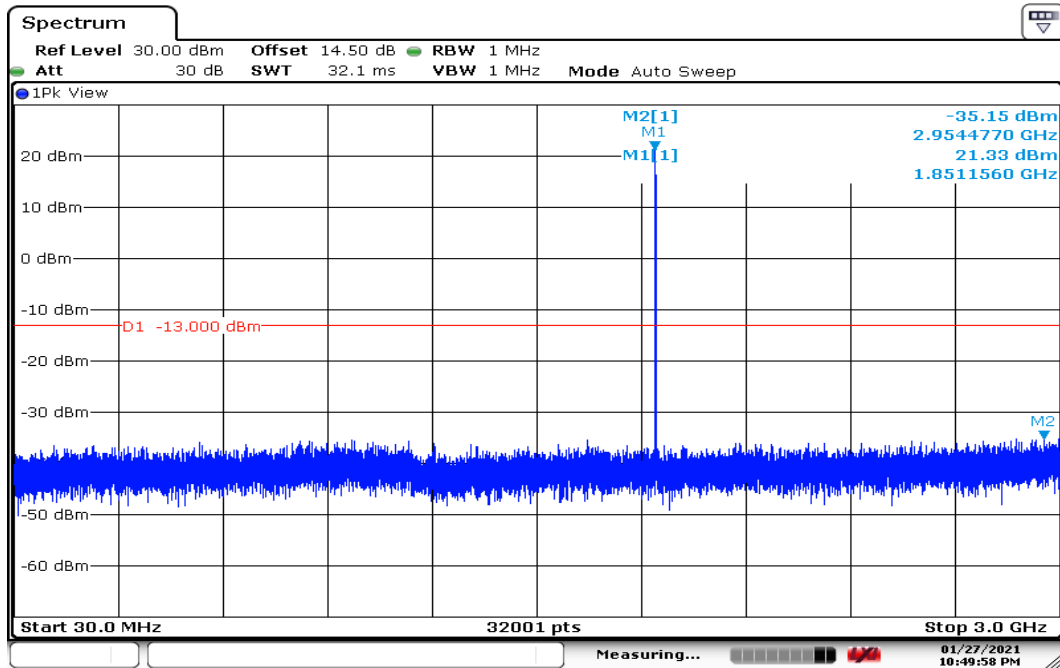

Date: 27 JAN 2021 22:49:58

CH Mid

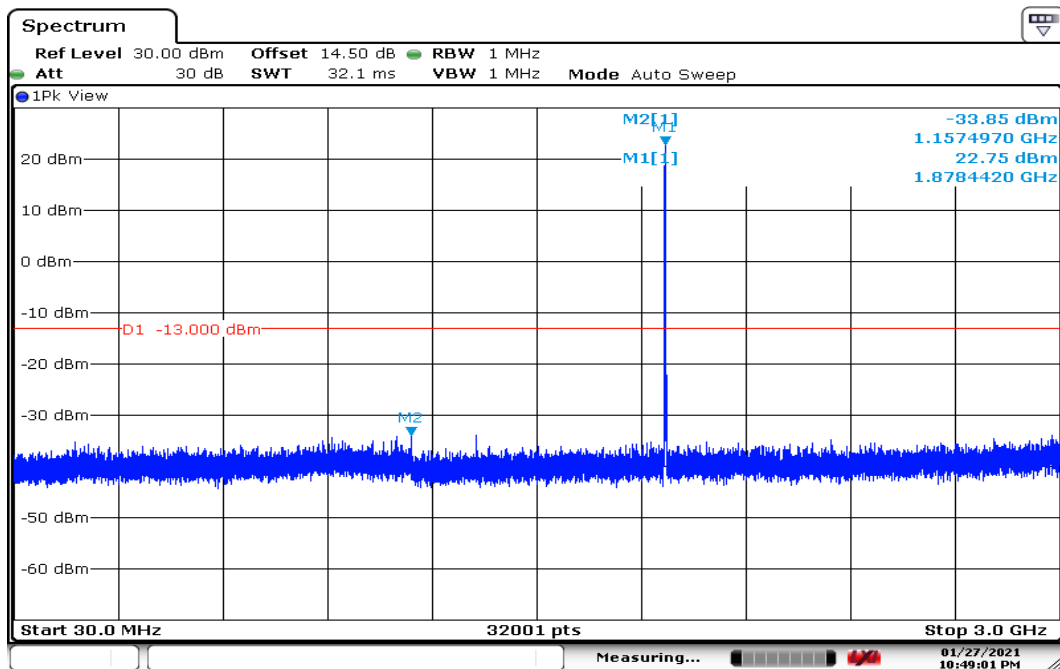

Date: 27 JAN 2021 22:49:01




Report No.: T201116W03-RP1

Page: 110 / 132

Rev.: 01


CH High

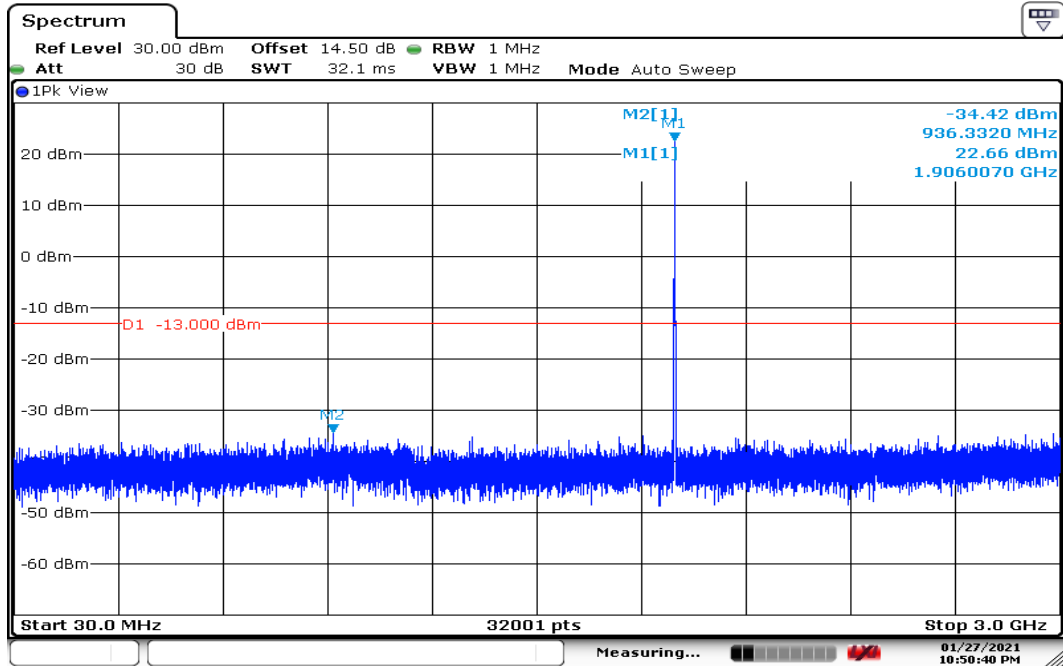


Date: 27 JAN 2021 22:50:40



Report No.: T201116W03-RP1

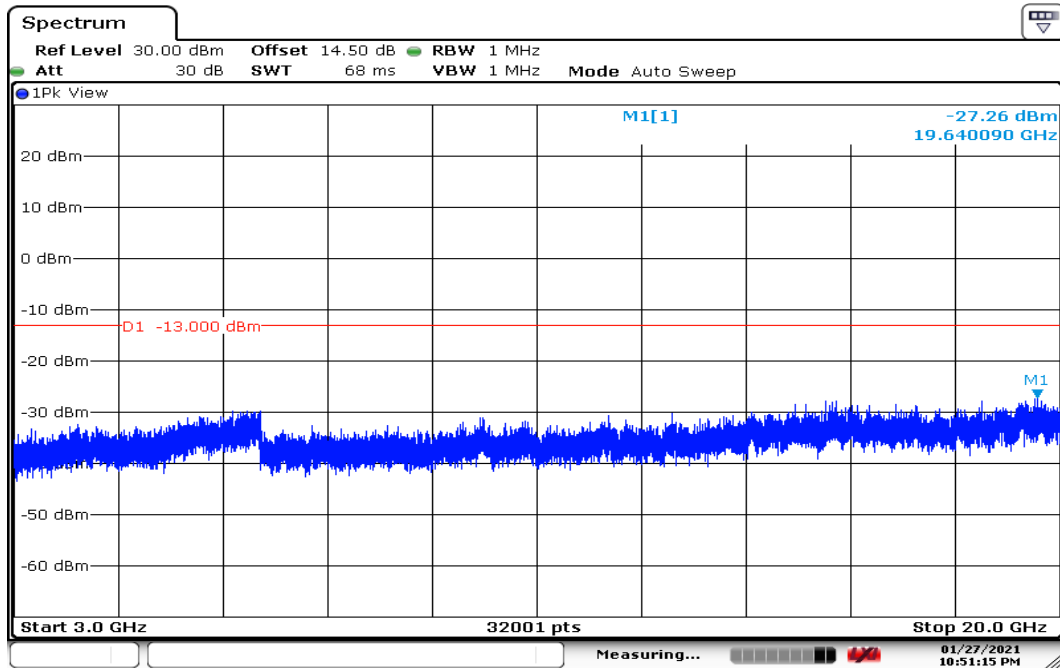CHANNEL BANDWIDTH: 5MHz / 3GHz-20GHz**CH Low**

Date: 27 JAN 2021 22:51:15

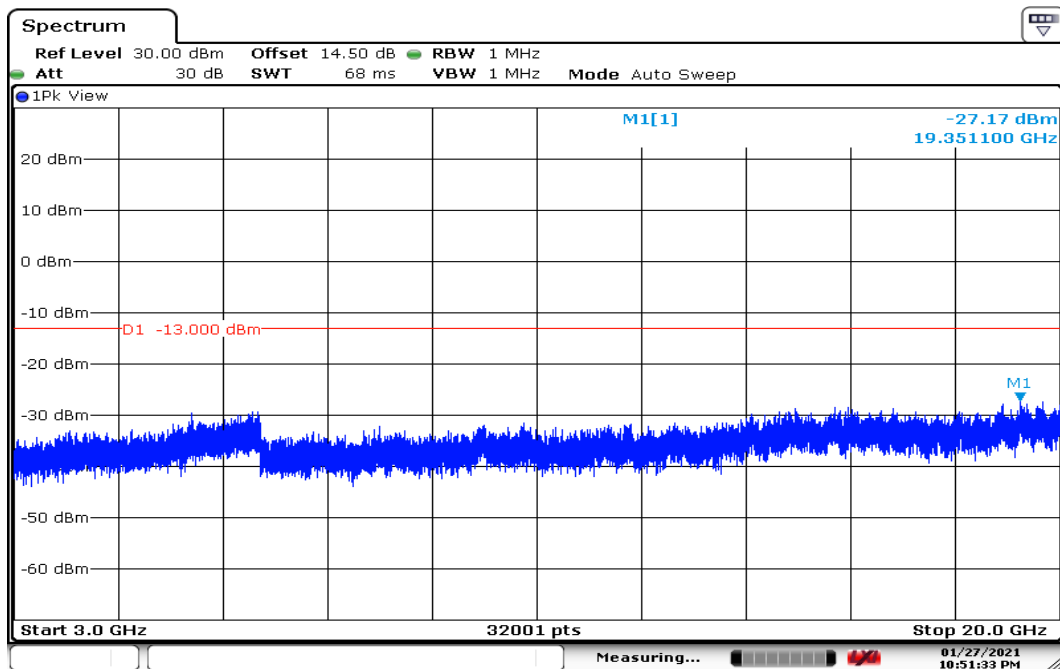CH Mid

Date: 27 JAN 2021 22:51:34




Report No.: T201116W03-RP1

Page: 112 / 132

Rev.: 01


CH High

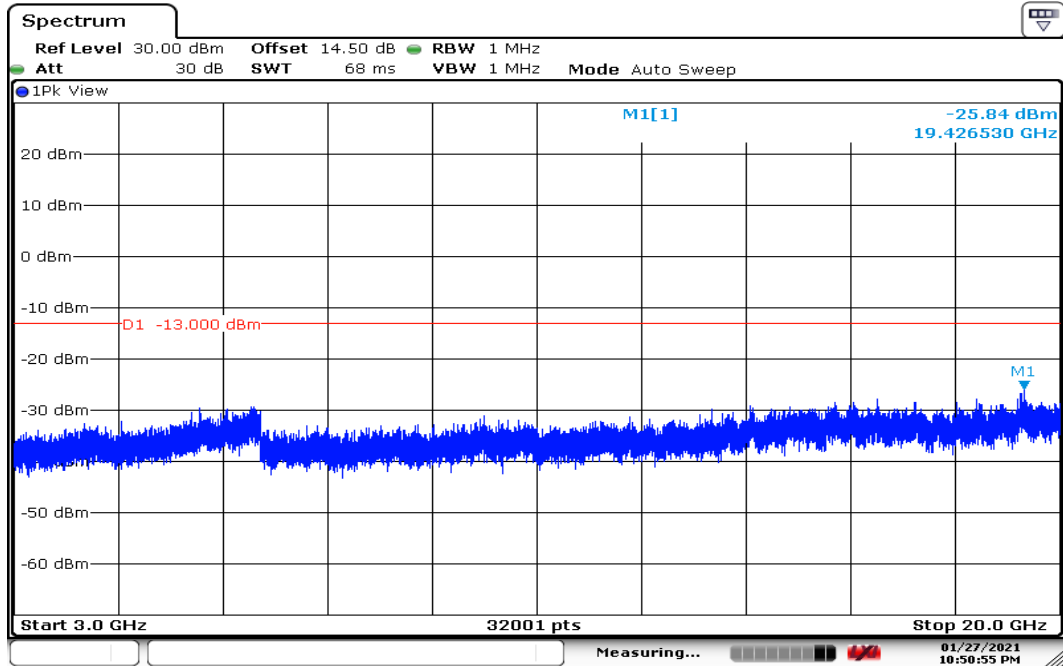

Date: 27 JAN 2021 22:50:55


CHANNEL BANDWIDTH: 10MHz / 30MHz-3GHz

CH Low

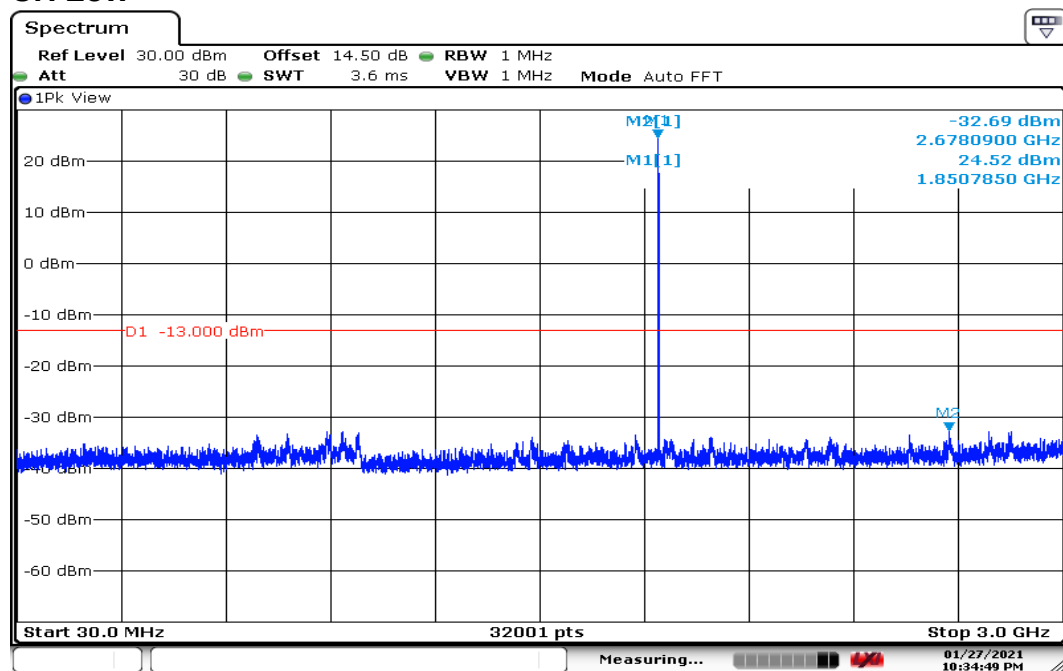

Date: 27 JAN 2021 22:34:49

CH Mid

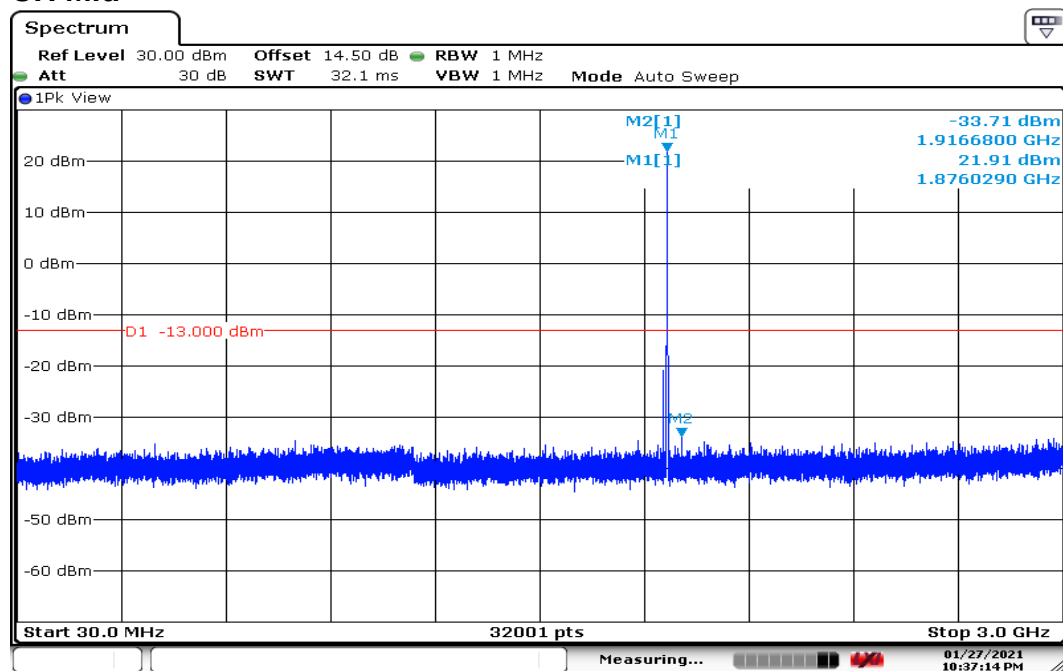

Date: 27 JAN 2021 22:37:14




Report No.: T201116W03-RP1

Page: 114 / 132

Rev.: 01


CH High

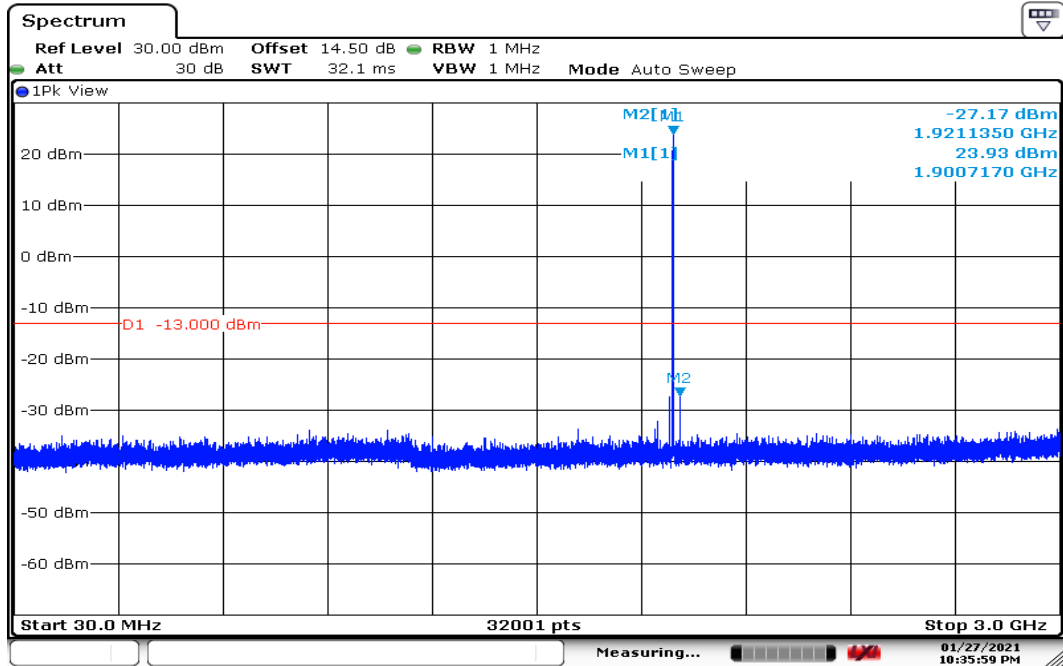


Date: 27 JAN 2021 22:35:59



Report No.: T201116W03-RP1

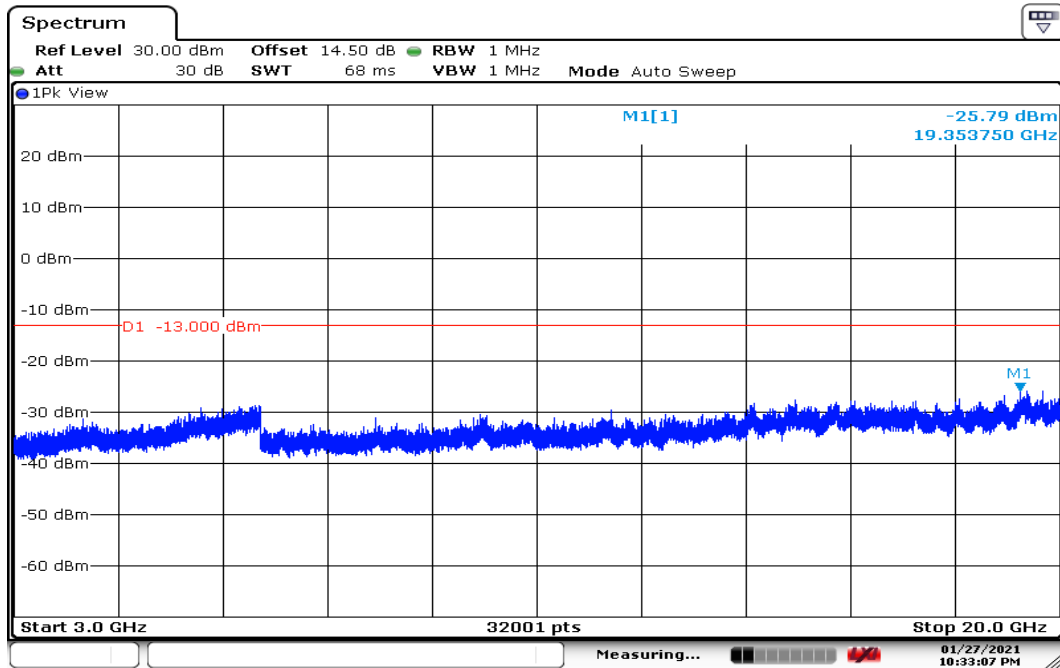CHANNEL BANDWIDTH: 10MHz / 3GHz-20GHz**CH Low**

Date: 27 JAN 2021 22:33:07

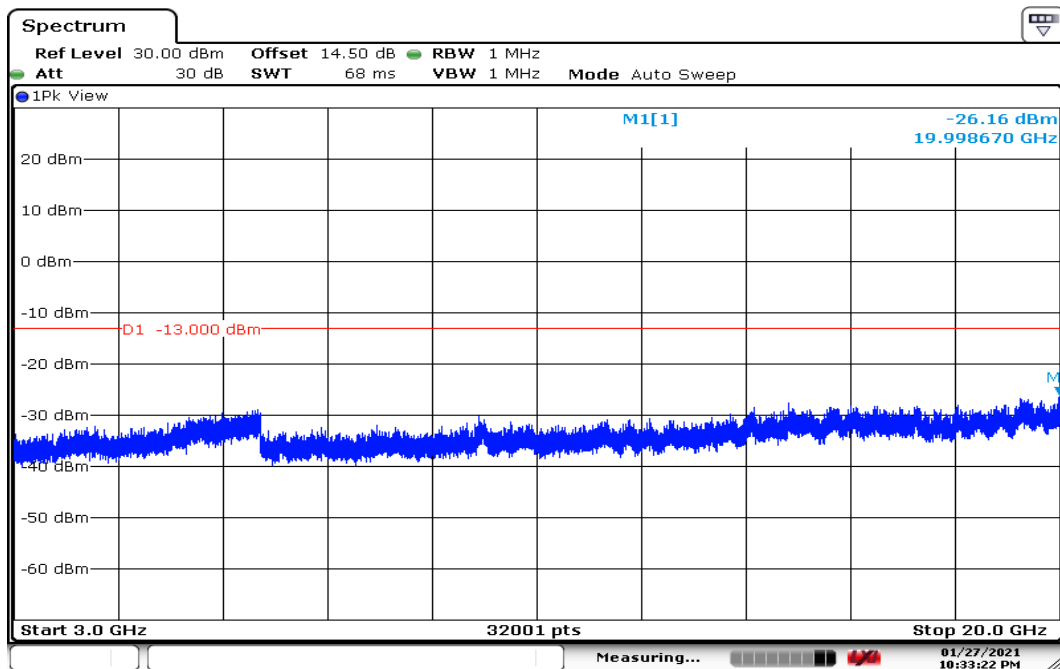CH Mid

Date: 27 JAN 2021 22:33:23




Report No.: T201116W03-RP1

Page: 116 / 132

Rev.: 01


CH High

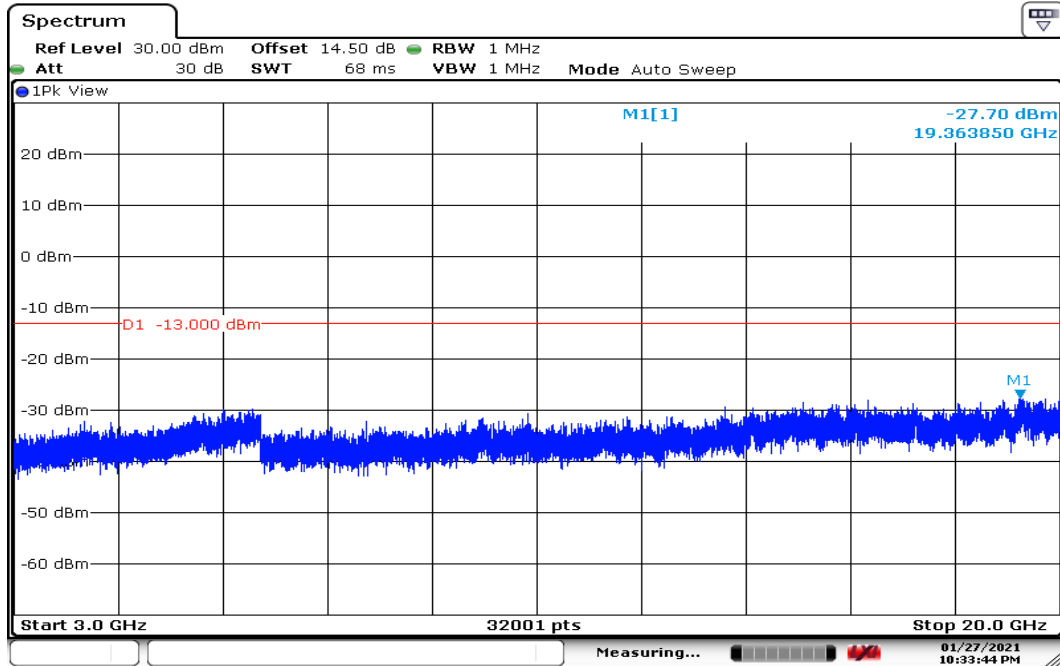


Date: 27 JAN 2021 22:33:44



Report No.: T201116W03-RP1

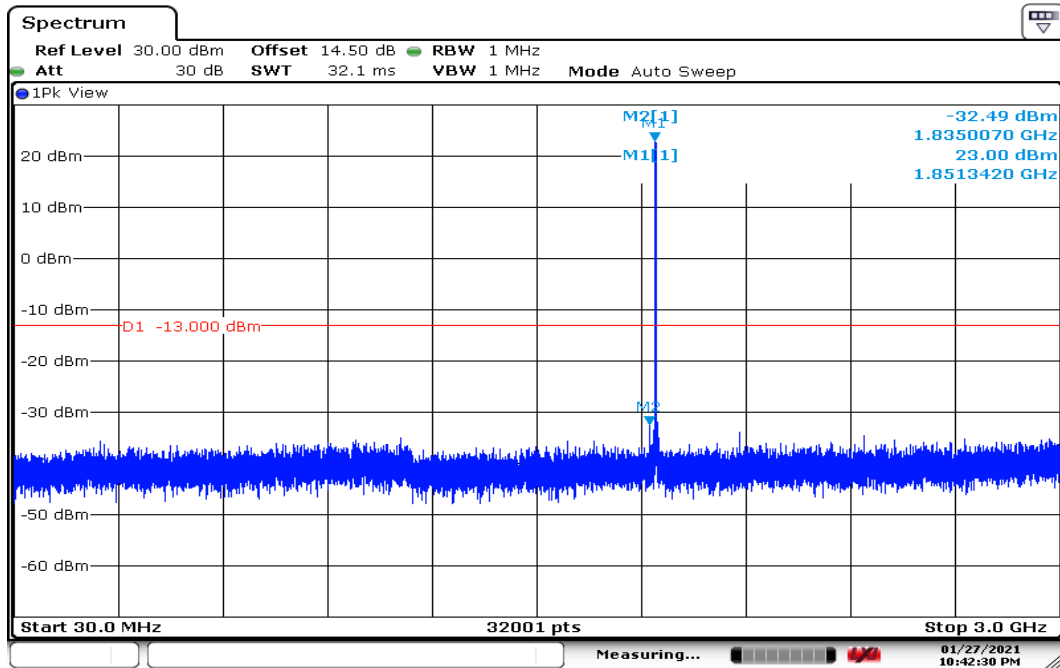CHANNEL BANDWIDTH: 15MHz / 30MHz-3GHz**CH Low**

Date: 27 JAN 2021 22:42:30

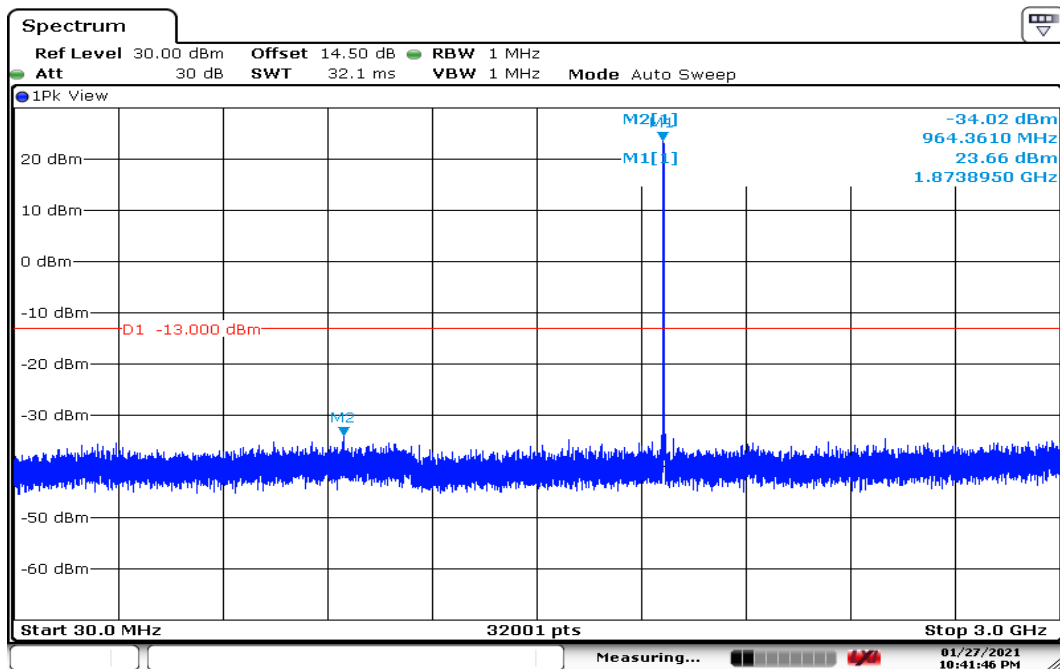CH Mid

Date: 27 JAN 2021 22:41:47




Report No.: T201116W03-RP1

Page: 118 / 132

Rev.: 01


CH High

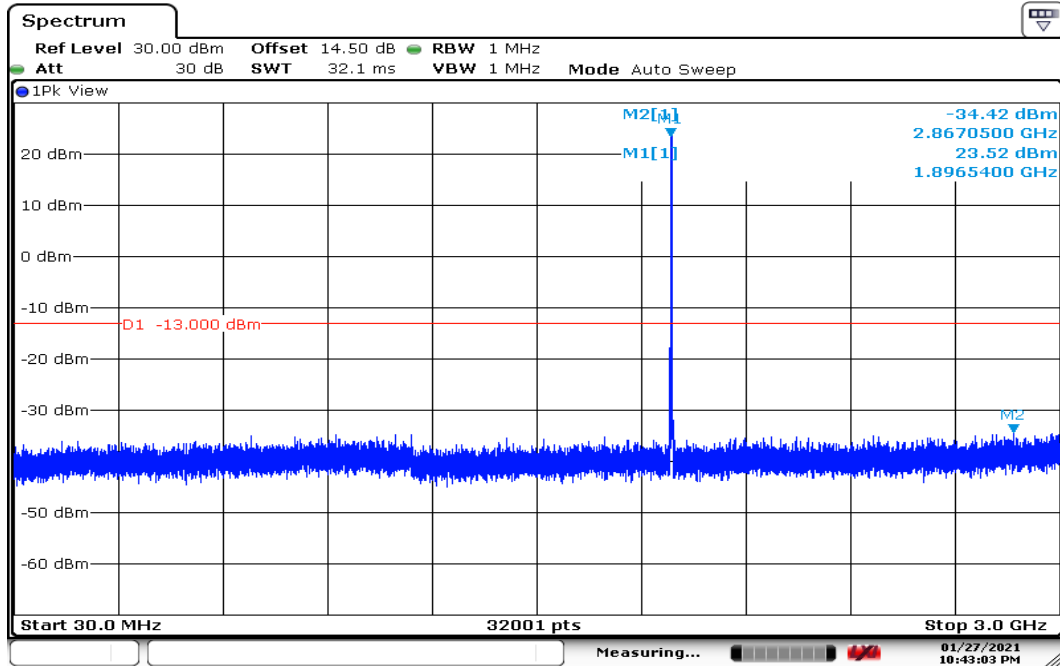


Date: 27 JAN 2021 22:43:04



Report No.: T201116W03-RP1

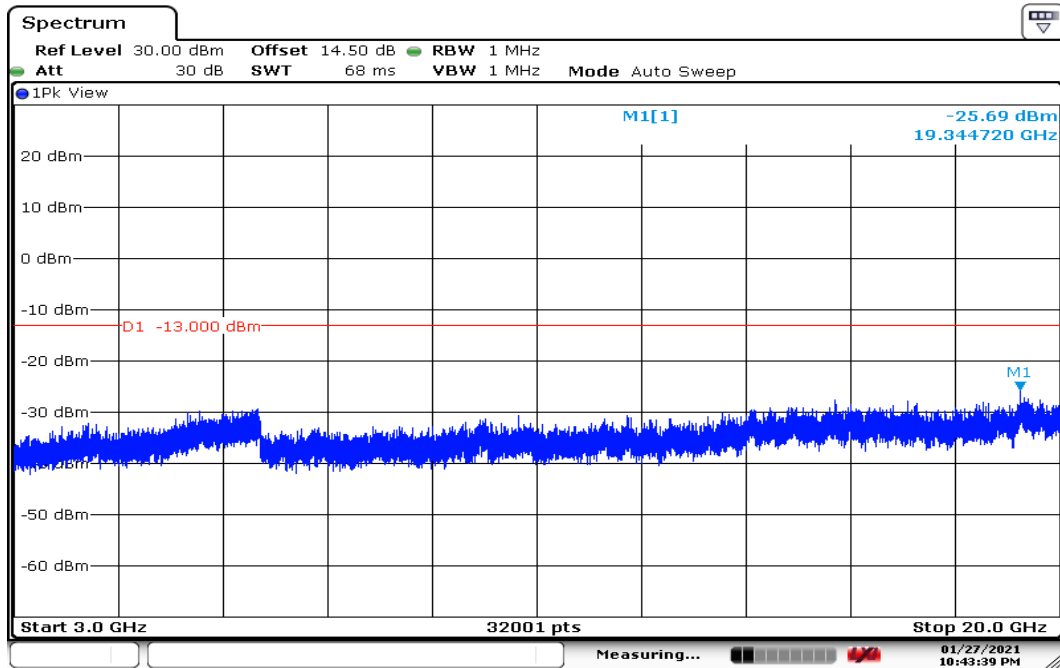CHANNEL BANDWIDTH: 15MHz / 3GHz-20GHz**CH Low**

Date: 27 JAN 2021 22:43:40

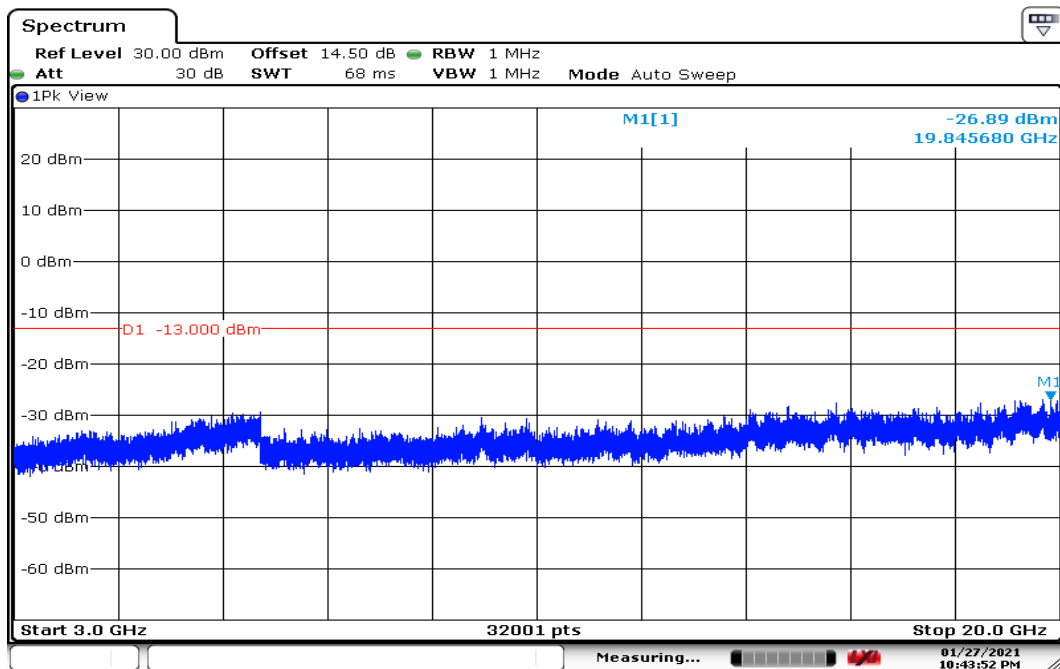CH Mid

Date: 27 JAN 2021 22:43:53




Report No.: T201116W03-RP1

Page: 120 / 132

Rev.: 01

CH High

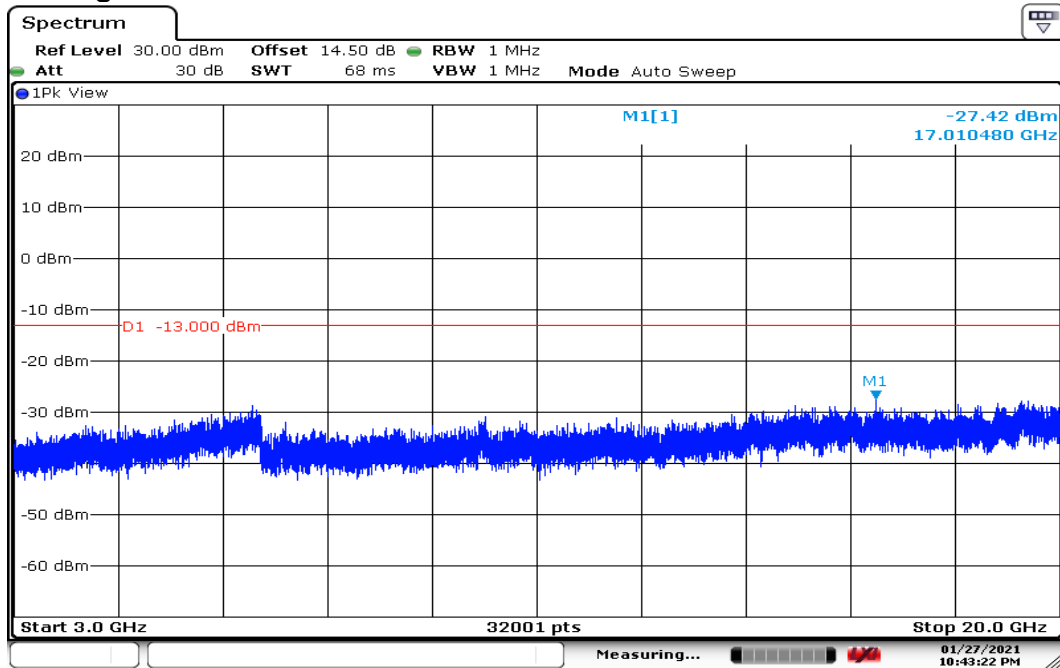


Date: 27 JAN 2021 22:43:22

Report No.: T201116W03-RP1


CHANNEL BANDWIDTH: 20MHz / 30MHz-3GHz

CH Low

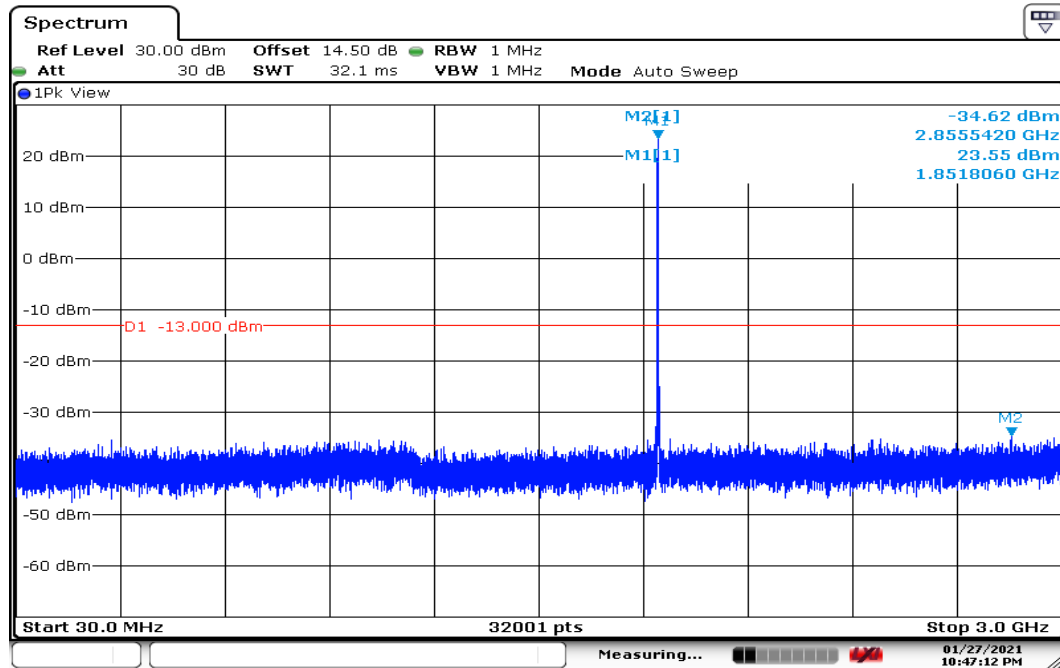

Date: 27 JAN 2021 22:47:13

CH Mid

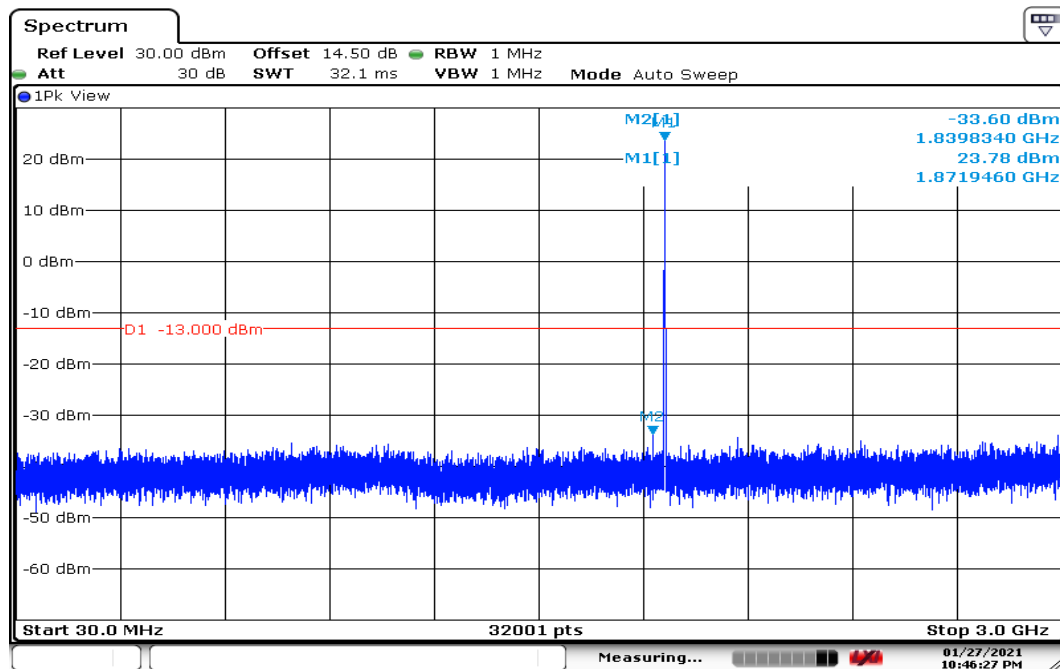

Date: 27 JAN 2021 22:46:28




Report No.: T201116W03-RP1

Page: 122 / 132

Rev.: 01


CH High

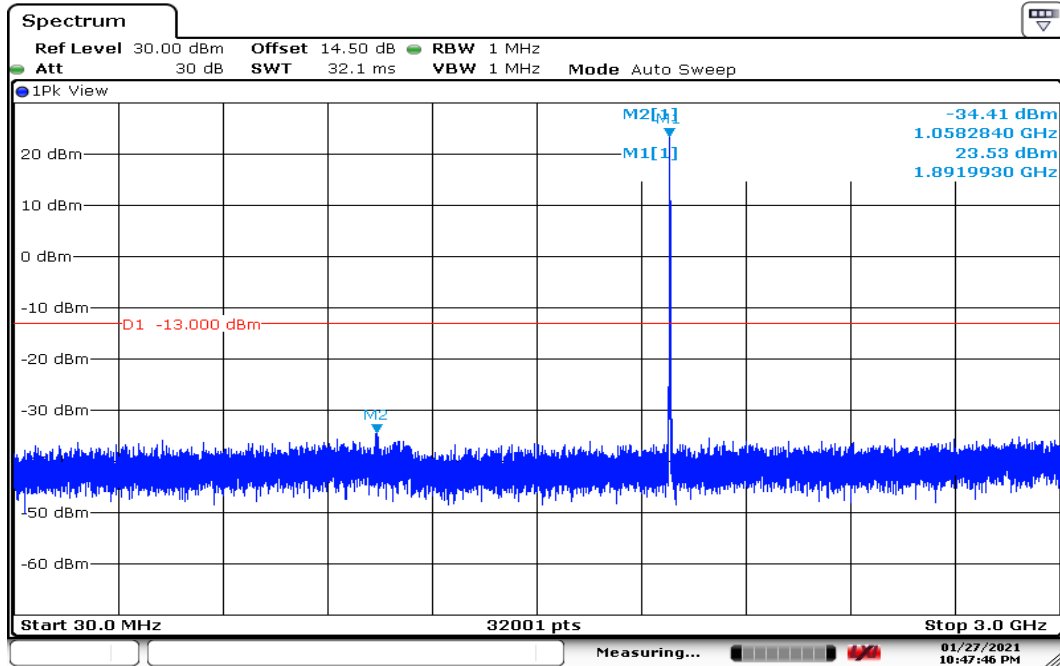


Date: 27 JAN 2021 22:47:46



Report No.: T201116W03-RP1

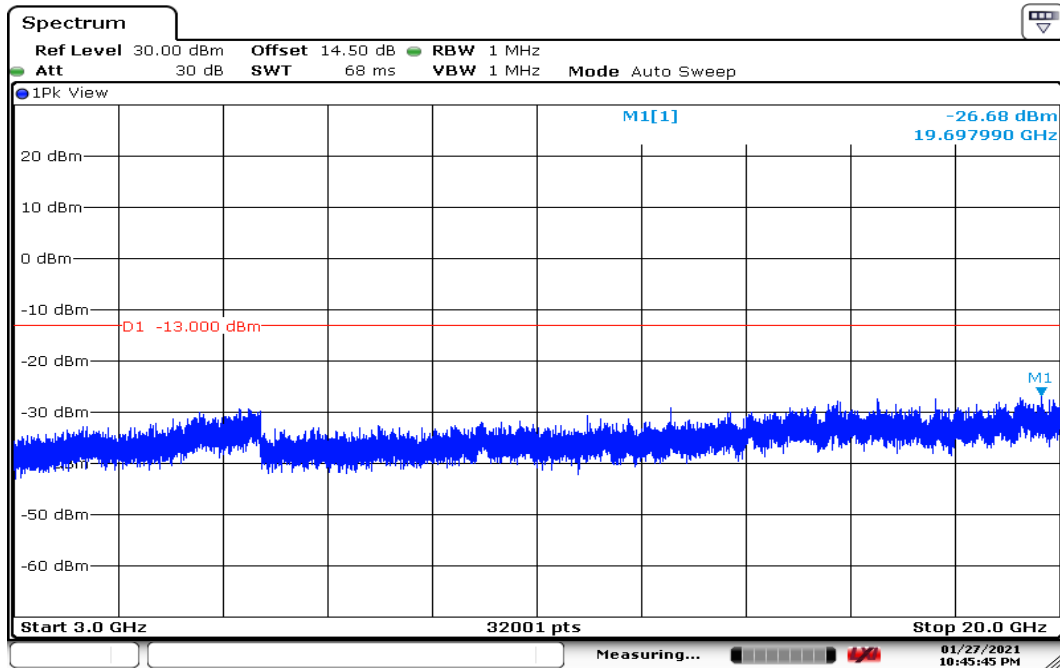CHANNEL BANDWIDTH: 20MHz / 3GHz-20GHz**CH Low**

Date: 27 JAN 2021 22:45:45

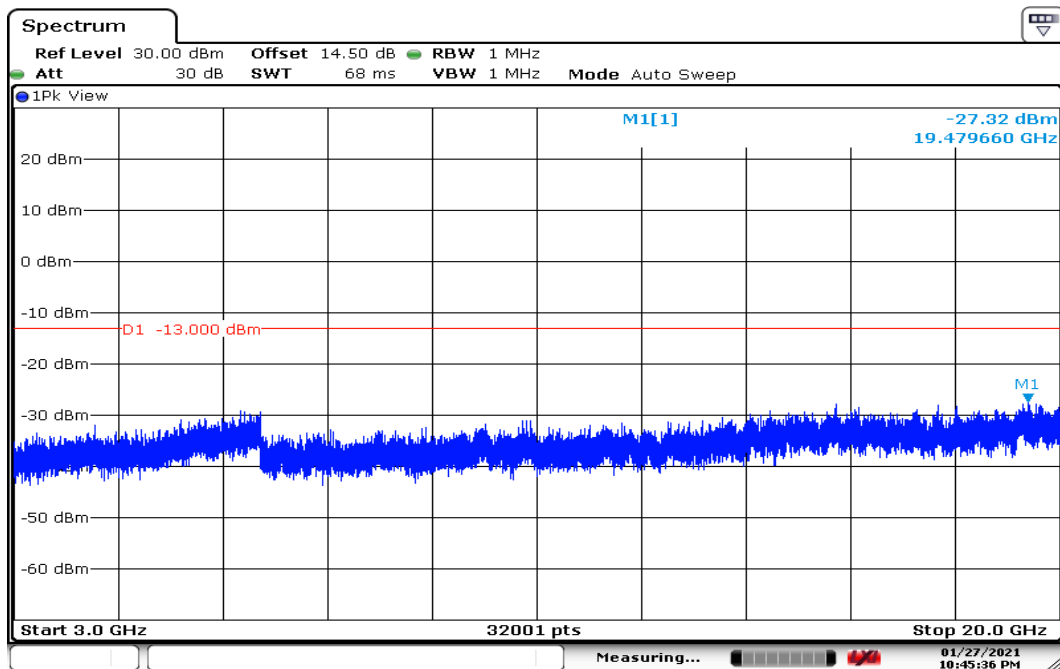CH Mid

Date: 27 JAN 2021 22:45:36




Report No.: T201116W03-RP1

Page: 124 / 132

Rev.: 01

CH High

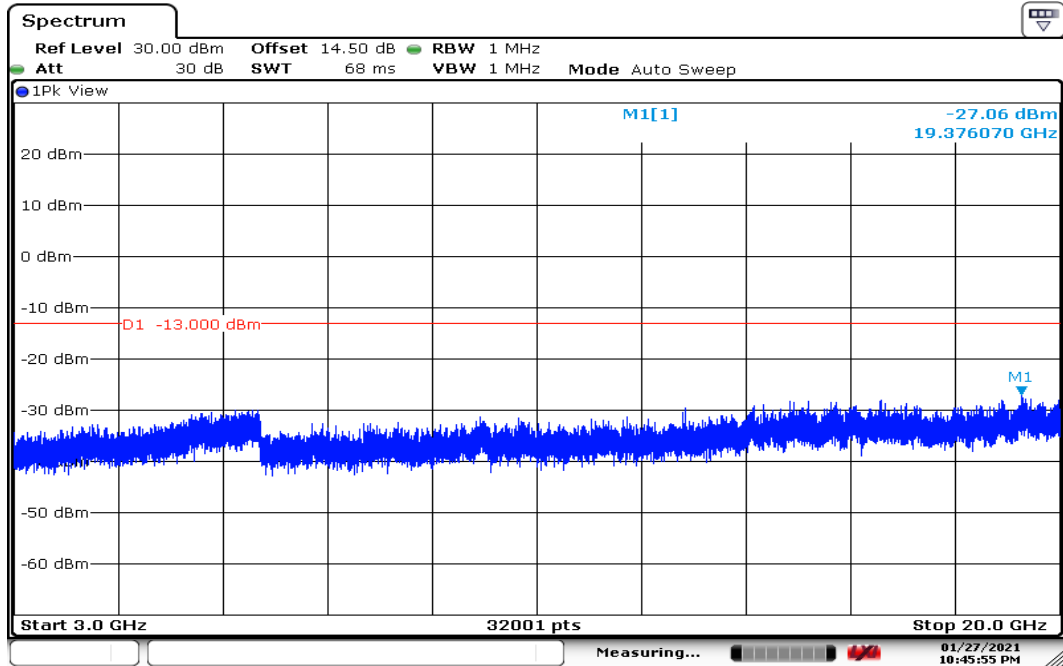

Date: 27 JAN 2021 22:45:55


8.7 SPURIOUS RADIATION MEASUREMENT

LIMIT


The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

Test Configuration


Below 1 GHz

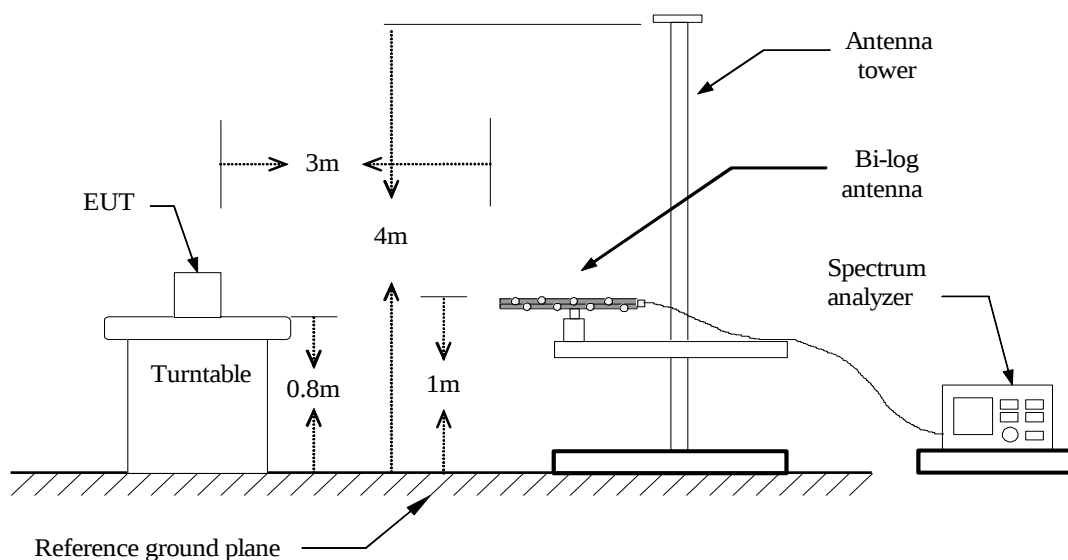

Above 1 GHz

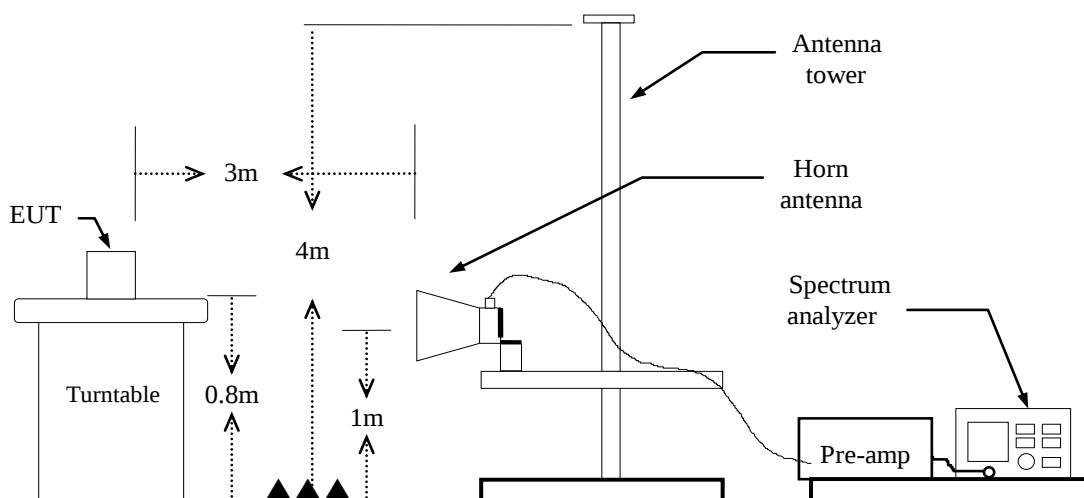

Substituted Method Test Set-up

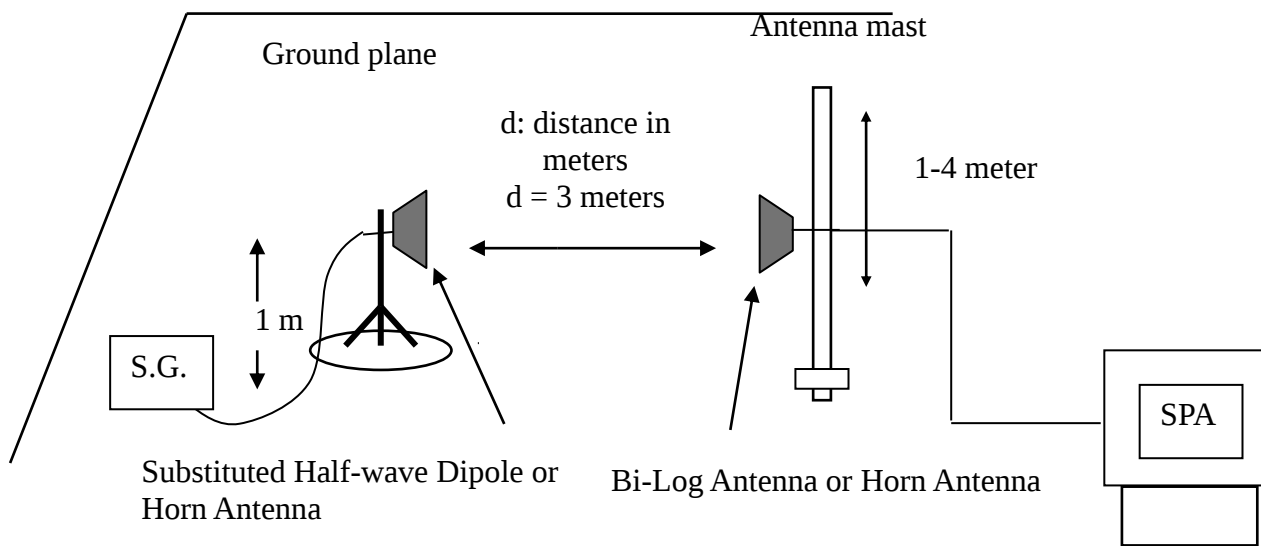

TEST PROCEDURE

1. According to KDB 971168 D01 Power Meas License Digital Systems and TIA-603-E Section 2.2.12.
2. The EUT was placed on a turntable
 - (1) Below 1G : 0.8m
 - (2) Above 1G : 0.8m
 - (3) EUT set 3m from the receiving antenna
 - (4) The table was rotated 360 degrees of the highest spurious emission to determine the position.
3. Set the spectrum analyzer , RBW=1MHz, VBW=3MHz.
4. A horn antenna was driven by a signal generator.
5. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission

$$ERP = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)} - 2.15$$

$$EIRP = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)}$$

TEST RESULTS

Refer to the attached tabular data sheets.

Remark: Above 1GHz

Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T201116W03-RP1

Test Results

LTE Band 2 / BW: 20MHz / 16QAM / RB =1, RB Offset = 0

Operation Mode: Tx / Low CH

Test Date:

January 25, 2021

Temperature: 22.4°C


Tested by:

Ray Li

Humidity: 64% RH

Polarity:

Ver.

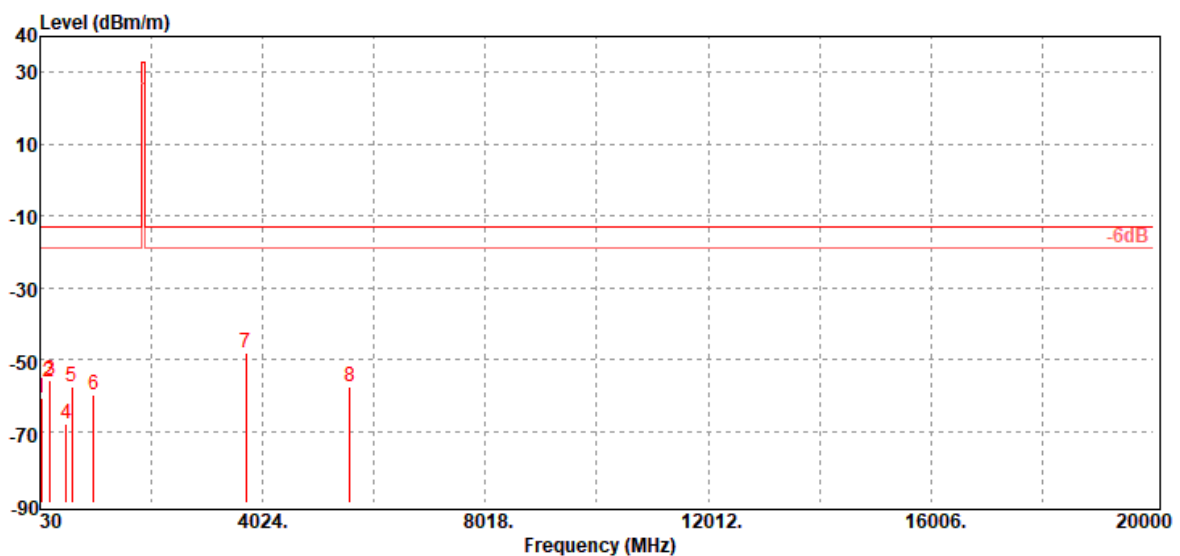

Freq. (MHz)	ERP/EIRP (dBm)	SG Output Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
52.31	-60.98	-49.35	-11.04	-0.59	-13.00	-47.98	V
190.05	-56.27	-51.14	-4.00	-1.13	-13.00	-43.27	V
211.39	-55.82	-52.53	-2.10	-1.19	-13.00	-42.82	V
495.60	-68.14	-64.28	-2.00	-1.86	-13.00	-55.14	V
602.30	-57.82	-54.80	-0.95	-2.07	-13.00	-44.82	V
990.30	-60.01	-55.95	-1.40	-2.66	-13.00	-47.01	V
3720.00	-48.24	-54.97	12.46	-5.73	-13.00	-35.24	V
5580.00	-57.66	-63.69	13.14	-7.11	-13.00	-44.66	V



Report No.: T201116W03-RP1

Operation Mode: Tx / Low CH


Test Date: January 25, 2021

Temperature: 22.4°C

Tested by: Ray Li

Humidity: 64% RH

Polarity: Hor.

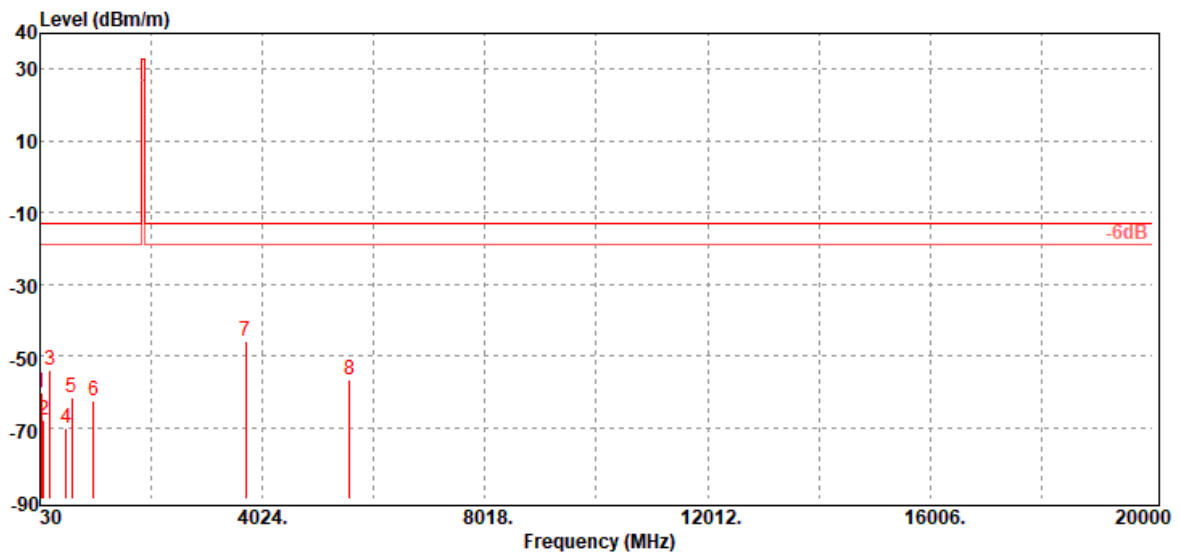

Freq. (MHz)	ERP/EIRP (dBm)	SG Output Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
47.46	-60.29	-46.20	-13.53	-0.56	-13.00	-47.29	H
94.99	-67.79	-59.69	-7.30	-0.80	-13.00	-54.79	H
210.42	-54.07	-50.78	-2.10	-1.19	-13.00	-41.07	H
500.45	-70.01	-66.15	-1.99	-1.87	-13.00	-57.01	H
605.21	-61.64	-58.56	-1.00	-2.08	-13.00	-48.64	H
992.24	-62.34	-58.27	-1.40	-2.67	-13.00	-49.34	H
3720.00	-45.78	-52.51	12.46	-5.73	-13.00	-32.78	H
5580.00	-56.70	-62.73	13.14	-7.11	-13.00	-43.70	H

Report No.: T201116W03-RP1

Page: 129 / 132

Rev.: 01

Operation Mode: Tx / Mid CH


Test Date: January 25, 2021

Temperature: 22.4°C

Tested by: Ray Li

Humidity: 64% RH

Polarity: Ver.

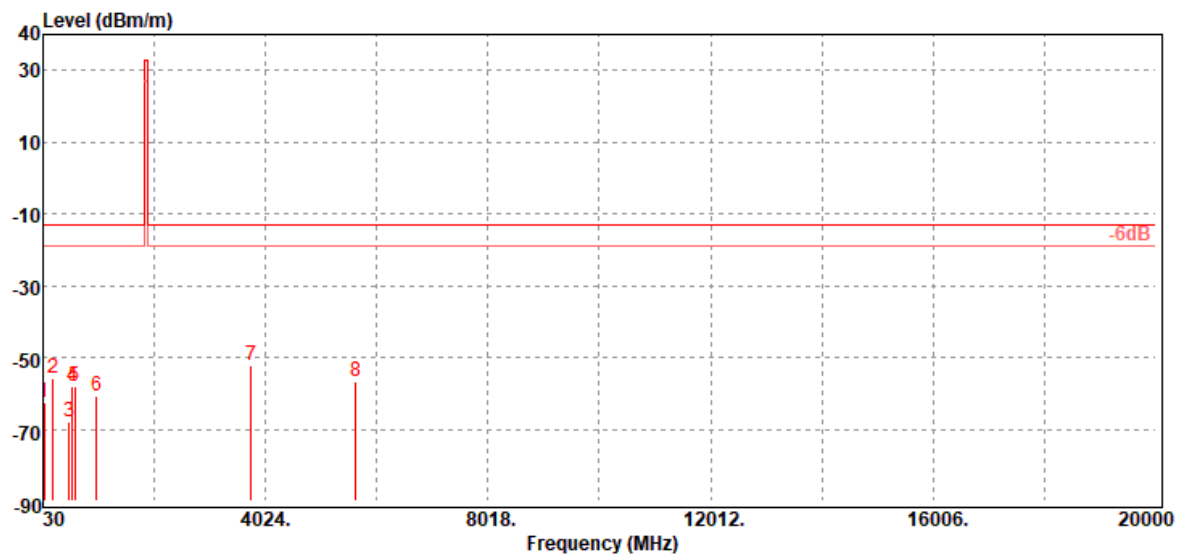

Freq. (MHz)	ERP/EIRP (dBm)	SG Output Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
49.40	-62.57	-49.70	-12.30	-0.57	-13.00	-49.57	V
209.45	-55.63	-52.26	-2.18	-1.19	-13.00	-42.63	V
498.51	-67.92	-64.05	-2.00	-1.87	-13.00	-54.92	V
555.74	-58.17	-54.90	-1.31	-1.96	-13.00	-45.17	V
602.30	-58.26	-55.24	-0.95	-2.07	-13.00	-45.26	V
988.36	-60.72	-56.66	-1.40	-2.66	-13.00	-47.72	V
3760.00	-52.27	-58.93	12.42	-5.76	-13.00	-39.27	V
5640.00	-56.78	-62.90	13.26	-7.14	-13.00	-43.78	V

Operation Mode: Tx / Mid CH


Test Date: January 25, 2021

Temperature: 22.4°C

Tested by: Ray Li

Humidity: 64% RH

Polarity: Hor.

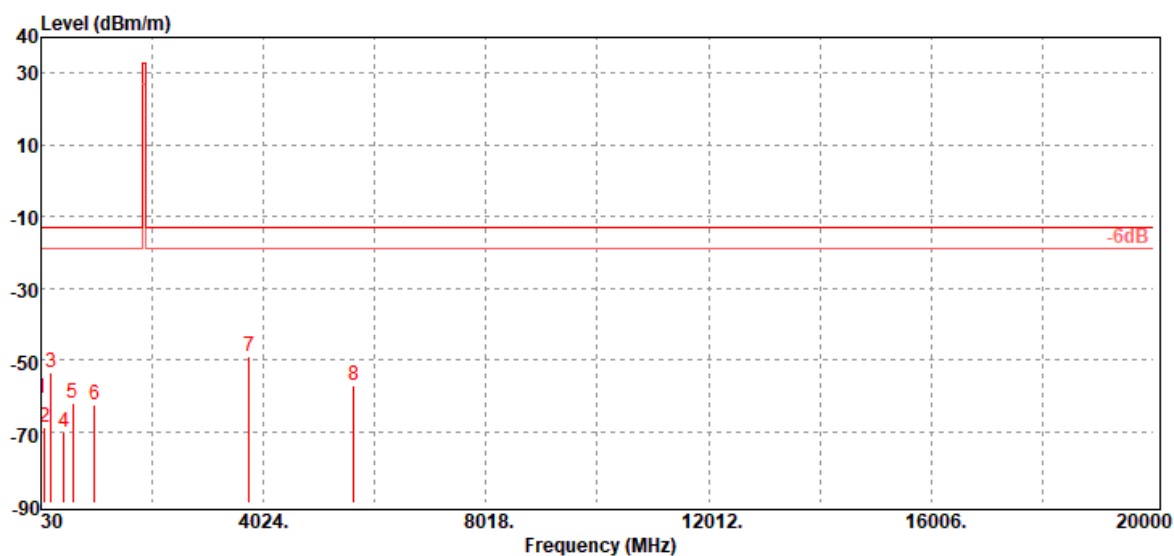

Freq. (MHz)	ERP/EIRP (dBm)	SG Output Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
34.85	-60.75	-34.95	-25.32	-0.48	-13.00	-47.75	H
95.96	-69.07	-60.87	-7.40	-0.80	-13.00	-56.07	H
209.45	-53.69	-50.32	-2.18	-1.19	-13.00	-40.69	H
445.16	-70.25	-66.40	-2.10	-1.75	-13.00	-57.25	H
599.39	-61.89	-58.93	-0.89	-2.07	-13.00	-48.89	H
985.45	-62.56	-58.50	-1.40	-2.66	-13.00	-49.56	H
3760.00	-49.13	-55.79	12.42	-5.76	-13.00	-36.13	H
5640.00	-56.94	-63.06	13.26	-7.14	-13.00	-43.94	H

Report No.: T201116W03-RP1

Page: 131 / 132

Rev.: 01

Operation Mode: Tx / High CH


Test Date: January 25, 2021

Temperature: 22.4°C

Tested by: Ray Li

Humidity: 64% RH

Polarity: Ver.

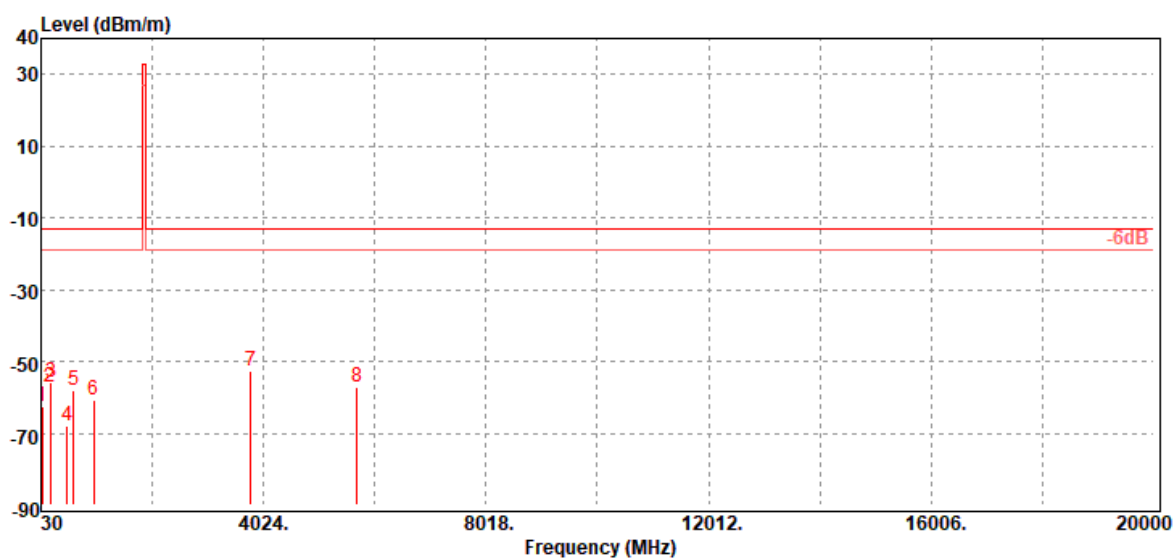

Freq. (MHz)	ERP/EIRP (dBm)	SG Output Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
49.40	-62.42	-49.55	-12.30	-0.57	-13.00	-49.42	V
191.99	-57.38	-52.14	-4.10	-1.14	-13.00	-44.38	V
210.42	-55.68	-52.39	-2.10	-1.19	-13.00	-42.68	V
500.45	-67.94	-64.08	-1.99	-1.87	-13.00	-54.94	V
609.09	-57.89	-54.73	-1.08	-2.08	-13.00	-44.89	V
980.60	-60.82	-56.86	-1.31	-2.65	-13.00	-47.82	V
3800.00	-52.72	-59.43	12.50	-5.79	-13.00	-39.72	V
5700.00	-57.30	-63.23	13.10	-7.17	-13.00	-44.30	V

Operation Mode: Tx / High CH


Test Date: January 25, 2021

Temperature: 22.4°C

Tested by: Ray Li

Humidity: 64% RH

Polarity: Hor.

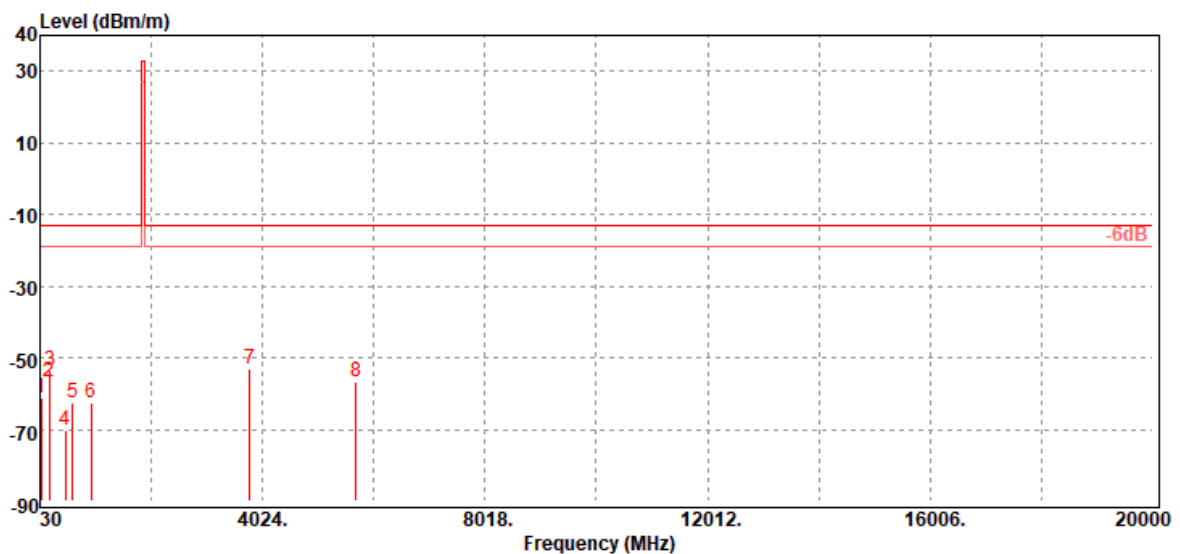

Freq. (MHz)	ERP/EIRP (dBm)	SG Output Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
44.55	-61.40	-45.00	-15.86	-0.54	-13.00	-48.40	H
192.96	-56.77	-51.53	-4.10	-1.14	-13.00	-43.77	H
211.39	-53.76	-50.47	-2.10	-1.19	-13.00	-40.76	H
478.14	-70.06	-65.84	-2.40	-1.82	-13.00	-57.06	H
613.94	-62.49	-59.14	-1.26	-2.09	-13.00	-49.49	H
951.50	-62.58	-58.76	-1.20	-2.62	-13.00	-49.58	H
3800.00	-53.19	-59.90	12.50	-5.79	-13.00	-40.19	H
5700.00	-56.58	-62.51	13.10	-7.17	-13.00	-43.58	H

- End of Test Report -