

# TEST REPORT

Reference No..... : WTN20X10080281W-1  
FCC ID ..... : 2AU29AMPRFWIFIHUB  
Applicant ..... : Turnils North America  
Address..... : 1750 Satellite Blvd, Suite 100, Buford GA 30518  
Product Name ..... : AMP Bridge  
Test Model. .... : AMP Bridge WIFI and RF with Serial Port  
Standards ..... : FCC Part 15.231  
Date of Receipt sample .... : Oct.30, 2020  
Date of Test..... : Oct.30, 2020 to Nov.24, 2020  
Date of Issue ..... : Nov.25, 2020  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308


Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:

  
Mike Shi / Project Engineer

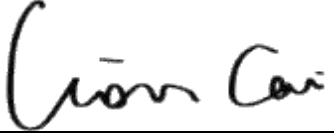  
Lion Cai / RF Manager

  
Silin Chen / Manager

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b> .....	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	6
1.7 TEST EQUIPMENT LIST AND DETAILS.....	7
<b>2. SUMMARY OF TEST RESULTS</b> .....	<b>8</b>
<b>3. ANTENNA REQUIREMENT</b> .....	<b>9</b>
3.1 STANDARD APPLICABLE.....	9
3.2 TEST RESULT.....	9
<b>4. RADIATED EMISSIONS</b> .....	<b>10</b>
4.1 STANDARD APPLICABLE.....	10
4.2 TEST PROCEDURE.....	11
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	12
<b>5. 20DB BANDWIDTH</b> .....	<b>17</b>
5.1 STANDARD APPLICABLE.....	17
5.1 TEST PROCEDURE.....	17
5.2 SUMMARY OF TEST RESULTS/PLOTS.....	17
<b>6. TRANSMISSION TIME</b> .....	<b>19</b>
6.1 STANDARD APPLICABLE.....	19
6.2 TEST PROCEDURE.....	19
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	19
<b>7. DUTY CYCLE</b> .....	<b>21</b>
7.1 STANDARD APPLICABLE.....	21
7.2 TEST PROCEDURE.....	21
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	21
<b>8. CONDUCTED EMISSIONS</b> .....	<b>25</b>
8.1 TEST PROCEDURE.....	25
8.2 BASIC TEST SETUP BLOCK DIAGRAM.....	25
8.3 TEST RECEIVER SETUP.....	25
8.4 SUMMARY OF TEST RESULTS/PLOTS.....	25
<b>APPENDIX PHOTOGRAPHS</b> .....	<b>28</b>

**Report version**

Version No.	Date of issue	Description
Rev.00	Nov.25, 2020	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Turnils North America  
 Address of applicant: 1750 Satellite Blvd, Suite 100, Buford GA 30518

Manufacturer: Turnils North America  
 Address of manufacturer: 1750 Satellite Blvd, Suite 100, Buford GA 30518

General Description of EUT	
Product Name:	AMP Bridge
Trade Name:	/
Model No.:	AMP Bridge WIFI and RF with Serial Port
Adding Model(s):	/
Rated Voltage:	USB port:DC5V
Power Adaptor :	/
Software Version:	V1.0
Hardware Version:	V1.0
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	433.92 MHz
Max. Field Strength:	433.92MHz: 80.55dBuV/m(3m)
Data Rate:	/
Modulation:	ANT 1:OOK ANT 2: FSK
Antenna Type:	Integral Antenna
Antenna Gain:	1.2dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.231**: Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

**ANSI C63.10-2013**: American National Standard for Testing Unlicensed Wireless Devices.

*Maintenance of compliance* is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated at continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting	433.92MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC CABLE	0.75	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	/	K-T5B0502000E1	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Occupied Bandwidth	Conducted	± 1.5%
Conducted Spurious Emission	Conducted	± 2.17dB
Transmission Time	Conducted	± 5%
Conducted Emissions	Conducted	9-150kHz ± 3.74dB
		0.15-30MHz ± 3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ± 4.52dB
		0.2-1GHz ± 5.56dB
		1-6GHz ± 3.84dB
		6-18GHz ± 3.92dB

**1.7 Test Equipment List and Details**

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2020-04-28	2021-04-27
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2020-04-28	2021-04-27
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2020-04-28	2021-04-27
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2020-04-28	2021-04-27
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2020-04-28	2021-04-27
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2020-03-17	2021-03-16
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2020-03-17	2021-03-16
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2020-03-17	2021-03-16
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2020-03-17	2021-03-16
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-1087	Anechoic chamber	SAEMC	FSAC318	/	2020-04-28	2021-04-27

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.209	Radiated Spurious Emissions	Compliant
§15.231(a)	Deactivation Testing	Compliant
§15.231(b)	Radiated Emissions	Compliant
§15.231(c)	20dB Bandwidth Testing	Compliant
§ 15.207(a)	Conducted Emission	Compliant



### **3. Antenna Requirement**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has an Integral antenna, fulfill the requirement of this section.

## 4. Radiated Emissions

---

### 4.1 Standard Applicable

According to §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 **	125 to 375 **
174 - 260	3,750	375
260 - 470	3,750 to 12,500 **	375 to 1,250 **
Above 470	12,500	1,250

\*\* linear interpolations

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

Compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.


## 4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.231(b) and FCC Part 15.209 Limit.


The test setup for emission measurement below 30MHz..

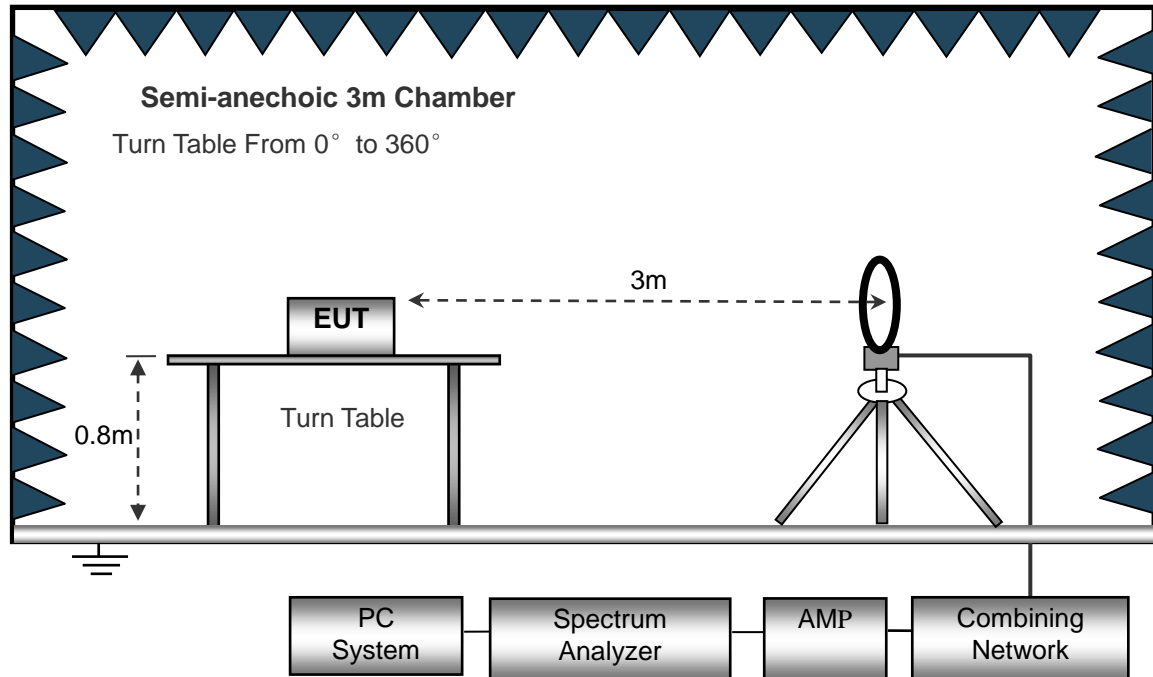

The test setup for emission measurement from 30 MHz to 1 GHz..

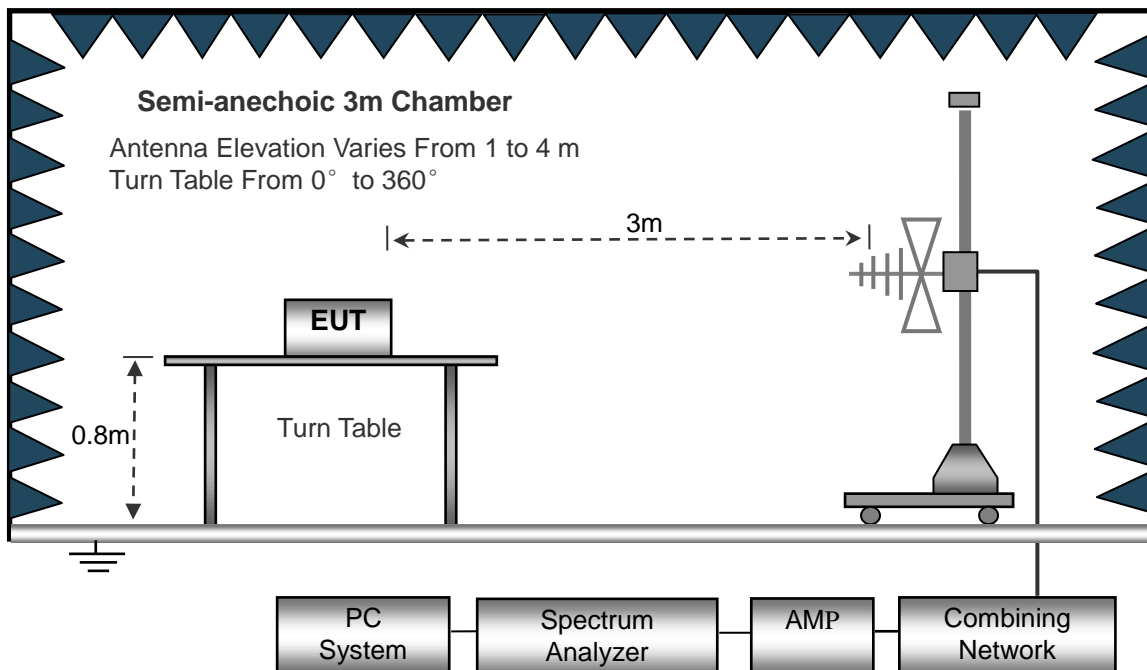

The test setup for emission measurement above 1 GHz..

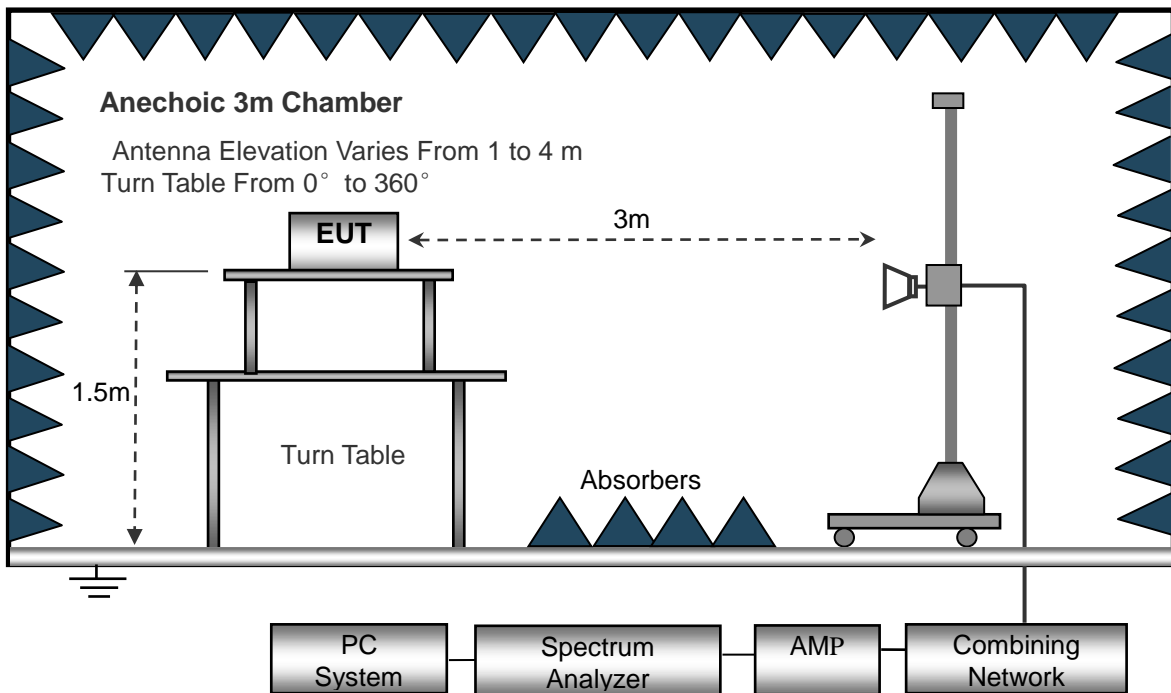

### 4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Loss} + \text{Cab. Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-6\text{dB}\mu\text{V}$  means the emission is  $6\text{dB}\mu\text{V}$  below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

### 4.4 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

ANT 1

Test Mode	TM1	Polarity:	Horizontal
-----------	-----	-----------	------------

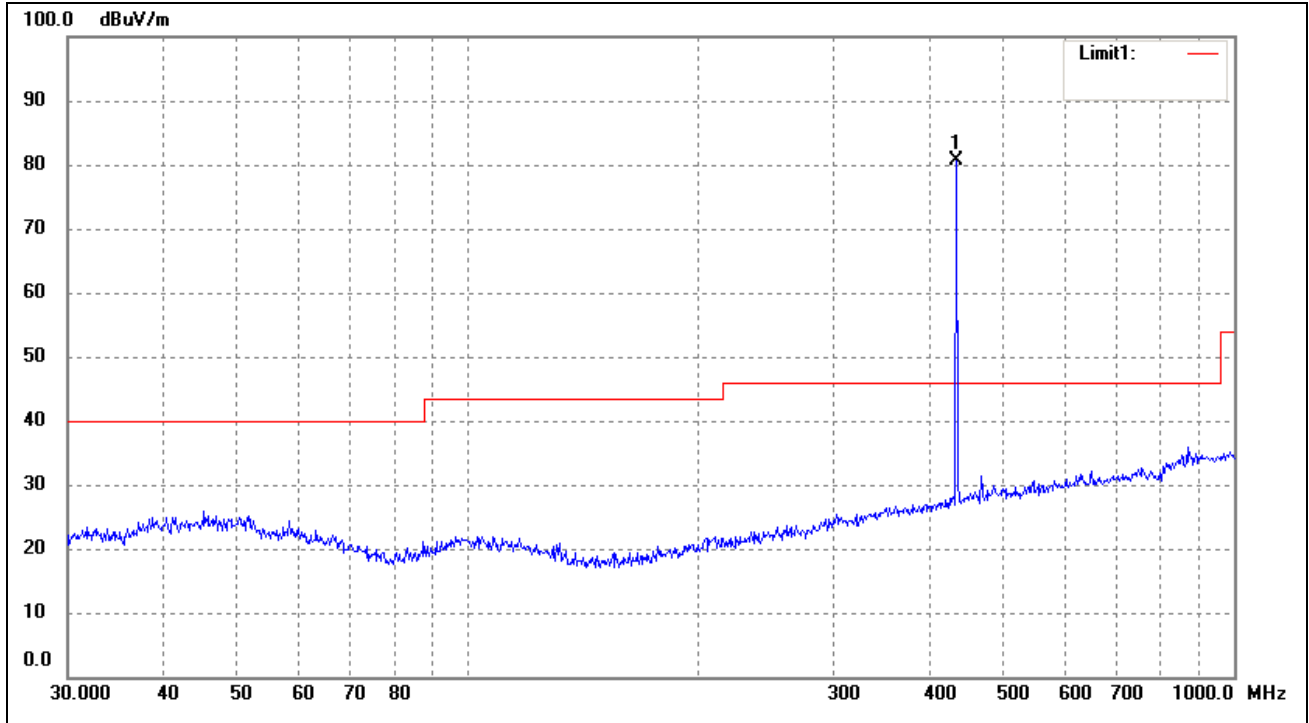


No.	Frequency	Reading	Correct	Duty Cycle Factor	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	dB	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	434.0651	86.33	-5.78	N/A	80.55	100.82	-20.27	-	-	peak
2.	/	/	/	-4.31	76.24	80.82	-4.58	-	-	AVG

Above 1GHz

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	1141.782	41.46	-13.87	27.59	54.00	-26.41	-	-	AVG
2	1226.618	53.87	-13.89	39.98	74.00	-34.02	-	-	peak
3	1878.924	52.63	-8.75	43.88	80.82	-36.94	-	-	peak
4	1899.233	40.14	-8.55	31.59	60.82	-29.23	-	-	AVG
5	4464.330	53.54	-4.86	48.68	74.00	-25.32	-	-	peak
6	4778.879	40.36	-4.53	35.83	54.00	-18.17	-	-	AVG

Test Mode	TM1	Polarity:	Vertical
-----------	-----	-----------	----------

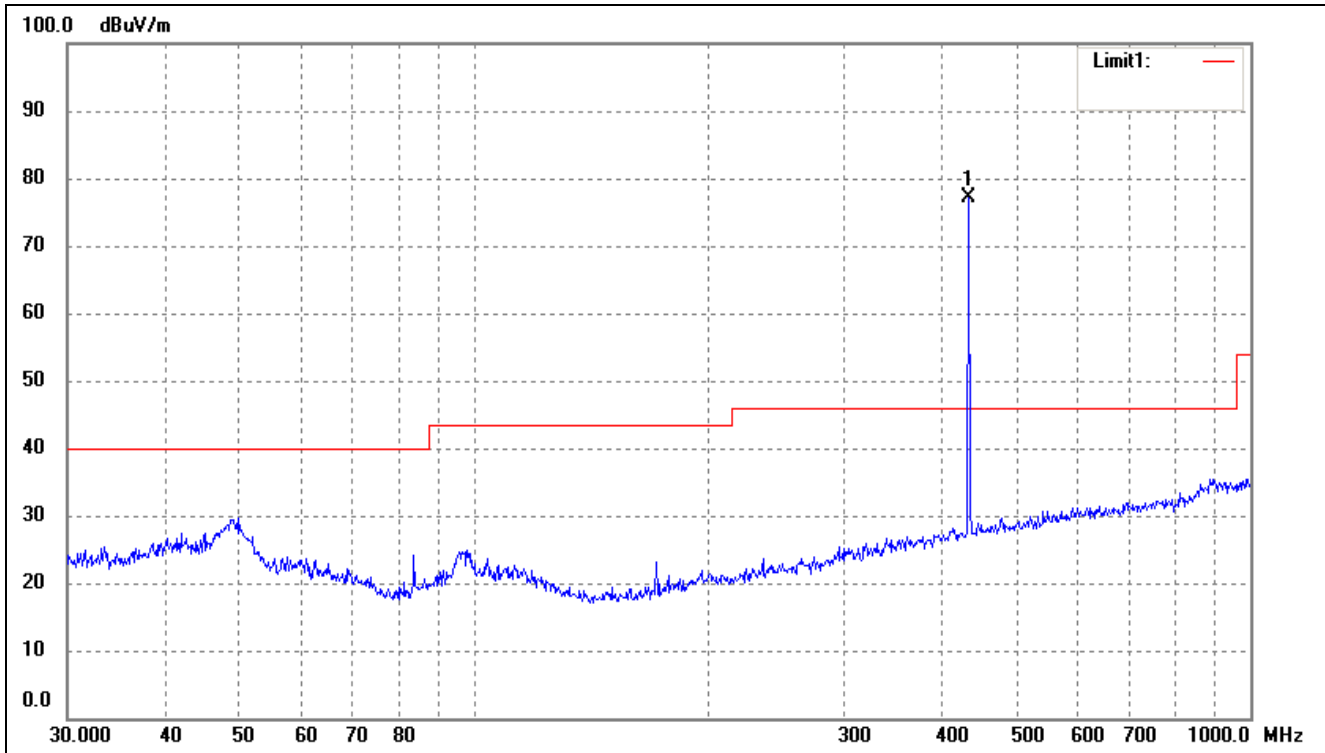


No.	Frequency	Reading	Correct	Duty Cycle Factor	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	dB	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	434.0651	82.93	-5.78	N/A	77.15	100.82	-23.67	-	-	peak
2.	/	/	/	-4.31	72.84	80.82	-7.98	-	-	AVG

Above 1GHz

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	1093.724	42.37	-13.84	28.53	54.00	-25.47	-	-	AVG
2	1107.528	52.68	-13.85	38.83	74.00	-35.17	-	-	peak
3	1899.233	40.24	-8.55	31.69	60.82	-29.13	-	-	AVG
4	2346.389	53.43	-9.59	43.84	80.82	-36.98	-	-	peak
5	4778.879	39.93	-4.53	35.40	54.00	-18.6	-	-	AVG
6	4830.532	51.71	-4.50	47.21	74.00	-26.79	-	-	peak

ANT 2

Test Mode	TM1	Polarity:	Horizontal
-----------	-----	-----------	------------

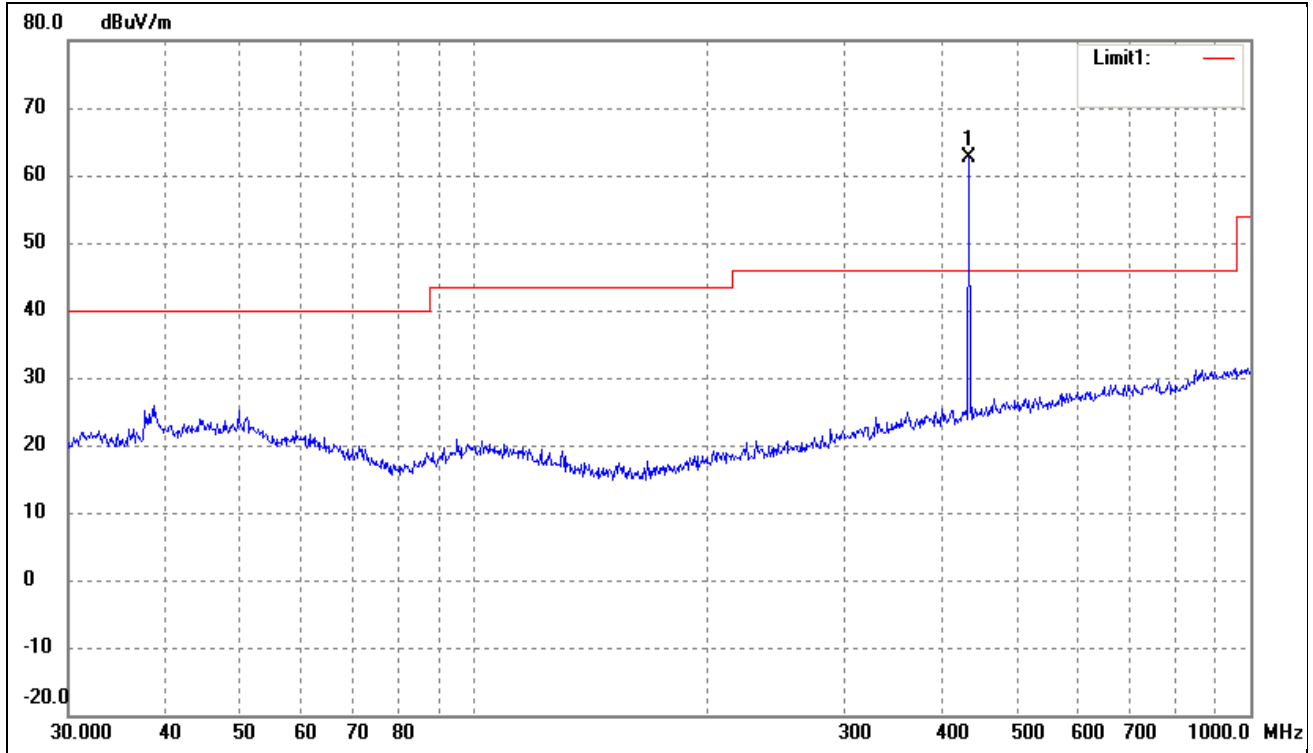


No.	Frequency	Reading	Correct	Duty Cycle Factor	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	dB	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	434.0651	68.38	-5.78	N/A	62.60	100.82	-38.22	-	-	peak
2.	/	/	/	0.00	62.60	80.82	-18.22	-	-	ave

Above 1GHz

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	1215.678	41.36	-13.89	27.47	54.00	-26.53	-	-	AVG
2	1327.235	52.92	-13.91	39.01	74.00	-34.99	-	-	peak
3	2329.632	41.14	-9.62	31.52	54.00	-22.48	-	-	peak
4	2410.307	54.35	-9.46	44.89	74.00	-29.11	-	-	AVG
5	4719.315	51.63	-4.57	47.06	74.00	-26.94	-	-	peak
6	5359.542	39.49	-4.21	35.28	54.00	-18.72	-	-	AVG

Test Mode	TM1	Polarity:	Vertical
-----------	-----	-----------	----------

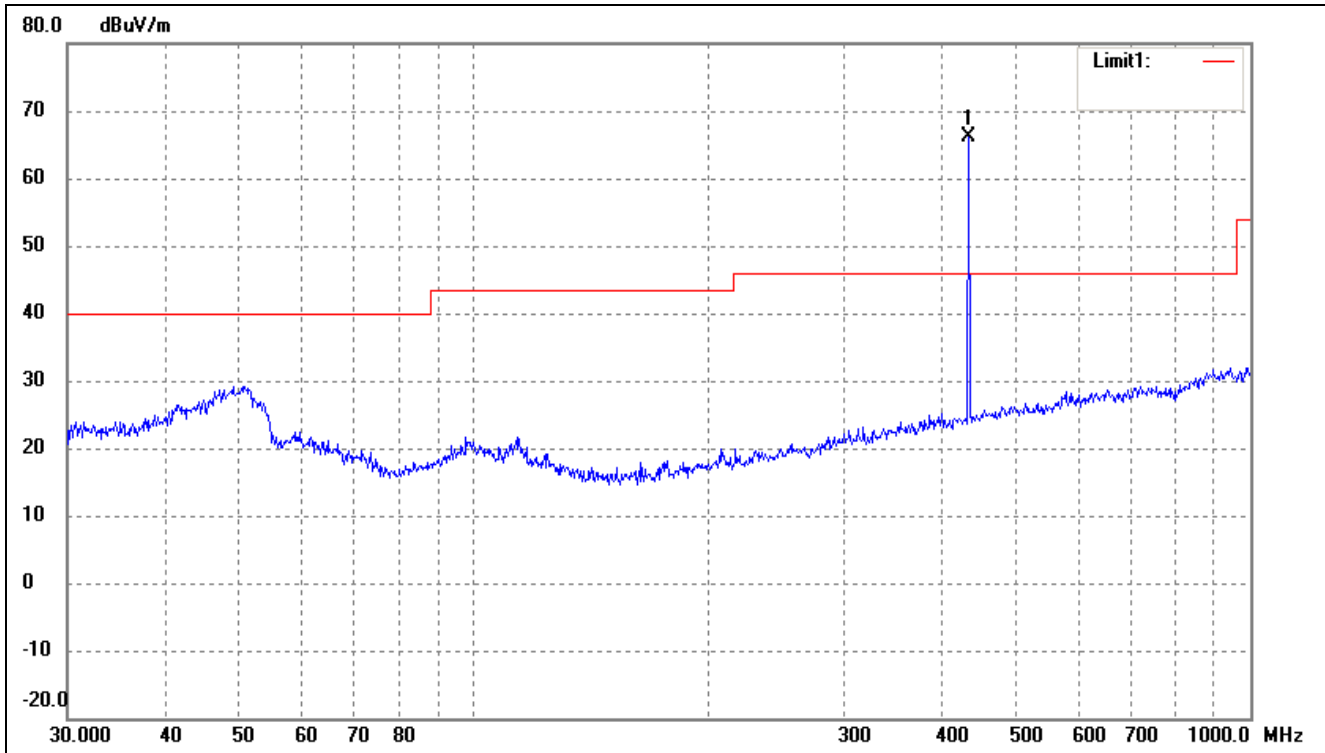

No.	Frequency	Reading	Correct	Duty Cycle Factor	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	dB	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	434.0651	71.97	-5.78	N/A	66.19	100.82	-34.63	-	-	peak
2.	/	/	/	0.00	66.19	80.82	-14.63	-	-	ave

Above 1GHz

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( )	(cm)	
1	1226.618	53.46	-13.89	39.57	74.00	-34.43	-	-	AVG
2	1260.032	41.65	-13.88	27.77	54.00	-26.23	-	-	peak
3	1899.233	40.29	-8.55	31.74	54.00	-22.26	-	-	AVG
4	2371.750	52.71	-9.54	43.17	74.00	-30.83	-	-	peak
5	4778.879	52.73	-4.53	48.20	74.00	-25.80	-	-	AVG
6	4778.879	40.94	-4.53	36.41	54.00	-17.59	-	-	peak

Note: Testing is carried out with frequency rang 30MHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The fundamental frequency is 433.92MHz, so the fundamental and spurious emissions radiated limit base on the the operating frequency 433.92MHz.



## 5. 20dB Bandwidth

---

### 5.1 Standard Applicable

According to FCC Part 15.231(c), the bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### 5.1 Test Procedure

With the EUT's antenna attached, the EUT's 20dB Bandwidth power was received by the test antenna, which was connected to the spectrum analyzer with the START, and STOP frequencies set to the EUT's operation band.


### 5.2 Summary of Test Results/Plots

Test Frequency MHz	20dB Bandwidth kHz		Limit kHz	Result
	ANT 1	ANT 2		
433.92	6.2	84.0	1084.8	Pass


Limit = Fundamental Frequency \* 0.25% = 433.92MHz \* 0.25% = 1084.8 kHz

*Please refer to the attached plots.*

ANT 1

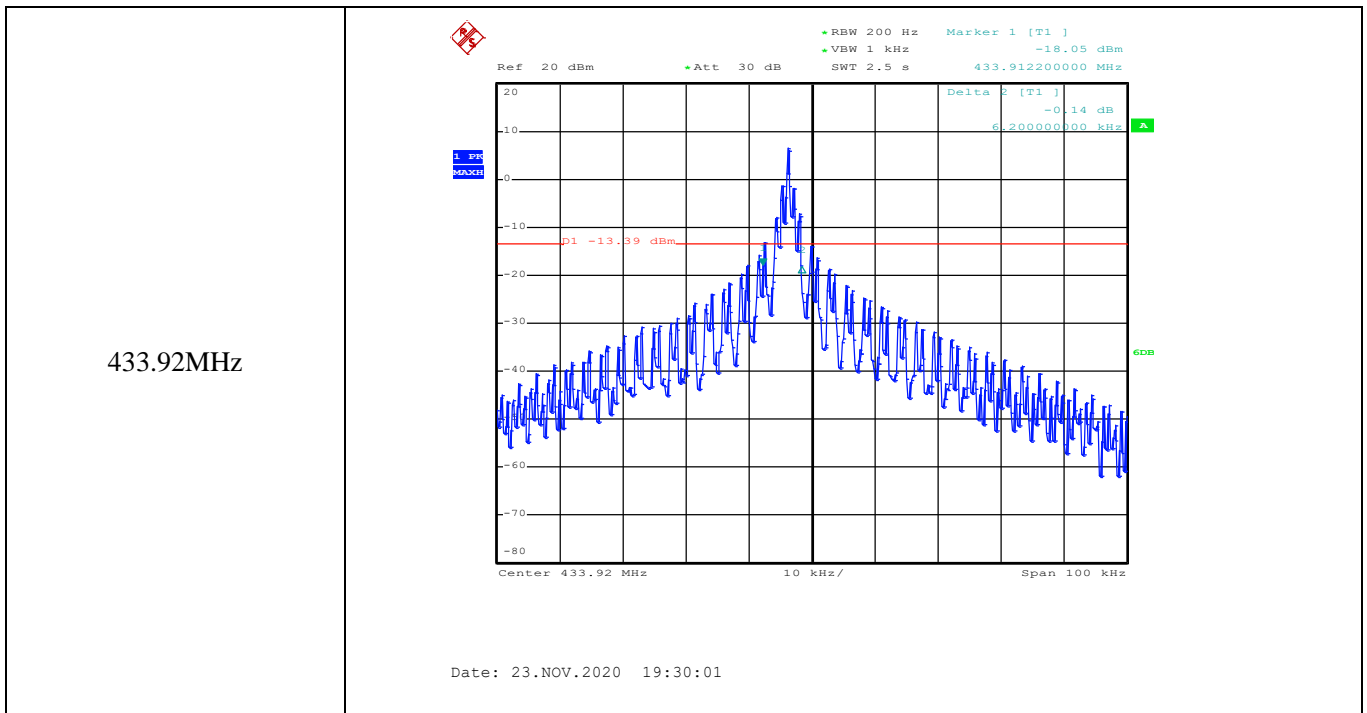

ANT 2

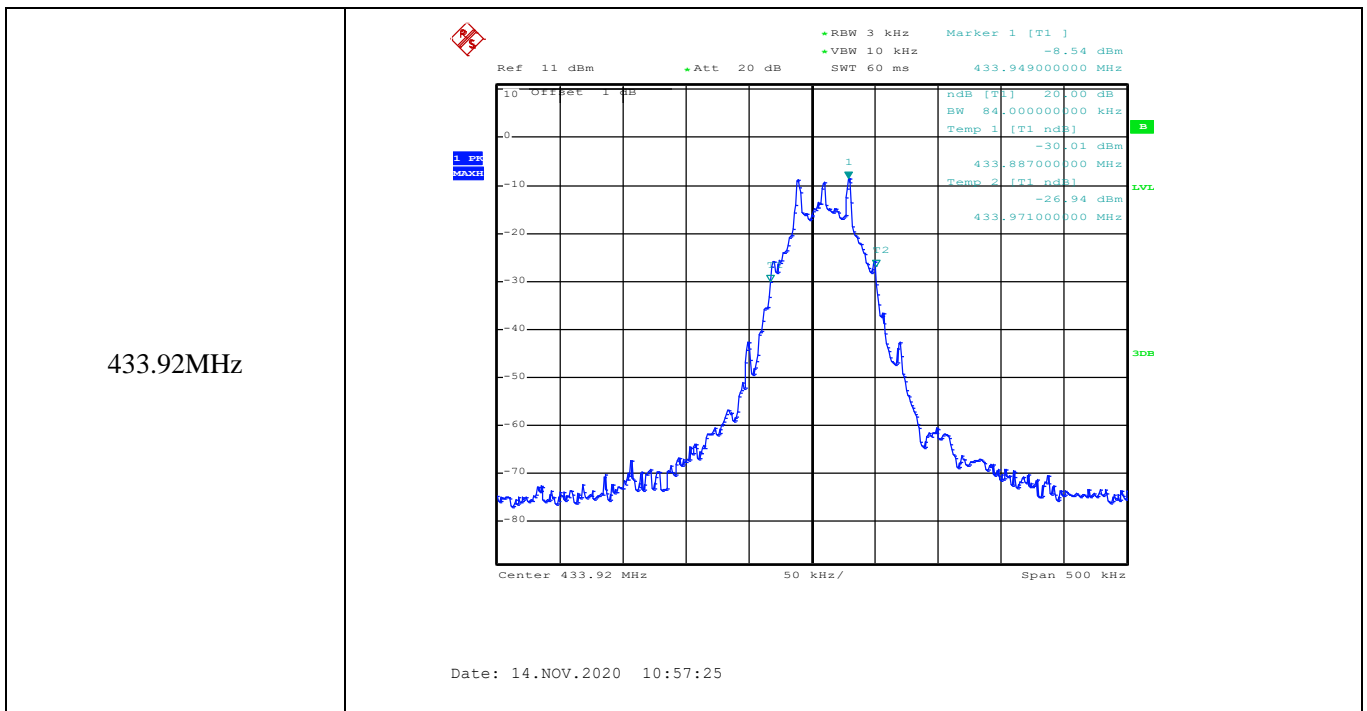

## 6. Transmission Time

---

### 6.1 Standard Applicable

According to FCC Part 15.231(a), the transmitter shall be complied the following requirements:

- 1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

### 6.2 Test Procedure


With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

### 6.3 Summary of Test Results/Plots


Transmission Type	Test Frequency (MHz)	Transmission Time (s)		Limit (s)	Result
		ANT 1	ANT 2		
Manually	433.92	2.09	4.26	5	Pass

*Please refer to the attached plots.*

ANT 1

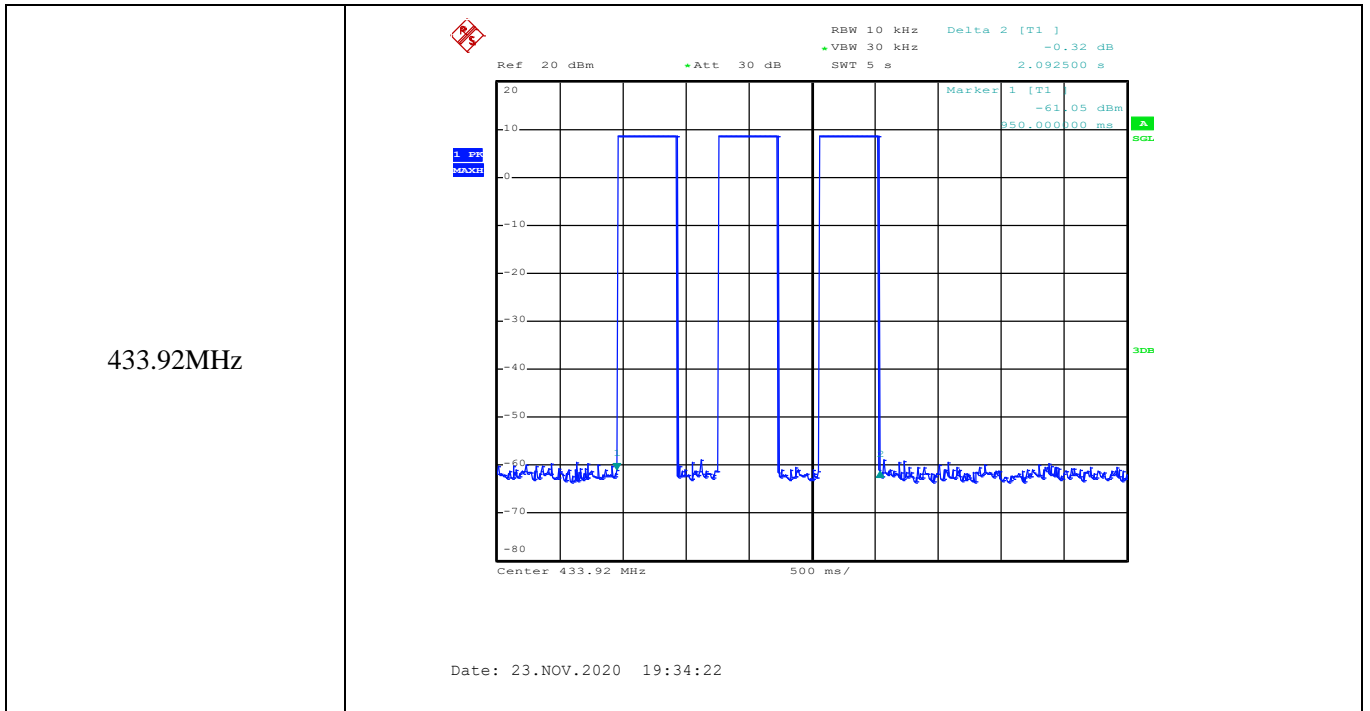

ANT 2

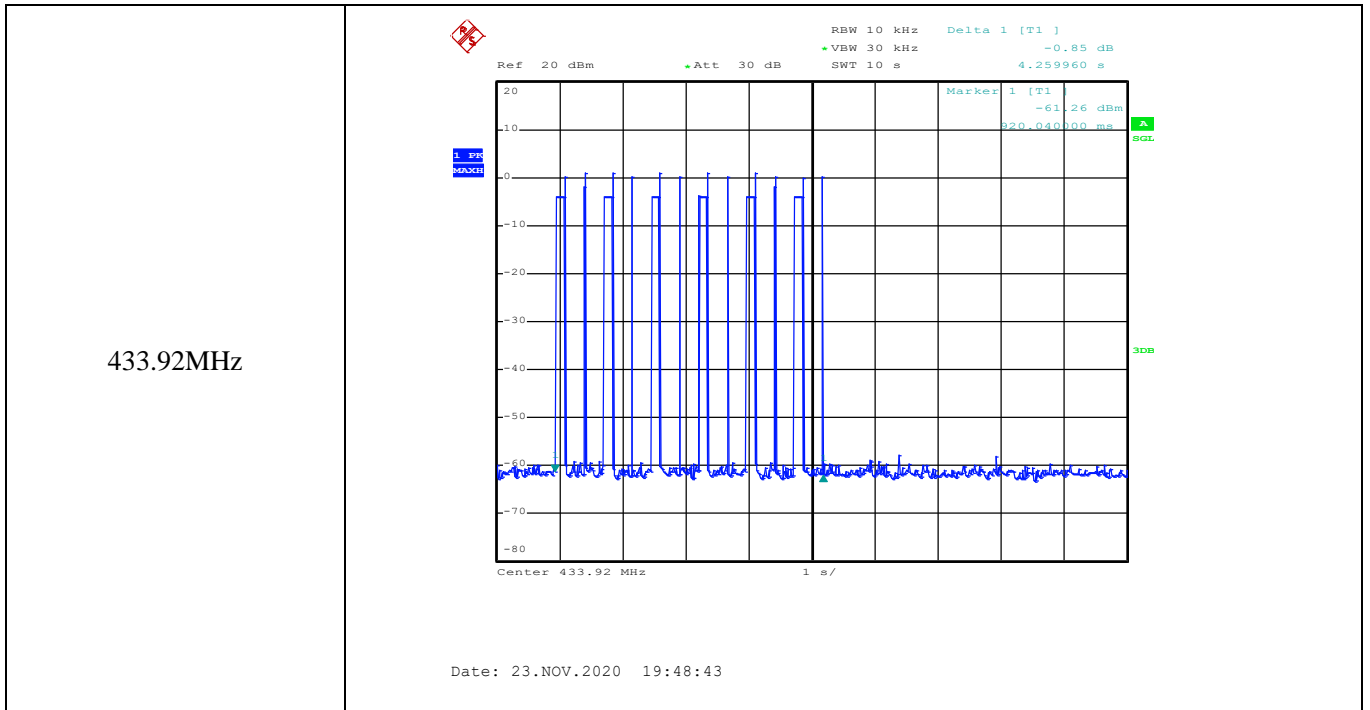

## 7. Duty Cycle

---

### 7.1 Standard Applicable

According to FCC Part 15.231 (b)(2) and 15.35 (c), for pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

### 7.2 Test Procedure

With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.

### 7.3 Summary of Test Results/Plots

#### ANT 1

Type of Pulse	Width of Pulse (ms)	Quantity of Pulse	Transmission Time (ms)	Total Time (T <sub>on</sub> ) (ms)
Pulse 1 (Wide)	5.34	1	5.34	36.54
Pulse 2 (Narrow)	1.08	13	14.04	
Pulse 3 (Narrow)	0.66	26	17.16	

Test Period (T <sub>p</sub> )	Total Time (T <sub>on</sub> )	Duty Cycle	Duty Cycle Factor
ms	ms	%	dB
60	36.54	60.90	-4.31

#### ANT 2



Duty Cycle=100/100=100%

Duty Cycle Factor=20\*log (100/100) = 0dB


*Please refer to the attached test plots*

ANT 1

433.92MHz	
Test Period	<p>Ref 20 dBm    Att 30 dB    RBW 10 kHz    Marker 1 [T1]    -56.48 dBm VBW 30 kHz    SWT 200 ms    Delta 3 [T1]    1.45 dB PRG -8.5 dBm</p> <p>Center 433.92 MHz    20 ms/</p> <p>Date: 23.NOV.2020 19:37:36</p>
Test Period	<p>Ref 20 dBm    Att 30 dB    RBW 10 kHz    Delta 3 [T1]    1.78 dB VBW 30 kHz    SWT 80 ms    Marker 1 [T1]    -58.49 dBm PRG -8.5 dBm</p> <p>Center 433.92 MHz    8 ms/</p> <p>Date: 23.NOV.2020 19:41:34</p>
Test Period	<p>Ref 20 dBm    Att 30 dB    RBW 10 kHz    Delta 1 [T1]    -0.16 dB VBW 30 kHz    SWT 30 ms    Marker 1 [T1]    -56.02 dBm PRG -8.5 dBm</p> <p>Center 433.92 MHz    3 ms/</p> <p>Date: 23.NOV.2020 19:43:51</p>
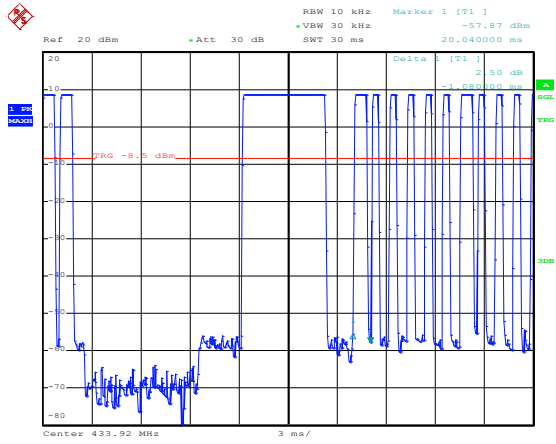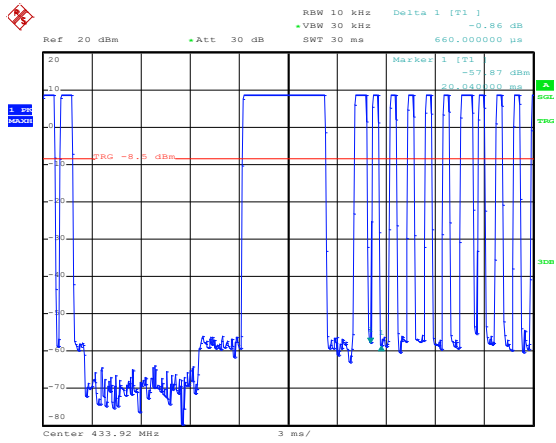
<p>Test Period</p>	 <p>Date: 23.NOV.2020 19:44:19</p>
<p>Test Period</p>	 <p>Date: 23.NOV.2020 19:44:39</p>

ANT 2

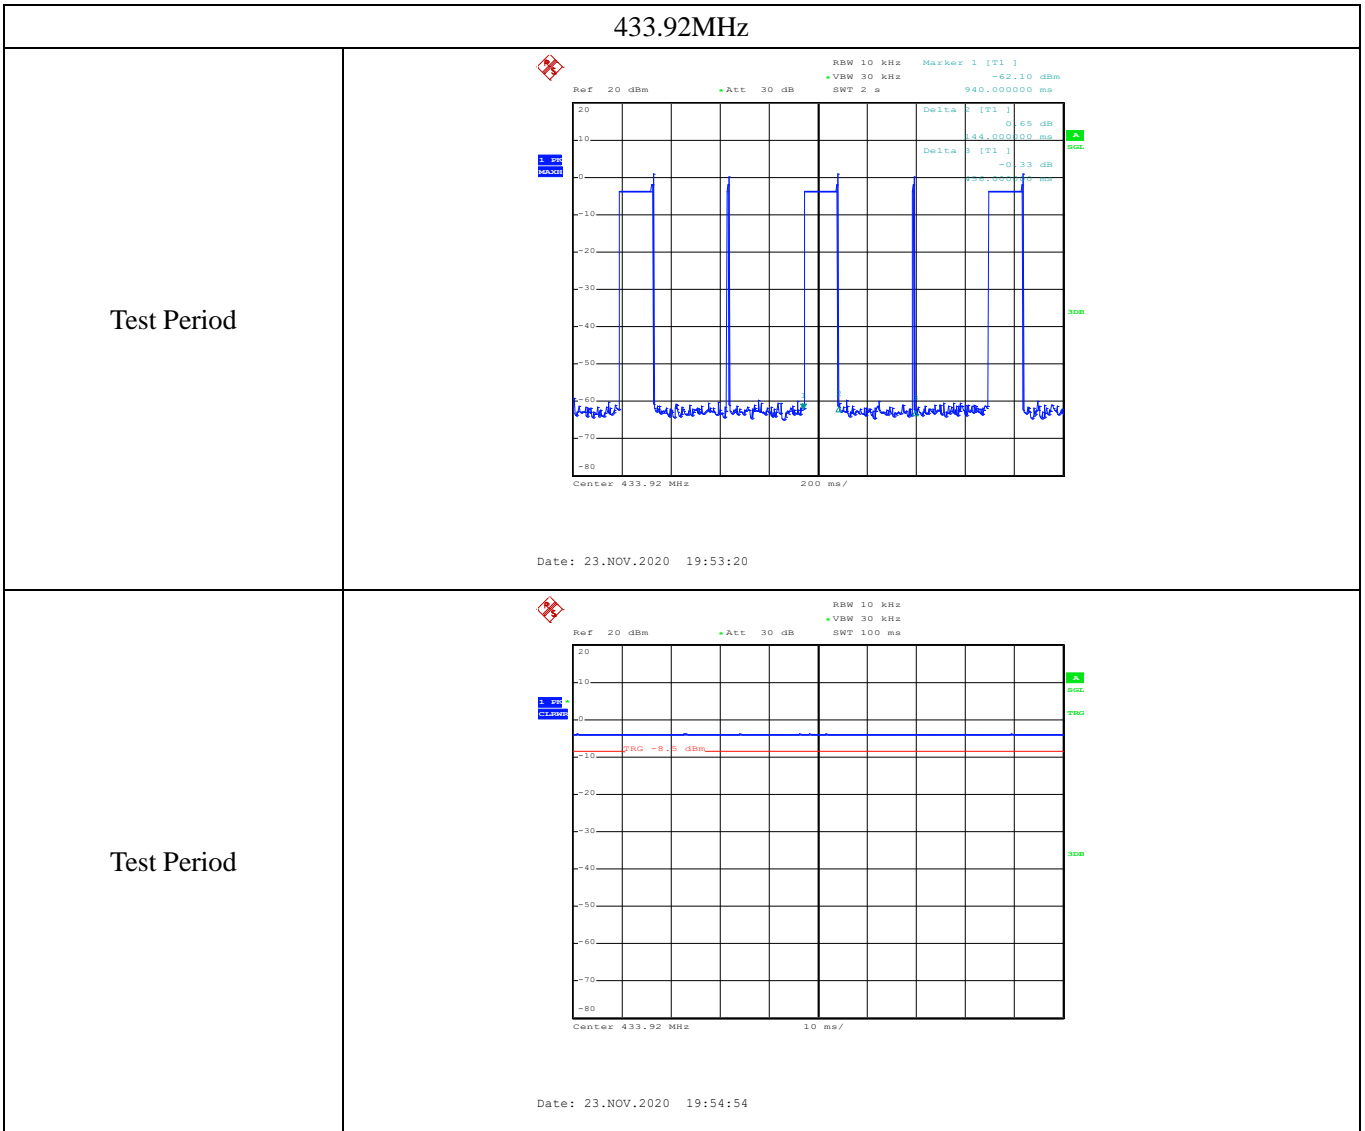



## 8. Conducted Emissions


### 8.1 Test Procedure

The setup of EUT is according with per ANSI C63.10:2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### 8.2 Basic Test Setup Block Diagram

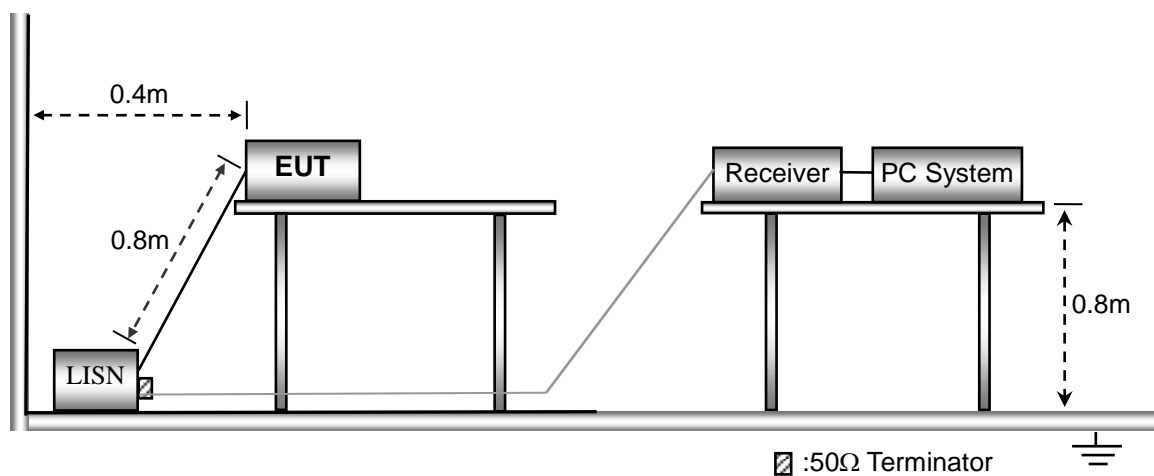


### 8.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150 kHz
Stop Frequency .....	30 MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth .....	9 kHz
Quasi-Peak Adapter Mode .....	Normal


### 8.4 Summary of Test Results/Plots

Test Mode	TM1(AC120V 60Hz)	Polarity:	Neutral
-----------	------------------	-----------	---------

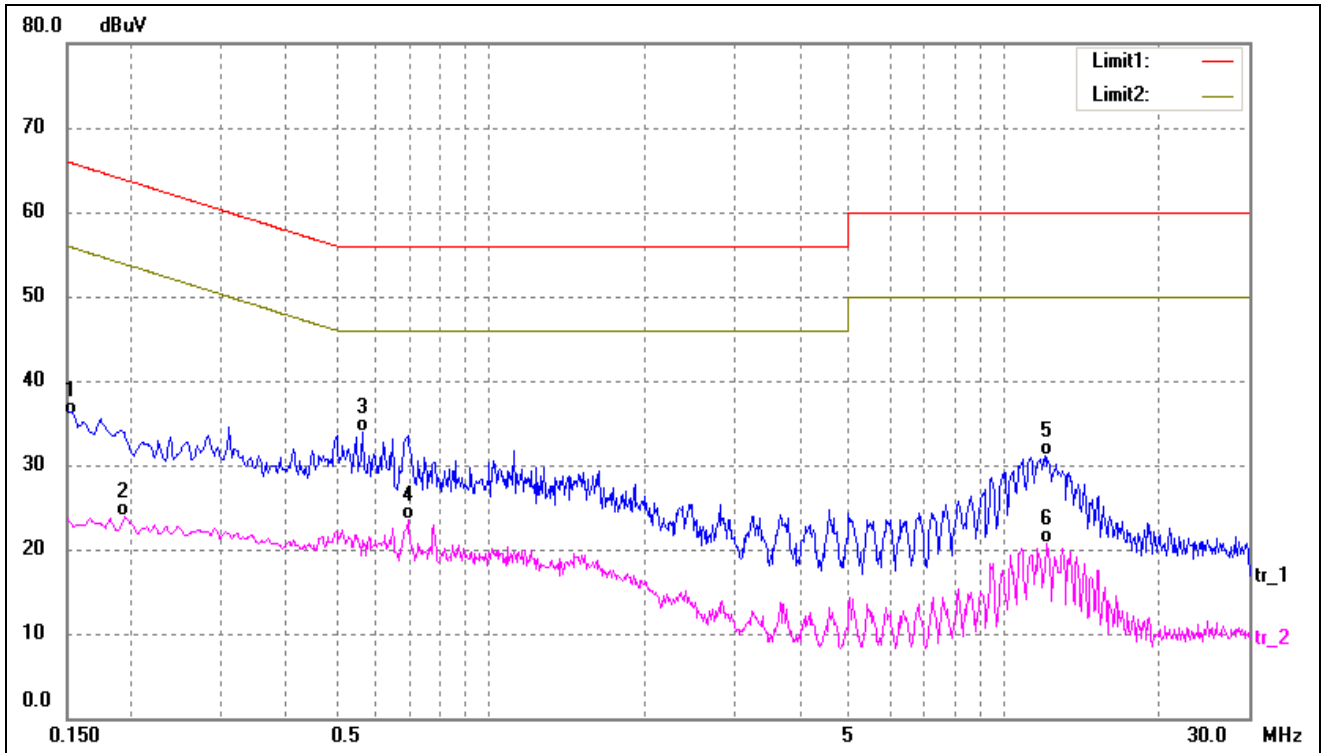

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1548	25.61	10.25	35.86	65.74	-29.88	QP
2	0.1940	13.65	10.27	23.92	53.86	-29.94	AVG
3*	0.5660	23.62	10.21	33.83	56.00	-22.17	QP
4	0.6900	13.33	10.17	23.50	46.00	-22.50	AVG
5	12.0260	20.69	10.40	31.09	60.00	-28.91	QP
6	12.1820	10.27	10.41	20.68	50.00	-29.32	AVG

Test Mode	TM1(AC120V 60Hz)	Polarity:	Line
-----------	------------------	-----------	------

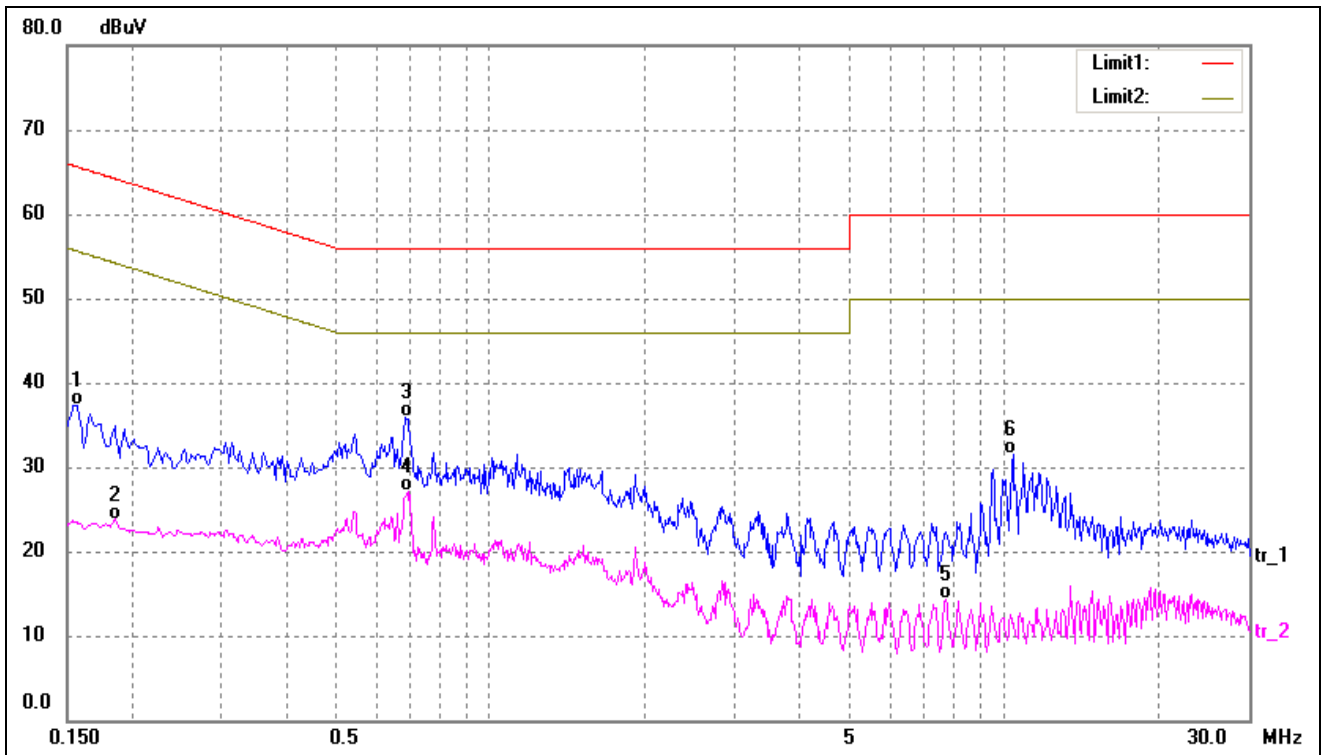

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	26.99	10.25	37.24	65.57	-28.33	QP
2	0.1860	13.54	10.26	23.80	54.21	-30.41	AVG
3	0.6860	25.76	10.17	35.93	56.00	-20.07	QP
4*	0.6900	16.88	10.17	27.05	46.00	-18.95	AVG
5	7.7020	4.08	10.26	14.34	50.00	-35.66	AVG
6	10.4260	21.29	10.30	31.59	60.00	-28.41	QP

## **APPENDIX PHOTOGRAPHS**

---

**Please refer to “ANNEX”**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***