

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

Funai Electric R & D (Shenzhen) Co., Ltd.

WiFi module

U9W42 Y

FCC ID: 2AU3BU9W42

Prepared for : Funai Electric R & D (Shenzhen) Co., Ltd.
B303 Technology Building II, 1057 Nanhai Road, Nanshan
District, Shenzhen, China 518067

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F20001-1
Date of Test : Nov.28~Dec.03,2020
Date of Report : Jan.15,2021

TABLE OF CONTENTS

| <u>Description</u> | <u>Page</u> |
|--|-------------|
| 1. SUMMARY OF STANDARDS AND RESULTS..... | 5 |
| 1.1. Description of Standards and Results..... | 5 |
| 2. GENERAL INFORMATION..... | 6 |
| 2.1. Description of Equipment Under Test..... | 6 |
| 2.2. Feature of Equipment Under Test..... | 7 |
| 2.3. Tested Supporting System Details..... | 8 |
| 2.4. Block Diagram of connection between EUT and simulators..... | 8 |
| 2.5. Test information..... | 8 |
| 2.6. Test Facility..... | 9 |
| 2.7. Measurement Uncertainty (95% confidence levels, k=2)..... | 9 |
| 3. POWER LINE CONDUCTED EMISSION TEST..... | 10 |
| 3.1. Test Equipments..... | 10 |
| 3.2. Block Diagram of Test Setup..... | 10 |
| 3.3. Power Line Conducted Emission Test Limits..... | 10 |
| 3.4. Configuration of EUT on Test..... | 10 |
| 3.5. Operating Condition of EUT..... | 11 |
| 3.6. Test Procedure..... | 11 |
| 3.7. Power Line Conducted Emission Test Results..... | 11 |
| 4. RADIATED EMISSION MEASUREMENT..... | 14 |
| 4.1. Test Equipment..... | 14 |
| 4.2. Block Diagram of Test Setup..... | 15 |
| 4.3. Radiated Emission Limit Standard..... | 16 |
| 4.4. EUT Configuration on Test..... | 16 |
| 4.5. Operating Condition of EUT..... | 16 |
| 4.6. Test Procedure..... | 16 |
| 4.7. Radiated Emission Test Results..... | 17 |
| 5. MAXIMUM PEAK OUTPUT POWER TEST..... | 56 |
| 5.1. Test Equipment..... | 56 |
| 5.2. Limit..... | 56 |
| 5.3. Test Procedure..... | 56 |
| 5.4. Test Results..... | 56 |
| 6. BAND EDGE COMPLIANCE TEST..... | 57 |
| 6.1. Test Equipment..... | 57 |
| 6.2. Limit..... | 57 |
| 6.3. Test Produce..... | 57 |
| 6.4. Test Results..... | 57 |
| 7. ANTENNA REQUIREMENT..... | 66 |
| 7.1. Standard Applicable..... | 66 |
| 7.2. Antenna Connected Construction..... | 66 |
| 8. DEVIATION TO TEST SPECIFICATIONS..... | 67 |

Appendix A. Photograph of Test

Appendix B. Photo of the EUT

TEST REPORT CERTIFICATION

Applicant : Funai Electric R & D (Shenzhen) Co., Ltd.
 Manufacturer : Funai Electric R & D (Shenzhen) Co., Ltd.
 Product : WiFi module
 FCC ID : 2AU3BU9W42
 (A) Model No. : U9W42 Y
 (B) Test Voltage : DC 3.3V

Tested for comply with:
 FCC CFR47 Part 15 Subpart C

Test procedure used:
 ANSI C63.10: 2013

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1074. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Nov.28~Dec.03,2020 Report of date: Jan.15,2021

Prepared by : Brave Zhang Reviewed by : Sunny Lu
 Brave Zhang / Assistant Sunny Lu / Deputy Manager

信華科技 (深圳) 有限公司
 Audix Technology (Shenzhen) Co., Ltd.
 EMC 部門報告專用章
 Stamp only for EMC Dept. Report
 Signature: David Jin
 David Jin / Deputy General Manager

Approved & Authorized Signer :

REPORT REVISION HISTORY

| Edition No. | Revision | Issue Data | Report No. |
|--------------------|--|-------------------|-------------------|
| Original | Initial issue of report | Mar.31,2020 | ACS-F20001 |
| Rev.01 | 1. Change internal SMT antenna(Bluetooth Antenna) to external antenna; 2. Change the model no. from U9W42 to U9W42 Y. | Jan.15,2021 | ACS-F20001-1 |

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

| EMISSION | | |
|------------------------------------|---|---------|
| Description of Test Item | Standard | Results |
| Power Line Conducted Emission Test | FCC Part 15: 15.207 ANSI C63.10 2013 | PASS |
| Radiated Emission Test | FCC Part 15 15.209 FCC Part 15 15.205 FCC Part 15 15.247(d) ANSI C63.10 2013 | PASS |
| Conducted Spurious Emissions | FCC Part 15: 15.247(d) ANSI C63.10 2013 | N/A |
| Carrier Frequency Separation Test | FCC Part 15: 15.247(a)(1) ANSI C63.10 2013 | N/A |
| 20dB & 99% Bandwidth Test | FCC Part 15: 15.215 ANSI C63.10 2013 | N/A |
| Number Of Hopping Frequency Test | FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 2013 | N/A |
| Dwell Time Test | FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 2013 | N/A |
| Maximum Peak Output Power Test | FCC Part 15 15.247(b)(1) ANSI C63.10 2013 | PASS |
| Band Edge Compliance Test | FCC Part 15 15.247(d) ANSI C63.10 2013 | PASS |
| Antenna requirement | FCC Part 15: 15.203 | PASS |

Note: N/A means that the change of the Bluetooth antenna has no effect on the test item and does not need to be retested.

2. GENERAL INFORMATION

2.1. Description of Equipment Under Test

| | |
|--|---|
| Applicant | Funai Electric R & D (Shenzhen) Co., Ltd. |
| Applicant Address | B303 Technology Building II, 1057 Nanhai Road, Nanshan District, Shenzhen, China 518067 |
| Manufacturer | Funai Electric R & D (Shenzhen) Co., Ltd. |
| Manufacturer Address | B303 Technology Building II, 1057 Nanhai Road, Nanshan District, Shenzhen, China 518067 |
| Factory | Funai (Thailand) Company Limited |
| Factory Address | 835 Moo18, Pakchong-Lumsompung Road, Tambon, Chantuek, Amphur Pakchong, Nakhon Ratchasima 30130, Thailand |
| Product | WiFi module |
| Model No. | U9W42 Y |
| FCC ID | 2AU3BU9W42 |
| Sample Type | Prototype production |
| Date of Receipt | Nov.18,2019 |
| Date of Test | Nov.28~Dec.03,2020 |
| Remark: This report only for Bluetooth V3.0+EDR. | |

2.2. Feature of Equipment Under Test


| Product Feature & Specification | | |
|---------------------------------|--|---------------|
| Product | WiFi module | |
| Model No. | U9W42 Y | |
| Radio | IEEE802.11 a/b/g/n/ac; Bluetooth V3.0+EDR; Bluetooth V5.0 | |
| Power Source | <input type="checkbox"/> Commercial Power | AC 100 ~ 240V |
| | <input checked="" type="checkbox"/> External Power Source | DC 3.3V |
| | <input type="checkbox"/> Lithium battery | DC V, mAh |
| | <input type="checkbox"/> UM battery | DC V |
| Bluetooth | | |
| Bluetooth Version | V5.0 dual mode | |
| Frequency Range | 2402-2480MHz | |
| Type of Modulation | GFSK, $\pi/4$ DQPSK, 8DPSK | |
| Data Rate | 1Mbps, 2Mbps, 3Mbps | |
| Quantity of Channels | 79/40 | |
| Channel Separation | 1MHz/2MHz | |
| 2.4GHz Wi-Fi | | |
| Support Modes | 802.11b/g/n20/n40 | |
| Frequency Range | 2412-2462MHz | |
| Type of Modulation | 802.11b(DSSS): CCK, QPSK, BPSK; 802.11g/n(OFDM): 64QAM,16QAM, QPSK, BPSK | |
| Data Rate | 802.11b: 1/2/5.5/11 Mbps; 802.11g: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 300Mbps | |
| Channel Separation | 5MHz | |
| 5GHz Wi-Fi | | |
| Support Modes | 802.11a/n20/n40/ac20/ac40/ac80 | |
| Frequency Range | 5180-5240MHz, 5745-5825MHz | |
| Type of Modulation | 802.11a/n (OFDM): QPSK, BPSK, 16QAM, 64QAM 802.11ac (OFDM): QPSK, BPSK, 16QAM, 64QAM,256QAM | |
| Data Rate | 802.11a: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 300Mbps; 802.11ac: up to 867Mbps | |
| Channel Separation | 5MHz | |

| Antenna System | |
|-------------------|--|
| Type of Antenna | Bluetooth: Multilayer Ceramic Antenna WIFI: PCB Antenna |
| Antenna Peak Gain | Bluetooth Peak Gain: -0.42dBi DTS Band (2400-2483.5MHz) Peak Gain: ANT A: -2.3dBi; ANT B: -1dBi. U-NII-1 Band(5150-5250MHz) Peak Gain: ANT A: 2.9dBi; ANT B: -3.8dBi. U-NII-3 Band (5725-5850MHz) Peak Gain: ANT A: -1.9dBi; ANT B: -4.5dBi. |

2.3. Tested Supporting System Details

| No. | Description | ACS No. | Manufacturer | Model | Serial Number |
|---------------------------------------|-------------|---------|--------------|-------|---------------|
| 1. | Notebook | N/A | acer | ZOW | NVX7C |
| USB Cable: Shielded, Detachable, 1.0m | | | | | |

2.4. Block Diagram of connection between EUT and simulators



(EUT: WiFi module)

2.5. Test information

A special software (WCN Combo Tool) was used to control EUT work in continuous TX mode

| Tested mode, Packet Type, peak output power information | | | |
|---|-------------|----------------------------|----------------------------|
| Mode | Packet Type | Output power(dBm) P max | Output Power(dBm) P low |
| GFSK | DH1 | 8.281 | 7.286 |
| | DH3 | | |
| | DH5 | | |
| $\pi/4$ DQPSK | 2-DH1 | 7.125 | 6.974 |
| | 2-DH3 | | |
| | 2-DH5 | | |
| 8DPSK | 3-DH1 | 11.394 | 10.581 |
| | 3-DH3 | | |
| | 3-DH5 | | |

$\pi/4$ DQPSK mode has been verified to have the lowest power, so the final test were performed with GFSK and 8DPSK mode, the worse-case packet type were:

GFSK Mode: DH5

8DPSK Mode: 3DH5

| Item | | Modulation | Data Rate | Test Channel |
|---------------------|------------------------------|------------|-----------|--------------|
| Radiated Test Case | Radiated Band Edge | GFSK | 1Mbps | 00/78 |
| | | 8-DPSK | 3Mbps | 00/78 |
| | Radiated Spurious Emission | GFSK | 1Mbps | 00/39/78 |
| | | 8-DPSK | 3Mbps | 00/39/78 |
| Conducted Test Case | 20dB Bandwidth | GFSK | 1Mbps | 00/39/78 |
| | | 8-DPSK | 3Mbps | 00/39/78 |
| | Carrier Frequency Separation | GFSK | 1Mbps | 39 |
| | | 8-DPSK | 3Mbps | 39 |
| | Time of Occupancy | GFSK | 1Mbps | 39 |
| | | 8-DPSK | 3Mbps | 39 |
| | Number of Hopping Channels | GFSK | 1Mbps | 39 |
| | | 8-DPSK | 3Mbps | 39 |
| | Maximum Peak Output Power | GFSK | 1Mbps | 00/39/78 |
| | | 8-DPSK | 3Mbps | 00/39/78 |
| | Band Edges | GFSK | 1Mbps | 00/78 |
| | | 8-DPSK | 3Mbps | 00/78 |
| Spurious Emission | GFSK | 1Mbps | 00/39/78 | |
| | 8-DPSK | 3Mbps | 00/39/78 | |

2.6. Test Facility
Site Description

- Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
: No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China
- EMC Lab. : Accredited by Industry Canada
: Registration Number: IC 5183A-1
Valid Date: Mar.31, 2021
- : Accredited by DAkkS, Germany
: Registration No: D-PL-12151-01-00
Valid Date: Dec.07, 2021
- : Accredited by NVLAP, USA
: NVLAP Code: 200372-0
Valid Date: Mar.31, 2021
- : Certificated by FCC USA.
: Designation No.: CN5022
Valid Date: Mar.31, 2021

2.7. Measurement Uncertainty (95% confidence levels, k=2)

| Test Item | Uncertainty |
|---|-----------------------------------|
| Uncertainty for Conduction emission test in No. 1 Conduction | 2.6dB(150KHz to 30MHz) |
| Uncertainty for Radiation Emission test in 3m chamber | 3.6dB(30~200MHz, Polarization: H) |
| | 4.0dB(30~200MHz, Polarization: V) |
| | 3.6dB(200M~1GHz, Polarization: H) |
| | 3.8dB(200M~1GHz, Polarization: V) |
| Uncertainty for Radiation Emission test in 3m chamber(1GHz-25GHz) | 4.6dB(1~6GHz, Distance: 3m) |
| | 4.6dB(6~25GHz, Distance: 3m) |
| Uncertainty for Radiated Spurious Emission test in RF chamber | 3.7dB(30MHz~1000MHz) |
| | 3.3dB(1~26.5GHz) |
| Uncertainty for Conduction Spurious emission test | 2.0dB |
| Uncertainty for Output power test | 0.8dB |
| Uncertainty for Bandwidth test | 83kHz |
| Uncertainty for DC power test | 1.9% |
| Uncertainty for test site temperature and humidity | 0.6°C |
| | 3% |

Note: EMI uncertainty is evaluated by CISPR16-4-2.

The value of measurement uncertainty of EMI is less than U_{CISPR} .

The value is not calculated in the test results.


3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-------------------|-----------------|------------------------------|------------|-----------|---------------|
| 1. | 1# Shielding Room | AUDIX | N/A | N/A | May.17,18 | 3 Year |
| 2. | EMI Test Receiver | Rohde & Schwarz | ESCI | 100842 | Apr.12,20 | 1 Year |
| 3. | L.I.S.N.#1 | Rohde & Schwarz | ENV216 | 102160 | Oct.11,20 | 1 Year |
| 4. | L.I.S.N.#2 | Kyoritsu | KNW-407 | 8-1636-1 | Apr.12,20 | 1 Year |
| 5. | Terminator | Hubersuhner | 50Ω | No.1 | Apr.12,20 | 1 Year |
| 6. | Terminator | Hubersuhner | 50Ω | No.2 | Apr.12,20 | 1 Year |
| 7. | RF Cable | EMCI | EMCCFD30 0-BM-NM-2 000 | 190422 | Apr.12,20 | 1 Year |
| 8. | Test Software | AUDIX | e3 | 6.100913a | N/A | N/A |

Note: N/A means Not applicable.

3.2. Block Diagram of Test Setup

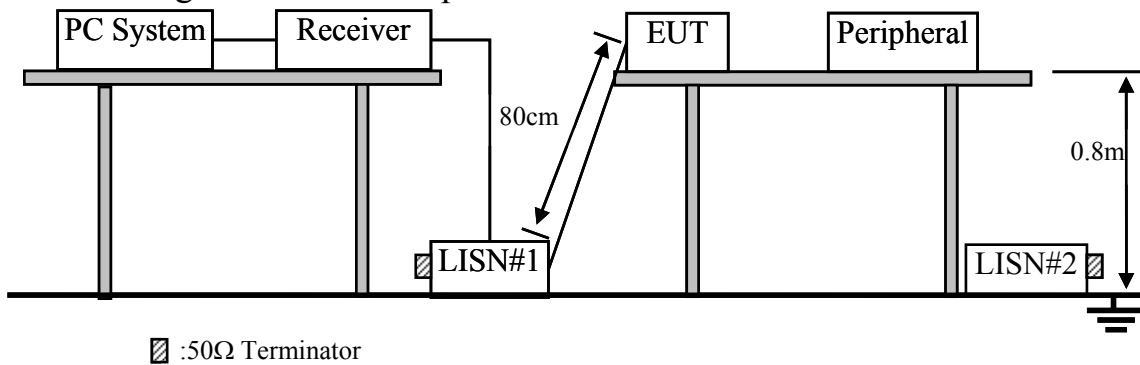

3.3. Power Line Conducted Emission Test Limits

| Frequency | Maximum RF Line Voltage | |
|-----------------|----------------------------|-------------------------|
| | Quasi-Peak Level dB(μV) | Average Level dB(μV) |
| 150kHz ~ 500kHz | 66 ~ 56* | 56 ~ 46* |
| 500kHz ~ 5MHz | 56 | 46 |
| 5MHz ~ 30MHz | 60 | 50 |

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. WiFi module (EUT)

Model No. : U9W42 Y

Serial No. : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT as shown as Section 3.2.
- 3.5.2. Turn on the power of EUT.
- 3.5.3. PC run test software to control EUT work in Tx mode.

3.6. Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via AC unit connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7. Power Line Conducted Emission Test Results


PASS. (All emissions not reported below are too low against the prescribed limits.)

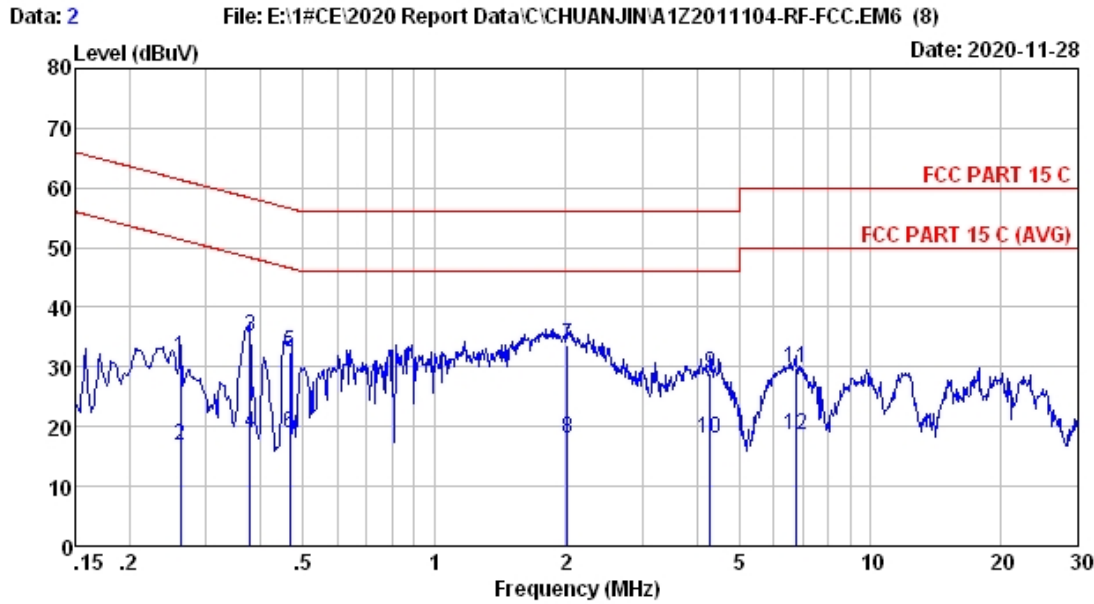

Site no :1# Conduction Data No :2
 Dis./Lisn :2020 ENV216-L LISN phase:
 Limit :FCC PART 15 C
 Env./Ins. :Temp:23.9°C Humi:46% Engineer :Evan
 EUT :
 Power Rating :DC 5V From Notebook Input AC 120V/60Hz
 Test Mode :BT3.0 Mode

| No | Freq (MHz) | LISN Factor (dB) | Cable loss (dB) | Reading (dBuV) | Emission Level (dBuV) | Limits (dBuV) | Margin (dB) | Remark |
|----|------------|------------------|-----------------|----------------|-----------------------|---------------|-------------|---------|
| 1 | 0.262 | 9.70 | 0.01 | 21.95 | 31.66 | 61.38 | 29.72 | QP |
| 2 | 0.262 | 9.70 | 0.01 | 7.26 | 16.97 | 51.38 | 34.41 | Average |
| 3 | 0.377 | 9.70 | 0.01 | 25.45 | 35.16 | 58.34 | 23.18 | QP |
| 4 | 0.377 | 9.70 | 0.01 | 9.26 | 18.97 | 48.34 | 29.37 | Average |
| 5 | 0.466 | 9.70 | 0.01 | 22.74 | 32.45 | 56.58 | 24.13 | QP |
| 6 | 0.466 | 9.70 | 0.01 | 9.26 | 18.97 | 46.58 | 27.61 | Average |
| 7 | 2.023 | 9.70 | 0.03 | 23.87 | 33.60 | 56.00 | 22.40 | QP |
| 8 | 2.023 | 9.70 | 0.03 | 8.27 | 18.00 | 46.00 | 28.00 | Average |
| 9 | 4.292 | 9.70 | 0.04 | 19.20 | 28.94 | 56.00 | 27.06 | QP |
| 10 | 4.292 | 9.70 | 0.04 | 8.27 | 18.01 | 46.00 | 27.99 | Average |
| 11 | 6.733 | 9.70 | 0.05 | 20.15 | 29.90 | 60.00 | 30.10 | QP |
| 12 | 6.733 | 9.70 | 0.05 | 8.90 | 18.65 | 50.00 | 31.35 | Average |

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

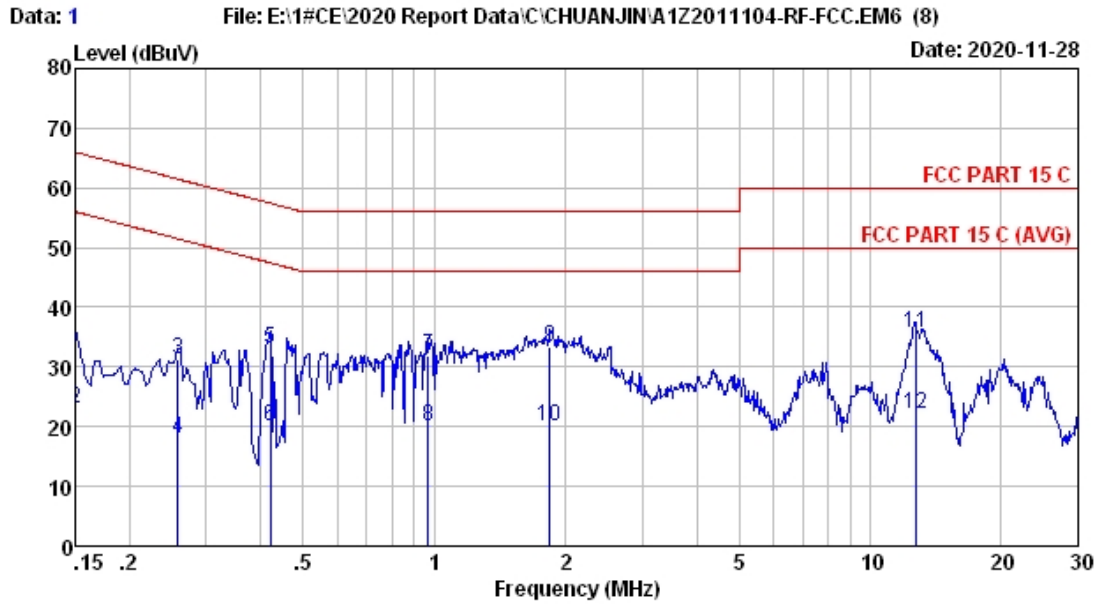

Site no :1# Conduction Data No :1
 Dis./Lisn :2020 ENV216-N LISN phase:
 Limit :FCC PART 15 C
 Env./Ins. :Temp:23.9*C Humi:46% Engineer :Evan
 EUT :
 Power Rating :DC 5V From Notebook Input AC 120V/60Hz
 Test Mode :BT3.0 Mode

| No | Freq (MHz) | LISN Factor (dB) | Cable loss (dB) | Reading (dBuV) | Emission Level (dBuV) | Limits (dBuV) | Margin (dB) | Remark |
|----|------------|------------------|-----------------|----------------|-----------------------|---------------|-------------|---------|
| 1 | 0.150 | 9.70 | 0.01 | 24.70 | 34.41 | 66.00 | 31.59 | QP |
| 2 | 0.150 | 9.70 | 0.01 | 13.26 | 22.97 | 56.00 | 33.03 | Average |
| 3 | 0.258 | 9.70 | 0.01 | 21.44 | 31.15 | 61.51 | 30.36 | QP |
| 4 | 0.258 | 9.70 | 0.01 | 8.27 | 17.98 | 51.51 | 33.53 | Average |
| 5 | 0.421 | 9.70 | 0.01 | 23.22 | 32.93 | 57.42 | 24.49 | QP |
| 6 | 0.421 | 9.70 | 0.01 | 10.27 | 19.98 | 47.42 | 27.44 | Average |
| 7 | 0.968 | 9.70 | 0.02 | 22.17 | 31.89 | 56.00 | 24.11 | QP |
| 8 | 0.968 | 9.70 | 0.02 | 10.30 | 20.02 | 46.00 | 25.98 | Average |
| 9 | 1.839 | 9.70 | 0.03 | 23.49 | 33.22 | 56.00 | 22.78 | QP |
| 10 | 1.839 | 9.70 | 0.03 | 10.26 | 19.99 | 46.00 | 26.01 | Average |
| 11 | 12.716 | 9.80 | 0.07 | 25.76 | 35.63 | 60.00 | 24.37 | QP |
| 12 | 12.716 | 9.80 | 0.07 | 12.26 | 22.13 | 50.00 | 27.87 | Average |

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

4. RADIATED EMISSION MEASUREMENT

4.1. Test Equipment

Frequency range: 30~1000MHz

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|---------------------------|-----------------|-------------|-----------------|-----------|---------------|
| 1. | 3#Chamber(NSA) | AUDIX | N/A | N/A | May.03,20 | 1 Year |
| 2. | 3#Chamber(SE) | AUDIX | N/A | N/A | May.17,18 | 3 Year |
| 3. | Signal Analyzer | Rohde & Schwarz | FSV30 | 104050 | Apr.11,20 | 1 Year |
| 4. | EMI Test Receiver | Rohde & Schwarz | ESR7 | 101547 | Apr.12,20 | 1 Year |
| 5. | Amplifier | HP | 8447D | 2648A04738 | Apr.11,20 | 1 Year |
| 6. | Tri-log-Broadband Antenna | SCHWARZBECK | VULB 9168 | 710 | Oct.19,20 | 1 Year |
| 7. | NSA Cable | HUBER+SUHNER | CFD400NL-LW | No.3 | Oct.11,20 | 1 Year |
| 8. | Coaxial Switch | Anritsu | MP59B | 6201397222 | Apr.11,20 | 1 Year |
| 9. | Test Software | AUDIX | e3 | 6.2009-5-21a(n) | N/A | N/A |


Note: N/A means Not applicable.

Frequency range: above 1000MHz


| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|------------------|-----------------|--------------|-----------------|-----------|---------------|
| 1. | 3#Chamber(Svswr) | AUDIX | N/A | N/A | Apr.15,20 | 1 Year |
| 2. | 3#Chamber(SE) | AUDIX | N/A | N/A | May.17,18 | 3 Year |
| 3. | Signal Analyzer | Rohde & Schwarz | FSV30 | 104050 | Apr.11,20 | 1 Year |
| 4. | Horn Antenna | ETC | MCTD 1209 | DRH15F03006 | Jul.30,20 | 1 Year |
| 5. | Horn Antenna | ETS | 3116 | 00062639 | Aug.06,20 | 1 Year |
| 6. | Amplifier | Agilent | 83017A | MY53270084 | Oct.11,20 | 1 Year |
| 7. | RF Cable | Hubersuhner | SUCOFLEX-106 | 505238/6 | Apr.11,20 | 1 Year |
| 8. | Test Software | AUDIX | e3 | 6.2009-5-21a(n) | N/A | N/A |

Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup
For frequency range 30MHz-1000MHz

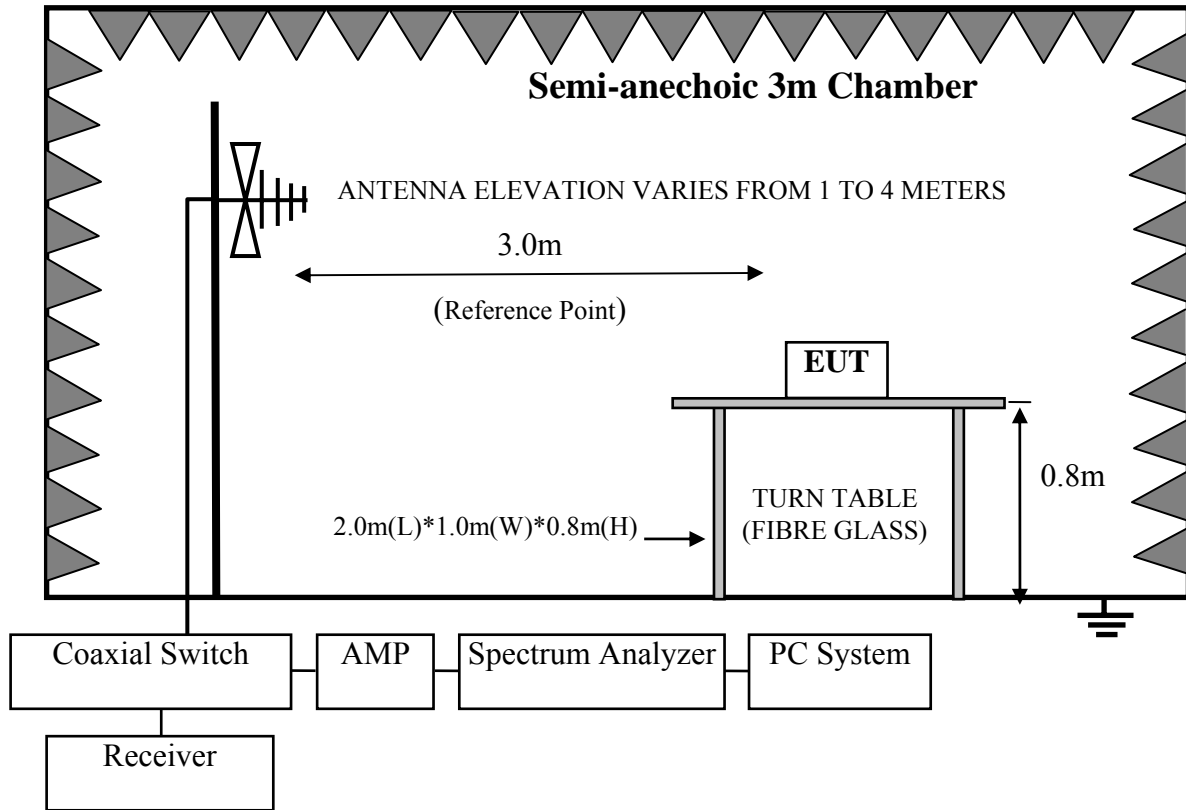

For frequency range above 1GHz

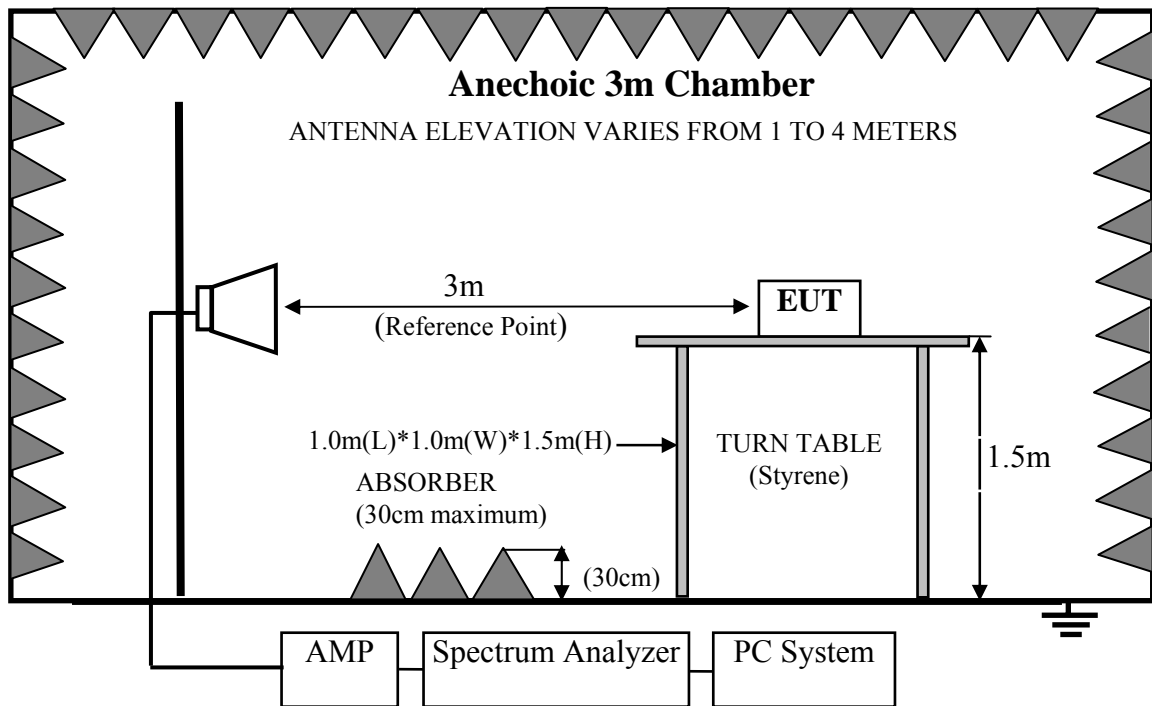

4.3. Radiated Emission Limit Standard:

| FREQUENCY MHz | DISTANCE Meters | FIELD STRENGTHS LIMIT | |
|------------------|--------------------|---|----------|
| | | μV/m | dB(μV)/m |
| 30 ~ 88 | 3 | 100 | 40.0 |
| 88 ~ 216 | 3 | 150 | 43.5 |
| 216 ~ 960 | 3 | 200 | 46.0 |
| 960 ~ 1000 | 3 | 500 | 54.0 |
| Above 1000MHz | 3 | 74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average) | |

- Remark :
- (1) Emission level dBμV = 20 log Emission level μV/m
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
 - (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4.1. WiFi module (EUT)

Model Number : U9W42 Y
Serial Number : N/A

4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2. Turn on the power of all equipments.
- 4.5.3. Let EUT work in Tx mode.

4.6. Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2013 on radiated emission Test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as the test photo indicated.

The bandwidth of the EMI test receiver (R&S ESR7) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz

This device is pulse Modulated, a duty cycle factor was used to calculated average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.7. Radiated Emission Test Results


PASS.

All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.

Note 1: The duty cycle factor for calculate average level is -24.495dB, and average limit is 20dB below peak limit, so if peak measured level comply with average limit, the average level was deemed to comply with average limit.

Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.


Frequency: 30MHz~1GHz

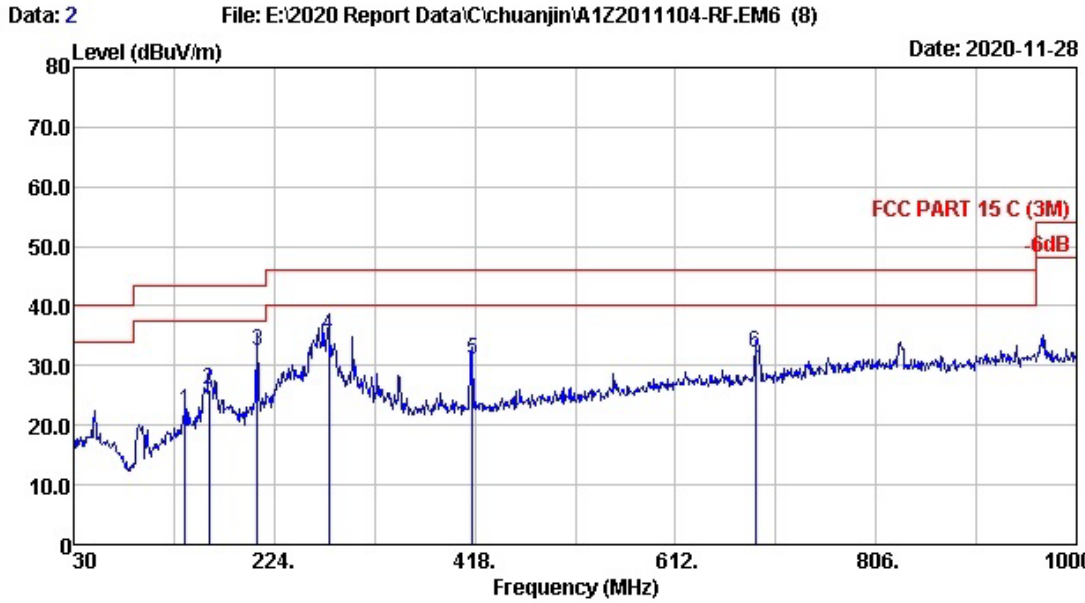

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2020 VULB9168-710 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 23.8°C/57% Engineer : The Shine
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 TX Mode

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 137.670 | 18.60 | 1.18 | 2.76 | 22.54 | 43.50 | 20.96 | QP |
| 2 | 160.950 | 19.10 | 1.29 | 5.73 | 26.12 | 43.50 | 17.38 | QP |
| 3 | 207.510 | 15.50 | 1.50 | 15.54 | 32.54 | 43.50 | 10.96 | QP |
| 4 | 276.380 | 18.44 | 1.66 | 15.06 | 35.16 | 46.00 | 10.84 | QP |
| 5 | 416.060 | 21.54 | 2.08 | 7.49 | 31.11 | 46.00 | 14.89 | QP |
| 6 | 689.600 | 26.40 | 2.78 | 3.09 | 32.27 | 46.00 | 13.73 | QP |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

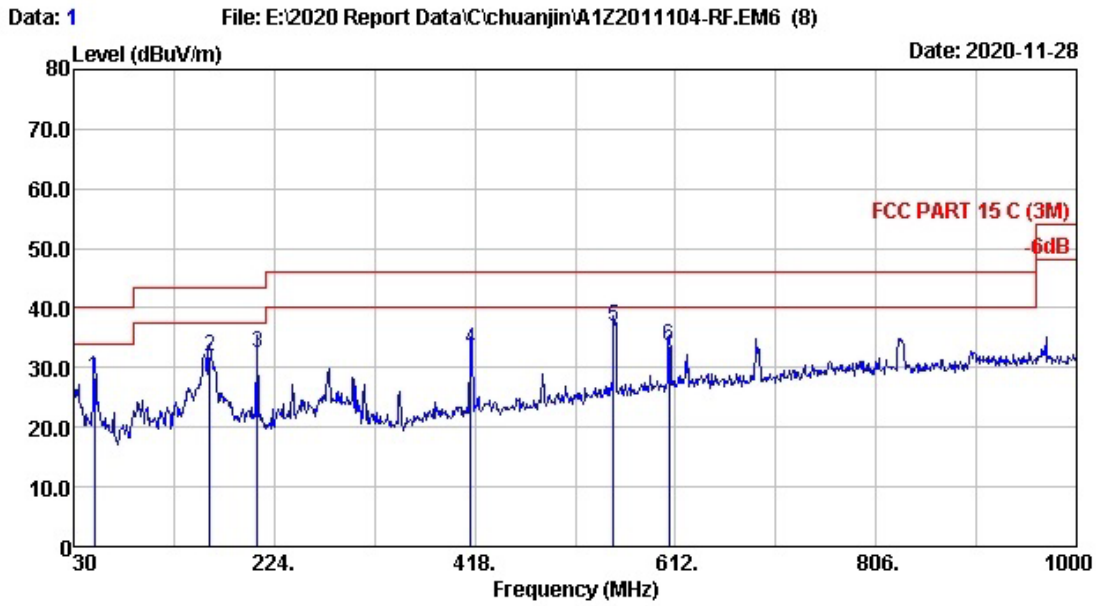


Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2020 VULB9168-710 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 23.8*C/57% Engineer : The Shine
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 TX Mode

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBUV) | Emission Level (dBUV/m) | Limits (dBUV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-------------------------|-----------------|-------------|--------|
| 1 | 50.370 | 19.60 | 0.75 | 8.10 | 28.45 | 40.00 | 11.55 | QP |
| 2 | 161.920 | 19.10 | 1.29 | 11.47 | 31.86 | 43.50 | 11.64 | QP |
| 3 | 207.510 | 15.50 | 1.50 | 15.36 | 32.36 | 43.50 | 11.14 | QP |
| 4 | 414.120 | 21.48 | 2.07 | 9.47 | 33.02 | 46.00 | 12.98 | QP |
| 5 | 551.860 | 24.14 | 2.46 | 10.19 | 36.79 | 46.00 | 9.21 | QP |
| 6 | 606.180 | 25.36 | 2.58 | 5.59 | 33.53 | 46.00 | 12.47 | QP |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


Frequency: 1GHz~18GHz

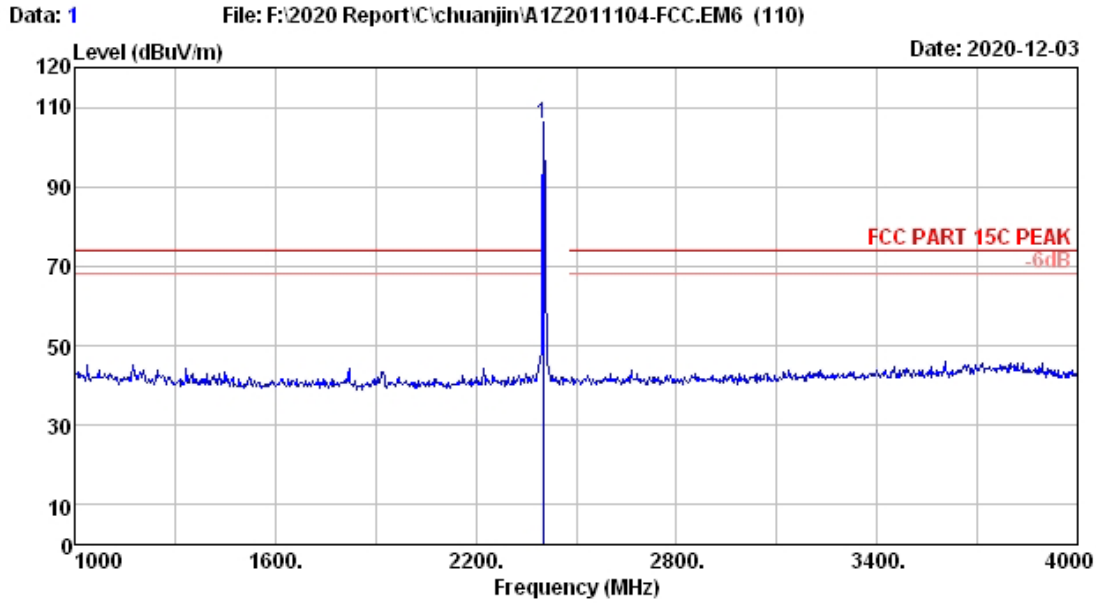

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2402MHz TX Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2402.00 | 28.01 | 0.92 | 110.22 | 33.48 | 105.67 | ----- | ----- | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

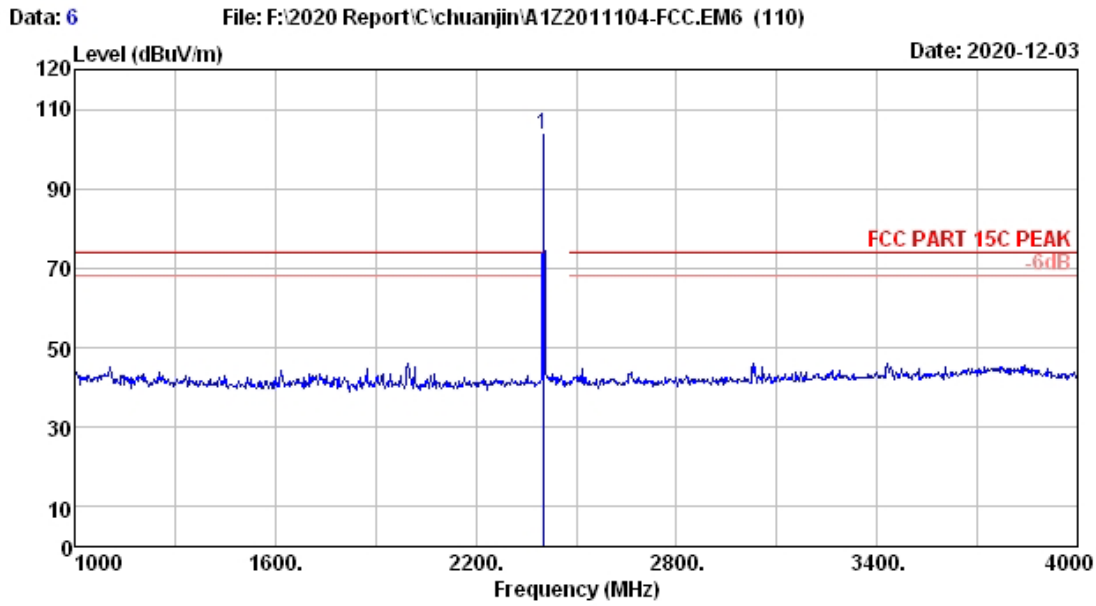


Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2402MHz TX Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2402.00 | 28.01 | 0.92 | 108.38 | 33.48 | 103.83 | ----- | ----- | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

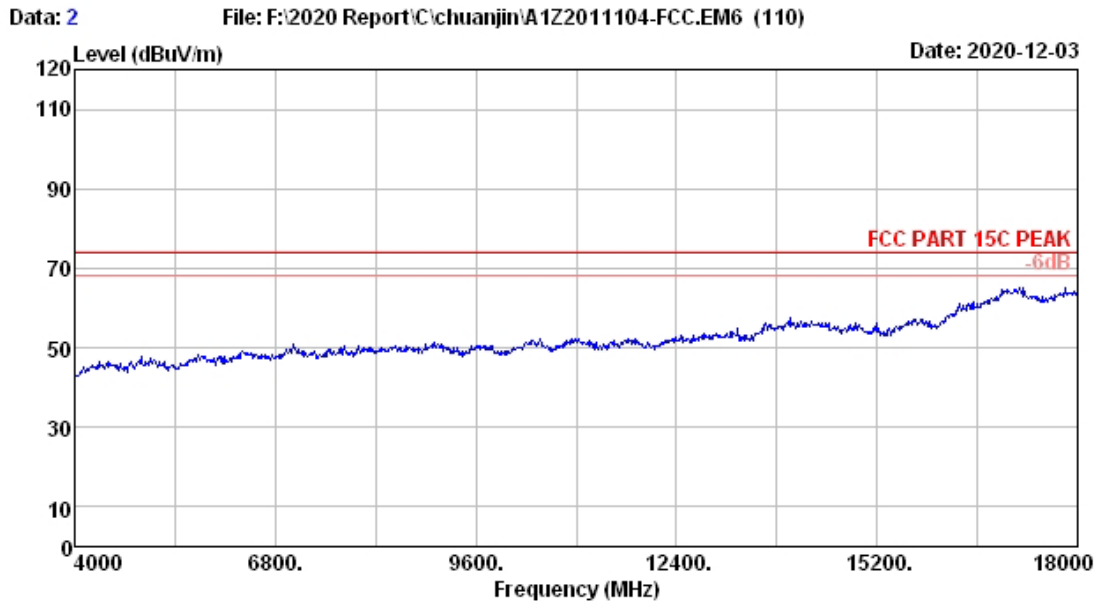


Site no. : 3m Chamber Data no. : 2
Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
EUT :
Power rating : DC 5V From Notebook Input AC 120V/60Hz
Test Mode : BT3.0 GFSK 2402MHz TX Mode
M/N :

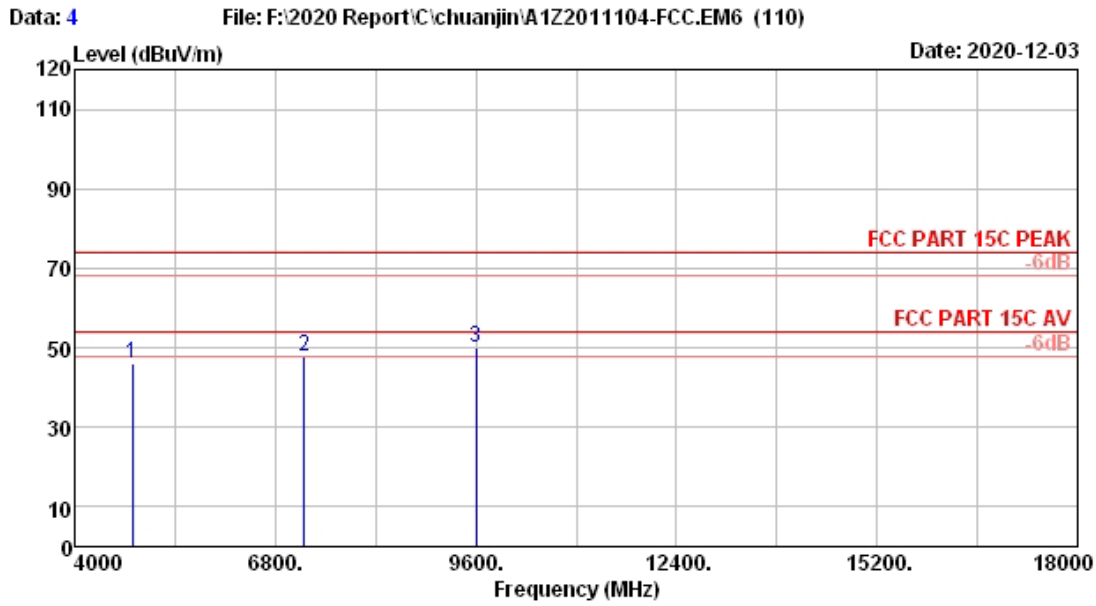


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2402MHz TX Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 4804.00 | 32.61 | 1.38 | 45.32 | 33.18 | 46.13 | 74.00 | 27.87 | Peak |
| 2 | 7206.00 | 36.50 | 1.92 | 42.54 | 33.02 | 47.94 | 74.00 | 26.06 | Peak |
| 3 | 9608.00 | 37.64 | 2.16 | 43.67 | 33.52 | 49.95 | 74.00 | 24.05 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

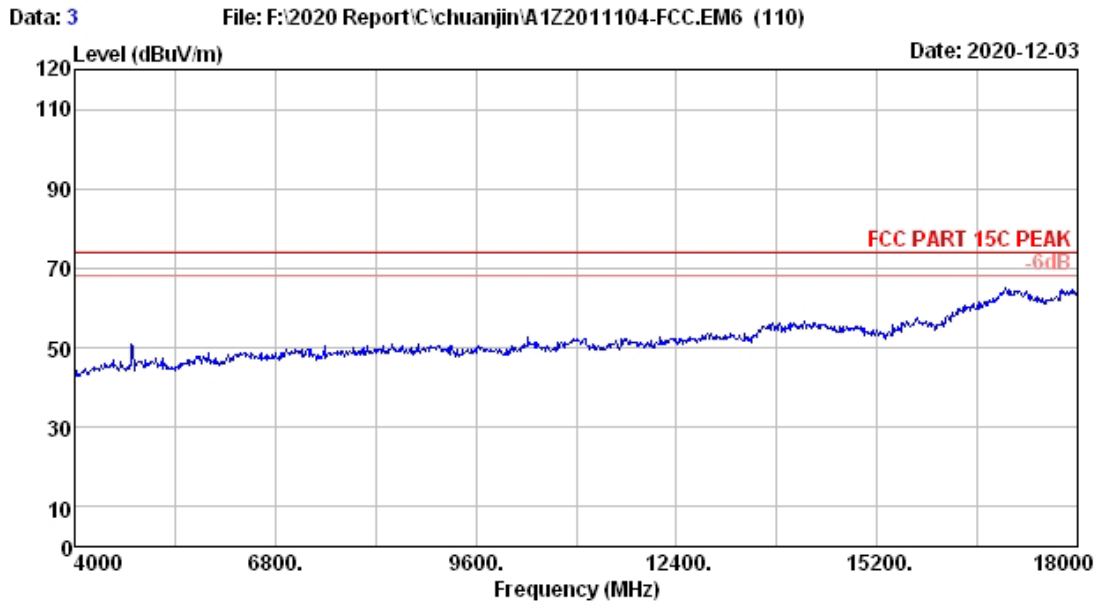


Site no. : 3m Chamber Data no. : 3
Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
EUT :
Power rating : DC 5V From Notebook Input AC 120V/60Hz
Test Mode : BT3.0 GFSK 2402MHz TX Mode
M/N :

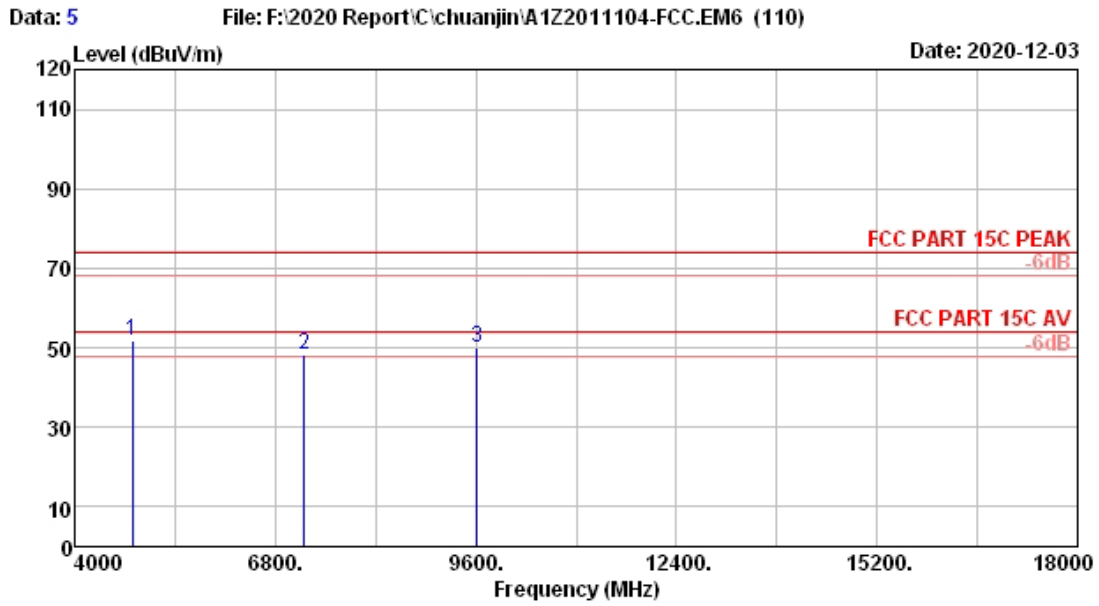

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2402MHz TX Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 4804.00 | 32.61 | 1.38 | 50.99 | 33.18 | 51.80 | 74.00 | 22.20 | Peak |
| 2 | 7206.00 | 36.50 | 1.92 | 43.02 | 33.02 | 48.42 | 74.00 | 25.58 | Peak |
| 3 | 9614.00 | 37.65 | 2.16 | 43.84 | 33.52 | 50.13 | 74.00 | 23.87 | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

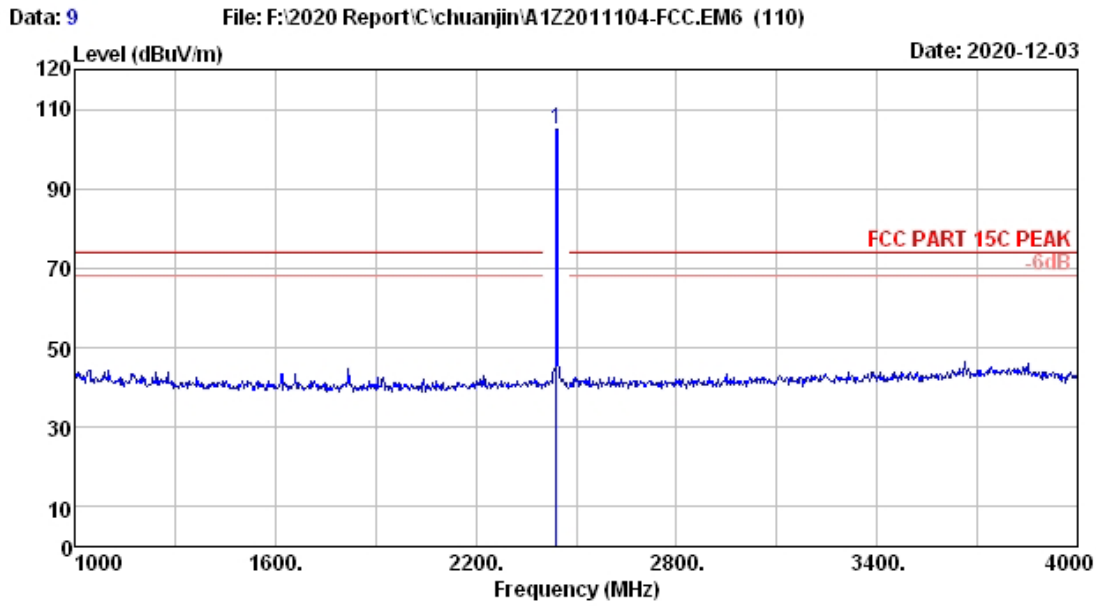

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2441MHz TX Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2441.00 | 28.11 | 0.93 | 109.58 | 33.47 | 105.15 | ----- | ----- | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

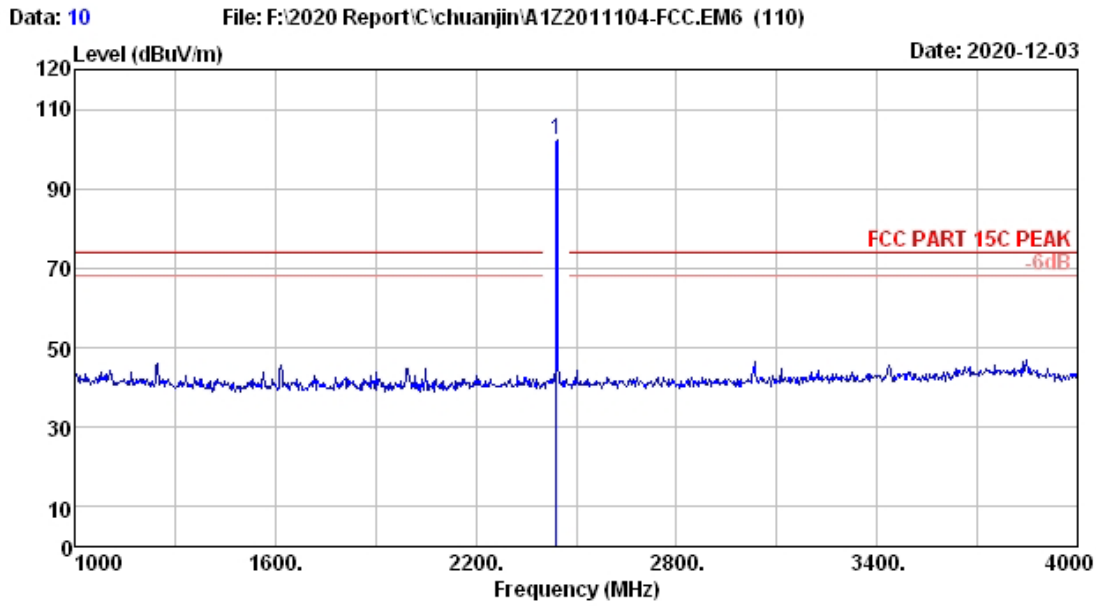


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2441MHz TX Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2441.00 | 28.11 | 0.93 | 106.59 | 33.47 | 102.16 | ----- | ----- | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

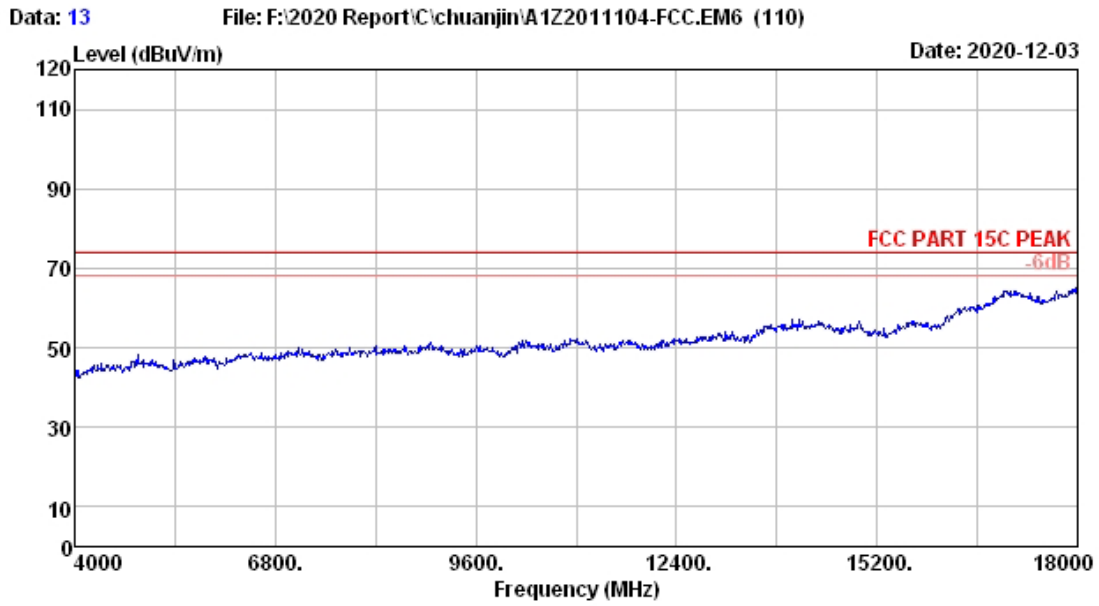


Site no. : 3m Chamber Data no. : 13
Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
EUT :
Power rating : DC 5V From Notebook Input AC 120V/60Hz
Test Mode : BT3.0 GFSK 2441MHz TX Mode
M/N :

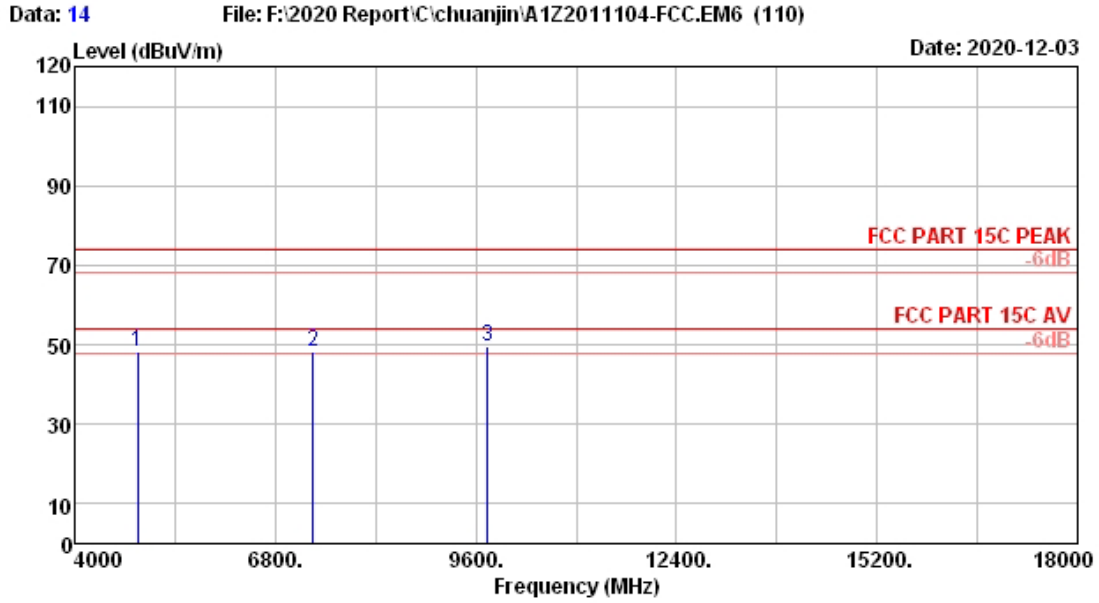


Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2441MHz TX Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 4882.00 | 32.68 | 1.39 | 47.46 | 33.19 | 48.34 | 74.00 | 25.66 | Peak |
| 2 | 7323.00 | 36.50 | 1.93 | 42.90 | 33.03 | 48.30 | 74.00 | 25.70 | Peak |
| 3 | 9764.00 | 37.71 | 2.18 | 43.40 | 33.56 | 49.73 | 74.00 | 24.27 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

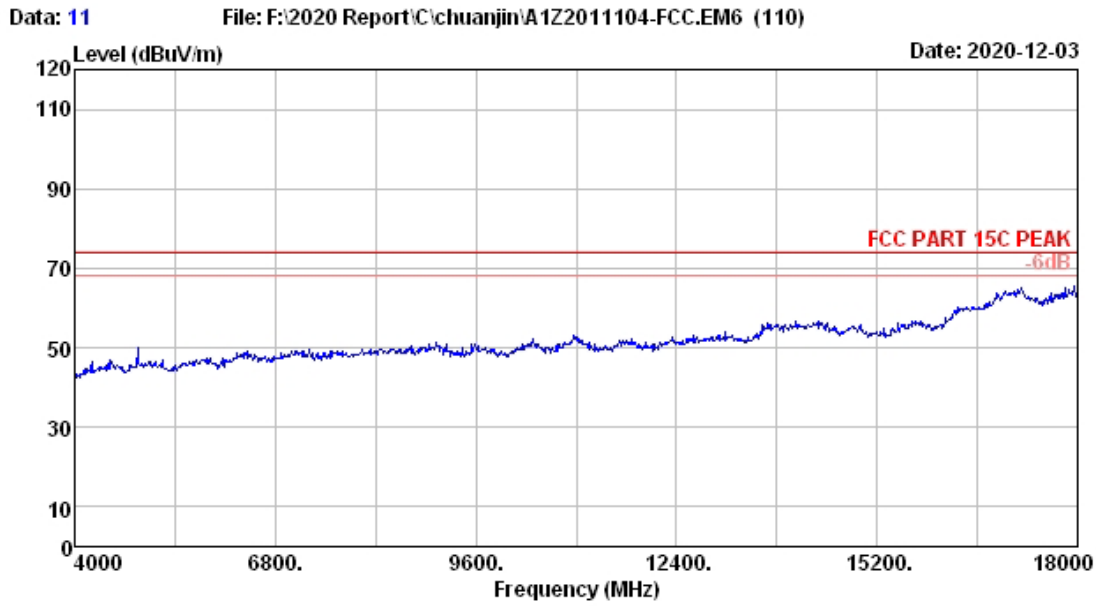


Site no. : 3m Chamber Data no. : 11
Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
EUT :
Power rating : DC 5V From Notebook Input AC 120V/60Hz
Test Mode : BT3.0 GFSK 2441MHz TX Mode
M/N :

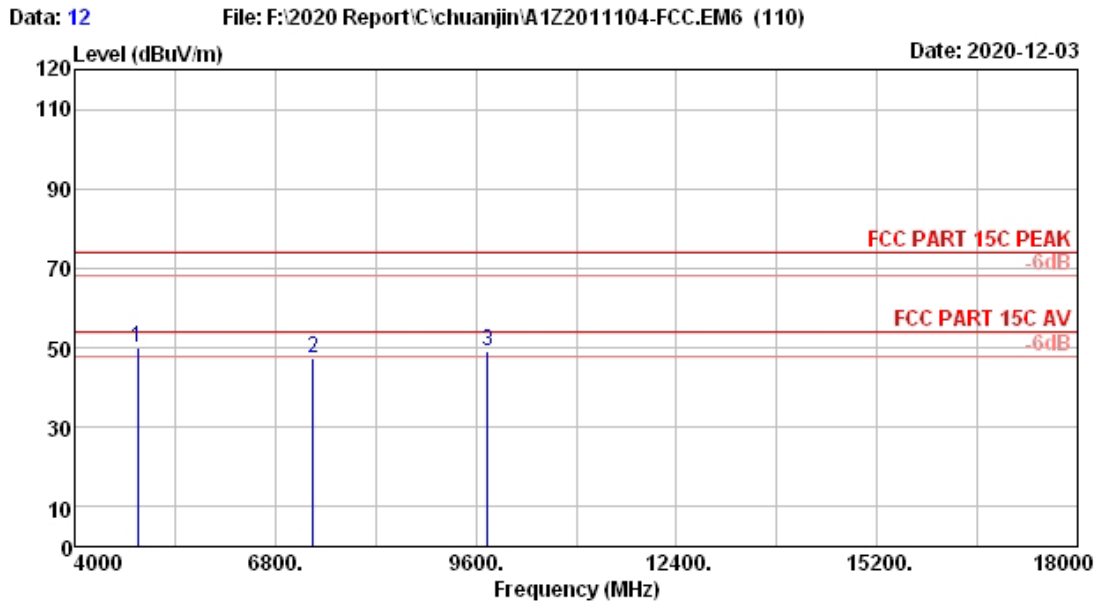

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2441MHz TX Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 4882.00 | 32.68 | 1.39 | 49.26 | 33.19 | 50.14 | 74.00 | 23.86 | Peak |
| 2 | 7323.00 | 36.50 | 1.93 | 42.00 | 33.03 | 47.40 | 74.00 | 26.60 | Peak |
| 3 | 9764.00 | 37.71 | 2.18 | 42.93 | 33.56 | 49.26 | 74.00 | 24.74 | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

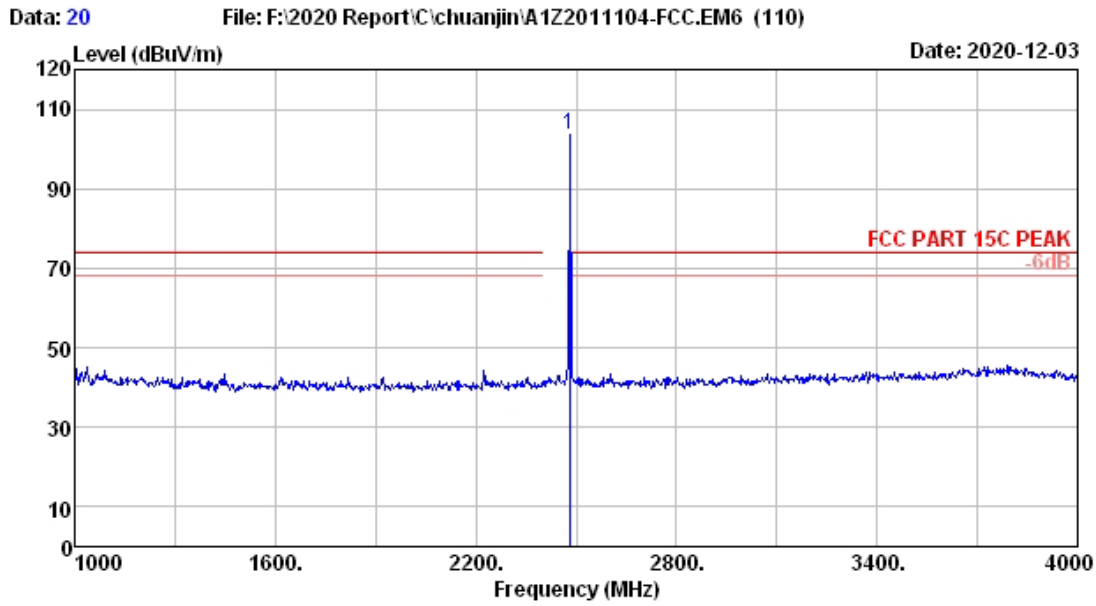

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2480MHz TX Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2480.00 | 28.17 | 0.94 | 108.13 | 33.46 | 103.78 | ----- | ----- | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

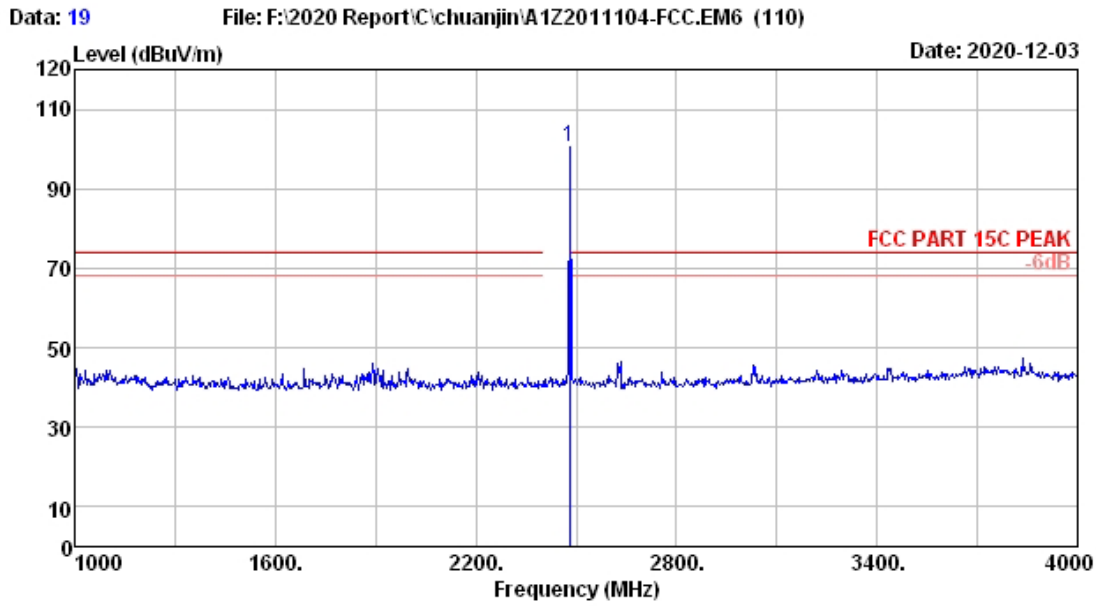


Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2480MHz TX Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2480.00 | 28.17 | 0.94 | 104.65 | 33.46 | 100.30 | ----- | ----- | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

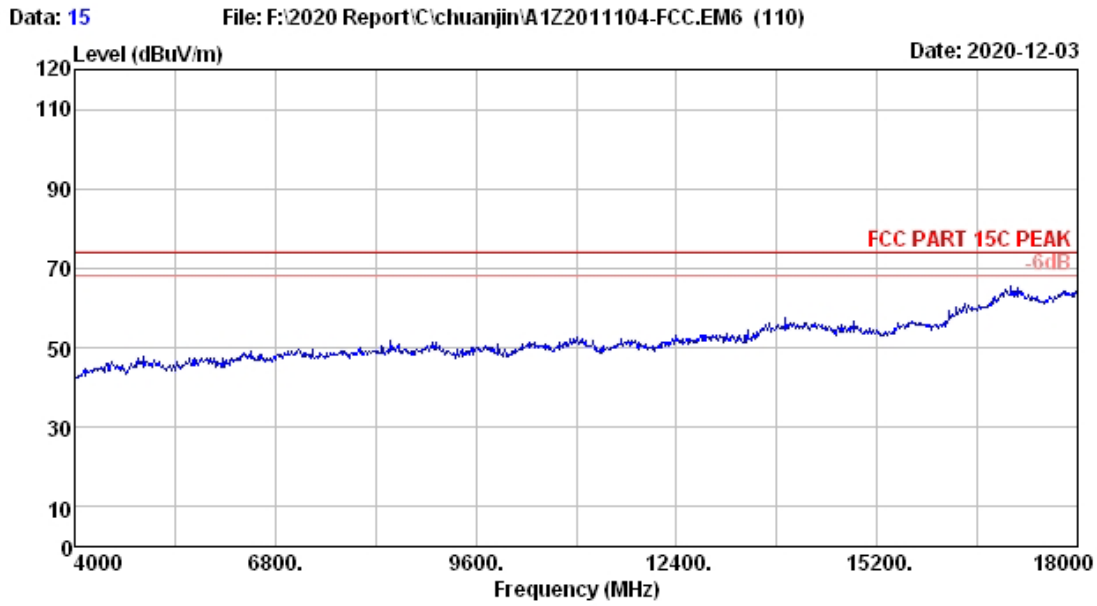


Site no. : 3m Chamber Data no. : 15
Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
EUT :
Power rating : DC 5V From Notebook Input AC 120V/60Hz
Test Mode : BT3.0 GFSK 2480MHz TX Mode
M/N :

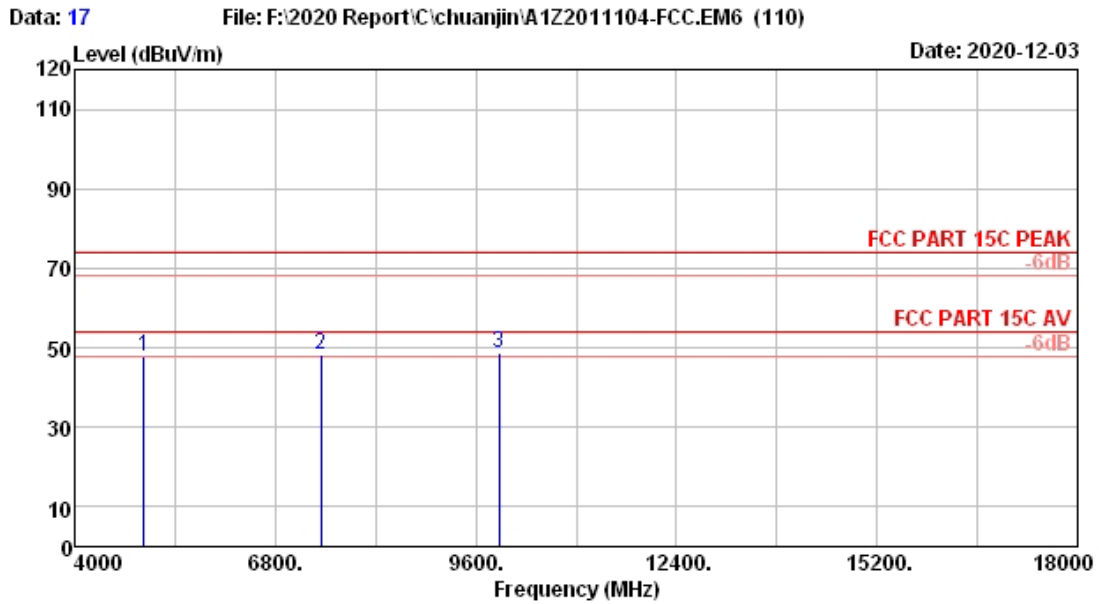


Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2480MHz TX Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 4960.00 | 32.77 | 1.39 | 46.79 | 33.20 | 47.75 | 74.00 | 26.25 | Peak |
| 2 | 7440.00 | 36.50 | 1.94 | 42.66 | 33.04 | 48.06 | 74.00 | 25.94 | Peak |
| 3 | 9920.00 | 37.77 | 2.19 | 42.13 | 33.59 | 48.50 | 74.00 | 25.50 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

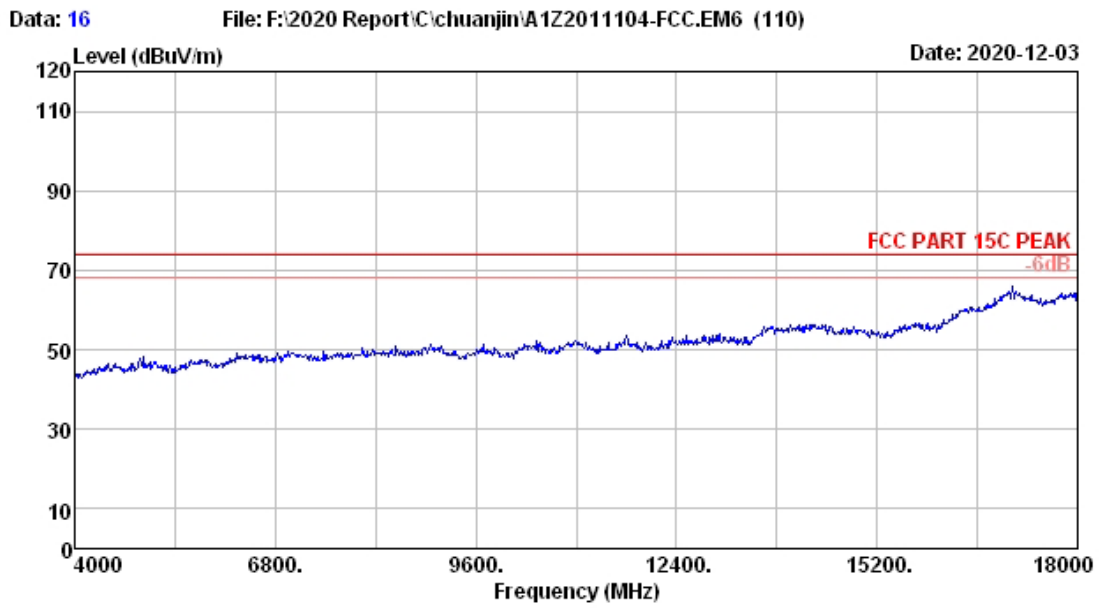


Site no. : 3m Chamber Data no. : 16
Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
EUT :
Power rating : DC 5V From Notebook Input AC 120V/60Hz
Test Mode : BT3.0 GFSK 2480MHz TX Mode
M/N :

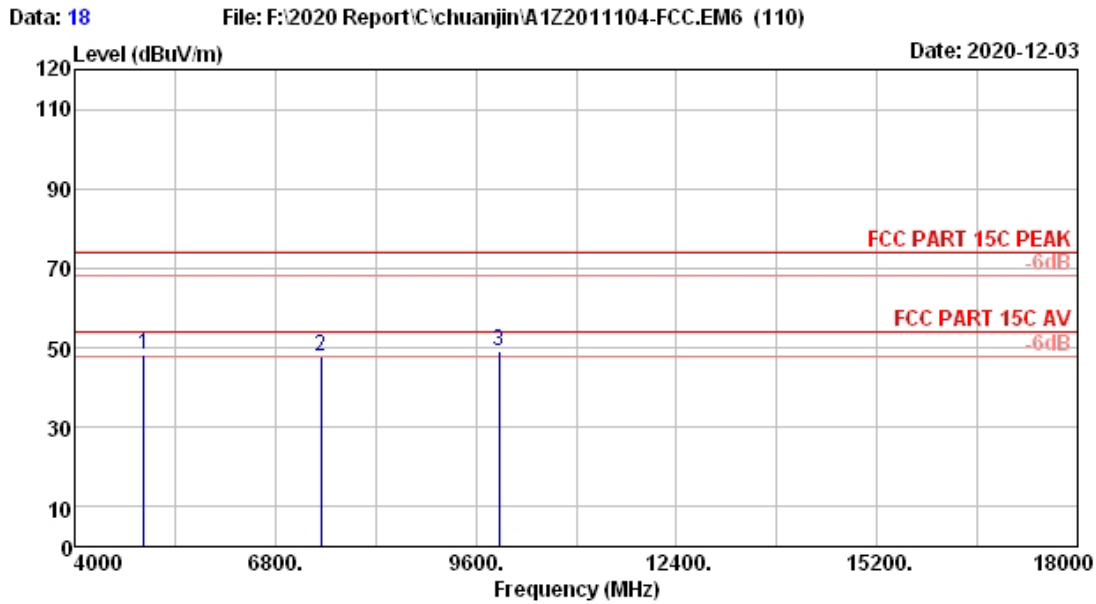

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2480MHz TX Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 4960.00 | 32.77 | 1.39 | 47.28 | 33.20 | 48.24 | 74.00 | 25.76 | Peak |
| 2 | 7440.00 | 36.50 | 1.94 | 42.40 | 33.04 | 47.80 | 74.00 | 26.20 | Peak |
| 3 | 9920.00 | 37.77 | 2.19 | 42.58 | 33.59 | 48.95 | 74.00 | 25.05 | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

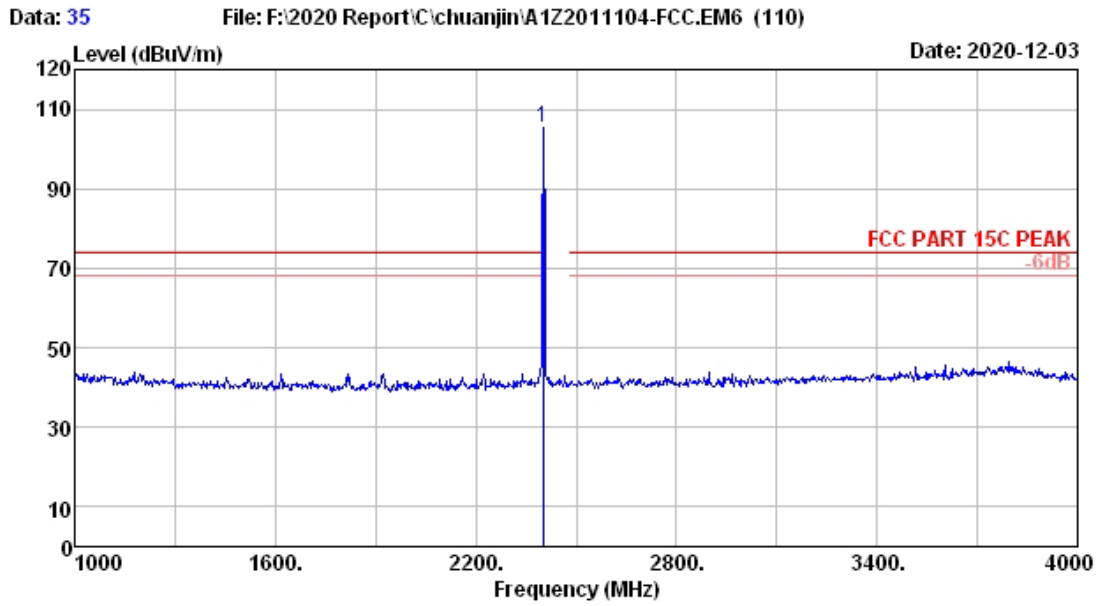

Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2402MHz Tx Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2402.00 | 28.01 | 0.92 | 110.14 | 33.48 | 105.59 | ----- | ----- | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

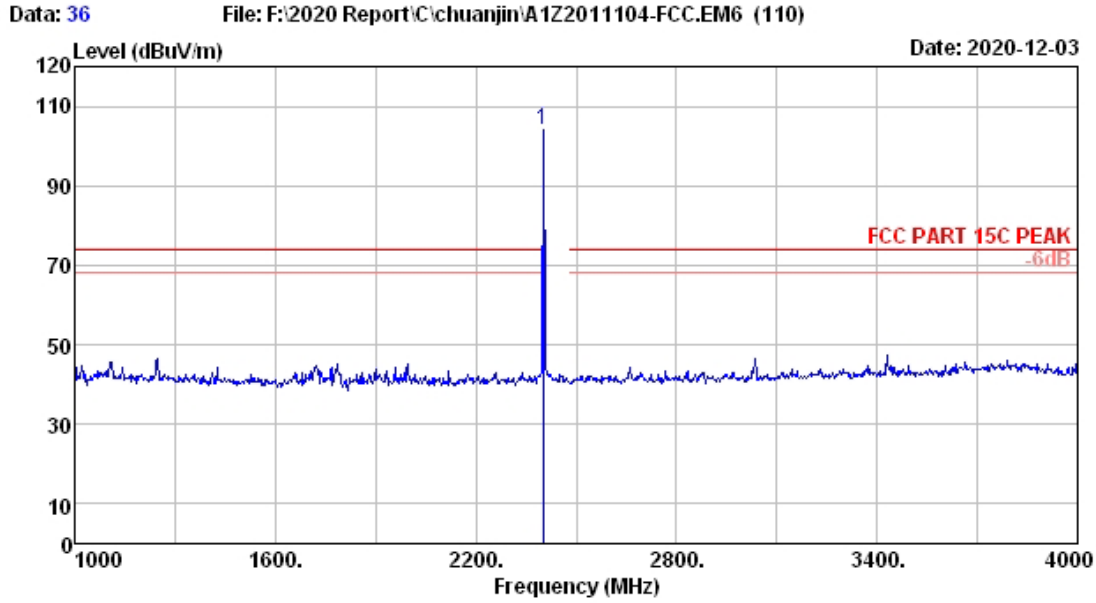


Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2402MHz Tx Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2402.00 | 28.01 | 0.92 | 108.50 | 33.48 | 103.95 | ----- | ----- | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

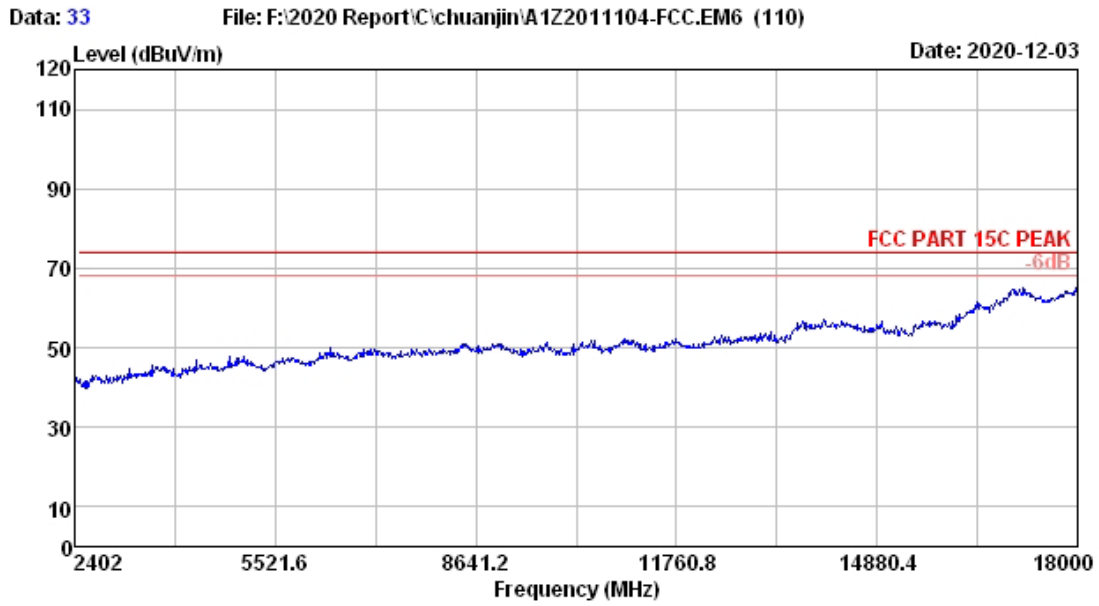


Site no. : 3m Chamber Data no. : 33
Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
EUT :
Power rating : DC 5V From Notebook Input AC 120V/60Hz
Test Mode : BT3.0 8-DPSK 2402MHz Tx Mode
M/N :

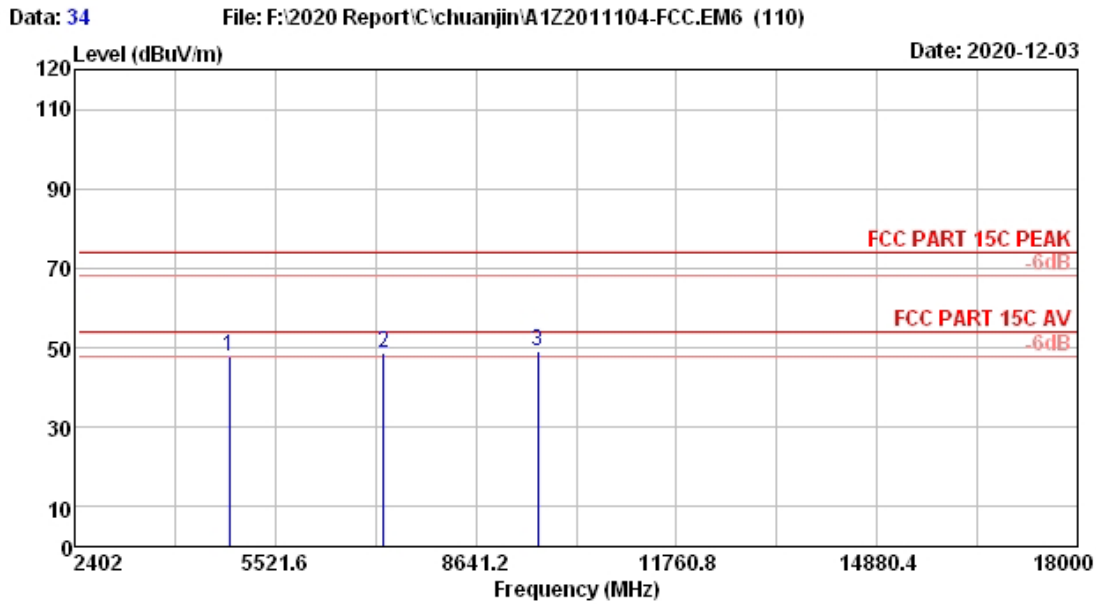


Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2402MHz Tx Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 4804.00 | 32.61 | 1.38 | 47.06 | 33.18 | 47.87 | 74.00 | 26.13 | Peak |
| 2 | 7206.00 | 36.50 | 1.92 | 43.18 | 33.02 | 48.58 | 74.00 | 25.42 | Peak |
| 3 | 9608.00 | 37.64 | 2.16 | 42.76 | 33.52 | 49.04 | 74.00 | 24.96 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

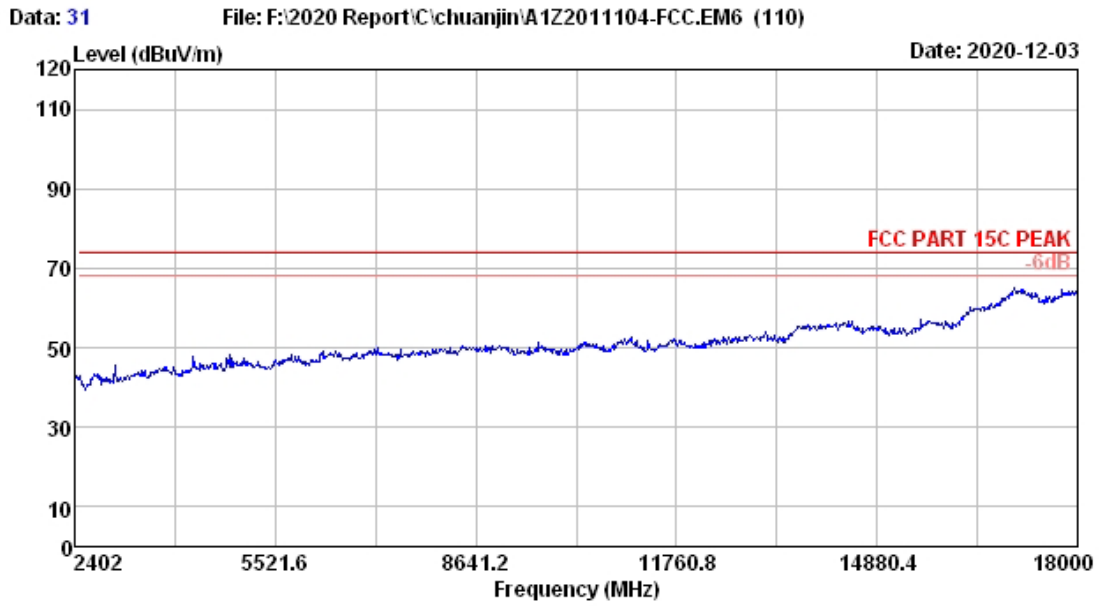


Site no. : 3m Chamber Data no. : 31
Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
EUT :
Power rating : DC 5V From Notebook Input AC 120V/60Hz
Test Mode : BT3.0 8-DPSK 2402MHz Tx Mode
M/N :

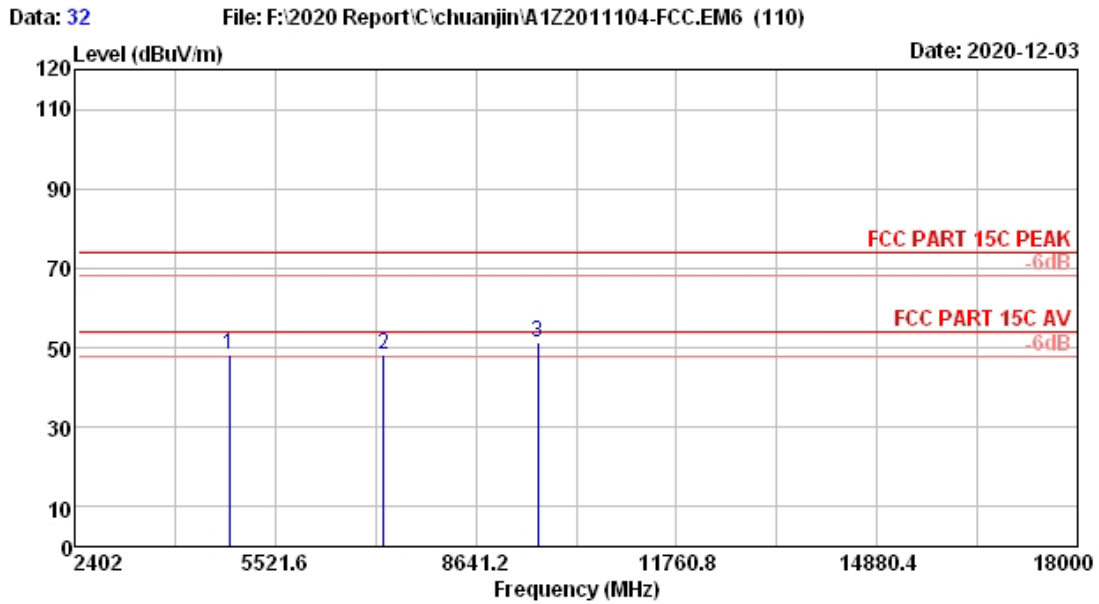

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2402MHz Tx Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 4804.00 | 32.61 | 1.38 | 47.49 | 33.18 | 48.30 | 74.00 | 25.70 | Peak |
| 2 | 7206.00 | 36.50 | 1.92 | 42.86 | 33.02 | 48.26 | 74.00 | 25.74 | Peak |
| 3 | 9608.00 | 37.64 | 2.16 | 45.21 | 33.52 | 51.49 | 74.00 | 22.51 | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

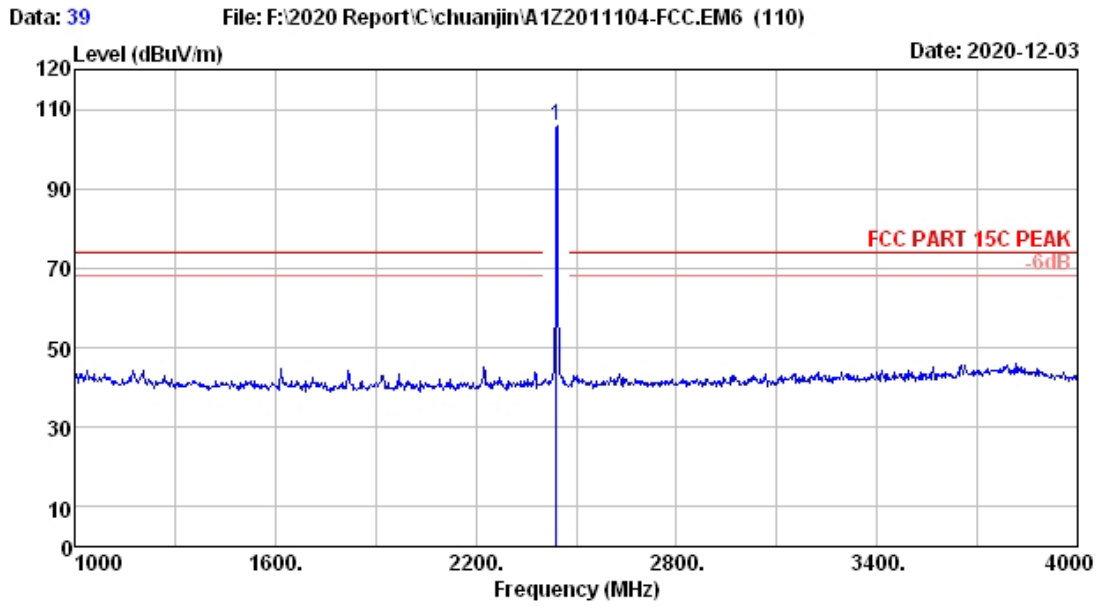

Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2441MHz Tx Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2441.00 | 28.11 | 0.93 | 110.19 | 33.47 | 105.76 | ----- | ----- | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

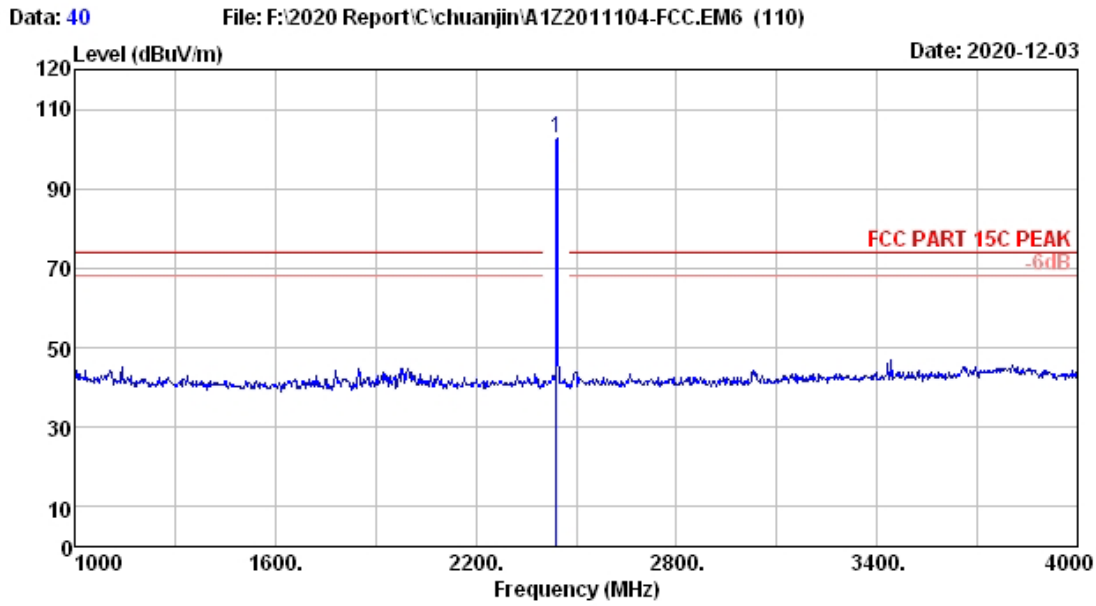


Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2441MHz Tx Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2441.00 | 28.11 | 0.93 | 107.18 | 33.47 | 102.75 | ----- | ----- | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

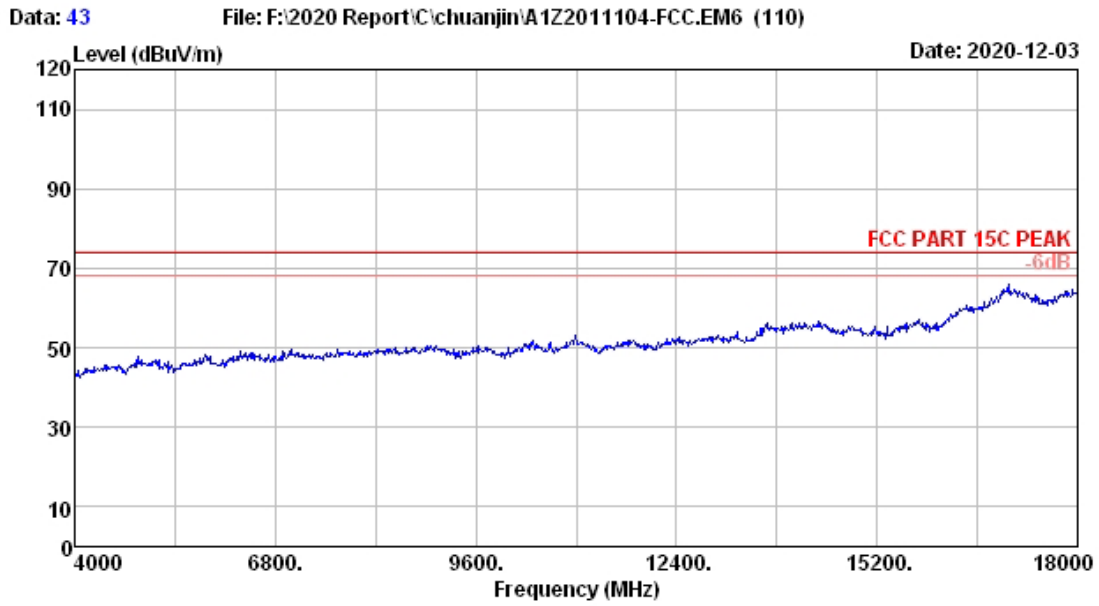


Site no. : 3m Chamber Data no. : 43
Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
EUT :
Power rating : DC 5V From Notebook Input AC 120V/60Hz
Test Mode : BT3.0 8-DPSK 2441MHz Tx Mode
M/N :

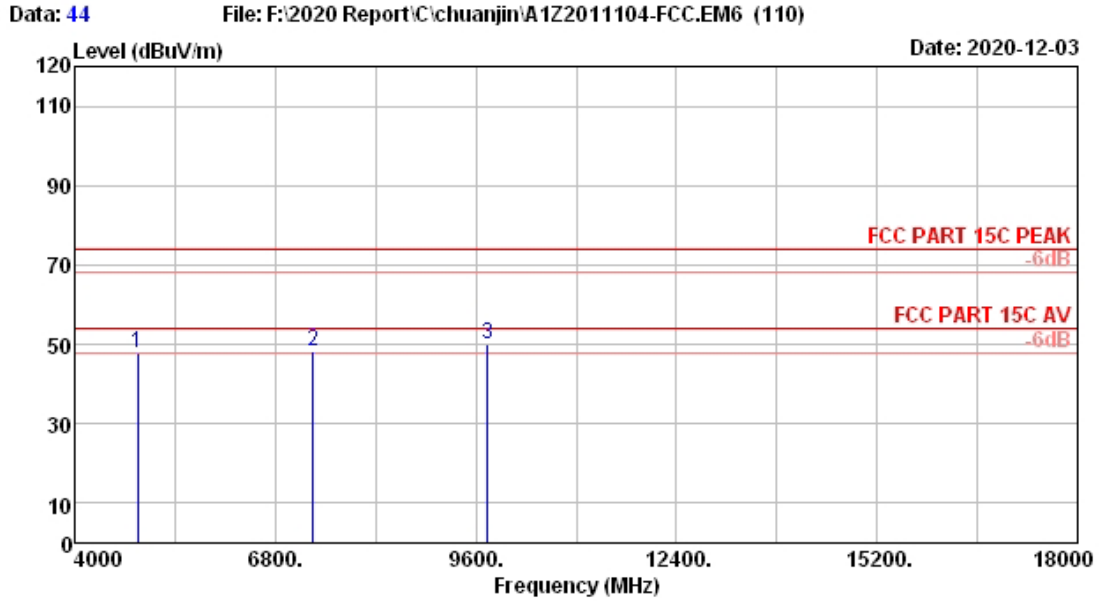


Site no. : 3m Chamber Data no. : 44
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2441MHz Tx Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 4882.00 | 32.68 | 1.39 | 47.14 | 33.19 | 48.02 | 74.00 | 25.98 | Peak |
| 2 | 7323.00 | 36.50 | 1.93 | 42.78 | 33.03 | 48.18 | 74.00 | 25.82 | Peak |
| 3 | 9764.00 | 37.71 | 2.18 | 43.88 | 33.56 | 50.21 | 74.00 | 23.79 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

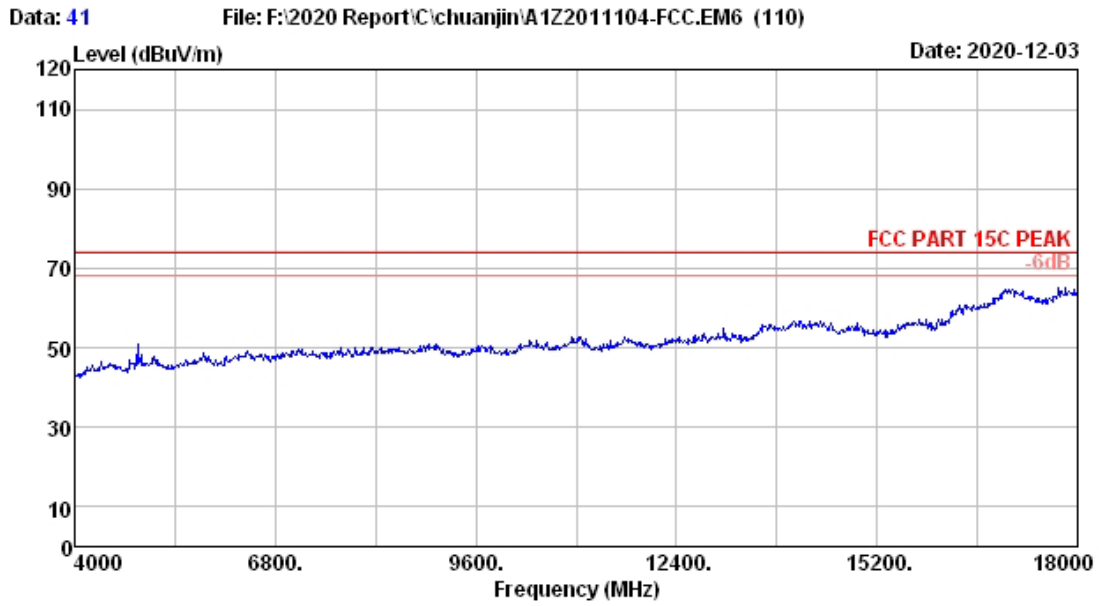


Site no. : 3m Chamber Data no. : 41
Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
EUT :
Power rating : DC 5V From Notebook Input AC 120V/60Hz
Test Mode : BT3.0 8-DPSK 2441MHz Tx Mode
M/N :

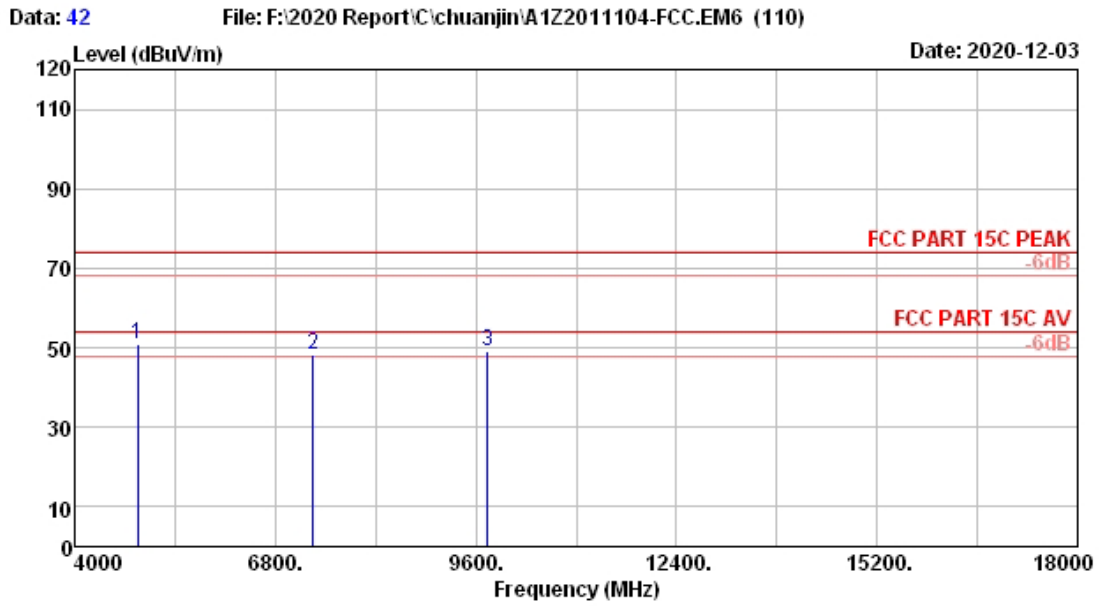

Site no. : 3m Chamber Data no. : 42
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2441MHz Tx Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 4882.00 | 32.68 | 1.39 | 49.84 | 33.19 | 50.72 | 74.00 | 23.28 | Peak |
| 2 | 7323.00 | 36.50 | 1.93 | 42.68 | 33.03 | 48.08 | 74.00 | 25.92 | Peak |
| 3 | 9764.00 | 37.71 | 2.18 | 43.01 | 33.56 | 49.34 | 74.00 | 24.66 | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

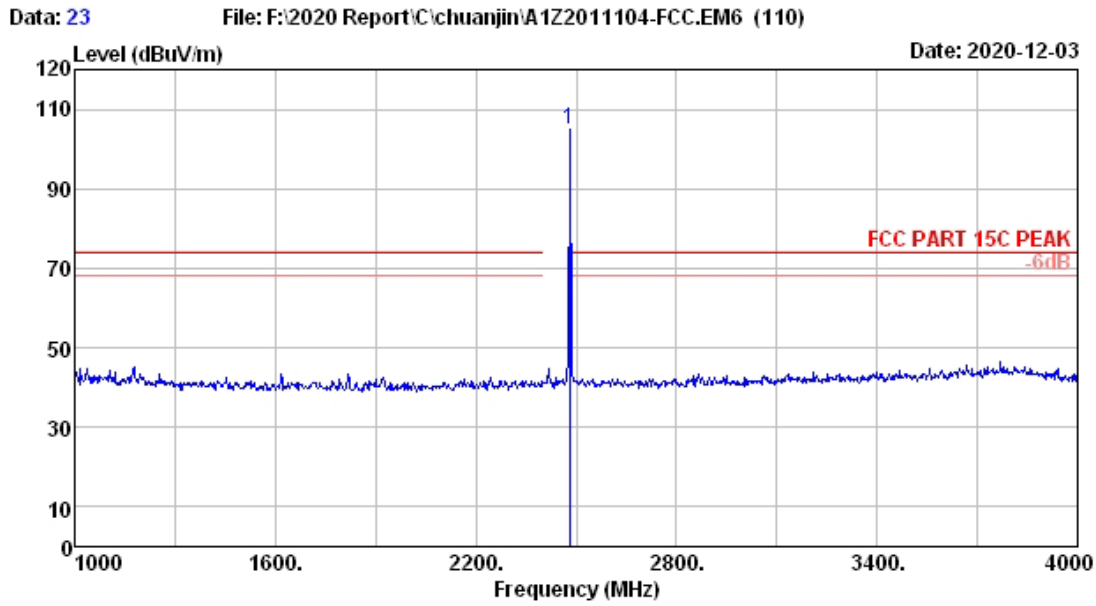

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2480MHz Tx Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2480.00 | 28.17 | 0.94 | 109.43 | 33.46 | 105.08 | ----- | ----- | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

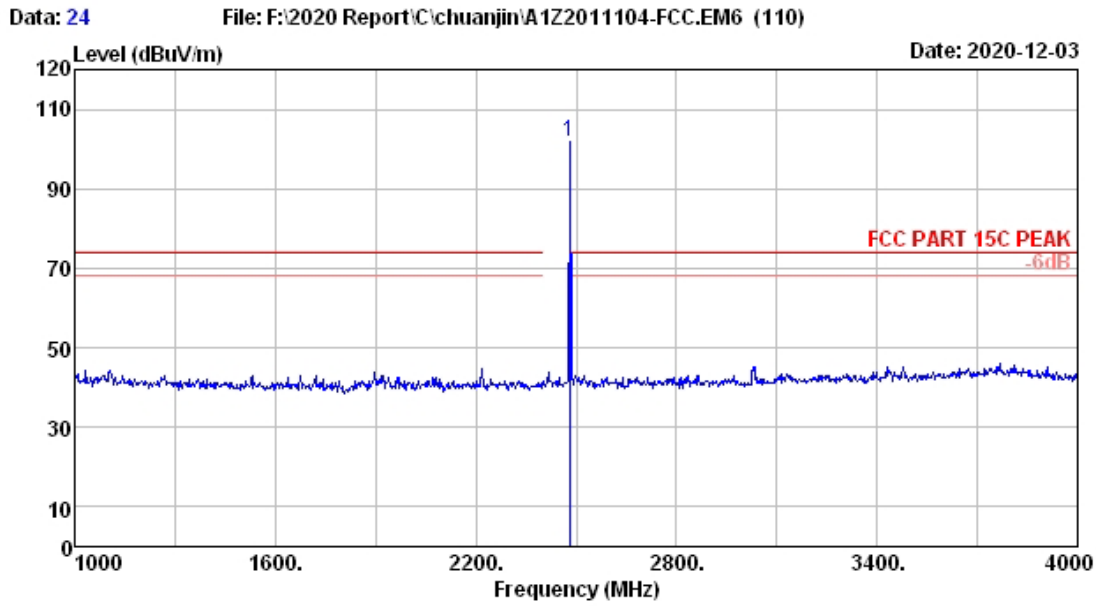


Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2480MHz Tx Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2480.00 | 28.17 | 0.94 | 106.10 | 33.46 | 101.75 | ----- | ----- | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

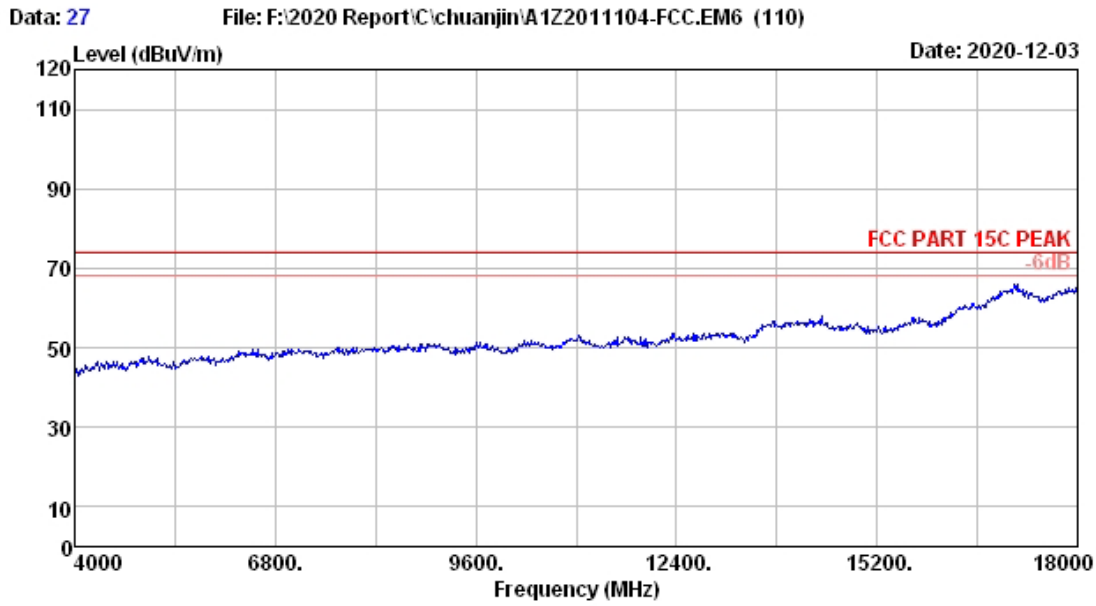


Site no. : 3m Chamber Data no. : 27
Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
EUT :
Power rating : DC 5V From Notebook Input AC 120V/60Hz
Test Mode : BT3.0 8-DPSK 2480MHz Tx Mode
M/N :

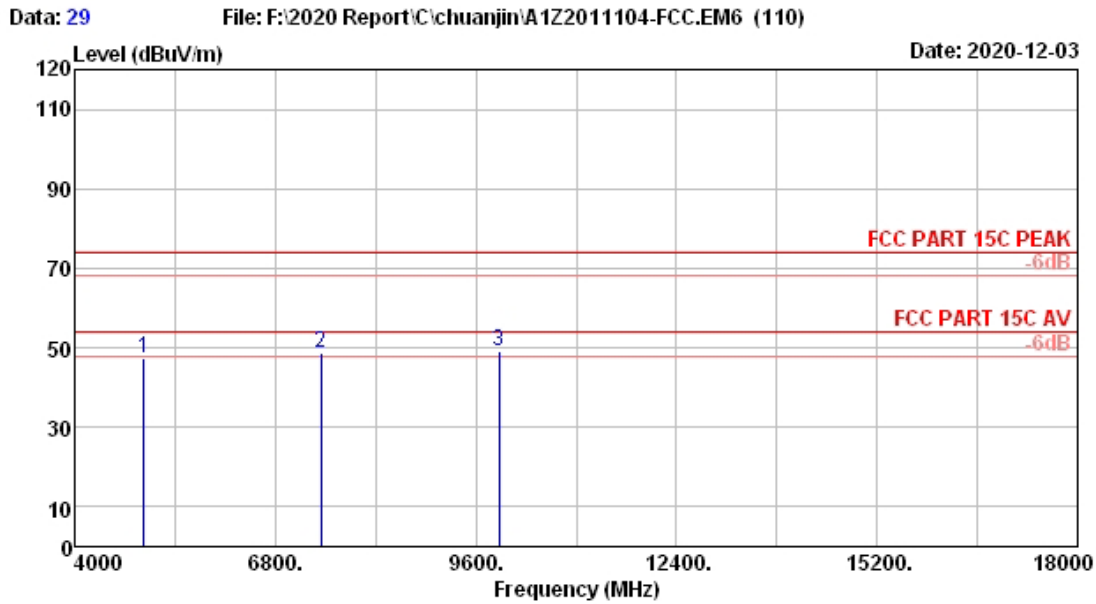


Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2480MHz Tx Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 4960.00 | 32.77 | 1.39 | 46.32 | 33.20 | 47.28 | 74.00 | 26.72 | Peak |
| 2 | 7440.00 | 36.50 | 1.94 | 43.27 | 33.04 | 48.67 | 74.00 | 25.33 | Peak |
| 3 | 9920.00 | 37.77 | 2.19 | 42.74 | 33.59 | 49.11 | 74.00 | 24.89 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

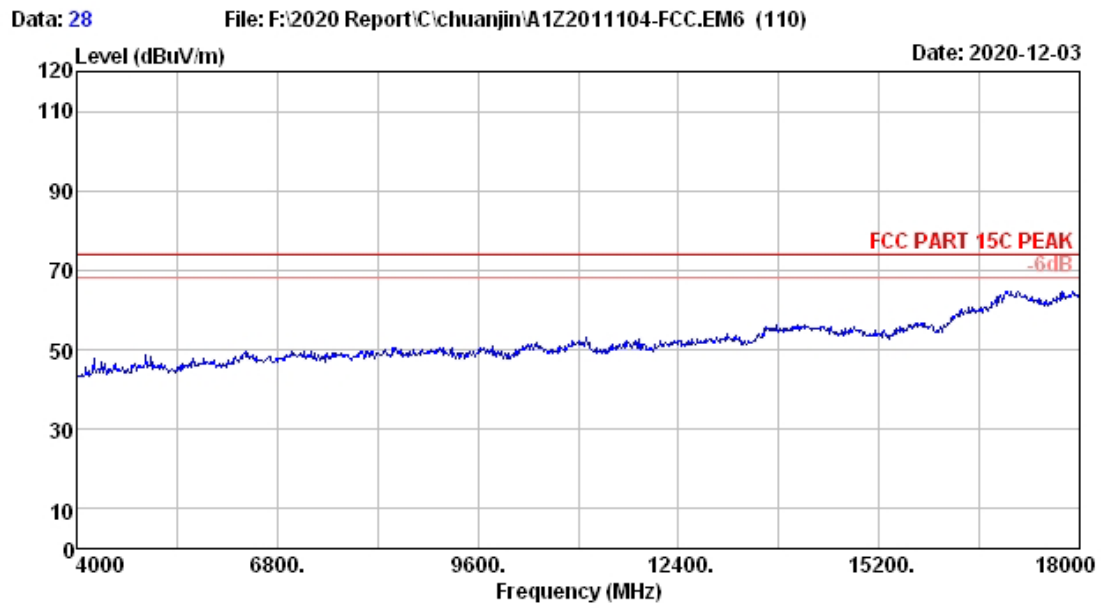

Site no. : 3m Chamber Data no. : 28
Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
EUT :
Power rating : DC 5V From Notebook Input AC 120V/60Hz
Test Mode : BT3.0 8-DPSK 2480MHz Tx Mode
M/N :

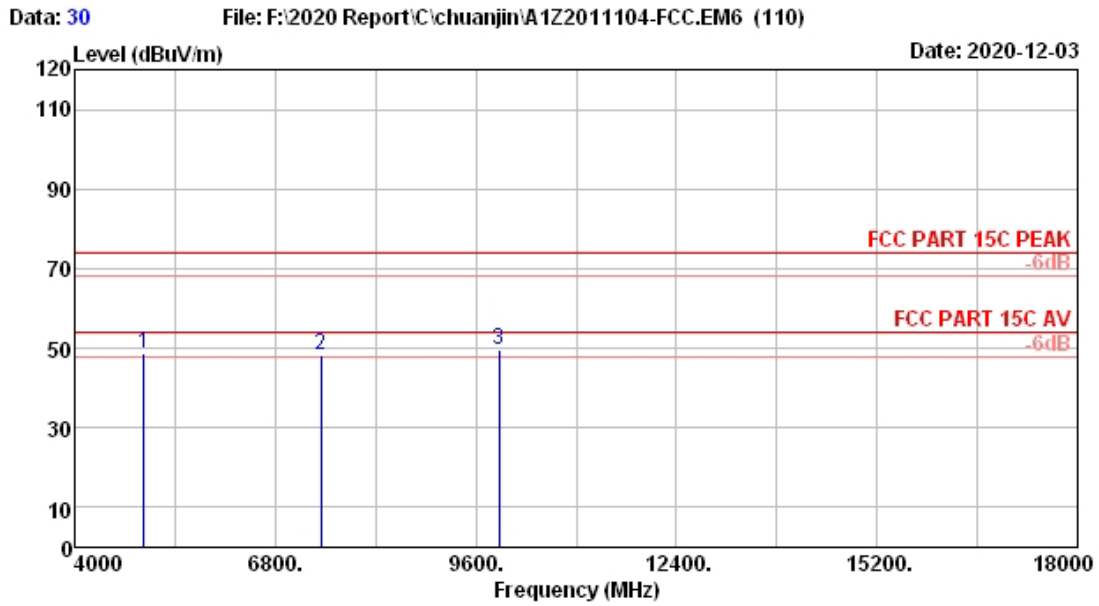

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2480MHz Tx Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 4960.00 | 32.77 | 1.39 | 47.55 | 33.20 | 48.51 | 74.00 | 25.49 | Peak |
| 2 | 7440.00 | 36.50 | 1.94 | 42.99 | 33.04 | 48.39 | 74.00 | 25.61 | Peak |
| 3 | 9920.00 | 37.77 | 2.19 | 43.41 | 33.59 | 49.78 | 74.00 | 24.22 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

5. MAXIMUM PEAK OUTPUT POWER TEST

5.1. Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|---------------------|--------------|-------------------|------------|-----------|---------------|
| 1. | PXA Signal Analyzer | Agilent | N9030A | MY51380221 | Apr.12,20 | 1 Year |
| 2. | Power meter | HP | 436A | 2016A07891 | Apr 11,20 | 1 Year |
| 3. | Power Sensor | Agilent | 8482B | MY41090514 | Apr.11,20 | 1 Year |
| 4. | Amplifier | HP | 8449B | 3008A00836 | Apr.11,20 | 1 Year |
| 5. | RF Cable | EMCI | EMC102-KM-KM 3500 | 170702 | Apr.12,20 | 1 Year |

5.2. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

5.3. Test Procedure

Use the test method described in ANSI C63.10 clause 7.8.5:
 Connected the EUT's antenna port to Power Sensor, and use power meter to test peak output power directly.

5.4. Test Results

| | | |
|-----------------------|-------------------------|-------------------------|
| EUT: WiFi module | | |
| M/N: U9W42 Y | | |
| Test date: 2020-11-27 | Pressure: 102.3±1.0 kpa | Humidity: 53.6±3.0% |
| Tested by: Leo | Test site: RF site | Temperature: 25.5±0.6°C |

| Test Mode | Frequency | Peak output Power (dBm) | Limit (dBm) |
|------------------|-----------|---------------------------|-------------|
| GFSK | 2402 | 10.066 | 21 |
| | 2441 | 10.356 | 21 |
| | 2480 | 9.912 | 21 |
| 8-DPSK | 2402 | 11.860 | 21 |
| | 2441 | 11.958 | 21 |
| | 2480 | 11.560 | 21 |
| Conclusion: PASS | | | |

6. BAND EDGE COMPLIANCE TEST

6.1. Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|---------------------|--------------|-------------------|-------------|-----------|---------------|
| 1. | PXA Signal Analyzer | Agilent | N9030A | MY51380221 | Apr.12,20 | 1 Year |
| 2. | Amplifier | Agilent | 8449B | 3008A02495 | Apr.11,20 | 1 Year |
| 3. | Horn Antenna | ETC | MCTD 1209 | DRH15F03006 | Jul.30,20 | 3 Year |
| 4. | RF Cable | EMCI | EMC102-KM-KM 3500 | 170702 | Apr.12,20 | 1 Year |

6.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

6.3. Test Produce

Use the test method descried in ANSI C63.10 clause 7.8.6:

For upper band emissions that are up to two bandwidths(2MHz) away (2483.5MHz to 2485.5MHz) from the band-edge use below produce:

1. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 100KHz and with a video bandwidth 300KHz. Record the peak levels of the fundamental emission and the relevant band-edge emission, Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement, it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.
2. Subtract the delta measured in step (1) from the maximum field strengths measured in clause 4 .The resultant field strengths are then used to determine band-edge compliance as required by Section 15.205


For emissions above two bandwidths away from the band-edge use below produce:

1. The EUT is placed on a insulating material (up to 12mm thick) worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
 - (a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO
 - (b) This is pulse Modulation device a duty cycle factor was used to calculate average level based measured peak level.

6.4. Test Results

Pass (The testing data was attached in the next pages.)


Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

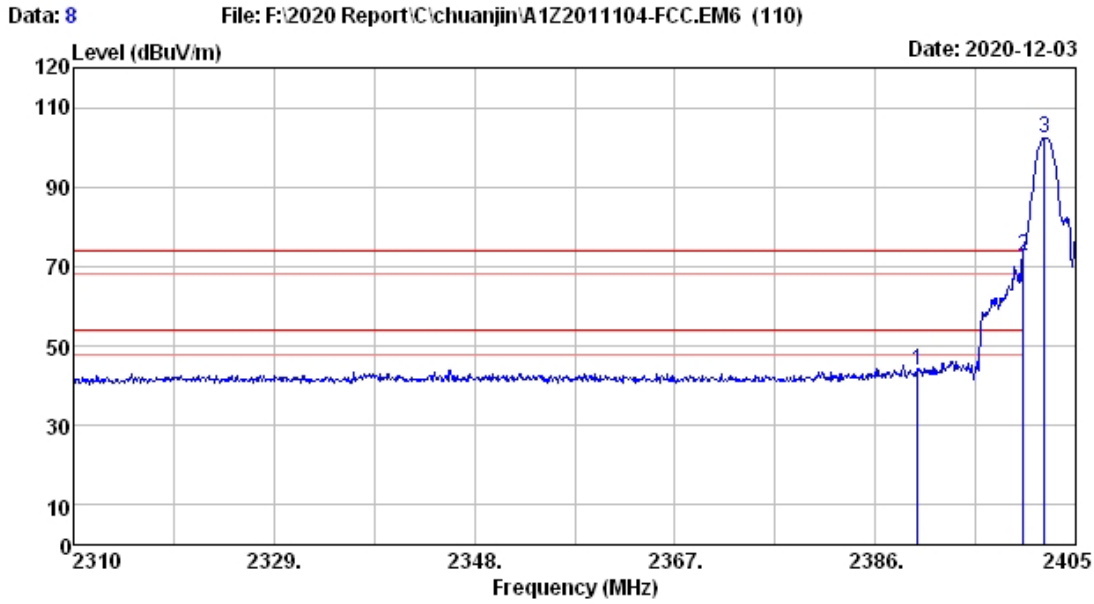

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2402MHz TX Mode

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2390.00 | 28.01 | 0.92 | 48.36 | 33.48 | 43.81 | 74.00 | 30.19 | Peak |
| 2 | 2400.00 | 28.01 | 0.92 | 77.29 | 33.48 | 72.74 | 74.00 | 1.26 | Peak |
| 3 | 2402.00 | 28.01 | 0.92 | 106.76 | 33.48 | 102.21 | ----- | ----- | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

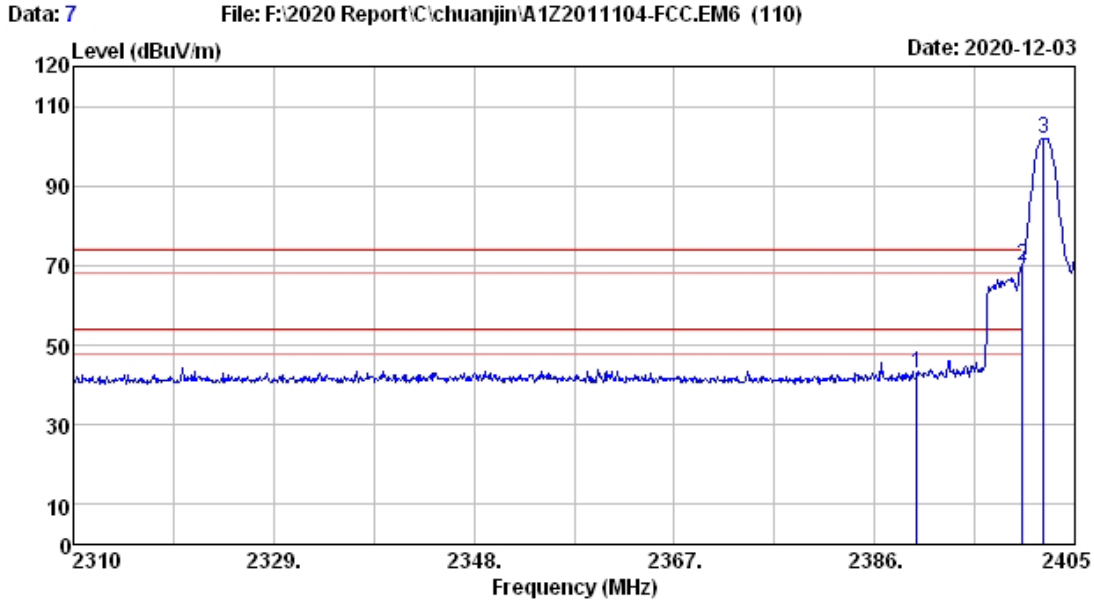

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2402MHz TX Mode

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2390.000 | 28.01 | 0.92 | 47.48 | 33.48 | 42.93 | 74.00 | 31.07 | Peak |
| 2 | 2400.000 | 28.01 | 0.92 | 74.59 | 33.48 | 70.04 | 74.00 | 3.96 | Peak |
| 3 | 2402.000 | 28.01 | 0.92 | 106.60 | 33.48 | 102.05 | ----- | ----- | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

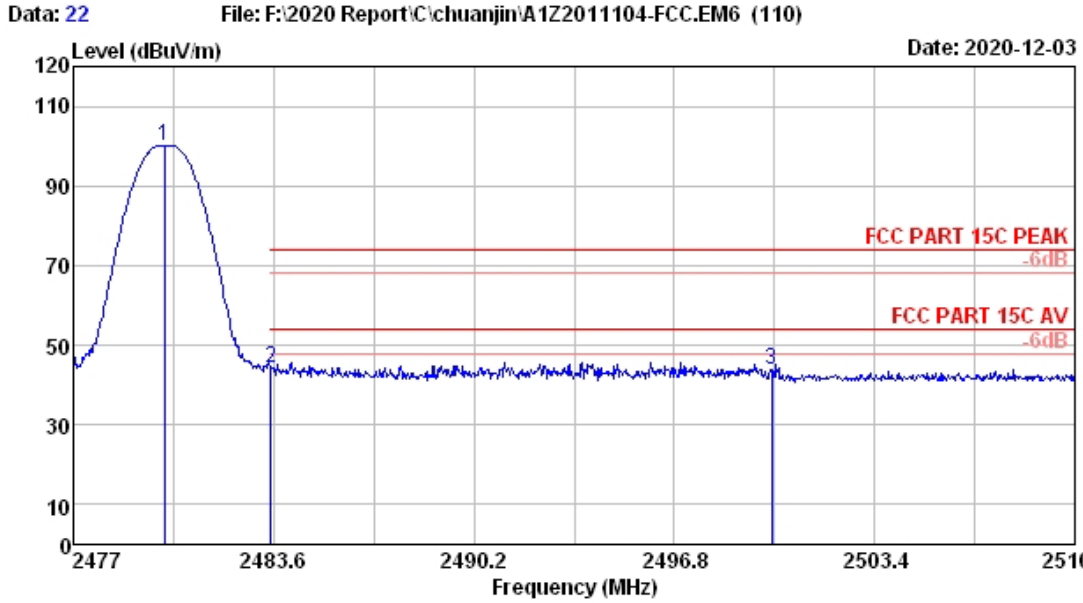

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4*C/52.9% Engineer : Lynn
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2480MHz TX Mode

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2480.000 | 28.17 | 0.94 | 104.63 | 33.46 | 100.28 | ----- | ----- | Peak |
| 2 | 2483.500 | 28.17 | 0.94 | 48.85 | 33.46 | 44.50 | 74.00 | 29.50 | Peak |
| 3 | 2500.000 | 28.20 | 0.95 | 47.96 | 33.45 | 43.66 | 74.00 | 30.34 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

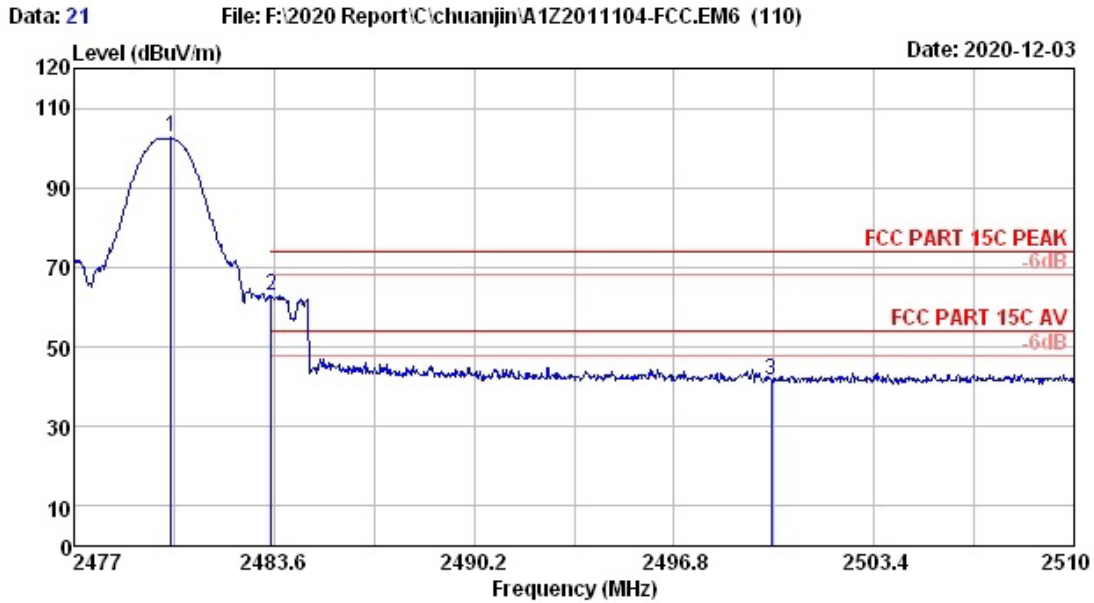


Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2480MHz TX Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2480.20 | 28.17 | 0.94 | 106.88 | 33.46 | 102.53 | ----- | ----- | Peak |
| 2 | 2483.50 | 28.17 | 0.94 | 67.12 | 33.46 | 62.77 | 74.00 | 11.23 | Peak |
| 3 | 2500.00 | 28.20 | 0.95 | 45.87 | 33.45 | 41.57 | 74.00 | 32.43 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

| Frequency (MHz) | Peak level (dBuV/m) | Duty cycle factor (dB) | AV level (dBuV/m) | Limit(dBuV/m) | Conclusion |
|-----------------|---------------------|------------------------|-------------------|---------------|------------|
| 2483.50 | 62.77 | -24.495 | 38.275 | 54 | Pass |

Note: The Duty cycle factor refer to the original report ACS-F20001.

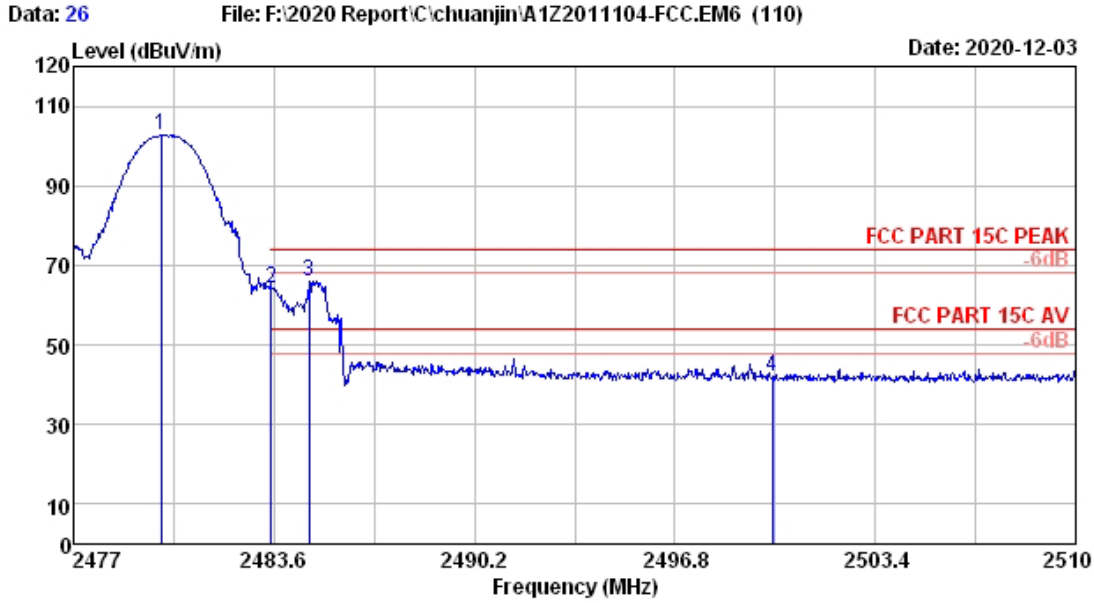


Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2480MHz Tx Mode

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2479.87 | 28.17 | 0.94 | 106.92 | 33.46 | 102.57 | ----- | ----- | Peak |
| 2 | 2483.50 | 28.17 | 0.94 | 68.54 | 33.46 | 64.19 | 74.00 | 9.81 | Peak |
| 3 | 2484.76 | 28.17 | 0.94 | 70.55 | 33.46 | 66.20 | 74.00 | 7.80 | Peak |
| 4 | 2500.00 | 28.20 | 0.95 | 46.15 | 33.45 | 41.85 | 74.00 | 32.15 | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

| Frequency (MHz) | Peak level (dBuV/m) | Duty cycle factor (dB) | AV level (dBuV/m) | Limit(dBuV/m) | Conclusion |
|-----------------|---------------------|------------------------|-------------------|---------------|------------|
| 2483.50 | 64.19 | -24.495 | 39.695 | 54 | Pass |
| 2484.76 | 66.20 | -24.495 | 41.705 | 54 | Pass |


Note: The Duty cycle factor refer to the original report ACS-F20001.

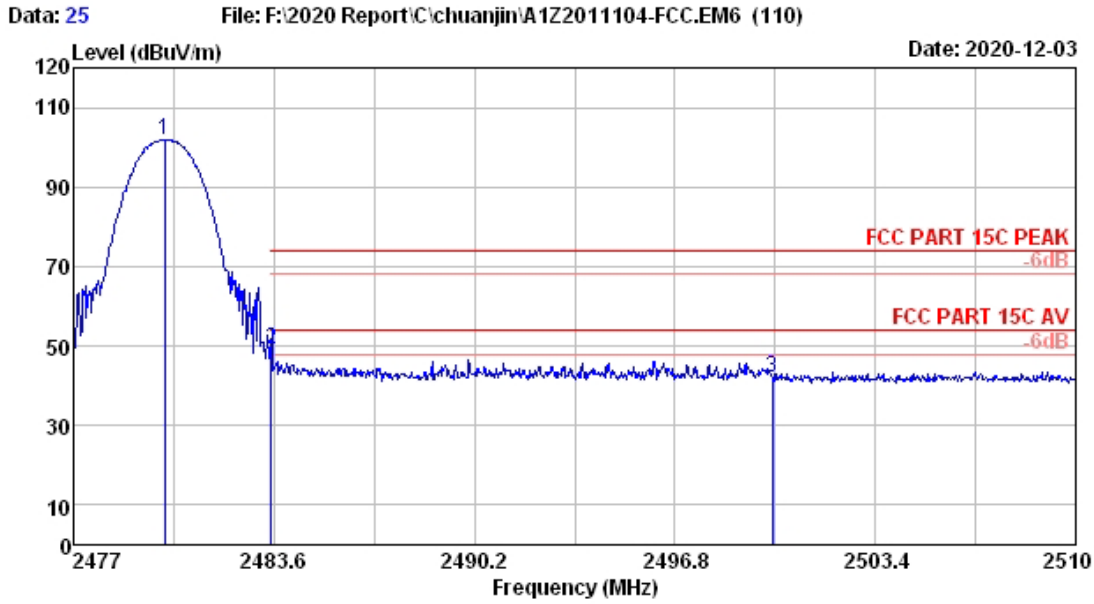

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT :
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2480MHz Tx Mode
 M/N :

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2480.00 | 28.17 | 0.94 | 106.33 | 33.46 | 101.98 | ----- | ----- | Peak |
| 2 | 2483.50 | 28.17 | 0.94 | 53.54 | 33.46 | 49.19 | 74.00 | 24.81 | Peak |
| 3 | 2500.00 | 28.20 | 0.95 | 46.16 | 33.45 | 41.86 | 74.00 | 32.14 | Peak |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

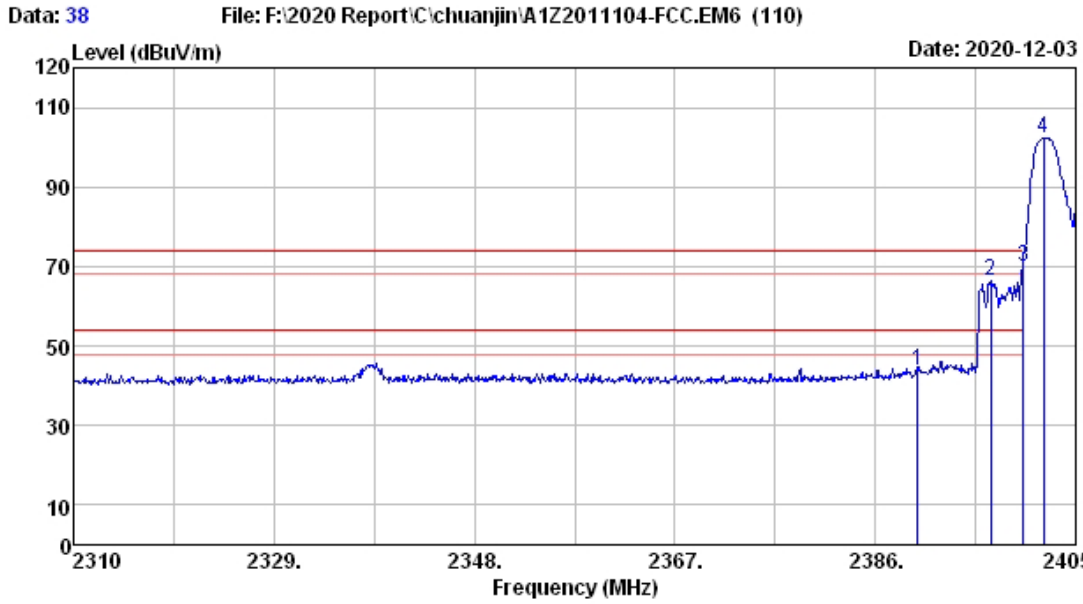

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2402MHz Tx Mode

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2390.00 | 28.01 | 0.92 | 48.39 | 33.48 | 43.84 | 74.00 | 30.16 | Peak |
| 2 | 2396.93 | 28.01 | 0.92 | 70.93 | 33.48 | 66.38 | 74.00 | 7.62 | Peak |
| 3 | 2400.00 | 28.01 | 0.92 | 74.35 | 33.48 | 69.80 | 74.00 | 4.20 | Peak |
| 4 | 2401.96 | 28.01 | 0.92 | 106.73 | 33.48 | 102.18 | ----- | ----- | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

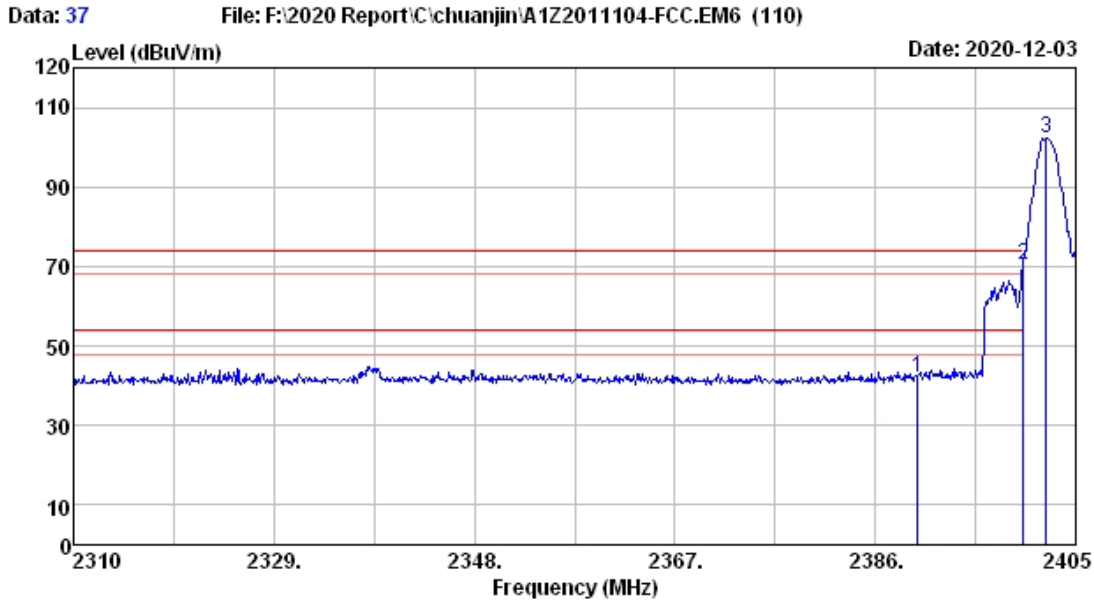

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m 2020 MCTD1209-3006 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 Power rating : DC 5V From Notebook Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2402MHz Tx Mode

| No. | Freq. (MHz) | Ant. Factor (dB/m) | Cable Loss (dB) | Reading (dBuV) | Amp factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-----|-------------|--------------------|-----------------|----------------|-----------------|-------------------------|-----------------|-------------|--------|
| 1 | 2390.00 | 28.01 | 0.92 | 46.79 | 33.48 | 42.24 | 74.00 | 31.76 | Peak |
| 2 | 2400.00 | 28.01 | 0.92 | 74.85 | 33.48 | 70.30 | 74.00 | 3.70 | Peak |
| 3 | 2402.25 | 28.01 | 0.92 | 106.67 | 33.48 | 102.12 | ----- | ----- | Peak |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.
 2. The emission levels that are 20dB below the official limit are not reported.

7. ANTENNA REQUIREMENT

7.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

7.2. Antenna Connected Construction

The antennas used for this product are Multilayer Ceramic Antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is -0.42dBi.

8. DEVIATION TO TEST SPECIFICATIONS

[NONE]

..... THE END