

FCC PART 15C TEST REPORT FOR CERTIFICATION  
On Behalf of

Funai Electric R & D (Shenzhen) Co., Ltd.

Wi-Fi Module

Model No.: U9W44

FCC ID: 2AU3BU9W44

Prepared for : Funai Electric R & D (Shenzhen) Co., Ltd.  
B303 Technology Building II, 1057 Nanhai Road, Nanshan  
District, Shenzhen, China 518067

Prepared By : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Kefeng Road, Science & Technology Park,  
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F23228

Date of Test : Nov.13 ~ 24, 2023

Date of Report : Dec.08, 2023

**TABLE OF CONTENTS**

<u>Description</u>	<u>Page</u>
<b>1. SUMMARY OF STANDARDS AND RESULTS .....</b>	<b>5</b>
1.1. Description of Standards and Results .....	5
<b>2. GENERAL INFORMATION.....</b>	<b>6</b>
2.1. Description of Equipment Under Test .....	6
2.2. Feature of Equipment Under Test .....	7
2.3. Tested Supporting System Details .....	9
2.4. Block diagram of connection between the EUT and simulators .....	9
2.5. Test Information.....	9
2.6. Test Facility.....	10
2.7. Measurement Uncertainty (95% confidence levels, k=2) .....	10
<b>3. POWER LINE CONDUCTED EMISSION TEST .....</b>	<b>11</b>
3.1. Test Equipments.....	11
3.2. Block Diagram of Test Setup .....	11
3.3. Power Line Conducted Emission Test Limits .....	11
3.4. Configuration of EUT on Test .....	11
3.5. Operating Condition of EUT .....	12
3.6. Test Procedure.....	12
3.7. Power Line Conducted Emission Test Results .....	12
<b>4. RADIATED EMISSION TEST .....</b>	<b>15</b>
4.1. Test Equipment .....	15
4.2. Block Diagram of Test Setup .....	16
4.3. Radiated Emission Limits .....	17
4.4. EUT Configuration on Test.....	17
4.5. Operating Condition of EUT .....	18
4.6. Test Procedure.....	18
4.7. Radiated Emission Test Results .....	18
<b>5. CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>71</b>
5.1. Test Equipment .....	71
5.2. Limit.....	71
5.3. Test Procedure.....	71
5.4. Test result .....	71
<b>6. BAND EDGE COMPLIANCE TEST.....</b>	<b>92</b>
6.1. Test Equipment .....	92
6.2. Limit .....	92
6.3. Test Procedure .....	92
6.4. Test Results .....	92
<b>7. 6DB BANDWIDTH TEST .....</b>	<b>125</b>
7.1. Test Equipment .....	125
7.2. Limit .....	125
7.3. Test Procedure.....	125
7.4. Test Results .....	125
<b>8. OUTPUT POWER TEST .....</b>	<b>130</b>
8.1. Test Equipment .....	130
8.2. Limit (FCC Part 15C 15.247 b(3)).....	130
8.3. Test Procedure.....	130
8.4. Test Results .....	131

<b>9.</b>	<b>POWER SPECTRAL DENSITY TEST .....</b>	<b>140</b>
9.1.	Test Equipment .....	140
9.2.	Limit .....	140
9.3.	Test Procedure.....	140
9.4.	Test Results .....	141
<b>10.</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>146</b>
10.1.	Standard Applicable .....	146
10.2.	Antenna Connected Construction .....	146
<b>11.</b>	<b>DEVIATION TO TEST SPECIFICATIONS .....</b>	<b>1</b>

Appendix A. Setup Photographs  
Appendix B. Photographs of EUT

### TEST REPORT

Applicant : Funai Electric R & D (Shenzhen) Co., Ltd.  
 Manufacturer : Funai Electric R & D (Shenzhen) Co., Ltd.  
 Product : Wi-Fi Module  
 FCC ID : 2AU3BU9W44  
 (A) Model No. : U9W44  
 (B) Test Voltage : DC 3.3V From PC Input AC 120V/60Hz

Tested for comply with:  
 FCC CFR 47 Part 15 Subpart C

Test procedure used:  
 ANSI C63.10: 2020  
 KDB 558074 D01v05

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to single evaluation of one sample of above mentioned product and shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd..

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. government.

Date of Test : Nov.13 ~ 24, 2023 Report of date: Dec.08, 2023

Prepared by : Jasmine Ning Reviewed by : Thomas Chen  
 Jasmine Ning / Assistant Thomas Chen / Assistant Manager



Approved & Authorized Signer : Signature: Sunny Lu  
 Sunny Lu / Manager

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.205	PASS
Band Edge Compliance	FCC Part 15: 15.247(d)	PASS
Conducted spurious emissions	FCC Part 15: 15.247(d)	PASS
6dB Bandwidth	FCC Part 15: 15.247(a)(2)	PASS
Peak Output Power	FCC Part 15: 15.247(b)(3)	PASS
Power Spectral Density	FCC Part 15: 15.247(e)	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

Note: Measurement uncertainty affection to the result is not considered, the EUT is technically compliant with standard requirements.

## 2. GENERAL INFORMATION

### 2.1. Description of Equipment Under Test

Applicant	Funai Electric R & D (Shenzhen) Co., Ltd.
Applicant Address	B303 Technology Building II, 1057 Nanhai Road, Nanshan District, Shenzhen, China 518067
Manufacturer	Funai Electric R & D (Shenzhen) Co., Ltd.
Manufacturer Address	B303 Technology Building II, 1057 Nanhai Road, Nanshan District, Shenzhen, China 518067
Factory	Funai (Thailand) Company Limited
Factory Address	835 Moo18, Pakchong-Lumsompung Road, Tambon, Chantuek, Amphur Pakchong, Nakhon Ratchasima 30130, Thailand
Product	Wi-Fi Module
Model No.	U9W44
FCC ID	2AU3BU9W44
Sample Type	Prototype production
Date of Receipt	Nov.06,2023
Date of Test	Nov.13 ~ 24, 2023
Remark: This report only for WIFI 2.4GHz.	

2.2.Feature of Equipment Under Test

Product Feature & Specification	
Product	Wi-Fi Module
Model No.	U9W44
Radio	IEEE802.11 a/b/g/n/ac
Power Source	<input type="checkbox"/> Commercial Power AC 100~240 V
	<input checked="" type="checkbox"/> External Power Source DC 3.3V
	<input type="checkbox"/> Li-ion Battery DC V
	<input type="checkbox"/> UM battery DC V
Bluetooth	
Radio	BDR +EDR; BLE
Frequency Range	2402-2480MHz
Type of Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK
Data Rate	1Mbps, 2Mbps, 3Mbps
Quantity of Channels	79/40
Channel Separation	1MHz/2MHz
2.4GHz Wi-Fi	
Support Modes	802.11b/g/n20/n40
Frequency Range	2412-2462MHz
Type of Modulation	802.11b(DSSS): CCK, QPSK, BPSK; 802.11g/n(OFDM): 64QAM,16QAM, QPSK, BPSK
Data Rate	802.11b: 1/2/5.5/11 Mbps; 802.11g: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 300Mbps
Channel Separation	5MHz
5GHz Wi-Fi	
Support Modes	802.11a/n20/n40/ac20/ac40/ac80
Frequency Range	5180-5240MHz, 5745-5825MHz
Type of Modulation	802.11a/n (OFDM): QPSK, BPSK, 16QAM, 64QAM 802.11ac (OFDM): QPSK, BPSK, 16QAM, 64QAM,256QAM
Data Rate	802.11a: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 300Mbps; 802.11ac: up to 867Mbps
Channel Separation	5MHz


Antenna System	
Antenna Peak Gain & Type of Antenna	Bluetooth (2.402-2.480GHz) Antenna Antenna Type : External PCB Antenna Antenna Gain: -0.42dBi max Wi-Fi 2.4GHz Antenna Antenna Type : Embedded Pattern Antennas (Antenna A/B) Antenna Gain: -3.77dBi max (Antenna A) -1.15dBi max (Antenna B) Wi-Fi U-NII-1 Band (5.15-5.25GHz) Antenna Antenna Type : Embedded Pattern Antennas(Antenna A/B) Antenna Gain: 1.91dBi max (Antenna A) -2.55dBi max (Antenna B) Wi-Fi U-NII-3 Band (5.725-5.85GHz) Antenna Antenna Type : PCB Antennas (Antenna A/B) Antenna Gain: 3.12dBi max (Antenna A) 0.38dBi max (Antenna B)



### 2.3. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	acer	ZOW	NVX7C
USB Cable: Shielded, Detachable, 1.0m					

### 2.4. Block diagram of connection between the EUT and simulators

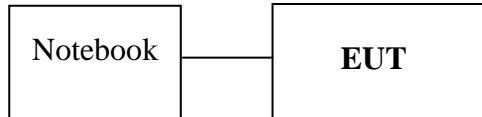

**(EUT: Wi-Fi Module)**

### 2.5. Test Information

A special test software (QATool\_Dbg.exe) was used to control EUT work in TX mode, and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information					
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)	Power Setting	
				ANTA	ANTB
IEEE 802.11b	1	Low :CH1	2412	23	23
	1	Middle: CH6	2437	23	23
	1	High: CH11	2462	23	23
IEEE 802.11g	6	Low :CH1	2412	23	23
	6	Middle: CH6	2437	23	23
	6	High: CH11	2462	23	23
IEEE 802.11n HT20	MCS0	Low :CH1	2412	23	23
	MCS0	Middle: CH6	2437	23	23
	MCS0	High: CH11	2462	23	23
IEEE 802.11n HT40	MCS0	Low :CH3	2422	23	23
	MCS0	Middle: CH6	2437	23	23
	MCS0	High: CH9	2452	23	23

Note: 1. According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

Note: 2. This device support MIMO & SISO, after evaluated output power, we found that MOMO power have the worst emissions than SISO, so the other test items are reported with MIMO mode. Test compliance with KDB 662911 D01 Multiple Transmitter Output v02r01.

**2.6. Test Facility**

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.  
: No. 6, Kefeng Road, Science & Technology Park,  
Nanshan District , Shenzhen, Guangdong, China

EMC Lab. : Certificated by ISED, Canada  
: Company Number: 5183A  
: CAB identifier: CN0034  
Valid Date: Mar.31, 2024

: Certificated by FCC, USA  
: Designation No.: CN5022  
Valid Date: Mar.31, 2024

: Accredited by NVLAP, USA  
: NVLAP Code: 200372-0  
Valid Date: Mar.31, 2024

**2.7.Measurement Uncertainty (95% confidence levels, k=2)**

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	$\pm 2.6\text{dB}(150\text{kHz to } 30\text{MHz})$
Uncertainty for Radiation Emission test in 3m chamber	$\pm 3.8\text{dB}(30\sim 200\text{MHz, Polarization: H})$
	$\pm 3.8\text{dB}(30\sim 200\text{MHz, Polarization: V})$
	$\pm 4.0\text{dB}(200\text{M}\sim 1\text{GHz, Polarization: H})$
	$\pm 4.0\text{dB}(200\text{M}\sim 1\text{GHz, Polarization: V})$
Uncertainty for Radiation Emission test in 3m chamber(1GHz-25GHz)	$\pm 4.0\text{dB}(1\sim 6\text{GHz, Distance: } 3\text{m})$
	$\pm 4.0\text{dB}(6\sim 25\text{GHz, Distance: } 3\text{m})$
Uncertainty for Radiated Spurious Emission test in RF chamber	$\pm 3.7\text{dB}(30\text{MHz}\sim 1000\text{MHz})$
	$\pm 3.3\text{dB}(1\sim 26.5\text{GHz})$
Uncertainty for Conduction Spurious emission test	$\pm 2.0\text{dB}$
Uncertainty for Output power test	$\pm 0.8\text{dB}$
Uncertainty for Bandwidth test	$\pm 4.6\%$
Uncertainty for DC power test	$\pm 0.1\%$
Uncertainty for test site temperature and humidity	$\pm 0.6^\circ\text{C}$
	$\pm 3\%$


### 3. POWER LINE CONDUCTED EMISSION TEST

#### 3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	Nov.09,22	3 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100842	Apr.01,23	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Jun.25,23	1 Year
4.	RF Cable	Eastsheep	RG223	190424	Sep.15,23	1Year
5.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

#### 3.2. Block Diagram of Test Setup

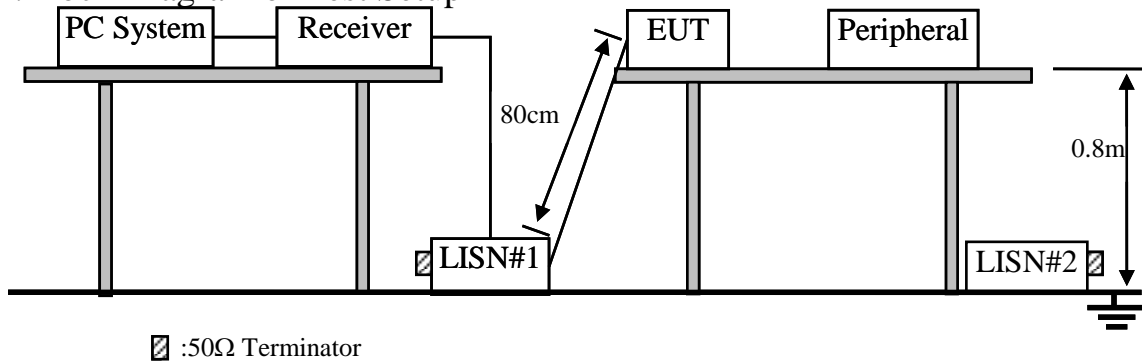

#### 3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3. Emission Level (dBμV) = Factor (L.I.S.N.) (dB) + Cable Loss (dB) + Reading (Receiver) (dBμV)

#### 3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

##### 3.4.1. Wi-Fi Module (EUT)

Model No. : U9W44

Serial No. : N/A

##### 3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.3.

### 3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT as shown as Section 3.2.
- 3.5.2. Turn on the power of EUT.
- 3.5.3. PC run test software to control EUT work in Tx mode.

### 3.6. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via AC unit connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10 on Conducted Emission Test.


The bandwidth of test receiver is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 3.7. Power Line Conducted Emission Test Results

**PASS.** (All emissions not reported below are too low against the prescribed limits.)


Data: 7 File: E:\1#CE\2023 Report Data\CRFA1Z2310028-RFA1Z2310028-FCC.EM6 (10) Date: 2023-11-20

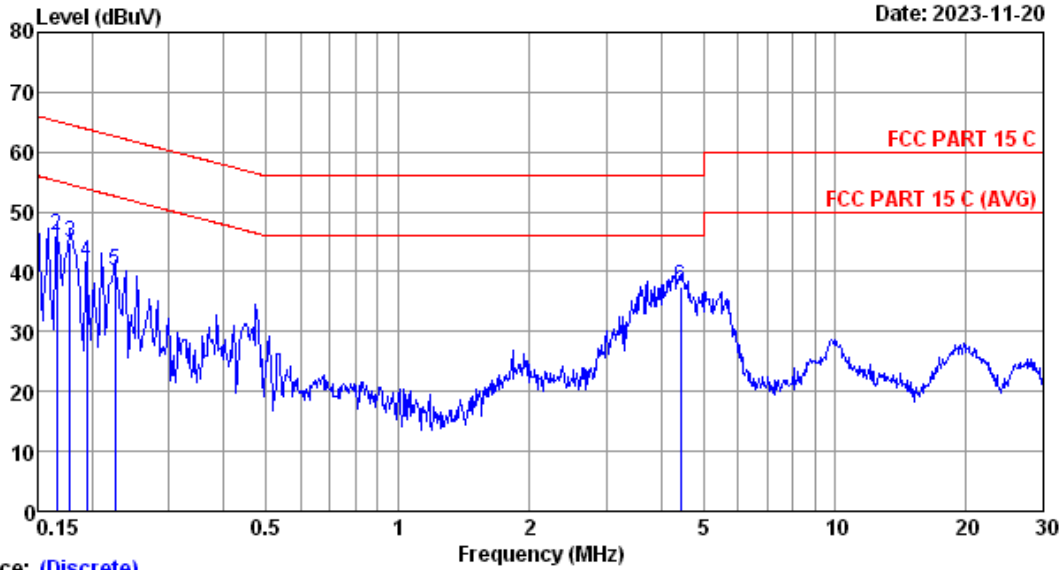

Trace: (Discrete)  
 Site no :1# CE Data No :7  
 Dis./Lisn :2023 ENV216-L  
 Limit :FCC PART 15 C  
 Env./Ins. :21.6°C/52.3% Engineer :Sucy  
 Power Rating :AC 120V/60Hz  
 Test Mode :WIFI 2.4G TX Mode

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.62	0.01	36.69	46.32	66.00	19.68	QP
2	0.166	9.62	0.01	36.49	46.12	65.16	19.04	QP
3	0.178	9.62	0.01	35.20	44.83	64.59	19.76	QP
4	0.194	9.62	0.01	31.93	41.56	63.84	22.28	QP
5	0.226	9.62	0.01	30.40	40.03	62.61	22.58	QP
6	4.430	9.79	0.06	27.73	37.58	56.00	18.42	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

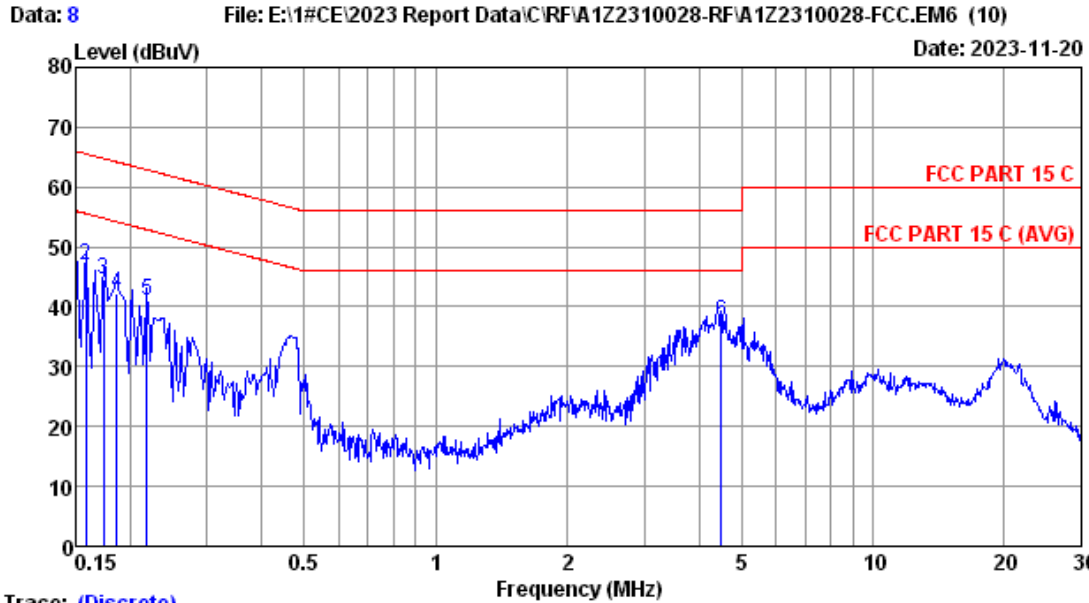

Trace: (Discrete)

Site no :1# CE Data No :8

Dis./Lisn :2023 ENV216-N

Limit :FCC PART 15 C

Env./Ins. :21.6°C/52.3% Engineer :Sucy

Power Rating :AC 120V/60Hz

Test Mode :WIFI 2.4G TX Mode

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.69	0.01	37.50	47.20	66.00	18.80	QP
2	0.158	9.69	0.01	37.28	46.98	65.56	18.58	QP
3	0.174	9.69	0.01	34.95	44.65	64.77	20.12	QP
4	0.186	9.70	0.01	32.56	42.27	64.20	21.93	QP
5	0.219	9.70	0.01	31.36	41.07	62.88	21.81	QP
6	4.501	9.20	0.06	28.12	37.38	56.00	18.62	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

## 4. RADIATED EMISSION TEST

### 4.1. Test Equipment

#### 4.1.1. For frequency range 30MHz~1000MHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3m Chamber(NSA)	AUDIX	N/A	N/A	Aug.11,22	3 Year
2.	3m Chamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	103670	Jun.25,23	1 Year
4.	Tri-log-Broadband Antenna	SCHWARZBECK	VULB 9168	429	Oct.10,23	1 Year
5.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3+190411	Sep.20,23	1 Year
6.	Coaxial Switch	Anritsu	MP59B	6201397223	Apr.02,23	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESR3	101931	Apr.01,23	1 Year
8.	Broadband Amplifier	SCHWARZBECK	BBV9744	00259	Jun.25,23	1 Year
9.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.


#### 4.1.2. For frequency range 1GHz~25GHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3mChamber(Svswr)	AUDIX	N/A	N/A	Aug.09,22	3 Year
2.	3mChamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.01,23	1 Year
4.	Amplifier	EMCI	EMC0518A45S E	980965	Aug.25,23	1 Year
5.	RF Cable	Shanghai chao yu	SFT205-NMSM- 10.00M	689241	Aug.25,23	1 Year
6.	Test Software	AUDIX	e3	6.100913a	N/A	N/A
7.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Aug.23,23	1 Year


Note: N/A means Not applicable.

### 4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

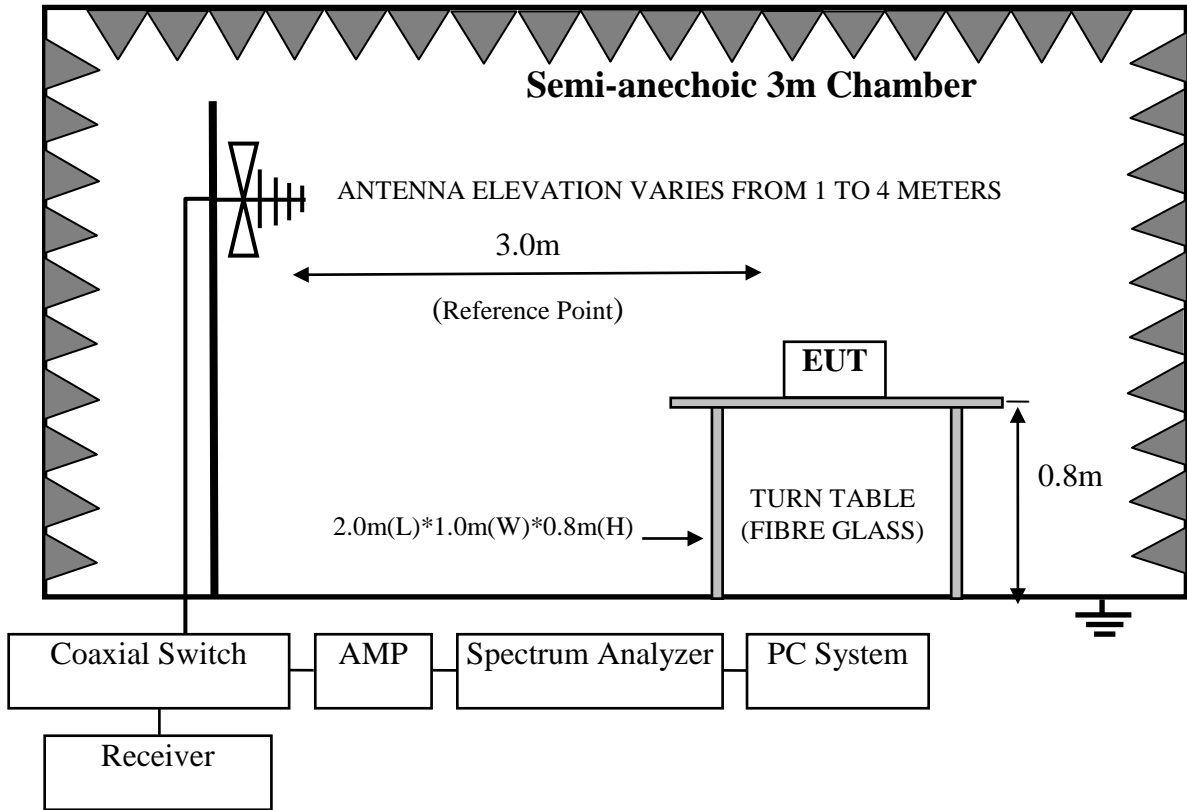

For frequency range 1GHz-25GHz

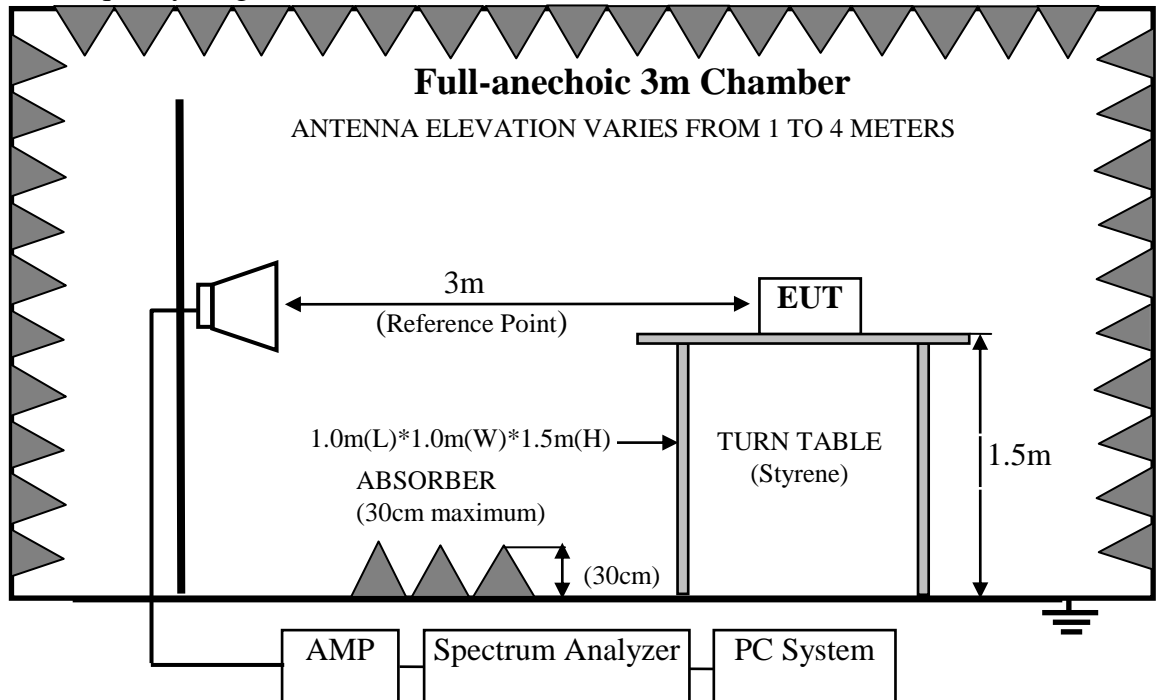



### 4.3. Radiated Emission Limits

#### 4.3.1. 15.247&209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Remark : (1) Emission Level (dBμV/m) = Reading (Receiver) (dBμV) + Antenna Factor (dB/m) + Cable Loss (dB)

Emission Level (dBμV/m) = Reading (Spectrum) (dBμV) + Antenna Factor (dB/m) – Amp Factor (dB) + Cable Loss (dB)(above 1000MHz)

- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

#### 4.3.2. 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

#### 4.4.1. Wi-Fi Module (EUT)

Model No. : U9W44  
Serial No. : N/A

#### 4.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.3.

#### 4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.5.2. Turn on the power of all equipments.
- 4.5.3. Let EUT work in Tx(WiFi 2.4GHz) mode

#### 4.6. Test Procedure

##### **Frequency below 30MHz:**

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 regulation.

##### **Frequency above 30MHz:**

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)\*2.4m(W)\*0.3m(H) on the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna are set on test.

This test was performed with EUT in X, Y, Z position, and the worse case was found and reported.

The bandwidth of the EMI test receiver (R&S) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10<sup>th</sup> harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25GHz, So the radiated emissions from 18GHz to 25GHz were not record.

#### 4.7. Radiated Emission Test Results


**PASS.**

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.


Note 1: For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.



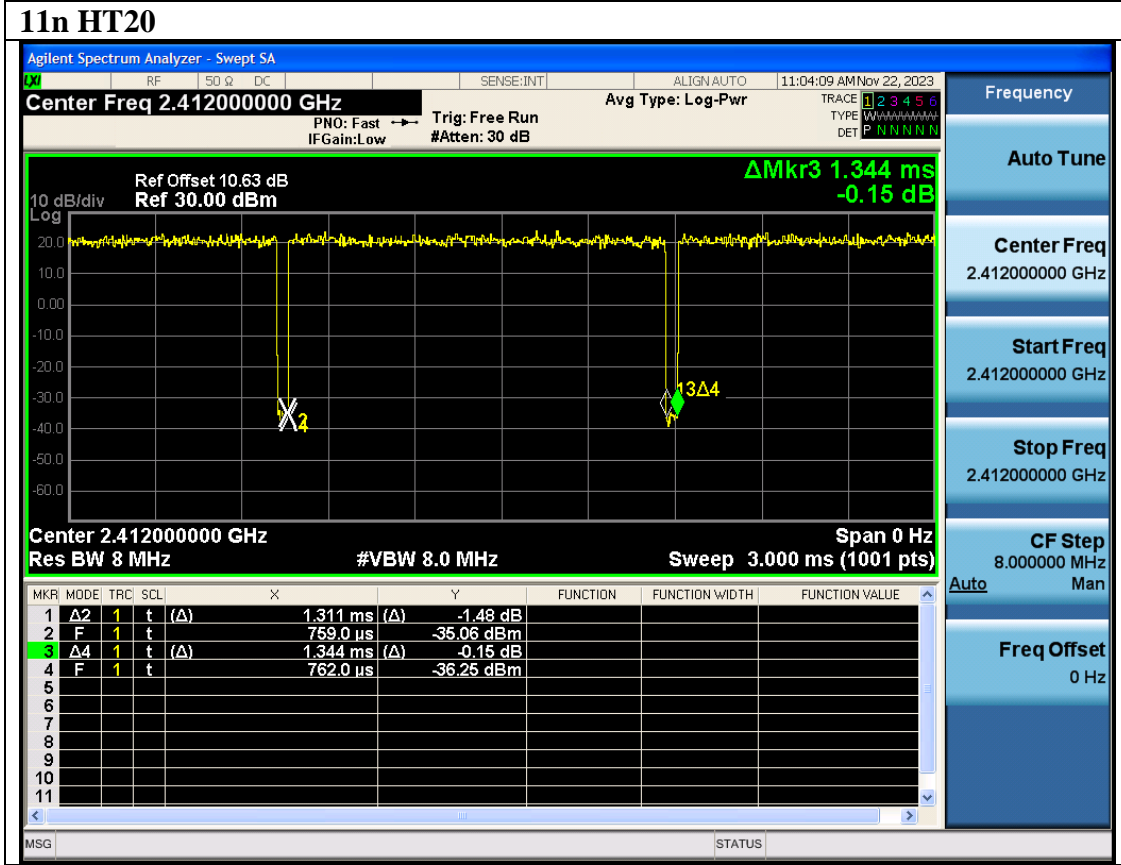


Note: The duty cycle factor is 0.11.

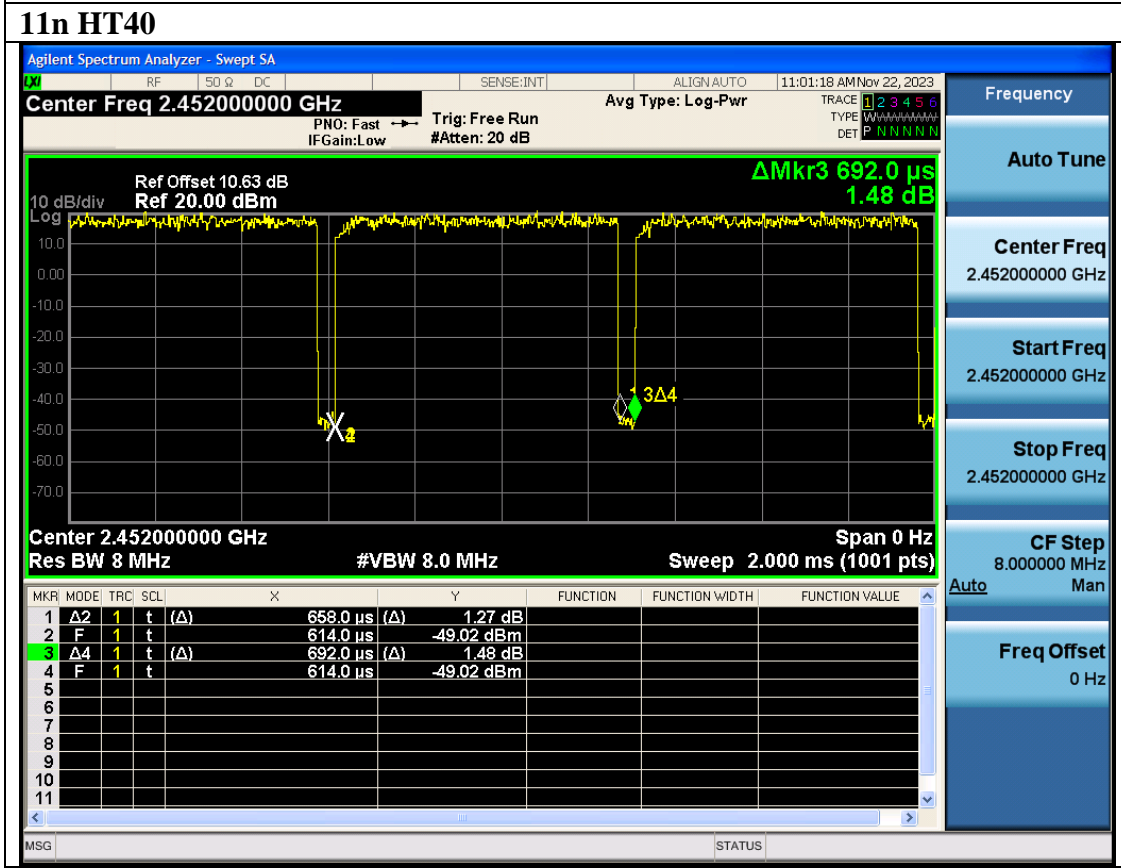

Note: The duty cycle factor is 0.23.


Frequency: 30MHz~1GHz

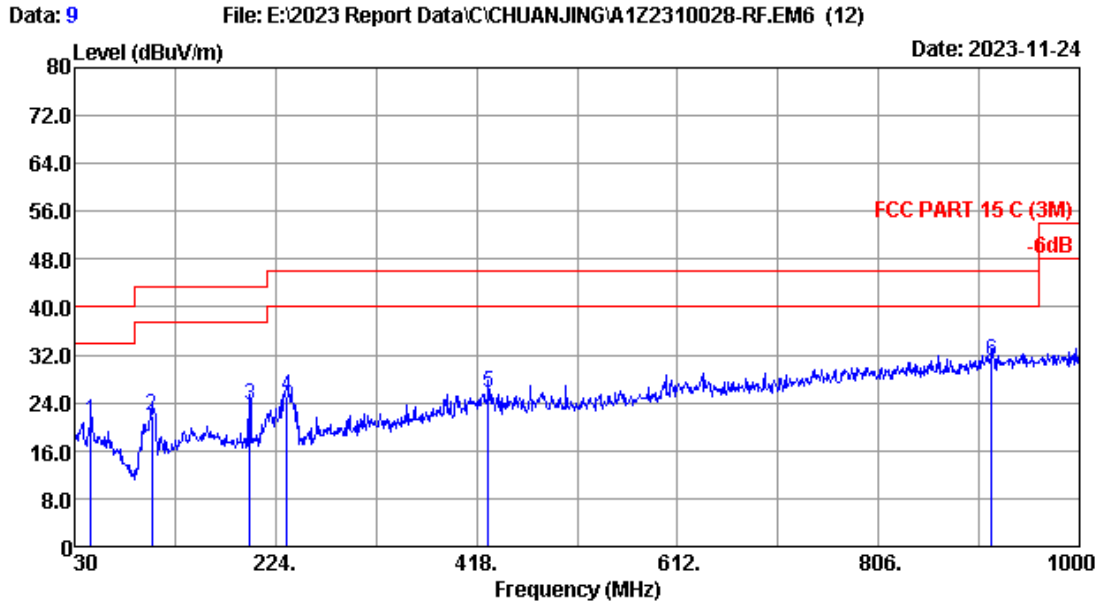

Site no.	: 3m Chamber	Data no.	: 9
Dis. / Ant.	: 3m 2023 VULB 9168-429	Ant. pol.	: VERTICAL
Limit	: FCC PART 15 C (3M)		
Env. / Ins.	: 23.6°C55%	Engineer	: Abel
Test Mode	: WIFI 2.4G TX Mode		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	45.520	19.60	0.61	0.72	20.93	40.00	19.07	QP
2	104.690	16.04	0.88	4.96	21.88	43.50	21.62	QP
3	198.780	16.12	1.16	6.24	23.52	43.50	19.98	QP
4	234.670	17.05	1.30	6.64	24.99	46.00	21.01	QP
5	429.640	22.59	1.69	1.53	25.81	46.00	20.19	QP
6	915.610	29.62	2.67	-1.16	31.13	46.00	14.87	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

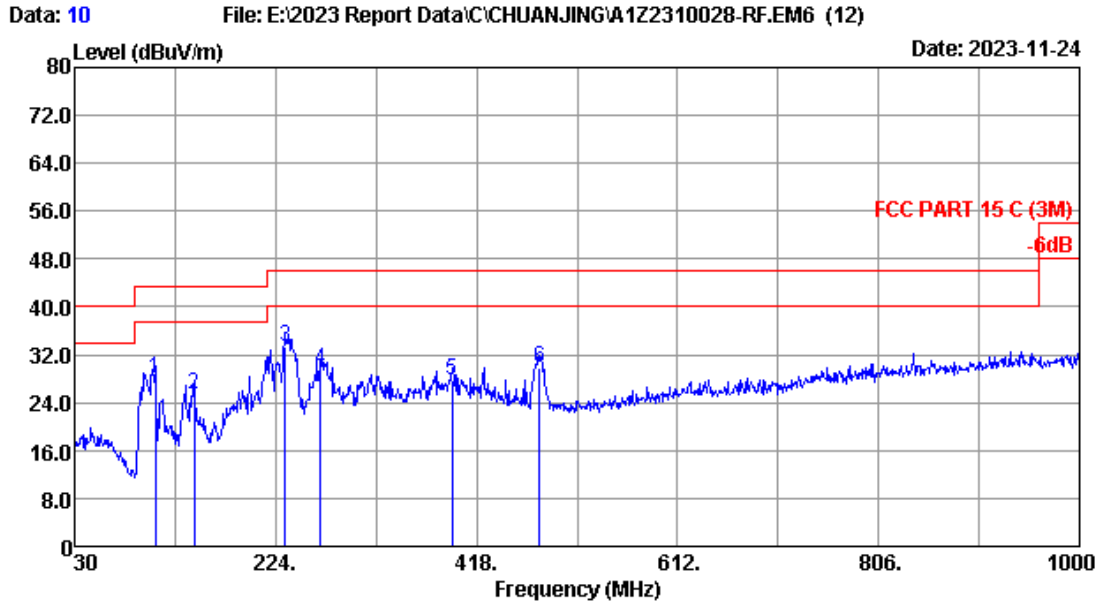

Site no. : 3m Chamber Data no. : 10  
 Dis. / Ant. : 3m 2023 VULB 9168-429 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 23.6°C55% Engineer : Abel  
 Test Mode : WIFI 2.4G TX Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	107.600	16.42	0.89	10.66	27.97	43.50	15.53	QP
2	145.430	19.30	1.00	4.98	25.28	43.50	18.22	QP
3	233.700	16.92	1.30	15.13	33.35	46.00	12.65	QP
4	267.650	18.46	1.36	9.57	29.39	46.00	16.61	QP
5	394.720	21.40	1.62	4.86	27.88	46.00	18.12	QP
6	479.110	23.36	1.79	4.77	29.92	46.00	16.08	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

### Frequency: 1GHz~18GHz


Data: 33

File: F:\2023 Report\C\A1Z2310028\A1Z2310028-WIFI2.4G.EM6 (80)

Date: 2023-11-14

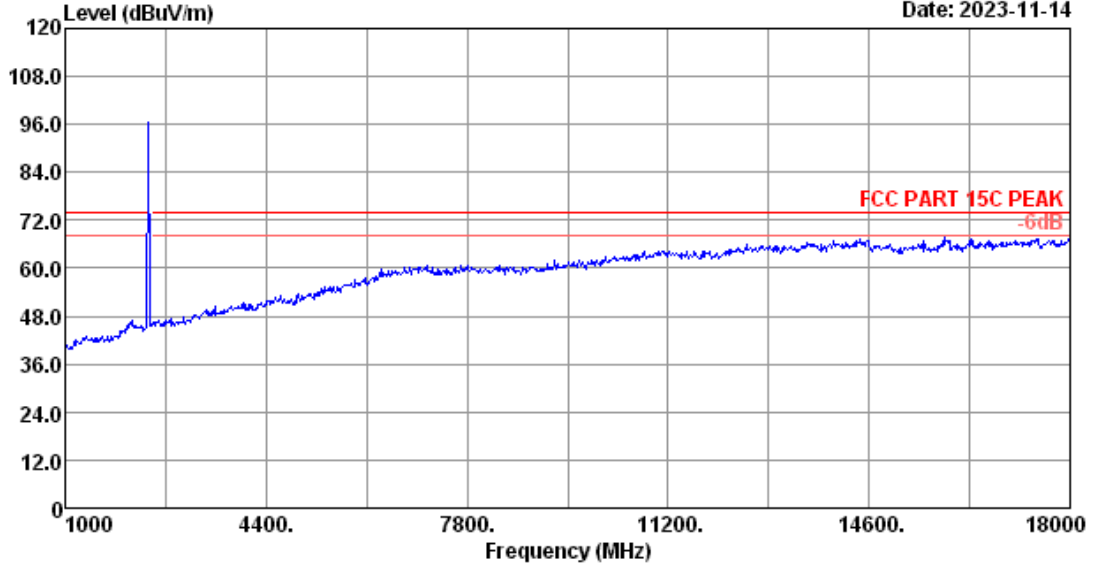

Site no.	: 3m Chamber	Data no.	: 33
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2*C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11b 2412MHz TX		

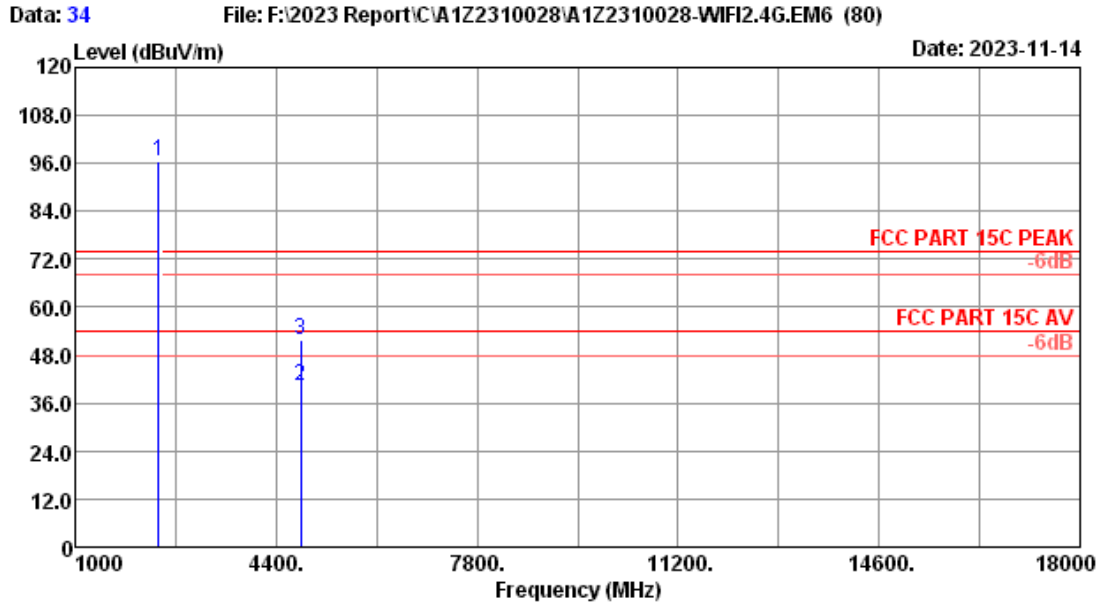


Site no. : 3m Chamber Data no. : 34  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11b 2412MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.65	2.84	98.44	32.21	96.72	-----	-----	Peak
2	4824.00	31.20	3.96	36.03	31.07	40.12	54.00	13.88	Average
3	4824.00	31.20	3.96	47.78	31.07	51.87	74.00	22.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



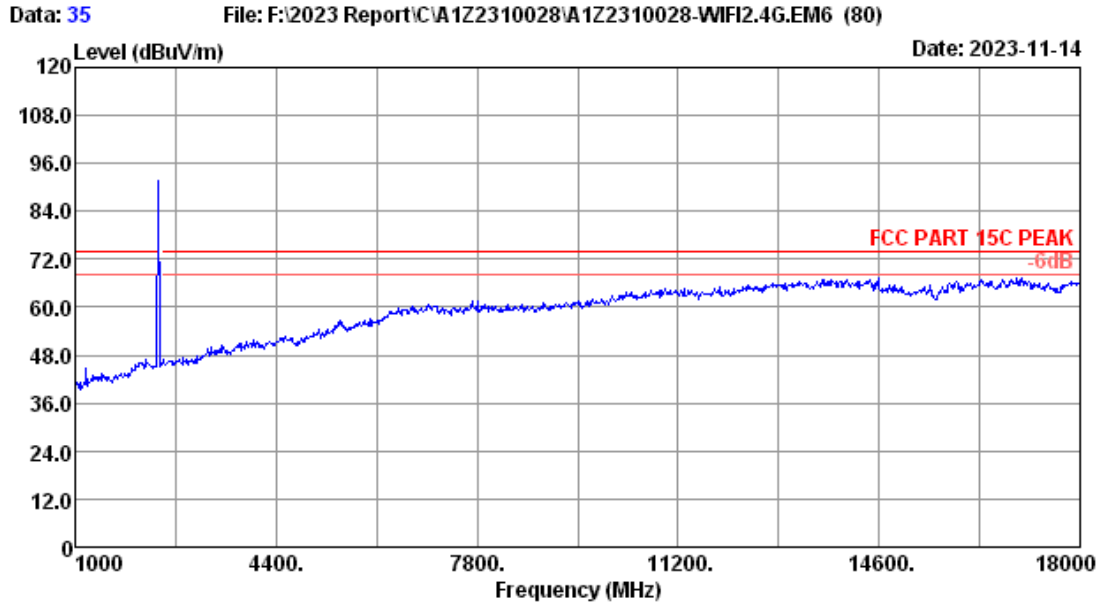


Site no.	: 3m Chamber	Data no.	: 35
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11b 2412MHz TX		

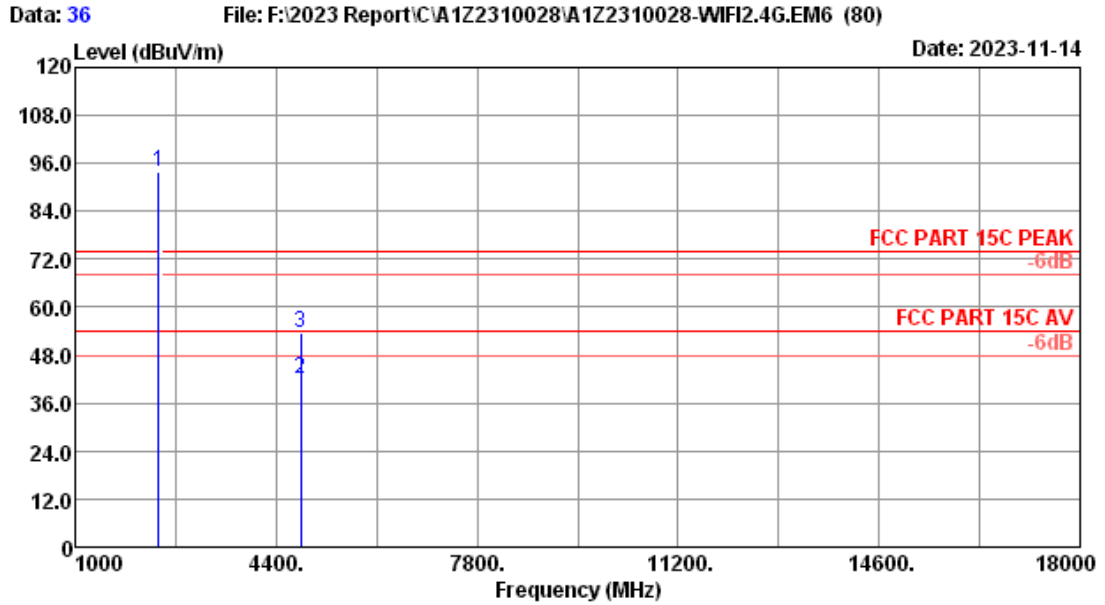


Site no. : 3m Chamber Data no. : 36  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11b 2412MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.65	2.84	95.69	32.21	93.97	-----	-----	Peak
2	4824.00	31.20	3.96	38.07	31.07	42.16	54.00	11.84	Average
3	4824.00	31.20	3.96	49.62	31.07	53.71	74.00	20.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

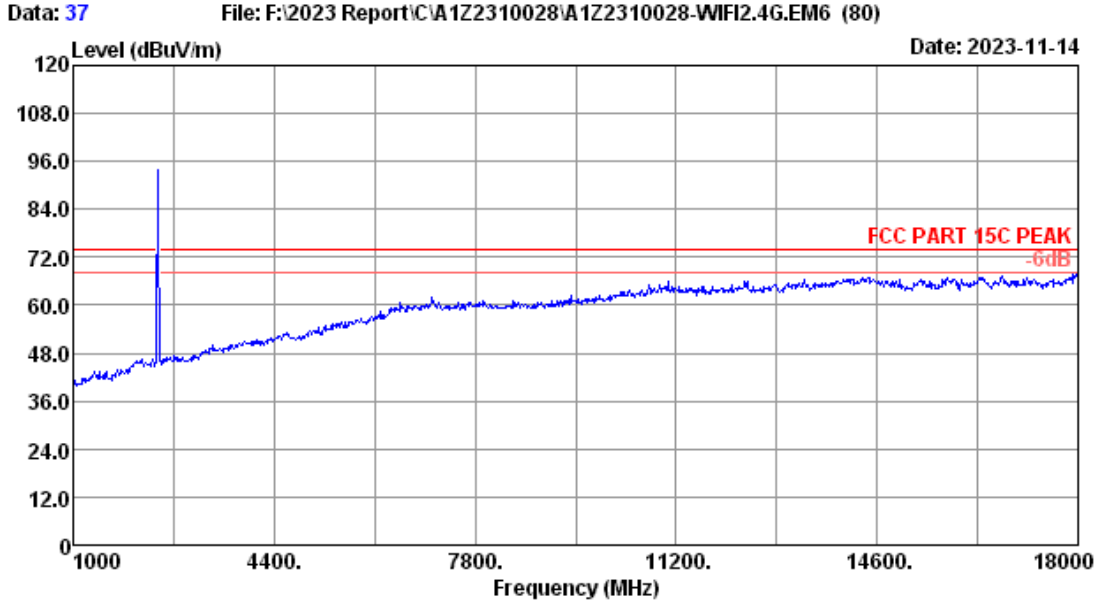


Site no.	: 3m Chamber	Data no.	: 37
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11b 2437MHz TX		

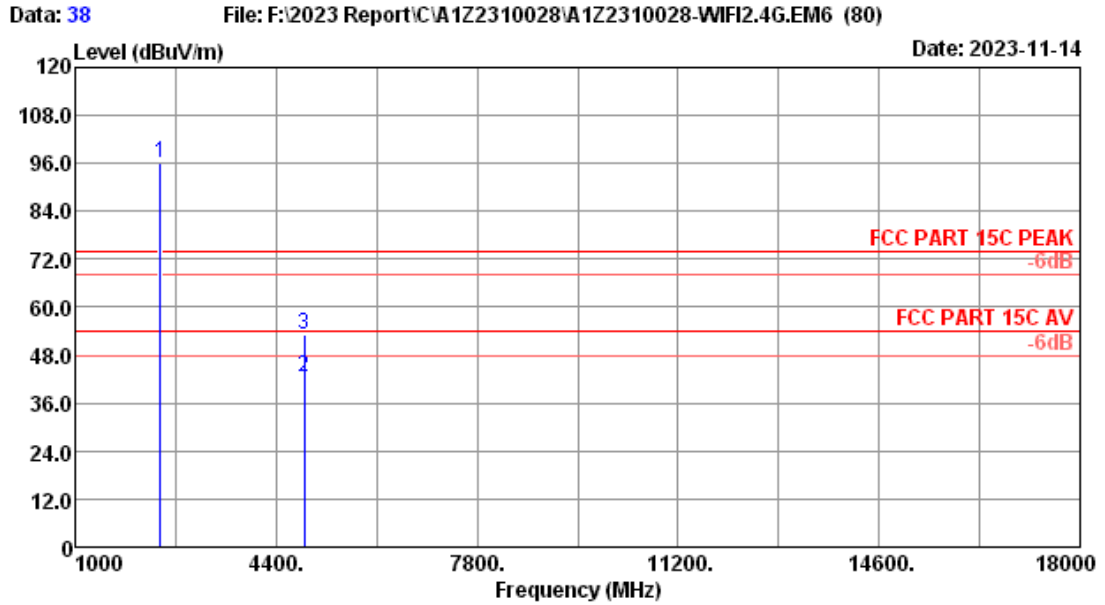


Site no. : 3m Chamber Data no. : 38  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11b 2437MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.75	2.86	97.61	32.19	96.03	-----	-----	Peak
2	4874.00	31.39	3.98	38.16	31.05	42.48	54.00	11.52	Average
3	4874.00	31.39	3.98	49.03	31.05	53.35	74.00	20.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

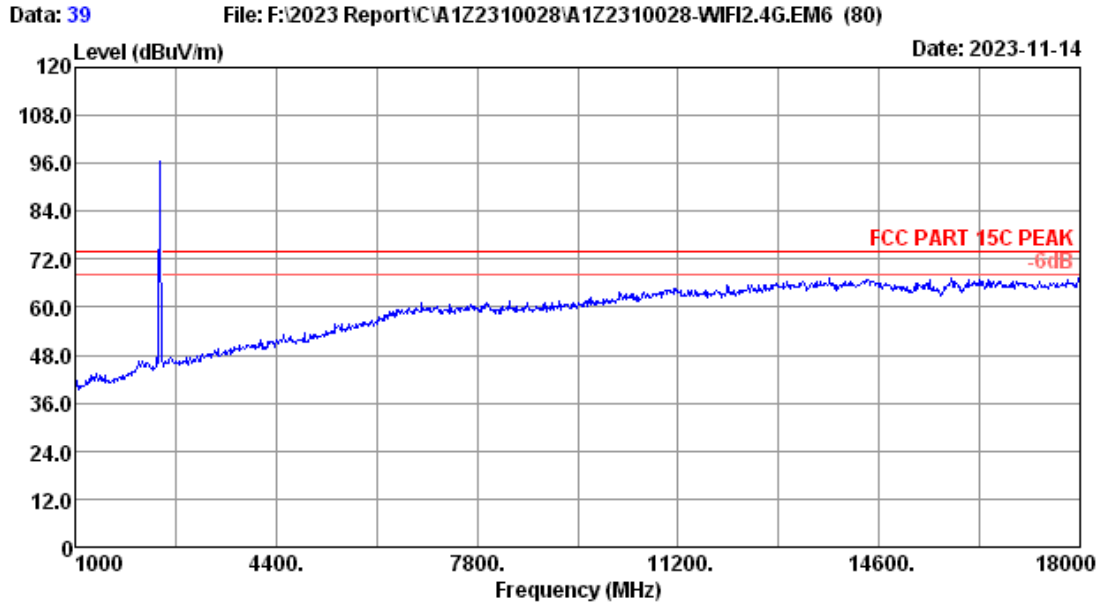


Site no.	: 3m Chamber	Data no.	: 39
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11b 2437MHz TX		

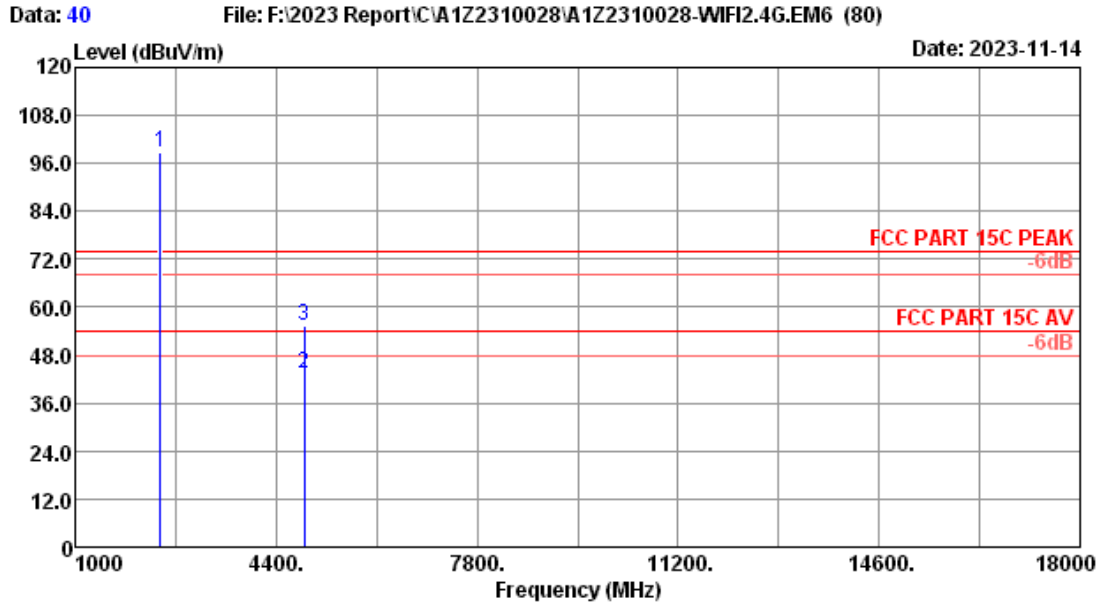


Site no. : 3m Chamber Data no. : 40  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11b 2437MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.75	2.86	100.17	32.19	98.59	74.00	24.59	Peak
2	4874.00	31.39	3.98	39.19	31.05	43.51	54.00	-10.49	Average
3	4874.00	31.39	3.98	50.91	31.05	55.23	74.00	-18.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

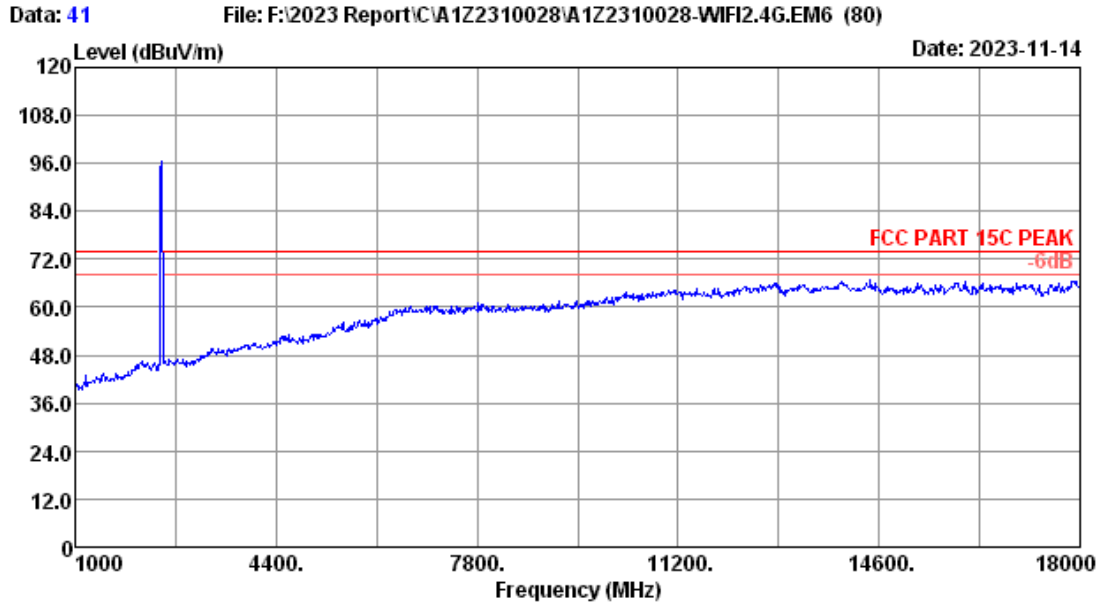

Site no.	: 3m Chamber	Data no.	: 41
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11b 2462MHz TX		

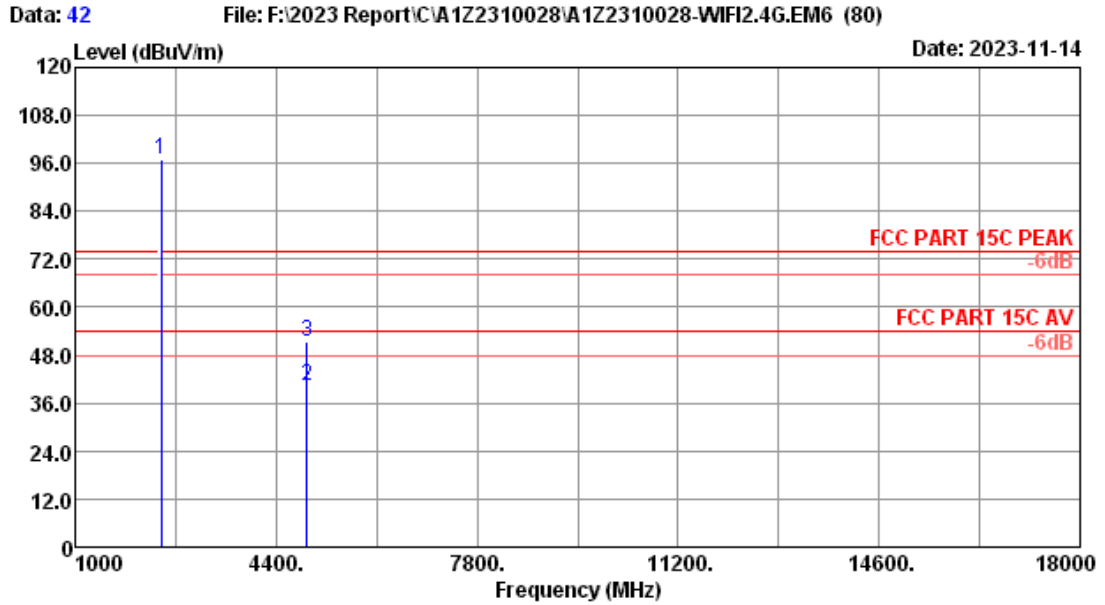


Site no. : 3m Chamber Data no. : 42  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11b 2462MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	2.87	98.50	32.18	96.99	-----	-----	Peak
2	4924.00	31.74	4.00	35.41	31.03	40.12	54.00	13.88	Average
3	4924.00	31.74	4.00	46.74	31.03	51.45	74.00	22.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



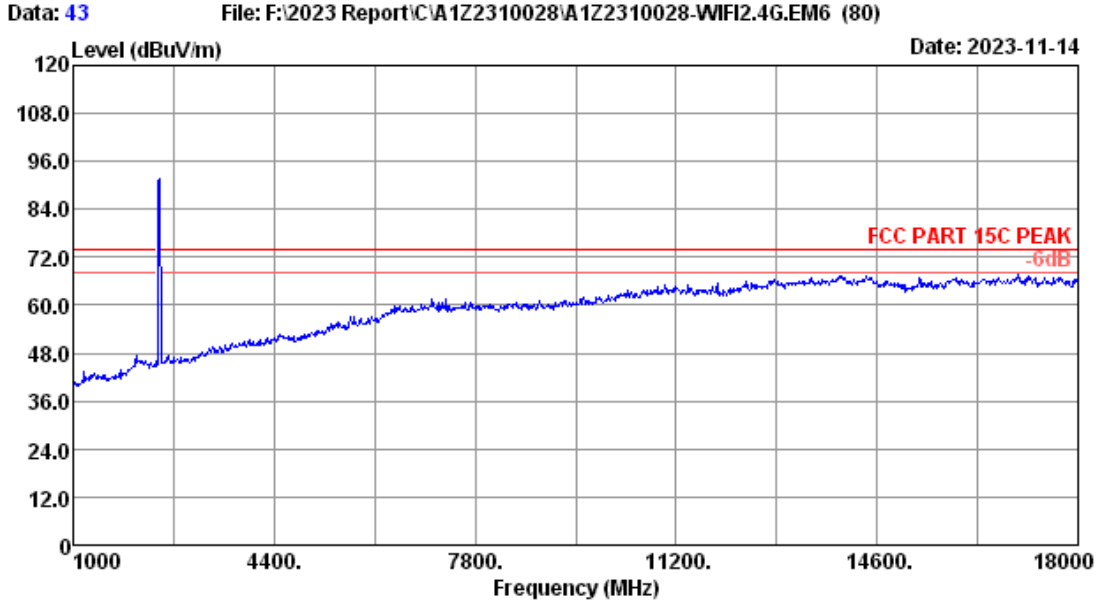


Site no.	: 3m Chamber	Data no.	: 43
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11b 2462MHz TX		

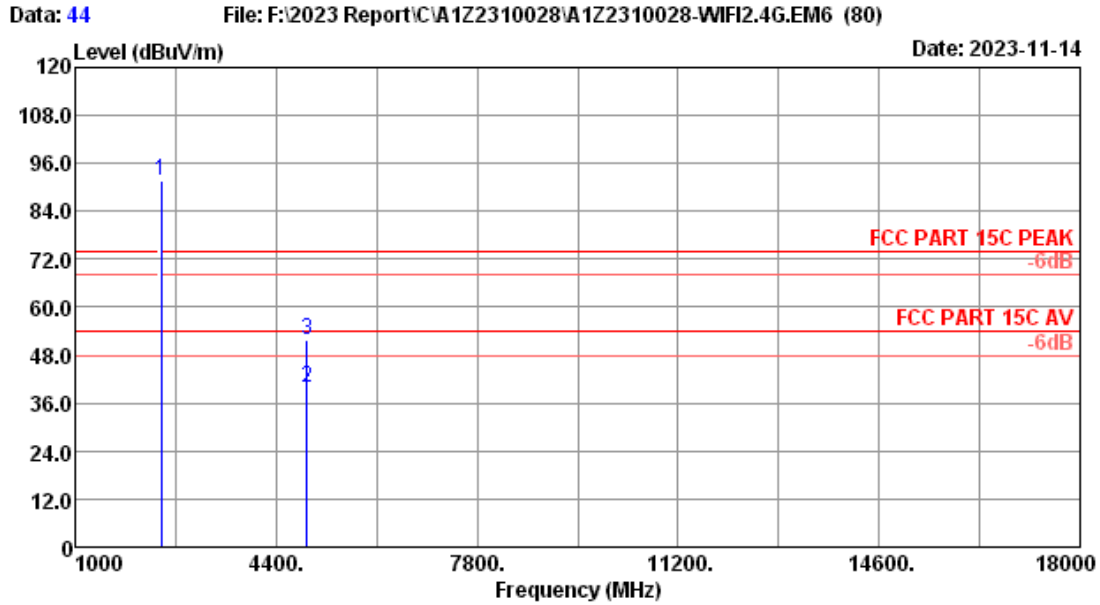


Site no. : 3m Chamber Data no. : 44  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11b 2462MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	2.87	93.35	32.18	91.84	-----	-----	Peak
2	4924.00	31.74	4.00	35.18	31.03	39.89	54.00	14.11	Average
3	4924.00	31.74	4.00	46.95	31.03	51.66	74.00	22.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

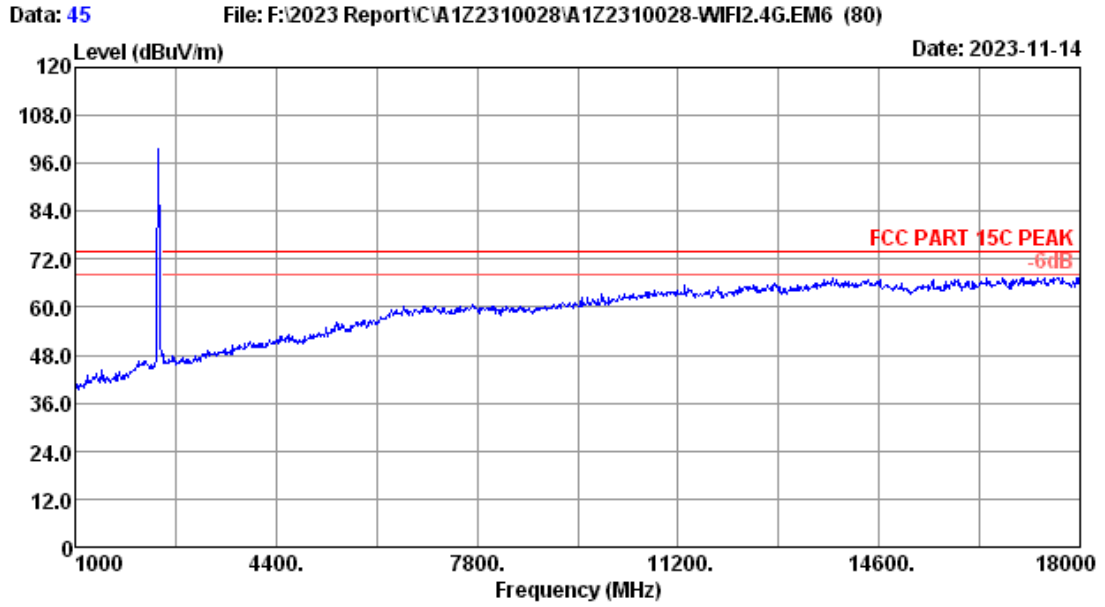


Site no.	: 3m Chamber	Data no.	: 45
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11g 2412MHz TX		

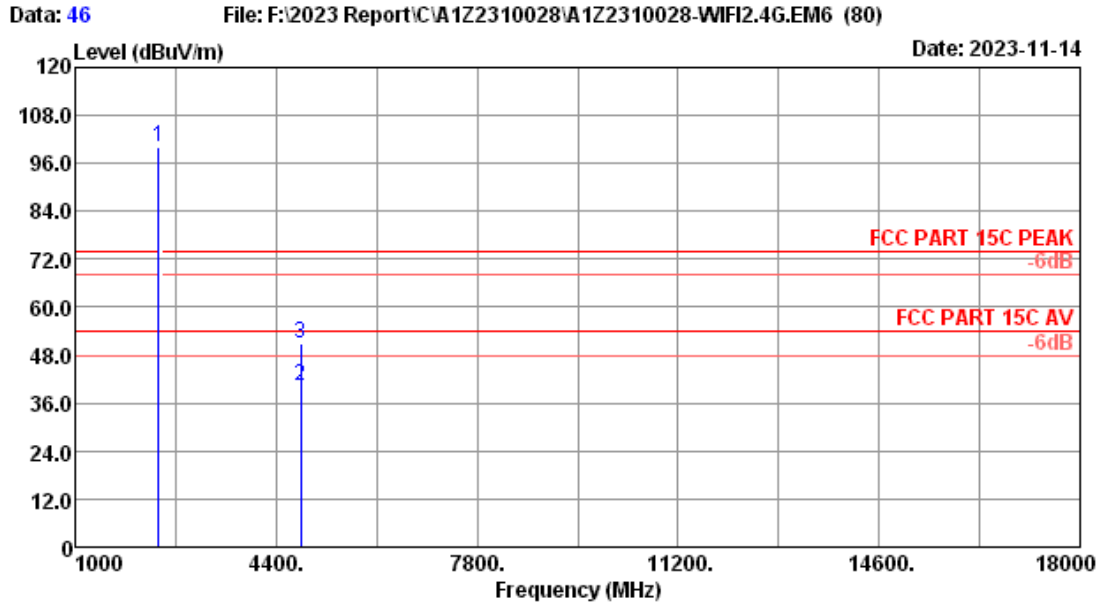


Site no. : 3m Chamber Data no. : 46  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11g 2412MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.65	2.84	101.67	32.21	99.95	-----	-----	Peak
2	4824.00	31.20	3.96	36.17	31.07	40.26	54.00	13.74	Average
3	4824.00	31.20	3.96	46.82	31.07	50.91	74.00	23.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

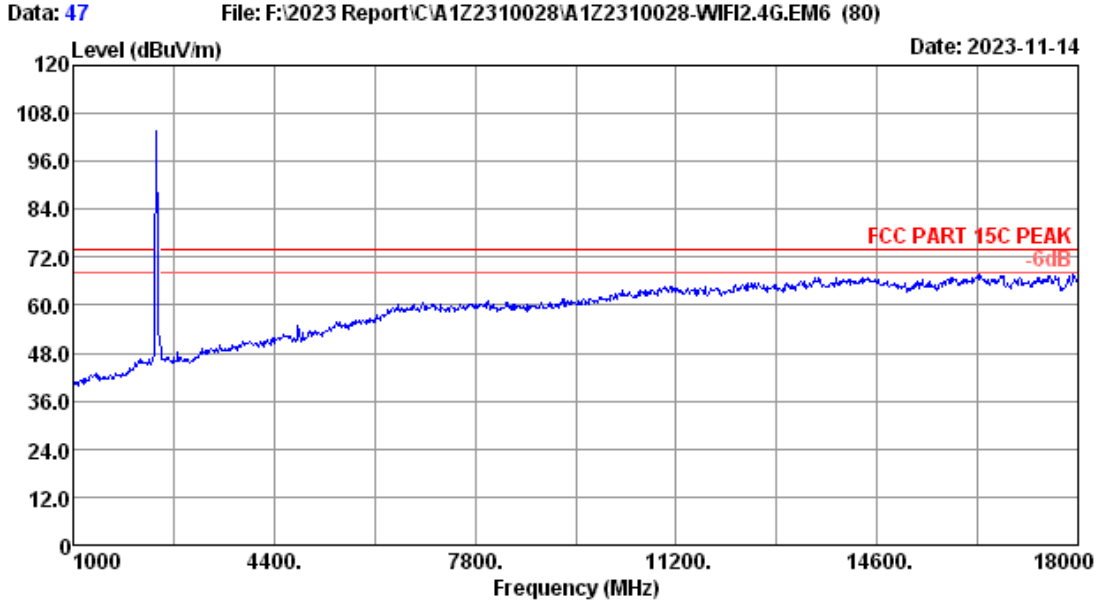


Site no.	: 3m Chamber	Data no.	: 47
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11g 2412MHz TX		

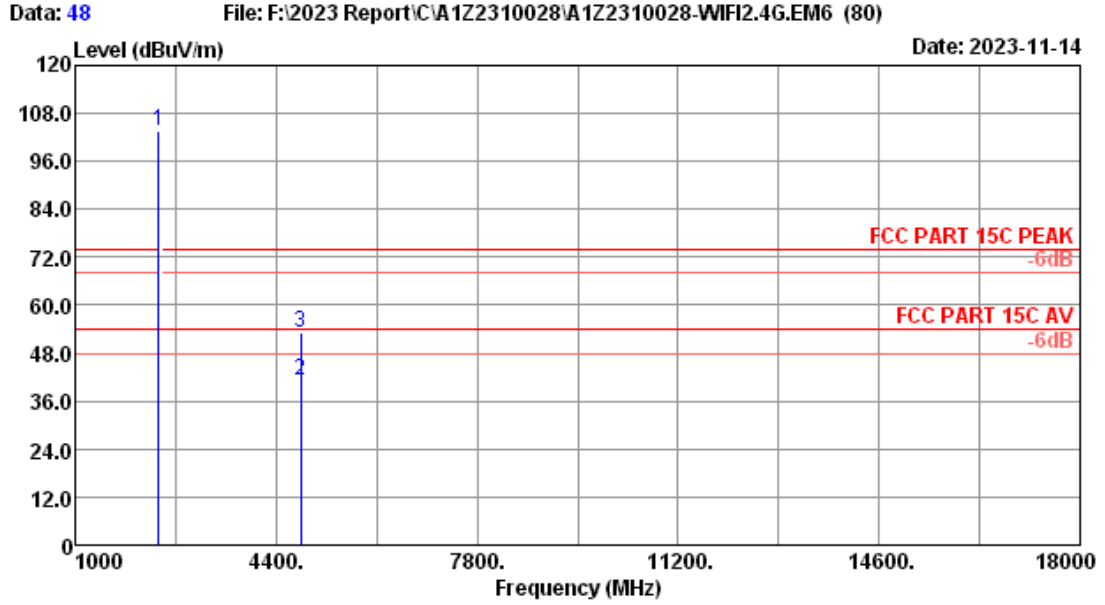


Site no. : 3m Chamber Data no. : 48  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2\*C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11g 2412MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.65	2.84	105.46	32.21	103.74	-----	-----	Peak
2	4824.00	31.20	3.96	37.19	31.07	41.28	54.00	12.72	Average
3	4824.00	31.20	3.96	48.99	31.07	53.08	74.00	20.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

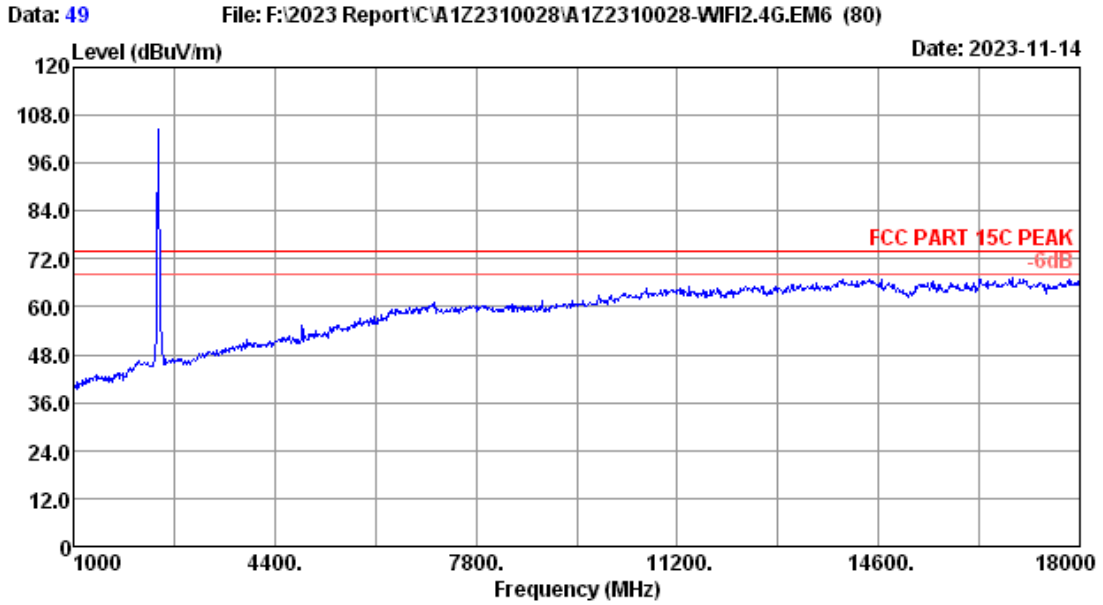

Site no.	: 3m Chamber	Data no.	: 49
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11g 2437MHz TX		

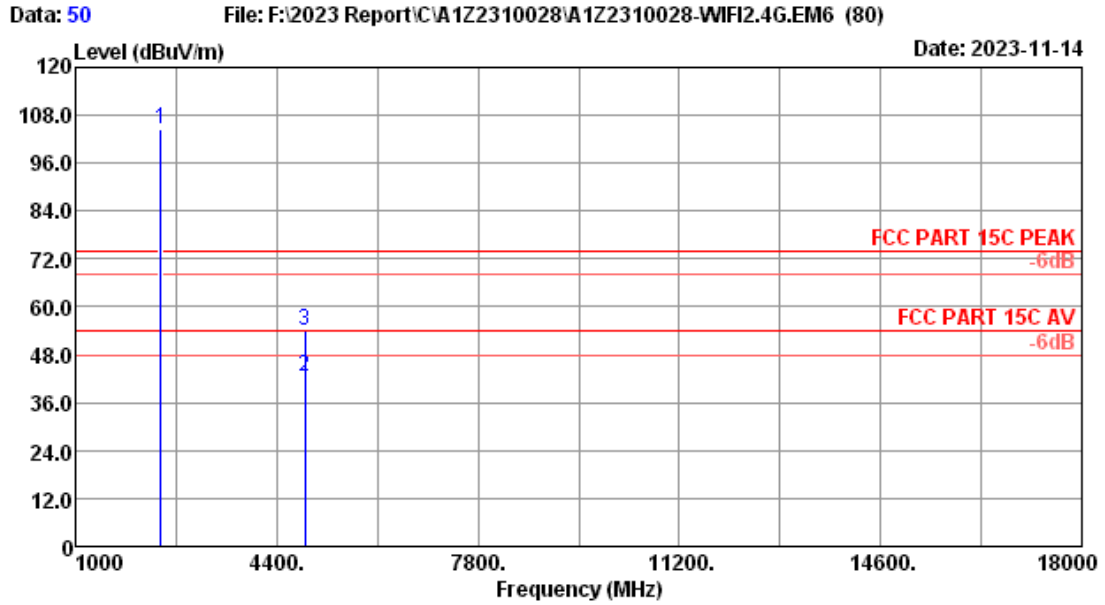


Site no. : 3m Chamber Data no. : 50  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11g 2437MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.75	2.86	106.28	32.19	104.70	-----	-----	Peak
2	4874.00	31.39	3.98	38.28	31.05	42.60	54.00	11.40	Average
3	4874.00	31.39	3.98	49.49	31.05	53.81	74.00	20.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



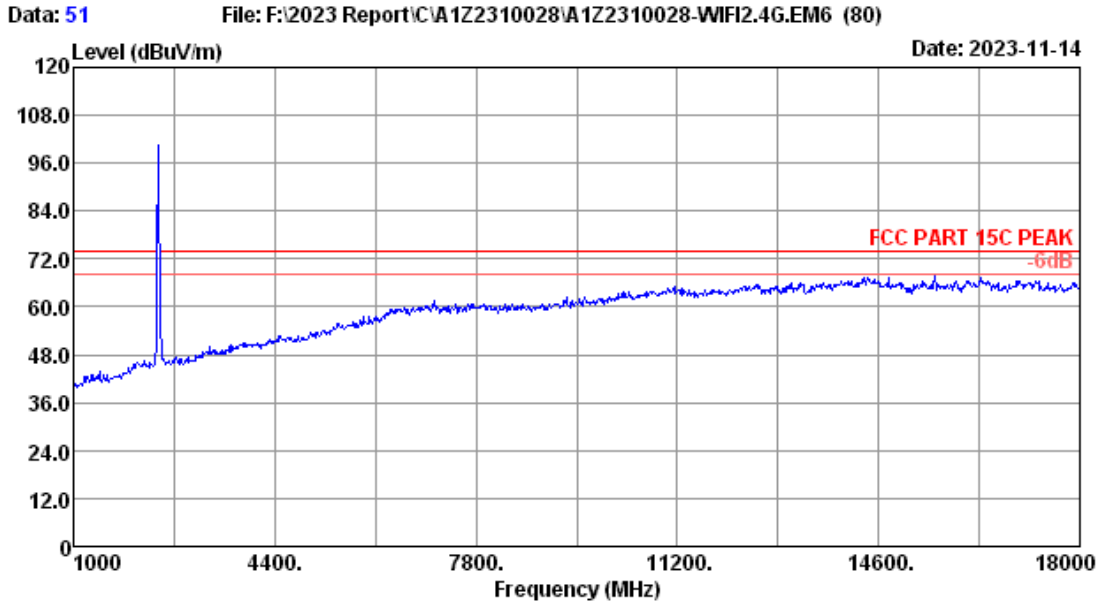


Site no.	: 3m Chamber	Data no.	: 51
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11g 2437MHz TX		

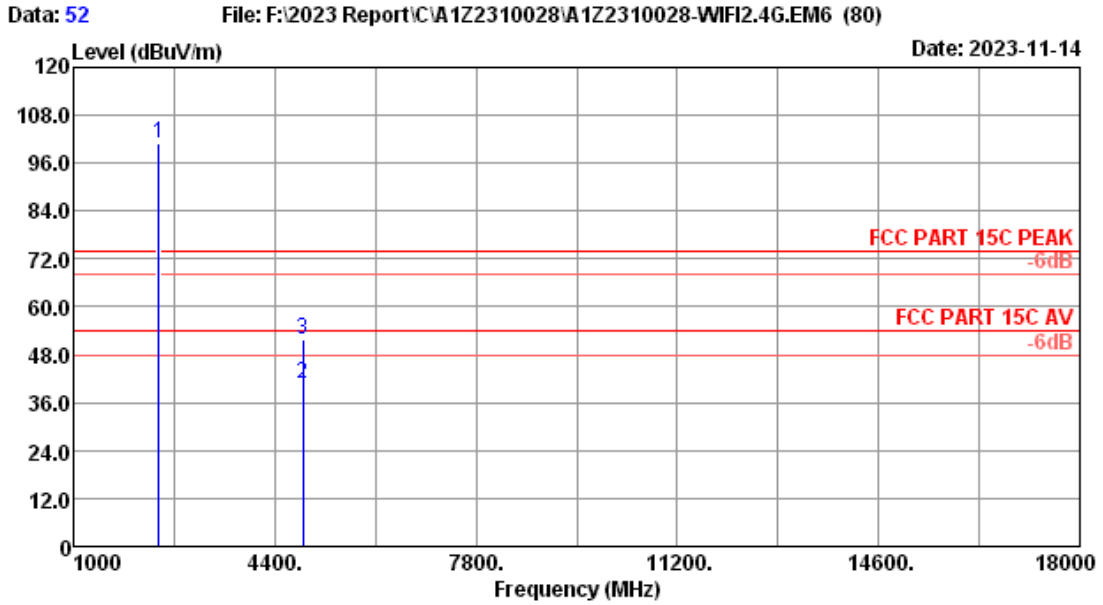


Site no. : 3m Chamber Data no. : 52  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11g 2437MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.75	2.86	102.37	32.19	100.79	-----	-----	Peak
2	4874.00	31.39	3.98	36.59	31.05	40.91	54.00	13.09	Average
3	4874.00	31.39	3.98	47.65	31.05	51.97	74.00	22.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

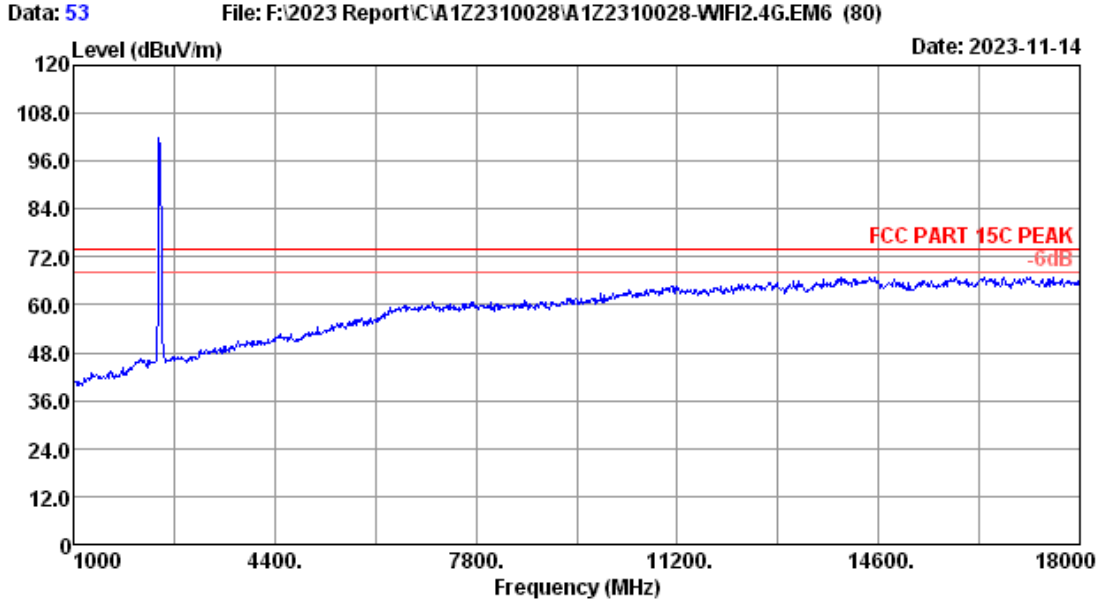


Site no.	: 3m Chamber	Data no.	: 53
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11g 2462MHz TX		

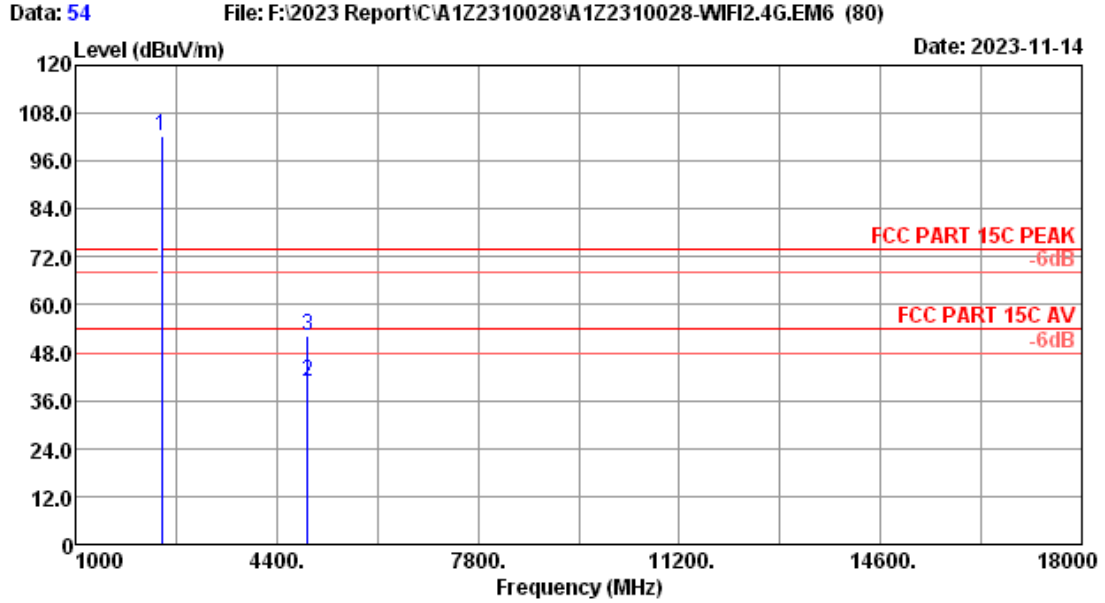


Site no. : 3m Chamber Data no. : 54  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11g 2462MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	2.87	103.65	32.18	102.14	-----	-----	Peak
2	4924.00	31.74	4.00	36.13	31.03	40.84	54.00	13.16	Average
3	4924.00	31.74	4.00	47.57	31.03	52.28	74.00	21.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

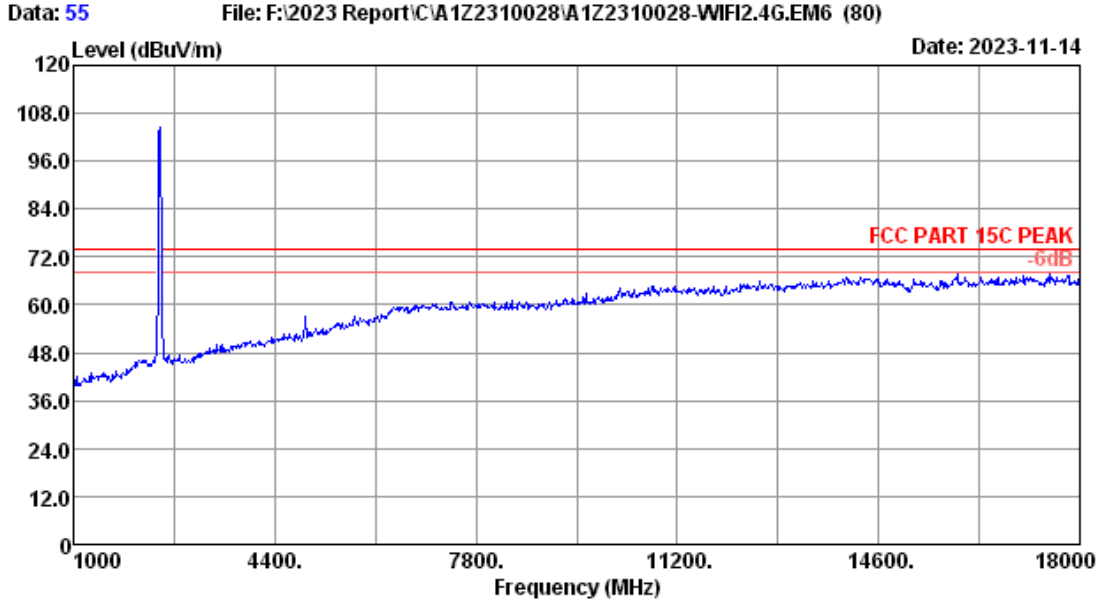


Site no.	: 3m Chamber	Data no.	: 55
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11g 2462MHz TX		

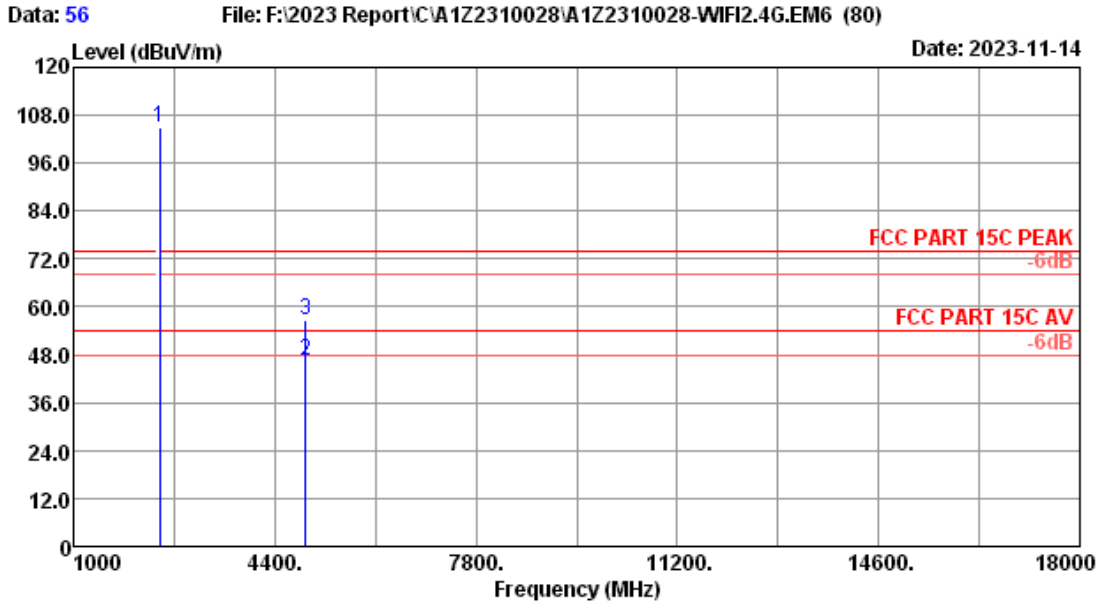


Site no. : 3m Chamber Data no. : 56  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11g 2462MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	2.87	106.25	32.18	104.74	-----	-----	Peak
2	4924.00	31.74	4.00	41.68	31.03	46.39	54.00	7.61	Average
3	4924.00	31.74	4.00	52.00	31.03	56.71	74.00	17.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

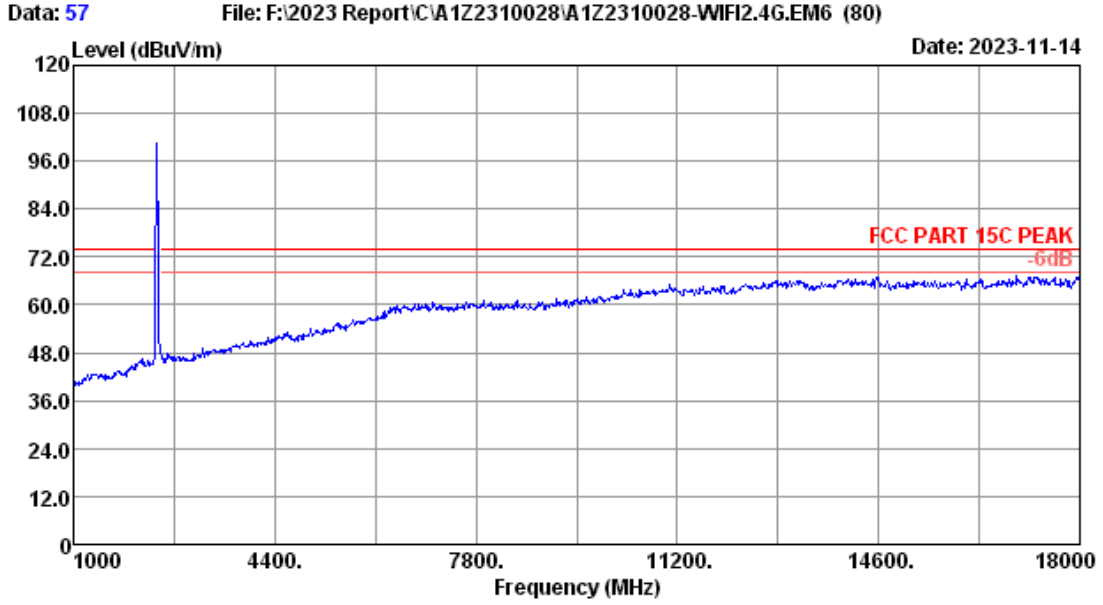

Site no.	: 3m Chamber	Data no.	: 57
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11n20 2412MHz TX		

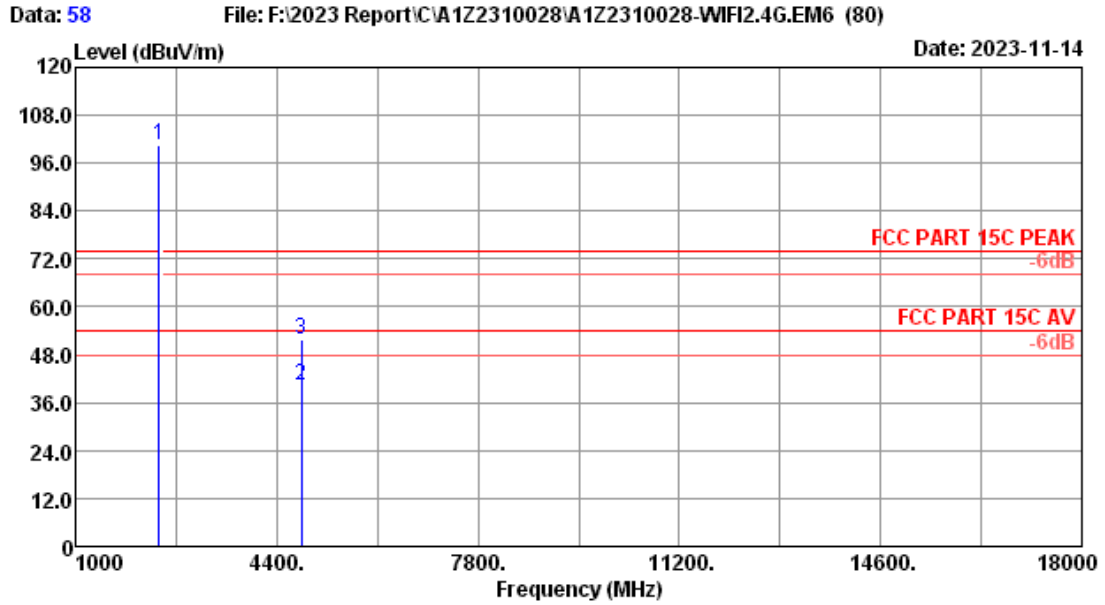


Site no. : 3m Chamber Data no. : 58  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11n20 2412MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.65	2.84	102.34	32.21	100.62	-----	-----	Peak
2	4824.00	31.20	3.96	36.09	31.07	40.18	54.00	13.82	Average
3	4824.00	31.20	3.96	47.72	31.07	51.81	74.00	22.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



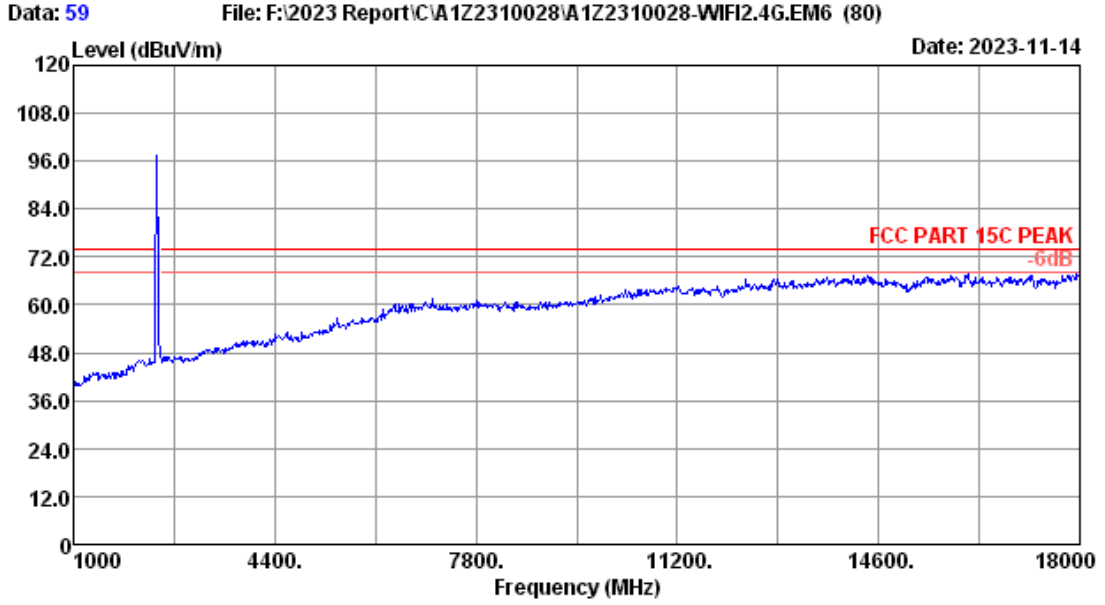


Site no.	: 3m Chamber	Data no.	: 59
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11n20 2412MHz TX		

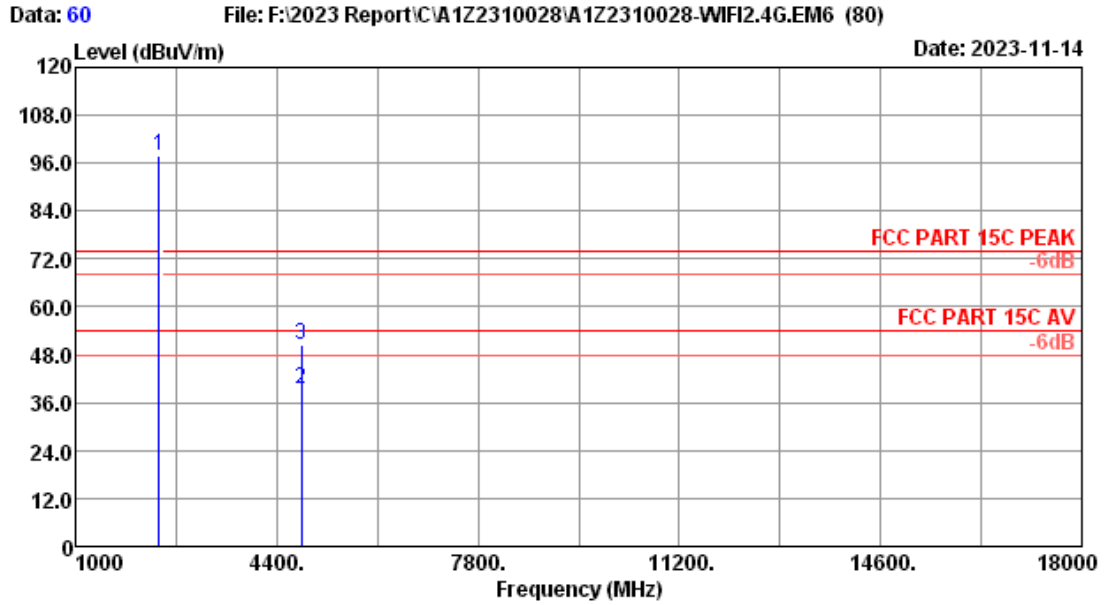


Site no. : 3m Chamber Data no. : 60  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11n20 2412MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.65	2.84	99.50	32.21	97.78	-----	-----	Peak
2	4824.00	31.20	3.96	35.26	31.07	39.35	54.00	14.65	Average
3	4824.00	31.20	3.96	46.28	31.07	50.37	74.00	23.63	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

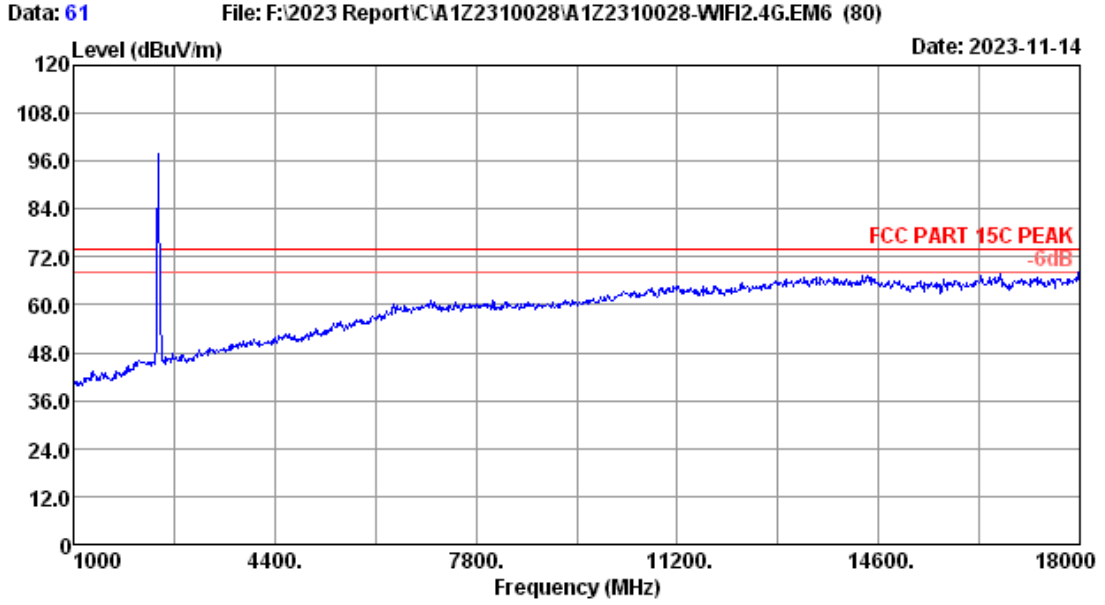


Site no.	: 3m Chamber	Data no.	: 61
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11n20 2437MHz TX		

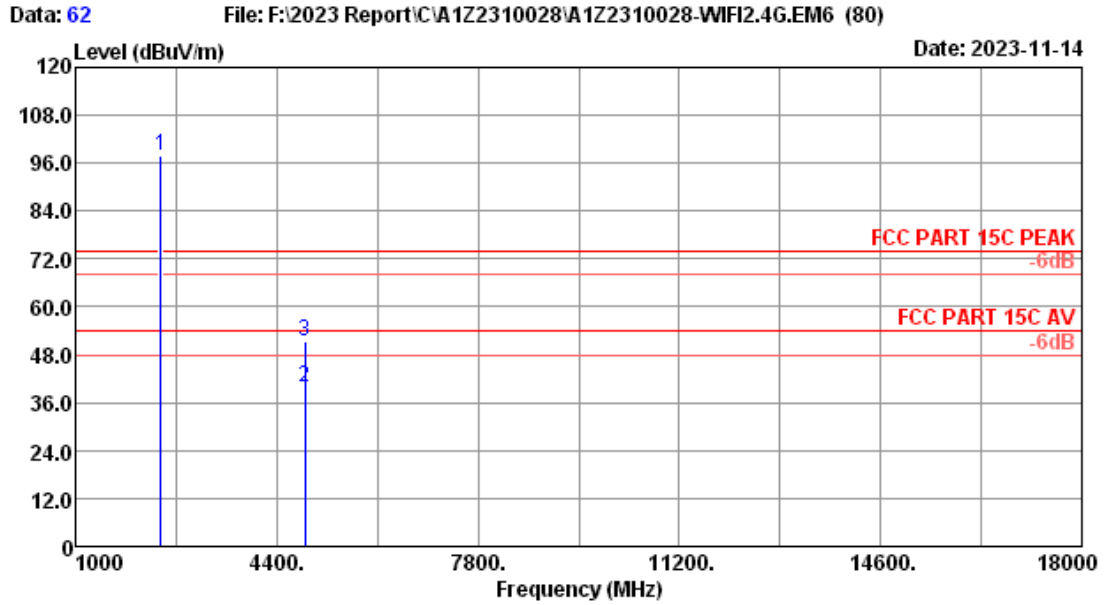


Site no. : 3m Chamber Data no. : 62  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11n20 2437MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.75	2.86	99.61	32.19	98.03	-----	-----	Peak
2	4874.00	31.39	3.98	35.67	31.05	39.99	54.00	14.01	Average
3	4874.00	31.39	3.98	46.91	31.05	51.23	74.00	22.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

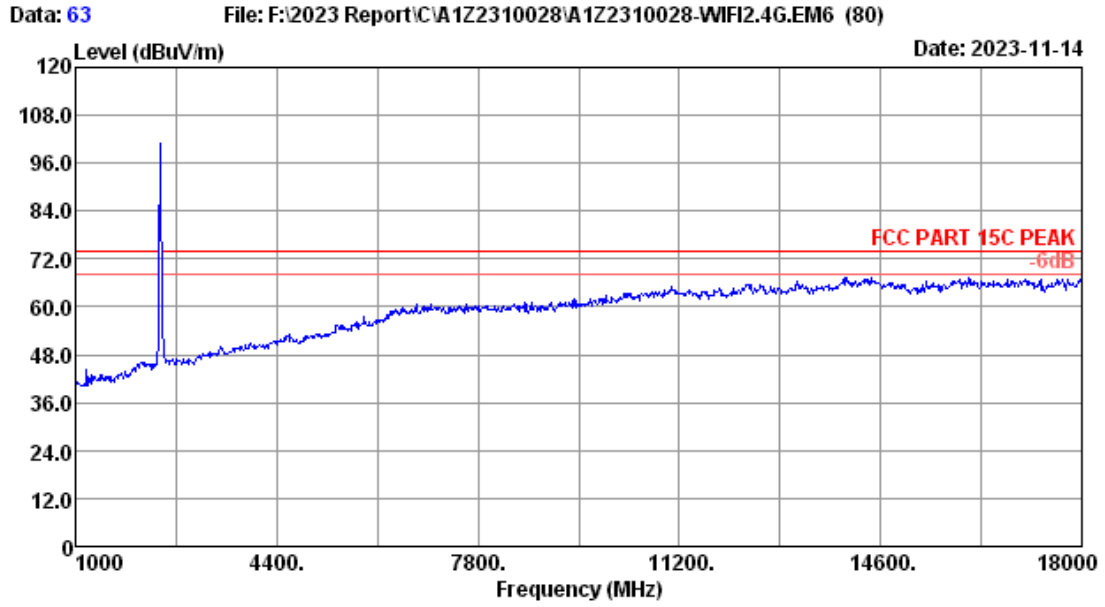


Site no.	: 3m Chamber	Data no.	: 63
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11n20 2437MHz TX		

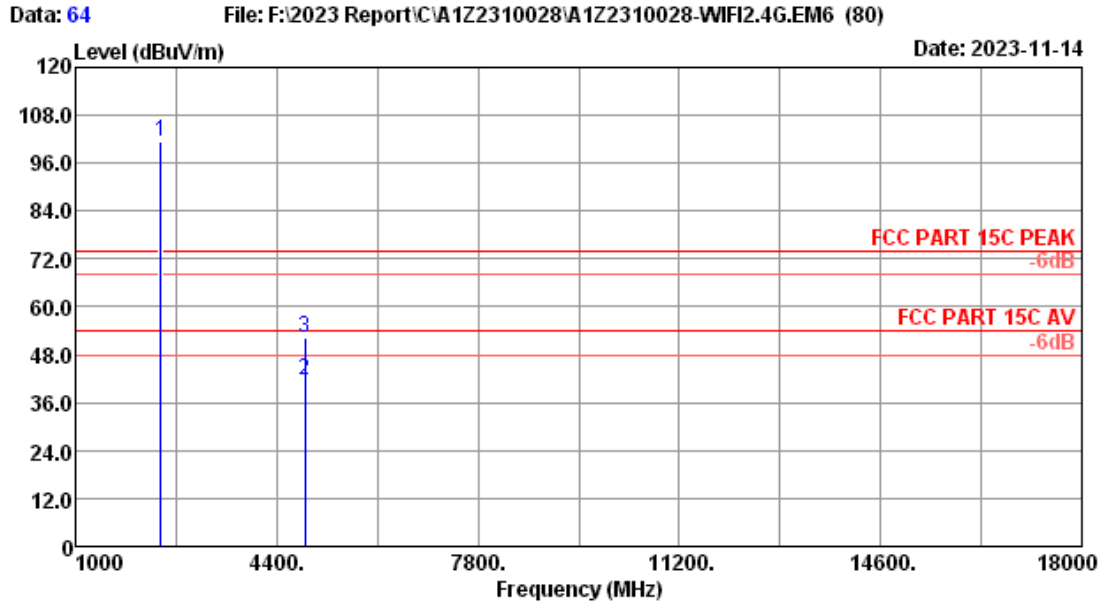


Site no. : 3m Chamber Data no. : 64  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11n20 2437MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.75	2.86	102.89	32.19	101.31	-----	-----	Peak
2	4874.00	31.39	3.98	37.29	31.05	41.61	54.00	12.39	Average
3	4874.00	31.39	3.98	48.07	31.05	52.39	74.00	21.61	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

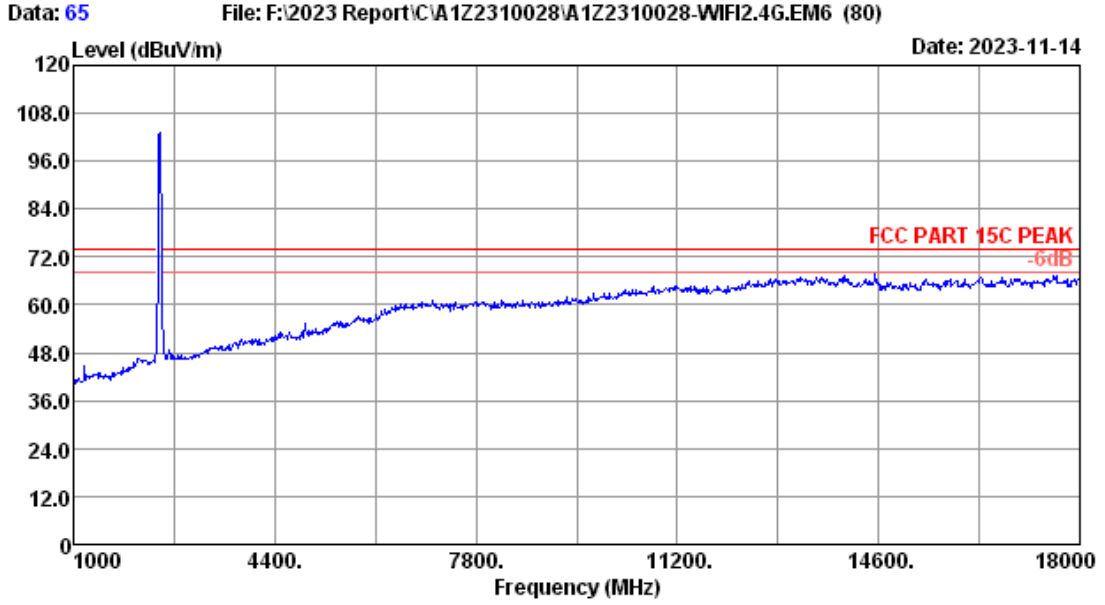

Site no.	: 3m Chamber	Data no.	: 65
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11n20 2462MHz TX		

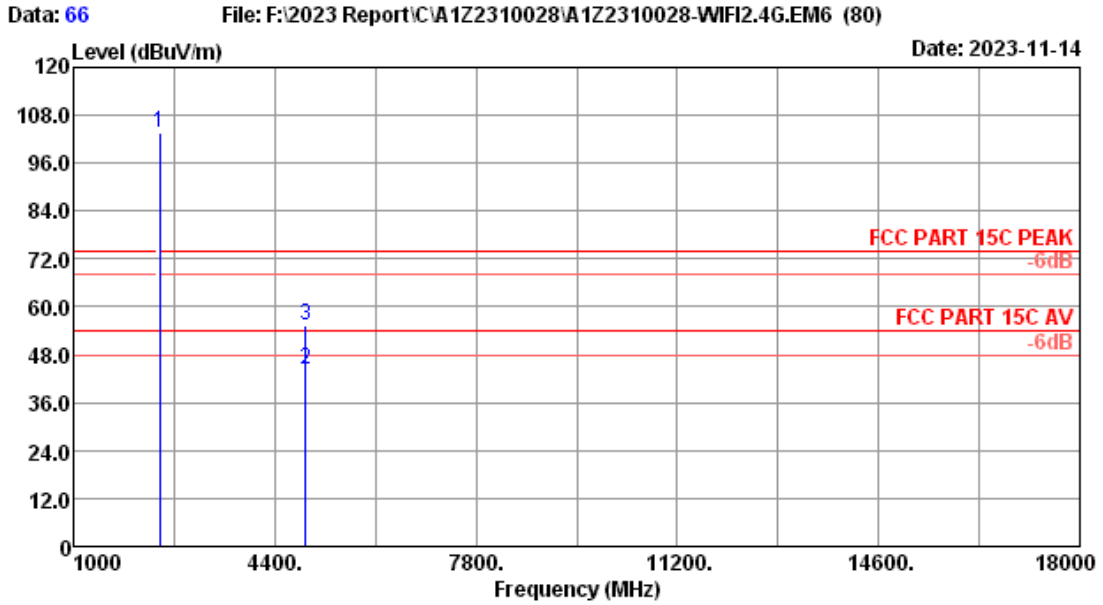


Site no. : 3m Chamber Data no. : 66  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11n20 2462MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	2.87	105.02	32.18	103.51	-----	-----	Peak
2	4924.00	31.74	4.00	39.49	31.03	44.20	54.00	9.80	Average
3	4924.00	31.74	4.00	50.56	31.03	55.27	74.00	18.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



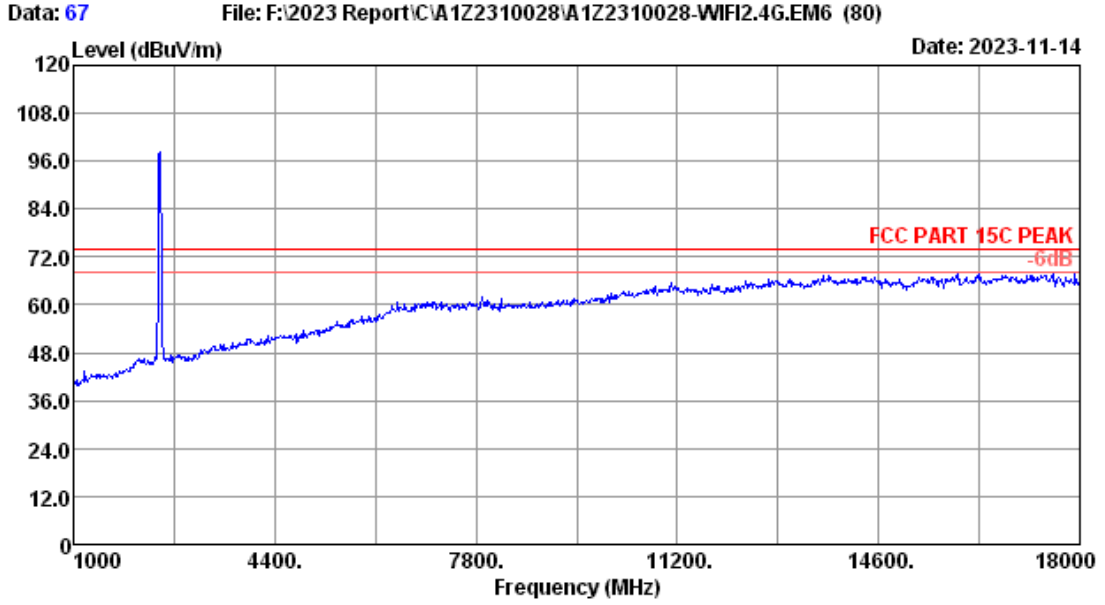


Site no.	: 3m Chamber	Data no.	: 67
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11n20 2462MHz TX		

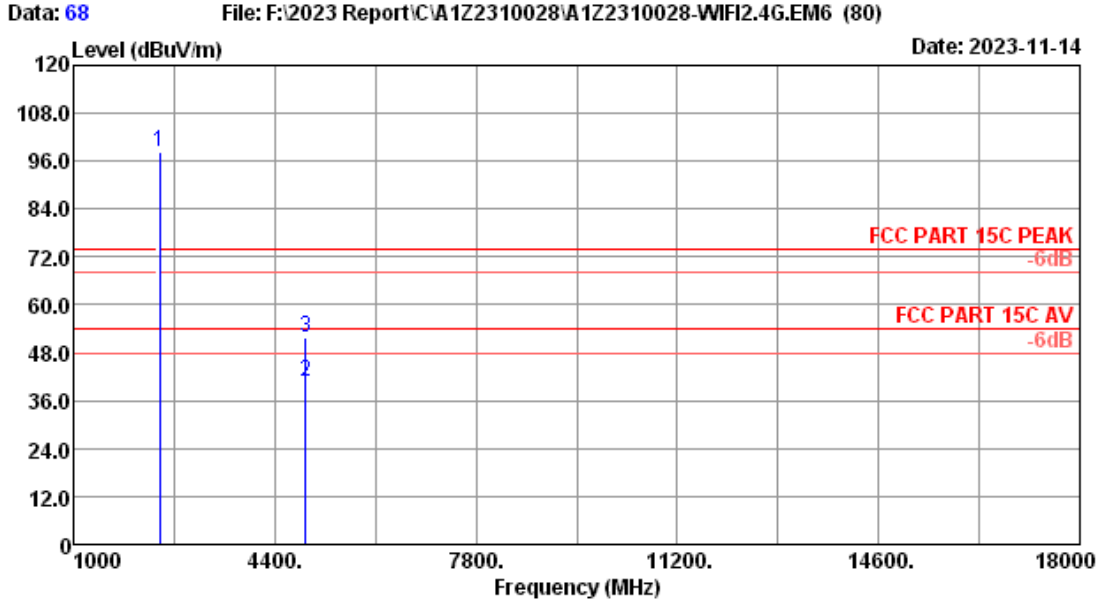


Site no. : 3m Chamber Data no. : 68  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11n20 2462MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	2.87	99.90	32.18	98.39	-----	-----	Peak
2	4924.00	31.74	4.00	36.17	31.03	40.88	54.00	13.12	Average
3	4924.00	31.74	4.00	47.04	31.03	51.75	74.00	22.25	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

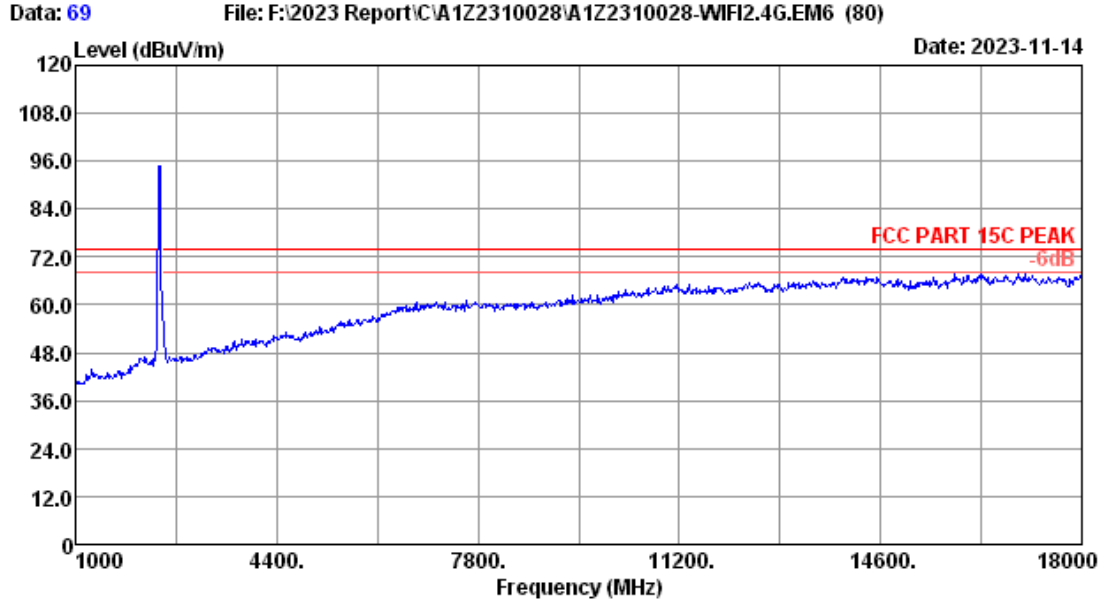


Site no.	: 3m Chamber	Data no.	: 69
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11n40 2422MHz TX		

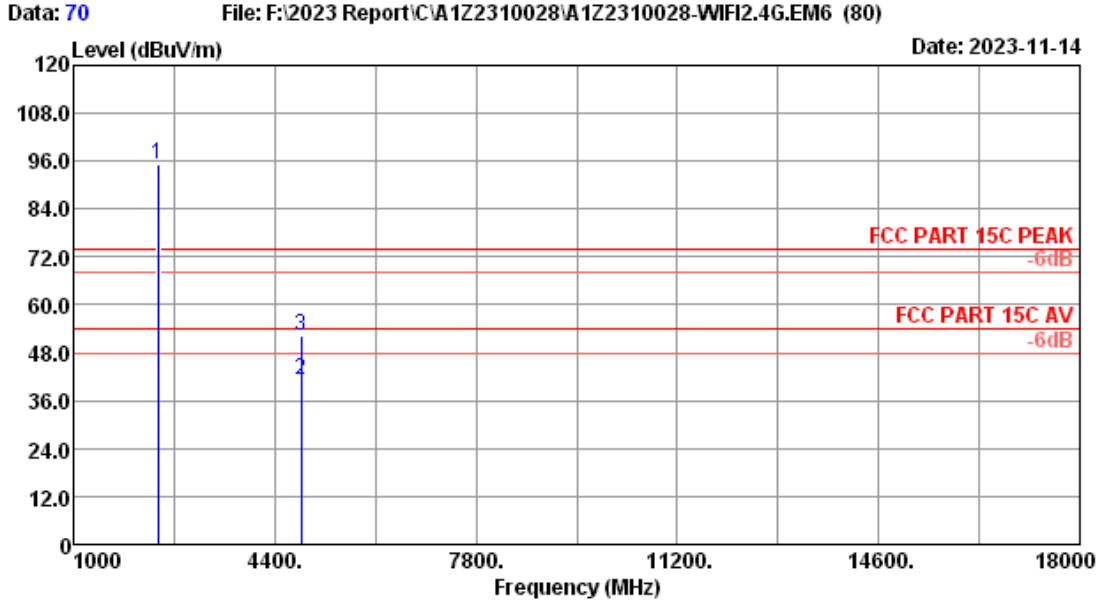


Site no. : 3m Chamber Data no. : 70  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11n40 2422MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.69	2.85	96.87	32.20	95.21	-----	-----	Peak
2	4844.00	31.20	3.97	37.13	31.06	41.24	54.00	12.76	Average
3	4844.00	31.20	3.97	48.15	31.06	52.26	74.00	21.74	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

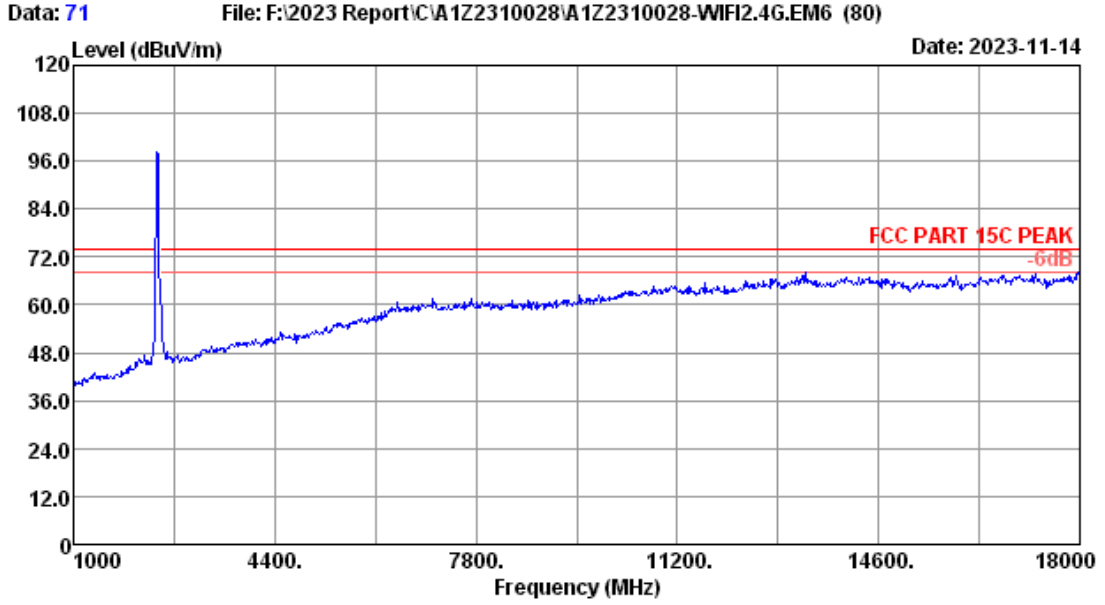


Site no.	: 3m Chamber	Data no.	: 71
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11n40 2422MHz TX		

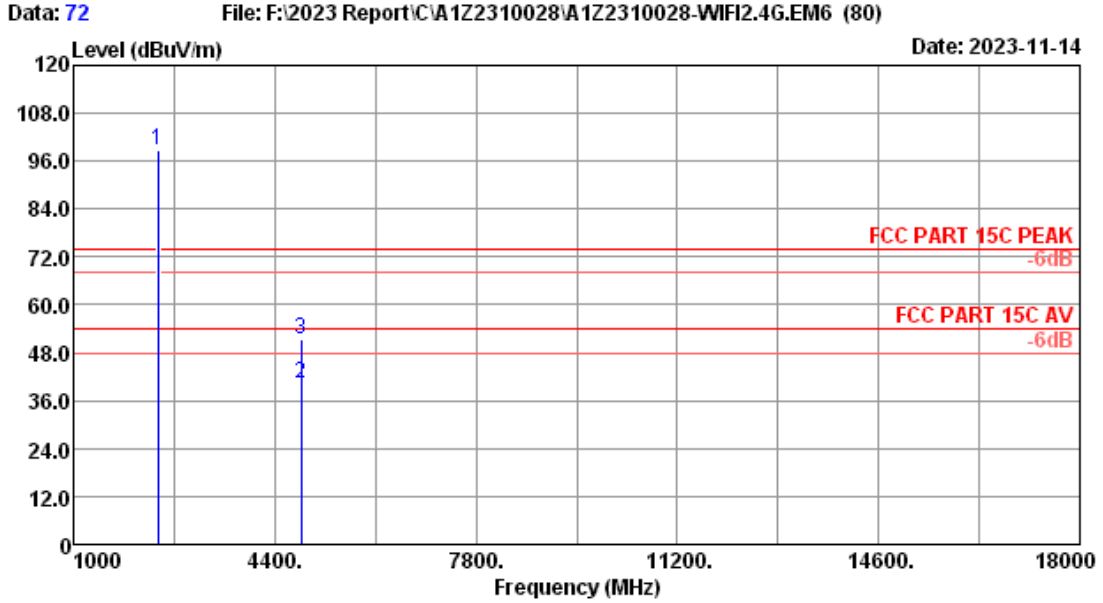


Site no. : 3m Chamber Data no. : 72  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11n40 2422MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.69	2.85	100.23	32.20	98.57	-----	-----	Peak
2	4844.00	31.20	3.97	36.27	31.06	40.38	54.00	13.62	Average
3	4844.00	31.20	3.97	47.22	31.06	51.33	74.00	22.67	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

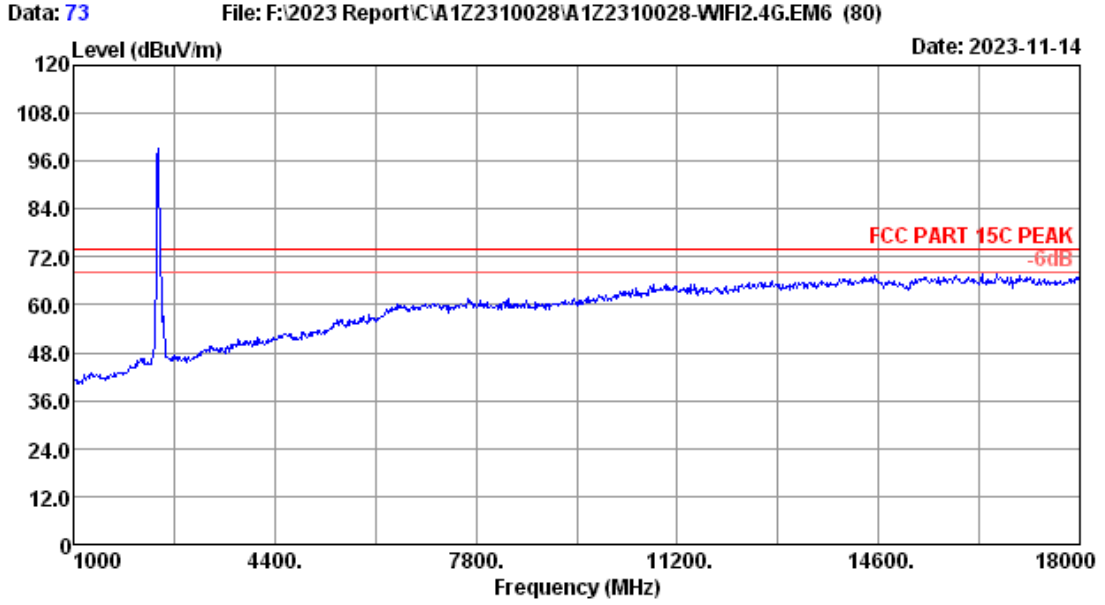

Site no.	: 3m Chamber	Data no.	: 73
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11n40 2437MHz TX		

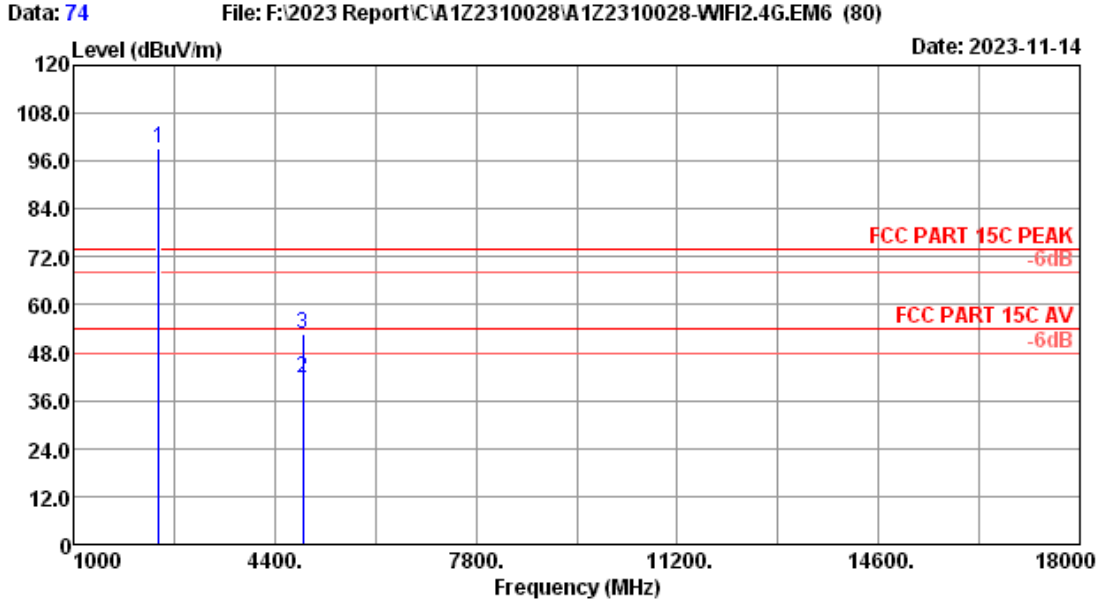


Site no. : 3m Chamber Data no. : 74  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11n40 2437MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.75	2.86	100.81	32.19	99.23	-----	-----	Peak
2	4874.00	31.39	3.98	37.29	31.05	41.61	54.00	12.39	Average
3	4874.00	31.39	3.98	48.46	31.05	52.78	74.00	21.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.



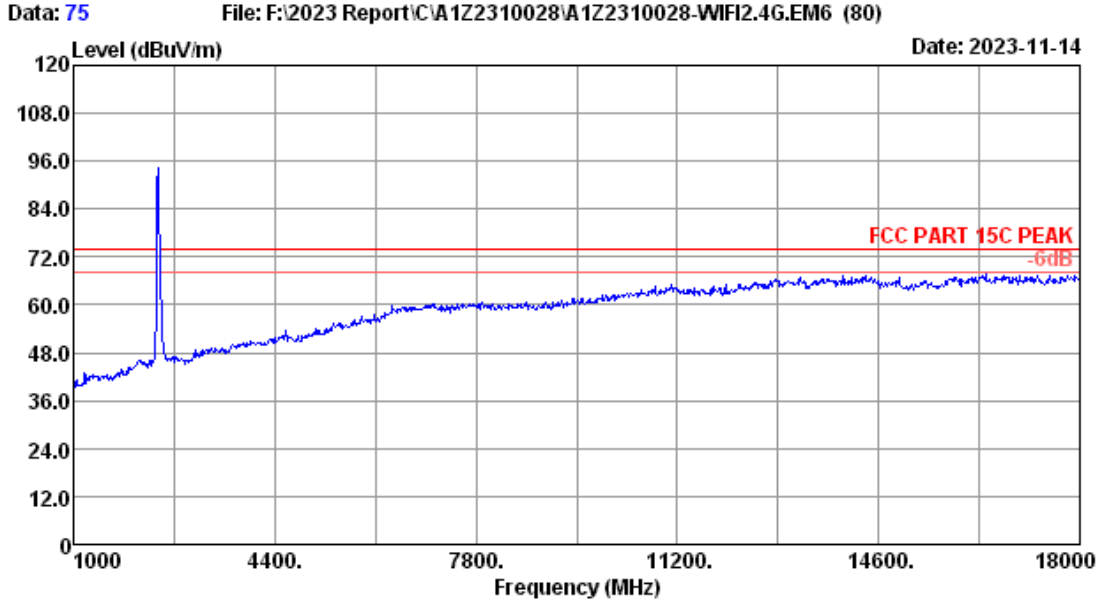


Site no.	: 3m Chamber	Data no.	: 75
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11n40 2437MHz TX		

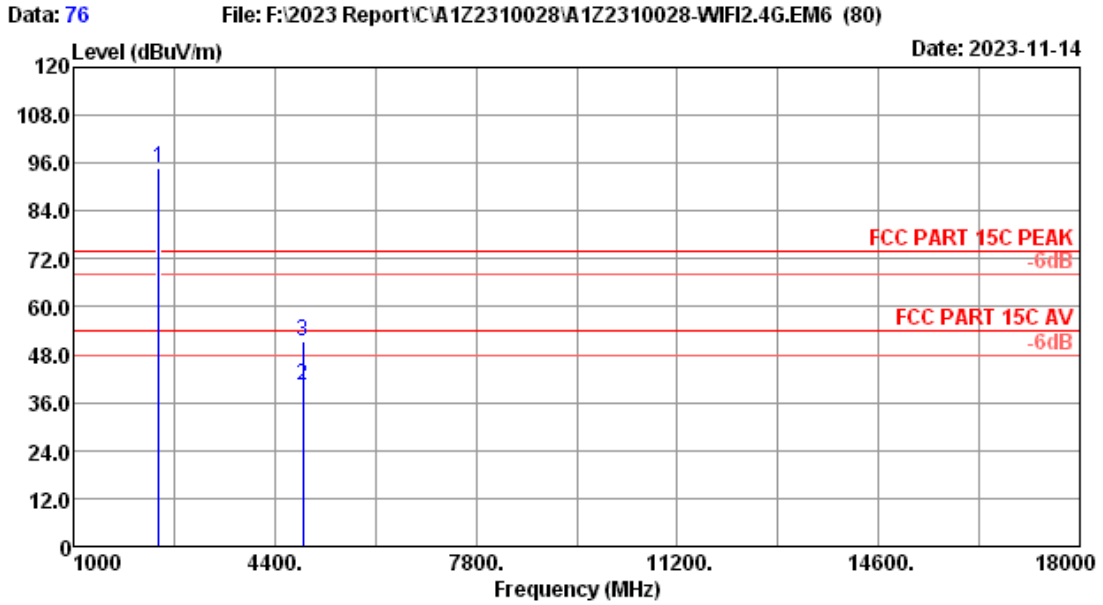


Site no. : 3m Chamber Data no. : 76  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11n40 2437MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.75	2.86	96.24	32.19	94.66	-----	-----	Peak
2	4874.00	31.39	3.98	36.11	31.05	40.43	54.00	13.57	Average
3	4874.00	31.39	3.98	47.05	31.05	51.37	74.00	22.63	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

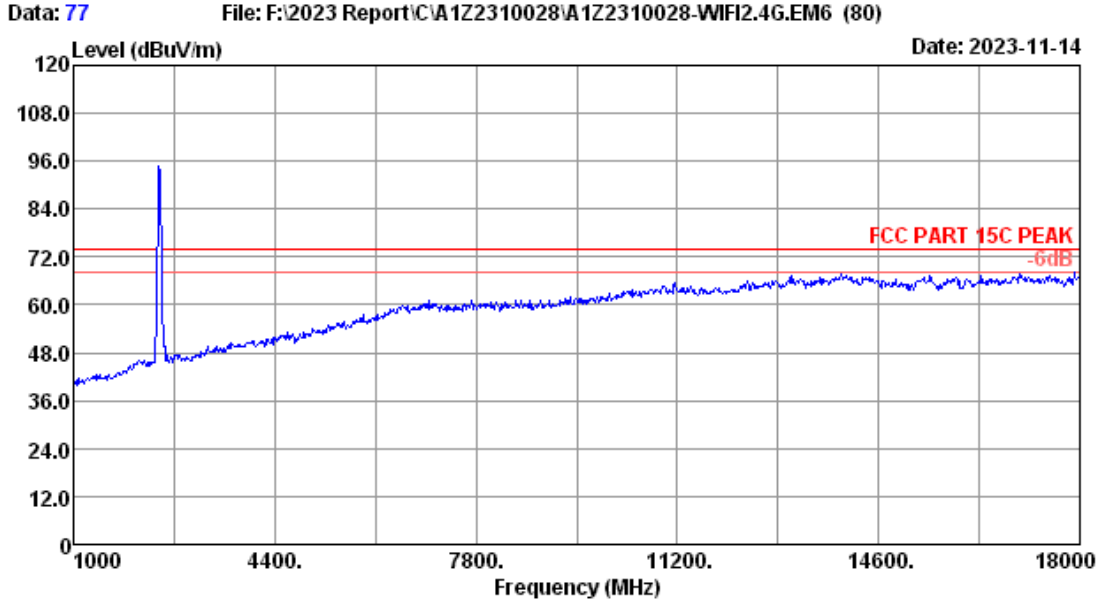


Site no.	: 3m Chamber	Data no.	: 77
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11n40 2452MHz TX		

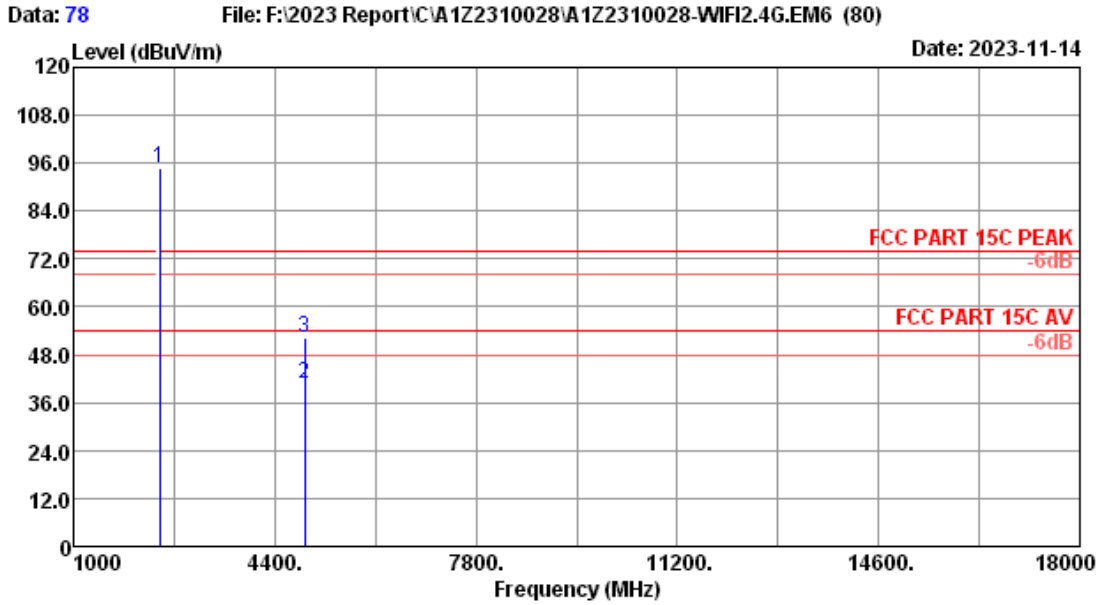


Site no. : 3m Chamber Data no. : 78  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11n40 2452MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	27.80	2.86	96.44	32.18	94.92	-----	-----	Peak
2	4904.00	31.62	3.99	36.24	31.04	40.81	54.00	13.19	Average
3	4904.00	31.62	3.99	47.83	31.04	52.40	74.00	21.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

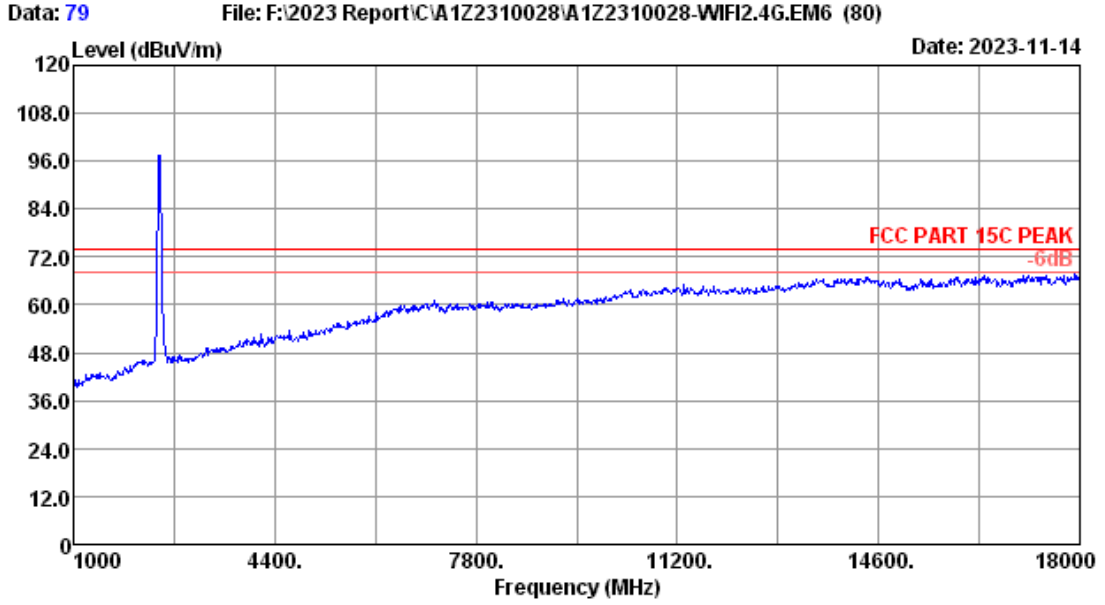

Site no.	: 3m Chamber	Data no.	: 79
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 20.2°C/52.1%	Engineer	: nier
Test Mode	: WIFI 2.4G 11n40 2452MHz TX		

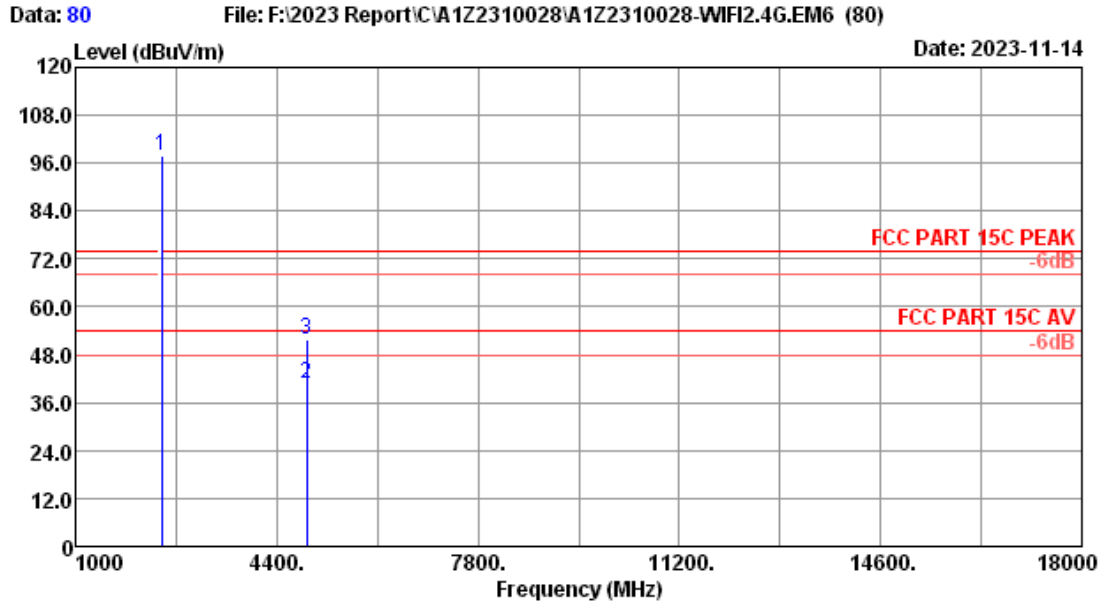

Site no. : 3m Chamber Data no. : 80  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 20.2°C/52.1% Engineer : nier  
 Test Mode : WIFI 2.4G 11n40 2452MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	27.80	2.86	99.37	32.18	97.85	-----	-----	Peak
2	4904.00	31.62	3.99	36.18	31.04	40.75	54.00	13.25	Average
3	4904.00	31.62	3.99	47.27	31.04	51.84	74.00	22.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 5. CONDUCTED SPURIOUS EMISSIONS

### 5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Apr.01,23	1 Year
2.	RF Cable	HUBER+SUHNER	SUCOFLEX-106	505238/6	Apr.02,23	1 Year

### 5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

### 5.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions with peak detector.

### 5.4. Test result




**PASS** (The testing data was attached in the next pages.)

EUT: Wi-Fi Module		
M/N: U9W44		
Test date: 2023-11-21~22	Pressure: 103.1±1.0 kpa	Humidity: 51.5±3.0%
Tested by: lili	Test site: RF site	Temperature: 22.5±0.6 °C



**ANTA**

Test Mode: IEEE 802.11b

Test CH1: 2412MHz



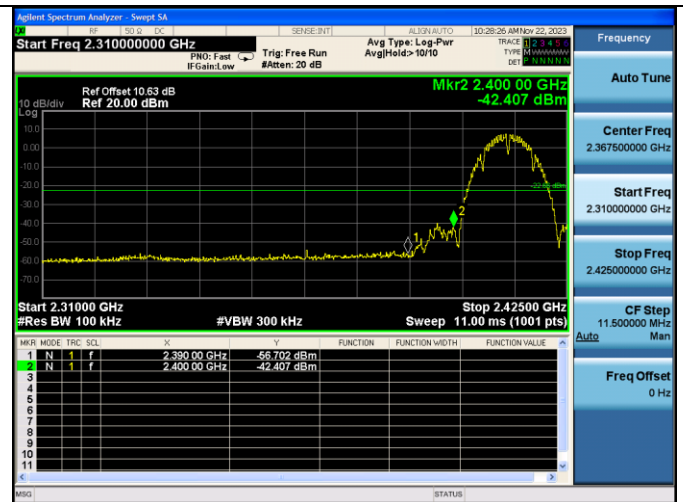
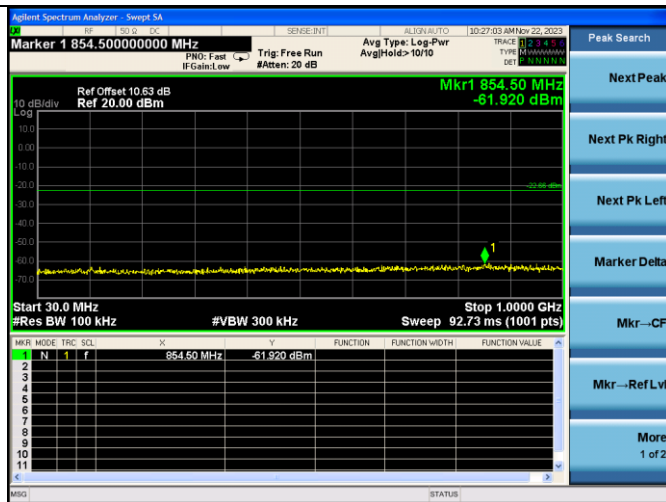
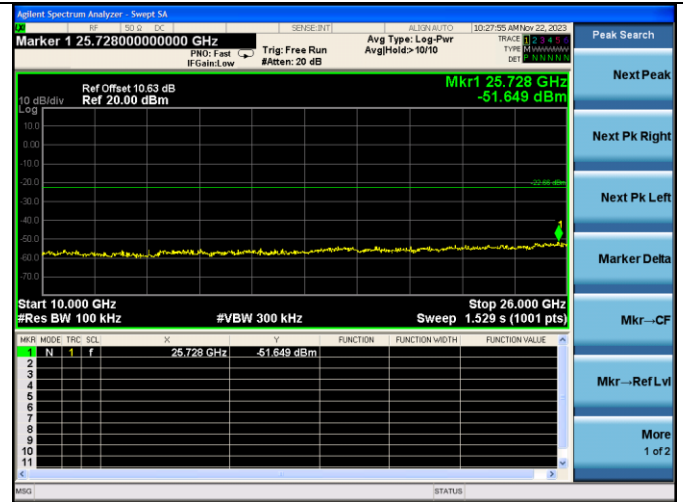





**Test CH6: 2437MHz**

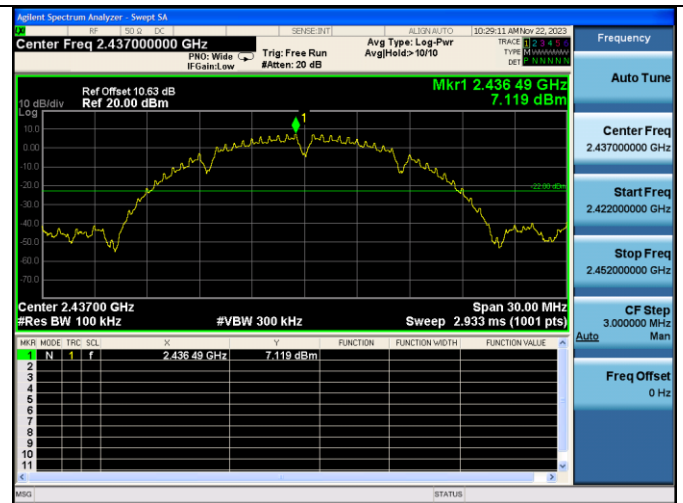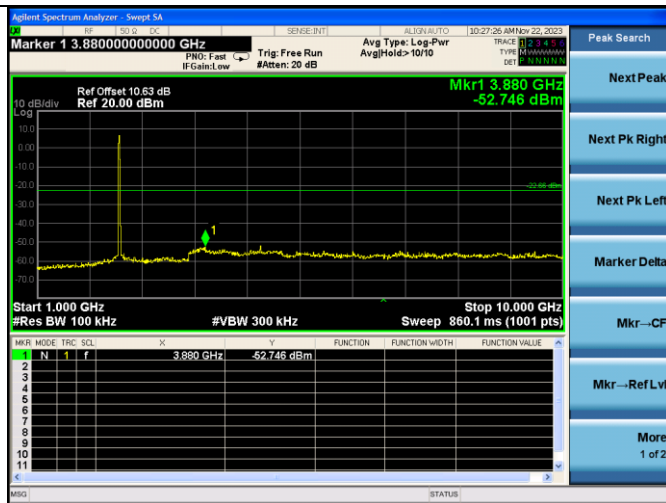







Test CH11: 2462MHz

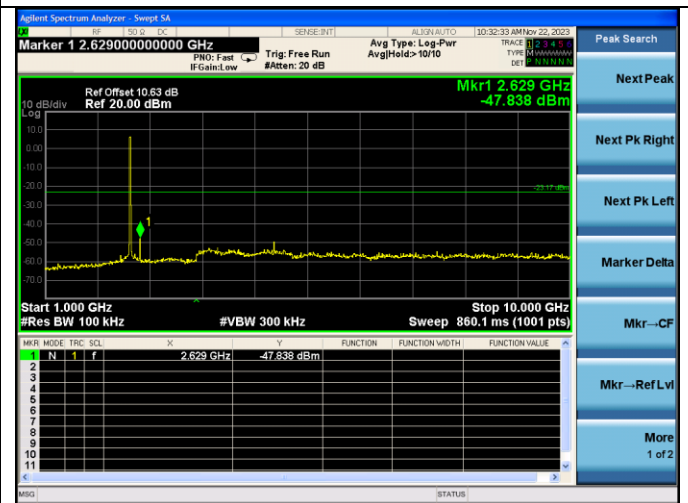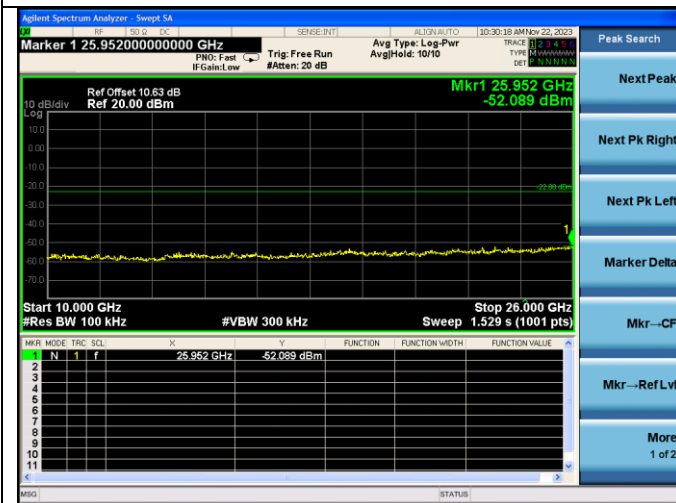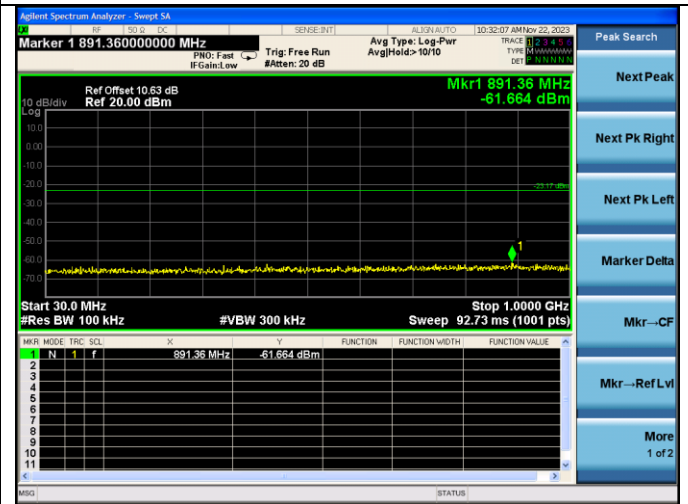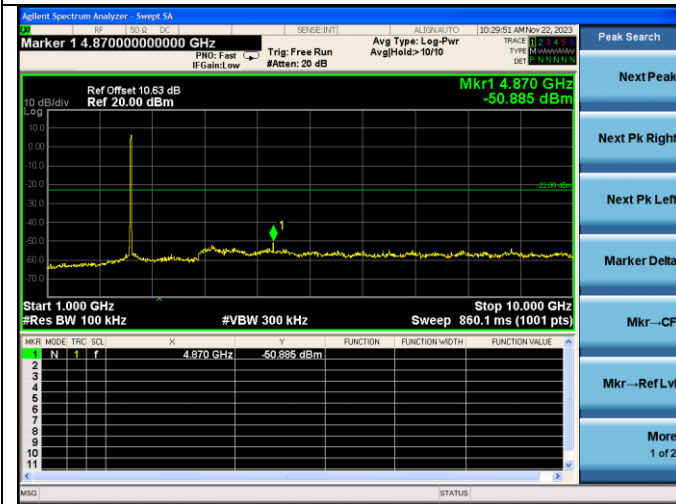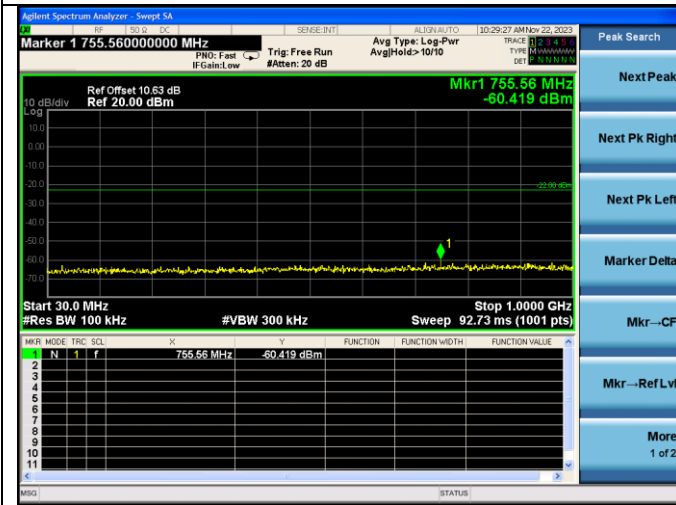

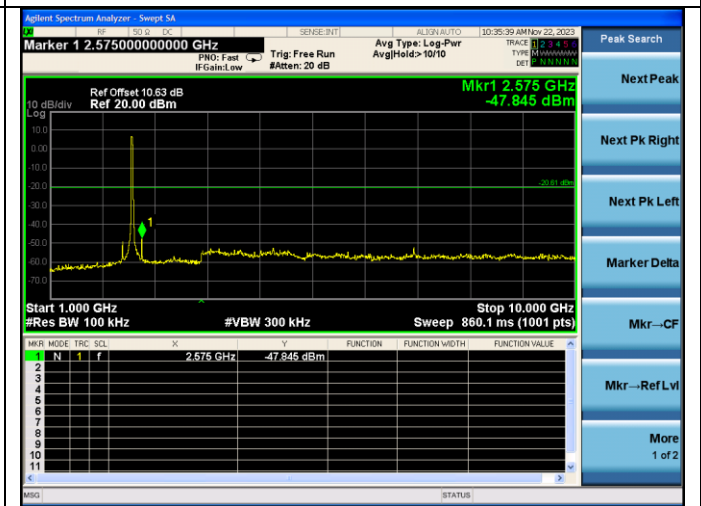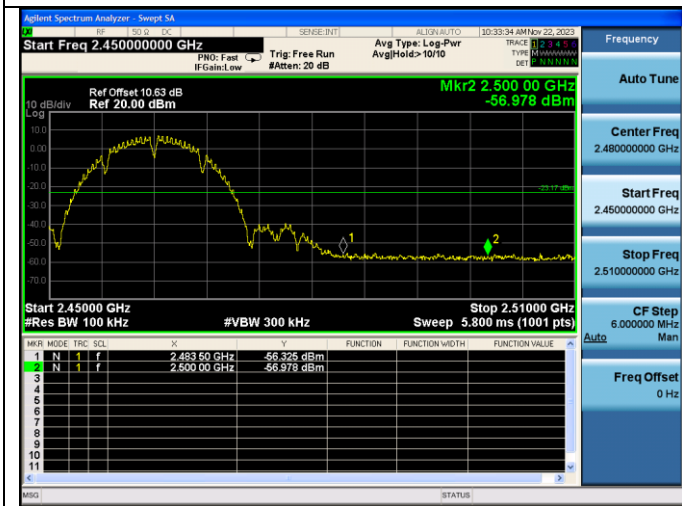
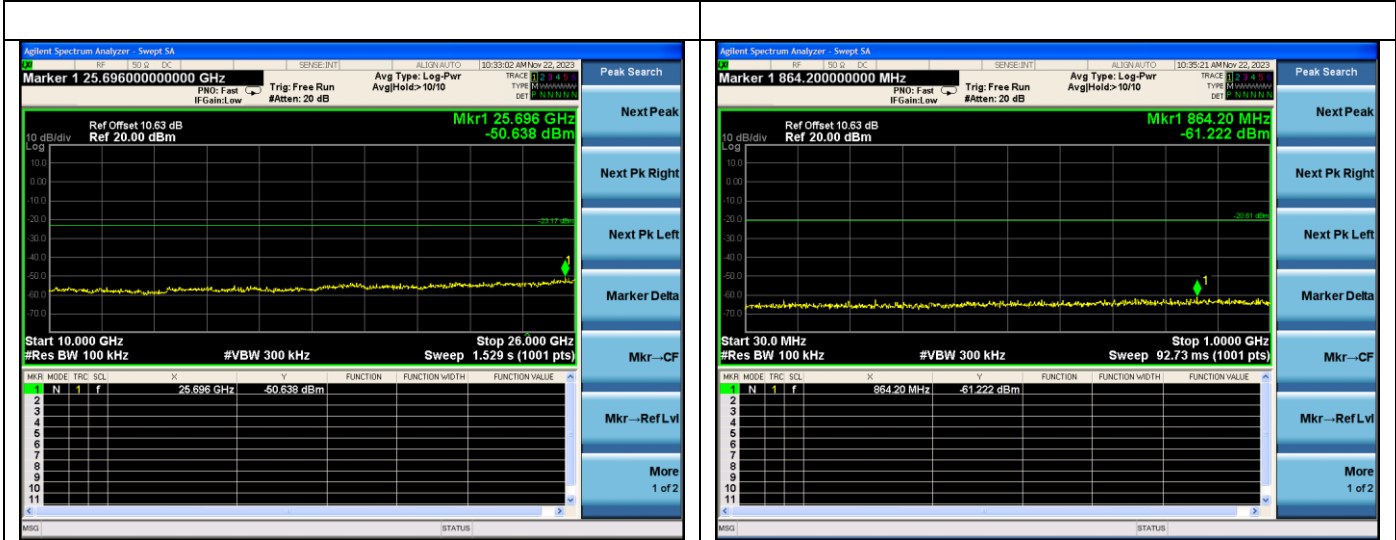


Test Mode: IEEE 802.11g  
 Test CH1: 2412MHz

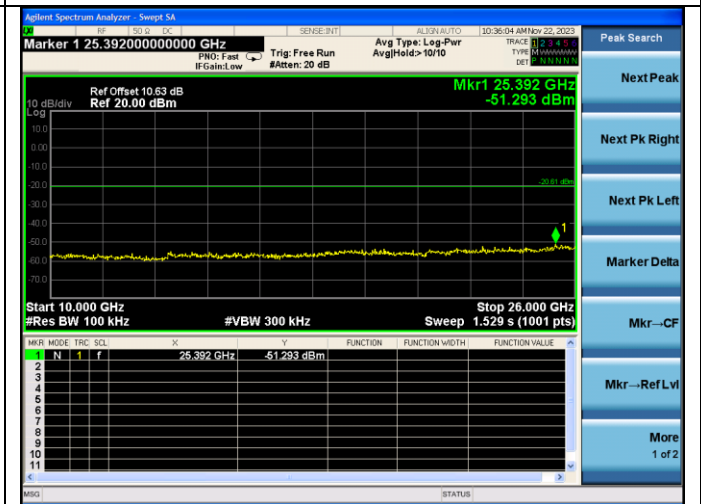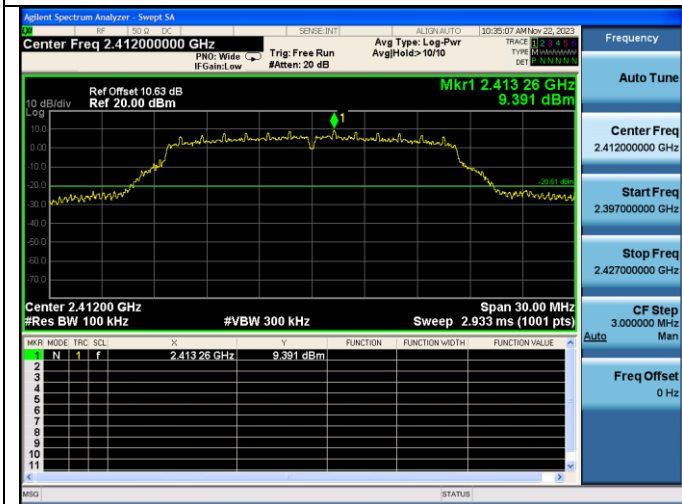


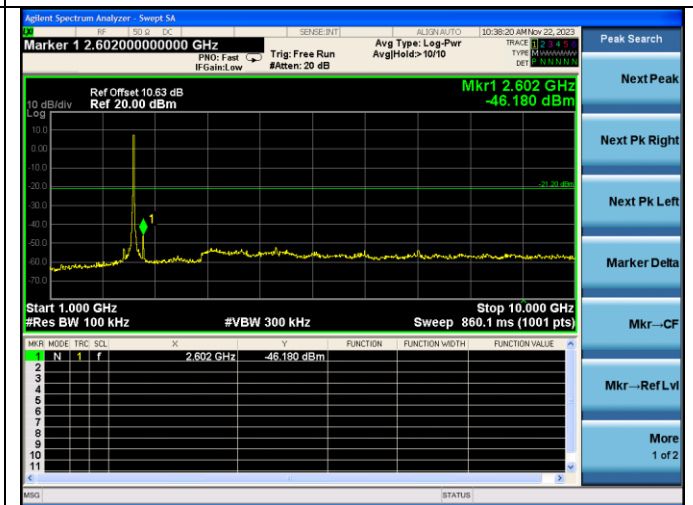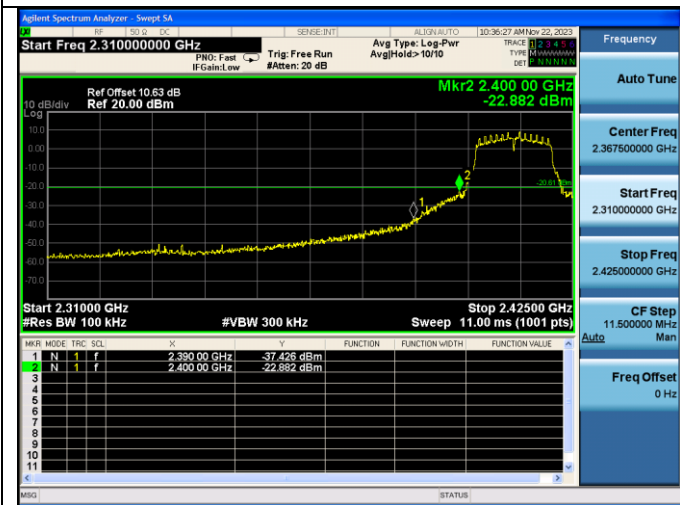


Test CH6: 2437MHz

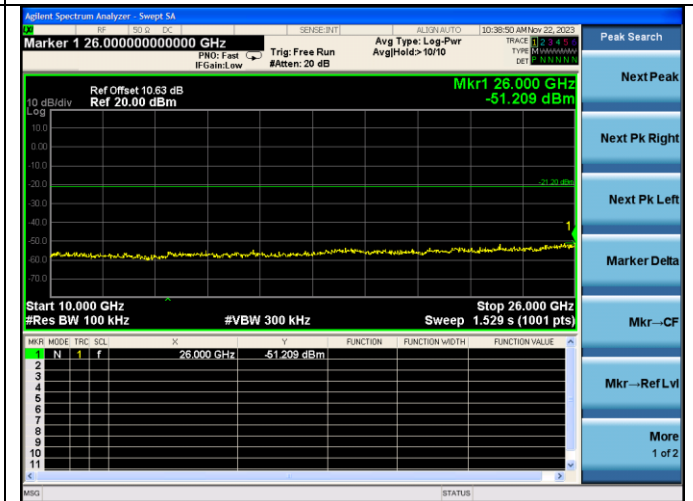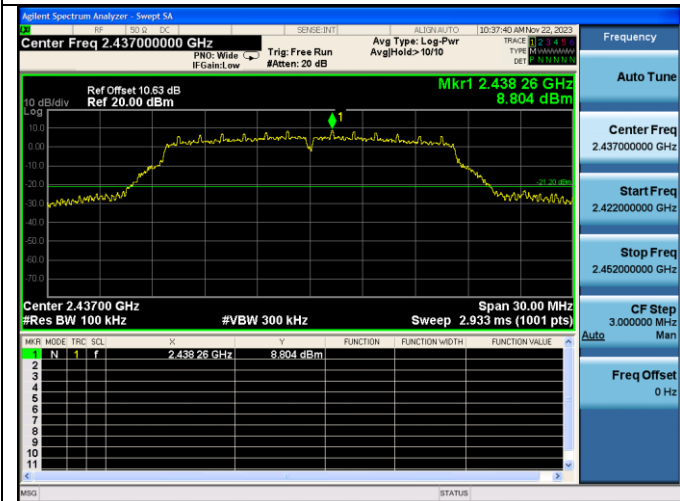

Test CH11: 2462MHz

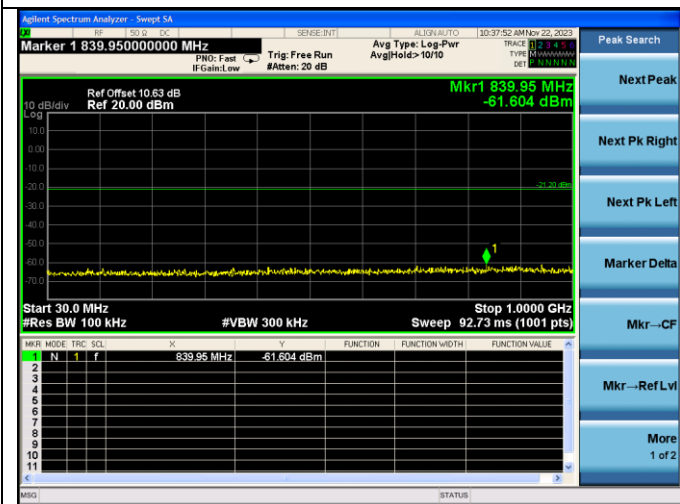

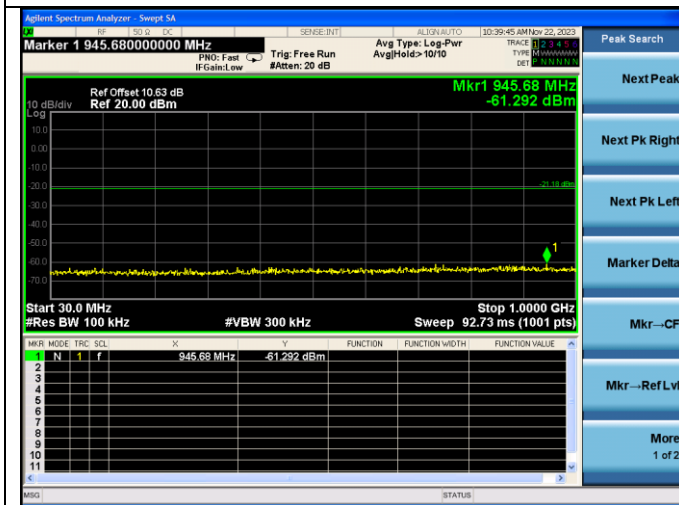

Test Mode: IEEE 802.11n HT20  
Test CH1: 2412MHz

