

Report No. : BLA-EMC-201911-A11-01

FCC Report (Bluetooth)

Product Name : Car Stereo

Trade mark : N/A

Model No. : 7018B, 7010B, 7012B, 7023B, 7028B, S5, S6,

S7, S8, S9, X5, X6, X7, X8, X9, L5, L6, L7, L8,

L9, A5, A6, A7, A8, A9

FCC ID : 2AU3W-7018B

Report Number : BLA-EMC-201911-A11-01

Date of sample receipt : November 06, 2019

Date of Test : November 06, 2019- December 9, 2019

Date of Issue : December 10, 2019

Test standard : FCC CFR Title 47 Part 15 Subpart C Section

15.247

Test result : PASS

Prepared for:

Shenzhen Xinlufeng Electronics Technology Co.,Ltd
1st Floor, Building 32, Shahe Industrial Zone, Shahe Street, Nanshan
District, Shenzhen

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.
IOT Test Centre of BlueAsia
No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen,
China

TEL: +86-755-28682673

FAX: +86-755-28682673

Compiled by:

20150n

Review by:

Sweet ling

Approved by:

Emen 1

Date: December 10, 201



Report No. : BLA-EMC-201911-A11-01 Page 2 of 45

2 Version

Version No.	Date	Description
00	December 10, 2019	Original



IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01

Page 3 of 45

3 Contents

			Page
1	CO	VER PAGE	1
2	VEF	RSION	2
3	CO	NTENTS	3
4		ST SUMMARY	
- 5		NERAL INFORMATION	
Э			
	5.1	GENERAL DESCRIPTION OF EUT	
	5.2	TEST MODE	
	5.3	TEST FACILITY	
	5.4	TEST LOCATION	
	5.5 5.6	OTHER INFORMATION REQUESTED BY THE CUSTOMER DESCRIPTION OF SUPPORT UNITS	
6	TES	ST INSTRUMENTS LIST	8
7	TES	ST RESULTS AND MEASUREMENT DATA	10
		ANTENNA REQUIREMENT	
	7.1 7.2	CONDUCTED EMISSIONS	
	7.2 7.3	CONDUCTED EMISSIONS	
	7.3 7.4	20DB EMISSION BANDWIDTH	
	7.4 7.5	CARRIER FREQUENCIES SEPARATION	
	7.5 7.6	HOPPING CHANNEL NUMBER	
	7.0 7.7	DWELL TIME	
	7.8	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	
	7.9	BAND EDGE	
	7.9.		
	7.9.		
	7.10	Spurious Emission	
	7.10	0.1 Conducted Emission Method	
	7.10		
8	TES	ST SETUP PHOTO	39
9	FUT	CONSTRUCTIONAL DETAILS	40

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No. : BLA-EMC-201911-A11-01 Page 4 of 45

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	N/A
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according ANSI C63.10:2013

Measurement Uncertainty

Frequency Range	Measurement Uncertainty	Notes
9kHz ~ 30MHz	± 4.34dB	(1)
30MHz ~ 1000MHz	± 4.24dB	(1)
1GHz ~ 26.5GHz	± 4.68dB	(1)
0.15MHz ~ 30MHz	± 3.45dB	(1)
	9kHz ~ 30MHz 30MHz ~ 1000MHz 1GHz ~ 26.5GHz	9kHz ~ 30MHz

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 5 of 45

5 General Information

5.1 General Description of EUT

Product Name:	Car Stereo		
Model No.:	7018B, 7010B, 7012B, 7023B, 7028B, S5, S6, S7, S8, S9, X5, X6, X7 X8, X9, L5, L6, L7, L8, L9, A5, A6, A7, A8, A9		
Test Model No.:	7018B		
Remark: All above models are identical in the same PCB layout, interior structure and ele The differences are model name for commercial purpose.			
Serial No.:	N/A		
Sample(s) Status	Engineer sample		
Hardware:	V1.1A		
Software:	V2.0		
Operation Frequency:	2402MHz-2480MHz		
Channel numbers:	79		
Channel separation:	1MHz		
Modulation type:	GFSK, π/4-DQPSK		
Antenna Type:	PCB Antenna		
Antenna gain:	-0.58dBi		
Power supply:	DC 12V		

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 6 of 45

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No. : BLA-EMC-201911-A11-01 Page 7 of 45

5.2 Test mode

Transmitting mode Keep the EUT in continuously transmitting mode。

Remark: During the test,DC12V Full battery is used.

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• FCC — Designation No.: CN1252

BlueAsia of Technical Services(Shenzhen) Co., Ltd has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Designation CN1252.

•ISED — CAB identifier No.: CN0028

BlueAsia of Technical Services(Shenzhen) Co., Ltd has been registered by Certification and Engineering Bureau of ISED for radio equipment testing with CAB identifier CN0028

5.4 Test Location

All tests were performed at:

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

5.5 Other Information Requested by the Customer

None

5.6 Description of Support Units

Manufacturer	Description	Model	Serial Number

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 8 of 45

6 Test Instruments list

Radi	Radiated Emission:					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m SAC	SKET	9m*6 m*6m	966	06-10-2018	06-09-2023
2	Broadband Antenna	SCHWARZBECK	VULB9168	00836 P:00227	07-14-2018	07-13-2019
3	Horn Antenna	SCHWARZBECK	9120D	01892 P:00331	07-14-2018	07-13-2019
4	EMI Test Software	EZ	EZ	N/A	N/A	N/A
5	Pre-amplifier	SKET	N/A	N/A	07-19-2018	07-18-2019
6	Spectrum analyzer	Rohde & Schwarz	FSP40	100817	05-24-2018	05-23-2019
7	EMI Test Receiver	Rohde & Schwarz	ESR7	101199	03-21-2018	03-20-2019
8	Controller	SKET	N/A	N/A	N/A	N/A
9	Vector Signal Generator	Agilent	E4438C	MY45092582	05-24-2018	05-23-2019
10	Signal Generator	Agilent	E8257D	MY44320250	05-24-2018	05-23-2019
11	Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
12	Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
13	Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 9 of 45

Conduc	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	EMI Test Receiver	Rohde & Schwarz	ESPI3	101082	06-10-2018	06-09-2019	
2	LISN	CHASE	MN2050D	1447	12-18-2018	12-17-2019	
3	LISN	Rohde & Schwarz	ENV216	3560.6550.15	07-19-2018	07-18-2019	
4	EMI Test Software	EZ	EZ	N/A	N/A	N/A	
5	Temperature Humidity Chamber	Mingle	TH101B	N/A	07-19-2018	07-18-2019	
6	Coaxial Cable	BlueAsia	BLA-XC-05	N/A	N/A	N/A	

RF Con	RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	Spectrum Analyzer	Agilent	N9030A	MY50510123	05-24-2018	05-23-2019	
2	Spectrum analyzer	Rohde & Schwarz	FSP40	100817	05-24-2018	05-23-2019	
3	Vector Signal Generator	Agilent	E4438C	MY45092582	05-24-2018	05-23-2019	
4	Signal Generator	Agilent	E8257D	MY44320250	05-24-2018	05-23-2019	
5	Power Sensor	D.A.R.E	RPR3006W	17I00015SNO27	05-24-2018	05-23-2019	
6	Power Sensor	D.A.R.E	RPR3006W	17I00015SNO28	05-24-2018	05-23-2019	
7	DC Power Supply	LODESTAR	LP305DE	N/A	07-19-2018	07-18-2019	
8	Temperature Humidity Chamber	Mingle	TH101B	N/A	07-19-2018	07-18-2019	

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 10 of 45

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The antenna is PCB antenna, the best case gain of the antenna is -0.58.0dBi



BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No. : BLA-EMC-201911-A11-01 Page 11 of 45

7.2 Conducted Emissions

FCC Part15 C Section 15.207					
ANSI C63.10:2013					
150KHz to 30MHz					
Class B					
RBW=9KHz, VBW=30KHz, St	weep time=auto				
Frequency range (MHz) Limit (dBuV) Quasi-peak Average 0.15-0.5 66 to 56* 56 to 46*					
5-30	60 50				
* Decreases with the logarithn	n of the frequency.				
Reference Plane LISN 40cm 80cm Filter AC power Equipment E.U.T Test table/Insulation plane Remark E.U.T. Equipment Under Test LISN Line Impedence Stabilization Network Test table New Office Stabilization Network					
 The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 					
Refer to section 6.0 for details					
Refer to section 5.2 for details					
N/A					
	ANSI C63.10:2013 150KHz to 30MHz Class B RBW=9KHz, VBW=30KHz, Standard S				

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No. : BLA-EMC-201911-A11-01 Page 12 of 45

7.3 Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)	
Test Method:	ANSI C63.10:2013	
Limit:	21dBm	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 6.0 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

Measurement Data

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
	Lowest	-7.59		
GFSK	Middle	-7.32	21.00	Pass
	Highest	-7.65		
	Lowest	-6.61		
Pi/4QPSK	Middle	-6.33	21.00	Pass
	Highest	-6.58		

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China




Report No.: BLA-EMC-201911-A11-01

Page 13 of 45

Test plot as follows:

Test mode: GFSK mode




Date: 5.DEC.2019 15:20:18

Lowest channel



Date: 5.DEC.2019 15:25:03

Middle channel



Date: 5.DEC.2019 15:26:50

Highest channel

BlueAsia of Technical Services(Shenzhen) Co., Ltd.


IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China




Report No.: BLA-EMC-201911-A11-01 Page 14 of 45

Test mode: Pi/4QPSK mode




Date: 4.DEC.2019 17:00:41

Lowest channel



Date: 4.DEC.2019 17:01:40

Middle channel



Highest channel

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Date: 4.DEC.2019 17:02:22



Report No.: BLA-EMC-201911-A11-01 Page 15 of 45

7.4 20dB Emission Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)	
Test Method:	ANSI C63.10:2013	
Limit:	N/A	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 6.0 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

Measurement Data

Test channel	20dB Emission Bandwidth (MHz)	Result
Lowest	0.852	
Middle	0.856	Pass
Highest	0.844	
Lowest	1.218	
Middle	1.218	Pass
Highest	1.218	
	Lowest Middle Highest Lowest Middle	Lowest 0.852

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,


No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 16 of 45


Test plot as follows:

Test mode: GFSK mode




Date: 4.DEC.2019 17:43:15

Lowest channel



Date: 4.DEC.2019 18:00:46

Middle channel



Date: 4.DEC.2019 18:05:12

Highest channel


BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Report No.: BLA-EMC-201911-A11-01 Page 17 of 45

Test mode: Pi/4QPSK mode



Date: 4.DEC.2019 18:11:50

Lowest channel



Date: 4.DEC.2019 18:14:21

Middle channel



Date: 4.DEC.2019 18:16:20

Highest channel

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No. : BLA-EMC-201911-A11-01 Page 18 of 45

7.5 Carrier Frequencies Separation

-	•	
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2013	
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak	
Limit:	GFSKΠ/4QPSK: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 6.0 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

Measurement Data

Mode	Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
	Lowest	1000	571	Pass
GFSK	Middle	1004	571	Pass
	Highest	1000	571	Pass
	Lowest	1004	812	Pass
Pi/4QPSK	Middle	1004	812	Pass
	Highest	1000	812	Pass

Note: According to section 7.4

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	856	571
Pi/4QPSK	1218	812

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,


No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No. : BLA-EMC-201911-A11-01 Page 19 of 45


Test plot as follows:

Modulation mode: GFSK




Date: 5.DEC.2019 11:22:06

Lowest channel



Date: 5.DEC.2019 11:24:54 Middle channel



Highest channel

BlueAsia of Technical Services(Shenzhen) Co., Ltd.


IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 20 of 45

Test mode: Pi/4QPSK mode




Date: 5.DEC.2019 11:34:57

Lowest channel



Date: 5.DEC.2019 11:36:52

Middle channel



Date: 5.DEC.2019 11:39:20

Highest channel

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China




Report No.: BLA-EMC-201911-A11-01 Page 21 of 45

7.6 Hopping Channel Number

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2013	
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak	
Limit:	15 channels	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 6.0 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

Measurement Data:

Mode	Hopping channel numbers	Limit	Result
GFSK	79	15	Pass
Pi/4QPSK	79	15	Pass

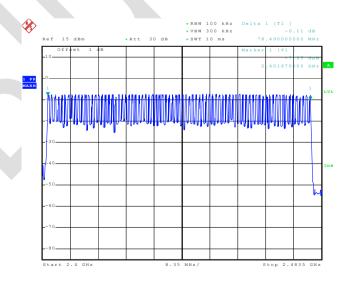

Date: 4.DEC.2019 17:09:02

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No. : BLA-EMC-201911-A11-01 Page 22 of 45

7.7 Dwell Time

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2013	
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak	
Limit:	0.4 Second	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 6.0 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

Measurement Data

Frequency	Packet	Dwell time(ms)	Limit(ms)	Result
2441MHz	DH1/2-DH1	135.04	400	Pass
2441MHz	DH3/2-DH3	270.72	400	Pass
2441MHz	DH5/2-DH5	314.03	400	Pass

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

Test channel: 2441MHz as blow

DH1/2-DH1 time slot=0.422(ms)*(1600/(2*79))*31.6=135.04ms DH3/2-DH3 time slot=1.692(ms)*(1600/(4*79))*31.6=270.72ms DH5/2-DH5 time slot=2.944(ms)*(1600/(6*79))*31.6=314.03ms

Test plot as follows:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.


IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China




Report No.: BLA-EMC-201911-A11-01 Page 23 of 45

Test channel: 2441MHz




DH1/2-DH1/3-DH1

Date: 4.DEC.2019 17:16:40



DH3/2-DH3/3-DH3



Date: 4.DBC.2019 17:26:18 DH5/2-DH5/3-DH5

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No. : BLA-EMC-201911-A11-01 Page 24 of 45

7.8 Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


EUT Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 25 of 45

7.9 Band Edge

7.9.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)	
Test Method:	ANSI C63.10:2013	
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 6.0 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

Test plot as follows:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,


No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01

Page 26 of 45


GFSK Mode:

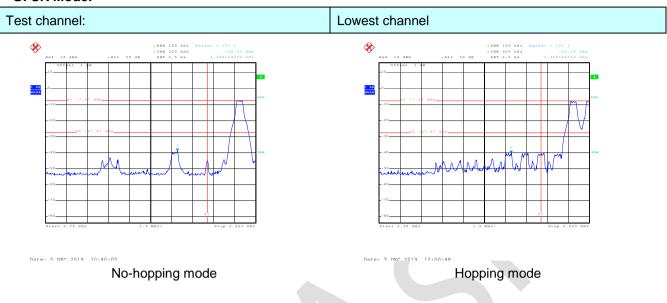


Test channel:

Highest channel

Date: 5.DEC.2019 12:06:36





No-hopping mode

Hopping mode

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,


No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01


Page 27 of 45

Pi/4QPSK Mode:

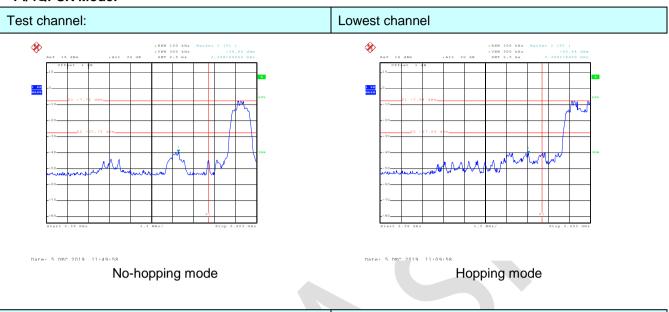

Test channel:

Highest channel

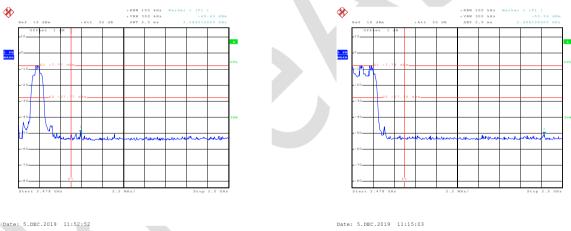

No-hopping mode

Hopping mode

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 28 of 45

7.9.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205							
Test Method:	ANSI C63.10:2013							
Test Frequency Range:	All restriction band have been tested, and 2310MHz to 2390MHz, 2483.5MHz to 2500MHz band is the worse case							
Test site:	Measurement Distance: 3m							
Receiver setup:	Frequency	Detector	RBW	VBW	Remark			
		Peak	1MHz	3MHz	Peak Value			
	Above 1GHz	Peak	1MHz	10Hz	Average Value			
Limit:	Freque	ncy	Limit (dBuV/	m @3m)	Remark			
	Above 1	GHz	54.0		Average Value			
	7,0000	0112	74.0	0	Peak Value			
	Tum Table X X X < 150cm > 1	EUT-	Test Antenna	?				
Test Procedure:	ground at a 3 determine the 2. The EUT was antenna, which tower. 3. The antenna ground to det horizontal and measuremen 4. For each sus and then the and the rota to maximum reasonable 5. The test-rece Bandwidth wire 6. If the emission limit specified EUT would be	meter camber position of the position of the position of the set 3 meters where the major was a mount to the pected emission antenna was able was turneding. Silver system with Maximum Ham level of the Ham testing the ported. Other tested the position of the Ham testing the ported. Other position of the Ham testing the ported. Other position of the Ham testing the position of the	er. The table was he highest rad away from the ed on the top ed from one maximum value rizations of the tuned to heighed from 0 degras set to Pearlold Mode. EUT in peak could be stop herwise the edone by one use the edone trade to the edone to the edone trade tra	vas rotated liation. lie interferer of a variab lieter to four e of the field e antenna a was arrangents from 1 regrees to 360 k Detect Full mode was apped and the missions the sing peak, or sing pe	r meters above the distrength. Both are set to make the ed to its worst case meter to 4 meters 0 degrees to find the function and Specified 10dB lower than the five peak values of the nat did not have 10dB quasi-peak or			
Test Instruments:	Refer to section	6.0 for details	;					
Test mode:	Refer to section	5.2 for details	3					
Test results:	Pass							

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01

Page 29 of 45

Remark:

1. During the test, pre-scan the GFSK, Pi/4QPSK modulation, and found the Pi/4QPSK modulation which it is worse case.

Te	est channel:	Lowest
	out orial in lon	2011001

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	60.14	-14.42	45.72	74.00	-28.28	Horizontal
2390.00	60.89	-14.11	46.78	74.00	-27.22	Horizontal
2310.00	61.25	-14.71	46.54	74.00	-27.46	Vertical
2390.00	62.42	-14.44	47.98	74.00	-26.02	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	42.80	-14.42	28.39	54.00	-25.62	Horizontal
2390.00	45.15	-14.11	31.04	54.00	-22.96	Horizontal
2310.00	43.72	-14.71	29.01	54.00	-24.99	Vertical
2390.00	44.03	-14.44	29.59	54.00	-24.41	Vertical

Ī	Test channel:	Highest

Peak value:

reak value.								
Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
2483.50	56.41	-13.61	42.83	74.00	-31.17	Horizontal		
2500.00	59.20	-13.53	45.67	74.00	-28.33	Horizontal		
2483.50	59.03	-14.00	45.03	74.00	-28.97	Vertical		
2500.00	60.18	-13.93	35.14	74.00	-27.75	Vertical		

Average value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)			Polarization
2483.50	45.01	-13.61	31.40	54.00	-22.60	Horizontal
2500.00	44.92	-13.53	31.39	54.00	-22.61	Horizontal
2483.50	47.43	-14.00	33.43	54.00	-20.57	Vertical
2500.00	49.07	-13.93	35.14	54.00	-18.86	Vertical

Remark:

- 1. Final Level =Receiver Read level + Correct factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3. Correct factor= Antenna Factor + Cable Loss Preamplifier Factor

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 30 of 45

7.10 Spurious Emission

7.10.1 Conducted Emission Method

Test Method: Limit:	ANSI C63.10:2013				
Limit	ANSI C63.10:2013				
LIITIIL.	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

Remark:

During the test, pre-scan the GFSK, Pi/4QPSK modulation, and found the Pi/4QPSK modulation which it is worse case.


BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China


Report No.: BLA-EMC-201911-A11-01 Page 31 of 45

Test channel: Lowest channel




30MHz~25GHz

Test channel: Middle channel



30MHz~25GHz

Test channel: Highest channel



Date: 5.DEC.2019 15:42:55

30MHz~25GHz

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 32 of 45

7.10.2 Radiated Emission Method


Test Requirement:	FCC Part15 C Section	on 15	5 209						
Test Method:	ANSI C63.10:2013								
	9kHz to 25GHz								
Test Frequency Range:									
Test site:	Measurement Distar	nce: (3m	1		T			
Receiver setup:	Frequency		Detector	RB'	W	VBW	Value		
	9KHz-150KHz	Qι	uasi-peak	200	Hz	600H	z Quasi-pea	k	
	150KHz-30MHz	Qι	uasi-peak	9Kł	Ηz	30KH	z Quasi-pea	k	
	30MHz-1GHz	Qι	uasi-peak	120k	Ήz	300KH	Iz Quasi-pea	k	
	Ab 4011-		Peak	1MI	Ηz	3MHz	z Peak		
	Above 1GHz		Peak	1MI	Ηz	10Hz	Average		
Limit: (Spurious Emissions)	Frequency	Frequency		Limit (uV/m)		'alue	Measuremen Distance	Measurement Distance	
	0.009MHz-0.490M	lHz	2400/F(KHz)		QP		300m		
	0.490MHz-1.705M	lHz	24000/F(KHz)		(Hz) QP		30m		
	1.705MHz-30MH	lz	30		QP		30m		
	30MHz-88MHz		100		QP				
	88MHz-216MHz	z	150		QP				
	216MHz-960MH	z	200		QP		0		
	960MHz-1GHz		500)		QP	3m		
	Ab 202 4011		500		Average				
	Above 1GHz	5000		Peak					
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.								

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China

Report No.: BLA-EMC-201911-A11-01 Page 33 of 45

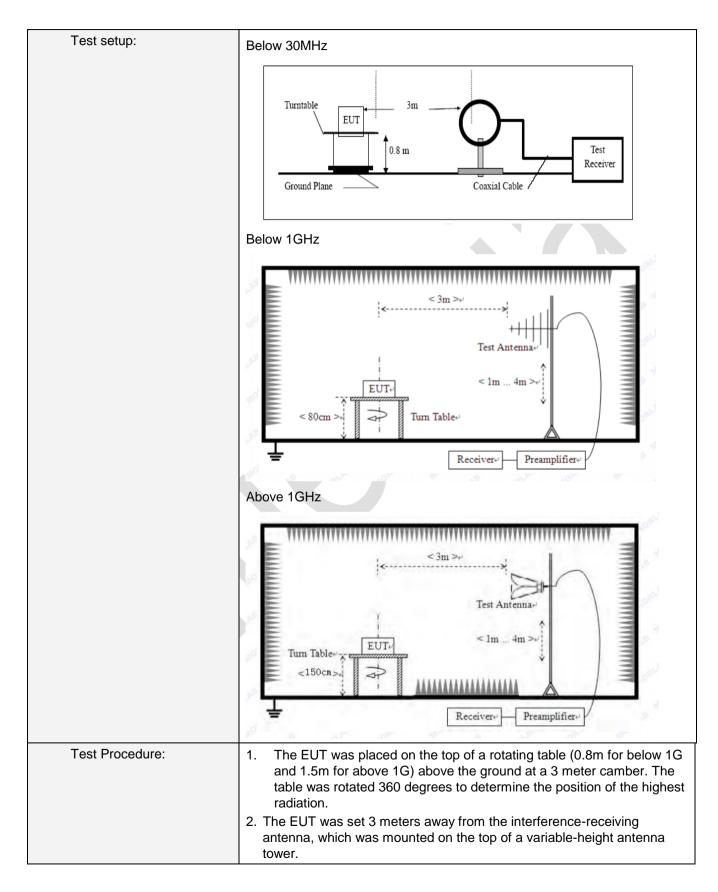

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No. : BLA-EMC-201911-A11-01 Page 34 of 45

	3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
	5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

Remark:

- 1. During the test, pre-scan the GFSK, Pi/4QPSK modulation, and found the Pi/4QPSK modulation which it is worse case.
- 2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

■ 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 35 of 45


■ Below 1GHz

EUT: Car Stereo Polarziation: Horizontal

Model: 7018B Power Source: DC12V

Mode: BT mode Test by: Eason

Temp./Hum.(%H): 26 °C/60%RH

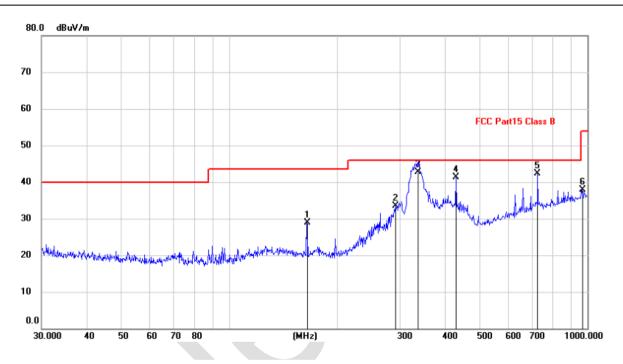

_	No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
_			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
	1		164.9075	16.43	12.56	28.99	43.50	-14.51	QP
	2		291.0360	20.01	13.43	33.44	46.00	-12.56	QP
	3	*	337.2155	27.84	14.87	42.71	46.00	-3.29	QP
	4		429.5228	23.70	17.53	41.23	46.00	-4.77	QP
	5		726.8052	19.35	23.01	42.36	46.00	-3.64	QP
	6		965.5421	11.91	25.90	37.81	54.00	-16.19	QP

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 36 of 45


Eason

EUT: Car Stereo Polarziation: Vertical

Model: 7018B Power Source: DC12V

 Mode:
 BT mode
 Test by:

 Temp./Hum.(%H):
 26 ℃/60%RH

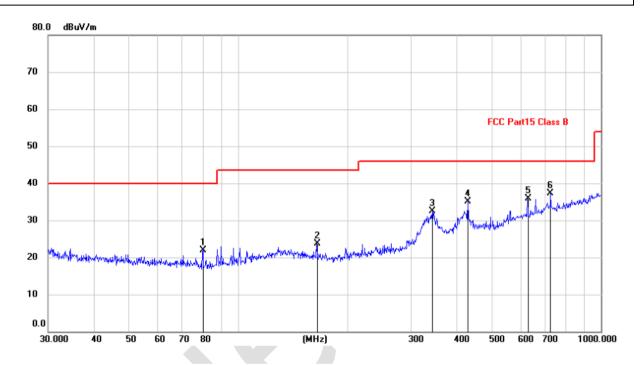

No	. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		80.0806	12.97	8.97	21.94	40.00	-18.06	QP
2	2	164.9075	11.12	12.56	23.68	43.50	-19.82	QP
3	3	343.1800	17.37	15.06	32.43	46.00	-13.57	QP
4		429.5228	17.61	17.53	35.14	46.00	-10.86	QP
- 5	,	627.2738	14.43	21.47	35.90	46.00	-10.10	QP
- 6	*	726.8052	14.39	23.01	37.40	46.00	-8.60	QP

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No. : BLA-EMC-201911-A11-01 Page 37 of 45

■ Above 1GHz

Test channel: Lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	58.27	-7.87	50.40	74.00	-23.60	Vertical
7206.00	54.36	-2.42	51.94	74.00 -22.06		Vertical
9608.00	53.15	-2.38	50.77	74.00	-23.23	Vertical
12010.00	*			74.00		Vertical
14412.00	*			74.00		Vertical
4804.00	55.22	-7.87	47.35	74.00	-26.65	Horizontal
7206.00	53.49	-2.42	51.07	74.00	-22.93	Horizontal
9608.00	54.03	-2.38	51.65	74.00	-22.35	Horizontal
12010.00	*			74.00		Horizontal
14412.00	*			74.00		Horizontal

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	57.84	-10.06	47.78	74.00	-26.22	Vertical
7323.00	55.51	-2.40	53.11	74.00	-20.89	Vertical
9764.00	54.72	-2.38	52.34	74.00	-21.66	Vertical
12205.00	*			74.00		Vertical
14646.00	*			74.00		Vertical
4882.00	55.73	-10.06	45.67	74.00	-28.33	Horizontal
7323.00	54.83	-2.40	52.43	74.00	-21.57	Horizontal
9764.00	55.03	-2.38	52.65	74.00	-21.35	Horizontal
12205.00	*			74.00	_	Horizontal
14646.00	*			74.00		Horizontal

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No. : BLA-EMC-201911-A11-01 Page 38 of 45

Test channel:	Highest
1 001 0.101.11011	1.19.1001

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	59.78	-9.19	50.59	74.00	-23.41	Vertical
7440.00	55.02	-2.45	52.57	74.00	-21.48	Vertical
9920.00	54.71	-2.37	52.34	74.00	-21.66	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	56.71	-9.19	47.52	74.00	-26.48	Horizontal
7440.00	54.83	-2.45	52.38	74.00	-21.62	Horizontal
9920.00	55.03	-2.37	52.66	74.00	-21.34	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal

Remark:

- 1. Final Level =Receiver Read level + Correct factor
- 2. Correct factor = Antenna Factor + Cable Loss Preamplifier Factor
- 3. "*", means this data is the too weak instrument of signal is unable to test.
- 4. The emission levels of other frequencies are very lower than the limit and not show in test report.
- 5. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,


No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 39 of 45

8 Test Setup Photo

Radiated Emission

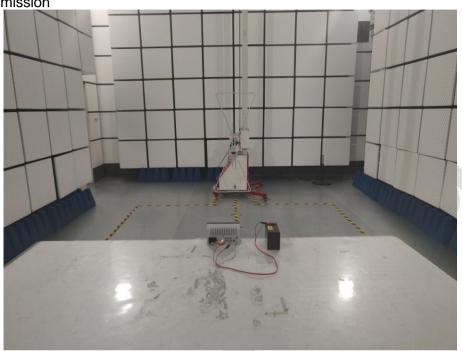



BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,


No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 40 of 45

9 EUT Constructional Details



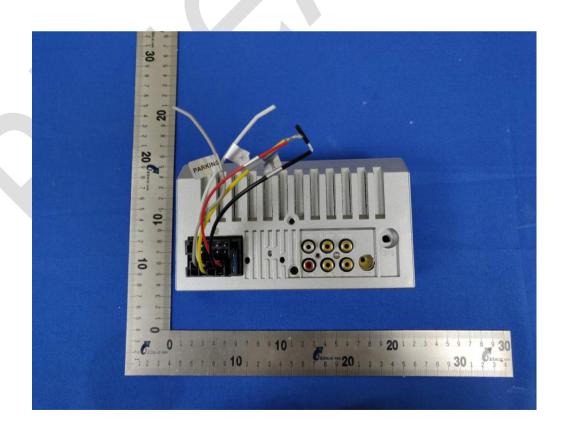


BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 41 of 45

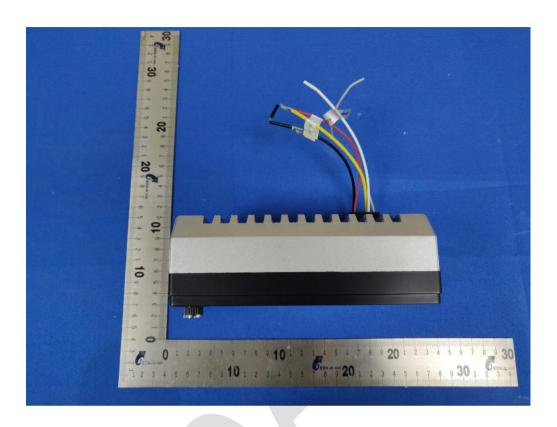




BlueAsia of Technical Services(Shenzhen) Co., Ltd.


IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 42 of 45

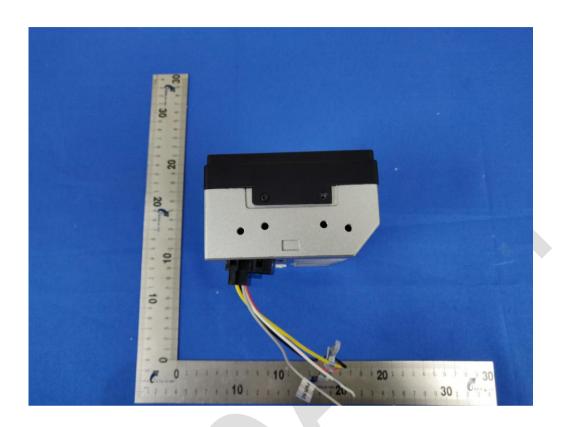

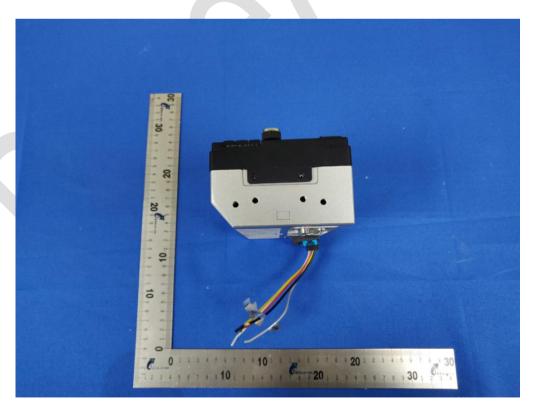


BlueAsia of Technical Services(Shenzhen) Co., Ltd.


IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 43 of 45

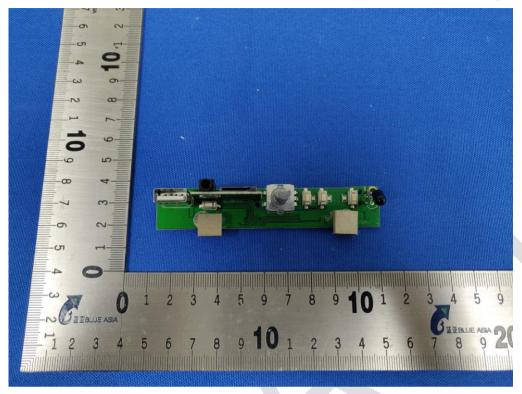

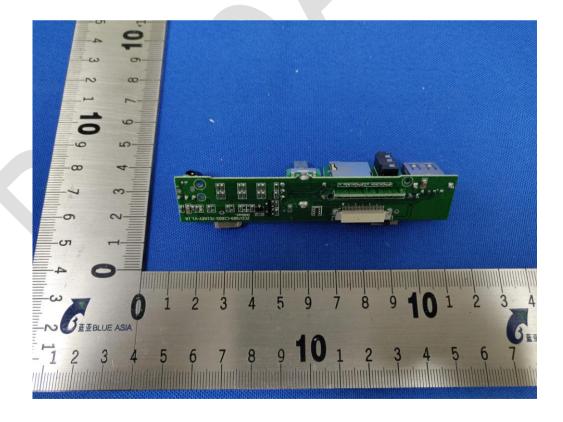


BlueAsia of Technical Services(Shenzhen) Co., Ltd.


IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 44 of 45

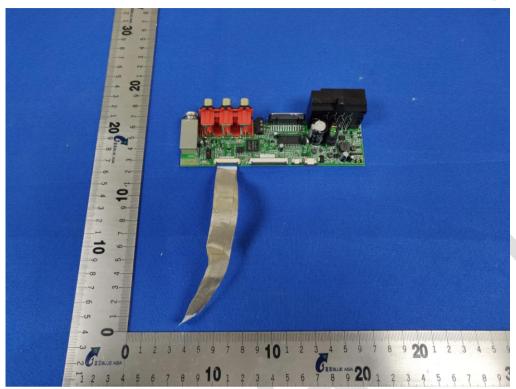

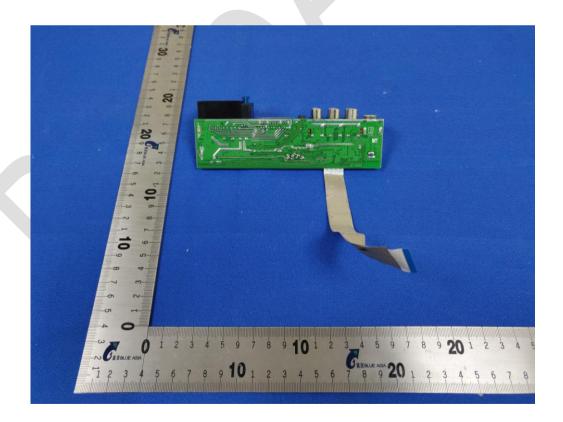


BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China



Report No.: BLA-EMC-201911-A11-01 Page 45 of 45

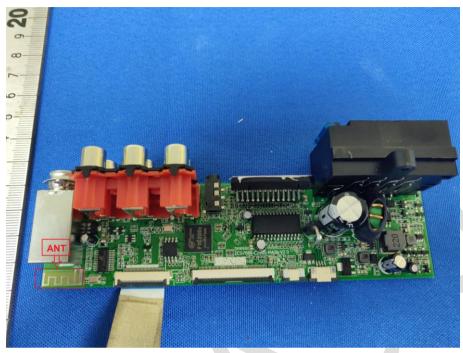

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

-----End-----

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

IOT Test Centre of BlueAsia,

No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China