

TEST REPORT

Applicant: X-Sense Innovations Co., Ltd.

Address of Applicant: B4 503D, Tower B, Kexing Science Park, No15 Keyuan Road, Technology Park Community, Yuehai Avenue, Nanshan District, Shenzhen, China

Manufacturer: X-Sense Innovations Co., Ltd.

Address of Manufacturer: B4 503D, Tower B, Kexing Science Park, No15 Keyuan Road, Technology Park Community, Yuehai Avenue, Nanshan District, Shenzhen, China

Factory: X-Sense Technology Co., Ltd.

Address of Factory: Room 801, Tower B, Qiade Technology Park, No. 7 Road, West Zone of High-Tech Park, Tianliao Community, Yutang Avenue, Guangming District, Shenzhen, China

Equipment Under Test (EUT)

Product Name: Remote Controller

Model No.: RC01

Trade Mark: X-Sense

FCC ID: 2AU4DDBF

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: January 06, 2021

Date of Test: January 07-14, 2021

Date of report issued: January 14, 2021

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Luo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

| Version No. | Date | Description |
|-------------|------------------|-------------|
| 00 | January 14, 2021 | Original |
| | | |
| | | |
| | | |
| | | |

Prepared By:



Date:

January 14, 2021

Project Engineer

Check By:


Reviewer

Date:

January 14, 2021

3 Contents

| | Page |
|--|------|
| 1 COVER PAGE..... | 1 |
| 2 VERSION..... | 2 |
| 3 CONTENTS..... | 3 |
| 4 TEST SUMMARY..... | 4 |
| 4.1 MEASUREMENT UNCERTAINTY..... | 4 |
| 5 GENERAL INFORMATION..... | 5 |
| 5.1 GENERAL DESCRIPTION OF EUT..... | 5 |
| 5.2 TEST MODE..... | 6 |
| 5.3 DESCRIPTION OF SUPPORT UNITS..... | 6 |
| 5.4 DEVIATION FROM STANDARDS..... | 6 |
| 5.5 ABNORMALITIES FROM STANDARD CONDITIONS..... | 6 |
| 5.6 TEST FACILITY..... | 6 |
| 5.7 TEST LOCATION..... | 6 |
| 5.8 ADDITIONAL INSTRUCTIONS..... | 6 |
| 6 TEST INSTRUMENTS LIST..... | 7 |
| 7 TEST RESULTS AND MEASUREMENT DATA..... | 9 |
| 7.1 RADIATED EMISSION METHOD..... | 9 |
| 7.1.1 <i>Field Strength of The Fundamental Signal and spurious emissions</i> | 12 |
| 7.1.2 <i>Spurious emissions</i> | 13 |
| 7.2 20dB OCCUPY BANDWIDTH..... | 17 |
| 8 TEST SETUP PHOTO..... | 18 |
| 9 EUT CONSTRUCTIONAL DETAILS..... | 18 |

4 Test Summary

| Test Item | Section | Result |
|--|-----------------------|--------|
| AC Power Line Conducted Emission | 15.207 | N/A |
| Field strength of the fundamental signal | 15.249 (a) | Pass |
| Spurious emissions | 15.249 (a) (d)/15.209 | Pass |
| Band edge | 15.249 (d)/15.205 | Pass |
| 20dB Occupied Bandwidth | 15.215 (c) | Pass |

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10: 2013 and ANSI C63.4: 2014.

4.1 Measurement Uncertainty

| Test Item | Frequency Range | Measurement Uncertainty | Notes |
|----------------------------------|-----------------|-------------------------|-------|
| Radiated Emission | 30MHz-200MHz | 3.8039dB | (1) |
| Radiated Emission | 200MHz-1GHz | 3.9679dB | (1) |
| Radiated Emission | 1GHz-18GHz | 4.29dB | (1) |
| Radiated Emission | 18GHz-40GHz | 3.30dB | (1) |
| AC Power Line Conducted Emission | 0.15MHz ~ 30MHz | 3.44dB | (1) |

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

| | |
|----------------------|-------------------------------|
| Product Name: | Remote Controller |
| Model No.: | RC01 |
| Serial No.: | ASXS194AWUS |
| Hardware Version: | V1.0 |
| Software Version: | V2.3.1 |
| Test sample(s) ID: | GTS202101000031-1 |
| Sample(s) Status: | Engineer sample |
| Operation Frequency: | 915.27MHz |
| Modulation type: | FSK |
| Antenna Type: | Integral antenna |
| Antenna gain: | 1dBi(declare by manufacturer) |
| Power supply: | DC 3.0V |

Test using a new battery.

5.2 Test mode

| | | | |
|---|---|-------|-------|
| Transmitting mode | Keep the EUT in continuously transmitting mode. | | |
| Per-test mode. | | | |
| We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows: | | | |
| Axis | X | Y | Z |
| Field Strength(dBuV/m) | 74.35 | 75.73 | 73.21 |

5.3 Description of Support Units

| |
|------|
| None |
|------|

5.4 Deviation from Standards

| |
|-------|
| None. |
|-------|

5.5 Abnormalities from Standard Conditions

| |
|-------|
| None. |
|-------|

5.6 Test Facility

| |
|--|
| <p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC —Registration No.: 381383 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383. ● IC —Registration No.: 9079A The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A ● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0. |
|--|

5.7 Test Location

| |
|--|
| All tests were performed at: |
| <p>Global United Technology Services Co., Ltd. No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960</p> |

5.8 Additional Instructions

EUT Software Settings:

| | |
|------|--|
| Mode | Special test firmware pre built in by manufacturer |
|------|--|

6 Test Instruments list


| Radiated Emission: | | | | | | |
|--------------------|-------------------------------------|--------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | 3m Semi- Anechoic Chamber | ZhongYu Electron | 9.2(L)*6.2(W)* 6.4(H) | GTS250 | July. 02 2020 | July. 01 2025 |
| 2 | Control Room | ZhongYu Electron | 6.2(L)*2.5(W)* 2.4(H) | GTS251 | N/A | N/A |
| 3 | EMI Test Receiver | Rohde & Schwarz | ESU26 | GTS203 | June. 25 2020 | June. 24 2021 |
| 4 | BiConiLog Antenna | SCHWARZBECK MESS-ELEKTRONIK | VULB9163 | GTS214 | June. 25 2020 | June. 24 2021 |
| 5 | Double -ridged waveguide horn | SCHWARZBECK MESS-ELEKTRONIK | BBHA 9120 D | GTS208 | June. 25 2020 | June. 24 2021 |
| 6 | Horn Antenna | ETS-LINDGREN | 3160 | GTS217 | June. 25 2020 | June. 24 2021 |
| 7 | EMI Test Software | AUDIX | E3 | N/A | N/A | N/A |
| 8 | Coaxial Cable | GTS | N/A | GTS213 | June. 25 2020 | June. 24 2021 |
| 9 | Coaxial Cable | GTS | N/A | GTS211 | June. 25 2020 | June. 24 2021 |
| 10 | Coaxial cable | GTS | N/A | GTS210 | June. 25 2020 | June. 24 2021 |
| 11 | Coaxial Cable | GTS | N/A | GTS212 | June. 25 2020 | June. 24 2021 |
| 12 | Amplifier(100kHz-3GHz) | HP | 8347A | GTS204 | June. 25 2020 | June. 24 2021 |
| 13 | Amplifier(2GHz-20GHz) | HP | 84722A | GTS206 | June. 25 2020 | June. 24 2021 |
| 14 | Amplifier (18-26GHz) | Rohde & Schwarz | AFS33-18002 650-30-8P-44 | GTS218 | June. 25 2020 | June. 24 2021 |
| 15 | Band filter | Amindeon | 82346 | GTS219 | June. 25 2020 | June. 24 2021 |
| 16 | Power Meter | Anritsu | ML2495A | GTS540 | June. 25 2020 | June. 24 2021 |
| 17 | Power Sensor | Anritsu | MA2411B | GTS541 | June. 25 2020 | June. 24 2021 |
| 18 | Wideband Radio Communication Tester | Rohde & Schwarz | CMW500 | GTS575 | June. 25 2020 | June. 24 2021 |
| 19 | Splitter | Agilent | 11636B | GTS237 | June. 25 2020 | June. 24 2021 |
| 20 | Loop Antenna | ZHINAN | ZN30900A | GTS534 | June. 25 2020 | June. 24 2021 |
| 21 | Breitband hornantenne | SCHWARZBECK | BBHA 9170 | GTS579 | Oct. 18 2020 | Oct. 17 2021 |
| 22 | Amplifier | TDK | PA-02-02 | GTS574 | Oct. 18 2020 | Oct. 17 2021 |
| 23 | Amplifier | TDK | PA-02-03 | GTS576 | Oct. 18 2020 | Oct. 17 2021 |
| 24 | PSA Series Spectrum Analyzer | Rohde & Schwarz | FSP | GTS578 | June. 25 2020 | June. 24 2021 |


| RF Conducted Test: | | | | | | |
|---------------------------|--|---------------------|------------------|-------------------|--------------------------------|------------------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | MXA Signal Analyzer | Agilent | N9020A | GTS566 | June. 25 2020 | June. 24 2021 |
| 2 | EMI Test Receiver | R&S | ESCI 7 | GTS552 | June. 25 2020 | June. 24 2021 |
| 3 | Spectrum Analyzer | Agilent | E4440A | GTS533 | June. 25 2020 | June. 24 2021 |
| 4 | MXG vector Signal Generator | Agilent | N5182A | GTS567 | June. 25 2020 | June. 24 2021 |
| 5 | ESG Analog Signal Generator | Agilent | E4428C | GTS568 | June. 25 2020 | June. 24 2021 |
| 6 | USB RF Power Sensor | DARE | RPR3006W | GTS569 | June. 25 2020 | June. 24 2021 |
| 7 | RF Switch Box | Shongyi | RFSW3003328 | GTS571 | June. 25 2020 | June. 24 2021 |
| 8 | Programmable Constant Temp & Humi Test Chamber | WEWON | WHTH-150L-40-880 | GTS572 | June. 25 2020 | June. 24 2021 |

| General used equipment: | | | | | | |
|--------------------------------|---------------------------------|---------------------|------------------|----------------------|--------------------------------|------------------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | Humidity/ Temperature Indicator | KTJ | TA328 | GTS243 | June. 25 2020 | June. 24 2021 |
| 2 | Barometer | ChangChun | DYM3 | GTS255 | June. 25 2020 | June. 24 2021 |

7 Test results and Measurement Data

7.1 Radiated Emission Method
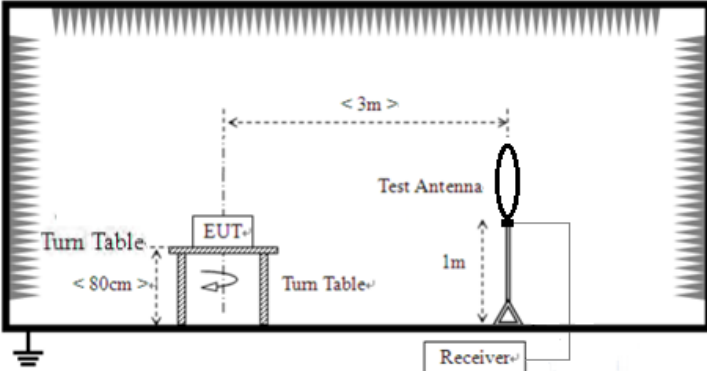
| | | | | | |
|--|--|--------------------|---------|----------------------|------------|
| Test Requirement: | FCC Part15 C Section 15.209 | | | | |
| Test Method: | ANSI C63.10:2013 | | | | |
| Test Frequency Range: | 9kHz to 10GHz | | | | |
| Test site: | Measurement Distance: 3m | | | | |
| Receiver setup: | Frequency | Detector | RBW | VBW | Value |
| | 9KHz-150KHz | Quasi-peak | 200Hz | 600Hz | Quasi-peak |
| | 150KHz-30MHz | Quasi-peak | 9KHz | 30KHz | Quasi-peak |
| | 30MHz-1GHz | Quasi-peak | 120KHz | 300KHz | Quasi-peak |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| Peak | | 1MHz | 10Hz | Average | |
| Limit: (Field strength of the fundamental signal) | Frequency | Limit (dBuV/m @3m) | | Remark | |
| | 902-928MHz | 94.00 | | Average Value | |
| | | 114.00 | | Peak Value | |
| Limit: (Spurious Emissions) | Frequency | Limit (uV/m) | Value | Measurement Distance | |
| | 0.009MHz-0.490MHz | 2400/F(KHz) | QP | 300m | |
| | 0.490MHz-1.705MHz | 24000/F(KHz) | QP | 30m | |
| | 1.705MHz-30MHz | 30 | QP | 30m | |
| | 30MHz-88MHz | 100 | QP | 3m | |
| | 88MHz-216MHz | 150 | QP | | |
| | 216MHz-960MHz | 200 | QP | | |
| | 960MHz-1GHz | 500 | QP | | |
| | Above 1GHz | 500 | Average | | |
| 5000 | | Peak | | | |
| Limit: (band edge) | Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation. | | | | |
| Test setup: | <p>Below 30MHz</p>  <p>Below 1GHz</p> | | | | |
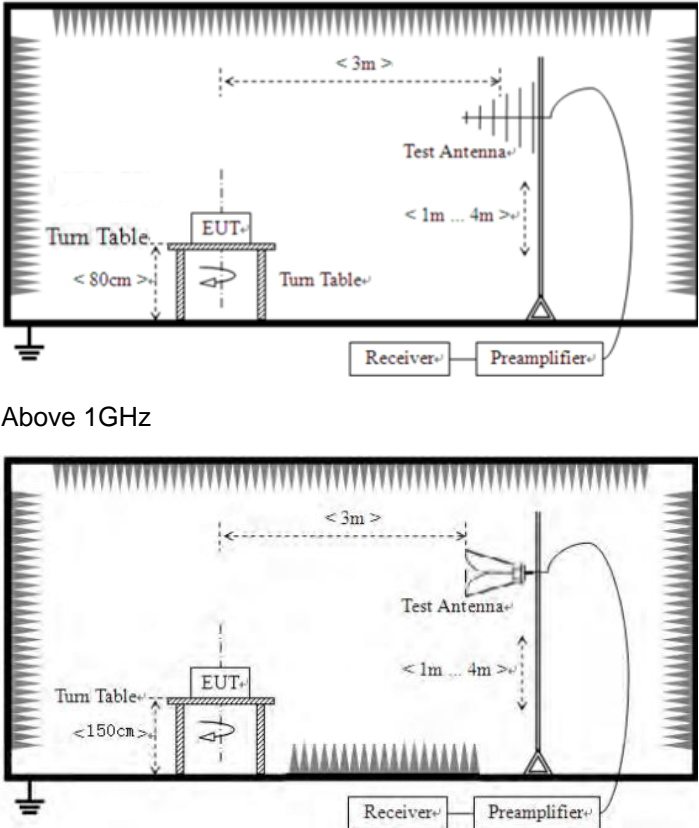
| | | | | | | | |
|--------------------------|--|---------|-------|---------|-----------|---------|-----------|
| |  <p>Above 1GHz</p> | | | | | | |
| <p>Test Procedure:</p> | <ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. | | | | | | |
| <p>Test environment:</p> | <table border="1"> <tr> <td>Temp.:</td> <td>25 °C</td> <td>Humid.:</td> <td>52%</td> <td>Press.:</td> <td>1 012mbar</td> </tr> </table> | Temp.: | 25 °C | Humid.: | 52% | Press.: | 1 012mbar |
| Temp.: | 25 °C | Humid.: | 52% | Press.: | 1 012mbar | | |
| <p>Test Instruments:</p> | <p>Refer to section 6.0 for details</p> | | | | | | |
| <p>Test mode:</p> | <p>Refer to section 5.2 for details</p> | | | | | | |

| | |
|---------------|------|
| Test results: | Pass |
|---------------|------|

Measurement data:

■ 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

7.1.1 Field Strength of The Fundamental Signal and spurious emissions

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 915.27 | 80.71 | 22.35 | 4.91 | 37.59 | 70.38 | 114.00 | -43.62 | Vertical |
| 915.27 | 86.06 | 22.35 | 4.91 | 37.59 | 75.73 | 114.00 | -38.27 | Horizontal |

QP value:

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 915.27 | 79.28 | 22.35 | 4.91 | 37.59 | 68.95 | 94.00 | -25.05 | Vertical |
| 915.27 | 85.77 | 22.35 | 4.91 | 37.59 | 75.44 | 94.00 | -18.56 | Horizontal |


7.1.2 Spurious emissions

■ Below 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.


■ Below 1GHz

| | | | |
|------------|-------------------|-------------------|------------|
| Test mode: | transmitting mode | Antenna Polarity: | Horizontal |
|------------|-------------------|-------------------|------------|

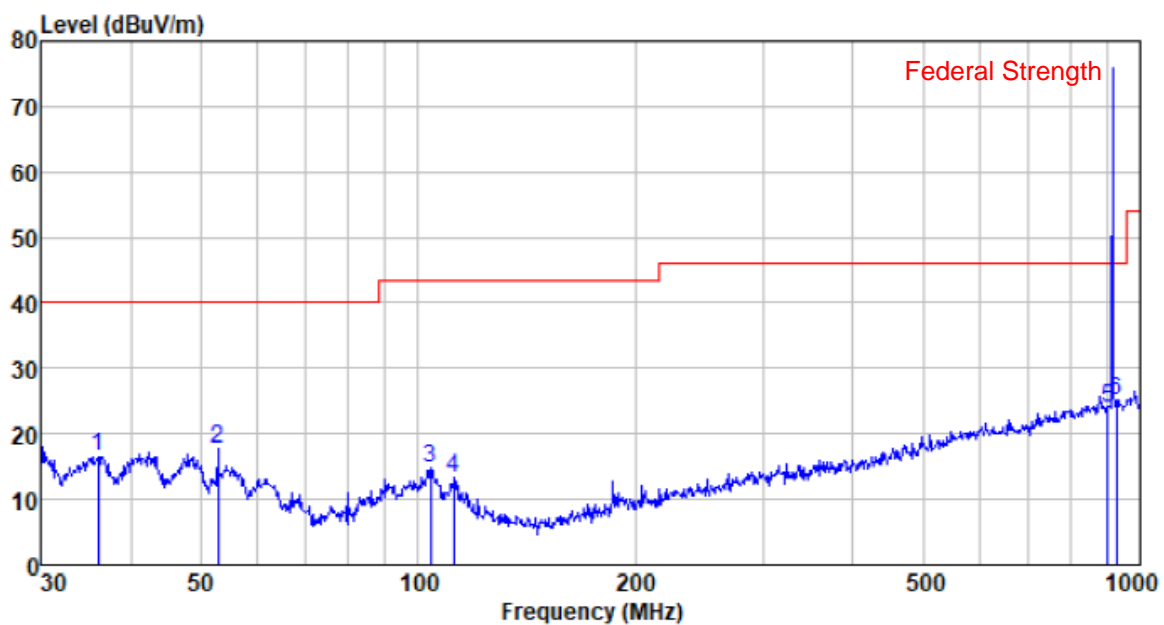

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 36.001 | 39.93 | 11.52 | 0.62 | 35.42 | 16.65 | 40.00 | -23.35 | QP |
| 52.760 | 41.08 | 12.00 | 0.80 | 36.22 | 17.66 | 40.00 | -22.34 | QP |
| 104.170 | 38.62 | 11.73 | 1.23 | 36.76 | 14.82 | 43.50 | -28.68 | QP |
| 112.131 | 38.09 | 10.76 | 1.30 | 36.82 | 13.33 | 43.50 | -30.17 | QP |
| 902.000 | 34.32 | 22.30 | 4.87 | 37.60 | 23.89 | 46.00 | -22.11 | QP |
| 928.000 | 35.28 | 22.41 | 4.96 | 37.57 | 25.08 | 46.00 | -20.92 | QP |


| | | | |
|------------|-------------------|-------------------|----------|
| Test mode: | transmitting mode | Antenna Polarity: | Vertical |
|------------|-------------------|-------------------|----------|

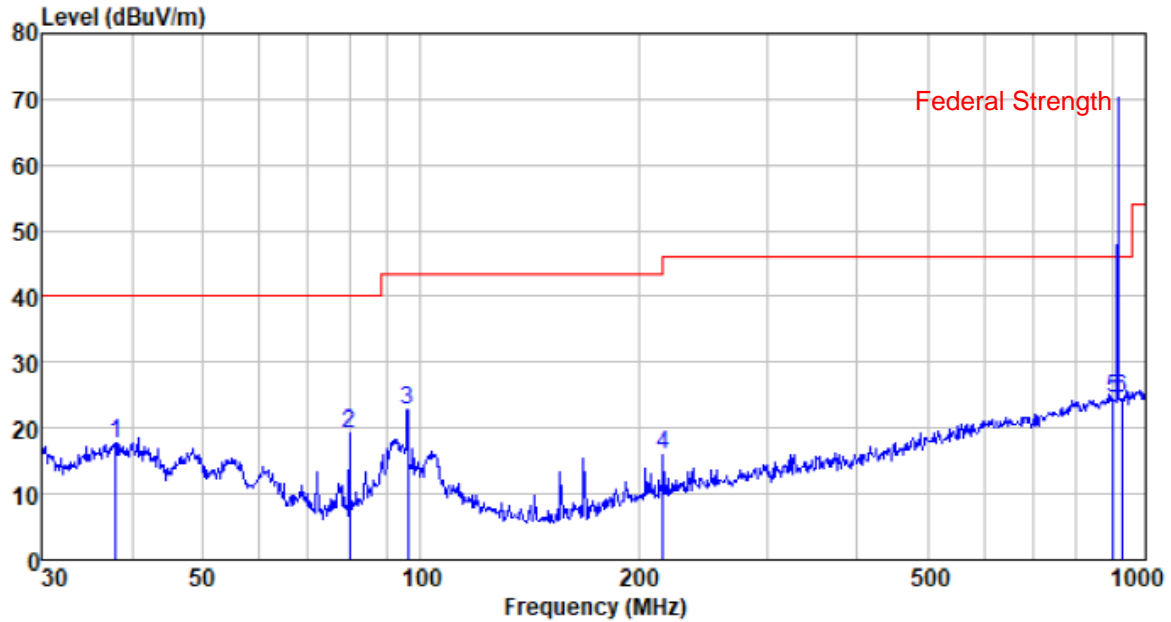

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 37.945 | 40.88 | 11.86 | 0.64 | 35.54 | 17.84 | 40.00 | -22.16 | QP |
| 79.800 | 47.40 | 7.40 | 1.03 | 36.54 | 19.29 | 40.00 | -20.71 | QP |
| 96.099 | 46.52 | 11.65 | 1.16 | 36.69 | 22.64 | 43.50 | -20.86 | QP |
| 216.024 | 40.36 | 11.02 | 1.93 | 37.35 | 15.96 | 46.00 | -30.04 | QP |
| 902.000 | 34.82 | 22.30 | 4.87 | 37.60 | 24.39 | 46.00 | -21.61 | QP |
| 928.000 | 34.58 | 22.41 | 4.96 | 37.57 | 24.38 | 46.00 | -21.62 | QP |


■ Above 1GHz

| | | | |
|------------|-------------------|-------------------|------------|
| Test mode: | transmitting mode | Antenna Polarity: | Horizontal |
|------------|-------------------|-------------------|------------|

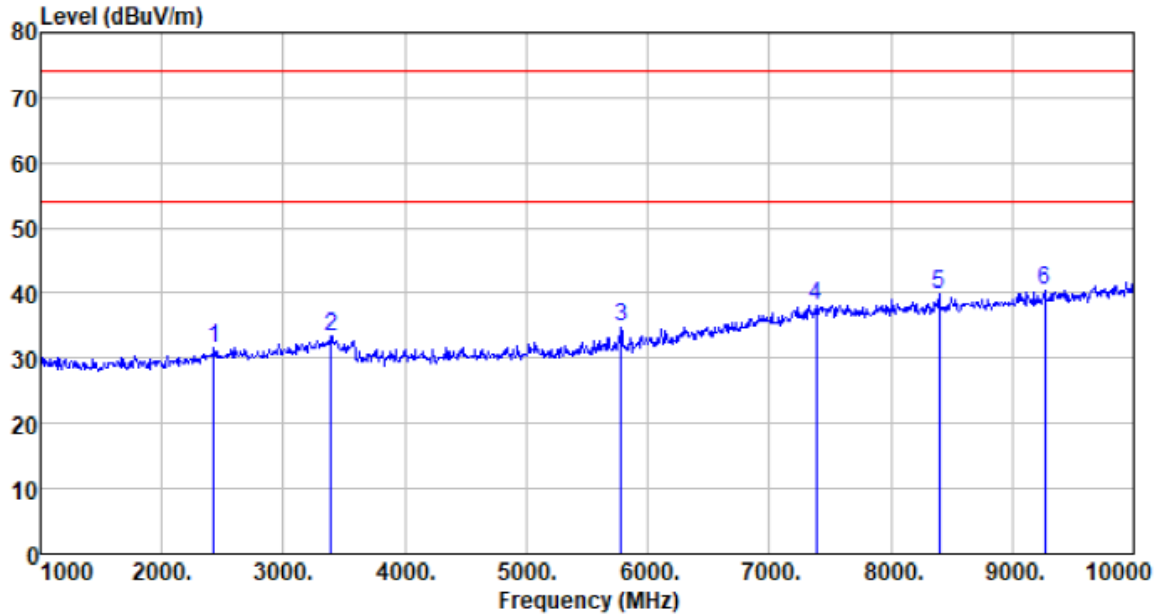

| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 2431.000 | 38.13 | 27.49 | 2.94 | 36.88 | 31.68 | 74.00 | -42.32 | Peak |
| 3394.000 | 38.65 | 28.40 | 3.64 | 37.34 | 33.35 | 74.00 | -40.65 | Peak |
| 5779.000 | 33.88 | 32.21 | 5.44 | 36.69 | 34.84 | 74.00 | -39.16 | Peak |
| 7390.000 | 30.43 | 36.57 | 6.71 | 35.58 | 38.13 | 74.00 | -35.87 | Peak |
| 8398.000 | 30.64 | 37.32 | 7.04 | 35.03 | 39.97 | 74.00 | -34.03 | Peak |
| 9271.000 | 29.75 | 37.66 | 7.77 | 34.69 | 40.49 | 74.00 | -33.51 | Peak |

| | | | |
|------------|-------------------|-------------------|----------|
| Test mode: | transmitting mode | Antenna Polarity: | Vertical |
|------------|-------------------|-------------------|----------|

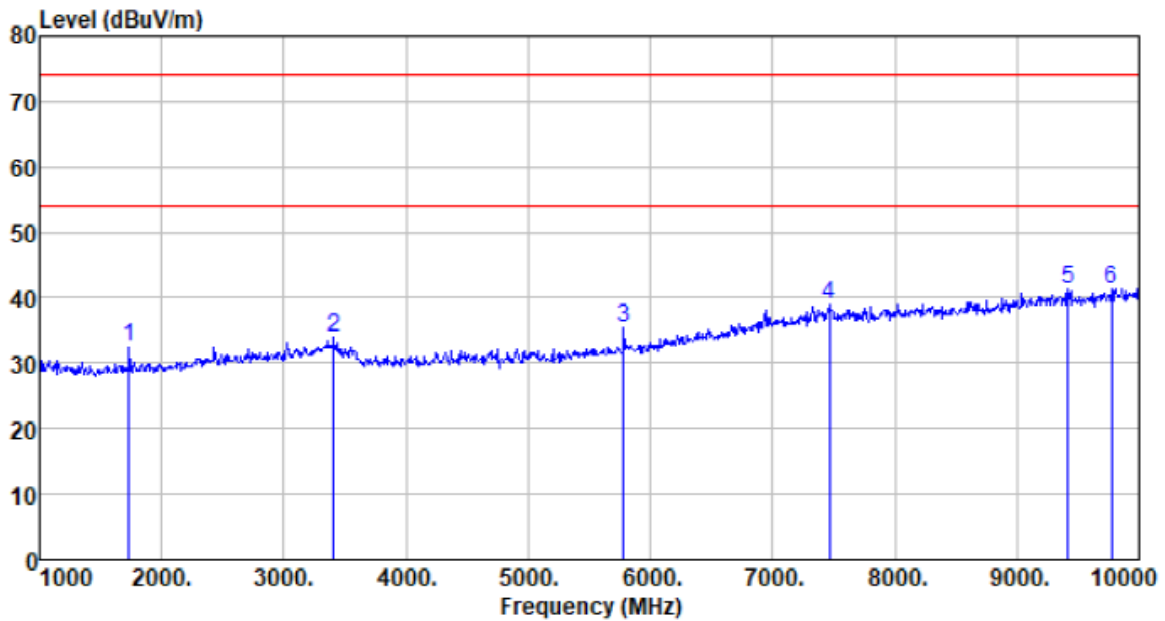


| Freq MHz | Reading level dBuV | Antenna factor dB/m | Cable loss dB | Preamp factor dB | level dBuV/m | Limit level dBuV/m | Over limit dB | Remark |
|-------------|--------------------------|---------------------------|---------------------|------------------------|-----------------|--------------------------|---------------------|--------|
| 1729.000 | 40.77 | 25.69 | 2.43 | 36.33 | 32.56 | 74.00 | -41.44 | Peak |
| 3412.000 | 39.36 | 28.40 | 3.66 | 37.35 | 34.07 | 74.00 | -39.93 | Peak |
| 5779.000 | 34.44 | 32.21 | 5.44 | 36.69 | 35.40 | 74.00 | -38.60 | Peak |
| 7462.000 | 31.05 | 36.71 | 6.79 | 35.56 | 38.99 | 74.00 | -35.01 | Peak |
| 9415.000 | 30.51 | 37.75 | 7.87 | 34.80 | 41.33 | 74.00 | -32.67 | Peak |
| 9775.000 | 30.31 | 38.13 | 8.03 | 35.05 | 41.42 | 74.00 | -32.58 | Peak |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.


7.2 20dB Occupy Bandwidth
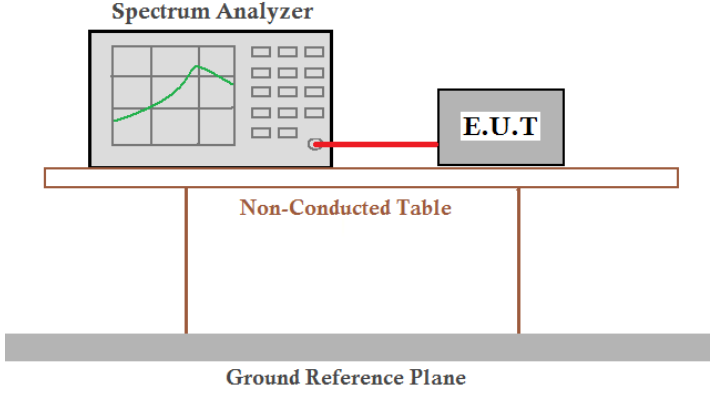
| | |
|-------------------|--|
| Test Requirement: | FCC Part15 C Section 15.249/15.215 |
| Test Method: | ANSI C63.10:2013 |
| Limit: | Operation Frequency range 902MHz~928MHz |
| Test setup: |  |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |

Measurement Data

| Operation Frequency | 20dB bandwidth(kHz) | Result |
|---------------------|---------------------|--------|
| 915.27MHz | 32.602 | Pass |

Test plot as follows:

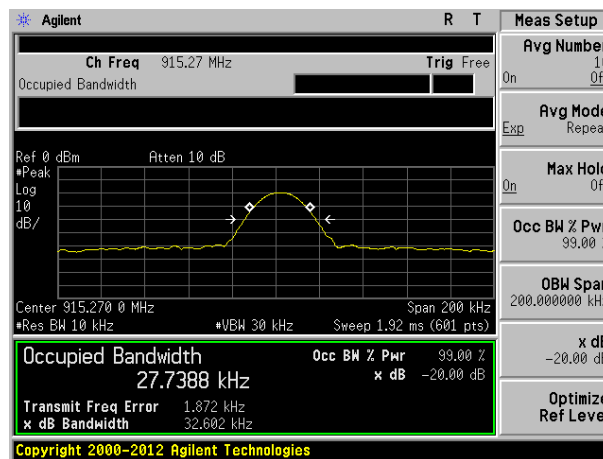

915.27 MHz

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details

-----End-----