

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	23.628M	19.1M	19M1D1D	22.572M	19.04M
802.11be EHT40_Nss2,(MCS0)_2TX	44.484M	38.081M	38M1D1D	43.56M	37.961M
802.11be EHT80_Nss2,(MCS0)_2TX	90.552M	77.961M	78M0D1D	87.384M	77.771M
802.11be EHT160_Nss2,(MCS0)_2TX	175.824M	157.528M	158MD1D	171.072M	157.049M
802.11be EHT320_Nss2,(MCS0)_2TX	344.256M	317.601M	318MD1D	336.864M	315.682M
6.425-6.525GHz	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	23.562M	19.1M	19M1D1D	22.902M	19.04M
802.11be EHT40_Nss2,(MCS0)_2TX	44.748M	38.081M	38M1D1D	43.56M	38.081M
802.11be EHT80_Nss2,(MCS0)_2TX	89.76M	77.817M	77M8D1D	88.44M	77.816M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	23.64M	19.1M	19M1D1D	22.836M	19.04M
802.11be EHT40_Nss2,(MCS0)_2TX	44.748M	38.081M	38M1D1D	43.56M	38.021M
802.11be EHT80_Nss2,(MCS0)_2TX	90.36M	77.867M	77M9D1D	87.648M	77.721M
802.11be EHT160_Nss2,(MCS0)_2TX	174.72M	157.416M	157MD1D	169.2M	157.055M
802.11be EHT320_Nss2,(MCS0)_2TX	347.424M	317.697M	318MD1D	342.144M	316.642M
6.875-7.125GHz	-	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	23.43M	19.1M	19M1D1D	22.572M	19.04M
802.11be EHT40_Nss2,(MCS0)_2TX	44.484M	38.081M	38M1D1D	43.296M	38.081M
802.11be EHT80_Nss2,(MCS0)_2TX	88.704M	77.961M	78M0D1D	88.176M	77.721M
802.11be EHT160_Nss2,(MCS0)_2TX	172.656M	157.276M	157MD1D	171.6M	157.207M

Max-N dB = Maximum 26dB down bandwidth;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 26dB down bandwidth;
 Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5935MHz	Pass	Inf	22.704M	19.1M	23.628M	19.1M
5955MHz	Pass	Inf	22.572M	19.04M	23.496M	19.1M
6175MHz	Pass	Inf	23.232M	19.04M	23.364M	19.07M
6415MHz	Pass	Inf	23.232M	19.1M	23.034M	19.1M
6435MHz	Pass	Inf	22.902M	19.07M	23.364M	19.04M
6475MHz	Pass	Inf	23.1M	19.1M	23.496M	19.1M
6515MHz	Pass	Inf	23.232M	19.07M	23.562M	19.07M
6535MHz	Pass	Inf	23.232M	19.04M	23.43M	19.07M
6715MHz	Pass	Inf	22.836M	19.07M	23.232M	19.1M
6855MHz	Pass	Inf	23.034M	19.07M	23.562M	19.1M
6875MHz Straddle 6.525-6.875GHz	Pass	Inf	22.95M	19.1M	23.64M	19.1M
6895MHz	Pass	Inf	23.298M	19.07M	23.43M	19.1M
7015MHz	Pass	Inf	22.638M	19.07M	23.1M	19.07M
7095MHz	Pass	Inf	22.836M	19.04M	23.166M	19.1M
7115MHz	Pass	Inf	22.704M	19.07M	22.572M	19.04M
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	Inf	44.484M	38.081M	43.824M	38.021M
6165MHz	Pass	Inf	44.22M	38.081M	43.824M	37.961M
6405MHz	Pass	Inf	43.56M	38.081M	44.352M	38.021M
6445MHz	Pass	Inf	44.352M	38.081M	43.56M	38.081M
6485MHz	Pass	Inf	44.088M	38.081M	44.748M	38.081M
6525MHz Straddle 6.525-6.875GHz	Pass	Inf	44.34M	38.081M	43.68M	38.081M
6565MHz	Pass	Inf	43.824M	38.081M	43.824M	38.081M
6725MHz	Pass	Inf	44.748M	38.081M	44.352M	38.081M
6845MHz	Pass	Inf	43.56M	38.081M	44.352M	38.021M
6885MHz Straddle 6.525-6.875GHz	Pass	Inf	44.7M	38.081M	44.04M	38.021M
6925MHz	Pass	Inf	44.484M	38.081M	43.956M	38.081M
7005MHz	Pass	Inf	43.692M	38.081M	43.56M	38.081M
7085MHz	Pass	Inf	44.088M	38.081M	43.296M	38.081M
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	Inf	90.288M	77.841M	87.384M	77.841M
6145MHz	Pass	Inf	87.912M	77.809M	90.552M	77.771M
6385MHz	Pass	Inf	89.496M	77.961M	88.176M	77.841M
6465MHz	Pass	Inf	88.44M	77.816M	89.76M	77.817M
6545MHz Straddle 6.525-6.875GHz	Pass	Inf	89.16M	77.841M	90.36M	77.841M
6625MHz	Pass	Inf	88.968M	77.841M	88.176M	77.721M
6705MHz	Pass	Inf	87.648M	77.867M	87.912M	77.758M
6785MHz	Pass	Inf	88.704M	77.841M	87.648M	77.721M
6865MHz Straddle 6.525-6.875GHz	Pass	Inf	88.92M	77.841M	89.16M	77.841M
6945MHz	Pass	Inf	88.176M	77.961M	88.704M	77.841M
7025MHz	Pass	Inf	88.176M	77.841M	88.176M	77.721M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	Inf	175.824M	157.528M	171.6M	157.049M
6185MHz	Pass	Inf	172.128M	157.28M	171.072M	157.422M
6345MHz	Pass	Inf	174.768M	157.428M	173.184M	157.232M
6505MHz Straddle 6.525-6.875GHz	Pass	Inf	174.72M	157.055M	169.2M	157.066M
6665MHz	Pass	Inf	173.712M	157.416M	172.128M	157.301M
6825MHz Straddle 6.525-6.875GHz	Pass	Inf	173.76M	157.399M	171.36M	157.142M
6985MHz	Pass	Inf	172.656M	157.207M	171.6M	157.276M
802.11be EHT320_Nss2,(MCS0)_2TX	-	-	-	-	-	-
6105MHz	Pass	Inf	344.256M	317.601M	336.864M	315.682M
6265MHz	Pass	Inf	342.144M	317.121M	343.2M	317.121M
6425MHz Straddle 6.525-6.875GHz	Pass	Inf	347.424M	317.697M	342.144M	317.697M
6585MHz Straddle 6.525-6.875GHz	Pass	Inf	343.2M	316.642M	342.144M	317.697M
6745MHz Straddle 6.525-6.875GHz	Pass	Inf	342.144M	317.697M	343.2M	316.642M
6905MHz Straddle 6.525-6.875GHz	Pass	Inf	343.2M	316.642M	342.144M	316.642M



Port X-N dB = 26dB down bandwidth

Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW



5935MHz

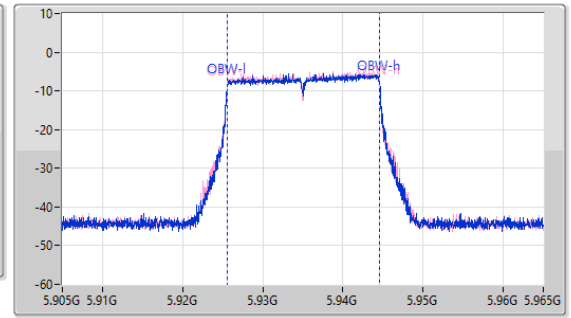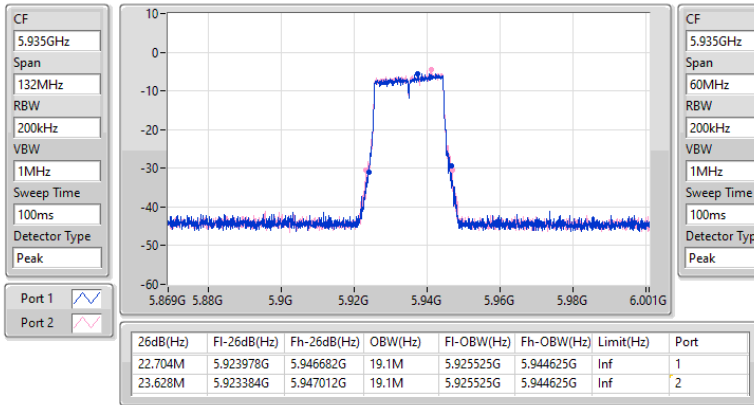

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

5935MHz

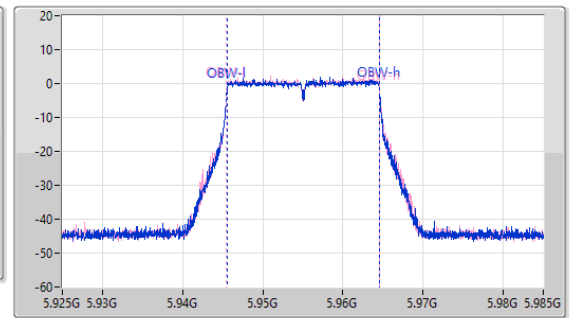
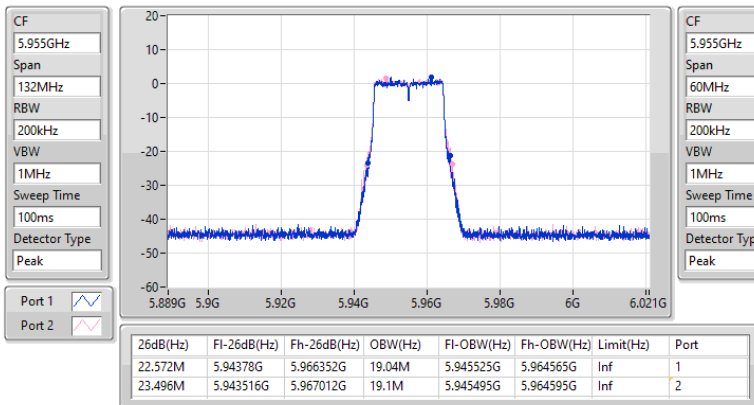




5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW



6175MHz

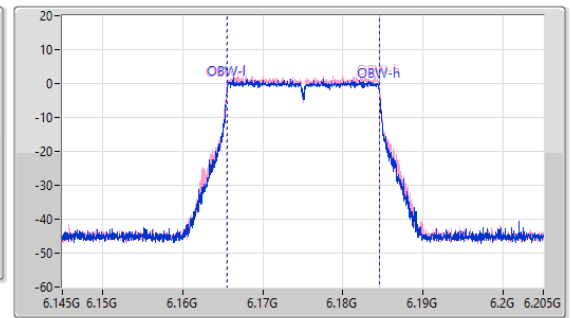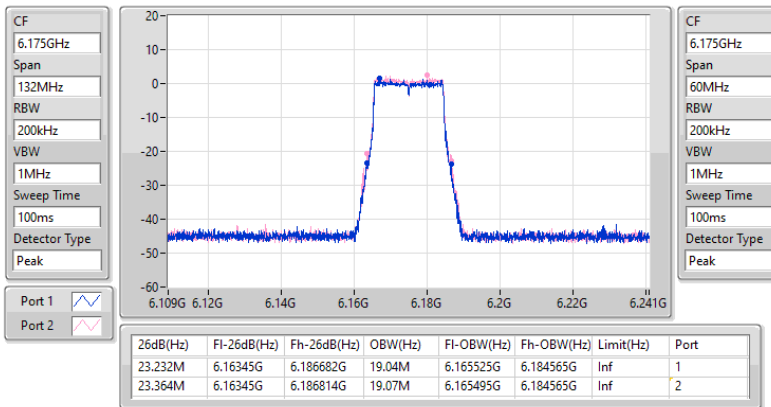

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

6415MHz

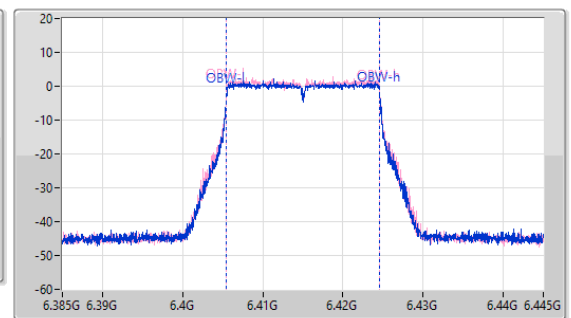
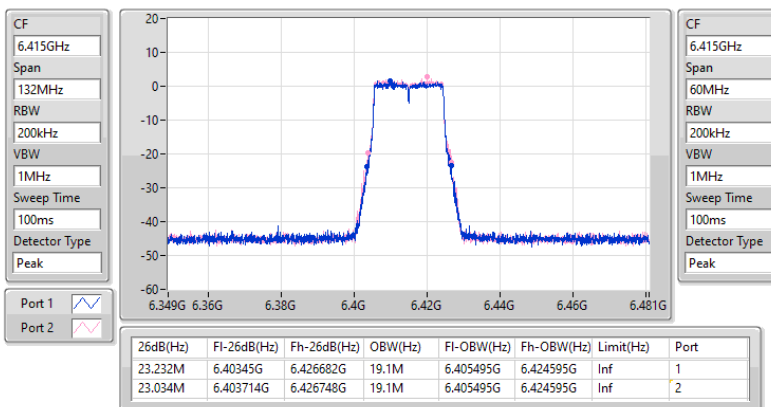




6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW



6435MHz

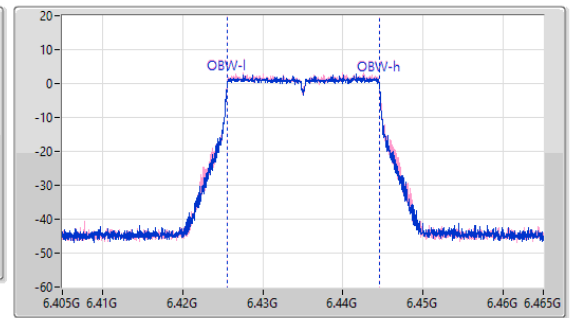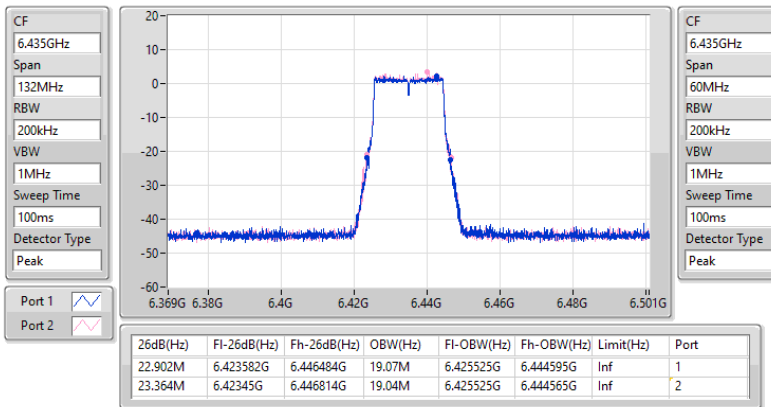

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

6475MHz

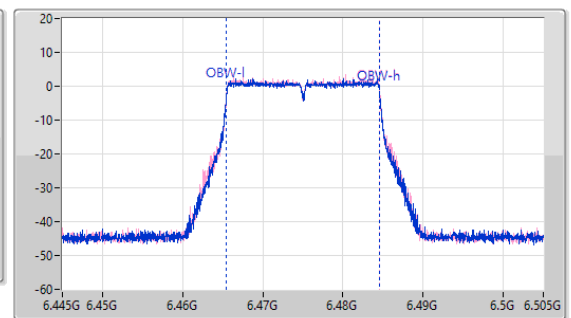
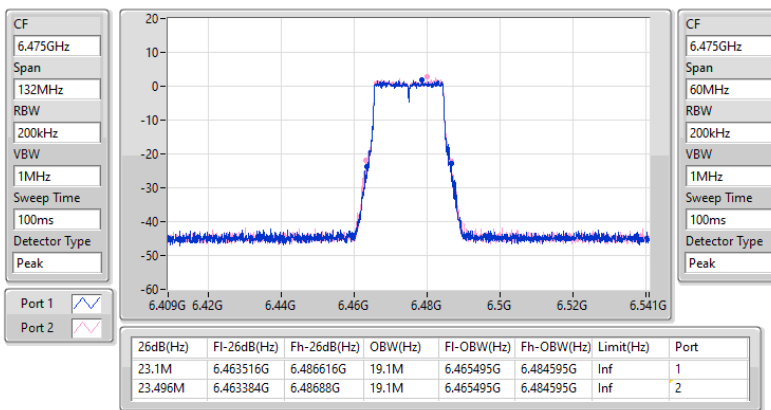




6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW



6515MHz

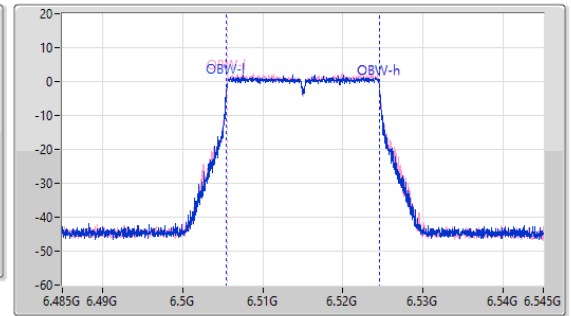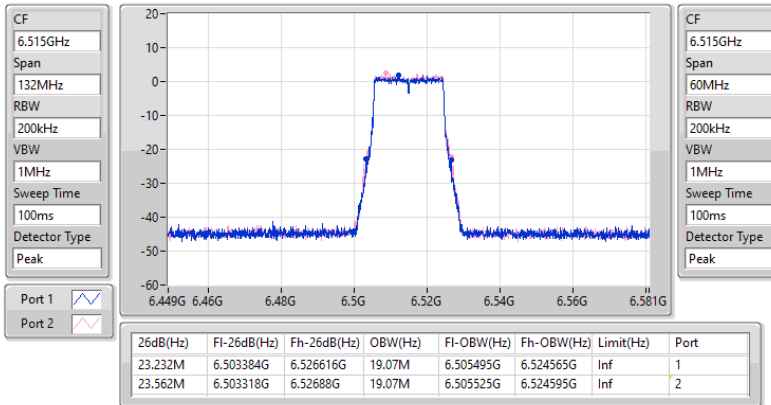

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

6535MHz

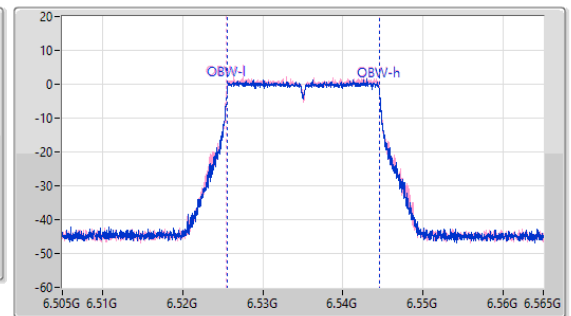
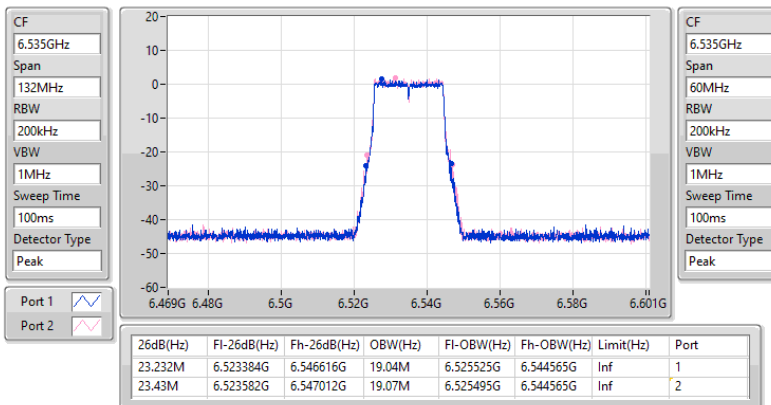




6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW



6715MHz

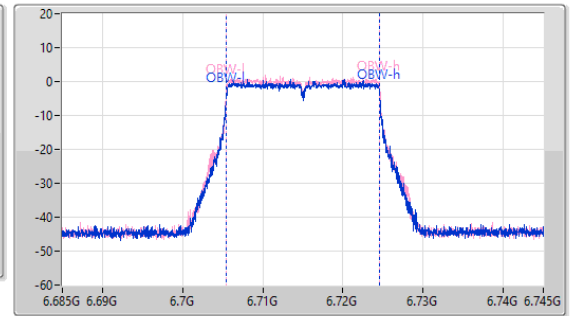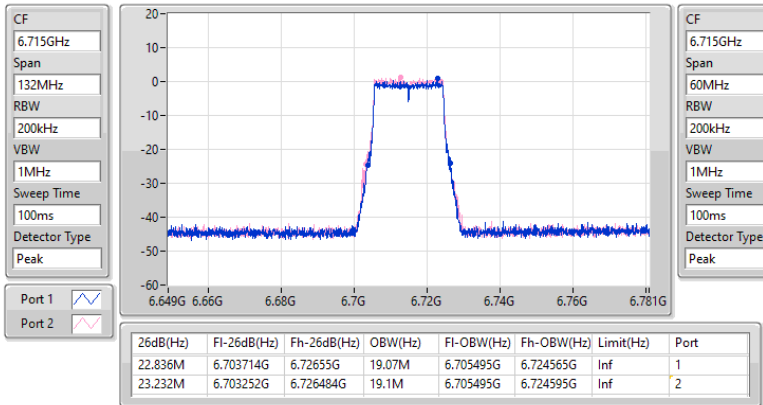

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW



6855MHz

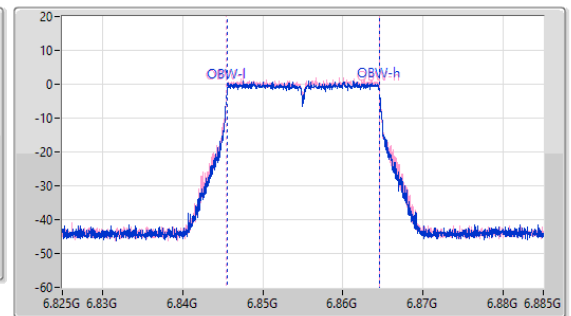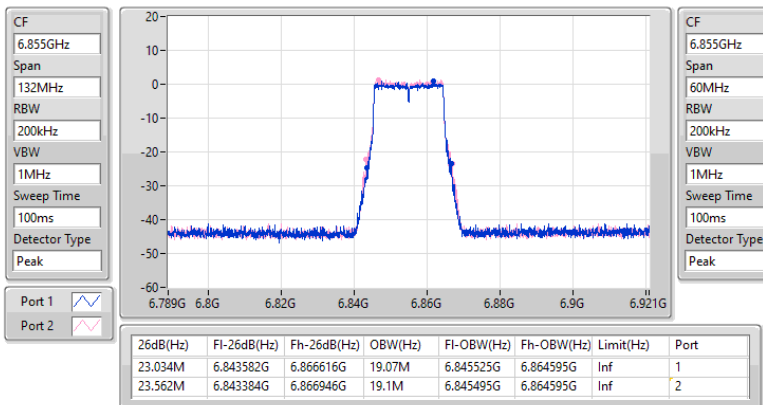

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW



6875MHz Straddle 6.525-6.875GHz

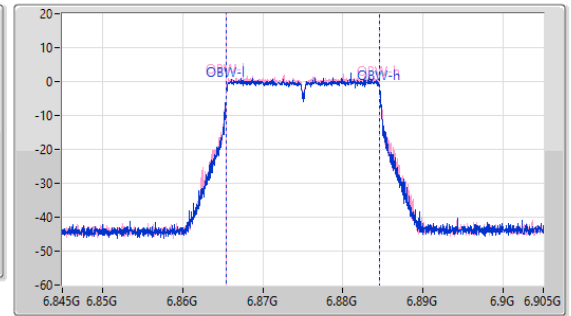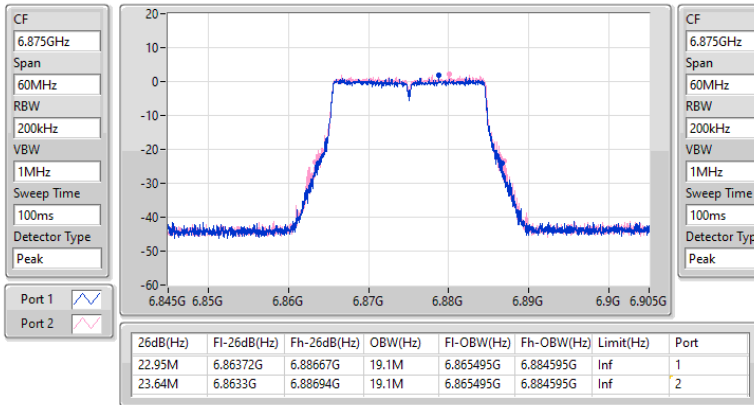

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW



6895MHz

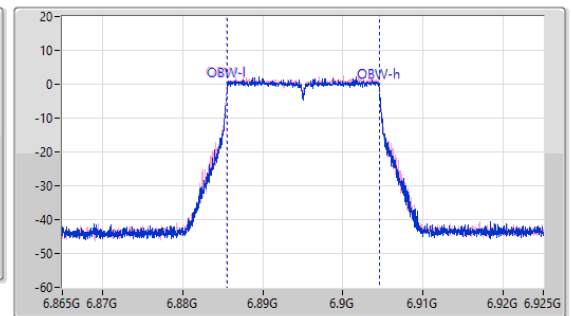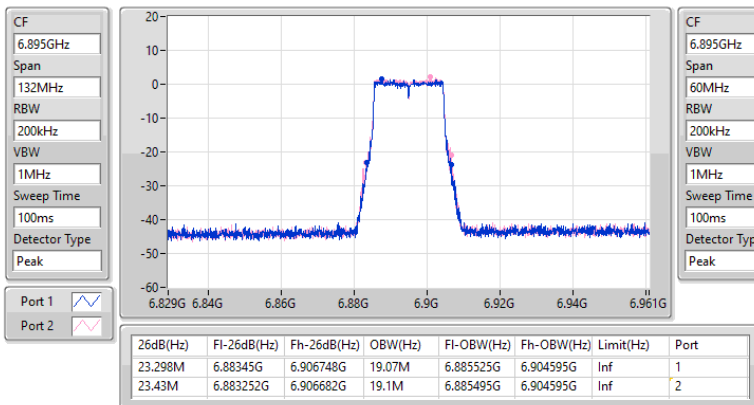

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW



7015MHz

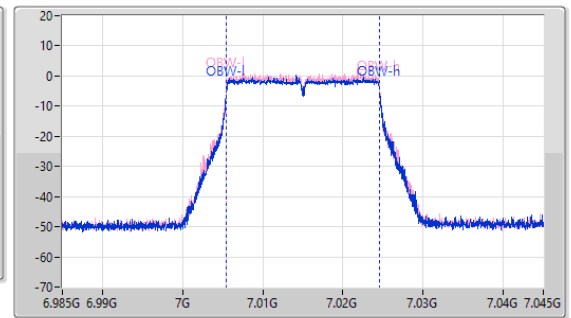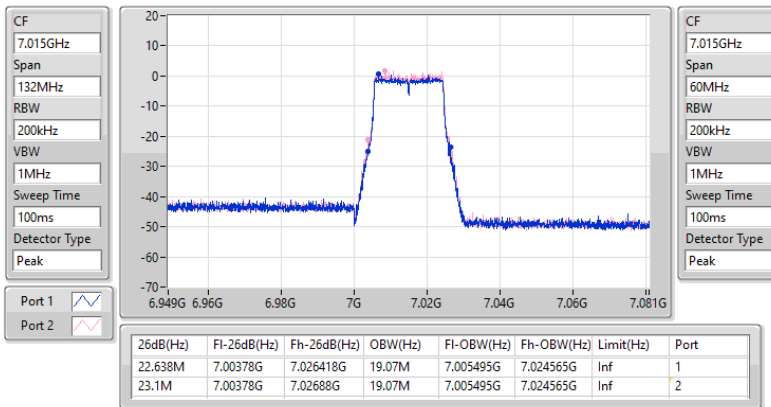

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW

7095MHz

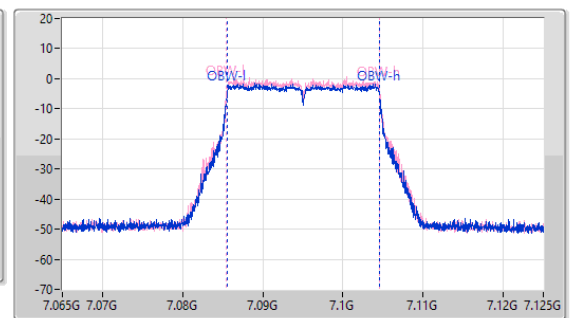
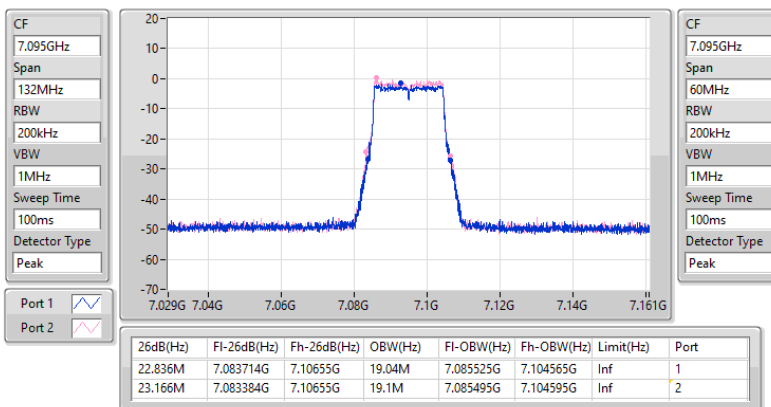




6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

EBW



7115MHz

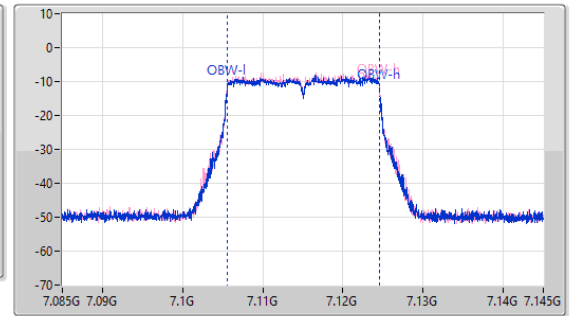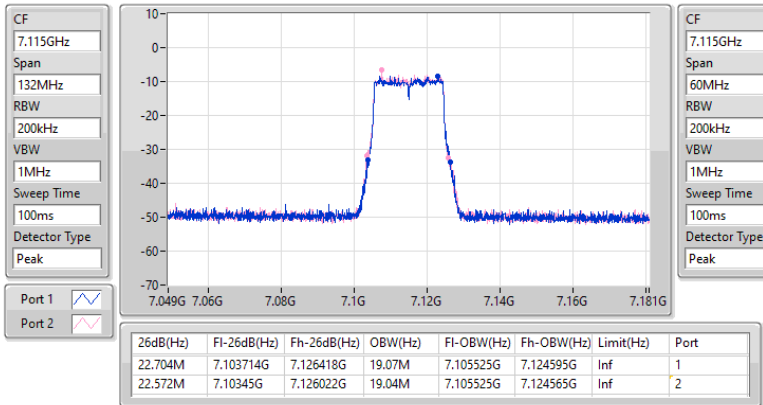

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW



5965MHz

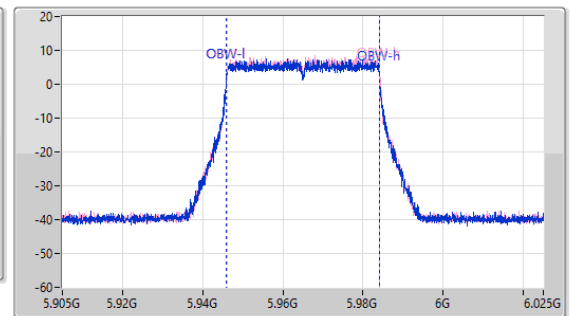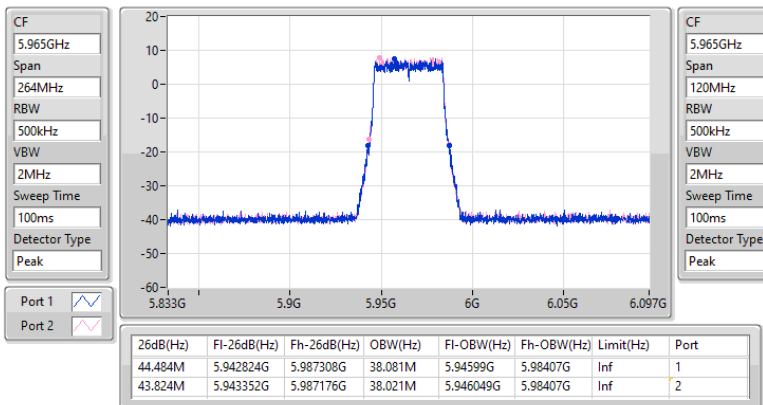

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW



6165MHz

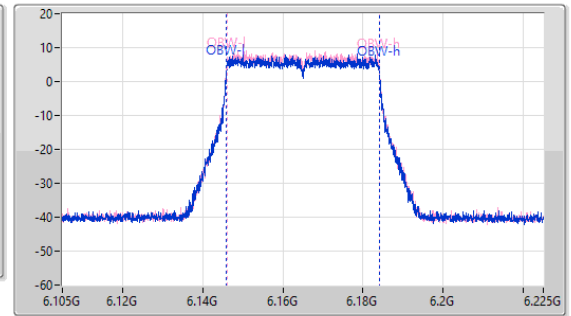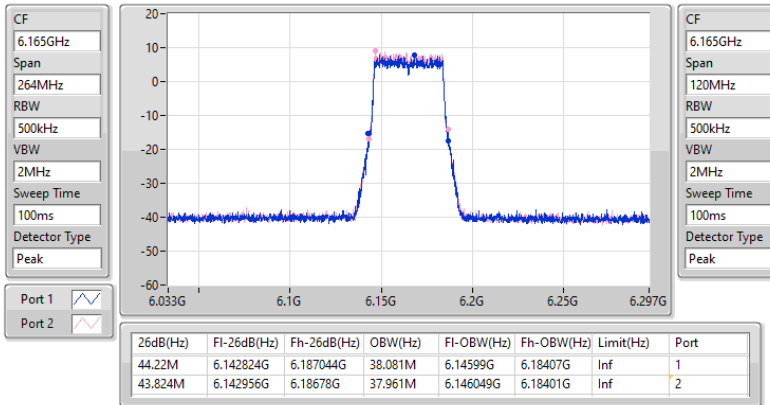

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW

6405MHz

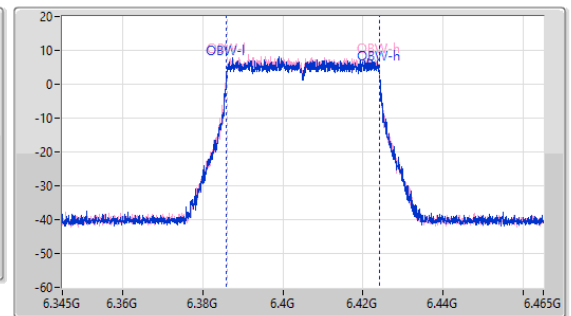
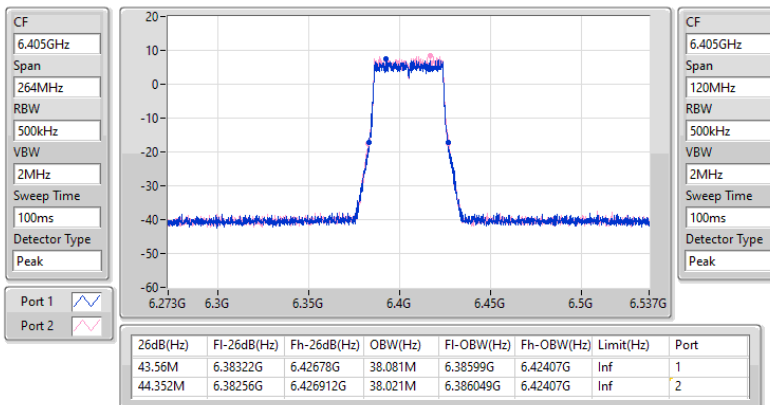




6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW



6445MHz

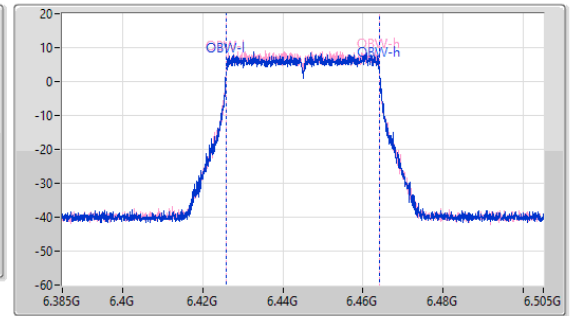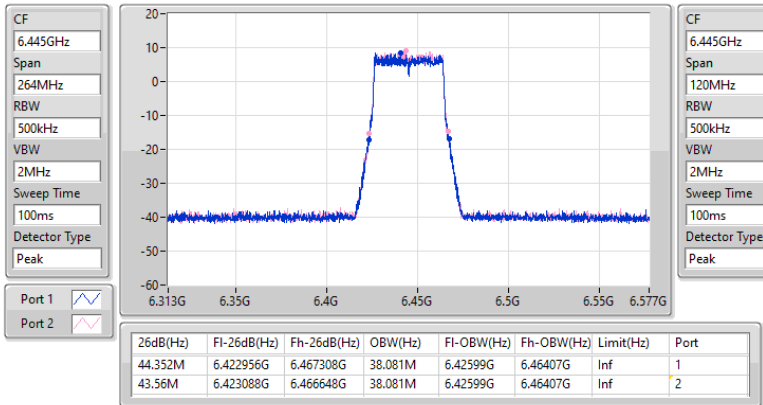

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW


6485MHz

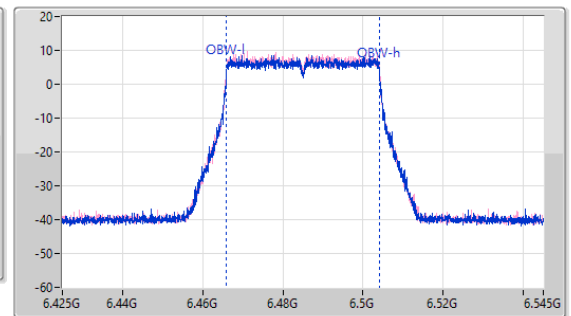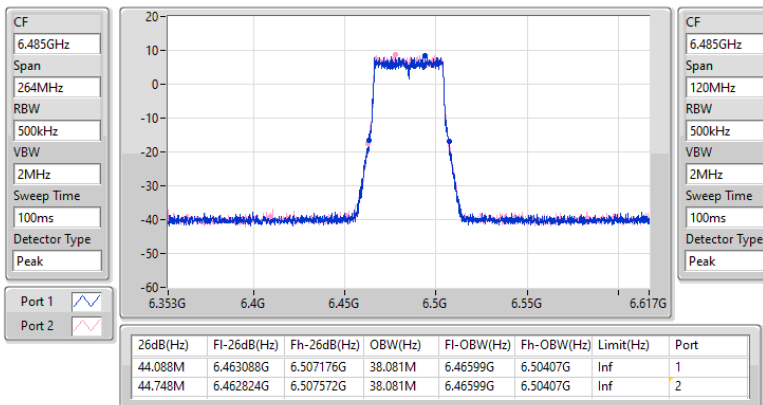

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW


6525MHz Straddle 6.525-6.875GHz

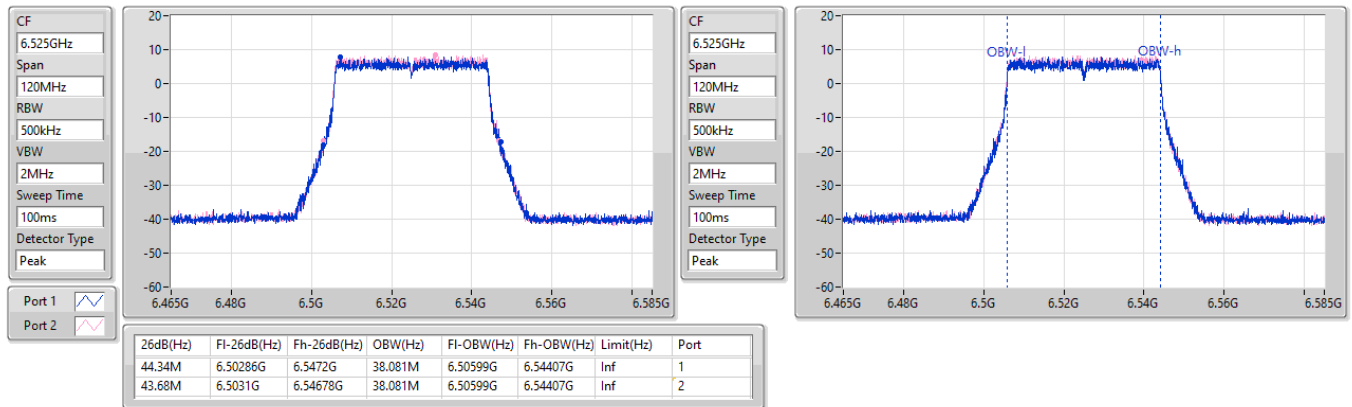

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW

6565MHz


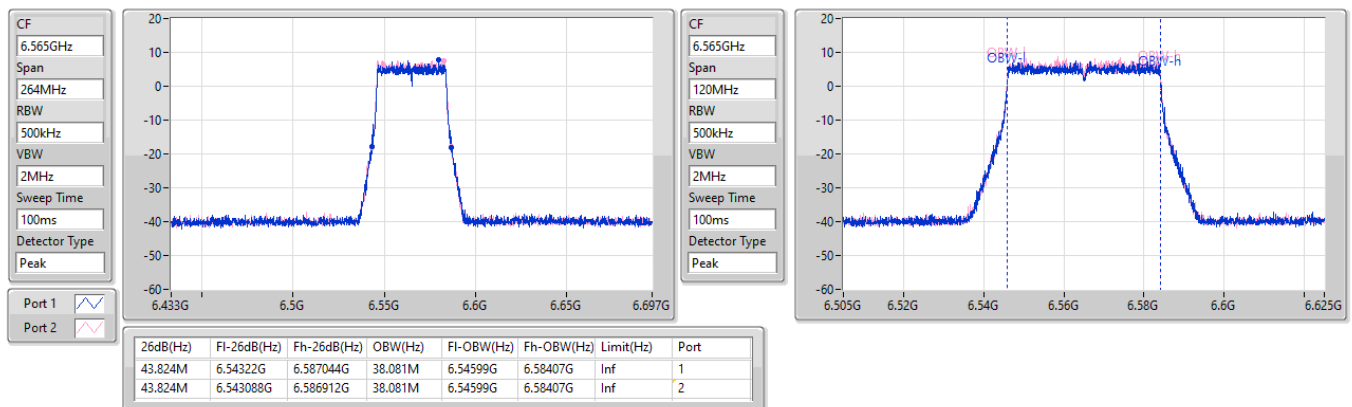




6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW



6725MHz

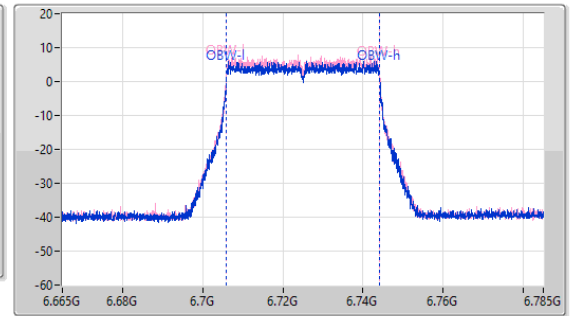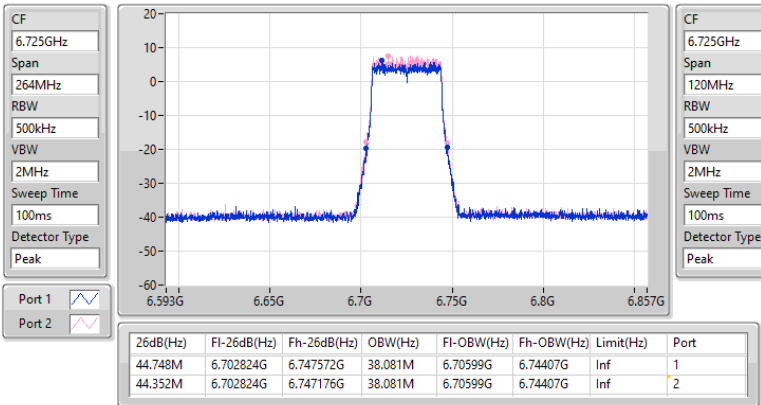

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW



6845MHz

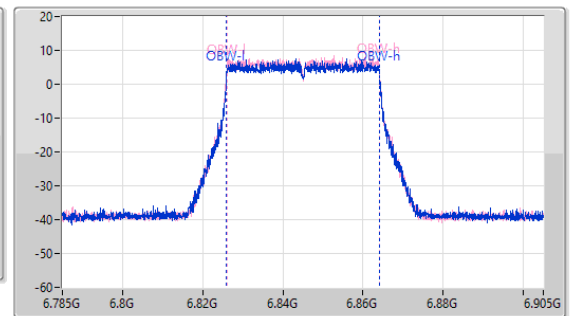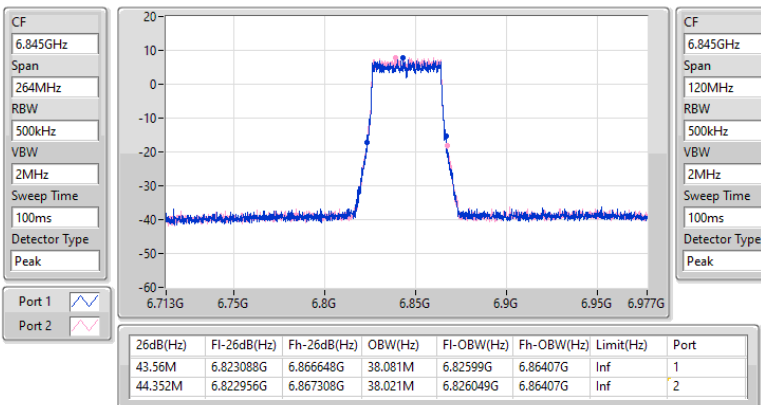

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW



6885MHz Straddle 6.525-6.875GHz

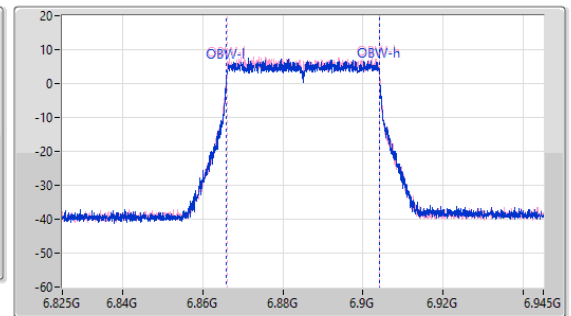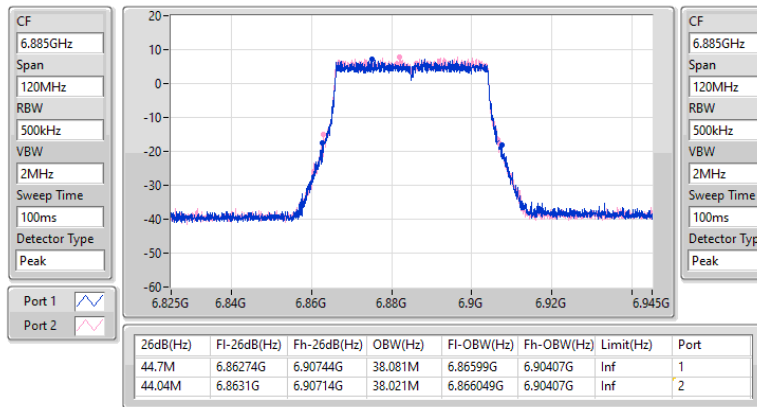

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW



6925MHz

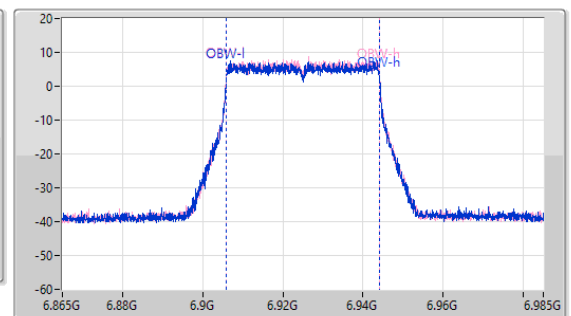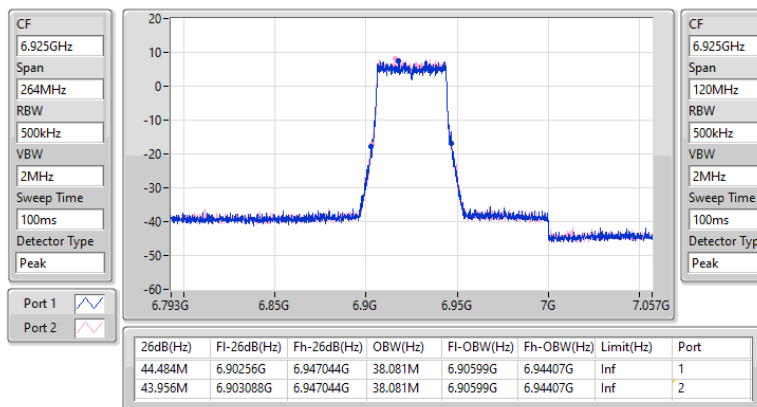

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW



7005MHz

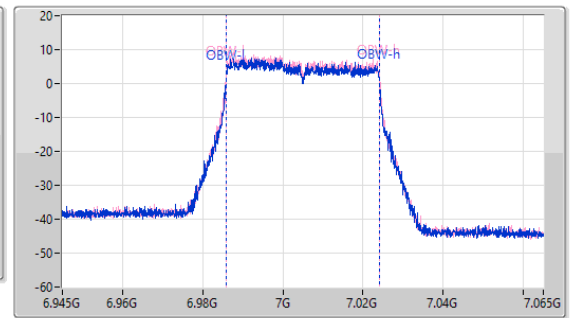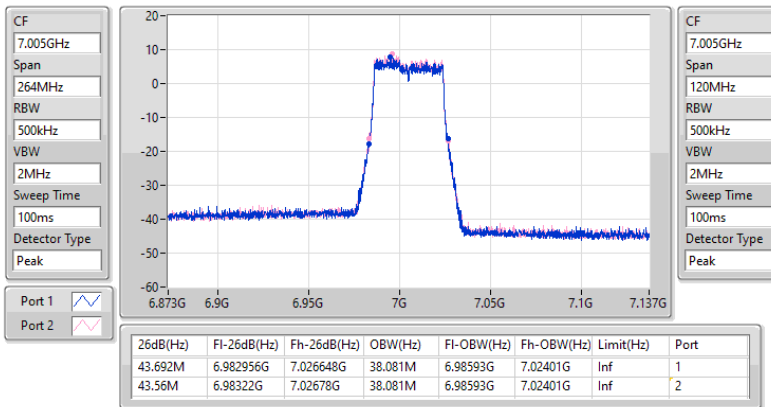

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

EBW



7085MHz

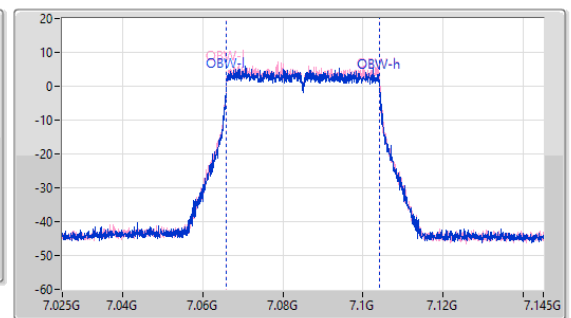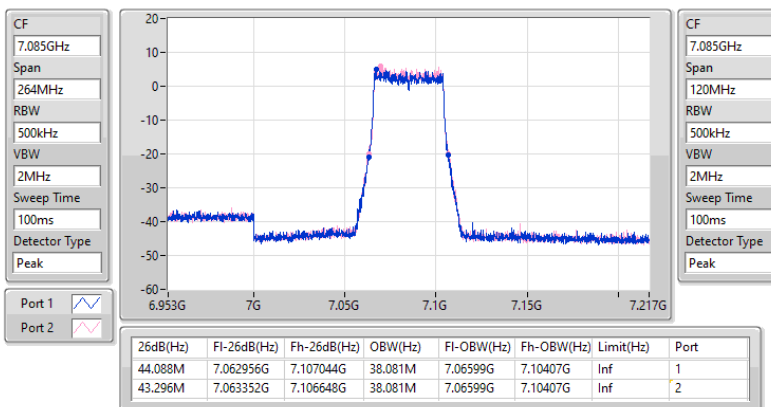

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW



5985MHz

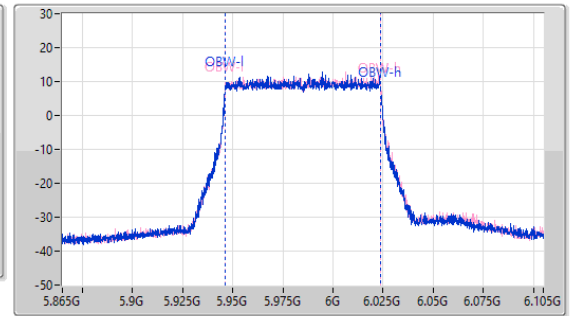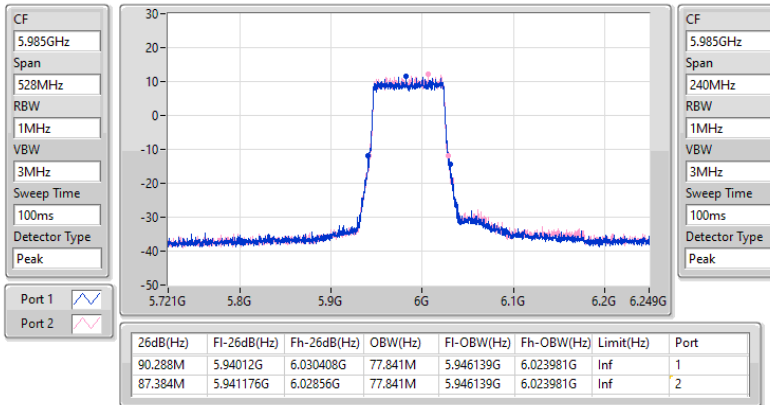

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW



6145MHz

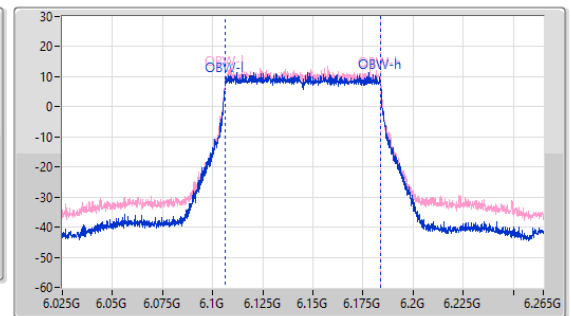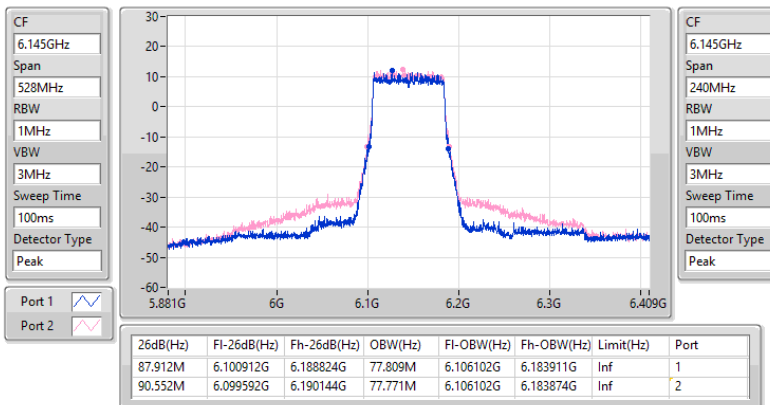

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW



6385MHz

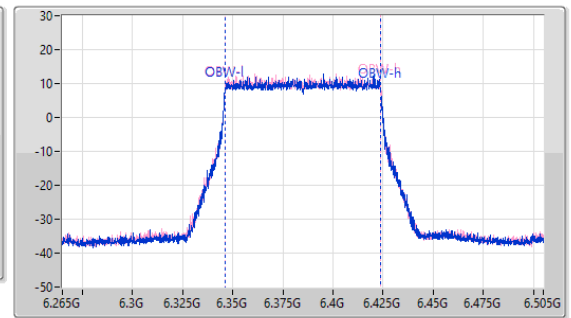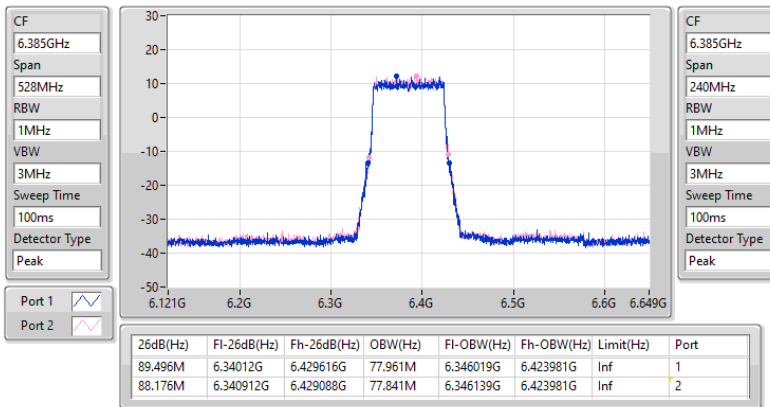

6.425-6.525GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW


6465MHz

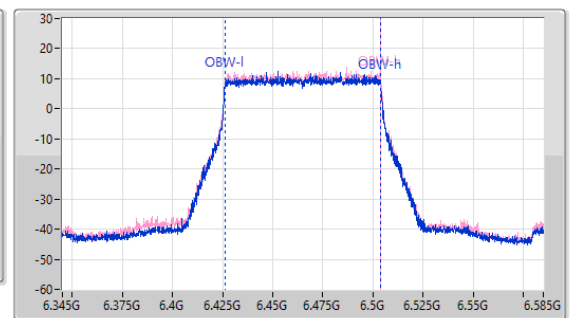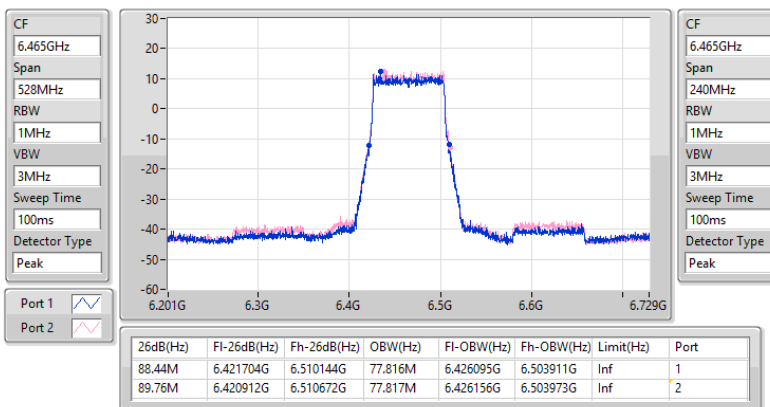

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW


6545MHz Straddle 6.525-6.875GHz

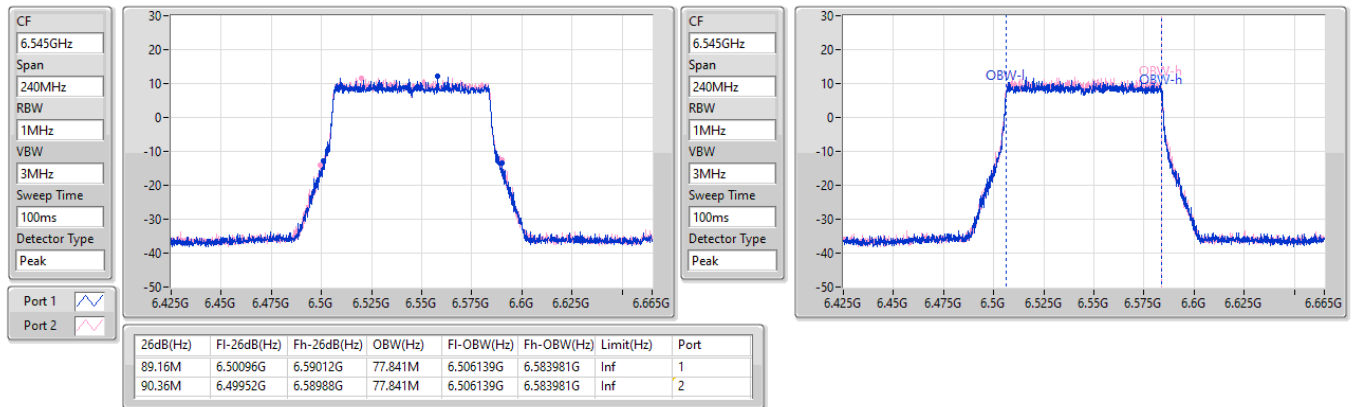

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW

6625MHz


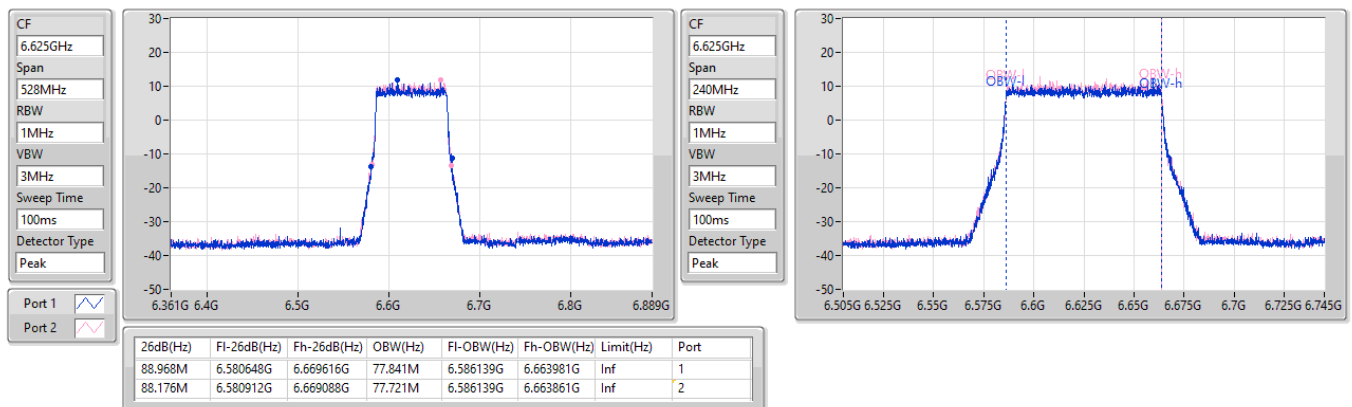




6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW



6705MHz

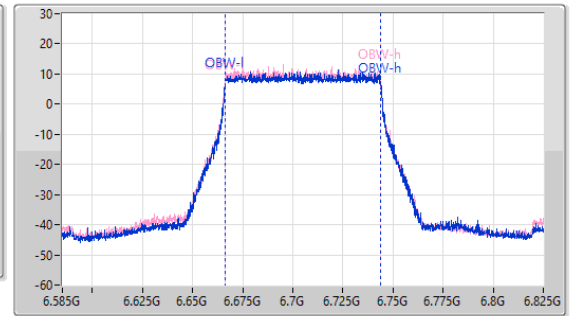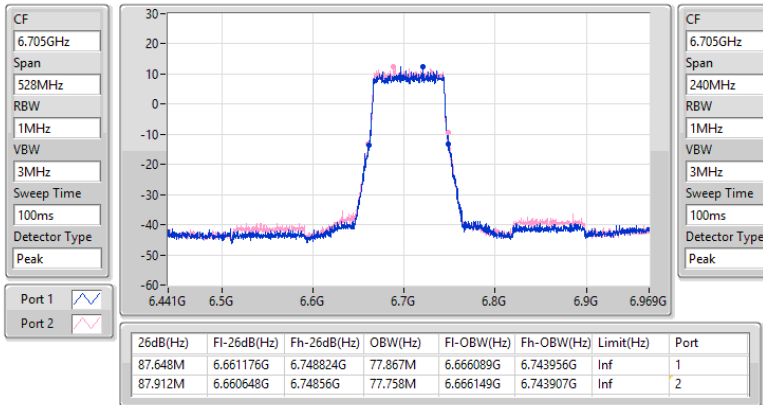

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW


6785MHz

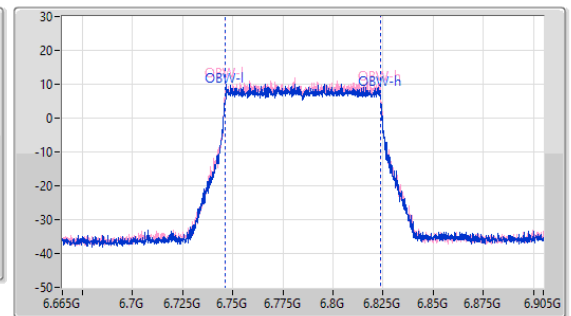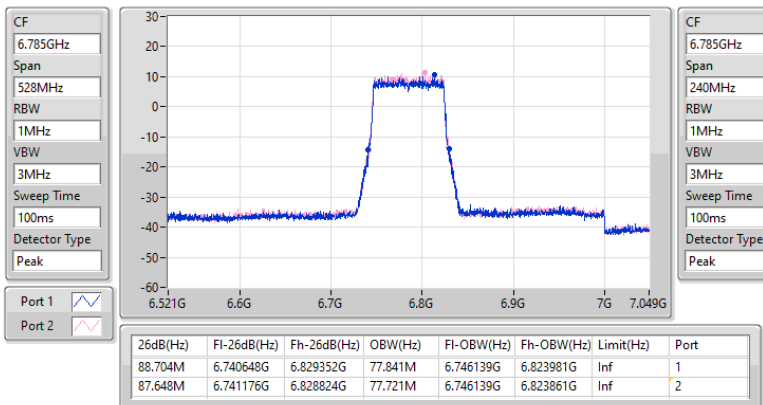

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW


6865MHz Straddle 6.525-6.875GHz

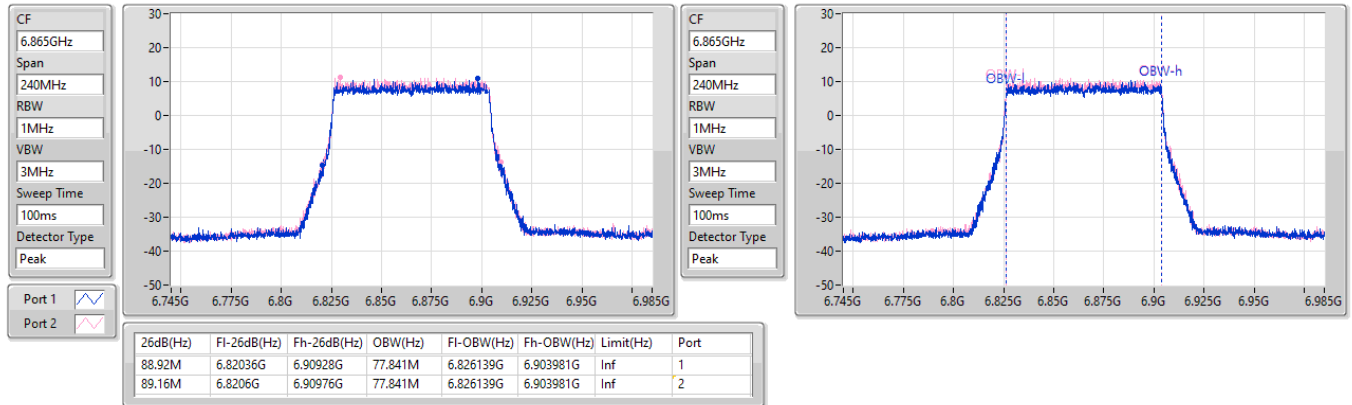

6.875-7.125GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW



6945MHz

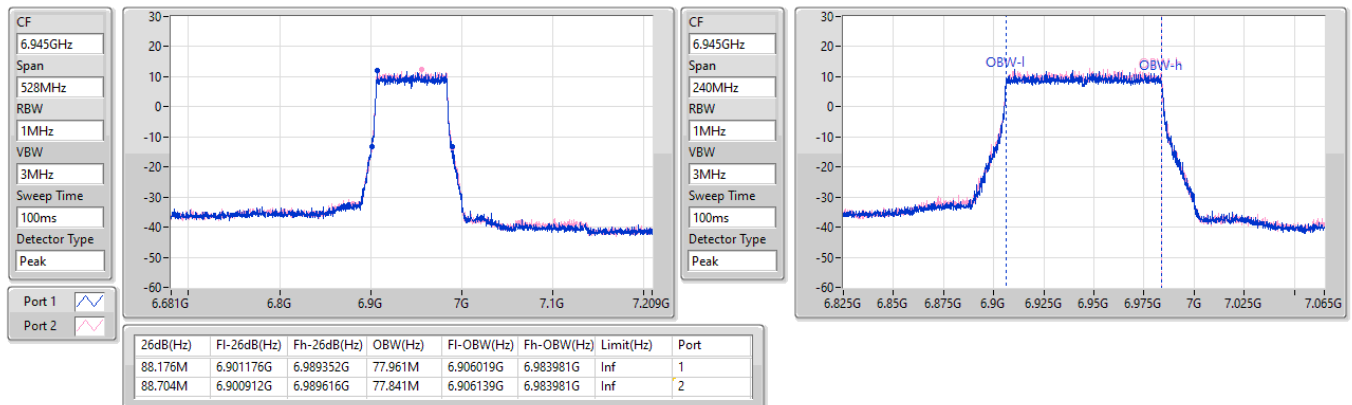

6.875-7.125GHz_802.11be EHT80_Nss2,(MCS0)_2TX

EBW



7025MHz

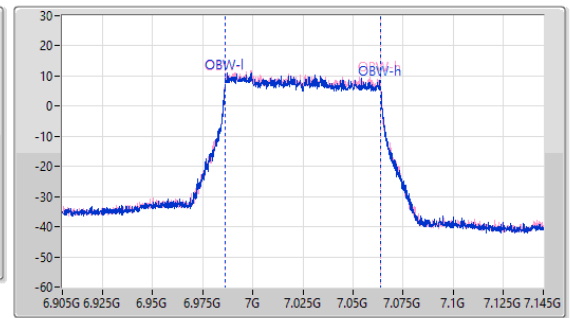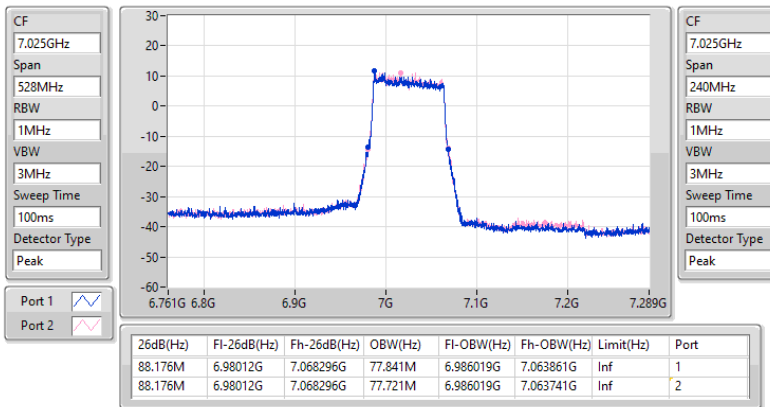

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

EBW



6025MHz

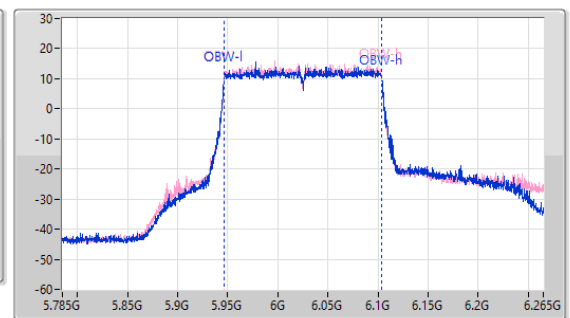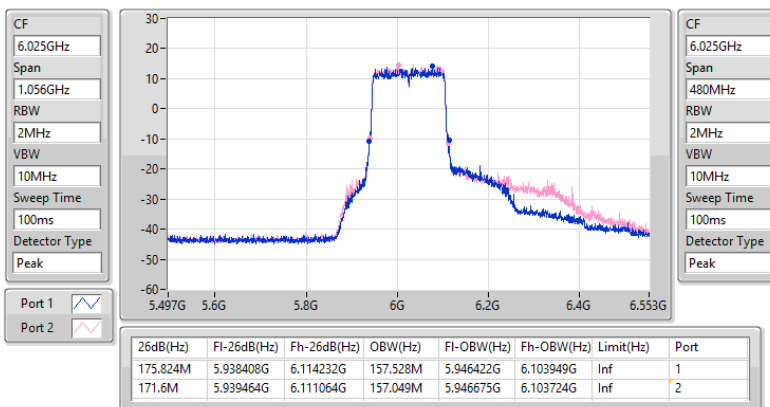

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

EBW



6185MHz

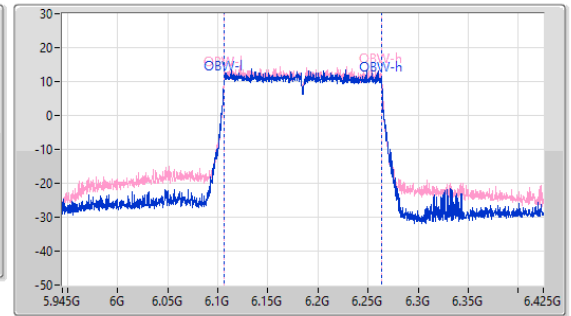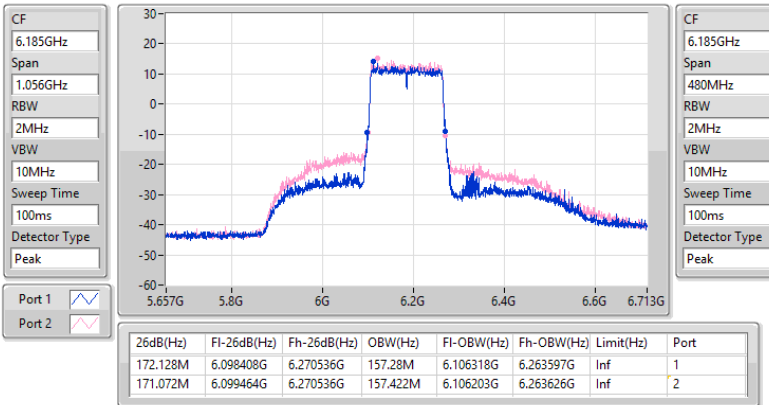

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

EBW



6345MHz

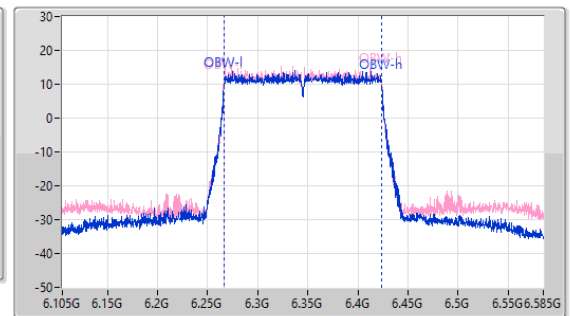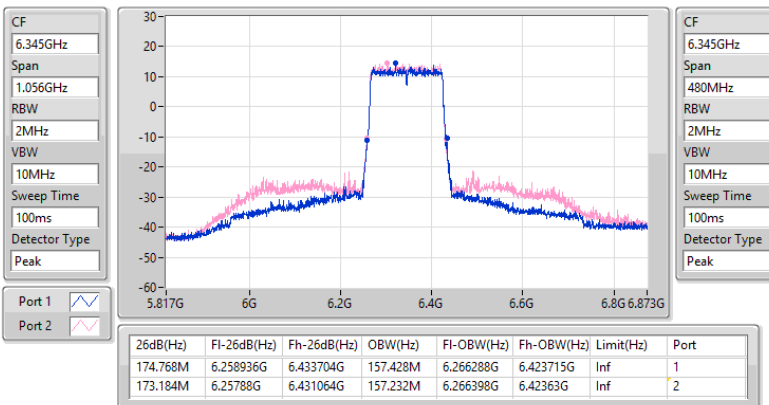

6.525-6.875GHz_802.11be EHT160_Nss2,(MCS0)_2TX

EBW



6505MHz Straddle 6.525-6.875GHz

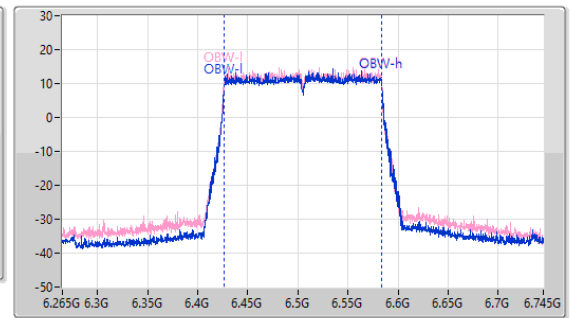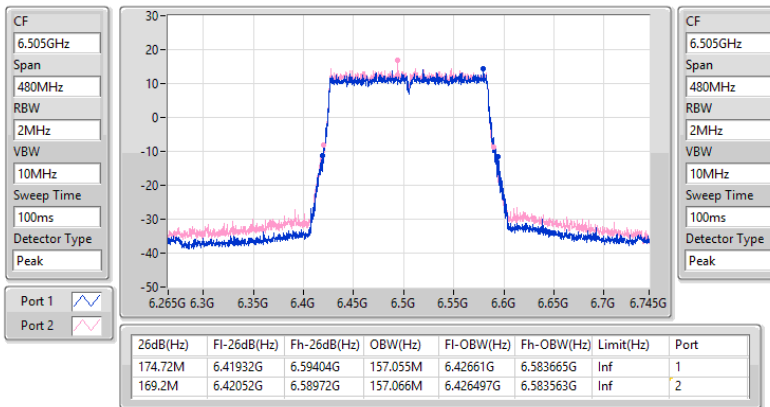

6.525-6.875GHz_802.11be EHT160_Nss2,(MCS0)_2TX

EBW

6665MHz

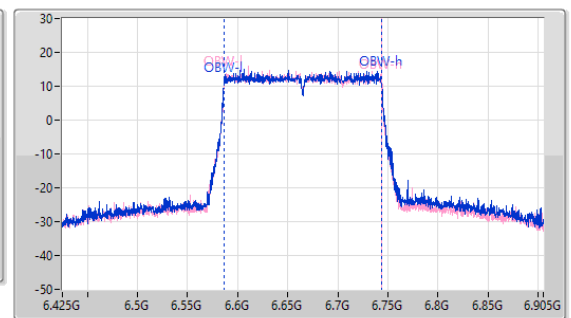
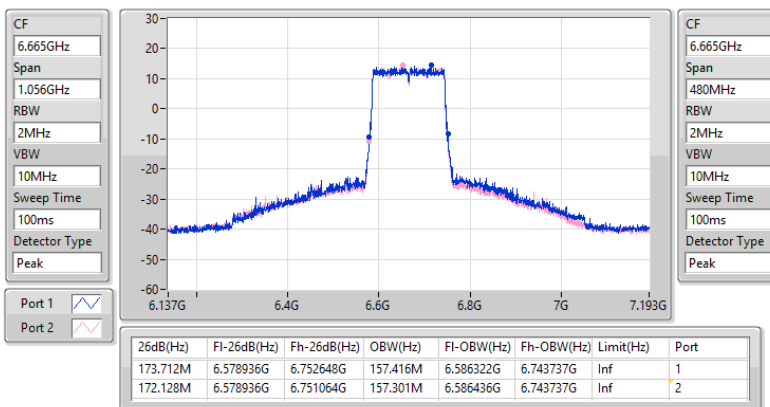




6.525-6.875GHz_802.11be EHT160_Nss2,(MCS0)_2TX

EBW



6825MHz Straddle 6.525-6.875GHz

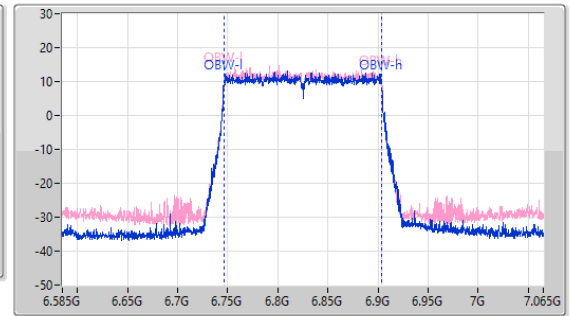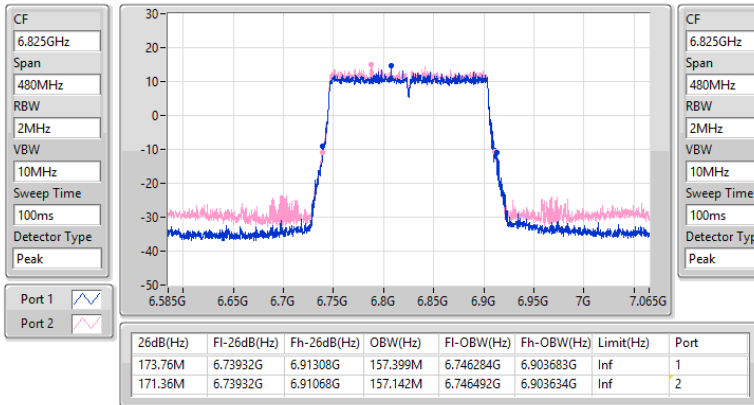

6.875-7.125GHz_802.11be EHT160_Nss2,(MCS0)_2TX

EBW

6985MHz

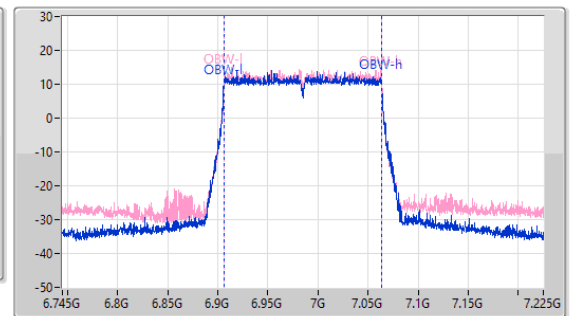
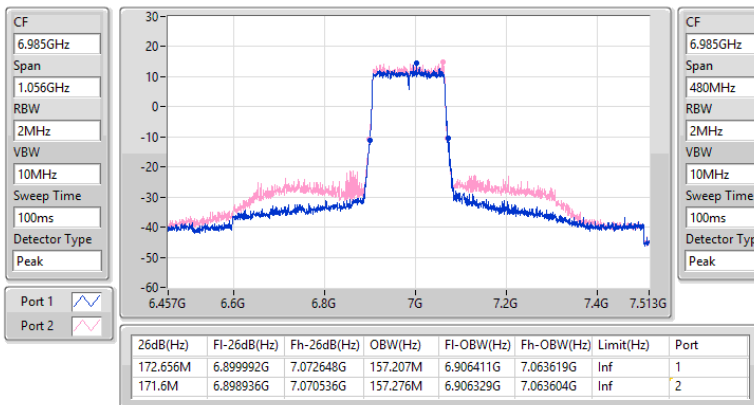




5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0)_2TX

EBW



6105MHz

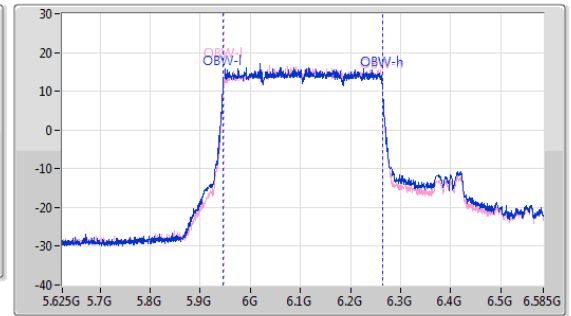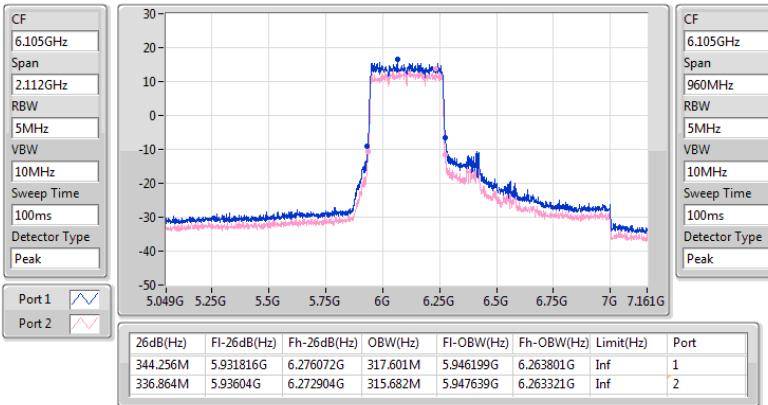

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0)_2TX

EBW


6265MHz

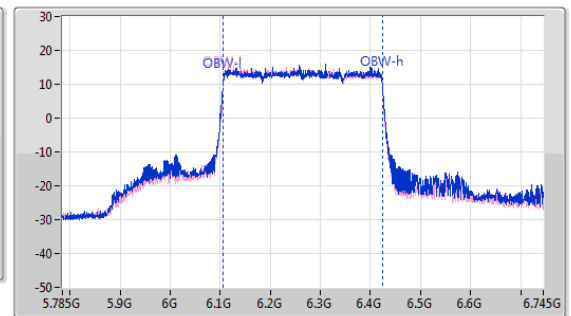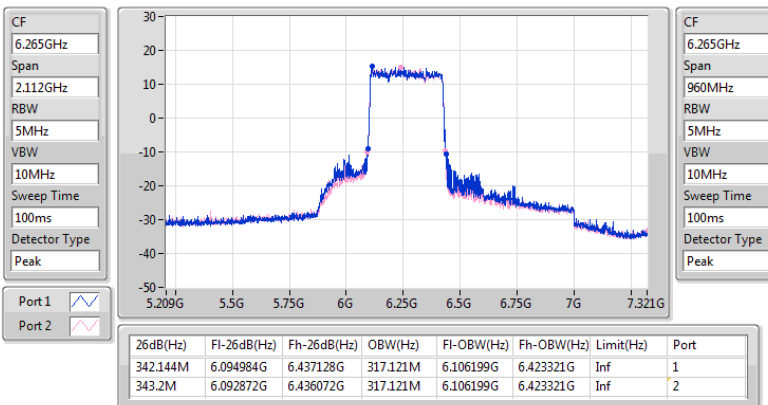

6.525-6.875GHz_802.11be EHT320_Nss2,(MCS0)_2TX

EBW


6425MHz Straddle 6.525-6.875GHz

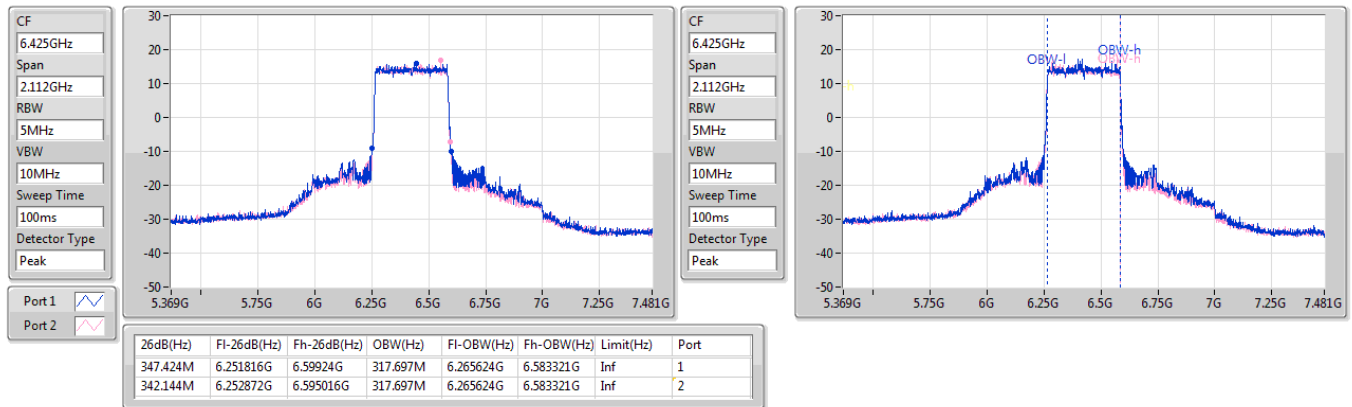

6.525-6.875GHz_802.11be EHT320_Nss2,(MCS0)_2TX

EBW


6585MHz Straddle 6.525-6.875GHz

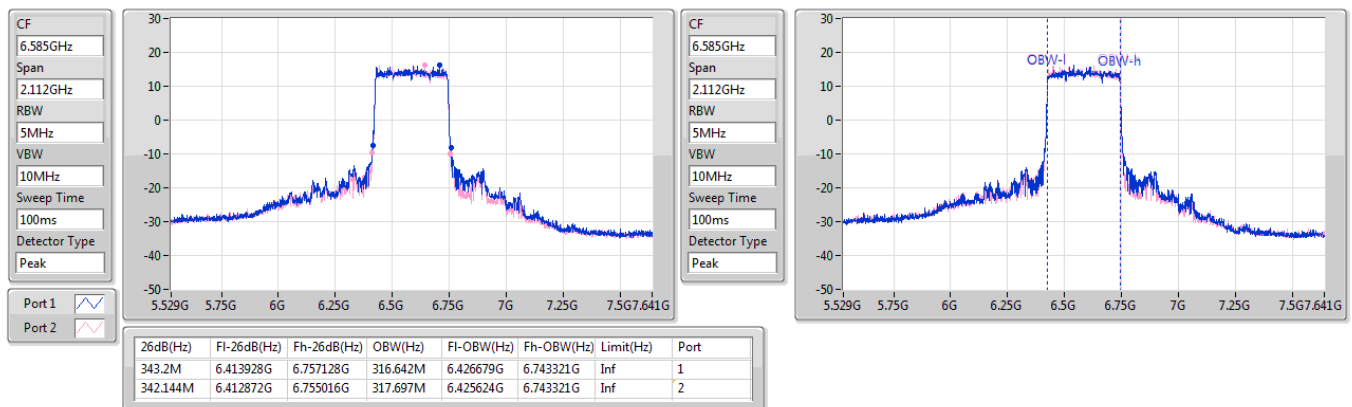

6.525-6.875GHz_802.11be EHT320_Nss2,(MCS0)_2TX

EBW


6745MHz Straddle 6.525-6.875GHz

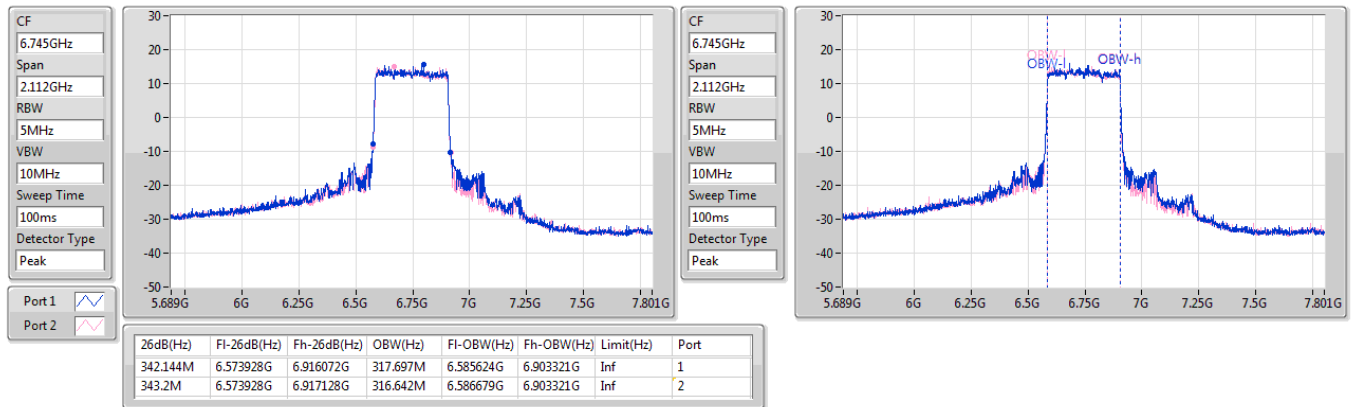

6.525-6.875GHz_802.11be EHT320_Nss2,(MCS0)_2TX

EBW

6905MHz Straddle 6.525-6.875GHz

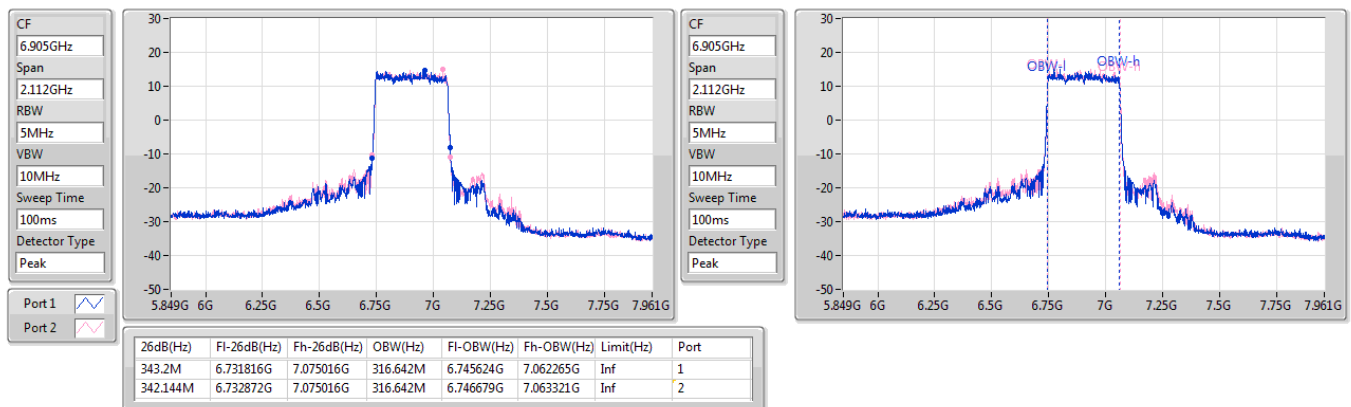

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	15.51	0.03556	18.14	0.06516
802.11be EHT40_Nss2,(MCS0)_2TX	18.87	0.07709	21.50	0.14125
802.11be EHT80_Nss2,(MCS0)_2TX	22.08	0.16144	24.71	0.29580
802.11be EHT160_Nss2,(MCS0)_2TX	24.36	0.27290	26.99	0.50003
802.11be EHT320_Nss2,(MCS0)_2TX	23.65	0.23174	26.28	0.42462
6.425-6.525GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	15.86	0.03855	18.47	0.07031
802.11be EHT40_Nss2,(MCS0)_2TX	19.02	0.07980	21.63	0.14555
802.11be EHT80_Nss2,(MCS0)_2TX	21.99	0.15812	24.60	0.28840
6.525-6.875GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	15.08	0.03221	18.55	0.07161
802.11be EHT40_Nss2,(MCS0)_2TX	18.30	0.06761	21.77	0.15031
802.11be EHT80_Nss2,(MCS0)_2TX	21.22	0.13243	24.69	0.29444
802.11be EHT160_Nss2,(MCS0)_2TX	23.98	0.25003	27.45	0.55590
802.11be EHT320_Nss2,(MCS0)_2TX	24.02	0.25235	27.49	0.56105
6.875-7.125GHz	-	-	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	15.49	0.03540	18.63	0.07295
802.11be EHT40_Nss2,(MCS0)_2TX	18.45	0.06998	21.59	0.14421
802.11be EHT80_Nss2,(MCS0)_2TX	21.61	0.14488	24.75	0.29854
802.11be EHT160_Nss2,(MCS0)_2TX	24.18	0.26182	27.32	0.53951

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5935MHz	Pass	2.63	4.64	5.18	7.93	Inf	10.56	30.00
5955MHz	Pass	2.63	12.25	12.61	15.44	Inf	18.07	30.00
6175MHz	Pass	2.63	12.17	12.78	15.50	Inf	18.13	30.00
6415MHz	Pass	2.63	12.09	12.88	15.51	Inf	18.14	30.00
6435MHz	Pass	2.61	12.39	13.27	15.86	Inf	18.47	30.00
6475MHz	Pass	2.61	12.25	12.98	15.64	Inf	18.25	30.00
6515MHz	Pass	2.61	12.22	12.95	15.61	Inf	18.22	30.00
6535MHz	Pass	3.47	11.68	12.42	15.08	Inf	18.55	30.00
6715MHz	Pass	3.47	11.54	12.09	14.83	Inf	18.30	30.00
6855MHz	Pass	3.47	11.46	12.27	14.89	Inf	18.36	30.00
6875MHz Straddle 6.525-6.875GHz	Pass	3.47	11.55	12.23	14.91	Inf	18.38	30.00
6895MHz	Pass	3.14	12.18	12.76	15.49	Inf	18.63	30.00
7015MHz	Pass	3.14	11.48	12.35	14.95	Inf	18.09	30.00
7095MHz	Pass	3.14	11.44	12.33	14.92	Inf	18.06	30.00
7115MHz	Pass	3.14	3.94	3.89	6.93	Inf	10.07	30.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	2.63	15.34	16.09	18.74	Inf	21.37	30.00
6165MHz	Pass	2.63	15.52	16.18	18.87	Inf	21.50	30.00
6405MHz	Pass	2.63	15.02	15.8	18.44	Inf	21.07	30.00
6445MHz	Pass	2.61	15.52	16.34	18.96	Inf	21.57	30.00
6485MHz	Pass	2.61	15.61	16.37	19.02	Inf	21.63	30.00
6525MHz Straddle 6.525-6.875GHz	Pass	3.47	14.95	15.6	18.30	Inf	21.77	30.00
6565MHz	Pass	3.47	14.55	15.13	17.86	Inf	21.33	30.00
6725MHz	Pass	3.47	14.51	15.15	17.85	Inf	21.32	30.00
6845MHz	Pass	3.47	14.75	15.51	18.16	Inf	21.63	30.00
6885MHz Straddle 6.525-6.875GHz	Pass	3.47	14.3	15.19	17.78	Inf	21.25	30.00
6925MHz	Pass	3.14	14.69	15.32	18.03	Inf	21.17	30.00
7005MHz	Pass	3.14	15.08	15.78	18.45	Inf	21.59	30.00
7085MHz	Pass	3.14	14.59	15.35	18.00	Inf	21.14	30.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	2.63	18.72	19.04	21.89	Inf	24.52	30.00
6145MHz	Pass	2.63	18.67	19.12	21.91	Inf	24.54	30.00
6385MHz	Pass	2.63	18.76	19.36	22.08	Inf	24.71	30.00
6465MHz	Pass	2.61	18.74	19.21	21.99	Inf	24.60	30.00
6545MHz Straddle 6.525-6.875GHz	Pass	3.47	17.7	18.67	21.22	Inf	24.69	30.00
6625MHz	Pass	3.47	17.61	18.53	21.10	Inf	24.57	30.00
6705MHz	Pass	3.47	17.6	18.4	21.03	Inf	24.50	30.00
6785MHz	Pass	3.47	17.15	18.07	20.64	Inf	24.11	30.00
6865MHz Straddle 6.525-6.875GHz	Pass	3.47	17.12	18.02	20.60	Inf	24.07	30.00
6945MHz	Pass	3.14	18.21	18.95	21.61	Inf	24.75	30.00
7025MHz	Pass	3.14	18.08	18.89	21.51	Inf	24.65	30.00
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	2.63	20.99	21.29	24.15	Inf	26.78	30.00
6185MHz	Pass	2.63	20.87	21.27	24.08	Inf	26.71	30.00

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6345MHz	Pass	2.63	21.06	21.62	24.36	Inf	26.99	30.00
6505MHz Straddle 6.525-6.875GHz	Pass	3.47	20.51	20.86	23.70	Inf	27.17	30.00
6665MHz	Pass	3.47	20.8	21.14	23.98	Inf	27.45	30.00
6825MHz Straddle 6.525-6.875GHz	Pass	3.47	20.32	20.69	23.52	Inf	26.99	30.00
6985MHz	Pass	3.14	20.88	21.45	24.18	Inf	27.32	30.00
802.11be EHT320_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	2.63	20.53	20.74	23.65	Inf	26.28	30.00
6265MHz	Pass	2.63	20.36	20.66	23.52	Inf	26.15	30.00
6425MHz Straddle 6.525-6.875GHz	Pass	3.47	20.79	21.22	24.02	Inf	27.49	30.00
6585MHz Straddle 6.525-6.875GHz	Pass	3.47	20.49	21.07	23.80	Inf	27.27	30.00
6745MHz Straddle 6.525-6.875GHz	Pass	3.47	19.86	20.32	23.11	Inf	26.58	30.00
6905MHz Straddle 6.525-6.875GHz	Pass	3.47	19.38	20.08	22.75	Inf	26.22	30.00

DG = Directional Gain; Port X = Port X output power

Directional Gain = $10 \log [(10^{G1/10} + 10^{G2/10})/N_{ANT}]$

Ant. No.	Operating Frequencies (MHz) / Antenna Gain (dBi)			
	5925 ~ 6425	6425 ~ 6525	6525 ~ 6875	6875 ~ 7125
1	3.75	2.77	4.09	3.49
2	1.11	2.45	2.75	2.75
Directional Gain (dBi)	2.63	2.61	3.47	3.14

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20-BF_Nss2,(MCS0)_2TX	12.50	0.01778	15.13	0.03258
802.11be EHT40-BF_Nss2,(MCS0)_2TX	15.86	0.03855	18.49	0.07063
802.11be EHT80-BF_Nss2,(MCS0)_2TX	19.07	0.08072	21.70	0.14791
802.11be EHT160-BF_Nss2,(MCS0)_2TX	21.35	0.13646	23.98	0.25003
802.11be EHT320-BF_Nss2,(MCS0)_2TX	20.64	0.11588	23.27	0.21232
6.425-6.525GHz	-	-	-	-
802.11be EHT20-BF_Nss2,(MCS0)_2TX	12.85	0.01928	15.46	0.03516
802.11be EHT40-BF_Nss2,(MCS0)_2TX	16.01	0.03990	18.62	0.07278
802.11be EHT80-BF_Nss2,(MCS0)_2TX	18.98	0.07907	21.59	0.14421
6.525-6.875GHz	-	-	-	-
802.11be EHT20-BF_Nss2,(MCS0)_2TX	12.07	0.01611	15.54	0.03581
802.11be EHT40-BF_Nss2,(MCS0)_2TX	15.29	0.03381	18.76	0.07516
802.11be EHT80-BF_Nss2,(MCS0)_2TX	18.21	0.06622	21.68	0.14723
802.11be EHT160-BF_Nss2,(MCS0)_2TX	20.97	0.12503	24.44	0.27797
802.11be EHT320-BF_Nss2,(MCS0)_2TX	21.01	0.12618	24.48	0.28054
6.875-7.125GHz	-	-	-	-
802.11be EHT20-BF_Nss2,(MCS0)_2TX	12.48	0.01770	15.62	0.03648
802.11be EHT40-BF_Nss2,(MCS0)_2TX	15.44	0.03499	18.58	0.07211
802.11be EHT80-BF_Nss2,(MCS0)_2TX	18.60	0.07244	21.74	0.14928
802.11be EHT160-BF_Nss2,(MCS0)_2TX	21.17	0.13092	24.31	0.26977

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5935MHz	Pass	2.63	1.63	2.17	4.92	Inf	7.55	30.00
5955MHz	Pass	2.63	9.24	9.6	12.43	Inf	15.06	30.00
6175MHz	Pass	2.63	9.16	9.77	12.49	Inf	15.12	30.00
6415MHz	Pass	2.63	9.08	9.87	12.50	Inf	15.13	30.00
6435MHz	Pass	2.61	9.38	10.26	12.85	Inf	15.46	30.00
6475MHz	Pass	2.61	9.24	9.97	12.63	Inf	15.24	30.00
6515MHz	Pass	2.61	9.21	9.94	12.60	Inf	15.21	30.00
6535MHz	Pass	3.47	8.67	9.41	12.07	Inf	15.54	30.00
6715MHz	Pass	3.47	8.53	9.08	11.82	Inf	15.29	30.00
6855MHz	Pass	3.47	8.45	9.26	11.88	Inf	15.35	30.00
6875MHz Straddle 6.525-6.875GHz	Pass	3.47	8.54	9.22	11.90	Inf	15.37	30.00
6895MHz	Pass	3.14	9.17	9.75	12.48	Inf	15.62	30.00
7015MHz	Pass	3.14	8.47	9.34	11.94	Inf	15.08	30.00
7095MHz	Pass	3.14	8.43	9.32	11.91	Inf	15.05	30.00
7115MHz	Pass	3.14	0.93	0.88	3.92	Inf	7.06	30.00
802.11be EHT40-BF_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	2.63	12.33	13.08	15.73	Inf	18.36	30.00
6165MHz	Pass	2.63	12.51	13.17	15.86	Inf	18.49	30.00
6405MHz	Pass	2.63	12.01	12.79	15.43	Inf	18.06	30.00
6445MHz	Pass	2.61	12.51	13.33	15.95	Inf	18.56	30.00
6485MHz	Pass	2.61	12.6	13.36	16.01	Inf	18.62	30.00
6525MHz Straddle 6.525-6.875GHz	Pass	3.47	11.94	12.59	15.29	Inf	18.76	30.00
6565MHz	Pass	3.47	11.54	12.12	14.85	Inf	18.32	30.00
6725MHz	Pass	3.47	11.5	12.14	14.84	Inf	18.31	30.00
6845MHz	Pass	3.47	11.74	12.5	15.15	Inf	18.62	30.00
6885MHz Straddle 6.525-6.875GHz	Pass	3.47	11.29	12.18	14.77	Inf	18.24	30.00
6925MHz	Pass	3.14	11.68	12.31	15.02	Inf	18.16	30.00
7005MHz	Pass	3.14	12.07	12.77	15.44	Inf	18.58	30.00
7085MHz	Pass	3.14	11.58	12.34	14.99	Inf	18.13	30.00
802.11be EHT80-BF_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	2.63	15.71	16.03	18.88	Inf	21.51	30.00
6145MHz	Pass	2.63	15.66	16.11	18.90	Inf	21.53	30.00
6385MHz	Pass	2.63	15.75	16.35	19.07	Inf	21.70	30.00
6465MHz	Pass	2.61	15.73	16.2	18.98	Inf	21.59	30.00
6545MHz Straddle 6.525-6.875GHz	Pass	3.47	14.69	15.66	18.21	Inf	21.68	30.00
6625MHz	Pass	3.47	14.6	15.52	18.09	Inf	21.56	30.00
6705MHz	Pass	3.47	14.59	15.39	18.02	Inf	21.49	30.00
6785MHz	Pass	3.47	14.14	15.06	17.63	Inf	21.10	30.00

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6865MHz Straddle 6.525-6.875GHz	Pass	3.47	14.11	15.01	17.59	Inf	21.06	30.00
6945MHz	Pass	3.14	15.2	15.94	18.60	Inf	21.74	30.00
7025MHz	Pass	3.14	15.07	15.88	18.50	Inf	21.64	30.00
802.11be EHT160-BF_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	2.63	17.98	18.28	21.14	Inf	23.77	30.00
6185MHz	Pass	2.63	17.86	18.26	21.07	Inf	23.70	30.00
6345MHz	Pass	2.63	18.05	18.61	21.35	Inf	23.98	30.00
6505MHz Straddle 6.525-6.875GHz	Pass	3.47	17.5	17.85	20.69	Inf	24.16	30.00
6665MHz	Pass	3.47	17.79	18.13	20.97	Inf	24.44	30.00
6825MHz Straddle 6.525-6.875GHz	Pass	3.47	17.31	17.68	20.51	Inf	23.98	30.00
6985MHz	Pass	3.14	17.87	18.44	21.17	Inf	24.31	30.00
802.11be EHT320-BF_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	2.63	17.52	17.73	20.64	Inf	23.27	30.00
6265MHz	Pass	2.63	17.35	17.65	20.51	Inf	23.14	30.00
6425MHz Straddle 6.525-6.875GHz	Pass	3.47	17.78	18.21	21.01	Inf	24.48	30.00
6585MHz Straddle 6.525-6.875GHz	Pass	3.47	17.48	18.06	20.79	Inf	24.26	30.00
6745MHz Straddle 6.525-6.875GHz	Pass	3.47	16.85	17.31	20.10	Inf	23.57	30.00
6905MHz Straddle 6.525-6.875GHz	Pass	3.47	16.37	17.07	19.74	Inf	23.21	30.00

DG = Directional Gain; Port X = Port X output power

Directional Gain = $10 \log [(10^{G1/10} + 10^{G2/10})/N_{ANT}]$

Ant. No.	Operating Frequencies (MHz) / Antenna Gain (dBi)			
	5925 ~ 6425	6425 ~ 6525	6525 ~ 6875	6875 ~ 7125
1	3.75	2.77	4.09	3.49
2	1.11	2.45	2.75	2.75
Directional Gain (dBi)	2.63	2.61	3.47	3.14

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	2.12	4.75
802.11be EHT40_Nss2,(MCS0)_2TX	2.19	4.82
802.11be EHT80_Nss2,(MCS0)_2TX	2.22	4.85
802.11be EHT160_Nss2,(MCS0)_2TX	2.14	4.77
802.11be EHT320_Nss2,(MCS0)_2TX	-1.58	1.05
6.425-6.525GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	2.24	4.85
802.11be EHT40_Nss2,(MCS0)_2TX	2.26	4.87
802.11be EHT80_Nss2,(MCS0)_2TX	2.23	4.84
6.525-6.875GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	1.39	4.86
802.11be EHT40_Nss2,(MCS0)_2TX	1.39	4.86
802.11be EHT80_Nss2,(MCS0)_2TX	1.36	4.83
802.11be EHT160_Nss2,(MCS0)_2TX	1.23	4.70
802.11be EHT320_Nss2,(MCS0)_2TX	-1.13	2.34
6.875-7.125GHz	-	-
802.11be EHT20_Nss2,(MCS0)_2TX	1.68	4.82
802.11be EHT40_Nss2,(MCS0)_2TX	1.75	4.89
802.11be EHT80_Nss2,(MCS0)_2TX	1.73	4.87
802.11be EHT160_Nss2,(MCS0)_2TX	1.56	4.70

RBW = 1MHz

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5935MHz	Pass	2.63	-8.33	-8.07	-5.37	Inf	-2.74	5.00
5955MHz	Pass	2.63	-1.24	-0.67	1.98	Inf	4.61	5.00
6175MHz	Pass	2.63	-1.51	-0.29	2.07	Inf	4.70	5.00
6415MHz	Pass	2.63	-1.33	-0.13	2.12	Inf	4.75	5.00
6435MHz	Pass	2.61	-1.09	-0.22	2.17	Inf	4.78	5.00
6475MHz	Pass	2.61	-1.15	-0.37	2.16	Inf	4.77	5.00
6515MHz	Pass	2.61	-1.24	-0.19	2.24	Inf	4.85	5.00
6535MHz	Pass	3.47	-2.15	-1.18	1.24	Inf	4.71	5.00
6715MHz	Pass	3.47	-2.57	-1.03	1.28	Inf	4.75	5.00
6855MHz	Pass	3.47	-2.14	-1.14	1.32	Inf	4.79	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	3.47	-2.11	-0.98	1.39	Inf	4.86	5.00
6895MHz	Pass	3.14	-1.77	-0.74	1.68	Inf	4.82	5.00
7015MHz	Pass	3.14	-2.16	-0.94	1.40	Inf	4.54	5.00
7095MHz	Pass	3.14	-2.30	-0.91	1.42	Inf	4.56	5.00
7115MHz	Pass	3.14	-10.03	-9.63	-6.89	Inf	-3.75	5.00
802.11be EHT40_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	2.63	-1.16	-0.17	2.19	Inf	4.82	5.00
6165MHz	Pass	2.63	-1.35	-0.26	2.13	Inf	4.76	5.00
6405MHz	Pass	2.63	-1.56	-0.24	2.11	Inf	4.74	5.00
6445MHz	Pass	2.61	-1.13	-0.36	2.21	Inf	4.82	5.00
6485MHz	Pass	2.61	-1.23	-0.19	2.26	Inf	4.87	5.00
6525MHz Straddle 6.525-6.875GHz	Pass	3.47	-2.05	-0.98	1.37	Inf	4.84	5.00
6565MHz	Pass	3.47	-2.15	-1.25	1.24	Inf	4.71	5.00
6725MHz	Pass	3.47	-2.52	-0.81	1.32	Inf	4.79	5.00
6845MHz	Pass	3.47	-2.06	-0.96	1.39	Inf	4.86	5.00
6885MHz Straddle 6.525-6.875GHz	Pass	3.47	-2.08	-1.24	1.29	Inf	4.76	5.00
6925MHz	Pass	3.14	-1.85	-0.80	1.53	Inf	4.67	5.00
7005MHz	Pass	3.14	-1.79	-0.64	1.75	Inf	4.89	5.00
7085MHz	Pass	3.14	-2.19	-1.01	1.38	Inf	4.52	5.00
802.11be EHT80_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	2.63	-1.22	-0.59	2.05	Inf	4.68	5.00
6145MHz	Pass	2.63	-1.29	-0.12	2.22	Inf	4.85	5.00
6385MHz	Pass	2.63	-1.23	-0.21	2.18	Inf	4.81	5.00
6465MHz	Pass	2.61	-1.17	-0.26	2.23	Inf	4.84	5.00
6545MHz Straddle 6.525-6.875GHz	Pass	3.47	-2.12	-1.13	1.36	Inf	4.83	5.00
6625MHz	Pass	3.47	-2.33	-1.23	1.10	Inf	4.57	5.00
6705MHz	Pass	3.47	-1.96	-1.42	1.21	Inf	4.68	5.00
6785MHz	Pass	3.47	-2.29	-1.11	1.27	Inf	4.74	5.00
6865MHz Straddle	Pass	3.47	-2.20	-1.14	1.11	Inf	4.58	5.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6.525-6.875GHz								
6945MHz	Pass	3.14	-1.79	-0.65	1.73	Inf	4.87	5.00
7025MHz	Pass	3.14	-1.86	-0.77	1.64	Inf	4.78	5.00
802.11be EHT160_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	2.63	-1.32	-0.82	1.95	Inf	4.58	5.00
6185MHz	Pass	2.63	-1.30	-0.47	2.10	Inf	4.73	5.00
6345MHz	Pass	2.63	-1.22	-0.40	2.14	Inf	4.77	5.00
6505MHz Straddle 6.525-6.875GHz	Pass	3.47	-2.11	-1.35	1.23	Inf	4.70	5.00
6665MHz	Pass	3.47	-1.72	-1.60	1.23	Inf	4.70	5.00
6825MHz Straddle 6.525-6.875GHz	Pass	3.47	-2.28	-1.14	1.22	Inf	4.69	5.00
6985MHz	Pass	3.14	-1.90	-0.92	1.56	Inf	4.70	5.00
802.11be EHT320_Nss2,(MCS0)_2TX	-	-	-	-	-	-	-	-
6105MHz	Pass	2.63	-5.12	-4.52	-1.88	Inf	0.75	5.00
6265MHz	Pass	2.63	-4.61	-4.36	-1.58	Inf	1.05	5.00
6425MHz Straddle 6.525-6.875GHz	Pass	3.47	-4.09	-3.97	-1.13	Inf	2.34	5.00
6585MHz Straddle 6.525-6.875GHz	Pass	3.47	-4.48	-4.32	-1.53	Inf	1.94	5.00
6745MHz Straddle 6.525-6.875GHz	Pass	3.47	-5.67	-5.09	-2.54	Inf	0.93	5.00
6905MHz Straddle 6.525-6.875GHz	Pass	3.47	-6.04	-5.58	-2.86	Inf	0.61	5.00

DG = Directional Gain; RBW = 1MHz

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;


Directional Gain = $10 \log [(10^{G1/10} + 10^{G2/10})/N_{ANT}]$

Ant. No.	Operating Frequencies (MHz) / Antenna Gain (dBi)			
	5925 ~ 6425	6425 ~ 6525	6525 ~ 6875	6875 ~ 7125
1	3.75	2.77	4.09	3.49
2	1.11	2.45	2.75	2.75
Directional Gain (dBi)	2.63	2.61	3.47	3.14

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


5935MHz

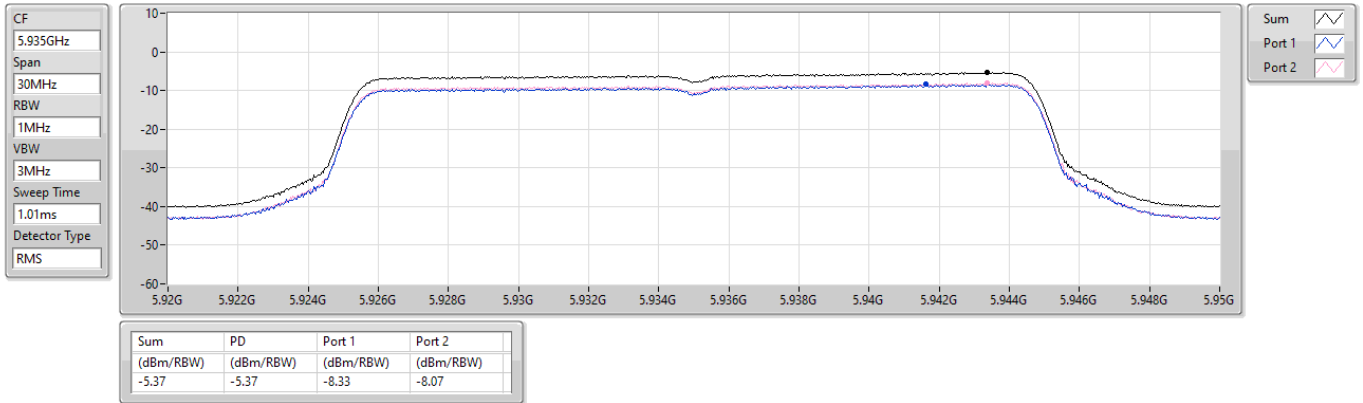

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


5955MHz

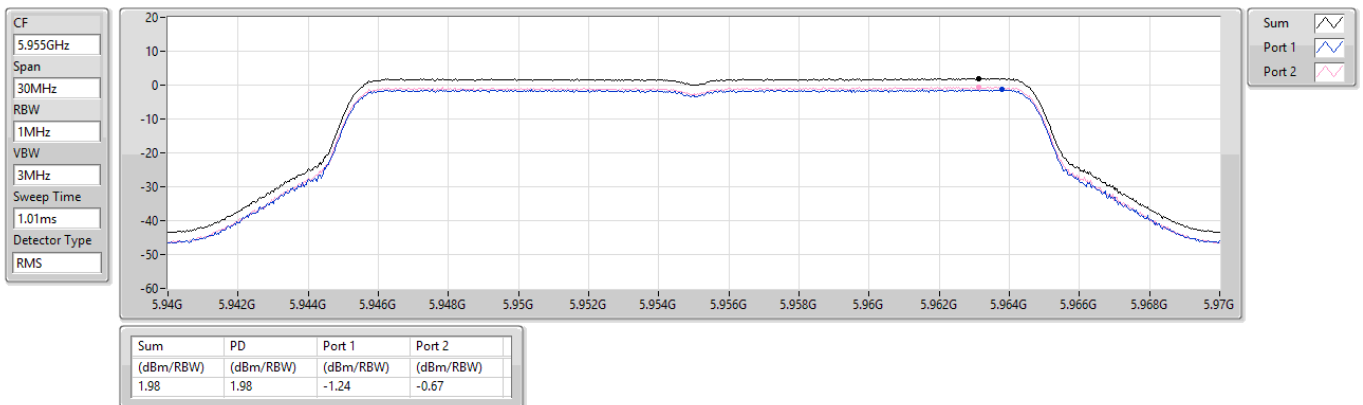

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


6175MHz

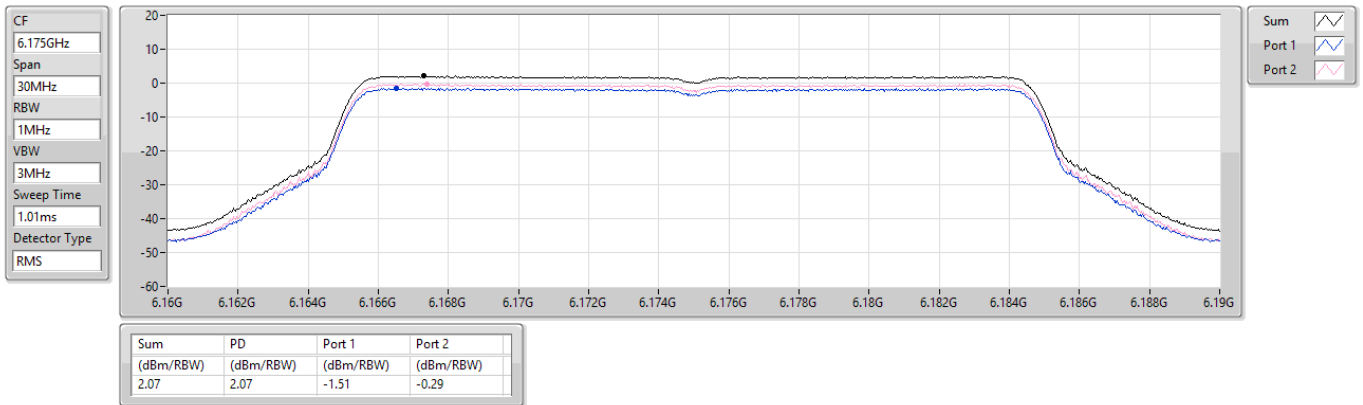

5.925-6.425GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


6415MHz

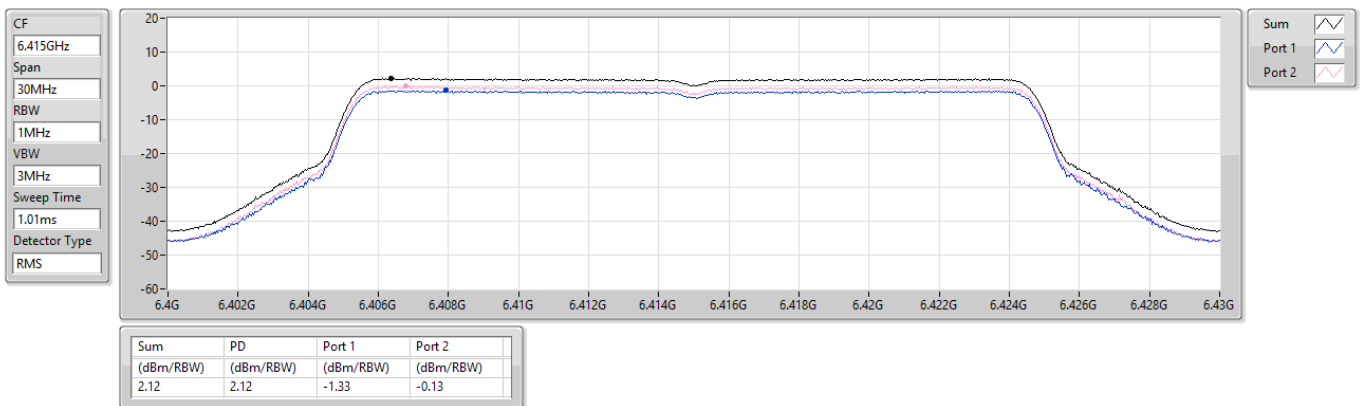

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


6435MHz

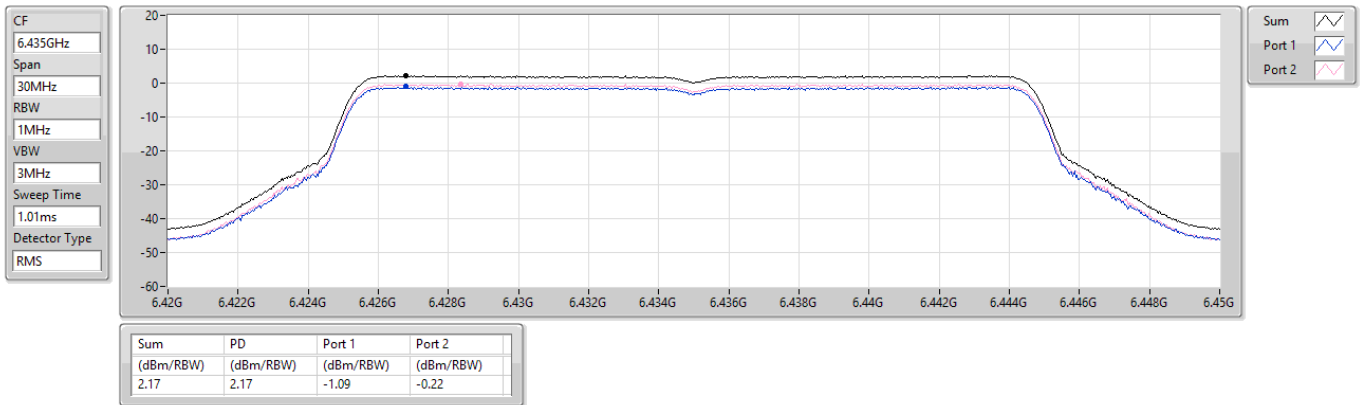

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


6475MHz

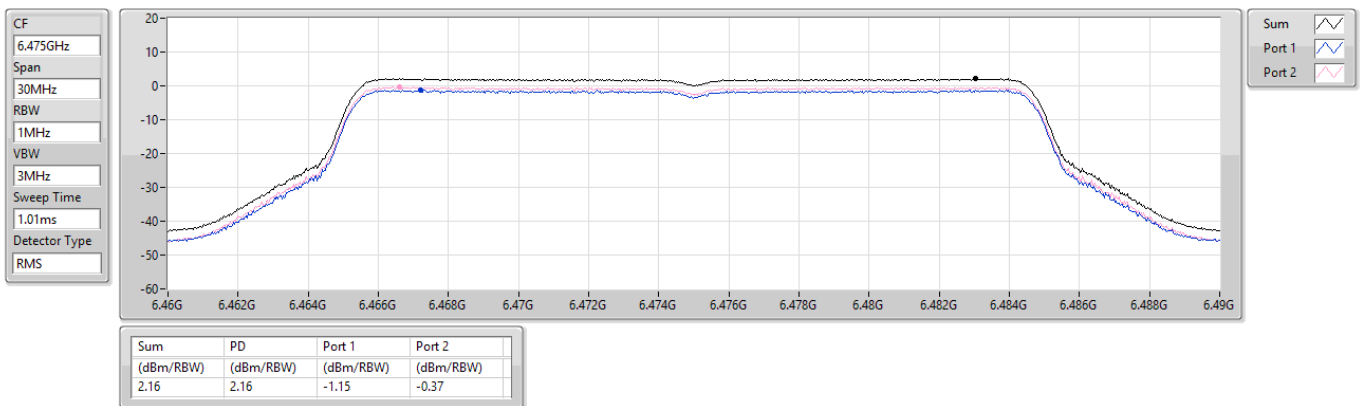

6.425-6.525GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


6515MHz

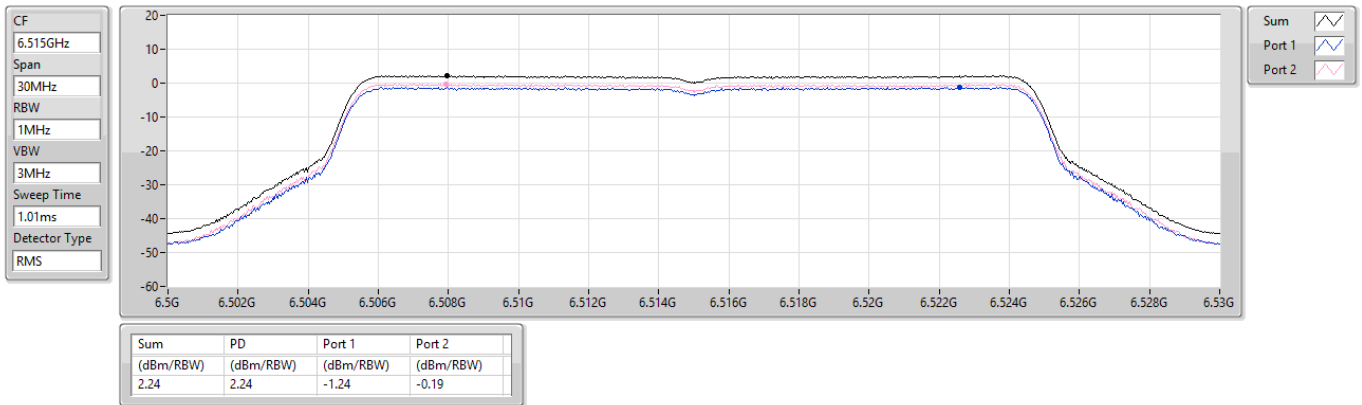

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


6535MHz

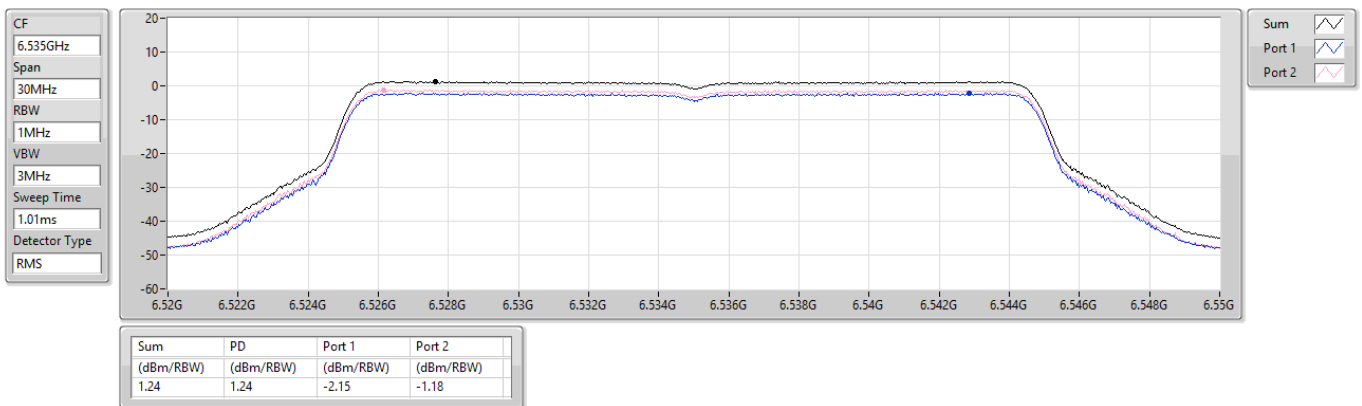

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


6715MHz

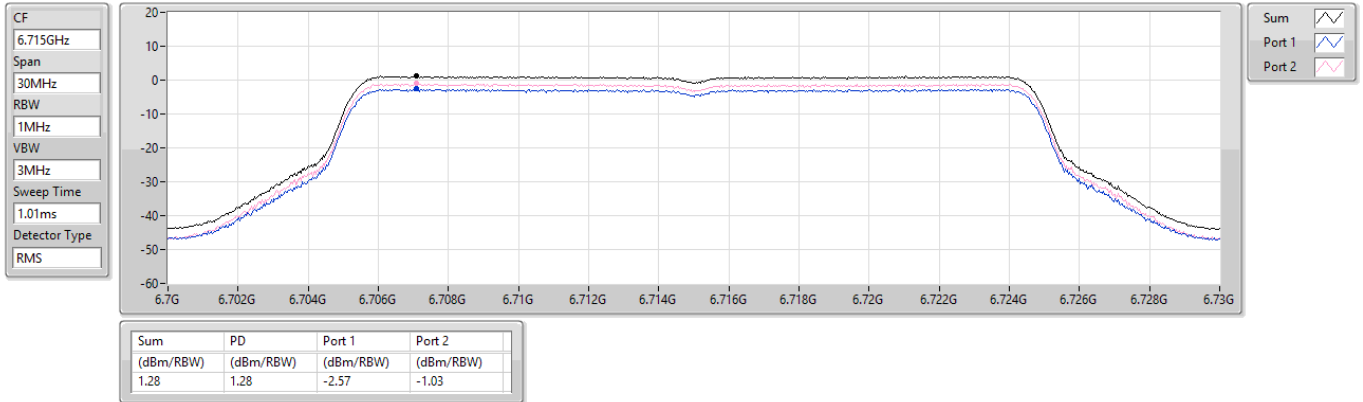

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


6855MHz

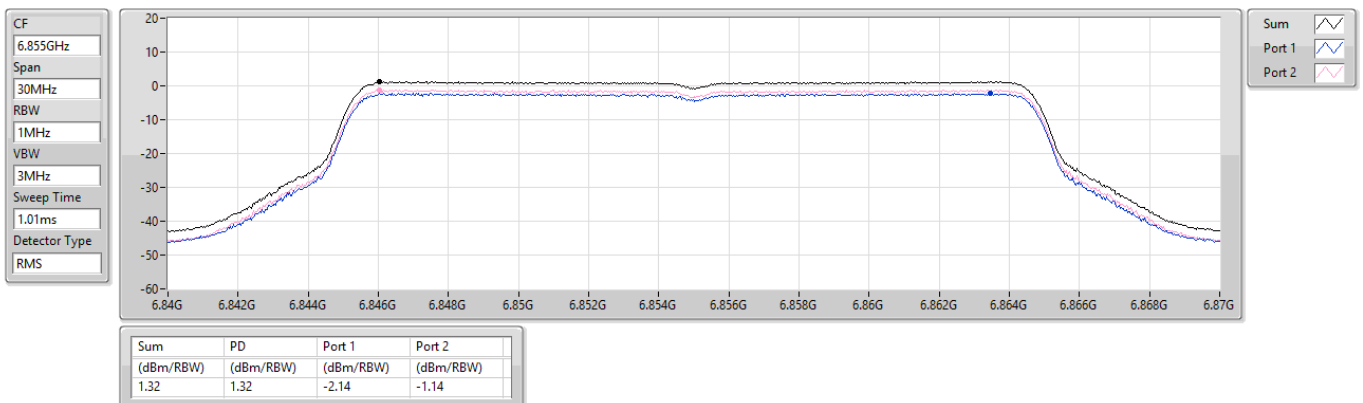

6.525-6.875GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


6875MHz Straddle 6.525-6.875GHz

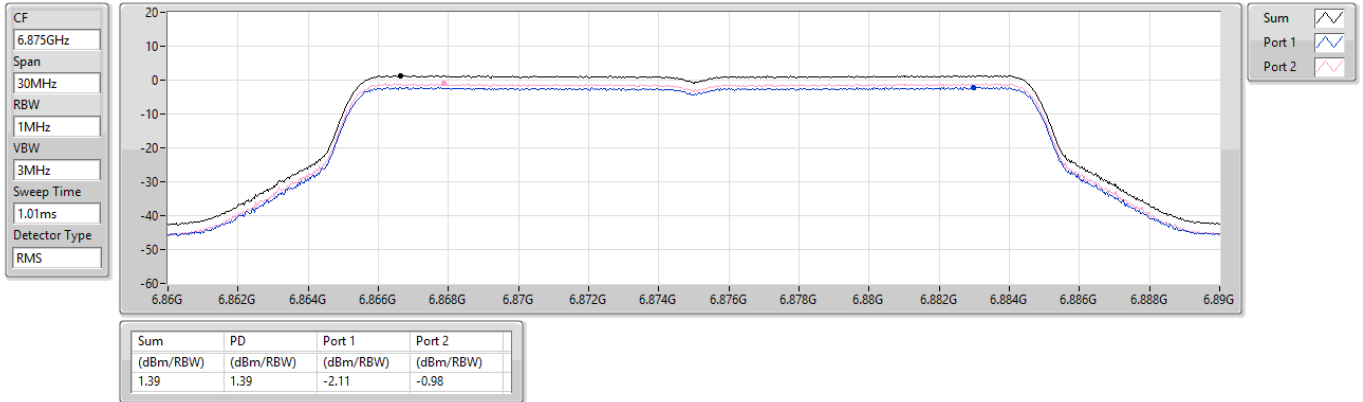

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


6895MHz

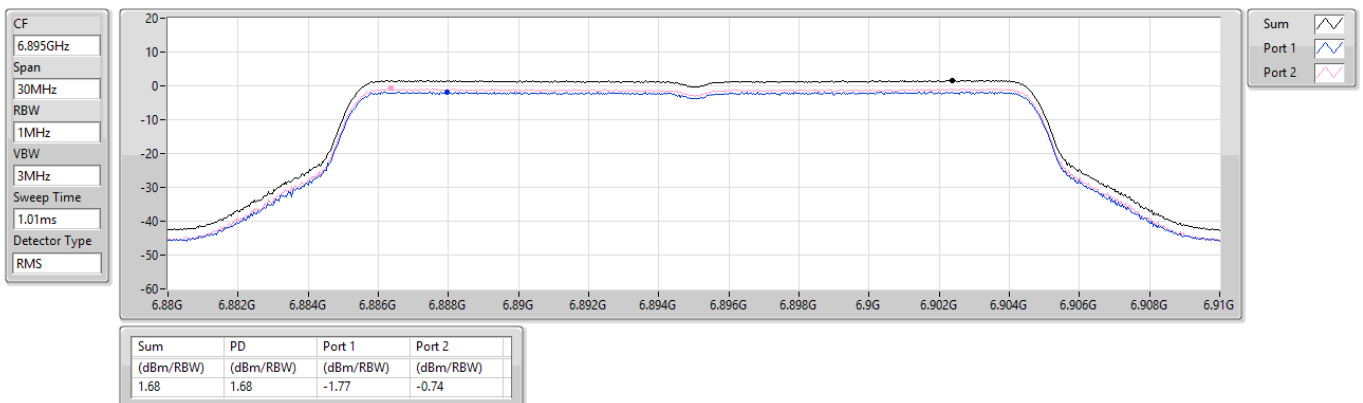

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


7015MHz

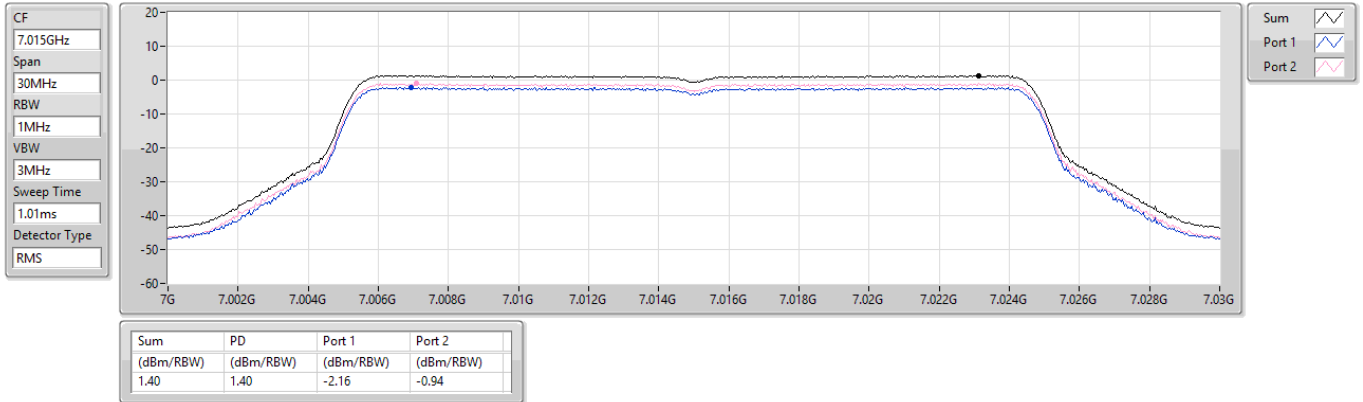

6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD

7095MHz

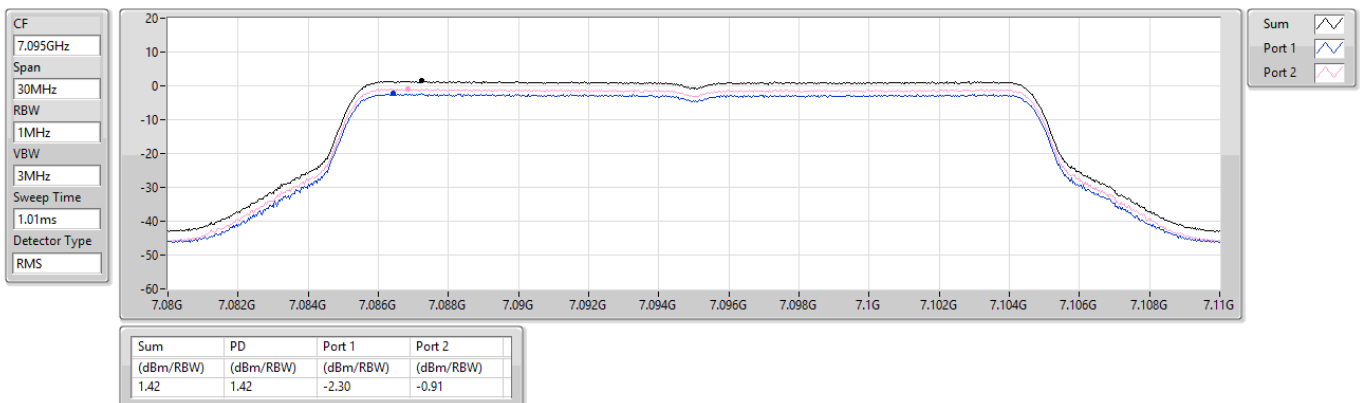




6.875-7.125GHz_802.11be EHT20_Nss2,(MCS0)_2TX

PSD


7115MHz

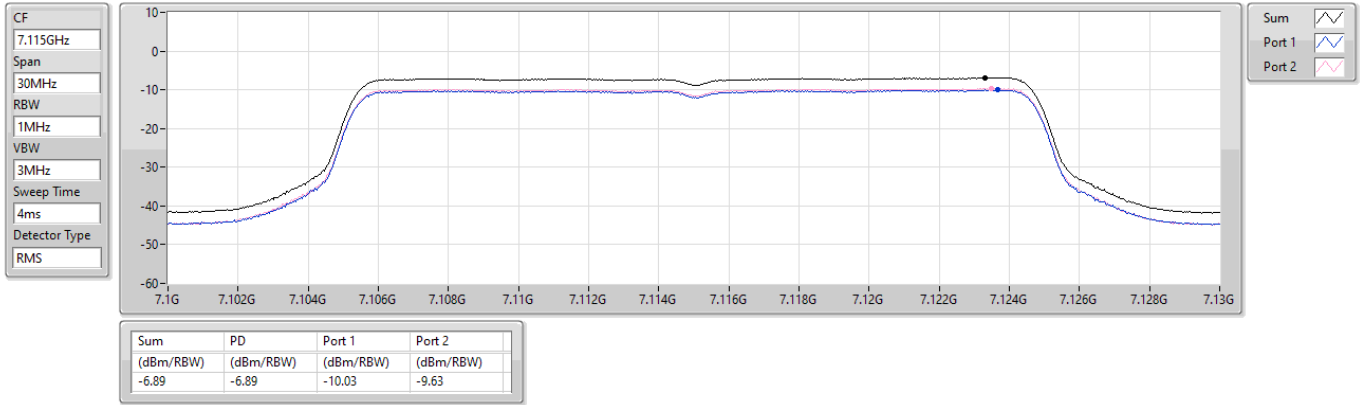

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD


5965MHz

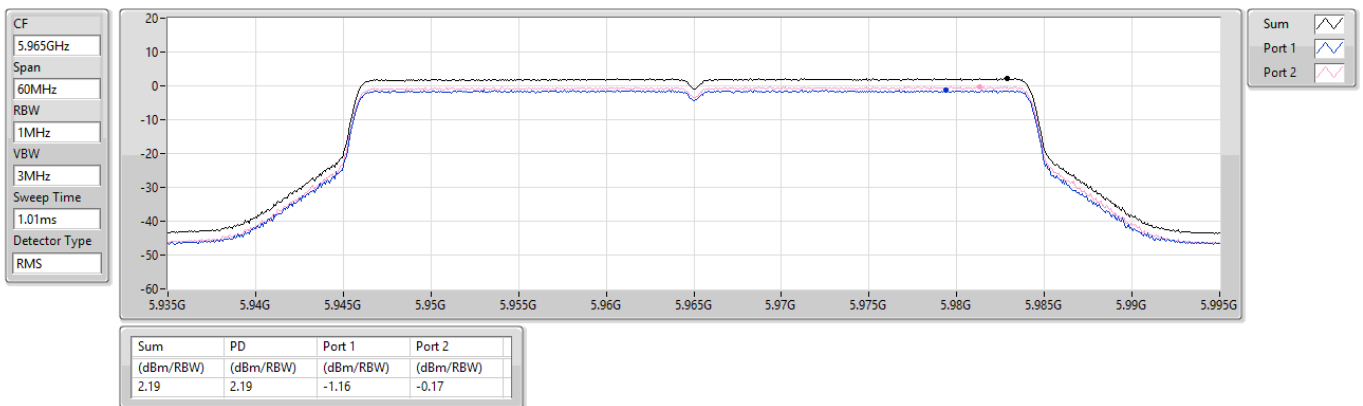

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD


6165MHz

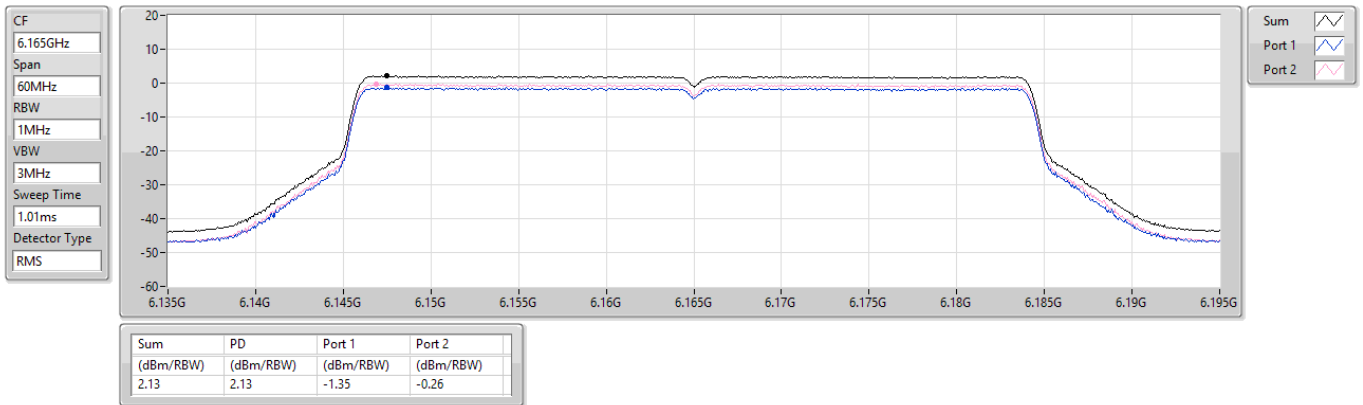

5.925-6.425GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6405MHz

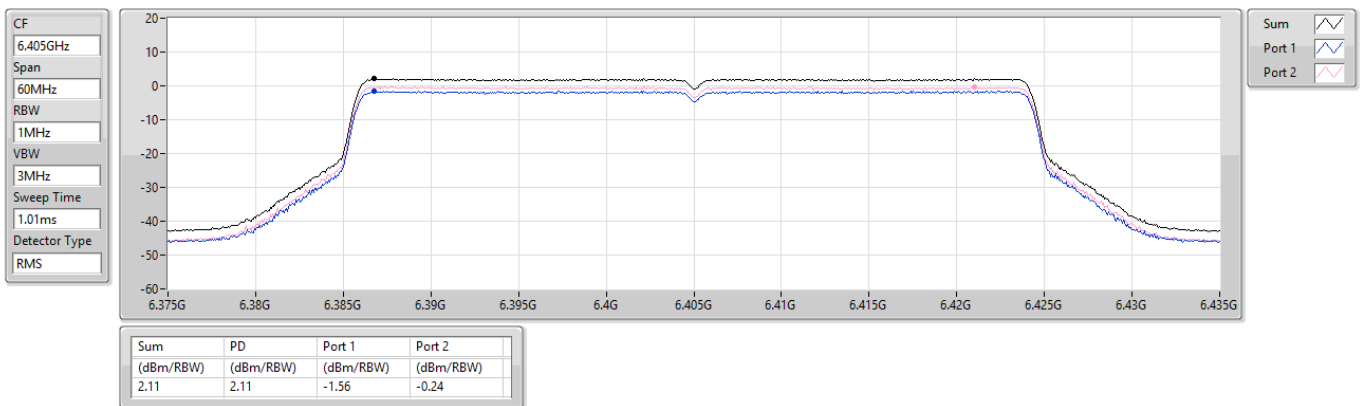


6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6445MHz

CF
6.445GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

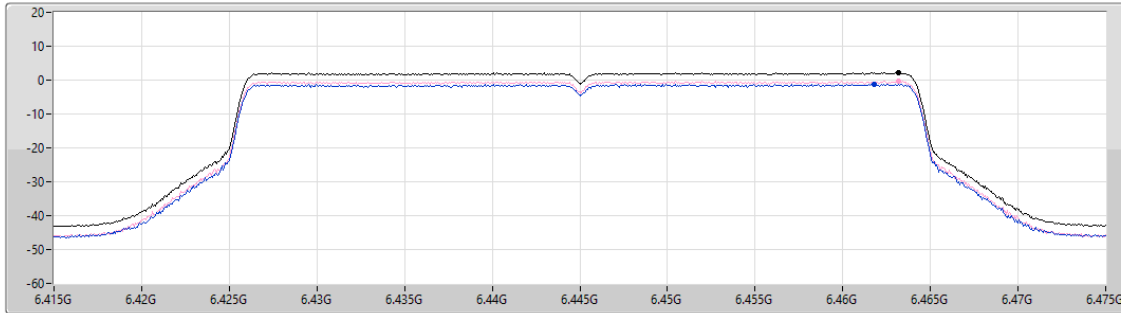

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.21	2.21	-1.13	-0.36

6.425-6.525GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6485MHz

CF
6.485GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

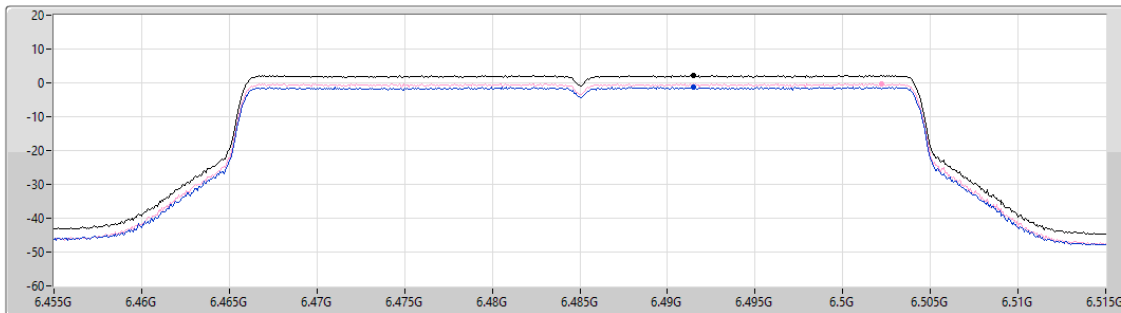

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.26	2.26	-1.23	-0.19



6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD


6525MHz Straddle 6.525-6.875GHz

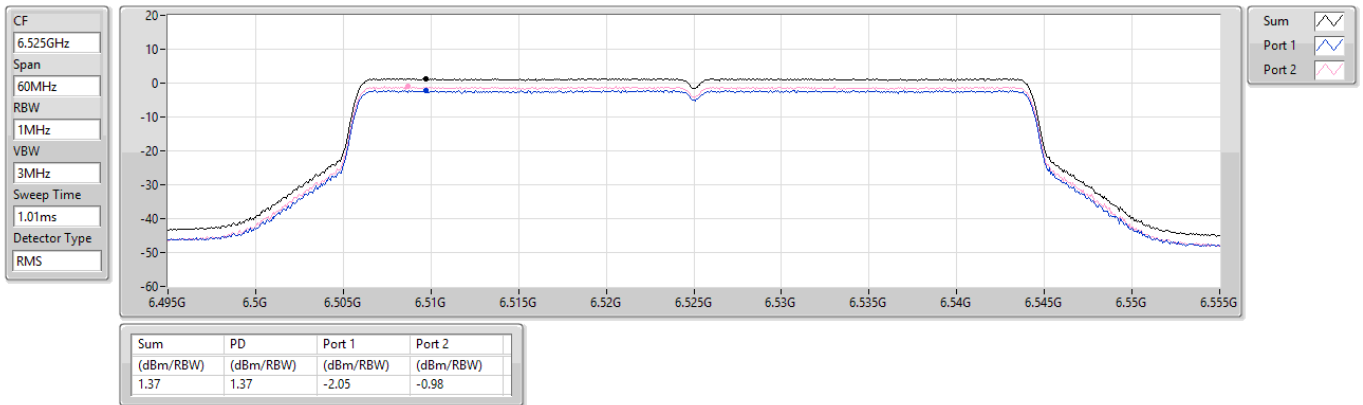

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6565MHz

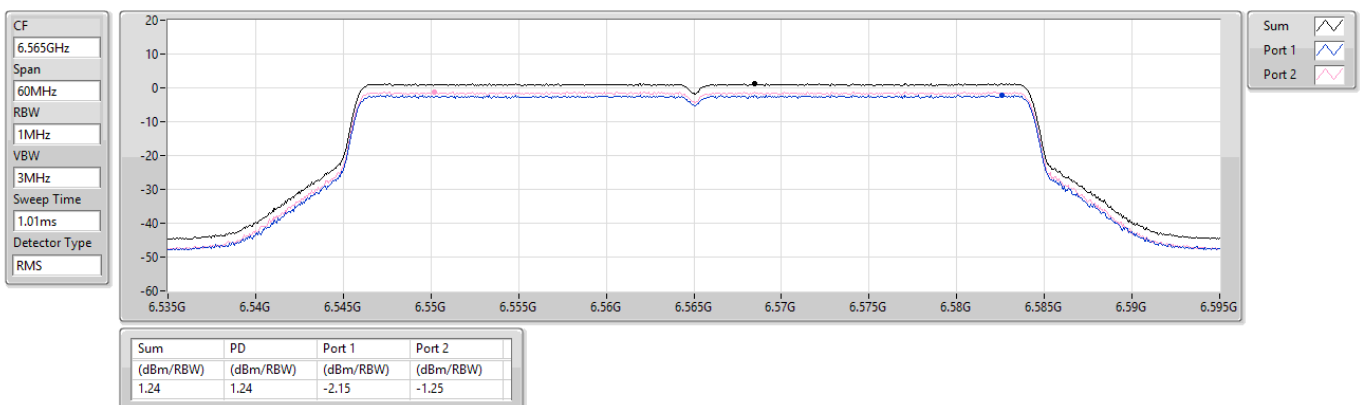




6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6725MHz

CF
6.725GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

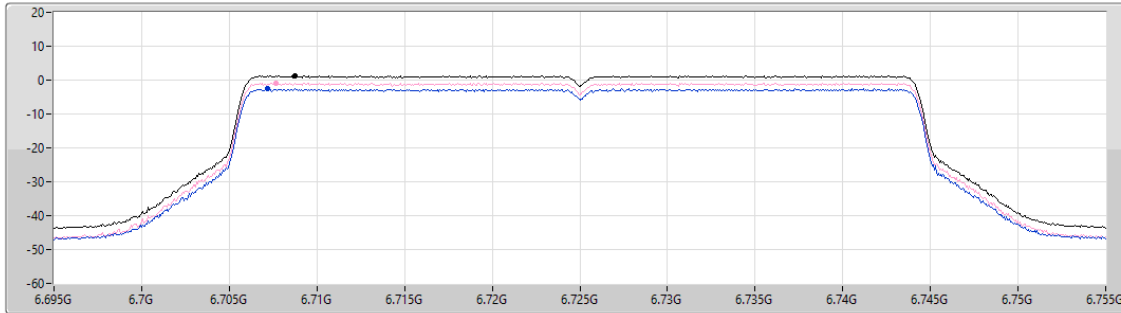

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.32	1.32	-2.52	-0.81

6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6845MHz

CF
6.845GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

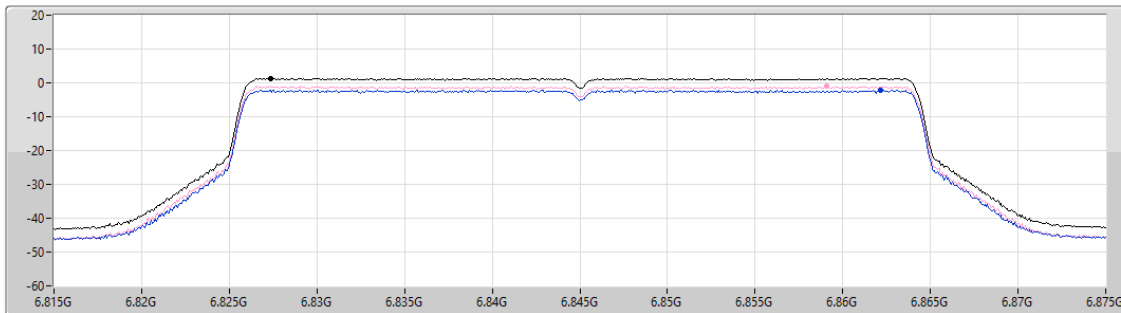

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.39	1.39	-2.06	-0.96



6.525-6.875GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD


6885MHz Straddle 6.525-6.875GHz

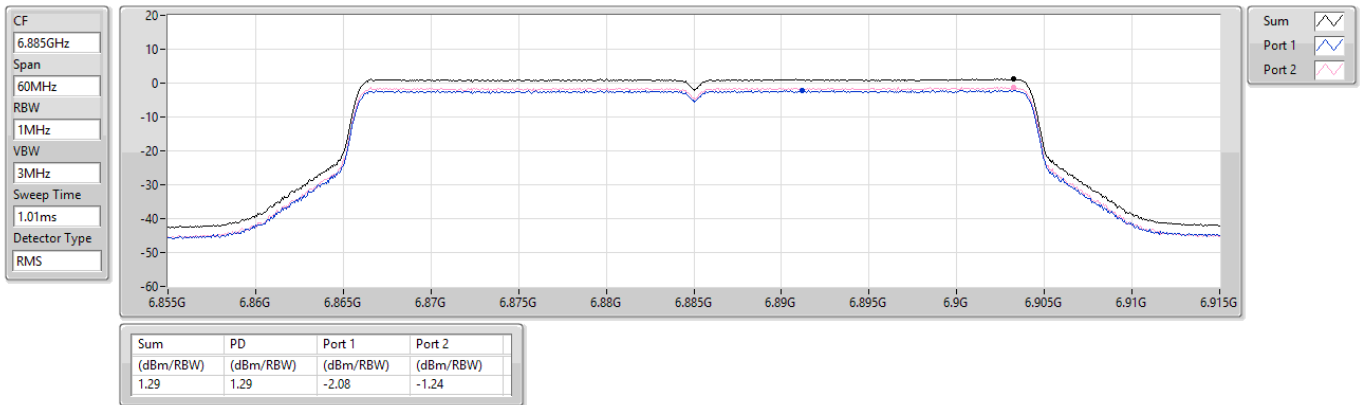

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

6925MHz

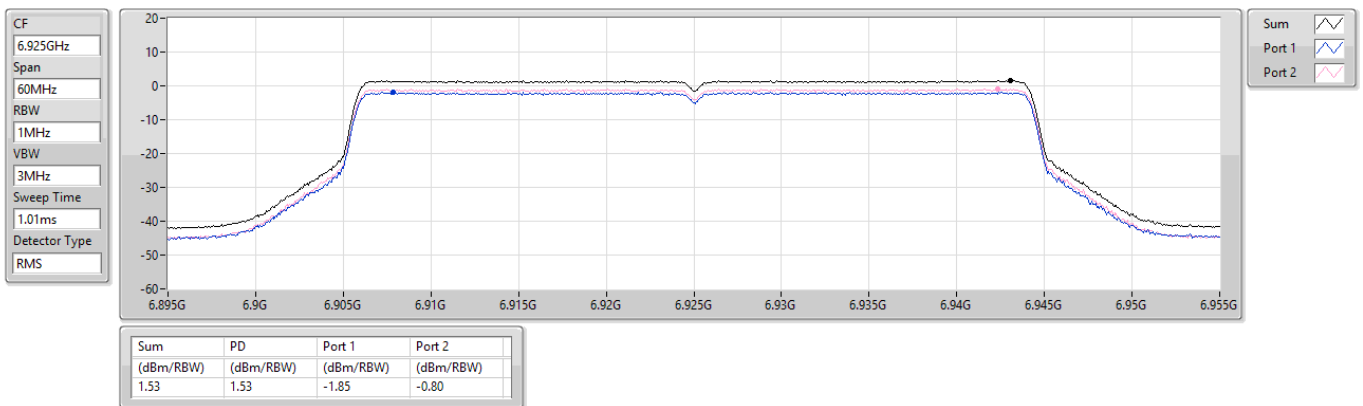




6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD


7005MHz

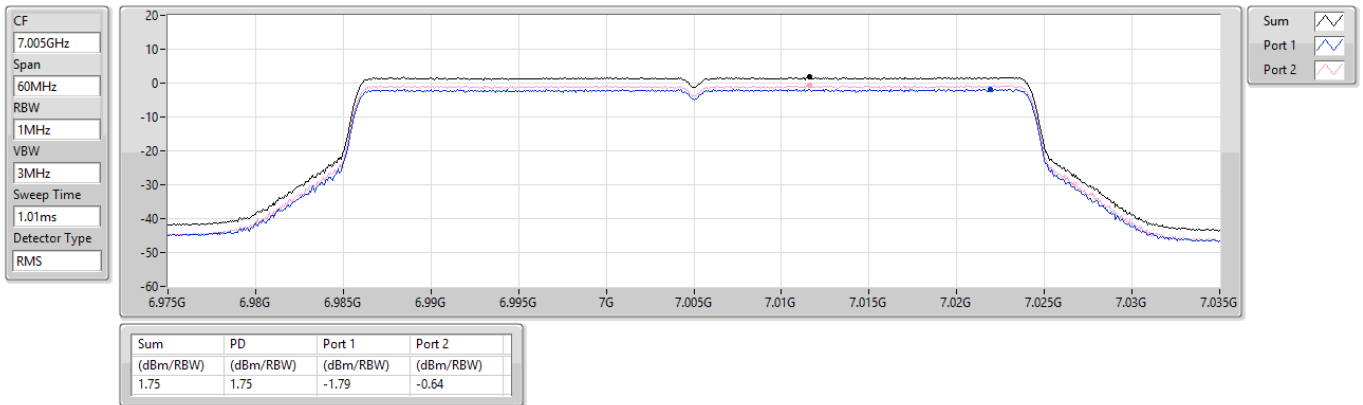

6.875-7.125GHz_802.11be EHT40_Nss2,(MCS0)_2TX

PSD

7085MHz

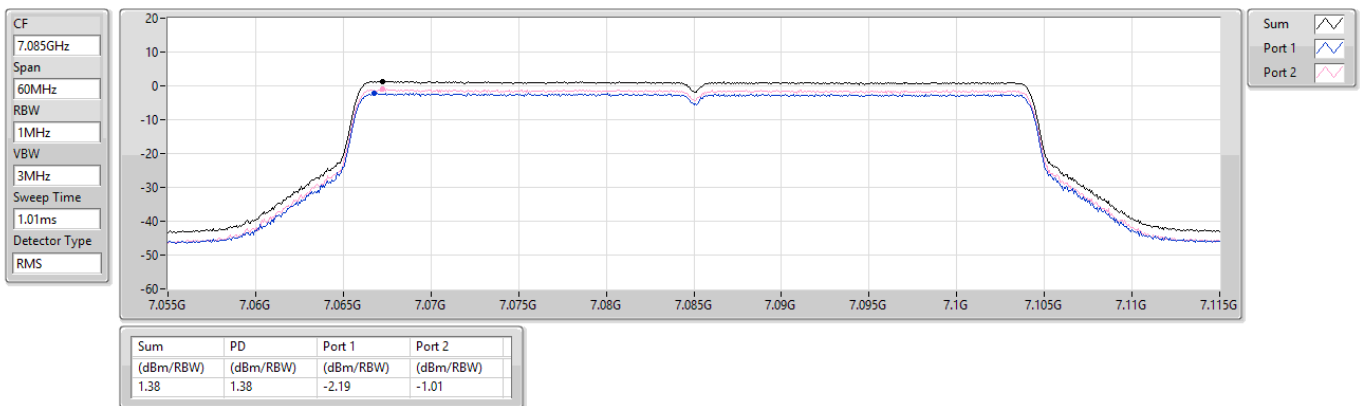




5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD


5985MHz

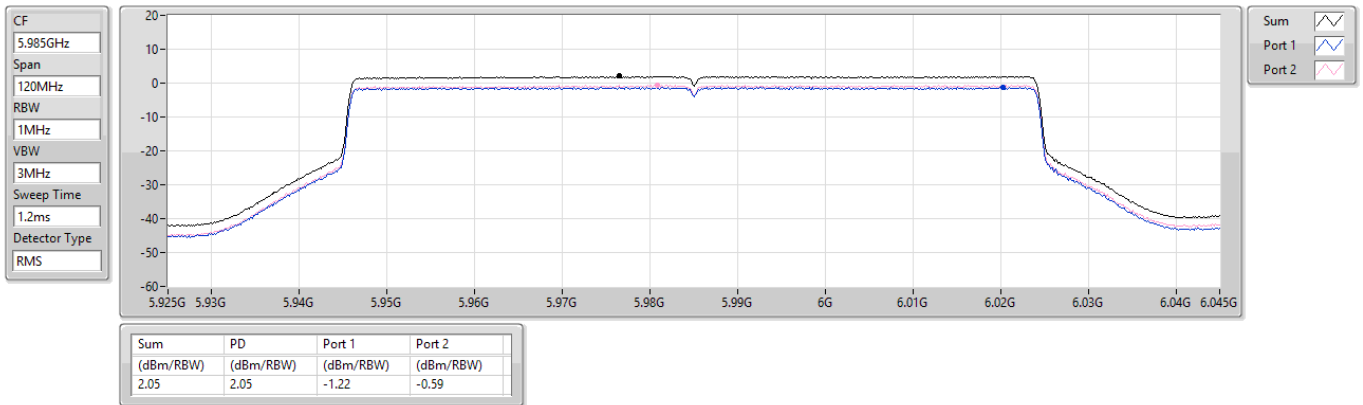

5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6145MHz

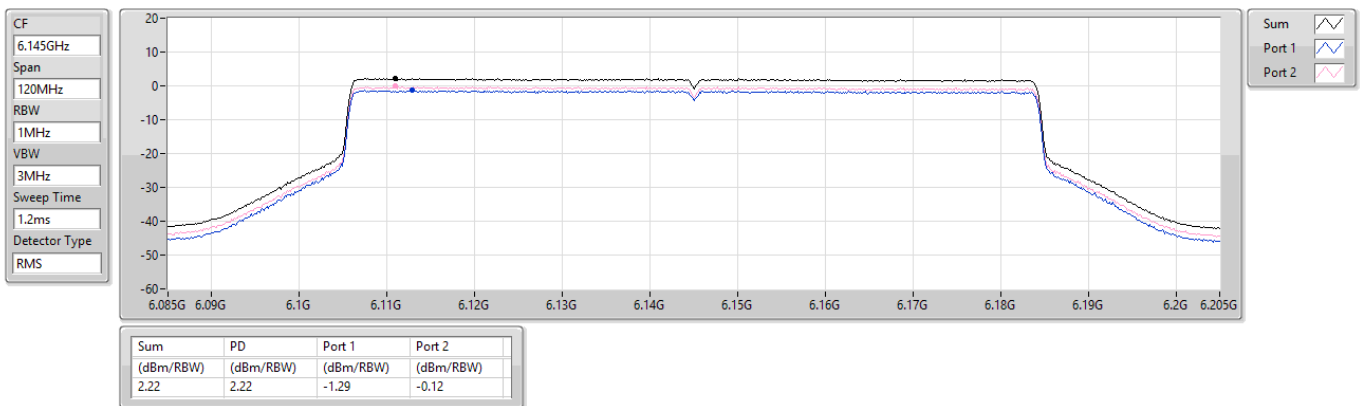


5.925-6.425GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6385MHz

CF
6.385GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

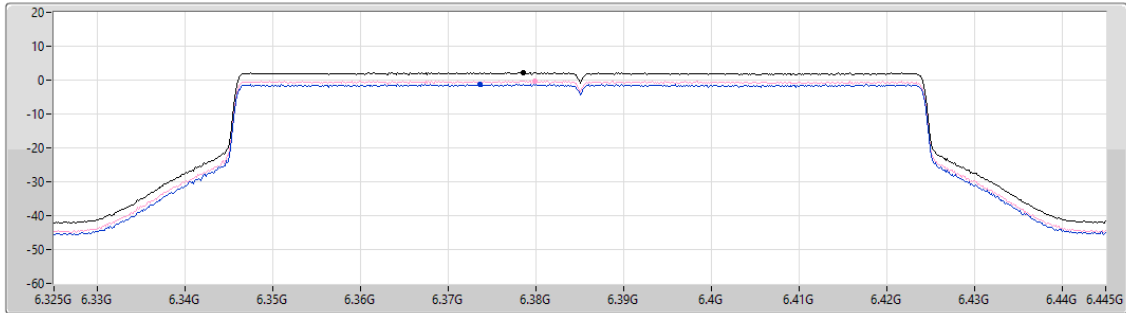

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.18	2.18	-1.23	-0.21

6.425-6.525GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6465MHz

CF
6.465GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.2ms
Detector Type
RMS

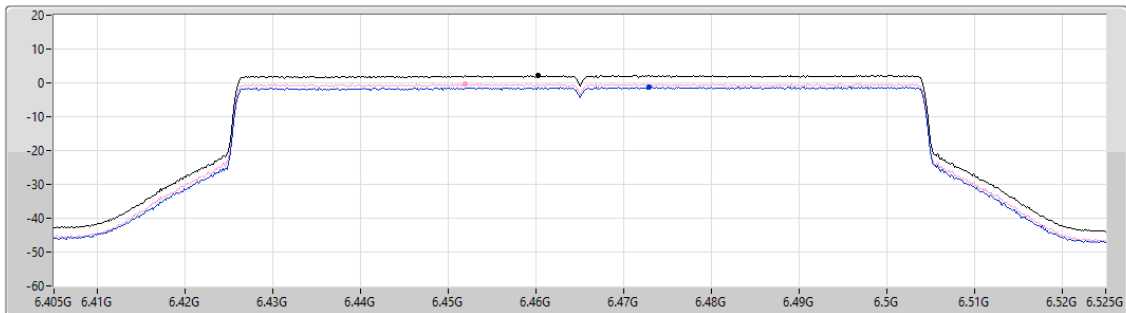

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.23	2.23	-1.17	-0.26



6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD


6545MHz Straddle 6.525-6.875GHz

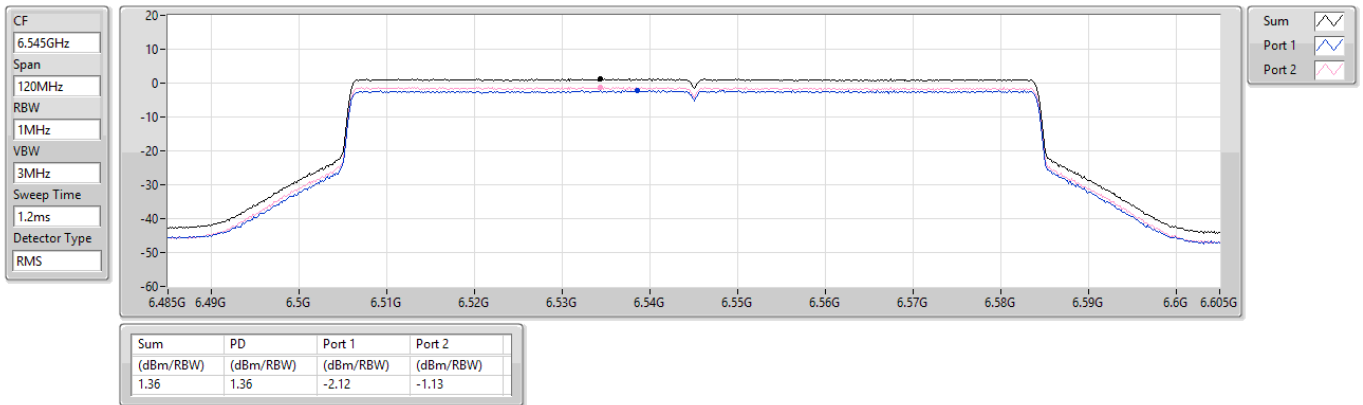

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD

6625MHz

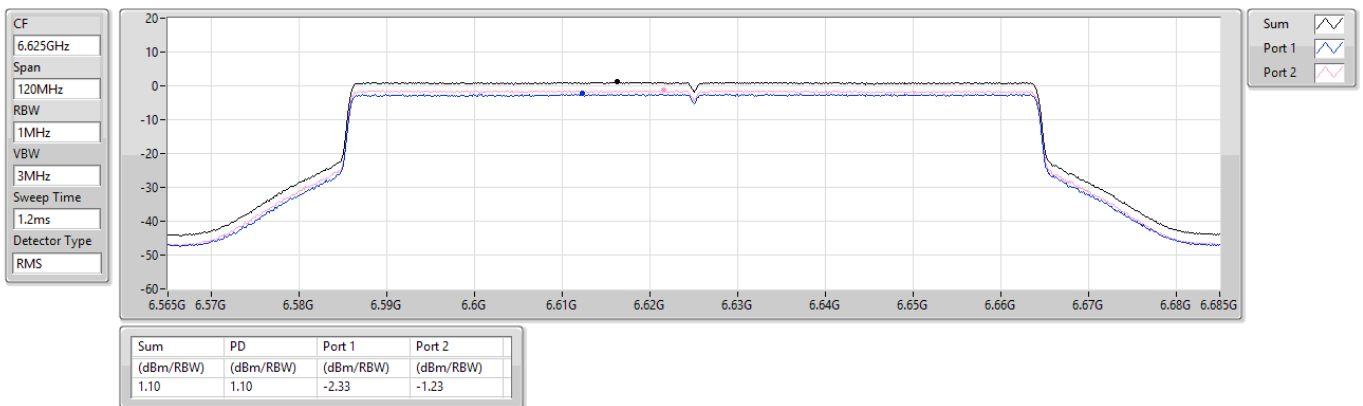




6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD


6705MHz

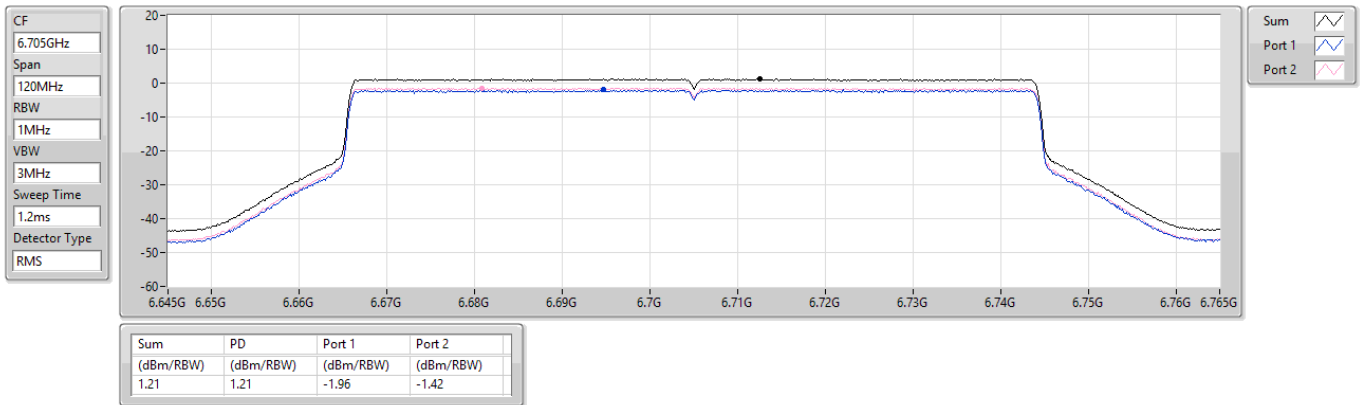

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD


6785MHz

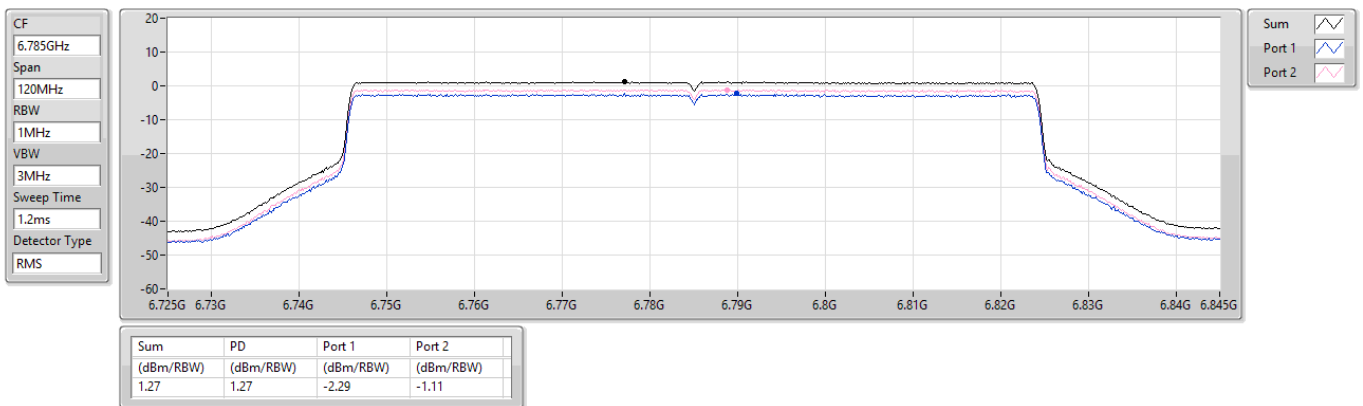

6.525-6.875GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD


6865MHz Straddle 6.525-6.875GHz

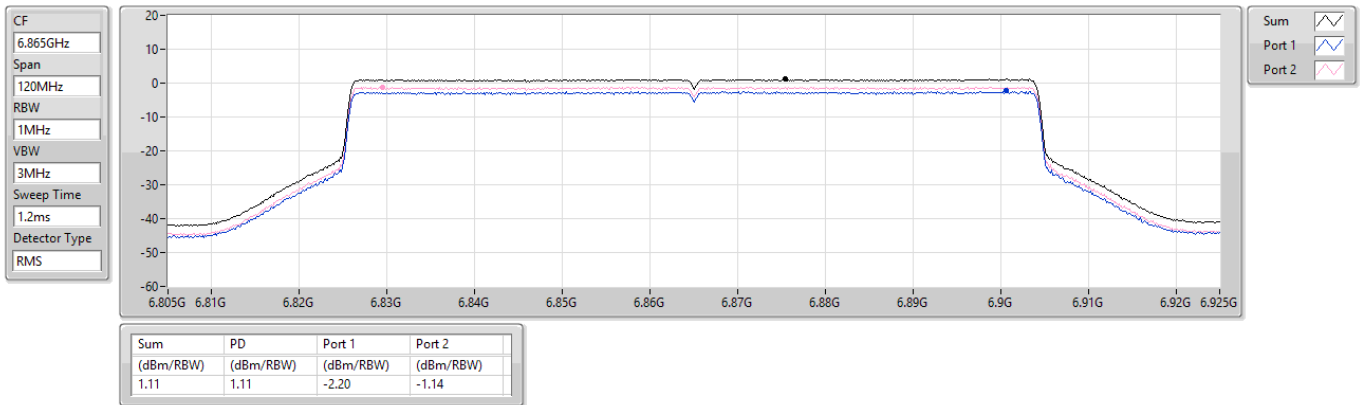

6.875-7.125GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD


6945MHz

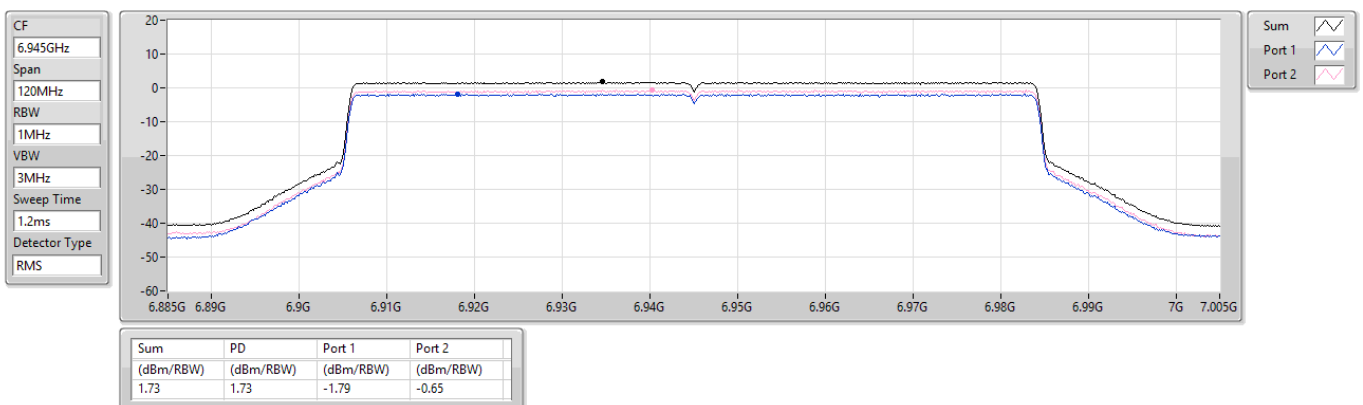

6.875-7.125GHz_802.11be EHT80_Nss2,(MCS0)_2TX

PSD


7025MHz

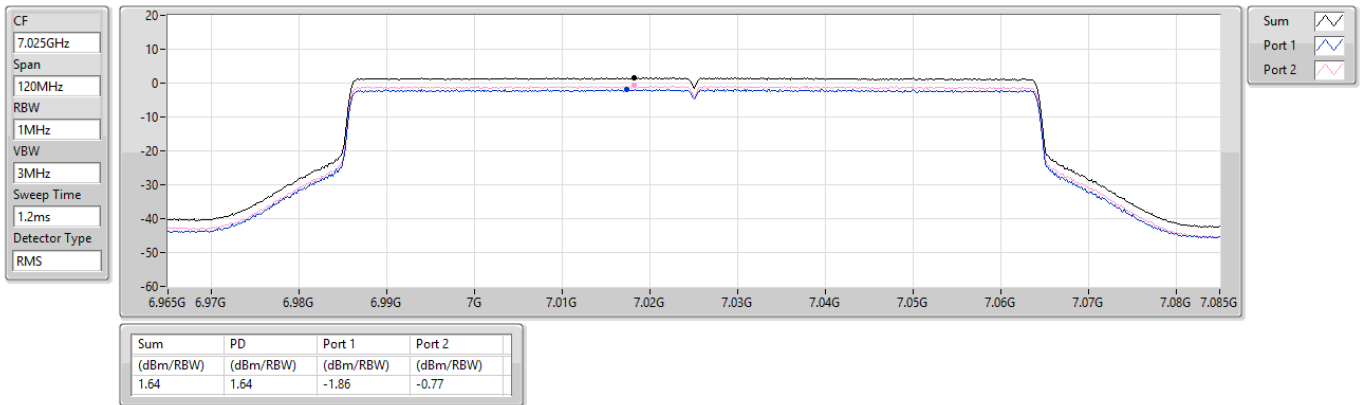

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD

6025MHz

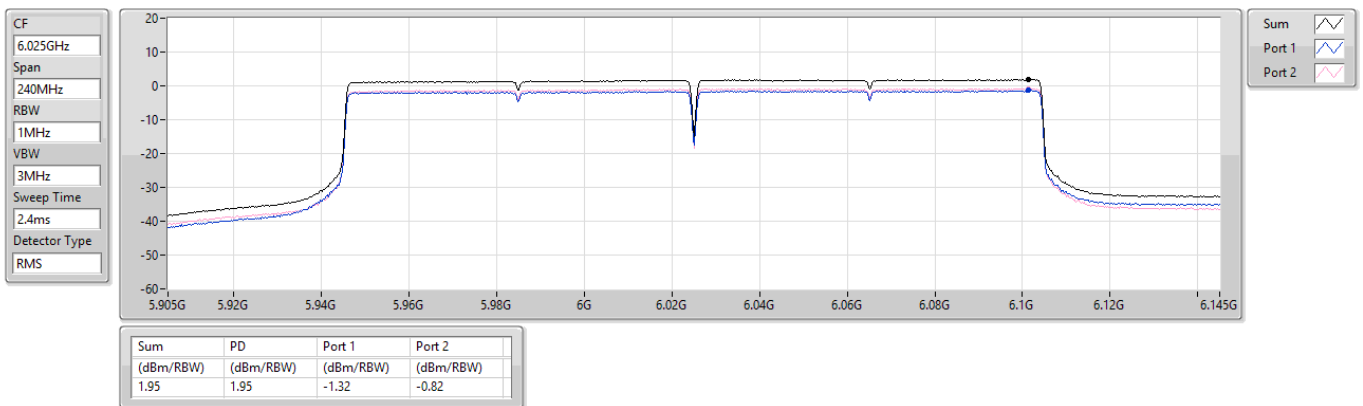


5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD

6185MHz

CF
6.185GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

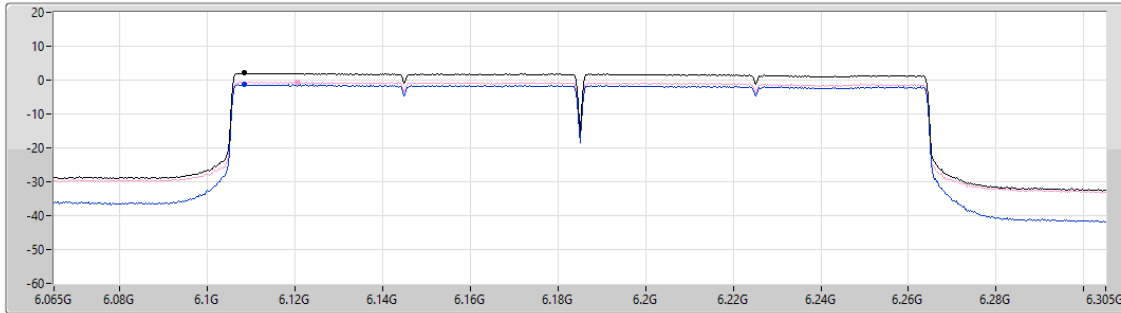

Sum
Port 1
Port 2


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
2.10	2.10	-1.30	-0.47

5.925-6.425GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD

6345MHz

CF
6.345GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2.4ms
Detector Type
RMS

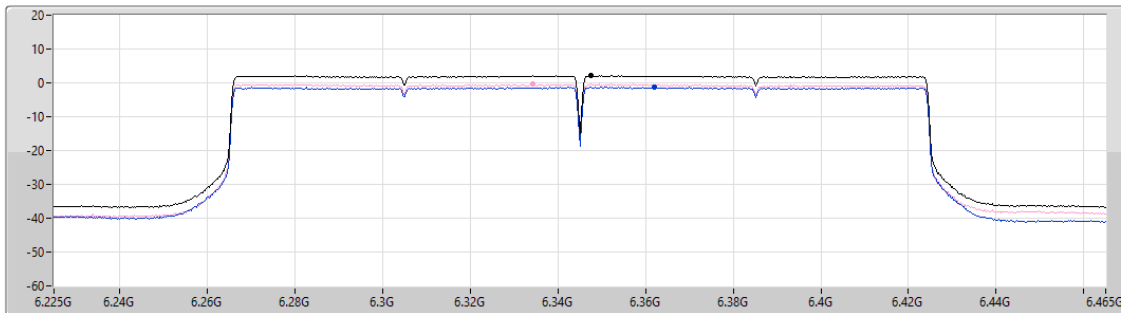

Sum
Port 1
Port 2


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
2.14	2.14	-1.22	-0.40



6.525-6.875GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD


6505MHz Straddle 6.525-6.875GHz

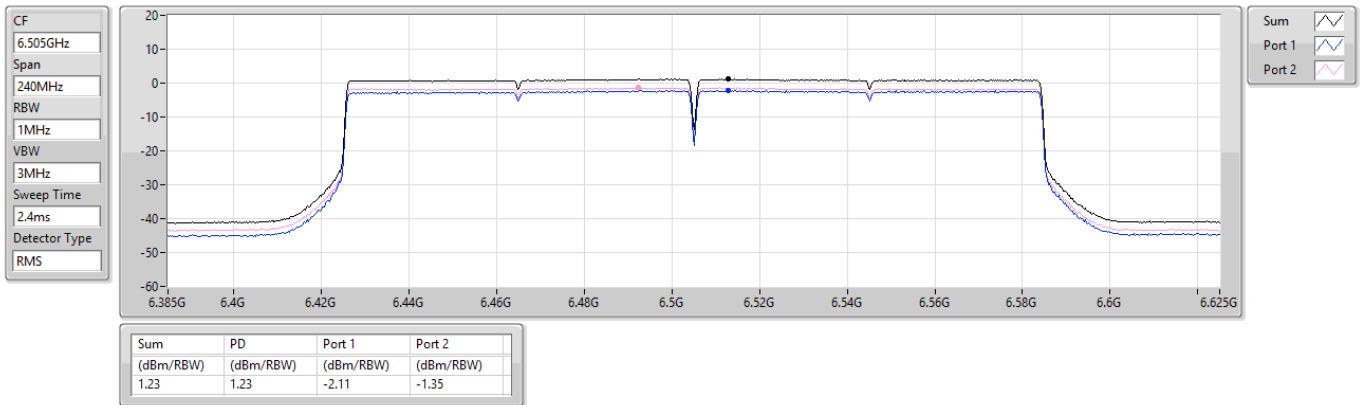

6.525-6.875GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD


6665MHz

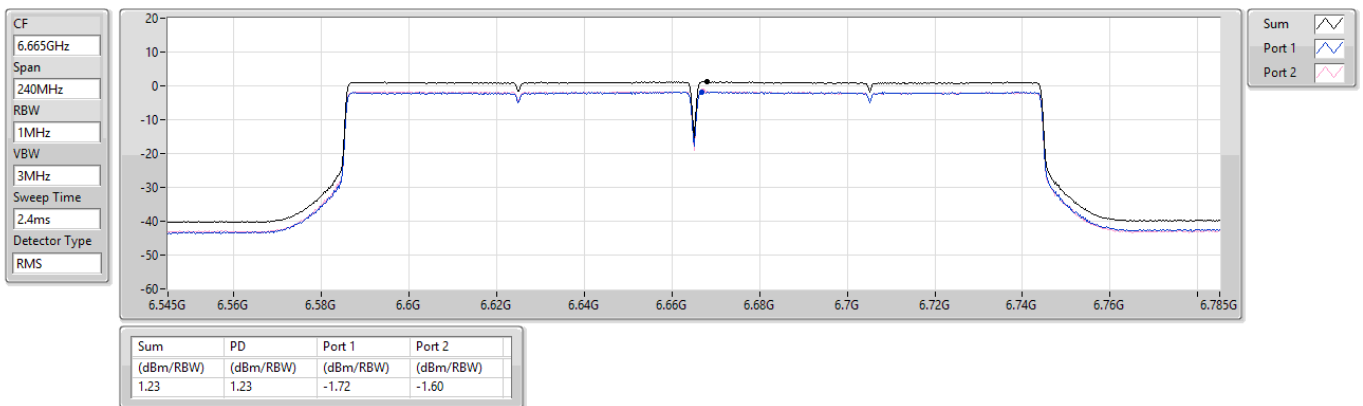

6.525-6.875GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD


6825MHz Straddle 6.525-6.875GHz

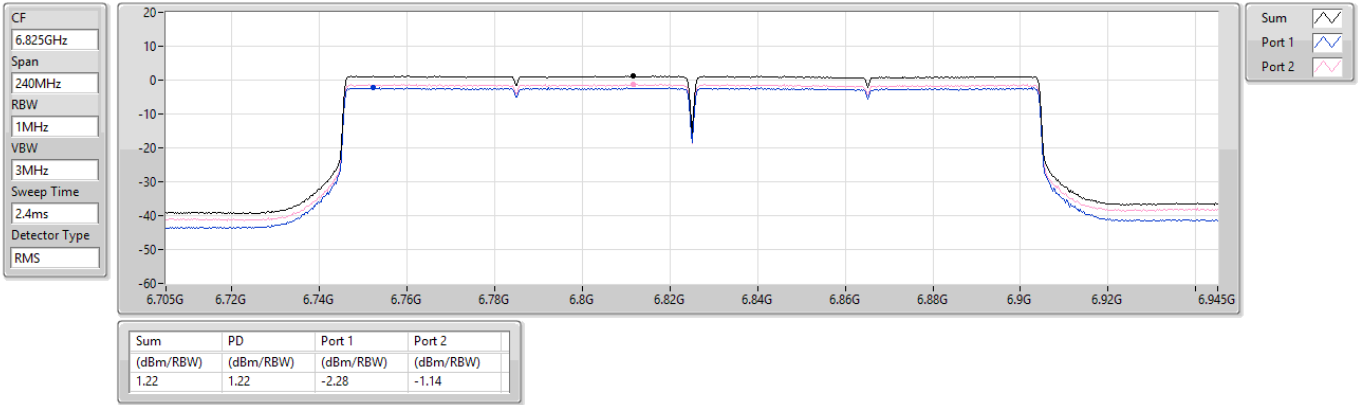

6.875-7.125GHz_802.11be EHT160_Nss2,(MCS0)_2TX

PSD

6985MHz

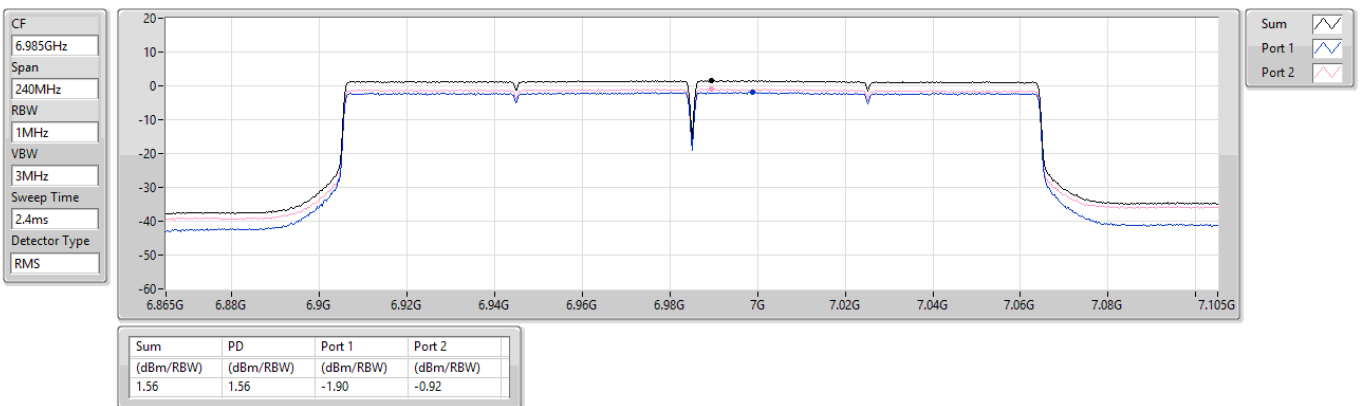




5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0)_2TX

PSD

6105MHz

CF
6.105GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4.8ms
Detector Type
RMS

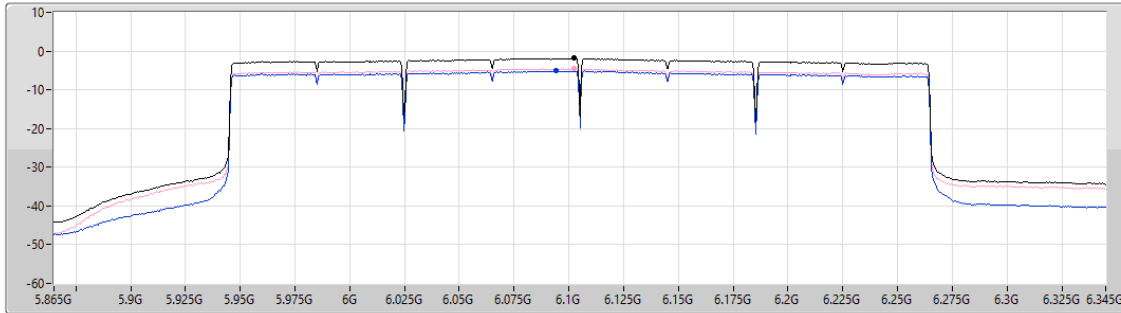

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.88	-1.88	-5.12	-4.52

5.925-6.425GHz_802.11be EHT320_Nss2,(MCS0)_2TX

PSD

6265MHz

CF
6.265GHz
Span
480MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

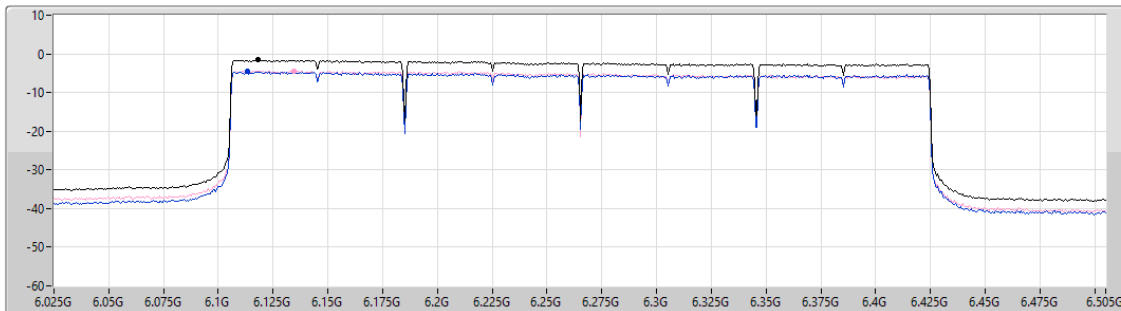


Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.58	-1.58	-4.61	-4.36

6.525-6.875GHz_802.11be EHT320_Nss2,(MCS0)_2TX

PSD


6425MHz Straddle 6.525-6.875GHz

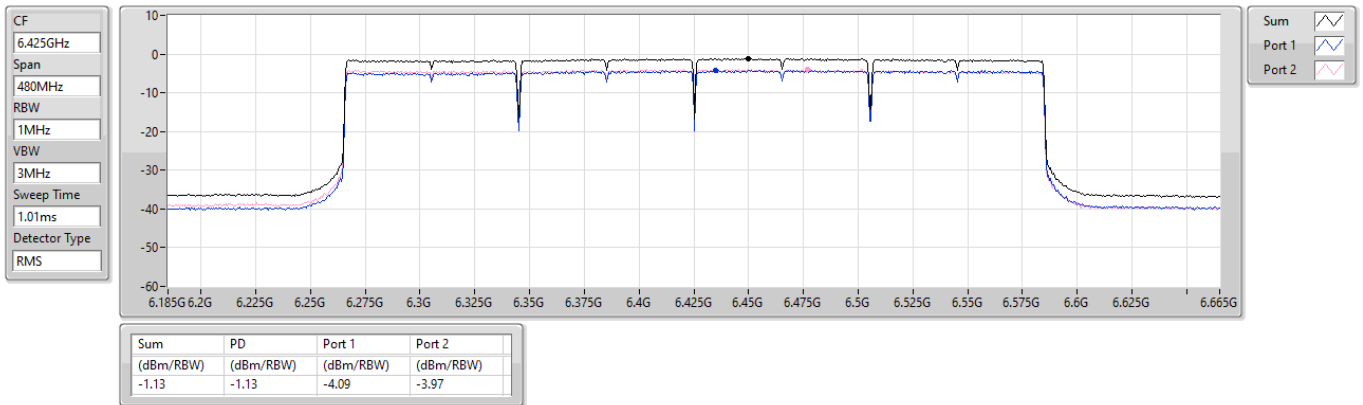

6.525-6.875GHz_802.11be EHT320_Nss2,(MCS0)_2TX

PSD

6585MHz Straddle 6.525-6.875GHz

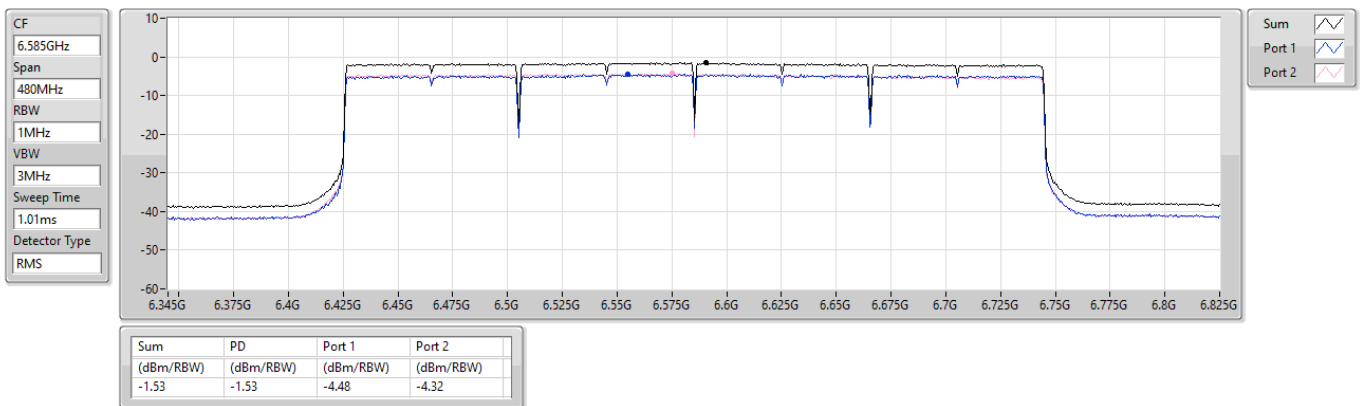




6.525-6.875GHz_802.11be EHT320_Nss2,(MCS0)_2TX

PSD


6745MHz Straddle 6.525-6.875GHz

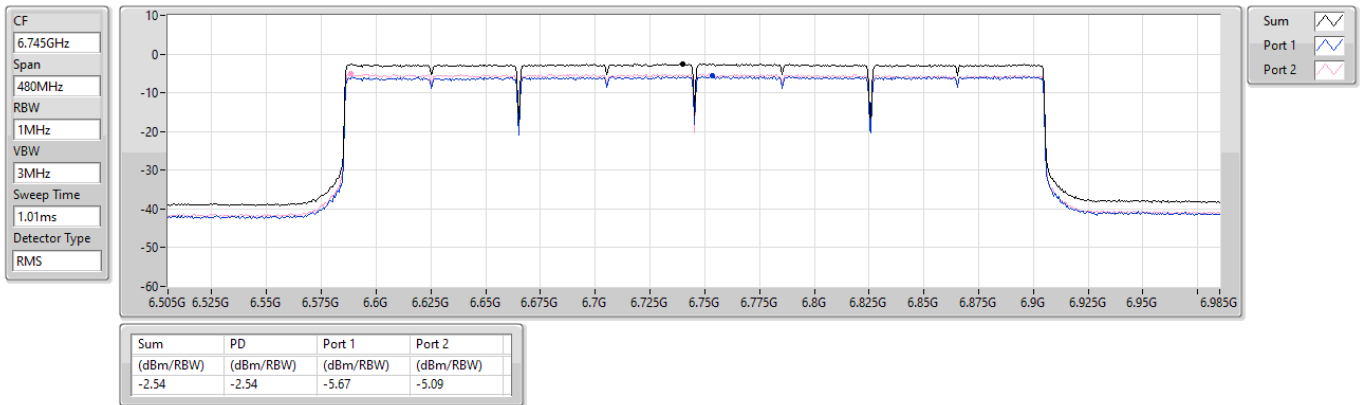

6.525-6.875GHz_802.11be EHT320_Nss2,(MCS0)_2TX

PSD


6905MHz Straddle 6.525-6.875GHz

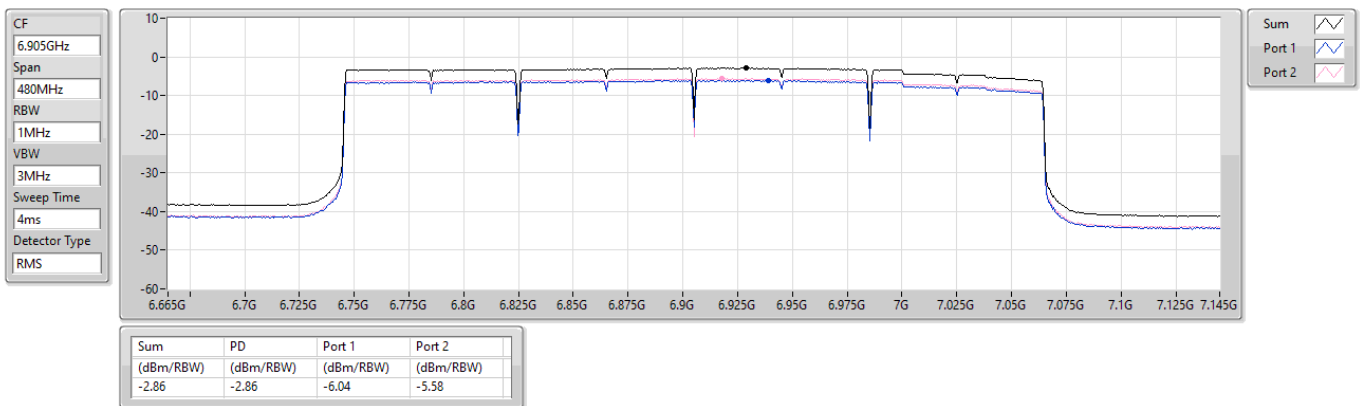




POE mode


Unwanted Emissions (Below 1GHz)

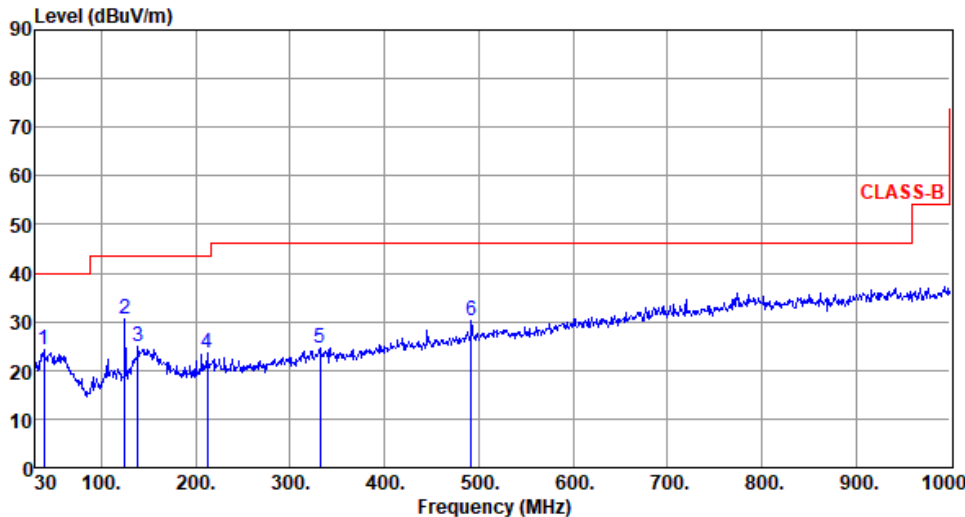Modulation	be EHT160	Test Freq. (MHz)	6345																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>38.73</td><td>24.32</td><td>40.00</td><td>-15.68</td><td>33.29</td><td>-8.97</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>125.06</td><td>30.65</td><td>43.50</td><td>-12.85</td><td>41.17</td><td>-10.52</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>138.64</td><td>24.75</td><td>43.50</td><td>-18.75</td><td>33.86</td><td>-9.11</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>212.36</td><td>23.66</td><td>43.50</td><td>-19.84</td><td>35.51</td><td>-11.85</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>331.67</td><td>24.63</td><td>46.00</td><td>-21.37</td><td>31.43</td><td>-6.80</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>491.72</td><td>30.18</td><td>46.00</td><td>-15.82</td><td>32.81</td><td>-2.63</td><td>Peak</td><td>---</td><td>---</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	38.73	24.32	40.00	-15.68	33.29	-8.97	Peak	---	---	2	125.06	30.65	43.50	-12.85	41.17	-10.52	Peak	---	---	3	138.64	24.75	43.50	-18.75	33.86	-9.11	Peak	---	---	4	212.36	23.66	43.50	-19.84	35.51	-11.85	Peak	---	---	5	331.67	24.63	46.00	-21.37	31.43	-6.80	Peak	---	---	6	491.72	30.18	46.00	-15.82	32.81	-2.63	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	38.73	24.32	40.00	-15.68	33.29	-8.97	Peak	---	---																																																																
2	125.06	30.65	43.50	-12.85	41.17	-10.52	Peak	---	---																																																																
3	138.64	24.75	43.50	-18.75	33.86	-9.11	Peak	---	---																																																																
4	212.36	23.66	43.50	-19.84	35.51	-11.85	Peak	---	---																																																																
5	331.67	24.63	46.00	-21.37	31.43	-6.80	Peak	---	---																																																																
6	491.72	30.18	46.00	-15.82	32.81	-2.63	Peak	---	---																																																																

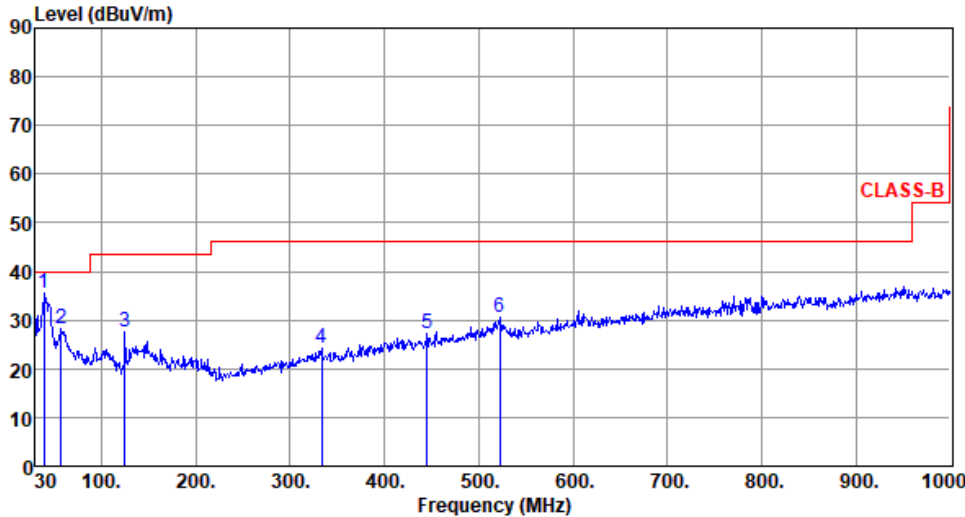


Modulation	be EHT160	Test Freq. (MHz)	6345																																																																						
Polarization	Vertical																																																																								
Test By :Roger Lu Temperature(°C):25 Humidity(%):61																																																																									
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>38.73</td><td>35.45</td><td>40.00</td><td>-4.55</td><td>44.42</td><td>-8.97</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>57.16</td><td>28.09</td><td>40.00</td><td>-11.91</td><td>36.37</td><td>-8.28</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>125.06</td><td>27.49</td><td>43.50</td><td>-16.01</td><td>38.01</td><td>-10.52</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>333.61</td><td>24.10</td><td>46.00</td><td>-21.90</td><td>30.89</td><td>-6.79</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>445.16</td><td>27.25</td><td>46.00</td><td>-18.75</td><td>30.88</td><td>-3.63</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>522.76</td><td>30.40</td><td>46.00</td><td>-15.60</td><td>32.32</td><td>-1.92</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	38.73	35.45	40.00	-4.55	44.42	-8.97	Peak	---	---	2	57.16	28.09	40.00	-11.91	36.37	-8.28	Peak	---	---	3	125.06	27.49	43.50	-16.01	38.01	-10.52	Peak	---	---	4	333.61	24.10	46.00	-21.90	30.89	-6.79	Peak	---	---	5	445.16	27.25	46.00	-18.75	30.88	-3.63	Peak	---	---	6	522.76	30.40	46.00	-15.60	32.32	-1.92	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	38.73	35.45	40.00	-4.55	44.42	-8.97	Peak	---	---																																																																
2	57.16	28.09	40.00	-11.91	36.37	-8.28	Peak	---	---																																																																
3	125.06	27.49	43.50	-16.01	38.01	-10.52	Peak	---	---																																																																
4	333.61	24.10	46.00	-21.90	30.89	-6.79	Peak	---	---																																																																
5	445.16	27.25	46.00	-18.75	30.88	-3.63	Peak	---	---																																																																
6	522.76	30.40	46.00	-15.60	32.32	-1.92	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									

Unwanted Emissions (Above 1GHz) for be EHT20

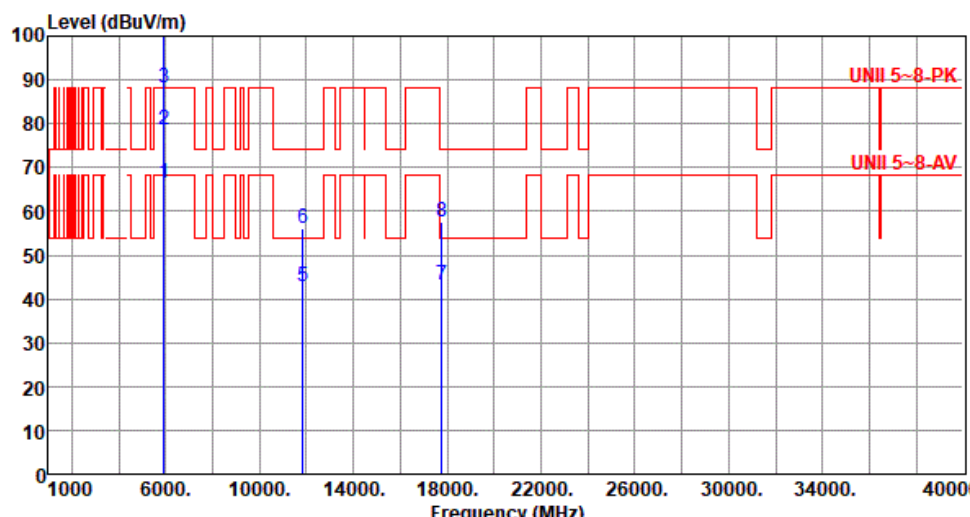Modulation	be EHT20	Test Freq. (MHz)	5935																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>66.41</td><td>68.20</td><td>-1.79</td><td>65.02</td><td>1.39</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>2</td><td>5925.00</td><td>78.54</td><td>88.20</td><td>-9.66</td><td>77.15</td><td>1.39</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>3 *</td><td>5935.00</td><td>88.18</td><td></td><td></td><td>86.77</td><td>1.41</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>4 *</td><td>5935.00</td><td>100.57</td><td></td><td></td><td>99.16</td><td>1.41</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>5</td><td>11850.00</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>35.42</td><td>7.42</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>6</td><td>11850.00</td><td>56.04</td><td>74.00</td><td>-17.96</td><td>48.62</td><td>7.42</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>7</td><td>17775.00</td><td>43.31</td><td>54.00</td><td>-10.69</td><td>32.48</td><td>10.83</td><td>Average</td><td>100</td><td>225</td></tr><tr><td>8</td><td>17775.00</td><td>57.50</td><td>74.00</td><td>-16.50</td><td>46.67</td><td>10.83</td><td>Peak</td><td>100</td><td>225</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	66.41	68.20	-1.79	65.02	1.39	Average	100	211	2	5925.00	78.54	88.20	-9.66	77.15	1.39	Peak	100	211	3 *	5935.00	88.18			86.77	1.41	Average	100	211	4 *	5935.00	100.57			99.16	1.41	Peak	100	211	5	11850.00	42.84	54.00	-11.16	35.42	7.42	Average	100	178	6	11850.00	56.04	74.00	-17.96	48.62	7.42	Peak	100	178	7	17775.00	43.31	54.00	-10.69	32.48	10.83	Average	100	225	8	17775.00	57.50	74.00	-16.50	46.67	10.83	Peak	100	225
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5925.00	66.41	68.20	-1.79	65.02	1.39	Average	100	211																																																																																				
2	5925.00	78.54	88.20	-9.66	77.15	1.39	Peak	100	211																																																																																				
3 *	5935.00	88.18			86.77	1.41	Average	100	211																																																																																				
4 *	5935.00	100.57			99.16	1.41	Peak	100	211																																																																																				
5	11850.00	42.84	54.00	-11.16	35.42	7.42	Average	100	178																																																																																				
6	11850.00	56.04	74.00	-17.96	48.62	7.42	Peak	100	178																																																																																				
7	17775.00	43.31	54.00	-10.69	32.48	10.83	Average	100	225																																																																																				
8	17775.00	57.50	74.00	-16.50	46.67	10.83	Peak	100	225																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													

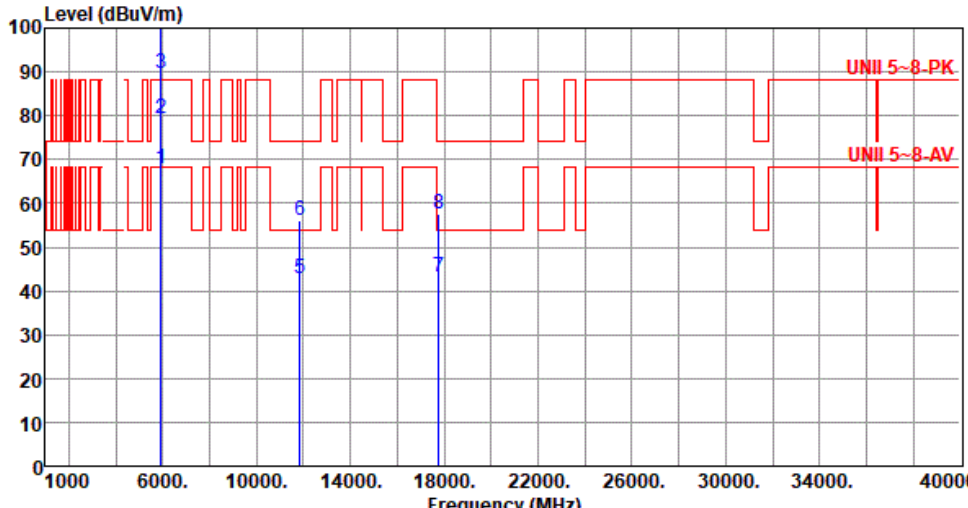

Modulation	be EHT20	Test Freq. (MHz)	5935						
Polarization	Vertical								
Test By :Sean Yu		Temperature(°C):25		Humidity(%):65					
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5925.00	68.05	68.20	-0.15	66.66	1.39	Average	239	219
2	5925.00	79.41	88.20	-8.79	78.02	1.39	Peak	239	219
3 *	5935.00	89.83			88.42	1.41	Average	239	219
4 *	5935.00	102.99			101.58	1.41	Peak	239	219
5	11850.00	42.86	54.00	-11.14	35.44	7.42	Average	100	251
6	11850.00	56.08	74.00	-17.92	48.66	7.42	Peak	100	251
7	17775.00	43.20	54.00	-10.80	32.37	10.83	Average	100	117
8	17775.00	57.49	74.00	-16.51	46.66	10.83	Peak	100	117


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency.

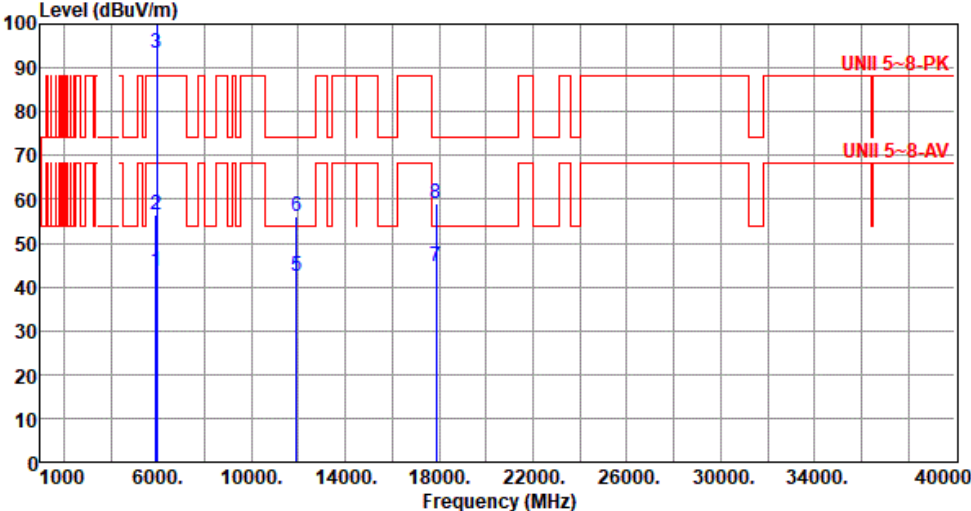


Modulation	be EHT20	Test Freq. (MHz)	5955																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>43.55</td><td>68.20</td><td>-24.65</td><td>42.16</td><td>1.39</td><td>Average</td><td>230</td><td>212</td></tr><tr><td>2</td><td>5925.00</td><td>56.49</td><td>88.20</td><td>-31.71</td><td>55.10</td><td>1.39</td><td>Peak</td><td>230</td><td>212</td></tr><tr><td>3 *</td><td>5955.00</td><td>93.46</td><td></td><td></td><td>92.01</td><td>1.45</td><td>Average</td><td>230</td><td>212</td></tr><tr><td>4 *</td><td>5955.00</td><td>107.54</td><td></td><td></td><td>106.09</td><td>1.45</td><td>Peak</td><td>230</td><td>212</td></tr><tr><td>5</td><td>11910.00</td><td>42.62</td><td>54.00</td><td>-11.38</td><td>35.26</td><td>7.36</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>6</td><td>11910.00</td><td>55.92</td><td>74.00</td><td>-18.08</td><td>48.56</td><td>7.36</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>7</td><td>17865.00</td><td>44.48</td><td>54.00</td><td>-9.52</td><td>32.16</td><td>12.32</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>8</td><td>17865.00</td><td>58.88</td><td>74.00</td><td>-15.12</td><td>46.56</td><td>12.32</td><td>Peak</td><td>100</td><td>204</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.55	68.20	-24.65	42.16	1.39	Average	230	212	2	5925.00	56.49	88.20	-31.71	55.10	1.39	Peak	230	212	3 *	5955.00	93.46			92.01	1.45	Average	230	212	4 *	5955.00	107.54			106.09	1.45	Peak	230	212	5	11910.00	42.62	54.00	-11.38	35.26	7.36	Average	100	178	6	11910.00	55.92	74.00	-18.08	48.56	7.36	Peak	100	178	7	17865.00	44.48	54.00	-9.52	32.16	12.32	Average	100	204	8	17865.00	58.88	74.00	-15.12	46.56	12.32	Peak	100	204
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5925.00	43.55	68.20	-24.65	42.16	1.39	Average	230	212																																																																																				
2	5925.00	56.49	88.20	-31.71	55.10	1.39	Peak	230	212																																																																																				
3 *	5955.00	93.46			92.01	1.45	Average	230	212																																																																																				
4 *	5955.00	107.54			106.09	1.45	Peak	230	212																																																																																				
5	11910.00	42.62	54.00	-11.38	35.26	7.36	Average	100	178																																																																																				
6	11910.00	55.92	74.00	-18.08	48.56	7.36	Peak	100	178																																																																																				
7	17865.00	44.48	54.00	-9.52	32.16	12.32	Average	100	204																																																																																				
8	17865.00	58.88	74.00	-15.12	46.56	12.32	Peak	100	204																																																																																				



Modulation	be EHT20	Test Freq. (MHz)	5955																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>43.74</td><td>68.20</td><td>-24.46</td><td>42.35</td><td>1.39</td><td>Average</td><td>238</td><td>222</td></tr><tr><td>2</td><td>5925.00</td><td>57.16</td><td>88.20</td><td>-31.04</td><td>55.77</td><td>1.39</td><td>Peak</td><td>238</td><td>222</td></tr><tr><td>3 *</td><td>5955.00</td><td>95.57</td><td></td><td></td><td>94.12</td><td>1.45</td><td>Average</td><td>238</td><td>222</td></tr><tr><td>4 *</td><td>5955.00</td><td>108.97</td><td></td><td></td><td>107.52</td><td>1.45</td><td>Peak</td><td>238</td><td>222</td></tr><tr><td>5</td><td>11910.00</td><td>42.62</td><td>54.00</td><td>-11.38</td><td>35.26</td><td>7.36</td><td>Average</td><td>100</td><td>147</td></tr><tr><td>6</td><td>11910.00</td><td>56.73</td><td>74.00</td><td>-17.27</td><td>49.37</td><td>7.36</td><td>Peak</td><td>100</td><td>147</td></tr><tr><td>7</td><td>17865.00</td><td>44.60</td><td>54.00</td><td>-9.40</td><td>32.28</td><td>12.32</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>8</td><td>17865.00</td><td>58.90</td><td>74.00</td><td>-15.10</td><td>46.58</td><td>12.32</td><td>Peak</td><td>100</td><td>214</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.74	68.20	-24.46	42.35	1.39	Average	238	222	2	5925.00	57.16	88.20	-31.04	55.77	1.39	Peak	238	222	3 *	5955.00	95.57			94.12	1.45	Average	238	222	4 *	5955.00	108.97			107.52	1.45	Peak	238	222	5	11910.00	42.62	54.00	-11.38	35.26	7.36	Average	100	147	6	11910.00	56.73	74.00	-17.27	49.37	7.36	Peak	100	147	7	17865.00	44.60	54.00	-9.40	32.28	12.32	Average	100	214	8	17865.00	58.90	74.00	-15.10	46.58	12.32	Peak	100	214
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5925.00	43.74	68.20	-24.46	42.35	1.39	Average	238	222																																																																																				
2	5925.00	57.16	88.20	-31.04	55.77	1.39	Peak	238	222																																																																																				
3 *	5955.00	95.57			94.12	1.45	Average	238	222																																																																																				
4 *	5955.00	108.97			107.52	1.45	Peak	238	222																																																																																				
5	11910.00	42.62	54.00	-11.38	35.26	7.36	Average	100	147																																																																																				
6	11910.00	56.73	74.00	-17.27	49.37	7.36	Peak	100	147																																																																																				
7	17865.00	44.60	54.00	-9.40	32.28	12.32	Average	100	214																																																																																				
8	17865.00	58.90	74.00	-15.10	46.58	12.32	Peak	100	214																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													

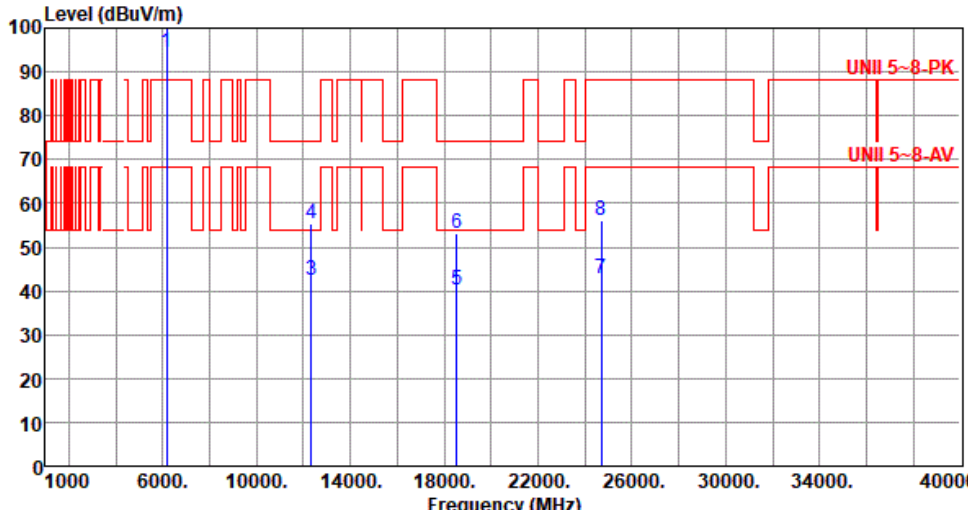

Modulation	be EHT20	Test Freq. (MHz)	6175							
Polarization	Horizontal									
Test By :Paul Lin Temperature(°C):25 Humidity(%):65										
Level (dBUV/m)  Frequency (MHz)										
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	
1	*	6175.00	94.34		92.58	1.76	Average	238	218	
2	*	6175.00	106.78		105.02	1.76	Peak	238	218	
3		12350.00	42.57	54.00	-11.43	35.43	7.14	Average	100	235
4		12350.00	55.33	74.00	-18.67	48.19	7.14	Peak	100	235
5		18525.00	40.18	54.00	-13.82	38.12	2.06	Average	100	26
6		18525.00	53.13	74.00	-20.87	51.07	2.06	Peak	100	26
7		24700.00	42.78	68.20	-25.42	33.92	8.86	Average	100	54
8		24700.00	55.91	88.20	-32.29	47.05	8.86	Peak	100	54
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency.										



Modulation	be EHT20	Test Freq. (MHz)	6175																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6175.00</td><td>97.43</td><td></td><td></td><td>95.67</td><td>1.76</td><td>Average</td><td>245</td><td>212</td></tr><tr><td>2 *</td><td>6175.00</td><td>110.41</td><td></td><td></td><td>108.65</td><td>1.76</td><td>Peak</td><td>245</td><td>212</td></tr><tr><td>3</td><td>12350.00</td><td>44.41</td><td>54.00</td><td>-9.59</td><td>37.27</td><td>7.14</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>4</td><td>12350.00</td><td>56.15</td><td>74.00</td><td>-17.85</td><td>49.01</td><td>7.14</td><td>Peak</td><td>100</td><td>23</td></tr><tr><td>5</td><td>18525.00</td><td>40.72</td><td>54.00</td><td>-13.28</td><td>38.66</td><td>2.06</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>6</td><td>18525.00</td><td>53.48</td><td>74.00</td><td>-20.52</td><td>51.42</td><td>2.06</td><td>Peak</td><td>100</td><td>56</td></tr><tr><td>7</td><td>24700.00</td><td>46.71</td><td>68.20</td><td>-21.49</td><td>37.85</td><td>8.86</td><td>Average</td><td>103</td><td>334</td></tr><tr><td>8</td><td>24700.00</td><td>57.16</td><td>88.20</td><td>-31.04</td><td>48.30</td><td>8.86</td><td>Peak</td><td>103</td><td>334</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6175.00	97.43			95.67	1.76	Average	245	212	2 *	6175.00	110.41			108.65	1.76	Peak	245	212	3	12350.00	44.41	54.00	-9.59	37.27	7.14	Average	100	23	4	12350.00	56.15	74.00	-17.85	49.01	7.14	Peak	100	23	5	18525.00	40.72	54.00	-13.28	38.66	2.06	Average	100	56	6	18525.00	53.48	74.00	-20.52	51.42	2.06	Peak	100	56	7	24700.00	46.71	68.20	-21.49	37.85	8.86	Average	103	334	8	24700.00	57.16	88.20	-31.04	48.30	8.86	Peak	103	334
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6175.00	97.43			95.67	1.76	Average	245	212																																																																																				
2 *	6175.00	110.41			108.65	1.76	Peak	245	212																																																																																				
3	12350.00	44.41	54.00	-9.59	37.27	7.14	Average	100	23																																																																																				
4	12350.00	56.15	74.00	-17.85	49.01	7.14	Peak	100	23																																																																																				
5	18525.00	40.72	54.00	-13.28	38.66	2.06	Average	100	56																																																																																				
6	18525.00	53.48	74.00	-20.52	51.42	2.06	Peak	100	56																																																																																				
7	24700.00	46.71	68.20	-21.49	37.85	8.86	Average	103	334																																																																																				
8	24700.00	57.16	88.20	-31.04	48.30	8.86	Peak	103	334																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	6415																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6415.00</td><td>94.55</td><td></td><td>91.69</td><td>2.86</td><td>Average</td><td>100</td><td>231</td></tr><tr><td>2</td><td>*</td><td>6415.00</td><td>107.44</td><td></td><td>104.58</td><td>2.86</td><td>Peak</td><td>100</td><td>231</td></tr><tr><td>3</td><td></td><td>12830.00</td><td>42.52</td><td>68.20 -25.68</td><td>35.43</td><td>7.09</td><td>Average</td><td>100</td><td>173</td></tr><tr><td>4</td><td></td><td>12830.00</td><td>55.72</td><td>88.20 -32.48</td><td>48.63</td><td>7.09</td><td>Peak</td><td>100</td><td>173</td></tr><tr><td>5</td><td></td><td>19245.00</td><td>40.66</td><td>54.00 -13.34</td><td>38.44</td><td>2.22</td><td>Average</td><td>100</td><td>217</td></tr><tr><td>6</td><td></td><td>19245.00</td><td>53.48</td><td>74.00 -20.52</td><td>51.26</td><td>2.22</td><td>Peak</td><td>100</td><td>217</td></tr><tr><td>7</td><td></td><td>25660.00</td><td>43.02</td><td>68.20 -25.18</td><td>34.27</td><td>8.75</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>8</td><td></td><td>25660.00</td><td>56.41</td><td>88.20 -31.79</td><td>47.66</td><td>8.75</td><td>Peak</td><td>100</td><td>205</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	*	6415.00	94.55		91.69	2.86	Average	100	231	2	*	6415.00	107.44		104.58	2.86	Peak	100	231	3		12830.00	42.52	68.20 -25.68	35.43	7.09	Average	100	173	4		12830.00	55.72	88.20 -32.48	48.63	7.09	Peak	100	173	5		19245.00	40.66	54.00 -13.34	38.44	2.22	Average	100	217	6		19245.00	53.48	74.00 -20.52	51.26	2.22	Peak	100	217	7		25660.00	43.02	68.20 -25.18	34.27	8.75	Average	100	205	8		25660.00	56.41	88.20 -31.79	47.66	8.75	Peak	100	205
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1	*	6415.00	94.55		91.69	2.86	Average	100	231																																																																																																								
2	*	6415.00	107.44		104.58	2.86	Peak	100	231																																																																																																								
3		12830.00	42.52	68.20 -25.68	35.43	7.09	Average	100	173																																																																																																								
4		12830.00	55.72	88.20 -32.48	48.63	7.09	Peak	100	173																																																																																																								
5		19245.00	40.66	54.00 -13.34	38.44	2.22	Average	100	217																																																																																																								
6		19245.00	53.48	74.00 -20.52	51.26	2.22	Peak	100	217																																																																																																								
7		25660.00	43.02	68.20 -25.18	34.27	8.75	Average	100	205																																																																																																								
8		25660.00	56.41	88.20 -31.79	47.66	8.75	Peak	100	205																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	



Modulation	be EHT20	Test Freq. (MHz)	6415																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6415.00</td><td>97.30</td><td></td><td></td><td>94.44</td><td>2.86</td><td>Average</td><td>226</td><td>211</td></tr><tr><td>2 *</td><td>6415.00</td><td>110.55</td><td></td><td></td><td>107.69</td><td>2.86</td><td>Peak</td><td>226</td><td>211</td></tr><tr><td>3</td><td>12830.00</td><td>44.36</td><td>68.20</td><td>-23.84</td><td>37.27</td><td>7.09</td><td>Average</td><td>100</td><td>27</td></tr><tr><td>4</td><td>12830.00</td><td>56.36</td><td>88.20</td><td>-31.84</td><td>49.27</td><td>7.09</td><td>Peak</td><td>100</td><td>27</td></tr><tr><td>5</td><td>19245.00</td><td>40.59</td><td>54.00</td><td>-13.41</td><td>38.37</td><td>2.22</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>6</td><td>19245.00</td><td>53.44</td><td>74.00</td><td>-20.56</td><td>51.22</td><td>2.22</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>7</td><td>25660.00</td><td>43.26</td><td>68.20</td><td>-24.94</td><td>34.51</td><td>8.75</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>8</td><td>25660.00</td><td>56.43</td><td>88.20</td><td>-31.77</td><td>47.68</td><td>8.75</td><td>Peak</td><td>100</td><td>214</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6415.00	97.30			94.44	2.86	Average	226	211	2 *	6415.00	110.55			107.69	2.86	Peak	226	211	3	12830.00	44.36	68.20	-23.84	37.27	7.09	Average	100	27	4	12830.00	56.36	88.20	-31.84	49.27	7.09	Peak	100	27	5	19245.00	40.59	54.00	-13.41	38.37	2.22	Average	100	128	6	19245.00	53.44	74.00	-20.56	51.22	2.22	Peak	100	128	7	25660.00	43.26	68.20	-24.94	34.51	8.75	Average	100	214	8	25660.00	56.43	88.20	-31.77	47.68	8.75	Peak	100	214
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6415.00	97.30			94.44	2.86	Average	226	211																																																																																																								
2 *	6415.00	110.55			107.69	2.86	Peak	226	211																																																																																																								
3	12830.00	44.36	68.20	-23.84	37.27	7.09	Average	100	27																																																																																																								
4	12830.00	56.36	88.20	-31.84	49.27	7.09	Peak	100	27																																																																																																								
5	19245.00	40.59	54.00	-13.41	38.37	2.22	Average	100	128																																																																																																								
6	19245.00	53.44	74.00	-20.56	51.22	2.22	Peak	100	128																																																																																																								
7	25660.00	43.26	68.20	-24.94	34.51	8.75	Average	100	214																																																																																																								
8	25660.00	56.43	88.20	-31.77	47.68	8.75	Peak	100	214																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	



Modulation	be EHT20	Test Freq. (MHz)	6435
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	6435
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):25 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	6475																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) UNII 5-8-PK UNII 5-8-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>6475.00</td><td>92.17</td><td></td><td></td><td>89.01</td><td>3.16</td><td>Average</td><td>227</td><td>233</td></tr><tr><td>2 *</td><td>6475.00</td><td>105.27</td><td></td><td></td><td>102.11</td><td>3.16</td><td>Peak</td><td>227</td><td>233</td></tr><tr><td>3</td><td>12950.00</td><td>41.49</td><td>68.20</td><td>-26.71</td><td>34.43</td><td>7.06</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>4</td><td>12950.00</td><td>54.04</td><td>88.20</td><td>-34.16</td><td>46.98</td><td>7.06</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>5</td><td>19425.00</td><td>40.13</td><td>54.00</td><td>-13.87</td><td>38.09</td><td>2.04</td><td>Average</td><td>100</td><td>94</td></tr><tr><td>6</td><td>19425.00</td><td>53.46</td><td>74.00</td><td>-20.54</td><td>51.42</td><td>2.04</td><td>Peak</td><td>100</td><td>94</td></tr><tr><td>7</td><td>25900.00</td><td>42.89</td><td>68.20</td><td>-25.31</td><td>34.13</td><td>8.76</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>8</td><td>25900.00</td><td>55.94</td><td>88.20</td><td>-32.26</td><td>47.18</td><td>8.76</td><td>Peak</td><td>100</td><td>105</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6475.00	92.17			89.01	3.16	Average	227	233	2 *	6475.00	105.27			102.11	3.16	Peak	227	233	3	12950.00	41.49	68.20	-26.71	34.43	7.06	Average	100	25	4	12950.00	54.04	88.20	-34.16	46.98	7.06	Peak	100	25	5	19425.00	40.13	54.00	-13.87	38.09	2.04	Average	100	94	6	19425.00	53.46	74.00	-20.54	51.42	2.04	Peak	100	94	7	25900.00	42.89	68.20	-25.31	34.13	8.76	Average	100	105	8	25900.00	55.94	88.20	-32.26	47.18	8.76	Peak	100	105
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6475.00	92.17			89.01	3.16	Average	227	233																																																																																																								
2 *	6475.00	105.27			102.11	3.16	Peak	227	233																																																																																																								
3	12950.00	41.49	68.20	-26.71	34.43	7.06	Average	100	25																																																																																																								
4	12950.00	54.04	88.20	-34.16	46.98	7.06	Peak	100	25																																																																																																								
5	19425.00	40.13	54.00	-13.87	38.09	2.04	Average	100	94																																																																																																								
6	19425.00	53.46	74.00	-20.54	51.42	2.04	Peak	100	94																																																																																																								
7	25900.00	42.89	68.20	-25.31	34.13	8.76	Average	100	105																																																																																																								
8	25900.00	55.94	88.20	-32.26	47.18	8.76	Peak	100	105																																																																																																								




Modulation	be EHT20	Test Freq. (MHz)	6475																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6475.00</td><td>95.58</td><td></td><td></td><td>92.42</td><td>3.16</td><td>Average</td><td>242</td><td>213</td></tr><tr><td>2 *</td><td>6475.00</td><td>108.49</td><td></td><td></td><td>105.33</td><td>3.16</td><td>Peak</td><td>242</td><td>213</td></tr><tr><td>3</td><td>12950.00</td><td>43.50</td><td>68.20</td><td>-24.70</td><td>36.44</td><td>7.06</td><td>Average</td><td>100</td><td>314</td></tr><tr><td>4</td><td>12950.00</td><td>55.39</td><td>88.20</td><td>-32.81</td><td>48.33</td><td>7.06</td><td>Peak</td><td>100</td><td>314</td></tr><tr><td>5</td><td>19425.00</td><td>40.25</td><td>54.00</td><td>-13.75</td><td>38.21</td><td>2.04</td><td>Average</td><td>100</td><td>72</td></tr><tr><td>6</td><td>19425.00</td><td>53.43</td><td>74.00</td><td>-20.57</td><td>51.39</td><td>2.04</td><td>Peak</td><td>100</td><td>72</td></tr><tr><td>7</td><td>25900.00</td><td>44.27</td><td>68.20</td><td>-23.93</td><td>35.51</td><td>8.76</td><td>Average</td><td>102</td><td>347</td></tr><tr><td>8</td><td>25900.00</td><td>56.50</td><td>88.20</td><td>-31.70</td><td>47.74</td><td>8.76</td><td>Peak</td><td>102</td><td>347</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6475.00	95.58			92.42	3.16	Average	242	213	2 *	6475.00	108.49			105.33	3.16	Peak	242	213	3	12950.00	43.50	68.20	-24.70	36.44	7.06	Average	100	314	4	12950.00	55.39	88.20	-32.81	48.33	7.06	Peak	100	314	5	19425.00	40.25	54.00	-13.75	38.21	2.04	Average	100	72	6	19425.00	53.43	74.00	-20.57	51.39	2.04	Peak	100	72	7	25900.00	44.27	68.20	-23.93	35.51	8.76	Average	102	347	8	25900.00	56.50	88.20	-31.70	47.74	8.76	Peak	102	347
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6475.00	95.58			92.42	3.16	Average	242	213																																																																																				
2 *	6475.00	108.49			105.33	3.16	Peak	242	213																																																																																				
3	12950.00	43.50	68.20	-24.70	36.44	7.06	Average	100	314																																																																																				
4	12950.00	55.39	88.20	-32.81	48.33	7.06	Peak	100	314																																																																																				
5	19425.00	40.25	54.00	-13.75	38.21	2.04	Average	100	72																																																																																				
6	19425.00	53.43	74.00	-20.57	51.39	2.04	Peak	100	72																																																																																				
7	25900.00	44.27	68.20	-23.93	35.51	8.76	Average	102	347																																																																																				
8	25900.00	56.50	88.20	-31.70	47.74	8.76	Peak	102	347																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	6515																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBUV/m) 100 90 80 70 60 50 40 30 20 10 0 1000 6000. 10000. 14000. 18000. 22000. 26000. 30000. 34000. 40000 Frequency (MHz) UNII 5~8-PK UNII 5~8-AV 4 3 6 5 8 7 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6515.00</td><td>91.70</td><td></td><td>88.43</td><td>3.27</td><td>Average</td><td>100</td><td>217</td></tr><tr><td>2</td><td>*</td><td>6515.00</td><td>114.50</td><td></td><td>111.23</td><td>3.27</td><td>Peak</td><td>100</td><td>217</td></tr><tr><td>3</td><td></td><td>13030.00</td><td>42.42</td><td>68.20 -25.78</td><td>35.46</td><td>6.96</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>4</td><td></td><td>13030.00</td><td>55.63</td><td>88.20 -32.57</td><td>48.67</td><td>6.96</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>5</td><td></td><td>19545.00</td><td>40.59</td><td>54.00 -13.41</td><td>38.43</td><td>2.16</td><td>Average</td><td>100</td><td>242</td></tr><tr><td>6</td><td></td><td>19545.00</td><td>53.37</td><td>74.00 -20.63</td><td>51.21</td><td>2.16</td><td>Peak</td><td>100</td><td>242</td></tr><tr><td>7</td><td></td><td>26060.00</td><td>43.46</td><td>68.20 -24.74</td><td>34.57</td><td>8.89</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>8</td><td></td><td>26060.00</td><td>56.53</td><td>88.20 -31.67</td><td>47.64</td><td>8.89</td><td>Peak</td><td>100</td><td>108</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	*	6515.00	91.70		88.43	3.27	Average	100	217	2	*	6515.00	114.50		111.23	3.27	Peak	100	217	3		13030.00	42.42	68.20 -25.78	35.46	6.96	Average	100	178	4		13030.00	55.63	88.20 -32.57	48.67	6.96	Peak	100	178	5		19545.00	40.59	54.00 -13.41	38.43	2.16	Average	100	242	6		19545.00	53.37	74.00 -20.63	51.21	2.16	Peak	100	242	7		26060.00	43.46	68.20 -24.74	34.57	8.89	Average	100	108	8		26060.00	56.53	88.20 -31.67	47.64	8.89	Peak	100	108
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1	*	6515.00	91.70		88.43	3.27	Average	100	217																																																																																																								
2	*	6515.00	114.50		111.23	3.27	Peak	100	217																																																																																																								
3		13030.00	42.42	68.20 -25.78	35.46	6.96	Average	100	178																																																																																																								
4		13030.00	55.63	88.20 -32.57	48.67	6.96	Peak	100	178																																																																																																								
5		19545.00	40.59	54.00 -13.41	38.43	2.16	Average	100	242																																																																																																								
6		19545.00	53.37	74.00 -20.63	51.21	2.16	Peak	100	242																																																																																																								
7		26060.00	43.46	68.20 -24.74	34.57	8.89	Average	100	108																																																																																																								
8		26060.00	56.53	88.20 -31.67	47.64	8.89	Peak	100	108																																																																																																								

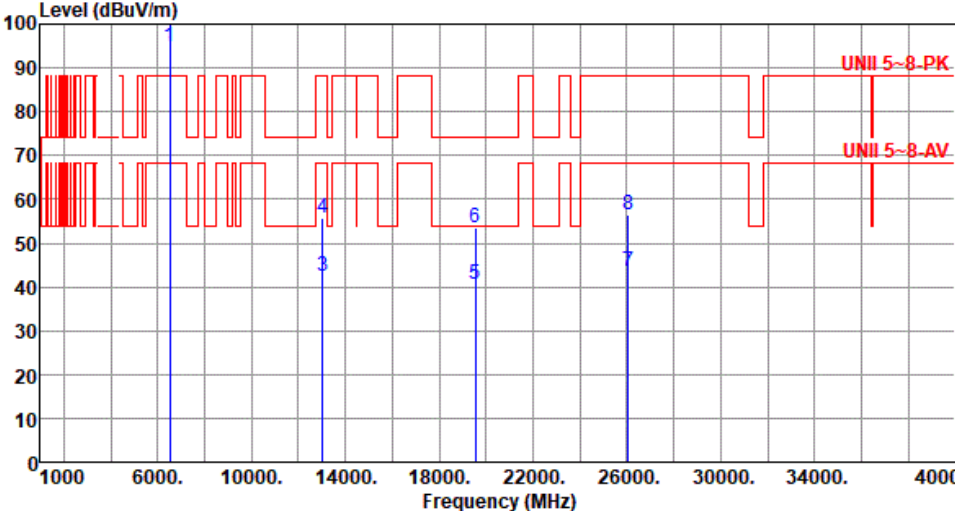

Modulation	be EHT20	Test Freq. (MHz)	6515																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6515.00</td><td>94.81</td><td></td><td></td><td>91.54</td><td>3.27</td><td>Average</td><td>229</td><td>215</td></tr><tr><td>2 *</td><td>6515.00</td><td>108.35</td><td></td><td></td><td>105.08</td><td>3.27</td><td>Peak</td><td>229</td><td>215</td></tr><tr><td>3</td><td>13030.00</td><td>42.52</td><td>68.20</td><td>-25.68</td><td>35.56</td><td>6.96</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>4</td><td>13030.00</td><td>55.54</td><td>88.20</td><td>-32.66</td><td>48.58</td><td>6.96</td><td>Peak</td><td>100</td><td>176</td></tr><tr><td>5</td><td>19545.00</td><td>40.71</td><td>54.00</td><td>-13.29</td><td>38.55</td><td>2.16</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>6</td><td>19545.00</td><td>53.58</td><td>74.00</td><td>-20.42</td><td>51.42</td><td>2.16</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>7</td><td>26060.00</td><td>43.36</td><td>68.20</td><td>-24.84</td><td>34.47</td><td>8.89</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>8</td><td>26060.00</td><td>56.56</td><td>88.20</td><td>-31.64</td><td>47.67</td><td>8.89</td><td>Peak</td><td>100</td><td>204</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6515.00	94.81			91.54	3.27	Average	229	215	2 *	6515.00	108.35			105.08	3.27	Peak	229	215	3	13030.00	42.52	68.20	-25.68	35.56	6.96	Average	100	176	4	13030.00	55.54	88.20	-32.66	48.58	6.96	Peak	100	176	5	19545.00	40.71	54.00	-13.29	38.55	2.16	Average	100	177	6	19545.00	53.58	74.00	-20.42	51.42	2.16	Peak	100	177	7	26060.00	43.36	68.20	-24.84	34.47	8.89	Average	100	204	8	26060.00	56.56	88.20	-31.64	47.67	8.89	Peak	100	204
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6515.00	94.81			91.54	3.27	Average	229	215																																																																																				
2 *	6515.00	108.35			105.08	3.27	Peak	229	215																																																																																				
3	13030.00	42.52	68.20	-25.68	35.56	6.96	Average	100	176																																																																																				
4	13030.00	55.54	88.20	-32.66	48.58	6.96	Peak	100	176																																																																																				
5	19545.00	40.71	54.00	-13.29	38.55	2.16	Average	100	177																																																																																				
6	19545.00	53.58	74.00	-20.42	51.42	2.16	Peak	100	177																																																																																				
7	26060.00	43.36	68.20	-24.84	34.47	8.89	Average	100	204																																																																																				
8	26060.00	56.56	88.20	-31.64	47.67	8.89	Peak	100	204																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	6535																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6535.00</td><td>90.98</td><td></td><td></td><td>87.64</td><td>3.34</td><td>Average</td><td>223</td><td>238</td></tr><tr><td>2 *</td><td>6535.00</td><td>103.61</td><td></td><td></td><td>100.27</td><td>3.34</td><td>Peak</td><td>223</td><td>238</td></tr><tr><td>3</td><td>13070.00</td><td>44.09</td><td>68.20</td><td>-24.11</td><td>37.13</td><td>6.96</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>4</td><td>13070.00</td><td>56.22</td><td>88.20</td><td>-31.98</td><td>49.26</td><td>6.96</td><td>Peak</td><td>100</td><td>176</td></tr><tr><td>5</td><td>19605.00</td><td>40.92</td><td>54.00</td><td>-13.08</td><td>38.72</td><td>2.20</td><td>Average</td><td>100</td><td>145</td></tr><tr><td>6</td><td>19605.00</td><td>53.63</td><td>74.00</td><td>-20.37</td><td>51.43</td><td>2.20</td><td>Peak</td><td>100</td><td>145</td></tr><tr><td>7</td><td>26140.00</td><td>43.48</td><td>68.20</td><td>-24.72</td><td>34.57</td><td>8.91</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>8</td><td>26140.00</td><td>56.57</td><td>88.20</td><td>-31.63</td><td>47.66</td><td>8.91</td><td>Peak</td><td>100</td><td>204</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6535.00	90.98			87.64	3.34	Average	223	238	2 *	6535.00	103.61			100.27	3.34	Peak	223	238	3	13070.00	44.09	68.20	-24.11	37.13	6.96	Average	100	176	4	13070.00	56.22	88.20	-31.98	49.26	6.96	Peak	100	176	5	19605.00	40.92	54.00	-13.08	38.72	2.20	Average	100	145	6	19605.00	53.63	74.00	-20.37	51.43	2.20	Peak	100	145	7	26140.00	43.48	68.20	-24.72	34.57	8.91	Average	100	204	8	26140.00	56.57	88.20	-31.63	47.66	8.91	Peak	100	204
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6535.00	90.98			87.64	3.34	Average	223	238																																																																																																								
2 *	6535.00	103.61			100.27	3.34	Peak	223	238																																																																																																								
3	13070.00	44.09	68.20	-24.11	37.13	6.96	Average	100	176																																																																																																								
4	13070.00	56.22	88.20	-31.98	49.26	6.96	Peak	100	176																																																																																																								
5	19605.00	40.92	54.00	-13.08	38.72	2.20	Average	100	145																																																																																																								
6	19605.00	53.63	74.00	-20.37	51.43	2.20	Peak	100	145																																																																																																								
7	26140.00	43.48	68.20	-24.72	34.57	8.91	Average	100	204																																																																																																								
8	26140.00	56.57	88.20	-31.63	47.66	8.91	Peak	100	204																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	




Modulation	be EHT20	Test Freq. (MHz)	6535																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6535.00</td><td>94.17</td><td></td><td></td><td>90.83</td><td>3.34</td><td>Average</td><td>239</td><td>214</td></tr><tr><td>2 *</td><td>6535.00</td><td>106.83</td><td></td><td></td><td>103.49</td><td>3.34</td><td>Peak</td><td>239</td><td>214</td></tr><tr><td>3</td><td>13070.00</td><td>44.22</td><td>68.20</td><td>-23.98</td><td>37.26</td><td>6.96</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>4</td><td>13070.00</td><td>56.39</td><td>88.20</td><td>-31.81</td><td>49.43</td><td>6.96</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>5</td><td>19605.00</td><td>40.68</td><td>54.00</td><td>-13.32</td><td>38.48</td><td>2.20</td><td>Average</td><td>100</td><td>255</td></tr><tr><td>6</td><td>19605.00</td><td>53.63</td><td>74.00</td><td>-20.37</td><td>51.43</td><td>2.20</td><td>Peak</td><td>100</td><td>255</td></tr><tr><td>7</td><td>26140.00</td><td>43.63</td><td>68.20</td><td>-24.57</td><td>34.72</td><td>8.91</td><td>Average</td><td>100</td><td>118</td></tr><tr><td>8</td><td>26140.00</td><td>56.58</td><td>88.20</td><td>-31.62</td><td>47.67</td><td>8.91</td><td>Peak</td><td>100</td><td>118</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1 *	6535.00	94.17			90.83	3.34	Average	239	214	2 *	6535.00	106.83			103.49	3.34	Peak	239	214	3	13070.00	44.22	68.20	-23.98	37.26	6.96	Average	100	126	4	13070.00	56.39	88.20	-31.81	49.43	6.96	Peak	100	126	5	19605.00	40.68	54.00	-13.32	38.48	2.20	Average	100	255	6	19605.00	53.63	74.00	-20.37	51.43	2.20	Peak	100	255	7	26140.00	43.63	68.20	-24.57	34.72	8.91	Average	100	118	8	26140.00	56.58	88.20	-31.62	47.67	8.91	Peak	100	118
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level			reading			High	Table																																																																																																								
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																								
1 *	6535.00	94.17			90.83	3.34	Average	239	214																																																																																																								
2 *	6535.00	106.83			103.49	3.34	Peak	239	214																																																																																																								
3	13070.00	44.22	68.20	-23.98	37.26	6.96	Average	100	126																																																																																																								
4	13070.00	56.39	88.20	-31.81	49.43	6.96	Peak	100	126																																																																																																								
5	19605.00	40.68	54.00	-13.32	38.48	2.20	Average	100	255																																																																																																								
6	19605.00	53.63	74.00	-20.37	51.43	2.20	Peak	100	255																																																																																																								
7	26140.00	43.63	68.20	-24.57	34.72	8.91	Average	100	118																																																																																																								
8	26140.00	56.58	88.20	-31.62	47.67	8.91	Peak	100	118																																																																																																								



Modulation	be EHT20	Test Freq. (MHz)	6715																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6715.00</td><td>90.65</td><td></td><td></td><td>87.17</td><td>3.48</td><td>Average</td><td>231</td><td>241</td></tr><tr><td>2 *</td><td>6715.00</td><td>103.81</td><td></td><td></td><td>100.33</td><td>3.48</td><td>Peak</td><td>231</td><td>241</td></tr><tr><td>3</td><td>13430.00</td><td>44.69</td><td>68.20</td><td>-23.51</td><td>37.17</td><td>7.52</td><td>Average</td><td>100</td><td>53</td></tr><tr><td>4</td><td>13430.00</td><td>57.26</td><td>88.20</td><td>-30.94</td><td>49.74</td><td>7.52</td><td>Peak</td><td>100</td><td>53</td></tr><tr><td>5</td><td>20145.00</td><td>40.16</td><td>54.00</td><td>-13.84</td><td>37.40</td><td>2.76</td><td>Average</td><td>100</td><td>71</td></tr><tr><td>6</td><td>20145.00</td><td>53.97</td><td>74.00</td><td>-20.03</td><td>51.21</td><td>2.76</td><td>Peak</td><td>100</td><td>71</td></tr><tr><td>7</td><td>26860.00</td><td>43.82</td><td>68.20</td><td>-24.38</td><td>34.52</td><td>9.30</td><td>Average</td><td>100</td><td>52</td></tr><tr><td>8</td><td>26860.00</td><td>57.14</td><td>88.20</td><td>-31.06</td><td>47.84</td><td>9.30</td><td>Peak</td><td>100</td><td>52</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6715.00	90.65			87.17	3.48	Average	231	241	2 *	6715.00	103.81			100.33	3.48	Peak	231	241	3	13430.00	44.69	68.20	-23.51	37.17	7.52	Average	100	53	4	13430.00	57.26	88.20	-30.94	49.74	7.52	Peak	100	53	5	20145.00	40.16	54.00	-13.84	37.40	2.76	Average	100	71	6	20145.00	53.97	74.00	-20.03	51.21	2.76	Peak	100	71	7	26860.00	43.82	68.20	-24.38	34.52	9.30	Average	100	52	8	26860.00	57.14	88.20	-31.06	47.84	9.30	Peak	100	52
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6715.00	90.65			87.17	3.48	Average	231	241																																																																																				
2 *	6715.00	103.81			100.33	3.48	Peak	231	241																																																																																				
3	13430.00	44.69	68.20	-23.51	37.17	7.52	Average	100	53																																																																																				
4	13430.00	57.26	88.20	-30.94	49.74	7.52	Peak	100	53																																																																																				
5	20145.00	40.16	54.00	-13.84	37.40	2.76	Average	100	71																																																																																				
6	20145.00	53.97	74.00	-20.03	51.21	2.76	Peak	100	71																																																																																				
7	26860.00	43.82	68.20	-24.38	34.52	9.30	Average	100	52																																																																																				
8	26860.00	57.14	88.20	-31.06	47.84	9.30	Peak	100	52																																																																																				

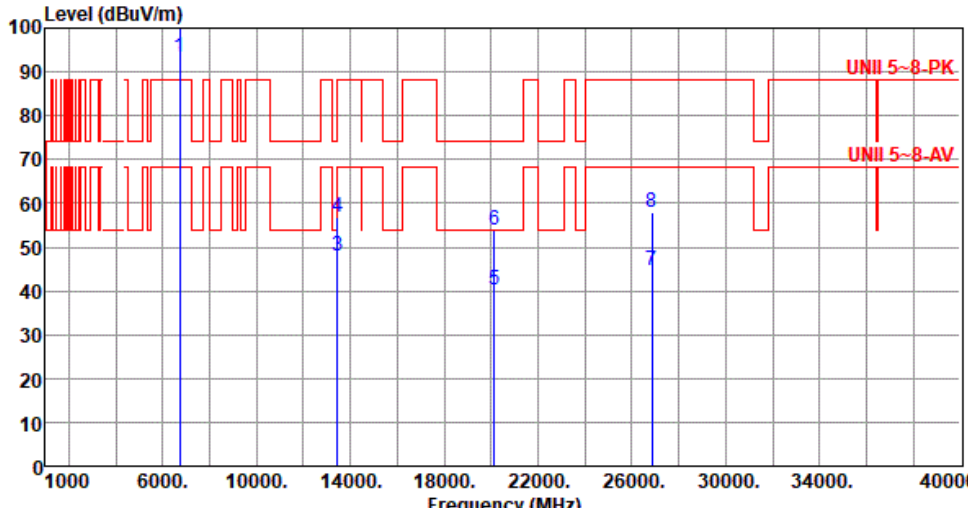


Modulation	be EHT20	Test Freq. (MHz)	6715																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6715.00</td><td>93.54</td><td></td><td></td><td>90.06</td><td>3.48</td><td>Average</td><td>260</td><td>143</td></tr><tr><td>2 *</td><td>6715.00</td><td>106.66</td><td></td><td></td><td>103.18</td><td>3.48</td><td>Peak</td><td>260</td><td>143</td></tr><tr><td>3</td><td>13430.00</td><td>48.09</td><td>68.20</td><td>-20.11</td><td>40.57</td><td>7.52</td><td>Average</td><td>100</td><td>41</td></tr><tr><td>4</td><td>13430.00</td><td>56.96</td><td>88.20</td><td>-31.24</td><td>49.44</td><td>7.52</td><td>Peak</td><td>100</td><td>41</td></tr><tr><td>5</td><td>20145.00</td><td>40.25</td><td>54.00</td><td>-13.75</td><td>37.49</td><td>2.76</td><td>Average</td><td>100</td><td>63</td></tr><tr><td>6</td><td>20145.00</td><td>53.74</td><td>74.00</td><td>-20.26</td><td>50.98</td><td>2.76</td><td>Peak</td><td>100</td><td>63</td></tr><tr><td>7</td><td>26860.00</td><td>44.67</td><td>68.20</td><td>-23.53</td><td>35.37</td><td>9.30</td><td>Average</td><td>100</td><td>286</td></tr><tr><td>8</td><td>26860.00</td><td>57.89</td><td>88.20</td><td>-30.31</td><td>48.59</td><td>9.30</td><td>Peak</td><td>100</td><td>286</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1 *	6715.00	93.54			90.06	3.48	Average	260	143	2 *	6715.00	106.66			103.18	3.48	Peak	260	143	3	13430.00	48.09	68.20	-20.11	40.57	7.52	Average	100	41	4	13430.00	56.96	88.20	-31.24	49.44	7.52	Peak	100	41	5	20145.00	40.25	54.00	-13.75	37.49	2.76	Average	100	63	6	20145.00	53.74	74.00	-20.26	50.98	2.76	Peak	100	63	7	26860.00	44.67	68.20	-23.53	35.37	9.30	Average	100	286	8	26860.00	57.89	88.20	-30.31	48.59	9.30	Peak	100	286
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level			reading			High	Table																																																																																																								
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																								
1 *	6715.00	93.54			90.06	3.48	Average	260	143																																																																																																								
2 *	6715.00	106.66			103.18	3.48	Peak	260	143																																																																																																								
3	13430.00	48.09	68.20	-20.11	40.57	7.52	Average	100	41																																																																																																								
4	13430.00	56.96	88.20	-31.24	49.44	7.52	Peak	100	41																																																																																																								
5	20145.00	40.25	54.00	-13.75	37.49	2.76	Average	100	63																																																																																																								
6	20145.00	53.74	74.00	-20.26	50.98	2.76	Peak	100	63																																																																																																								
7	26860.00	44.67	68.20	-23.53	35.37	9.30	Average	100	286																																																																																																								
8	26860.00	57.89	88.20	-30.31	48.59	9.30	Peak	100	286																																																																																																								




Modulation	be EHT20	Test Freq. (MHz)	6855																																																																																																																									
Polarization	Horizontal																																																																																																																											
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																												
Level (dBuV/m) UNII 5-8-PK UNII 5-8-AV Frequency (MHz) <table><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6855.00</td><td>92.27</td><td></td><td></td><td>88.58</td><td>3.69</td><td>Average</td><td>231</td><td>241</td></tr><tr><td>2</td><td>*</td><td>6855.00</td><td>105.83</td><td></td><td></td><td>102.14</td><td>3.69</td><td>Peak</td><td>231</td><td>241</td></tr><tr><td>3</td><td></td><td>13710.00</td><td>45.09</td><td>68.20</td><td>-23.11</td><td>37.43</td><td>7.66</td><td>Average</td><td>100</td><td>147</td></tr><tr><td>4</td><td></td><td>13710.00</td><td>57.17</td><td>88.20</td><td>-31.03</td><td>49.51</td><td>7.66</td><td>Peak</td><td>100</td><td>147</td></tr><tr><td>5</td><td></td><td>20565.00</td><td>41.72</td><td>54.00</td><td>-12.28</td><td>38.48</td><td>3.24</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>6</td><td></td><td>20565.00</td><td>54.72</td><td>74.00</td><td>-19.28</td><td>51.48</td><td>3.24</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>7</td><td></td><td>27420.00</td><td>43.66</td><td>68.20</td><td>-24.54</td><td>34.22</td><td>9.44</td><td>Average</td><td>100</td><td>156</td></tr><tr><td>8</td><td></td><td>27420.00</td><td>57.57</td><td>88.20</td><td>-30.63</td><td>48.13</td><td>9.44</td><td>Peak</td><td>100</td><td>156</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level	dBuV/m	dB	reading	dB/m		High	Table										cm	deg	1	*	6855.00	92.27			88.58	3.69	Average	231	241	2	*	6855.00	105.83			102.14	3.69	Peak	231	241	3		13710.00	45.09	68.20	-23.11	37.43	7.66	Average	100	147	4		13710.00	57.17	88.20	-31.03	49.51	7.66	Peak	100	147	5		20565.00	41.72	54.00	-12.28	38.48	3.24	Average	100	177	6		20565.00	54.72	74.00	-19.28	51.48	3.24	Peak	100	177	7		27420.00	43.66	68.20	-24.54	34.22	9.44	Average	100	156	8		27420.00	57.57	88.20	-30.63	48.13	9.44	Peak	100	156
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
		MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
									cm	deg																																																																																																																		
1	*	6855.00	92.27			88.58	3.69	Average	231	241																																																																																																																		
2	*	6855.00	105.83			102.14	3.69	Peak	231	241																																																																																																																		
3		13710.00	45.09	68.20	-23.11	37.43	7.66	Average	100	147																																																																																																																		
4		13710.00	57.17	88.20	-31.03	49.51	7.66	Peak	100	147																																																																																																																		
5		20565.00	41.72	54.00	-12.28	38.48	3.24	Average	100	177																																																																																																																		
6		20565.00	54.72	74.00	-19.28	51.48	3.24	Peak	100	177																																																																																																																		
7		27420.00	43.66	68.20	-24.54	34.22	9.44	Average	100	156																																																																																																																		
8		27420.00	57.57	88.20	-30.63	48.13	9.44	Peak	100	156																																																																																																																		

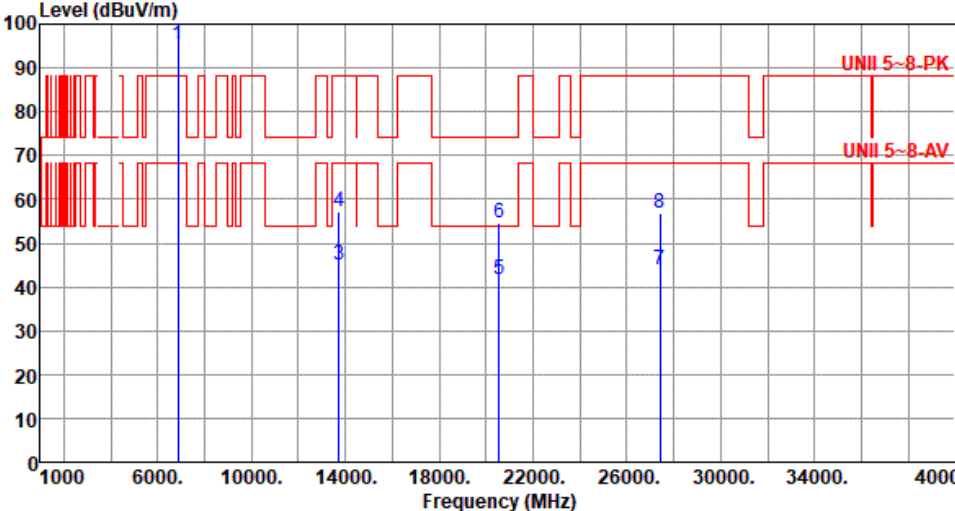

Modulation	be EHT20	Test Freq. (MHz)	6855																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6855.00</td><td>95.06</td><td></td><td></td><td>91.37</td><td>3.69</td><td>Average</td><td>238</td><td>216</td></tr><tr><td>2 *</td><td>6855.00</td><td>107.90</td><td></td><td></td><td>104.21</td><td>3.69</td><td>Peak</td><td>238</td><td>216</td></tr><tr><td>3</td><td>13710.00</td><td>45.04</td><td>68.20</td><td>-23.16</td><td>37.38</td><td>7.66</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>4</td><td>13710.00</td><td>57.17</td><td>88.20</td><td>-31.03</td><td>49.51</td><td>7.66</td><td>Peak</td><td>100</td><td>205</td></tr><tr><td>5</td><td>20565.00</td><td>41.68</td><td>54.00</td><td>-12.32</td><td>38.44</td><td>3.24</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>6</td><td>20565.00</td><td>54.67</td><td>74.00</td><td>-19.33</td><td>51.43</td><td>3.24</td><td>Peak</td><td>100</td><td>148</td></tr><tr><td>7</td><td>27420.00</td><td>43.82</td><td>68.20</td><td>-24.38</td><td>34.38</td><td>9.44</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>8</td><td>27420.00</td><td>56.95</td><td>88.20</td><td>-31.25</td><td>47.51</td><td>9.44</td><td>Peak</td><td>100</td><td>204</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6855.00	95.06			91.37	3.69	Average	238	216	2 *	6855.00	107.90			104.21	3.69	Peak	238	216	3	13710.00	45.04	68.20	-23.16	37.38	7.66	Average	100	205	4	13710.00	57.17	88.20	-31.03	49.51	7.66	Peak	100	205	5	20565.00	41.68	54.00	-12.32	38.44	3.24	Average	100	148	6	20565.00	54.67	74.00	-19.33	51.43	3.24	Peak	100	148	7	27420.00	43.82	68.20	-24.38	34.38	9.44	Average	100	204	8	27420.00	56.95	88.20	-31.25	47.51	9.44	Peak	100	204
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6855.00	95.06			91.37	3.69	Average	238	216																																																																																				
2 *	6855.00	107.90			104.21	3.69	Peak	238	216																																																																																				
3	13710.00	45.04	68.20	-23.16	37.38	7.66	Average	100	205																																																																																				
4	13710.00	57.17	88.20	-31.03	49.51	7.66	Peak	100	205																																																																																				
5	20565.00	41.68	54.00	-12.32	38.44	3.24	Average	100	148																																																																																				
6	20565.00	54.67	74.00	-19.33	51.43	3.24	Peak	100	148																																																																																				
7	27420.00	43.82	68.20	-24.38	34.38	9.44	Average	100	204																																																																																				
8	27420.00	56.95	88.20	-31.25	47.51	9.44	Peak	100	204																																																																																				

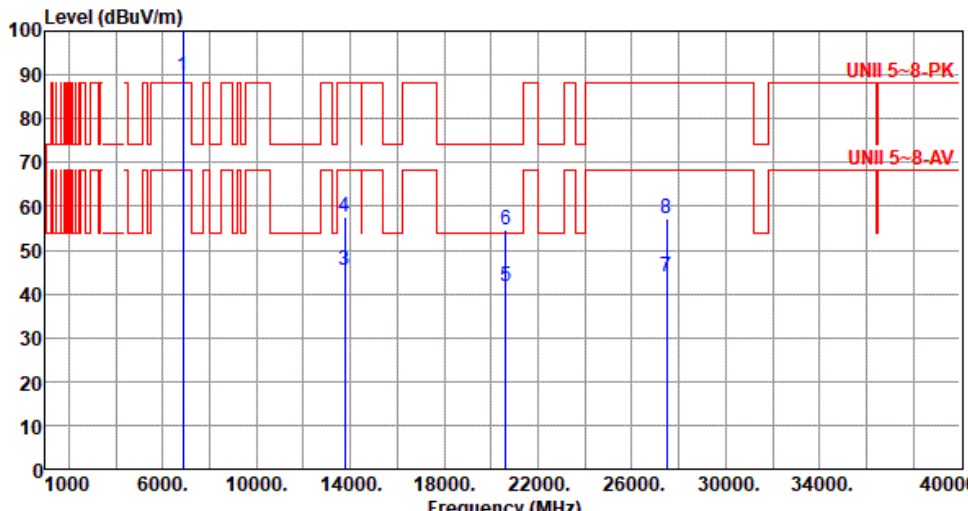

Modulation	be EHT20	Test Freq. (MHz)	6875																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6875.00</td><td>89.71</td><td></td><td></td><td>85.90</td><td>3.81</td><td>Average</td><td>224</td><td>235</td></tr><tr><td>2 *</td><td>6875.00</td><td>102.84</td><td></td><td></td><td>99.03</td><td>3.81</td><td>Peak</td><td>224</td><td>235</td></tr><tr><td>3</td><td>13750.00</td><td>45.35</td><td>68.20</td><td>-22.85</td><td>37.66</td><td>7.69</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>4</td><td>13750.00</td><td>57.55</td><td>88.20</td><td>-30.65</td><td>49.86</td><td>7.69</td><td>Peak</td><td>100</td><td>176</td></tr><tr><td>5</td><td>20625.00</td><td>41.78</td><td>54.00</td><td>-12.22</td><td>38.46</td><td>3.32</td><td>Average</td><td>100</td><td>157</td></tr><tr><td>6</td><td>20625.00</td><td>54.75</td><td>74.00</td><td>-19.25</td><td>51.43</td><td>3.32</td><td>Peak</td><td>100</td><td>157</td></tr><tr><td>7</td><td>27500.00</td><td>44.00</td><td>68.20</td><td>-24.20</td><td>34.51</td><td>9.49</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>8</td><td>27500.00</td><td>57.14</td><td>88.20</td><td>-31.06</td><td>47.65</td><td>9.49</td><td>Peak</td><td>100</td><td>204</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6875.00	89.71			85.90	3.81	Average	224	235	2 *	6875.00	102.84			99.03	3.81	Peak	224	235	3	13750.00	45.35	68.20	-22.85	37.66	7.69	Average	100	176	4	13750.00	57.55	88.20	-30.65	49.86	7.69	Peak	100	176	5	20625.00	41.78	54.00	-12.22	38.46	3.32	Average	100	157	6	20625.00	54.75	74.00	-19.25	51.43	3.32	Peak	100	157	7	27500.00	44.00	68.20	-24.20	34.51	9.49	Average	100	204	8	27500.00	57.14	88.20	-31.06	47.65	9.49	Peak	100	204
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6875.00	89.71			85.90	3.81	Average	224	235																																																																																																								
2 *	6875.00	102.84			99.03	3.81	Peak	224	235																																																																																																								
3	13750.00	45.35	68.20	-22.85	37.66	7.69	Average	100	176																																																																																																								
4	13750.00	57.55	88.20	-30.65	49.86	7.69	Peak	100	176																																																																																																								
5	20625.00	41.78	54.00	-12.22	38.46	3.32	Average	100	157																																																																																																								
6	20625.00	54.75	74.00	-19.25	51.43	3.32	Peak	100	157																																																																																																								
7	27500.00	44.00	68.20	-24.20	34.51	9.49	Average	100	204																																																																																																								
8	27500.00	57.14	88.20	-31.06	47.65	9.49	Peak	100	204																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	



Modulation	be EHT20	Test Freq. (MHz)	6875																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6875.00</td><td>95.50</td><td></td><td>91.69</td><td>3.81</td><td>Average</td><td>226</td><td>216</td></tr><tr><td>2</td><td>*</td><td>6875.00</td><td>108.77</td><td></td><td>104.96</td><td>3.81</td><td>Peak</td><td>226</td><td>216</td></tr><tr><td>3</td><td></td><td>13750.00</td><td>45.20</td><td>68.20 -23.00</td><td>37.51</td><td>7.69</td><td>Average</td><td>100</td><td>284</td></tr><tr><td>4</td><td></td><td>13750.00</td><td>57.24</td><td>88.20 -30.96</td><td>49.55</td><td>7.69</td><td>Peak</td><td>100</td><td>284</td></tr><tr><td>5</td><td></td><td>20625.00</td><td>41.76</td><td>54.00 -12.24</td><td>38.44</td><td>3.32</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>6</td><td></td><td>20625.00</td><td>54.65</td><td>74.00 -19.35</td><td>51.33</td><td>3.32</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>7</td><td></td><td>27500.00</td><td>44.07</td><td>68.20 -24.13</td><td>34.58</td><td>9.49</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>8</td><td></td><td>27500.00</td><td>57.43</td><td>88.20 -30.77</td><td>47.94</td><td>9.49</td><td>Peak</td><td>100</td><td>223</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	*	6875.00	95.50		91.69	3.81	Average	226	216	2	*	6875.00	108.77		104.96	3.81	Peak	226	216	3		13750.00	45.20	68.20 -23.00	37.51	7.69	Average	100	284	4		13750.00	57.24	88.20 -30.96	49.55	7.69	Peak	100	284	5		20625.00	41.76	54.00 -12.24	38.44	3.32	Average	100	251	6		20625.00	54.65	74.00 -19.35	51.33	3.32	Peak	100	251	7		27500.00	44.07	68.20 -24.13	34.58	9.49	Average	100	223	8		27500.00	57.43	88.20 -30.77	47.94	9.49	Peak	100	223
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1	*	6875.00	95.50		91.69	3.81	Average	226	216																																																																																																								
2	*	6875.00	108.77		104.96	3.81	Peak	226	216																																																																																																								
3		13750.00	45.20	68.20 -23.00	37.51	7.69	Average	100	284																																																																																																								
4		13750.00	57.24	88.20 -30.96	49.55	7.69	Peak	100	284																																																																																																								
5		20625.00	41.76	54.00 -12.24	38.44	3.32	Average	100	251																																																																																																								
6		20625.00	54.65	74.00 -19.35	51.33	3.32	Peak	100	251																																																																																																								
7		27500.00	44.07	68.20 -24.13	34.58	9.49	Average	100	223																																																																																																								
8		27500.00	57.43	88.20 -30.77	47.94	9.49	Peak	100	223																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	




Modulation	be EHT20	Test Freq. (MHz)	6895																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6895.00</td><td>89.64</td><td></td><td></td><td>85.72</td><td>3.92</td><td>Average</td><td>237</td><td>243</td></tr><tr><td>2 *</td><td>6895.00</td><td>102.55</td><td></td><td></td><td>98.63</td><td>3.92</td><td>Peak</td><td>237</td><td>243</td></tr><tr><td>3</td><td>13790.00</td><td>44.51</td><td>68.20</td><td>-23.69</td><td>36.79</td><td>7.72</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>4</td><td>13790.00</td><td>56.95</td><td>88.20</td><td>-31.25</td><td>49.23</td><td>7.72</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>5</td><td>20685.00</td><td>41.82</td><td>54.00</td><td>-12.18</td><td>38.43</td><td>3.39</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>6</td><td>20685.00</td><td>54.82</td><td>74.00</td><td>-19.18</td><td>51.43</td><td>3.39</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>7</td><td>27580.00</td><td>44.03</td><td>68.20</td><td>-24.17</td><td>34.51</td><td>9.52</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>8</td><td>27580.00</td><td>57.28</td><td>88.20</td><td>-30.92</td><td>47.76</td><td>9.52</td><td>Peak</td><td>100</td><td>208</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6895.00	89.64			85.72	3.92	Average	237	243	2 *	6895.00	102.55			98.63	3.92	Peak	237	243	3	13790.00	44.51	68.20	-23.69	36.79	7.72	Average	100	208	4	13790.00	56.95	88.20	-31.25	49.23	7.72	Peak	100	208	5	20685.00	41.82	54.00	-12.18	38.43	3.39	Average	100	177	6	20685.00	54.82	74.00	-19.18	51.43	3.39	Peak	100	177	7	27580.00	44.03	68.20	-24.17	34.51	9.52	Average	100	208	8	27580.00	57.28	88.20	-30.92	47.76	9.52	Peak	100	208
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6895.00	89.64			85.72	3.92	Average	237	243																																																																																				
2 *	6895.00	102.55			98.63	3.92	Peak	237	243																																																																																				
3	13790.00	44.51	68.20	-23.69	36.79	7.72	Average	100	208																																																																																				
4	13790.00	56.95	88.20	-31.25	49.23	7.72	Peak	100	208																																																																																				
5	20685.00	41.82	54.00	-12.18	38.43	3.39	Average	100	177																																																																																				
6	20685.00	54.82	74.00	-19.18	51.43	3.39	Peak	100	177																																																																																				
7	27580.00	44.03	68.20	-24.17	34.51	9.52	Average	100	208																																																																																				
8	27580.00	57.28	88.20	-30.92	47.76	9.52	Peak	100	208																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	6895																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6895.00</td><td>95.34</td><td></td><td></td><td>91.42</td><td>3.92</td><td>Average</td><td>241</td><td>216</td></tr><tr><td>2 *</td><td>6895.00</td><td>108.49</td><td></td><td></td><td>104.57</td><td>3.92</td><td>Peak</td><td>241</td><td>216</td></tr><tr><td>3</td><td>13790.00</td><td>44.26</td><td>68.20</td><td>-23.94</td><td>36.54</td><td>7.72</td><td>Average</td><td>100</td><td>182</td></tr><tr><td>4</td><td>13790.00</td><td>56.99</td><td>88.20</td><td>-31.21</td><td>49.27</td><td>7.72</td><td>Peak</td><td>100</td><td>182</td></tr><tr><td>5</td><td>20685.00</td><td>41.85</td><td>54.00</td><td>-12.15</td><td>38.46</td><td>3.39</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>6</td><td>20685.00</td><td>54.82</td><td>74.00</td><td>-19.18</td><td>51.43</td><td>3.39</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>7</td><td>27580.00</td><td>43.94</td><td>68.20</td><td>-24.26</td><td>34.42</td><td>9.52</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>8</td><td>27580.00</td><td>57.08</td><td>88.20</td><td>-31.12</td><td>47.56</td><td>9.52</td><td>Peak</td><td>100</td><td>204</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6895.00	95.34			91.42	3.92	Average	241	216	2 *	6895.00	108.49			104.57	3.92	Peak	241	216	3	13790.00	44.26	68.20	-23.94	36.54	7.72	Average	100	182	4	13790.00	56.99	88.20	-31.21	49.27	7.72	Peak	100	182	5	20685.00	41.85	54.00	-12.15	38.46	3.39	Average	100	177	6	20685.00	54.82	74.00	-19.18	51.43	3.39	Peak	100	177	7	27580.00	43.94	68.20	-24.26	34.42	9.52	Average	100	204	8	27580.00	57.08	88.20	-31.12	47.56	9.52	Peak	100	204
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6895.00	95.34			91.42	3.92	Average	241	216																																																																																				
2 *	6895.00	108.49			104.57	3.92	Peak	241	216																																																																																				
3	13790.00	44.26	68.20	-23.94	36.54	7.72	Average	100	182																																																																																				
4	13790.00	56.99	88.20	-31.21	49.27	7.72	Peak	100	182																																																																																				
5	20685.00	41.85	54.00	-12.15	38.46	3.39	Average	100	177																																																																																				
6	20685.00	54.82	74.00	-19.18	51.43	3.39	Peak	100	177																																																																																				
7	27580.00	43.94	68.20	-24.26	34.42	9.52	Average	100	204																																																																																				
8	27580.00	57.08	88.20	-31.12	47.56	9.52	Peak	100	204																																																																																				

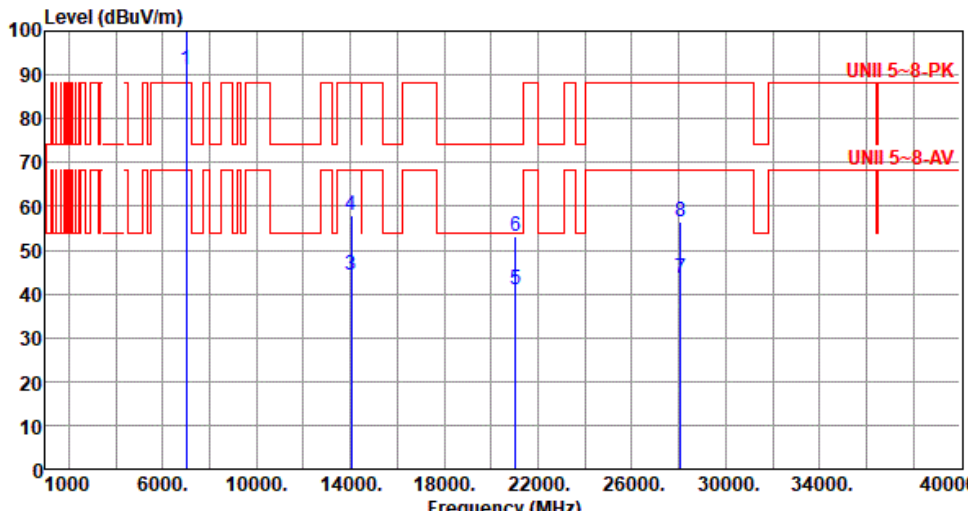

Modulation	be EHT20	Test Freq. (MHz)	7015																																																																																																																									
Polarization	Horizontal																																																																																																																											
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																																												
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>7015.00</td><td>90.98</td><td></td><td></td><td>86.53</td><td>4.45</td><td>Average</td><td>230</td><td>237</td></tr><tr><td>2</td><td>*</td><td>7015.00</td><td>104.21</td><td></td><td></td><td>99.76</td><td>4.45</td><td>Peak</td><td>230</td><td>237</td></tr><tr><td>3</td><td></td><td>14030.00</td><td>44.25</td><td>68.20</td><td>-23.95</td><td>36.24</td><td>8.01</td><td>Average</td><td>100</td><td>228</td></tr><tr><td>4</td><td></td><td>14030.00</td><td>57.85</td><td>88.20</td><td>-30.35</td><td>49.84</td><td>8.01</td><td>Peak</td><td>100</td><td>228</td></tr><tr><td>5</td><td></td><td>21045.00</td><td>40.94</td><td>54.00</td><td>-13.06</td><td>36.92</td><td>4.02</td><td>Average</td><td>100</td><td>78</td></tr><tr><td>6</td><td></td><td>21045.00</td><td>53.10</td><td>74.00</td><td>-20.90</td><td>49.08</td><td>4.02</td><td>Peak</td><td>100</td><td>78</td></tr><tr><td>7</td><td></td><td>28060.00</td><td>43.69</td><td>68.20</td><td>-24.51</td><td>33.84</td><td>9.85</td><td>Average</td><td>100</td><td>31</td></tr><tr><td>8</td><td></td><td>28060.00</td><td>56.40</td><td>88.20</td><td>-31.80</td><td>46.55</td><td>9.85</td><td>Peak</td><td>100</td><td>31</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level	dBuV/m	dB	reading	dB/m		High	Table				dBuV/m			dBuV			cm	deg	1	*	7015.00	90.98			86.53	4.45	Average	230	237	2	*	7015.00	104.21			99.76	4.45	Peak	230	237	3		14030.00	44.25	68.20	-23.95	36.24	8.01	Average	100	228	4		14030.00	57.85	88.20	-30.35	49.84	8.01	Peak	100	228	5		21045.00	40.94	54.00	-13.06	36.92	4.02	Average	100	78	6		21045.00	53.10	74.00	-20.90	49.08	4.02	Peak	100	78	7		28060.00	43.69	68.20	-24.51	33.84	9.85	Average	100	31	8		28060.00	56.40	88.20	-31.80	46.55	9.85	Peak	100	31
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
		MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
			dBuV/m			dBuV			cm	deg																																																																																																																		
1	*	7015.00	90.98			86.53	4.45	Average	230	237																																																																																																																		
2	*	7015.00	104.21			99.76	4.45	Peak	230	237																																																																																																																		
3		14030.00	44.25	68.20	-23.95	36.24	8.01	Average	100	228																																																																																																																		
4		14030.00	57.85	88.20	-30.35	49.84	8.01	Peak	100	228																																																																																																																		
5		21045.00	40.94	54.00	-13.06	36.92	4.02	Average	100	78																																																																																																																		
6		21045.00	53.10	74.00	-20.90	49.08	4.02	Peak	100	78																																																																																																																		
7		28060.00	43.69	68.20	-24.51	33.84	9.85	Average	100	31																																																																																																																		
8		28060.00	56.40	88.20	-31.80	46.55	9.85	Peak	100	31																																																																																																																		




Modulation	be EHT20	Test Freq. (MHz)	7015
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	7095																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1 *</td><td>7095.00</td><td>89.43</td><td></td><td></td><td>84.72</td><td>4.71</td><td>Average</td><td>238</td><td>223</td></tr><tr><td>2 *</td><td>7095.00</td><td>102.12</td><td></td><td></td><td>97.41</td><td>4.71</td><td>Peak</td><td>238</td><td>223</td></tr><tr><td>3</td><td>7125.00</td><td>47.13</td><td>68.20</td><td>-21.07</td><td>42.33</td><td>4.80</td><td>Average</td><td>238</td><td>223</td></tr><tr><td>4</td><td>7125.00</td><td>59.48</td><td>88.20</td><td>-28.72</td><td>54.68</td><td>4.80</td><td>Peak</td><td>238</td><td>223</td></tr><tr><td>5</td><td>14190.00</td><td>45.06</td><td>68.20</td><td>-23.14</td><td>36.48</td><td>8.58</td><td>Average</td><td>100</td><td>157</td></tr><tr><td>6</td><td>14190.00</td><td>57.81</td><td>88.20</td><td>-30.39</td><td>49.23</td><td>8.58</td><td>Peak</td><td>100</td><td>157</td></tr><tr><td>7</td><td>21285.00</td><td>42.75</td><td>54.00</td><td>-11.25</td><td>38.46</td><td>4.29</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>8</td><td>21285.00</td><td>55.52</td><td>74.00</td><td>-18.48</td><td>51.23</td><td>4.29</td><td>Peak</td><td>100</td><td>177</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	7095.00	89.43			84.72	4.71	Average	238	223	2 *	7095.00	102.12			97.41	4.71	Peak	238	223	3	7125.00	47.13	68.20	-21.07	42.33	4.80	Average	238	223	4	7125.00	59.48	88.20	-28.72	54.68	4.80	Peak	238	223	5	14190.00	45.06	68.20	-23.14	36.48	8.58	Average	100	157	6	14190.00	57.81	88.20	-30.39	49.23	8.58	Peak	100	157	7	21285.00	42.75	54.00	-11.25	38.46	4.29	Average	100	177	8	21285.00	55.52	74.00	-18.48	51.23	4.29	Peak	100	177
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	7095.00	89.43			84.72	4.71	Average	238	223																																																																																				
2 *	7095.00	102.12			97.41	4.71	Peak	238	223																																																																																				
3	7125.00	47.13	68.20	-21.07	42.33	4.80	Average	238	223																																																																																				
4	7125.00	59.48	88.20	-28.72	54.68	4.80	Peak	238	223																																																																																				
5	14190.00	45.06	68.20	-23.14	36.48	8.58	Average	100	157																																																																																				
6	14190.00	57.81	88.20	-30.39	49.23	8.58	Peak	100	157																																																																																				
7	21285.00	42.75	54.00	-11.25	38.46	4.29	Average	100	177																																																																																				
8	21285.00	55.52	74.00	-18.48	51.23	4.29	Peak	100	177																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													

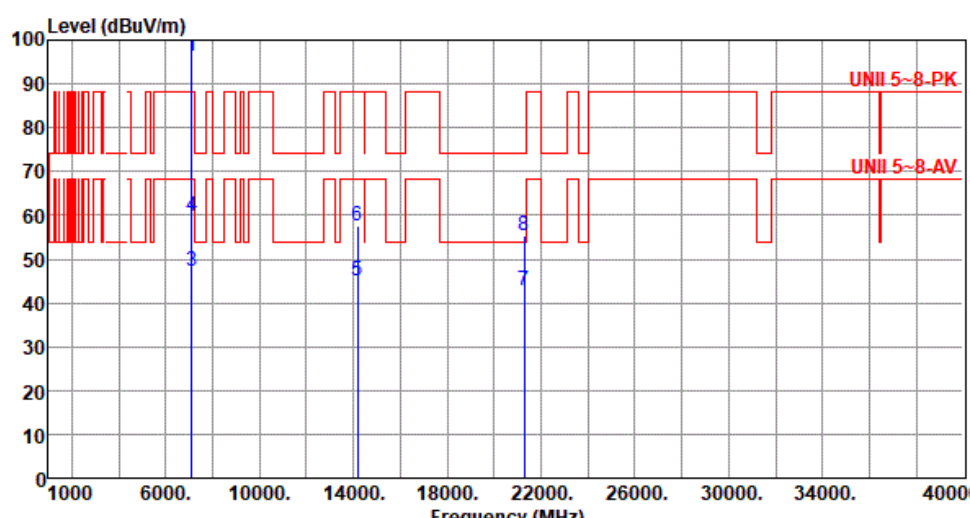

Modulation	be EHT20	Test Freq. (MHz)	7095						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):25 Humidity(%):65									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	7095.00	96.19			91.48	4.71	Average	239	289
2 *	7095.00	109.30			104.59	4.71	Peak	239	289
3	7125.00	47.15	68.20	-21.05	42.35	4.80	Average	239	289
4	7125.00	59.65	88.20	-28.55	54.85	4.80	Peak	239	289
5	14190.00	45.09	68.20	-23.11	36.51	8.58	Average	100	208
6	14190.00	57.71	88.20	-30.49	49.13	8.58	Peak	100	208
7	21285.00	42.73	54.00	-11.27	38.44	4.29	Average	100	176
8	21285.00	55.52	74.00	-18.48	51.23	4.29	Peak	100	176
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.									



Modulation	be EHT20	Test Freq. (MHz)	7115																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>7115.00</td><td>82.70</td><td></td><td></td><td>77.93</td><td>4.77</td><td>Average</td><td>227</td><td>233</td></tr><tr><td>2 *</td><td>7115.00</td><td>95.09</td><td></td><td></td><td>90.32</td><td>4.77</td><td>Peak</td><td>227</td><td>233</td></tr><tr><td>3</td><td>7125.00</td><td>62.63</td><td>68.20</td><td>-5.57</td><td>57.83</td><td>4.80</td><td>Average</td><td>227</td><td>233</td></tr><tr><td>4</td><td>7125.00</td><td>75.23</td><td>88.20</td><td>-12.97</td><td>70.43</td><td>4.80</td><td>Peak</td><td>227</td><td>233</td></tr><tr><td>5</td><td>14230.00</td><td>45.07</td><td>68.20</td><td>-23.13</td><td>36.48</td><td>8.59</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>6</td><td>14230.00</td><td>57.72</td><td>88.20</td><td>-30.48</td><td>49.13</td><td>8.59</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>7</td><td>21345.00</td><td>42.99</td><td>54.00</td><td>-11.01</td><td>38.64</td><td>4.35</td><td>Average</td><td>100</td><td>281</td></tr><tr><td>8</td><td>21345.00</td><td>55.58</td><td>74.00</td><td>-18.42</td><td>51.23</td><td>4.35</td><td>Peak</td><td>100</td><td>281</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	7115.00	82.70			77.93	4.77	Average	227	233	2 *	7115.00	95.09			90.32	4.77	Peak	227	233	3	7125.00	62.63	68.20	-5.57	57.83	4.80	Average	227	233	4	7125.00	75.23	88.20	-12.97	70.43	4.80	Peak	227	233	5	14230.00	45.07	68.20	-23.13	36.48	8.59	Average	100	177	6	14230.00	57.72	88.20	-30.48	49.13	8.59	Peak	100	177	7	21345.00	42.99	54.00	-11.01	38.64	4.35	Average	100	281	8	21345.00	55.58	74.00	-18.42	51.23	4.35	Peak	100	281
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	7115.00	82.70			77.93	4.77	Average	227	233																																																																																				
2 *	7115.00	95.09			90.32	4.77	Peak	227	233																																																																																				
3	7125.00	62.63	68.20	-5.57	57.83	4.80	Average	227	233																																																																																				
4	7125.00	75.23	88.20	-12.97	70.43	4.80	Peak	227	233																																																																																				
5	14230.00	45.07	68.20	-23.13	36.48	8.59	Average	100	177																																																																																				
6	14230.00	57.72	88.20	-30.48	49.13	8.59	Peak	100	177																																																																																				
7	21345.00	42.99	54.00	-11.01	38.64	4.35	Average	100	281																																																																																				
8	21345.00	55.58	74.00	-18.42	51.23	4.35	Peak	100	281																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	7115																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>7115.00</td><td>88.21</td><td></td><td></td><td>83.44</td><td>4.77</td><td>Average</td><td>226</td><td>290</td></tr><tr><td>2 *</td><td>7115.00</td><td>101.52</td><td></td><td></td><td>96.75</td><td>4.77</td><td>Peak</td><td>226</td><td>290</td></tr><tr><td>3</td><td>7125.00</td><td>67.89</td><td>68.20</td><td>-0.31</td><td>63.09</td><td>4.80</td><td>Average</td><td>226</td><td>290</td></tr><tr><td>4</td><td>7125.00</td><td>80.42</td><td>88.20</td><td>-7.78</td><td>75.62</td><td>4.80</td><td>Peak</td><td>226</td><td>290</td></tr><tr><td>5</td><td>14230.00</td><td>45.13</td><td>68.20</td><td>-23.07</td><td>36.54</td><td>8.59</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>6</td><td>14230.00</td><td>57.90</td><td>88.20</td><td>-30.30</td><td>49.31</td><td>8.59</td><td>Peak</td><td>100</td><td>158</td></tr><tr><td>7</td><td>21345.00</td><td>42.81</td><td>54.00</td><td>-11.19</td><td>38.46</td><td>4.35</td><td>Average</td><td>100</td><td>283</td></tr><tr><td>8</td><td>21345.00</td><td>55.57</td><td>74.00</td><td>-18.43</td><td>51.22</td><td>4.35</td><td>Peak</td><td>100</td><td>283</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	7115.00	88.21			83.44	4.77	Average	226	290	2 *	7115.00	101.52			96.75	4.77	Peak	226	290	3	7125.00	67.89	68.20	-0.31	63.09	4.80	Average	226	290	4	7125.00	80.42	88.20	-7.78	75.62	4.80	Peak	226	290	5	14230.00	45.13	68.20	-23.07	36.54	8.59	Average	100	158	6	14230.00	57.90	88.20	-30.30	49.31	8.59	Peak	100	158	7	21345.00	42.81	54.00	-11.19	38.46	4.35	Average	100	283	8	21345.00	55.57	74.00	-18.43	51.22	4.35	Peak	100	283
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	7115.00	88.21			83.44	4.77	Average	226	290																																																																																				
2 *	7115.00	101.52			96.75	4.77	Peak	226	290																																																																																				
3	7125.00	67.89	68.20	-0.31	63.09	4.80	Average	226	290																																																																																				
4	7125.00	80.42	88.20	-7.78	75.62	4.80	Peak	226	290																																																																																				
5	14230.00	45.13	68.20	-23.07	36.54	8.59	Average	100	158																																																																																				
6	14230.00	57.90	88.20	-30.30	49.31	8.59	Peak	100	158																																																																																				
7	21345.00	42.81	54.00	-11.19	38.46	4.35	Average	100	283																																																																																				
8	21345.00	55.57	74.00	-18.43	51.22	4.35	Peak	100	283																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													

Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5965																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>43.85</td><td>68.20</td><td>-24.35</td><td>42.46</td><td>1.39</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>2</td><td>5925.00</td><td>56.28</td><td>88.20</td><td>-31.92</td><td>54.89</td><td>1.39</td><td>Peak</td><td>100</td><td>213</td></tr><tr><td>3 *</td><td>5965.00</td><td>93.86</td><td></td><td></td><td>92.43</td><td>1.43</td><td>Average</td><td>100</td><td>213</td></tr><tr><td>4 *</td><td>5965.00</td><td>107.27</td><td></td><td></td><td>105.84</td><td>1.43</td><td>Peak</td><td>100</td><td>213</td></tr><tr><td>5</td><td>11930.00</td><td>43.03</td><td>54.00</td><td>-10.97</td><td>35.65</td><td>7.38</td><td>Average</td><td>100</td><td>184</td></tr><tr><td>6</td><td>11930.00</td><td>56.03</td><td>74.00</td><td>-17.97</td><td>48.65</td><td>7.38</td><td>Peak</td><td>100</td><td>184</td></tr><tr><td>7</td><td>17895.00</td><td>45.05</td><td>54.00</td><td>-8.95</td><td>32.18</td><td>12.87</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>8</td><td>17895.00</td><td>59.60</td><td>74.00</td><td>-14.40</td><td>46.73</td><td>12.87</td><td>Peak</td><td>100</td><td>204</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	43.85	68.20	-24.35	42.46	1.39	Average	100	213	2	5925.00	56.28	88.20	-31.92	54.89	1.39	Peak	100	213	3 *	5965.00	93.86			92.43	1.43	Average	100	213	4 *	5965.00	107.27			105.84	1.43	Peak	100	213	5	11930.00	43.03	54.00	-10.97	35.65	7.38	Average	100	184	6	11930.00	56.03	74.00	-17.97	48.65	7.38	Peak	100	184	7	17895.00	45.05	54.00	-8.95	32.18	12.87	Average	100	204	8	17895.00	59.60	74.00	-14.40	46.73	12.87	Peak	100	204
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5925.00	43.85	68.20	-24.35	42.46	1.39	Average	100	213																																																																																				
2	5925.00	56.28	88.20	-31.92	54.89	1.39	Peak	100	213																																																																																				
3 *	5965.00	93.86			92.43	1.43	Average	100	213																																																																																				
4 *	5965.00	107.27			105.84	1.43	Peak	100	213																																																																																				
5	11930.00	43.03	54.00	-10.97	35.65	7.38	Average	100	184																																																																																				
6	11930.00	56.03	74.00	-17.97	48.65	7.38	Peak	100	184																																																																																				
7	17895.00	45.05	54.00	-8.95	32.18	12.87	Average	100	204																																																																																				
8	17895.00	59.60	74.00	-14.40	46.73	12.87	Peak	100	204																																																																																				



Modulation	be EHT40	Test Freq. (MHz)	5965																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5925.00</td><td>44.52</td><td>68.20</td><td>-23.68</td><td>43.13</td><td>1.39</td><td>Average</td><td>237</td><td>219</td></tr><tr><td>2</td><td>5925.00</td><td>57.72</td><td>88.20</td><td>-30.48</td><td>56.33</td><td>1.39</td><td>Peak</td><td>237</td><td>219</td></tr><tr><td>3 *</td><td>5965.00</td><td>95.68</td><td></td><td></td><td>94.25</td><td>1.43</td><td>Average</td><td>237</td><td>219</td></tr><tr><td>4 *</td><td>5965.00</td><td>108.92</td><td></td><td></td><td>107.49</td><td>1.43</td><td>Peak</td><td>237</td><td>219</td></tr><tr><td>5</td><td>11930.00</td><td>42.82</td><td>54.00</td><td>-11.18</td><td>35.44</td><td>7.38</td><td>Average</td><td>100</td><td>145</td></tr><tr><td>6</td><td>11930.00</td><td>56.15</td><td>74.00</td><td>-17.85</td><td>48.77</td><td>7.38</td><td>Peak</td><td>100</td><td>145</td></tr><tr><td>7</td><td>17895.00</td><td>45.09</td><td>54.00</td><td>-8.91</td><td>32.22</td><td>12.87</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>8</td><td>17895.00</td><td>59.45</td><td>74.00</td><td>-14.55</td><td>46.58</td><td>12.87</td><td>Peak</td><td>100</td><td>214</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5925.00	44.52	68.20	-23.68	43.13	1.39	Average	237	219	2	5925.00	57.72	88.20	-30.48	56.33	1.39	Peak	237	219	3 *	5965.00	95.68			94.25	1.43	Average	237	219	4 *	5965.00	108.92			107.49	1.43	Peak	237	219	5	11930.00	42.82	54.00	-11.18	35.44	7.38	Average	100	145	6	11930.00	56.15	74.00	-17.85	48.77	7.38	Peak	100	145	7	17895.00	45.09	54.00	-8.91	32.22	12.87	Average	100	214	8	17895.00	59.45	74.00	-14.55	46.58	12.87	Peak	100	214
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5925.00	44.52	68.20	-23.68	43.13	1.39	Average	237	219																																																																																				
2	5925.00	57.72	88.20	-30.48	56.33	1.39	Peak	237	219																																																																																				
3 *	5965.00	95.68			94.25	1.43	Average	237	219																																																																																				
4 *	5965.00	108.92			107.49	1.43	Peak	237	219																																																																																				
5	11930.00	42.82	54.00	-11.18	35.44	7.38	Average	100	145																																																																																				
6	11930.00	56.15	74.00	-17.85	48.77	7.38	Peak	100	145																																																																																				
7	17895.00	45.09	54.00	-8.91	32.22	12.87	Average	100	214																																																																																				
8	17895.00	59.45	74.00	-14.55	46.58	12.87	Peak	100	214																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													




Modulation	be EHT40	Test Freq. (MHz)	6165																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) UNII 5-8-PK UNII 5-8-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6165.00</td><td>93.94</td><td></td><td></td><td>92.22</td><td>1.72</td><td>Average</td><td>243</td><td>208</td></tr><tr><td>2 *</td><td>6165.00</td><td>106.77</td><td></td><td></td><td>105.05</td><td>1.72</td><td>Peak</td><td>243</td><td>208</td></tr><tr><td>3</td><td>12330.00</td><td>42.65</td><td>54.00</td><td>-11.35</td><td>35.45</td><td>7.20</td><td>Average</td><td>100</td><td>178</td></tr><tr><td>4</td><td>12330.00</td><td>55.95</td><td>74.00</td><td>-18.05</td><td>48.75</td><td>7.20</td><td>Peak</td><td>100</td><td>178</td></tr><tr><td>5</td><td>18495.00</td><td>40.49</td><td>54.00</td><td>-13.51</td><td>38.45</td><td>2.04</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>6</td><td>18495.00</td><td>53.26</td><td>74.00</td><td>-20.74</td><td>51.22</td><td>2.04</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>7</td><td>24660.00</td><td>43.37</td><td>68.20</td><td>-24.83</td><td>34.52</td><td>8.85</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>8</td><td>24660.00</td><td>56.51</td><td>88.20</td><td>-31.69</td><td>47.66</td><td>8.85</td><td>Peak</td><td>100</td><td>208</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6165.00	93.94			92.22	1.72	Average	243	208	2 *	6165.00	106.77			105.05	1.72	Peak	243	208	3	12330.00	42.65	54.00	-11.35	35.45	7.20	Average	100	178	4	12330.00	55.95	74.00	-18.05	48.75	7.20	Peak	100	178	5	18495.00	40.49	54.00	-13.51	38.45	2.04	Average	100	177	6	18495.00	53.26	74.00	-20.74	51.22	2.04	Peak	100	177	7	24660.00	43.37	68.20	-24.83	34.52	8.85	Average	100	208	8	24660.00	56.51	88.20	-31.69	47.66	8.85	Peak	100	208
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6165.00	93.94			92.22	1.72	Average	243	208																																																																																																								
2 *	6165.00	106.77			105.05	1.72	Peak	243	208																																																																																																								
3	12330.00	42.65	54.00	-11.35	35.45	7.20	Average	100	178																																																																																																								
4	12330.00	55.95	74.00	-18.05	48.75	7.20	Peak	100	178																																																																																																								
5	18495.00	40.49	54.00	-13.51	38.45	2.04	Average	100	177																																																																																																								
6	18495.00	53.26	74.00	-20.74	51.22	2.04	Peak	100	177																																																																																																								
7	24660.00	43.37	68.20	-24.83	34.52	8.85	Average	100	208																																																																																																								
8	24660.00	56.51	88.20	-31.69	47.66	8.85	Peak	100	208																																																																																																								



Modulation	be EHT40	Test Freq. (MHz)	6165
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):25 Humidity(%):65			
Level (dBuV/m)			

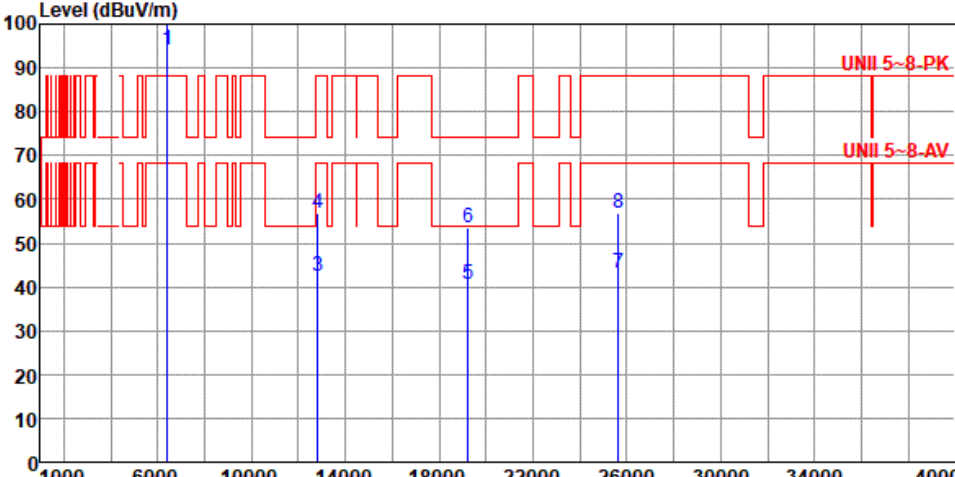

Modulation	be EHT40	Test Freq. (MHz)	6405																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6405.00</td><td>94.03</td><td></td><td></td><td>91.23</td><td>2.80</td><td>Average</td><td>100</td><td>224</td></tr><tr><td>2 *</td><td>6405.00</td><td>107.31</td><td></td><td></td><td>104.51</td><td>2.80</td><td>Peak</td><td>100</td><td>224</td></tr><tr><td>3</td><td>12810.00</td><td>42.34</td><td>68.20</td><td>-25.86</td><td>35.26</td><td>7.08</td><td>Average</td><td>100</td><td>186</td></tr><tr><td>4</td><td>12810.00</td><td>56.69</td><td>88.20</td><td>-31.51</td><td>49.61</td><td>7.08</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>5</td><td>19215.00</td><td>40.67</td><td>54.00</td><td>-13.33</td><td>38.45</td><td>2.22</td><td>Average</td><td>100</td><td>284</td></tr><tr><td>6</td><td>19215.00</td><td>53.54</td><td>74.00</td><td>-20.46</td><td>51.32</td><td>2.22</td><td>Peak</td><td>100</td><td>284</td></tr><tr><td>7</td><td>25620.00</td><td>43.20</td><td>68.20</td><td>-25.00</td><td>34.45</td><td>8.75</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>8</td><td>25620.00</td><td>56.69</td><td>88.20</td><td>-31.51</td><td>47.94</td><td>8.75</td><td>Peak</td><td>100</td><td>117</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6405.00	94.03			91.23	2.80	Average	100	224	2 *	6405.00	107.31			104.51	2.80	Peak	100	224	3	12810.00	42.34	68.20	-25.86	35.26	7.08	Average	100	186	4	12810.00	56.69	88.20	-31.51	49.61	7.08	Peak	100	186	5	19215.00	40.67	54.00	-13.33	38.45	2.22	Average	100	284	6	19215.00	53.54	74.00	-20.46	51.32	2.22	Peak	100	284	7	25620.00	43.20	68.20	-25.00	34.45	8.75	Average	100	117	8	25620.00	56.69	88.20	-31.51	47.94	8.75	Peak	100	117
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6405.00	94.03			91.23	2.80	Average	100	224																																																																																																								
2 *	6405.00	107.31			104.51	2.80	Peak	100	224																																																																																																								
3	12810.00	42.34	68.20	-25.86	35.26	7.08	Average	100	186																																																																																																								
4	12810.00	56.69	88.20	-31.51	49.61	7.08	Peak	100	186																																																																																																								
5	19215.00	40.67	54.00	-13.33	38.45	2.22	Average	100	284																																																																																																								
6	19215.00	53.54	74.00	-20.46	51.32	2.22	Peak	100	284																																																																																																								
7	25620.00	43.20	68.20	-25.00	34.45	8.75	Average	100	117																																																																																																								
8	25620.00	56.69	88.20	-31.51	47.94	8.75	Peak	100	117																																																																																																								



Modulation	be EHT40	Test Freq. (MHz)	6405																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6405.00</td><td>97.32</td><td></td><td>94.52</td><td>2.80</td><td>Average</td><td>237</td><td>209</td></tr><tr><td>2</td><td>*</td><td>6405.00</td><td>110.56</td><td></td><td>107.76</td><td>2.80</td><td>Peak</td><td>237</td><td>209</td></tr><tr><td>3</td><td></td><td>12810.00</td><td>42.50</td><td>68.20 -25.70</td><td>35.42</td><td>7.08</td><td>Average</td><td>100</td><td>81</td></tr><tr><td>4</td><td></td><td>12810.00</td><td>56.31</td><td>88.20 -31.89</td><td>49.23</td><td>7.08</td><td>Peak</td><td>100</td><td>81</td></tr><tr><td>5</td><td></td><td>19215.00</td><td>40.67</td><td>54.00 -13.33</td><td>38.45</td><td>2.22</td><td>Average</td><td>100</td><td>182</td></tr><tr><td>6</td><td></td><td>19215.00</td><td>53.44</td><td>74.00 -20.56</td><td>51.22</td><td>2.22</td><td>Peak</td><td>100</td><td>182</td></tr><tr><td>7</td><td></td><td>25620.00</td><td>43.33</td><td>68.20 -24.87</td><td>34.58</td><td>8.75</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>8</td><td></td><td>25620.00</td><td>56.73</td><td>88.20 -31.47</td><td>47.98</td><td>8.75</td><td>Peak</td><td>100</td><td>105</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	*	6405.00	97.32		94.52	2.80	Average	237	209	2	*	6405.00	110.56		107.76	2.80	Peak	237	209	3		12810.00	42.50	68.20 -25.70	35.42	7.08	Average	100	81	4		12810.00	56.31	88.20 -31.89	49.23	7.08	Peak	100	81	5		19215.00	40.67	54.00 -13.33	38.45	2.22	Average	100	182	6		19215.00	53.44	74.00 -20.56	51.22	2.22	Peak	100	182	7		25620.00	43.33	68.20 -24.87	34.58	8.75	Average	100	105	8		25620.00	56.73	88.20 -31.47	47.98	8.75	Peak	100	105
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1	*	6405.00	97.32		94.52	2.80	Average	237	209																																																																																																								
2	*	6405.00	110.56		107.76	2.80	Peak	237	209																																																																																																								
3		12810.00	42.50	68.20 -25.70	35.42	7.08	Average	100	81																																																																																																								
4		12810.00	56.31	88.20 -31.89	49.23	7.08	Peak	100	81																																																																																																								
5		19215.00	40.67	54.00 -13.33	38.45	2.22	Average	100	182																																																																																																								
6		19215.00	53.44	74.00 -20.56	51.22	2.22	Peak	100	182																																																																																																								
7		25620.00	43.33	68.20 -24.87	34.58	8.75	Average	100	105																																																																																																								
8		25620.00	56.73	88.20 -31.47	47.98	8.75	Peak	100	105																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	



Modulation	be EHT40	Test Freq. (MHz)	6445																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBUV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBUV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6445.00</td><td>93.73</td><td></td><td></td><td>90.67</td><td>3.06</td><td>Average</td><td>100</td><td>211</td></tr><tr><td>2 *</td><td>6445.00</td><td>107.00</td><td></td><td></td><td>103.94</td><td>3.06</td><td>Peak</td><td>100</td><td>211</td></tr><tr><td>3</td><td>12890.00</td><td>42.81</td><td>68.20</td><td>-25.39</td><td>35.66</td><td>7.15</td><td>Average</td><td>100</td><td>188</td></tr><tr><td>4</td><td>12890.00</td><td>55.99</td><td>88.20</td><td>-32.21</td><td>48.84</td><td>7.15</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>5</td><td>19335.00</td><td>40.52</td><td>54.00</td><td>-13.48</td><td>38.43</td><td>2.09</td><td>Average</td><td>100</td><td>182</td></tr><tr><td>6</td><td>19335.00</td><td>53.43</td><td>74.00</td><td>-20.57</td><td>51.34</td><td>2.09</td><td>Peak</td><td>100</td><td>182</td></tr><tr><td>7</td><td>25780.00</td><td>43.04</td><td>68.20</td><td>-25.16</td><td>34.28</td><td>8.76</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>8</td><td>25780.00</td><td>56.14</td><td>88.20</td><td>-32.06</td><td>47.38</td><td>8.76</td><td>Peak</td><td>100</td><td>204</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBUV/m	dB	reading	dB/m		High	Table			dBUV/m			dBuV			cm	deg	1 *	6445.00	93.73			90.67	3.06	Average	100	211	2 *	6445.00	107.00			103.94	3.06	Peak	100	211	3	12890.00	42.81	68.20	-25.39	35.66	7.15	Average	100	188	4	12890.00	55.99	88.20	-32.21	48.84	7.15	Peak	100	188	5	19335.00	40.52	54.00	-13.48	38.43	2.09	Average	100	182	6	19335.00	53.43	74.00	-20.57	51.34	2.09	Peak	100	182	7	25780.00	43.04	68.20	-25.16	34.28	8.76	Average	100	204	8	25780.00	56.14	88.20	-32.06	47.38	8.76	Peak	100	204
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBUV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBUV/m			dBuV			cm	deg																																																																																																								
1 *	6445.00	93.73			90.67	3.06	Average	100	211																																																																																																								
2 *	6445.00	107.00			103.94	3.06	Peak	100	211																																																																																																								
3	12890.00	42.81	68.20	-25.39	35.66	7.15	Average	100	188																																																																																																								
4	12890.00	55.99	88.20	-32.21	48.84	7.15	Peak	100	188																																																																																																								
5	19335.00	40.52	54.00	-13.48	38.43	2.09	Average	100	182																																																																																																								
6	19335.00	53.43	74.00	-20.57	51.34	2.09	Peak	100	182																																																																																																								
7	25780.00	43.04	68.20	-25.16	34.28	8.76	Average	100	204																																																																																																								
8	25780.00	56.14	88.20	-32.06	47.38	8.76	Peak	100	204																																																																																																								



Modulation	be EHT40	Test Freq. (MHz)	6445																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>*</td><td>6445.00</td><td>96.84</td><td></td><td>93.78</td><td>3.06</td><td>Average</td><td>246</td><td>210</td></tr><tr><td>2</td><td>*</td><td>6445.00</td><td>110.46</td><td></td><td>107.40</td><td>3.06</td><td>Peak</td><td>246</td><td>210</td></tr><tr><td>3</td><td></td><td>12890.00</td><td>42.57</td><td>68.20 -25.63</td><td>35.42</td><td>7.15</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>4</td><td></td><td>12890.00</td><td>55.79</td><td>88.20 -32.41</td><td>48.64</td><td>7.15</td><td>Peak</td><td>100</td><td>176</td></tr><tr><td>5</td><td></td><td>19335.00</td><td>40.60</td><td>54.00 -13.40</td><td>38.51</td><td>2.09</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>6</td><td></td><td>19335.00</td><td>53.52</td><td>74.00 -20.48</td><td>51.43</td><td>2.09</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>7</td><td></td><td>25780.00</td><td>43.13</td><td>68.20 -25.07</td><td>34.37</td><td>8.76</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>8</td><td></td><td>25780.00</td><td>56.40</td><td>88.20 -31.80</td><td>47.64</td><td>8.76</td><td>Peak</td><td>100</td><td>205</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	*	6445.00	96.84		93.78	3.06	Average	246	210	2	*	6445.00	110.46		107.40	3.06	Peak	246	210	3		12890.00	42.57	68.20 -25.63	35.42	7.15	Average	100	176	4		12890.00	55.79	88.20 -32.41	48.64	7.15	Peak	100	176	5		19335.00	40.60	54.00 -13.40	38.51	2.09	Average	100	177	6		19335.00	53.52	74.00 -20.48	51.43	2.09	Peak	100	177	7		25780.00	43.13	68.20 -25.07	34.37	8.76	Average	100	205	8		25780.00	56.40	88.20 -31.80	47.64	8.76	Peak	100	205
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	*	6445.00	96.84		93.78	3.06	Average	246	210																																																																																				
2	*	6445.00	110.46		107.40	3.06	Peak	246	210																																																																																				
3		12890.00	42.57	68.20 -25.63	35.42	7.15	Average	100	176																																																																																				
4		12890.00	55.79	88.20 -32.41	48.64	7.15	Peak	100	176																																																																																				
5		19335.00	40.60	54.00 -13.40	38.51	2.09	Average	100	177																																																																																				
6		19335.00	53.52	74.00 -20.48	51.43	2.09	Peak	100	177																																																																																				
7		25780.00	43.13	68.20 -25.07	34.37	8.76	Average	100	205																																																																																				
8		25780.00	56.40	88.20 -31.80	47.64	8.76	Peak	100	205																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													



Modulation	be EHT40	Test Freq. (MHz)	6485
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):25 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	6485
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) <			



Modulation	be EHT40	Test Freq. (MHz)	6525																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6525.00</td><td>91.95</td><td></td><td>88.64</td><td>3.31</td><td>Average</td><td>100</td><td>207</td></tr><tr><td>2</td><td>*</td><td>6525.00</td><td>104.59</td><td></td><td>101.28</td><td>3.31</td><td>Peak</td><td>100</td><td>207</td></tr><tr><td>3</td><td></td><td>13050.00</td><td>43.44</td><td>68.20 -24.76</td><td>36.48</td><td>6.96</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>4</td><td></td><td>13050.00</td><td>56.39</td><td>88.20 -31.81</td><td>49.43</td><td>6.96</td><td>Peak</td><td>100</td><td>176</td></tr><tr><td>5</td><td></td><td>19575.00</td><td>40.64</td><td>54.00 -13.36</td><td>38.47</td><td>2.17</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>6</td><td></td><td>19575.00</td><td>53.41</td><td>74.00 -20.59</td><td>51.24</td><td>2.17</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>7</td><td></td><td>26100.00</td><td>43.41</td><td>68.20 -24.79</td><td>34.50</td><td>8.91</td><td>Average</td><td>100</td><td>227</td></tr><tr><td>8</td><td></td><td>26100.00</td><td>60.23</td><td>88.20 -27.97</td><td>51.32</td><td>8.91</td><td>Peak</td><td>100</td><td>227</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	*	6525.00	91.95		88.64	3.31	Average	100	207	2	*	6525.00	104.59		101.28	3.31	Peak	100	207	3		13050.00	43.44	68.20 -24.76	36.48	6.96	Average	100	176	4		13050.00	56.39	88.20 -31.81	49.43	6.96	Peak	100	176	5		19575.00	40.64	54.00 -13.36	38.47	2.17	Average	100	251	6		19575.00	53.41	74.00 -20.59	51.24	2.17	Peak	100	251	7		26100.00	43.41	68.20 -24.79	34.50	8.91	Average	100	227	8		26100.00	60.23	88.20 -27.97	51.32	8.91	Peak	100	227
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1	*	6525.00	91.95		88.64	3.31	Average	100	207																																																																																																								
2	*	6525.00	104.59		101.28	3.31	Peak	100	207																																																																																																								
3		13050.00	43.44	68.20 -24.76	36.48	6.96	Average	100	176																																																																																																								
4		13050.00	56.39	88.20 -31.81	49.43	6.96	Peak	100	176																																																																																																								
5		19575.00	40.64	54.00 -13.36	38.47	2.17	Average	100	251																																																																																																								
6		19575.00	53.41	74.00 -20.59	51.24	2.17	Peak	100	251																																																																																																								
7		26100.00	43.41	68.20 -24.79	34.50	8.91	Average	100	227																																																																																																								
8		26100.00	60.23	88.20 -27.97	51.32	8.91	Peak	100	227																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	



Modulation	be EHT40	Test Freq. (MHz)	6525																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>6525.00</td><td>94.95</td><td></td><td></td><td>91.64</td><td>3.31</td><td>Average</td><td>229</td><td>291</td></tr><tr><td>2</td><td>6525.00</td><td>107.98</td><td></td><td></td><td>104.67</td><td>3.31</td><td>Peak</td><td>229</td><td>291</td></tr><tr><td>3</td><td>13050.00</td><td>43.47</td><td>68.20</td><td>-24.73</td><td>36.51</td><td>6.96</td><td>Average</td><td>100</td><td>168</td></tr><tr><td>4</td><td>13050.00</td><td>56.47</td><td>88.20</td><td>-31.73</td><td>49.51</td><td>6.96</td><td>Peak</td><td>100</td><td>168</td></tr><tr><td>5</td><td>19575.00</td><td>40.64</td><td>54.00</td><td>-13.36</td><td>38.47</td><td>2.17</td><td>Average</td><td>100</td><td>184</td></tr><tr><td>6</td><td>19575.00</td><td>53.52</td><td>74.00</td><td>-20.48</td><td>51.35</td><td>2.17</td><td>Peak</td><td>100</td><td>184</td></tr><tr><td>7</td><td>26100.00</td><td>43.48</td><td>68.20</td><td>-24.72</td><td>34.57</td><td>8.91</td><td>Average</td><td>100</td><td>217</td></tr><tr><td>8</td><td>26100.00</td><td>57.16</td><td>88.20</td><td>-31.04</td><td>48.25</td><td>8.91</td><td>Peak</td><td>100</td><td>217</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	6525.00	94.95			91.64	3.31	Average	229	291	2	6525.00	107.98			104.67	3.31	Peak	229	291	3	13050.00	43.47	68.20	-24.73	36.51	6.96	Average	100	168	4	13050.00	56.47	88.20	-31.73	49.51	6.96	Peak	100	168	5	19575.00	40.64	54.00	-13.36	38.47	2.17	Average	100	184	6	19575.00	53.52	74.00	-20.48	51.35	2.17	Peak	100	184	7	26100.00	43.48	68.20	-24.72	34.57	8.91	Average	100	217	8	26100.00	57.16	88.20	-31.04	48.25	8.91	Peak	100	217
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	6525.00	94.95			91.64	3.31	Average	229	291																																																																																				
2	6525.00	107.98			104.67	3.31	Peak	229	291																																																																																				
3	13050.00	43.47	68.20	-24.73	36.51	6.96	Average	100	168																																																																																				
4	13050.00	56.47	88.20	-31.73	49.51	6.96	Peak	100	168																																																																																				
5	19575.00	40.64	54.00	-13.36	38.47	2.17	Average	100	184																																																																																				
6	19575.00	53.52	74.00	-20.48	51.35	2.17	Peak	100	184																																																																																				
7	26100.00	43.48	68.20	-24.72	34.57	8.91	Average	100	217																																																																																				
8	26100.00	57.16	88.20	-31.04	48.25	8.91	Peak	100	217																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													



Modulation	be EHT40	Test Freq. (MHz)	6565																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6565.00</td><td>92.21</td><td></td><td></td><td>88.76</td><td>3.45</td><td>Average</td><td>100</td><td>228</td></tr><tr><td>2 *</td><td>6565.00</td><td>105.49</td><td></td><td></td><td>102.04</td><td>3.45</td><td>Peak</td><td>100</td><td>228</td></tr><tr><td>3</td><td>13130.00</td><td>44.26</td><td>68.20</td><td>-23.94</td><td>37.23</td><td>7.03</td><td>Average</td><td>100</td><td>175</td></tr><tr><td>4</td><td>13130.00</td><td>56.49</td><td>88.20</td><td>-31.71</td><td>49.46</td><td>7.03</td><td>Peak</td><td>100</td><td>175</td></tr><tr><td>5</td><td>19695.00</td><td>40.99</td><td>54.00</td><td>-13.01</td><td>38.72</td><td>2.27</td><td>Average</td><td>100</td><td>281</td></tr><tr><td>6</td><td>19695.00</td><td>54.03</td><td>74.00</td><td>-19.97</td><td>51.76</td><td>2.27</td><td>Peak</td><td>100</td><td>281</td></tr><tr><td>7</td><td>26260.00</td><td>43.66</td><td>68.20</td><td>-24.54</td><td>34.51</td><td>9.15</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>8</td><td>26260.00</td><td>57.41</td><td>88.20</td><td>-30.79</td><td>48.26</td><td>9.15</td><td>Peak</td><td>100</td><td>214</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6565.00	92.21			88.76	3.45	Average	100	228	2 *	6565.00	105.49			102.04	3.45	Peak	100	228	3	13130.00	44.26	68.20	-23.94	37.23	7.03	Average	100	175	4	13130.00	56.49	88.20	-31.71	49.46	7.03	Peak	100	175	5	19695.00	40.99	54.00	-13.01	38.72	2.27	Average	100	281	6	19695.00	54.03	74.00	-19.97	51.76	2.27	Peak	100	281	7	26260.00	43.66	68.20	-24.54	34.51	9.15	Average	100	214	8	26260.00	57.41	88.20	-30.79	48.26	9.15	Peak	100	214
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6565.00	92.21			88.76	3.45	Average	100	228																																																																																				
2 *	6565.00	105.49			102.04	3.45	Peak	100	228																																																																																				
3	13130.00	44.26	68.20	-23.94	37.23	7.03	Average	100	175																																																																																				
4	13130.00	56.49	88.20	-31.71	49.46	7.03	Peak	100	175																																																																																				
5	19695.00	40.99	54.00	-13.01	38.72	2.27	Average	100	281																																																																																				
6	19695.00	54.03	74.00	-19.97	51.76	2.27	Peak	100	281																																																																																				
7	26260.00	43.66	68.20	-24.54	34.51	9.15	Average	100	214																																																																																				
8	26260.00	57.41	88.20	-30.79	48.26	9.15	Peak	100	214																																																																																				



Modulation	be EHT40	Test Freq. (MHz)	6565																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>6565.00</td><td>94.62</td><td></td><td>91.17</td><td>3.45</td><td>Average</td><td>223</td><td>290</td></tr><tr><td>2</td><td>*</td><td>6565.00</td><td>107.65</td><td></td><td>104.20</td><td>3.45</td><td>Peak</td><td>223</td><td>290</td></tr><tr><td>3</td><td></td><td>13130.00</td><td>44.46</td><td>68.20 -23.74</td><td>37.43</td><td>7.03</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>4</td><td></td><td>13130.00</td><td>56.26</td><td>88.20 -31.94</td><td>49.23</td><td>7.03</td><td>Peak</td><td>100</td><td>244</td></tr><tr><td>5</td><td></td><td>19695.00</td><td>40.74</td><td>54.00 -13.26</td><td>38.47</td><td>2.27</td><td>Average</td><td>100</td><td>255</td></tr><tr><td>6</td><td></td><td>19695.00</td><td>53.89</td><td>74.00 -20.11</td><td>51.62</td><td>2.27</td><td>Peak</td><td>100</td><td>255</td></tr><tr><td>7</td><td></td><td>26260.00</td><td>43.92</td><td>68.20 -24.28</td><td>34.77</td><td>9.15</td><td>Average</td><td>100</td><td>174</td></tr><tr><td>8</td><td></td><td>26260.00</td><td>57.38</td><td>88.20 -30.82</td><td>48.23</td><td>9.15</td><td>Peak</td><td>100</td><td>174</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	*	6565.00	94.62		91.17	3.45	Average	223	290	2	*	6565.00	107.65		104.20	3.45	Peak	223	290	3		13130.00	44.46	68.20 -23.74	37.43	7.03	Average	100	244	4		13130.00	56.26	88.20 -31.94	49.23	7.03	Peak	100	244	5		19695.00	40.74	54.00 -13.26	38.47	2.27	Average	100	255	6		19695.00	53.89	74.00 -20.11	51.62	2.27	Peak	100	255	7		26260.00	43.92	68.20 -24.28	34.77	9.15	Average	100	174	8		26260.00	57.38	88.20 -30.82	48.23	9.15	Peak	100	174
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1	*	6565.00	94.62		91.17	3.45	Average	223	290																																																																																																								
2	*	6565.00	107.65		104.20	3.45	Peak	223	290																																																																																																								
3		13130.00	44.46	68.20 -23.74	37.43	7.03	Average	100	244																																																																																																								
4		13130.00	56.26	88.20 -31.94	49.23	7.03	Peak	100	244																																																																																																								
5		19695.00	40.74	54.00 -13.26	38.47	2.27	Average	100	255																																																																																																								
6		19695.00	53.89	74.00 -20.11	51.62	2.27	Peak	100	255																																																																																																								
7		26260.00	43.92	68.20 -24.28	34.77	9.15	Average	100	174																																																																																																								
8		26260.00	57.38	88.20 -30.82	48.23	9.15	Peak	100	174																																																																																																								



Modulation	be EHT40	Test Freq. (MHz)	6725																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6725.00</td><td>91.51</td><td></td><td></td><td>88.03</td><td>3.48</td><td>Average</td><td>234</td><td>241</td></tr><tr><td>2 *</td><td>6725.00</td><td>104.69</td><td></td><td></td><td>101.21</td><td>3.48</td><td>Peak</td><td>234</td><td>241</td></tr><tr><td>3</td><td>13450.00</td><td>45.00</td><td>68.20</td><td>-23.20</td><td>37.46</td><td>7.54</td><td>Average</td><td>100</td><td>184</td></tr><tr><td>4</td><td>13450.00</td><td>57.10</td><td>88.20</td><td>-31.10</td><td>49.56</td><td>7.54</td><td>Peak</td><td>100</td><td>184</td></tr><tr><td>5</td><td>20175.00</td><td>41.24</td><td>54.00</td><td>-12.76</td><td>38.45</td><td>2.79</td><td>Average</td><td>100</td><td>188</td></tr><tr><td>6</td><td>20175.00</td><td>54.22</td><td>74.00</td><td>-19.78</td><td>51.43</td><td>2.79</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>7</td><td>26900.00</td><td>43.84</td><td>68.20</td><td>-24.36</td><td>34.54</td><td>9.30</td><td>Average</td><td>100</td><td>201</td></tr><tr><td>8</td><td>26900.00</td><td>57.56</td><td>88.20</td><td>-30.64</td><td>48.26</td><td>9.30</td><td>Peak</td><td>100</td><td>201</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6725.00	91.51			88.03	3.48	Average	234	241	2 *	6725.00	104.69			101.21	3.48	Peak	234	241	3	13450.00	45.00	68.20	-23.20	37.46	7.54	Average	100	184	4	13450.00	57.10	88.20	-31.10	49.56	7.54	Peak	100	184	5	20175.00	41.24	54.00	-12.76	38.45	2.79	Average	100	188	6	20175.00	54.22	74.00	-19.78	51.43	2.79	Peak	100	188	7	26900.00	43.84	68.20	-24.36	34.54	9.30	Average	100	201	8	26900.00	57.56	88.20	-30.64	48.26	9.30	Peak	100	201
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6725.00	91.51			88.03	3.48	Average	234	241																																																																																																								
2 *	6725.00	104.69			101.21	3.48	Peak	234	241																																																																																																								
3	13450.00	45.00	68.20	-23.20	37.46	7.54	Average	100	184																																																																																																								
4	13450.00	57.10	88.20	-31.10	49.56	7.54	Peak	100	184																																																																																																								
5	20175.00	41.24	54.00	-12.76	38.45	2.79	Average	100	188																																																																																																								
6	20175.00	54.22	74.00	-19.78	51.43	2.79	Peak	100	188																																																																																																								
7	26900.00	43.84	68.20	-24.36	34.54	9.30	Average	100	201																																																																																																								
8	26900.00	57.56	88.20	-30.64	48.26	9.30	Peak	100	201																																																																																																								



Modulation	be EHT40	Test Freq. (MHz)	6725																																																																																																																									
Polarization	Vertical																																																																																																																											
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																												
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>*</td><td>6725.00</td><td>94.63</td><td></td><td></td><td>91.15</td><td>3.48</td><td>Average</td><td>225</td><td>107</td></tr><tr><td>2</td><td>*</td><td>6725.00</td><td>107.68</td><td></td><td></td><td>104.20</td><td>3.48</td><td>Peak</td><td>225</td><td>107</td></tr><tr><td>3</td><td></td><td>13450.00</td><td>45.11</td><td>68.20</td><td>-23.09</td><td>37.57</td><td>7.54</td><td>Average</td><td>100</td><td>288</td></tr><tr><td>4</td><td></td><td>13450.00</td><td>57.48</td><td>88.20</td><td>-30.72</td><td>49.94</td><td>7.54</td><td>Peak</td><td>100</td><td>288</td></tr><tr><td>5</td><td></td><td>20175.00</td><td>41.25</td><td>54.00</td><td>-12.75</td><td>38.46</td><td>2.79</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>6</td><td></td><td>20175.00</td><td>54.22</td><td>74.00</td><td>-19.78</td><td>51.43</td><td>2.79</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>7</td><td></td><td>26900.00</td><td>43.85</td><td>68.20</td><td>-24.35</td><td>34.55</td><td>9.30</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>8</td><td></td><td>26900.00</td><td>57.43</td><td>88.20</td><td>-30.77</td><td>48.13</td><td>9.30</td><td>Peak</td><td>100</td><td>251</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level	dBuV/m	dB	reading	dB/m		High	Table				dBuV/m			dBuV			cm	deg	1	*	6725.00	94.63			91.15	3.48	Average	225	107	2	*	6725.00	107.68			104.20	3.48	Peak	225	107	3		13450.00	45.11	68.20	-23.09	37.57	7.54	Average	100	288	4		13450.00	57.48	88.20	-30.72	49.94	7.54	Peak	100	288	5		20175.00	41.25	54.00	-12.75	38.46	2.79	Average	100	105	6		20175.00	54.22	74.00	-19.78	51.43	2.79	Peak	100	105	7		26900.00	43.85	68.20	-24.35	34.55	9.30	Average	100	251	8		26900.00	57.43	88.20	-30.77	48.13	9.30	Peak	100	251
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
		MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
			dBuV/m			dBuV			cm	deg																																																																																																																		
1	*	6725.00	94.63			91.15	3.48	Average	225	107																																																																																																																		
2	*	6725.00	107.68			104.20	3.48	Peak	225	107																																																																																																																		
3		13450.00	45.11	68.20	-23.09	37.57	7.54	Average	100	288																																																																																																																		
4		13450.00	57.48	88.20	-30.72	49.94	7.54	Peak	100	288																																																																																																																		
5		20175.00	41.25	54.00	-12.75	38.46	2.79	Average	100	105																																																																																																																		
6		20175.00	54.22	74.00	-19.78	51.43	2.79	Peak	100	105																																																																																																																		
7		26900.00	43.85	68.20	-24.35	34.55	9.30	Average	100	251																																																																																																																		
8		26900.00	57.43	88.20	-30.77	48.13	9.30	Peak	100	251																																																																																																																		



Modulation	be EHT40	Test Freq. (MHz)	6845																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>6845.00</td><td>93.20</td><td></td><td></td><td>89.55</td><td>3.65</td><td>Average</td><td>226</td><td>238</td></tr><tr><td>2</td><td>6845.00</td><td>106.28</td><td></td><td></td><td>102.63</td><td>3.65</td><td>Peak</td><td>226</td><td>238</td></tr><tr><td>3</td><td>13690.00</td><td>45.23</td><td>68.20</td><td>-22.97</td><td>37.57</td><td>7.66</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>4</td><td>13690.00</td><td>57.41</td><td>88.20</td><td>-30.79</td><td>49.75</td><td>7.66</td><td>Peak</td><td>100</td><td>176</td></tr><tr><td>5</td><td>20535.00</td><td>41.64</td><td>54.00</td><td>-12.36</td><td>38.44</td><td>3.20</td><td>Average</td><td>100</td><td>175</td></tr><tr><td>6</td><td>20535.00</td><td>54.56</td><td>74.00</td><td>-19.44</td><td>51.36</td><td>3.20</td><td>Peak</td><td>100</td><td>175</td></tr><tr><td>7</td><td>27380.00</td><td>44.16</td><td>68.20</td><td>-24.04</td><td>34.75</td><td>9.41</td><td>Average</td><td>100</td><td>225</td></tr><tr><td>8</td><td>27380.00</td><td>57.85</td><td>88.20</td><td>-30.35</td><td>48.44</td><td>9.41</td><td>Peak</td><td>100</td><td>225</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	6845.00	93.20			89.55	3.65	Average	226	238	2	6845.00	106.28			102.63	3.65	Peak	226	238	3	13690.00	45.23	68.20	-22.97	37.57	7.66	Average	100	176	4	13690.00	57.41	88.20	-30.79	49.75	7.66	Peak	100	176	5	20535.00	41.64	54.00	-12.36	38.44	3.20	Average	100	175	6	20535.00	54.56	74.00	-19.44	51.36	3.20	Peak	100	175	7	27380.00	44.16	68.20	-24.04	34.75	9.41	Average	100	225	8	27380.00	57.85	88.20	-30.35	48.44	9.41	Peak	100	225
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	6845.00	93.20			89.55	3.65	Average	226	238																																																																																				
2	6845.00	106.28			102.63	3.65	Peak	226	238																																																																																				
3	13690.00	45.23	68.20	-22.97	37.57	7.66	Average	100	176																																																																																				
4	13690.00	57.41	88.20	-30.79	49.75	7.66	Peak	100	176																																																																																				
5	20535.00	41.64	54.00	-12.36	38.44	3.20	Average	100	175																																																																																				
6	20535.00	54.56	74.00	-19.44	51.36	3.20	Peak	100	175																																																																																				
7	27380.00	44.16	68.20	-24.04	34.75	9.41	Average	100	225																																																																																				
8	27380.00	57.85	88.20	-30.35	48.44	9.41	Peak	100	225																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													



Modulation	be EHT40	Test Freq. (MHz)	6845							
Polarization	Vertical									
Test By :Sean Yu Temperature(°C):25 Humidity(%):65										
Level (dBuV/m) UNII 5-8-PK UNII 5-8-AV Frequency (MHz)										
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	
1	*	6845.00	95.84		92.19	3.65	Average	237	107	
2	*	6845.00	108.57		104.92	3.65	Peak	237	107	
3		13690.00	45.34	68.20	-22.86	37.68	7.66	Average	100	248
4		13690.00	57.50	88.20	-30.70	49.84	7.66	Peak	100	248
5		20535.00	41.66	54.00	-12.34	38.46	3.20	Average	100	283
6		20535.00	54.63	74.00	-19.37	51.43	3.20	Peak	100	283
7		27380.00	44.04	68.20	-24.16	34.63	9.41	Average	100	205
8		27380.00	57.78	88.20	-30.42	48.37	9.41	Peak	100	205

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency.



Modulation	be EHT40	Test Freq. (MHz)	6885																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1 *</td><td>6885.00</td><td>92.50</td><td></td><td></td><td>88.64</td><td>3.86</td><td>Average</td><td>230</td><td>230</td></tr><tr><td>2 *</td><td>6885.00</td><td>105.63</td><td></td><td></td><td>101.77</td><td>3.86</td><td>Peak</td><td>230</td><td>230</td></tr><tr><td>3</td><td>13770.00</td><td>45.17</td><td>68.20</td><td>-23.03</td><td>37.47</td><td>7.70</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>4</td><td>13770.00</td><td>56.97</td><td>88.20</td><td>-31.23</td><td>49.27</td><td>7.70</td><td>Peak</td><td>100</td><td>148</td></tr><tr><td>5</td><td>20655.00</td><td>41.81</td><td>54.00</td><td>-12.19</td><td>38.46</td><td>3.35</td><td>Average</td><td>100</td><td>175</td></tr><tr><td>6</td><td>20655.00</td><td>54.78</td><td>74.00</td><td>-19.22</td><td>51.43</td><td>3.35</td><td>Peak</td><td>100</td><td>175</td></tr><tr><td>7</td><td>27540.00</td><td>44.13</td><td>68.20</td><td>-24.07</td><td>34.62</td><td>9.51</td><td>Average</td><td>100</td><td>227</td></tr><tr><td>8</td><td>27540.00</td><td>57.62</td><td>88.20</td><td>-30.58</td><td>48.11</td><td>9.51</td><td>Peak</td><td>100</td><td>227</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1 *	6885.00	92.50			88.64	3.86	Average	230	230	2 *	6885.00	105.63			101.77	3.86	Peak	230	230	3	13770.00	45.17	68.20	-23.03	37.47	7.70	Average	100	148	4	13770.00	56.97	88.20	-31.23	49.27	7.70	Peak	100	148	5	20655.00	41.81	54.00	-12.19	38.46	3.35	Average	100	175	6	20655.00	54.78	74.00	-19.22	51.43	3.35	Peak	100	175	7	27540.00	44.13	68.20	-24.07	34.62	9.51	Average	100	227	8	27540.00	57.62	88.20	-30.58	48.11	9.51	Peak	100	227
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1 *	6885.00	92.50			88.64	3.86	Average	230	230																																																																																				
2 *	6885.00	105.63			101.77	3.86	Peak	230	230																																																																																				
3	13770.00	45.17	68.20	-23.03	37.47	7.70	Average	100	148																																																																																				
4	13770.00	56.97	88.20	-31.23	49.27	7.70	Peak	100	148																																																																																				
5	20655.00	41.81	54.00	-12.19	38.46	3.35	Average	100	175																																																																																				
6	20655.00	54.78	74.00	-19.22	51.43	3.35	Peak	100	175																																																																																				
7	27540.00	44.13	68.20	-24.07	34.62	9.51	Average	100	227																																																																																				
8	27540.00	57.62	88.20	-30.58	48.11	9.51	Peak	100	227																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													



Modulation	be EHT40	Test Freq. (MHz)	6885																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>6885.00</td><td>95.63</td><td></td><td></td><td>91.77</td><td>3.86</td><td>Average</td><td>225</td><td>290</td></tr><tr><td>2 *</td><td>6885.00</td><td>108.89</td><td></td><td></td><td>105.03</td><td>3.86</td><td>Peak</td><td>225</td><td>290</td></tr><tr><td>3</td><td>13770.00</td><td>45.22</td><td>68.20</td><td>-22.98</td><td>37.52</td><td>7.70</td><td>Average</td><td>100</td><td>281</td></tr><tr><td>4</td><td>13770.00</td><td>57.27</td><td>88.20</td><td>-30.93</td><td>49.57</td><td>7.70</td><td>Peak</td><td>100</td><td>281</td></tr><tr><td>5</td><td>20655.00</td><td>41.99</td><td>54.00</td><td>-12.01</td><td>38.64</td><td>3.35</td><td>Average</td><td>100</td><td>284</td></tr><tr><td>6</td><td>20655.00</td><td>54.78</td><td>74.00</td><td>-19.22</td><td>51.43</td><td>3.35</td><td>Peak</td><td>100</td><td>284</td></tr><tr><td>7</td><td>27540.00</td><td>44.02</td><td>68.20</td><td>-24.18</td><td>34.51</td><td>9.51</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>8</td><td>27540.00</td><td>57.66</td><td>88.20</td><td>-30.54</td><td>48.15</td><td>9.51</td><td>Peak</td><td>100</td><td>206</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6885.00	95.63			91.77	3.86	Average	225	290	2 *	6885.00	108.89			105.03	3.86	Peak	225	290	3	13770.00	45.22	68.20	-22.98	37.52	7.70	Average	100	281	4	13770.00	57.27	88.20	-30.93	49.57	7.70	Peak	100	281	5	20655.00	41.99	54.00	-12.01	38.64	3.35	Average	100	284	6	20655.00	54.78	74.00	-19.22	51.43	3.35	Peak	100	284	7	27540.00	44.02	68.20	-24.18	34.51	9.51	Average	100	206	8	27540.00	57.66	88.20	-30.54	48.15	9.51	Peak	100	206
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6885.00	95.63			91.77	3.86	Average	225	290																																																																																																								
2 *	6885.00	108.89			105.03	3.86	Peak	225	290																																																																																																								
3	13770.00	45.22	68.20	-22.98	37.52	7.70	Average	100	281																																																																																																								
4	13770.00	57.27	88.20	-30.93	49.57	7.70	Peak	100	281																																																																																																								
5	20655.00	41.99	54.00	-12.01	38.64	3.35	Average	100	284																																																																																																								
6	20655.00	54.78	74.00	-19.22	51.43	3.35	Peak	100	284																																																																																																								
7	27540.00	44.02	68.20	-24.18	34.51	9.51	Average	100	206																																																																																																								
8	27540.00	57.66	88.20	-30.54	48.15	9.51	Peak	100	206																																																																																																								



Modulation	be EHT40	Test Freq. (MHz)	6925																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>6925.00</td><td>89.64</td><td></td><td></td><td>85.60</td><td>4.04</td><td>Average</td><td>231</td><td>248</td></tr><tr><td>2 *</td><td>6925.00</td><td>102.52</td><td></td><td></td><td>98.48</td><td>4.04</td><td>Peak</td><td>231</td><td>248</td></tr><tr><td>3</td><td>13850.00</td><td>45.03</td><td>68.20</td><td>-23.17</td><td>37.26</td><td>7.77</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>4</td><td>13850.00</td><td>57.12</td><td>88.20</td><td>-31.08</td><td>49.35</td><td>7.77</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>5</td><td>20775.00</td><td>41.92</td><td>54.00</td><td>-12.08</td><td>38.42</td><td>3.50</td><td>Average</td><td>100</td><td>164</td></tr><tr><td>6</td><td>20775.00</td><td>54.88</td><td>74.00</td><td>-19.12</td><td>51.38</td><td>3.50</td><td>Peak</td><td>100</td><td>164</td></tr><tr><td>7</td><td>27700.00</td><td>44.06</td><td>68.20</td><td>-24.14</td><td>34.50</td><td>9.56</td><td>Average</td><td>100</td><td>188</td></tr><tr><td>8</td><td>27700.00</td><td>57.78</td><td>88.20</td><td>-30.42</td><td>48.22</td><td>9.56</td><td>Peak</td><td>100</td><td>188</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	6925.00	89.64			85.60	4.04	Average	231	248	2 *	6925.00	102.52			98.48	4.04	Peak	231	248	3	13850.00	45.03	68.20	-23.17	37.26	7.77	Average	100	251	4	13850.00	57.12	88.20	-31.08	49.35	7.77	Peak	100	251	5	20775.00	41.92	54.00	-12.08	38.42	3.50	Average	100	164	6	20775.00	54.88	74.00	-19.12	51.38	3.50	Peak	100	164	7	27700.00	44.06	68.20	-24.14	34.50	9.56	Average	100	188	8	27700.00	57.78	88.20	-30.42	48.22	9.56	Peak	100	188
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	6925.00	89.64			85.60	4.04	Average	231	248																																																																																																								
2 *	6925.00	102.52			98.48	4.04	Peak	231	248																																																																																																								
3	13850.00	45.03	68.20	-23.17	37.26	7.77	Average	100	251																																																																																																								
4	13850.00	57.12	88.20	-31.08	49.35	7.77	Peak	100	251																																																																																																								
5	20775.00	41.92	54.00	-12.08	38.42	3.50	Average	100	164																																																																																																								
6	20775.00	54.88	74.00	-19.12	51.38	3.50	Peak	100	164																																																																																																								
7	27700.00	44.06	68.20	-24.14	34.50	9.56	Average	100	188																																																																																																								
8	27700.00	57.78	88.20	-30.42	48.22	9.56	Peak	100	188																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	