



Modulation	be EHT20	Test Freq. (MHz)	5300																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sena Yu Temperature(°C):24 Humidity(%):65																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>43.59</td><td>54.00</td><td>-10.41</td><td>43.04</td><td>0.55</td><td>Average</td><td>246</td><td>89</td></tr><tr><td>2</td><td>5150.00</td><td>55.67</td><td>74.00</td><td>-18.33</td><td>55.12</td><td>0.55</td><td>Peak</td><td>246</td><td>89</td></tr><tr><td>3 *</td><td>5300.00</td><td>105.14</td><td></td><td></td><td>105.33</td><td>-0.19</td><td>Average</td><td>246</td><td>89</td></tr><tr><td>4 *</td><td>5300.00</td><td>118.07</td><td></td><td></td><td>118.26</td><td>-0.19</td><td>Peak</td><td>246</td><td>89</td></tr><tr><td>5</td><td>5350.00</td><td>46.28</td><td>54.00</td><td>-7.72</td><td>46.34</td><td>-0.06</td><td>Average</td><td>246</td><td>89</td></tr><tr><td>6</td><td>5350.00</td><td>57.91</td><td>74.00</td><td>-16.09</td><td>57.97</td><td>-0.06</td><td>Peak</td><td>246</td><td>89</td></tr><tr><td>7</td><td>10600.00</td><td>42.25</td><td>54.00</td><td>-11.75</td><td>33.72</td><td>8.53</td><td>Average</td><td>100</td><td>173</td></tr><tr><td>8</td><td>10600.00</td><td>55.37</td><td>74.00</td><td>-18.63</td><td>46.84</td><td>8.53</td><td>Peak</td><td>100</td><td>173</td></tr><tr><td>9</td><td>15900.00</td><td>43.00</td><td>54.00</td><td>-11.00</td><td>37.68</td><td>5.32</td><td>Average</td><td>100</td><td>217</td></tr><tr><td>10</td><td>15900.00</td><td>56.06</td><td>74.00</td><td>-17.94</td><td>50.74</td><td>5.32</td><td>Peak</td><td>100</td><td>217</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.59	54.00	-10.41	43.04	0.55	Average	246	89	2	5150.00	55.67	74.00	-18.33	55.12	0.55	Peak	246	89	3 *	5300.00	105.14			105.33	-0.19	Average	246	89	4 *	5300.00	118.07			118.26	-0.19	Peak	246	89	5	5350.00	46.28	54.00	-7.72	46.34	-0.06	Average	246	89	6	5350.00	57.91	74.00	-16.09	57.97	-0.06	Peak	246	89	7	10600.00	42.25	54.00	-11.75	33.72	8.53	Average	100	173	8	10600.00	55.37	74.00	-18.63	46.84	8.53	Peak	100	173	9	15900.00	43.00	54.00	-11.00	37.68	5.32	Average	100	217	10	15900.00	56.06	74.00	-17.94	50.74	5.32	Peak	100	217
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5150.00	43.59	54.00	-10.41	43.04	0.55	Average	246	89																																																																																																								
2	5150.00	55.67	74.00	-18.33	55.12	0.55	Peak	246	89																																																																																																								
3 *	5300.00	105.14			105.33	-0.19	Average	246	89																																																																																																								
4 *	5300.00	118.07			118.26	-0.19	Peak	246	89																																																																																																								
5	5350.00	46.28	54.00	-7.72	46.34	-0.06	Average	246	89																																																																																																								
6	5350.00	57.91	74.00	-16.09	57.97	-0.06	Peak	246	89																																																																																																								
7	10600.00	42.25	54.00	-11.75	33.72	8.53	Average	100	173																																																																																																								
8	10600.00	55.37	74.00	-18.63	46.84	8.53	Peak	100	173																																																																																																								
9	15900.00	43.00	54.00	-11.00	37.68	5.32	Average	100	217																																																																																																								
10	15900.00	56.06	74.00	-17.94	50.74	5.32	Peak	100	217																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	



Modulation	be EHT20	Test Freq. (MHz)	5320																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>5320.00</td><td>98.98</td><td></td><td></td><td>99.11</td><td>-0.13</td><td>Average</td><td>102</td><td>281</td></tr><tr><td>2 *</td><td>5320.00</td><td>112.11</td><td></td><td></td><td>112.24</td><td>-0.13</td><td>Peak</td><td>102</td><td>281</td></tr><tr><td>3</td><td>5350.00</td><td>45.01</td><td>54.00</td><td>-8.99</td><td>45.07</td><td>-0.06</td><td>Average</td><td>102</td><td>281</td></tr><tr><td>4</td><td>5350.00</td><td>58.82</td><td>74.00</td><td>-15.18</td><td>58.88</td><td>-0.06</td><td>Peak</td><td>102</td><td>281</td></tr><tr><td>5</td><td>10640.00</td><td>41.96</td><td>54.00</td><td>-12.04</td><td>33.49</td><td>8.47</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>6</td><td>10640.00</td><td>54.76</td><td>74.00</td><td>-19.24</td><td>46.29</td><td>8.47</td><td>Peak</td><td>100</td><td>56</td></tr><tr><td>7</td><td>15960.00</td><td>42.23</td><td>54.00</td><td>-11.77</td><td>37.12</td><td>5.11</td><td>Average</td><td>100</td><td>149</td></tr><tr><td>8</td><td>15960.00</td><td>55.50</td><td>74.00</td><td>-18.50</td><td>50.39</td><td>5.11</td><td>Peak</td><td>100</td><td>149</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	5320.00	98.98			99.11	-0.13	Average	102	281	2 *	5320.00	112.11			112.24	-0.13	Peak	102	281	3	5350.00	45.01	54.00	-8.99	45.07	-0.06	Average	102	281	4	5350.00	58.82	74.00	-15.18	58.88	-0.06	Peak	102	281	5	10640.00	41.96	54.00	-12.04	33.49	8.47	Average	100	56	6	10640.00	54.76	74.00	-19.24	46.29	8.47	Peak	100	56	7	15960.00	42.23	54.00	-11.77	37.12	5.11	Average	100	149	8	15960.00	55.50	74.00	-18.50	50.39	5.11	Peak	100	149
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	5320.00	98.98			99.11	-0.13	Average	102	281																																																																																																								
2 *	5320.00	112.11			112.24	-0.13	Peak	102	281																																																																																																								
3	5350.00	45.01	54.00	-8.99	45.07	-0.06	Average	102	281																																																																																																								
4	5350.00	58.82	74.00	-15.18	58.88	-0.06	Peak	102	281																																																																																																								
5	10640.00	41.96	54.00	-12.04	33.49	8.47	Average	100	56																																																																																																								
6	10640.00	54.76	74.00	-19.24	46.29	8.47	Peak	100	56																																																																																																								
7	15960.00	42.23	54.00	-11.77	37.12	5.11	Average	100	149																																																																																																								
8	15960.00	55.50	74.00	-18.50	50.39	5.11	Peak	100	149																																																																																																								



Modulation	be EHT20	Test Freq. (MHz)	5320																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>5320.00</td><td>104.83</td><td></td><td></td><td>104.96</td><td>-0.13</td><td>Average</td><td>263</td><td>87</td></tr><tr><td>2 *</td><td>5320.00</td><td>117.16</td><td></td><td></td><td>117.29</td><td>-0.13</td><td>Peak</td><td>263</td><td>87</td></tr><tr><td>3</td><td>5350.00</td><td>48.34</td><td>54.00</td><td>-5.66</td><td>48.40</td><td>-0.06</td><td>Average</td><td>263</td><td>87</td></tr><tr><td>4</td><td>5350.00</td><td>63.87</td><td>74.00</td><td>-10.13</td><td>63.93</td><td>-0.06</td><td>Peak</td><td>263</td><td>87</td></tr><tr><td>5</td><td>10640.00</td><td>41.86</td><td>54.00</td><td>-12.14</td><td>33.39</td><td>8.47</td><td>Average</td><td>100</td><td>117</td></tr><tr><td>6</td><td>10640.00</td><td>54.83</td><td>74.00</td><td>-19.17</td><td>46.36</td><td>8.47</td><td>Peak</td><td>100</td><td>117</td></tr><tr><td>7</td><td>15960.00</td><td>42.42</td><td>54.00</td><td>-11.58</td><td>37.31</td><td>5.11</td><td>Average</td><td>100</td><td>72</td></tr><tr><td>8</td><td>15960.00</td><td>54.66</td><td>74.00</td><td>-19.34</td><td>49.55</td><td>5.11</td><td>Peak</td><td>100</td><td>72</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	5320.00	104.83			104.96	-0.13	Average	263	87	2 *	5320.00	117.16			117.29	-0.13	Peak	263	87	3	5350.00	48.34	54.00	-5.66	48.40	-0.06	Average	263	87	4	5350.00	63.87	74.00	-10.13	63.93	-0.06	Peak	263	87	5	10640.00	41.86	54.00	-12.14	33.39	8.47	Average	100	117	6	10640.00	54.83	74.00	-19.17	46.36	8.47	Peak	100	117	7	15960.00	42.42	54.00	-11.58	37.31	5.11	Average	100	72	8	15960.00	54.66	74.00	-19.34	49.55	5.11	Peak	100	72
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1 *	5320.00	104.83			104.96	-0.13	Average	263	87																																																																																																								
2 *	5320.00	117.16			117.29	-0.13	Peak	263	87																																																																																																								
3	5350.00	48.34	54.00	-5.66	48.40	-0.06	Average	263	87																																																																																																								
4	5350.00	63.87	74.00	-10.13	63.93	-0.06	Peak	263	87																																																																																																								
5	10640.00	41.86	54.00	-12.14	33.39	8.47	Average	100	117																																																																																																								
6	10640.00	54.83	74.00	-19.17	46.36	8.47	Peak	100	117																																																																																																								
7	15960.00	42.42	54.00	-11.58	37.31	5.11	Average	100	72																																																																																																								
8	15960.00	54.66	74.00	-19.34	49.55	5.11	Peak	100	72																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency.																																																																																																																	




Modulation	be EHT20	Test Freq. (MHz)	5500
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):25 Humidity(%):65			
Level (dBUV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5500																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>45.08</td><td>54.00</td><td>-8.92</td><td>44.76</td><td>0.32</td><td>Average</td><td>248</td><td>82</td></tr><tr><td>2</td><td>5460.00</td><td>57.91</td><td>74.00</td><td>-16.09</td><td>57.59</td><td>0.32</td><td>Peak</td><td>248</td><td>82</td></tr><tr><td>3</td><td>5470.00</td><td>59.79</td><td>68.20</td><td>-8.41</td><td>59.43</td><td>0.36</td><td>Peak</td><td>248</td><td>82</td></tr><tr><td>4 *</td><td>5500.00</td><td>104.10</td><td></td><td></td><td>103.61</td><td>0.49</td><td>Average</td><td>248</td><td>82</td></tr><tr><td>5 *</td><td>5500.00</td><td>117.47</td><td></td><td></td><td>116.98</td><td>0.49</td><td>Peak</td><td>248</td><td>82</td></tr><tr><td>6</td><td>11000.00</td><td>42.54</td><td>54.00</td><td>-11.46</td><td>33.74</td><td>8.80</td><td>Average</td><td>100</td><td>49</td></tr><tr><td>7</td><td>11000.00</td><td>55.47</td><td>74.00</td><td>-18.53</td><td>46.67</td><td>8.80</td><td>Peak</td><td>100</td><td>49</td></tr><tr><td>8</td><td>16500.00</td><td>59.15</td><td>68.20</td><td>-9.05</td><td>51.59</td><td>7.56</td><td>Peak</td><td>100</td><td>78</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	45.08	54.00	-8.92	44.76	0.32	Average	248	82	2	5460.00	57.91	74.00	-16.09	57.59	0.32	Peak	248	82	3	5470.00	59.79	68.20	-8.41	59.43	0.36	Peak	248	82	4 *	5500.00	104.10			103.61	0.49	Average	248	82	5 *	5500.00	117.47			116.98	0.49	Peak	248	82	6	11000.00	42.54	54.00	-11.46	33.74	8.80	Average	100	49	7	11000.00	55.47	74.00	-18.53	46.67	8.80	Peak	100	49	8	16500.00	59.15	68.20	-9.05	51.59	7.56	Peak	100	78
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	45.08	54.00	-8.92	44.76	0.32	Average	248	82																																																																																				
2	5460.00	57.91	74.00	-16.09	57.59	0.32	Peak	248	82																																																																																				
3	5470.00	59.79	68.20	-8.41	59.43	0.36	Peak	248	82																																																																																				
4 *	5500.00	104.10			103.61	0.49	Average	248	82																																																																																				
5 *	5500.00	117.47			116.98	0.49	Peak	248	82																																																																																				
6	11000.00	42.54	54.00	-11.46	33.74	8.80	Average	100	49																																																																																				
7	11000.00	55.47	74.00	-18.53	46.67	8.80	Peak	100	49																																																																																				
8	16500.00	59.15	68.20	-9.05	51.59	7.56	Peak	100	78																																																																																				



Modulation	be EHT20	Test Freq. (MHz)	5580																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Sena Yu Temperature(°C):24 Humidity(%):65																																																																																																							
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>42.55</td><td>54.00</td><td>-11.45</td><td>42.23</td><td>0.32</td><td>Average</td><td>258</td><td>276</td></tr><tr><td>2</td><td>5460.00</td><td>55.47</td><td>74.00</td><td>-18.53</td><td>55.15</td><td>0.32</td><td>Peak</td><td>258</td><td>276</td></tr><tr><td>3</td><td>5470.00</td><td>55.54</td><td>68.20</td><td>-12.66</td><td>55.18</td><td>0.36</td><td>Peak</td><td>258</td><td>276</td></tr><tr><td>4 *</td><td>5580.00</td><td>100.17</td><td></td><td></td><td>99.64</td><td>0.53</td><td>Average</td><td>258</td><td>276</td></tr><tr><td>5 *</td><td>5580.00</td><td>112.99</td><td></td><td></td><td>112.46</td><td>0.53</td><td>Peak</td><td>258</td><td>276</td></tr><tr><td>6</td><td>5725.00</td><td>56.76</td><td>68.20</td><td>-11.44</td><td>56.11</td><td>0.65</td><td>Peak</td><td>258</td><td>276</td></tr><tr><td>7</td><td>11160.00</td><td>41.87</td><td>54.00</td><td>-12.13</td><td>33.56</td><td>8.31</td><td>Average</td><td>100</td><td>174</td></tr><tr><td>8</td><td>11160.00</td><td>55.24</td><td>74.00</td><td>-18.76</td><td>46.93</td><td>8.31</td><td>Peak</td><td>100</td><td>174</td></tr><tr><td>9</td><td>16740.00</td><td>59.35</td><td>68.20</td><td>-8.85</td><td>51.22</td><td>8.13</td><td>Peak</td><td>100</td><td>204</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	42.55	54.00	-11.45	42.23	0.32	Average	258	276	2	5460.00	55.47	74.00	-18.53	55.15	0.32	Peak	258	276	3	5470.00	55.54	68.20	-12.66	55.18	0.36	Peak	258	276	4 *	5580.00	100.17			99.64	0.53	Average	258	276	5 *	5580.00	112.99			112.46	0.53	Peak	258	276	6	5725.00	56.76	68.20	-11.44	56.11	0.65	Peak	258	276	7	11160.00	41.87	54.00	-12.13	33.56	8.31	Average	100	174	8	11160.00	55.24	74.00	-18.76	46.93	8.31	Peak	100	174	9	16740.00	59.35	68.20	-8.85	51.22	8.13	Peak	100	204
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	42.55	54.00	-11.45	42.23	0.32	Average	258	276																																																																																														
2	5460.00	55.47	74.00	-18.53	55.15	0.32	Peak	258	276																																																																																														
3	5470.00	55.54	68.20	-12.66	55.18	0.36	Peak	258	276																																																																																														
4 *	5580.00	100.17			99.64	0.53	Average	258	276																																																																																														
5 *	5580.00	112.99			112.46	0.53	Peak	258	276																																																																																														
6	5725.00	56.76	68.20	-11.44	56.11	0.65	Peak	258	276																																																																																														
7	11160.00	41.87	54.00	-12.13	33.56	8.31	Average	100	174																																																																																														
8	11160.00	55.24	74.00	-18.76	46.93	8.31	Peak	100	174																																																																																														
9	16740.00	59.35	68.20	-8.85	51.22	8.13	Peak	100	204																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																							

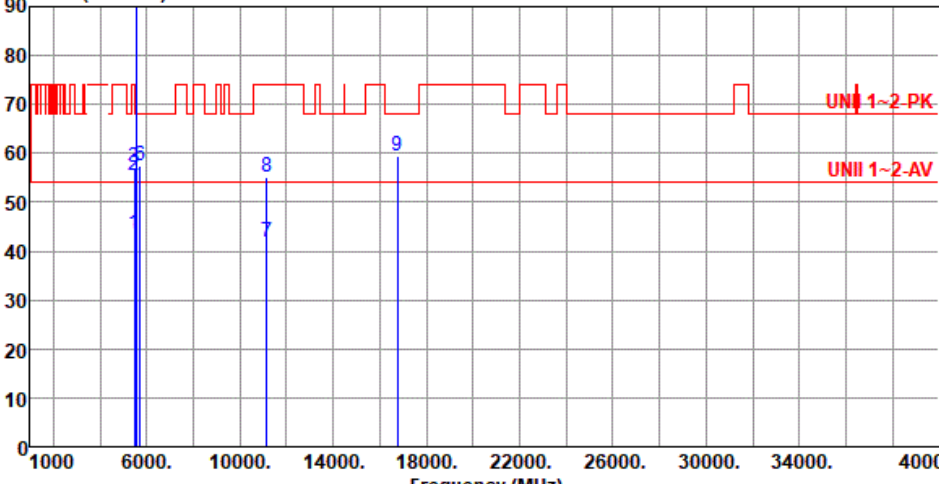Modulation	be EHT20	Test Freq. (MHz)	5580																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Sena Yu Temperature(°C):24 Humidity(%):65																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.57</td><td>54.00</td><td>-10.43</td><td>43.25</td><td>0.32</td><td>Average</td><td>270</td><td>83</td></tr><tr><td>2</td><td>5460.00</td><td>55.51</td><td>74.00</td><td>-18.49</td><td>55.19</td><td>0.32</td><td>Peak</td><td>270</td><td>83</td></tr><tr><td>3</td><td>5470.00</td><td>57.27</td><td>68.20</td><td>-10.93</td><td>56.91</td><td>0.36</td><td>Peak</td><td>270</td><td>83</td></tr><tr><td>4 *</td><td>5580.00</td><td>104.72</td><td></td><td></td><td>104.19</td><td>0.53</td><td>Average</td><td>270</td><td>83</td></tr><tr><td>5 *</td><td>5580.00</td><td>117.70</td><td></td><td></td><td>117.17</td><td>0.53</td><td>Peak</td><td>270</td><td>83</td></tr><tr><td>6</td><td>5725.00</td><td>57.51</td><td>68.20</td><td>-10.69</td><td>56.86</td><td>0.65</td><td>Peak</td><td>270</td><td>83</td></tr><tr><td>7</td><td>11160.00</td><td>41.81</td><td>54.00</td><td>-12.19</td><td>33.50</td><td>8.31</td><td>Average</td><td>100</td><td>152</td></tr><tr><td>8</td><td>11160.00</td><td>55.02</td><td>74.00</td><td>-18.98</td><td>46.71</td><td>8.31</td><td>Peak</td><td>100</td><td>152</td></tr><tr><td>9</td><td>16740.00</td><td>59.45</td><td>68.20</td><td>-8.75</td><td>51.32</td><td>8.13</td><td>Peak</td><td>100</td><td>221</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.57	54.00	-10.43	43.25	0.32	Average	270	83	2	5460.00	55.51	74.00	-18.49	55.19	0.32	Peak	270	83	3	5470.00	57.27	68.20	-10.93	56.91	0.36	Peak	270	83	4 *	5580.00	104.72			104.19	0.53	Average	270	83	5 *	5580.00	117.70			117.17	0.53	Peak	270	83	6	5725.00	57.51	68.20	-10.69	56.86	0.65	Peak	270	83	7	11160.00	41.81	54.00	-12.19	33.50	8.31	Average	100	152	8	11160.00	55.02	74.00	-18.98	46.71	8.31	Peak	100	152	9	16740.00	59.45	68.20	-8.75	51.32	8.13	Peak	100	221
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	43.57	54.00	-10.43	43.25	0.32	Average	270	83																																																																																														
2	5460.00	55.51	74.00	-18.49	55.19	0.32	Peak	270	83																																																																																														
3	5470.00	57.27	68.20	-10.93	56.91	0.36	Peak	270	83																																																																																														
4 *	5580.00	104.72			104.19	0.53	Average	270	83																																																																																														
5 *	5580.00	117.70			117.17	0.53	Peak	270	83																																																																																														
6	5725.00	57.51	68.20	-10.69	56.86	0.65	Peak	270	83																																																																																														
7	11160.00	41.81	54.00	-12.19	33.50	8.31	Average	100	152																																																																																														
8	11160.00	55.02	74.00	-18.98	46.71	8.31	Peak	100	152																																																																																														
9	16740.00	59.45	68.20	-8.75	51.32	8.13	Peak	100	221																																																																																														



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):25 Humidity(%):65			
Level (dBUV/m) <			



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) <			



Modulation	be EHT20	Test Freq. (MHz)	5720																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Paul Lin Temperature(°C):25 Humidity(%):64																																																																																																							
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.11</td><td>54.00</td><td>-10.89</td><td>42.79</td><td>0.32</td><td>Average</td><td>254</td><td>276</td></tr><tr><td>2</td><td>5460.00</td><td>54.29</td><td>74.00</td><td>-19.71</td><td>53.97</td><td>0.32</td><td>Peak</td><td>254</td><td>276</td></tr><tr><td>3</td><td>5470.00</td><td>55.36</td><td>68.20</td><td>-12.84</td><td>55.00</td><td>0.36</td><td>Peak</td><td>254</td><td>276</td></tr><tr><td>4 *</td><td>5720.00</td><td>99.35</td><td></td><td></td><td>98.71</td><td>0.64</td><td>Average</td><td>254</td><td>276</td></tr><tr><td>5 *</td><td>5720.00</td><td>112.73</td><td></td><td></td><td>112.09</td><td>0.64</td><td>Peak</td><td>254</td><td>276</td></tr><tr><td>6</td><td>5850.00</td><td>56.25</td><td>68.20</td><td>-11.95</td><td>55.17</td><td>1.08</td><td>Peak</td><td>254</td><td>276</td></tr><tr><td>7</td><td>11440.00</td><td>42.88</td><td>54.00</td><td>-11.12</td><td>34.48</td><td>8.40</td><td>Average</td><td>100</td><td>76</td></tr><tr><td>8</td><td>11440.00</td><td>55.89</td><td>74.00</td><td>-18.11</td><td>47.49</td><td>8.40</td><td>Peak</td><td>100</td><td>76</td></tr><tr><td>9</td><td>17160.00</td><td>59.39</td><td>68.20</td><td>-8.81</td><td>51.57</td><td>7.82</td><td>Peak</td><td>100</td><td>134</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.11	54.00	-10.89	42.79	0.32	Average	254	276	2	5460.00	54.29	74.00	-19.71	53.97	0.32	Peak	254	276	3	5470.00	55.36	68.20	-12.84	55.00	0.36	Peak	254	276	4 *	5720.00	99.35			98.71	0.64	Average	254	276	5 *	5720.00	112.73			112.09	0.64	Peak	254	276	6	5850.00	56.25	68.20	-11.95	55.17	1.08	Peak	254	276	7	11440.00	42.88	54.00	-11.12	34.48	8.40	Average	100	76	8	11440.00	55.89	74.00	-18.11	47.49	8.40	Peak	100	76	9	17160.00	59.39	68.20	-8.81	51.57	7.82	Peak	100	134
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	43.11	54.00	-10.89	42.79	0.32	Average	254	276																																																																																														
2	5460.00	54.29	74.00	-19.71	53.97	0.32	Peak	254	276																																																																																														
3	5470.00	55.36	68.20	-12.84	55.00	0.36	Peak	254	276																																																																																														
4 *	5720.00	99.35			98.71	0.64	Average	254	276																																																																																														
5 *	5720.00	112.73			112.09	0.64	Peak	254	276																																																																																														
6	5850.00	56.25	68.20	-11.95	55.17	1.08	Peak	254	276																																																																																														
7	11440.00	42.88	54.00	-11.12	34.48	8.40	Average	100	76																																																																																														
8	11440.00	55.89	74.00	-18.11	47.49	8.40	Peak	100	76																																																																																														
9	17160.00	59.39	68.20	-8.81	51.57	7.82	Peak	100	134																																																																																														




Modulation	be EHT20	Test Freq. (MHz)	5720																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Paul Lin Temperature(°C):25 Humidity(%):64																																																																																																							
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.24</td><td>54.00</td><td>-10.76</td><td>42.92</td><td>0.32</td><td>Average</td><td>246</td><td>83</td></tr><tr><td>2</td><td>5460.00</td><td>54.46</td><td>74.00</td><td>-19.54</td><td>54.14</td><td>0.32</td><td>Peak</td><td>246</td><td>83</td></tr><tr><td>3</td><td>5470.00</td><td>55.54</td><td>68.20</td><td>-12.66</td><td>55.18</td><td>0.36</td><td>Peak</td><td>246</td><td>83</td></tr><tr><td>4 *</td><td>5720.00</td><td>104.14</td><td></td><td></td><td>103.50</td><td>0.64</td><td>Average</td><td>246</td><td>83</td></tr><tr><td>5 *</td><td>5720.00</td><td>117.50</td><td></td><td></td><td>116.86</td><td>0.64</td><td>Peak</td><td>246</td><td>83</td></tr><tr><td>6</td><td>5850.00</td><td>56.47</td><td>68.20</td><td>-11.73</td><td>55.39</td><td>1.08</td><td>Peak</td><td>246</td><td>83</td></tr><tr><td>7</td><td>11440.00</td><td>42.91</td><td>54.00</td><td>-11.09</td><td>34.51</td><td>8.40</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>8</td><td>11440.00</td><td>55.29</td><td>74.00</td><td>-18.71</td><td>46.89</td><td>8.40</td><td>Peak</td><td>100</td><td>122</td></tr><tr><td>9</td><td>17160.00</td><td>60.19</td><td>68.20</td><td>-8.01</td><td>52.37</td><td>7.82</td><td>Peak</td><td>100</td><td>98</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.24	54.00	-10.76	42.92	0.32	Average	246	83	2	5460.00	54.46	74.00	-19.54	54.14	0.32	Peak	246	83	3	5470.00	55.54	68.20	-12.66	55.18	0.36	Peak	246	83	4 *	5720.00	104.14			103.50	0.64	Average	246	83	5 *	5720.00	117.50			116.86	0.64	Peak	246	83	6	5850.00	56.47	68.20	-11.73	55.39	1.08	Peak	246	83	7	11440.00	42.91	54.00	-11.09	34.51	8.40	Average	100	122	8	11440.00	55.29	74.00	-18.71	46.89	8.40	Peak	100	122	9	17160.00	60.19	68.20	-8.01	52.37	7.82	Peak	100	98
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	43.24	54.00	-10.76	42.92	0.32	Average	246	83																																																																																														
2	5460.00	54.46	74.00	-19.54	54.14	0.32	Peak	246	83																																																																																														
3	5470.00	55.54	68.20	-12.66	55.18	0.36	Peak	246	83																																																																																														
4 *	5720.00	104.14			103.50	0.64	Average	246	83																																																																																														
5 *	5720.00	117.50			116.86	0.64	Peak	246	83																																																																																														
6	5850.00	56.47	68.20	-11.73	55.39	1.08	Peak	246	83																																																																																														
7	11440.00	42.91	54.00	-11.09	34.51	8.40	Average	100	122																																																																																														
8	11440.00	55.29	74.00	-18.71	46.89	8.40	Peak	100	122																																																																																														
9	17160.00	60.19	68.20	-8.01	52.37	7.82	Peak	100	98																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency.																																																																																																							




Modulation	be EHT20	Test Freq. (MHz)	5745																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sena Yu Temperature(°C):24 Humidity(%):65																																																																																																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>58.50</td><td>68.20</td><td>-9.70</td><td>58.14</td><td>0.36</td><td>Peak</td><td>272</td><td>274</td></tr><tr><td>2</td><td>5700.00</td><td>66.06</td><td>105.20</td><td>-39.14</td><td>65.46</td><td>0.60</td><td>Peak</td><td>272</td><td>274</td></tr><tr><td>3</td><td>5720.00</td><td>73.91</td><td>110.80</td><td>-36.89</td><td>73.27</td><td>0.64</td><td>Peak</td><td>272</td><td>274</td></tr><tr><td>4</td><td>5725.00</td><td>76.51</td><td>122.20</td><td>-45.69</td><td>75.86</td><td>0.65</td><td>Peak</td><td>272</td><td>274</td></tr><tr><td>5 *</td><td>5745.00</td><td>103.32</td><td></td><td></td><td>102.62</td><td>0.70</td><td>Average</td><td>272</td><td>274</td></tr><tr><td>6 *</td><td>5745.00</td><td>115.93</td><td></td><td></td><td>115.23</td><td>0.70</td><td>Peak</td><td>272</td><td>274</td></tr><tr><td>7</td><td>5925.00</td><td>59.75</td><td>68.20</td><td>-8.45</td><td>58.36</td><td>1.39</td><td>Peak</td><td>272</td><td>274</td></tr><tr><td>8</td><td>11490.00</td><td>42.33</td><td>54.00</td><td>-11.67</td><td>33.89</td><td>8.44</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>9</td><td>11490.00</td><td>55.03</td><td>74.00</td><td>-18.97</td><td>46.59</td><td>8.44</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>10</td><td>17235.00</td><td>59.75</td><td>68.20</td><td>-8.45</td><td>51.91</td><td>7.84</td><td>Peak</td><td>100</td><td>48</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	58.50	68.20	-9.70	58.14	0.36	Peak	272	274	2	5700.00	66.06	105.20	-39.14	65.46	0.60	Peak	272	274	3	5720.00	73.91	110.80	-36.89	73.27	0.64	Peak	272	274	4	5725.00	76.51	122.20	-45.69	75.86	0.65	Peak	272	274	5 *	5745.00	103.32			102.62	0.70	Average	272	274	6 *	5745.00	115.93			115.23	0.70	Peak	272	274	7	5925.00	59.75	68.20	-8.45	58.36	1.39	Peak	272	274	8	11490.00	42.33	54.00	-11.67	33.89	8.44	Average	100	109	9	11490.00	55.03	74.00	-18.97	46.59	8.44	Peak	100	109	10	17235.00	59.75	68.20	-8.45	51.91	7.84	Peak	100	48
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	58.50	68.20	-9.70	58.14	0.36	Peak	272	274																																																																																																								
2	5700.00	66.06	105.20	-39.14	65.46	0.60	Peak	272	274																																																																																																								
3	5720.00	73.91	110.80	-36.89	73.27	0.64	Peak	272	274																																																																																																								
4	5725.00	76.51	122.20	-45.69	75.86	0.65	Peak	272	274																																																																																																								
5 *	5745.00	103.32			102.62	0.70	Average	272	274																																																																																																								
6 *	5745.00	115.93			115.23	0.70	Peak	272	274																																																																																																								
7	5925.00	59.75	68.20	-8.45	58.36	1.39	Peak	272	274																																																																																																								
8	11490.00	42.33	54.00	-11.67	33.89	8.44	Average	100	109																																																																																																								
9	11490.00	55.03	74.00	-18.97	46.59	8.44	Peak	100	109																																																																																																								
10	17235.00	59.75	68.20	-8.45	51.91	7.84	Peak	100	48																																																																																																								

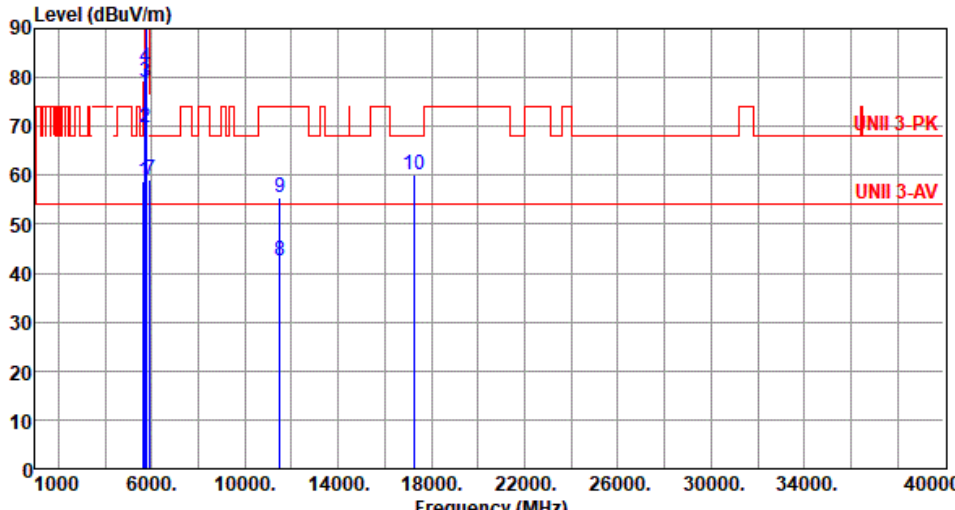


Modulation	be EHT20	Test Freq. (MHz)	5745																																																																																																															
Polarization	Vertical																																																																																																																	
Test By :Sena Yu Temperature(°C):24 Humidity(%):65																																																																																																																		
																																																																																																																		
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>58.83</td><td>68.20</td><td>-9.37</td><td>58.47</td><td>0.36</td><td>Peak</td><td>246</td><td>82</td></tr><tr><td>2</td><td>5700.00</td><td>69.66</td><td>105.20</td><td>-35.54</td><td>69.06</td><td>0.60</td><td>Peak</td><td>246</td><td>82</td></tr><tr><td>3</td><td>5720.00</td><td>78.91</td><td>110.80</td><td>-31.89</td><td>78.27</td><td>0.64</td><td>Peak</td><td>246</td><td>82</td></tr><tr><td>4</td><td>5725.00</td><td>82.13</td><td>122.20</td><td>-40.07</td><td>81.48</td><td>0.65</td><td>Peak</td><td>246</td><td>82</td></tr><tr><td>5 *</td><td>5745.00</td><td>108.06</td><td></td><td></td><td>107.36</td><td>0.70</td><td>Average</td><td>246</td><td>82</td></tr><tr><td>6 *</td><td>5745.00</td><td>121.20</td><td></td><td></td><td>120.50</td><td>0.70</td><td>Peak</td><td>246</td><td>82</td></tr><tr><td>7</td><td>5925.00</td><td>59.11</td><td>68.20</td><td>-9.09</td><td>57.72</td><td>1.39</td><td>Peak</td><td>246</td><td>82</td></tr><tr><td>8</td><td>11490.00</td><td>42.35</td><td>54.00</td><td>-11.65</td><td>33.91</td><td>8.44</td><td>Average</td><td>100</td><td>46</td></tr><tr><td>9</td><td>11490.00</td><td>55.61</td><td>74.00</td><td>-18.39</td><td>47.17</td><td>8.44</td><td>Peak</td><td>100</td><td>46</td></tr><tr><td>10</td><td>17235.00</td><td>59.96</td><td>68.20</td><td>-8.24</td><td>52.12</td><td>7.84</td><td>Peak</td><td>100</td><td>117</td></tr></table>		Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	58.83	68.20	-9.37	58.47	0.36	Peak	246	82	2	5700.00	69.66	105.20	-35.54	69.06	0.60	Peak	246	82	3	5720.00	78.91	110.80	-31.89	78.27	0.64	Peak	246	82	4	5725.00	82.13	122.20	-40.07	81.48	0.65	Peak	246	82	5 *	5745.00	108.06			107.36	0.70	Average	246	82	6 *	5745.00	121.20			120.50	0.70	Peak	246	82	7	5925.00	59.11	68.20	-9.09	57.72	1.39	Peak	246	82	8	11490.00	42.35	54.00	-11.65	33.91	8.44	Average	100	46	9	11490.00	55.61	74.00	-18.39	47.17	8.44	Peak	100	46	10	17235.00	59.96	68.20	-8.24	52.12	7.84	Peak	100	117			
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																									
1	5650.00	58.83	68.20	-9.37	58.47	0.36	Peak	246	82																																																																																																									
2	5700.00	69.66	105.20	-35.54	69.06	0.60	Peak	246	82																																																																																																									
3	5720.00	78.91	110.80	-31.89	78.27	0.64	Peak	246	82																																																																																																									
4	5725.00	82.13	122.20	-40.07	81.48	0.65	Peak	246	82																																																																																																									
5 *	5745.00	108.06			107.36	0.70	Average	246	82																																																																																																									
6 *	5745.00	121.20			120.50	0.70	Peak	246	82																																																																																																									
7	5925.00	59.11	68.20	-9.09	57.72	1.39	Peak	246	82																																																																																																									
8	11490.00	42.35	54.00	-11.65	33.91	8.44	Average	100	46																																																																																																									
9	11490.00	55.61	74.00	-18.39	47.17	8.44	Peak	100	46																																																																																																									
10	17235.00	59.96	68.20	-8.24	52.12	7.84	Peak	100	117																																																																																																									
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																		

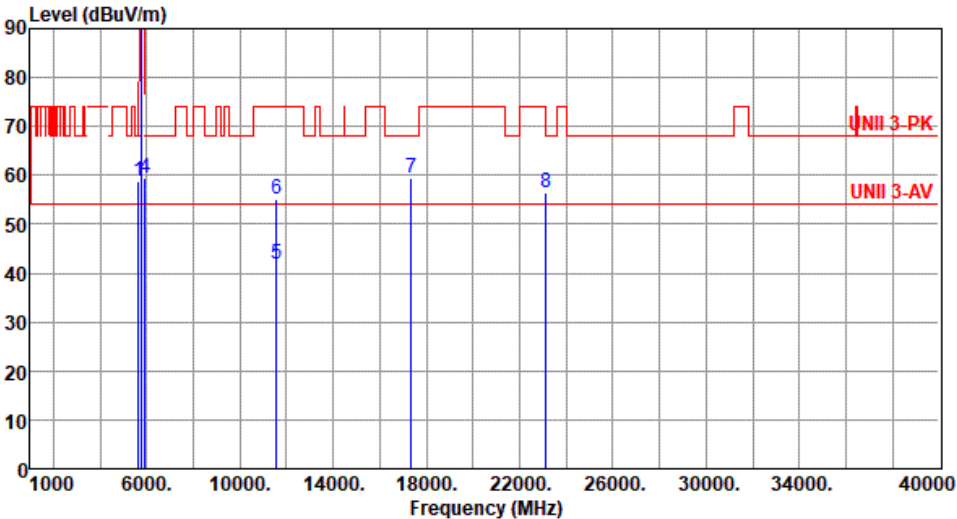


Modulation	be EHT20	Test Freq. (MHz)	5785																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sena Yu Temperature(°C):24 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>58.75</td><td>68.20</td><td>-9.45</td><td>58.39</td><td>0.36</td><td>Peak</td><td>272</td><td>272</td></tr><tr><td>2 *</td><td>5785.00</td><td>103.12</td><td></td><td></td><td>102.24</td><td>0.88</td><td>Average</td><td>272</td><td>272</td></tr><tr><td>3 *</td><td>5785.00</td><td>115.49</td><td></td><td></td><td>114.61</td><td>0.88</td><td>Peak</td><td>272</td><td>272</td></tr><tr><td>4</td><td>5925.00</td><td>59.33</td><td>68.20</td><td>-8.87</td><td>57.94</td><td>1.39</td><td>Peak</td><td>272</td><td>272</td></tr><tr><td>5</td><td>11570.00</td><td>41.94</td><td>54.00</td><td>-12.06</td><td>33.66</td><td>8.28</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>6</td><td>11570.00</td><td>55.11</td><td>74.00</td><td>-18.89</td><td>46.83</td><td>8.28</td><td>Peak</td><td>100</td><td>158</td></tr><tr><td>7</td><td>17355.00</td><td>59.37</td><td>68.20</td><td>-8.83</td><td>51.23</td><td>8.14</td><td>Peak</td><td>100</td><td>206</td></tr><tr><td>8</td><td>23140.00</td><td>56.44</td><td>68.20</td><td>-11.76</td><td>49.35</td><td>7.09</td><td>Peak</td><td>100</td><td>177</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	58.75	68.20	-9.45	58.39	0.36	Peak	272	272	2 *	5785.00	103.12			102.24	0.88	Average	272	272	3 *	5785.00	115.49			114.61	0.88	Peak	272	272	4	5925.00	59.33	68.20	-8.87	57.94	1.39	Peak	272	272	5	11570.00	41.94	54.00	-12.06	33.66	8.28	Average	100	158	6	11570.00	55.11	74.00	-18.89	46.83	8.28	Peak	100	158	7	17355.00	59.37	68.20	-8.83	51.23	8.14	Peak	100	206	8	23140.00	56.44	68.20	-11.76	49.35	7.09	Peak	100	177
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	58.75	68.20	-9.45	58.39	0.36	Peak	272	272																																																																																				
2 *	5785.00	103.12			102.24	0.88	Average	272	272																																																																																				
3 *	5785.00	115.49			114.61	0.88	Peak	272	272																																																																																				
4	5925.00	59.33	68.20	-8.87	57.94	1.39	Peak	272	272																																																																																				
5	11570.00	41.94	54.00	-12.06	33.66	8.28	Average	100	158																																																																																				
6	11570.00	55.11	74.00	-18.89	46.83	8.28	Peak	100	158																																																																																				
7	17355.00	59.37	68.20	-8.83	51.23	8.14	Peak	100	206																																																																																				
8	23140.00	56.44	68.20	-11.76	49.35	7.09	Peak	100	177																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													

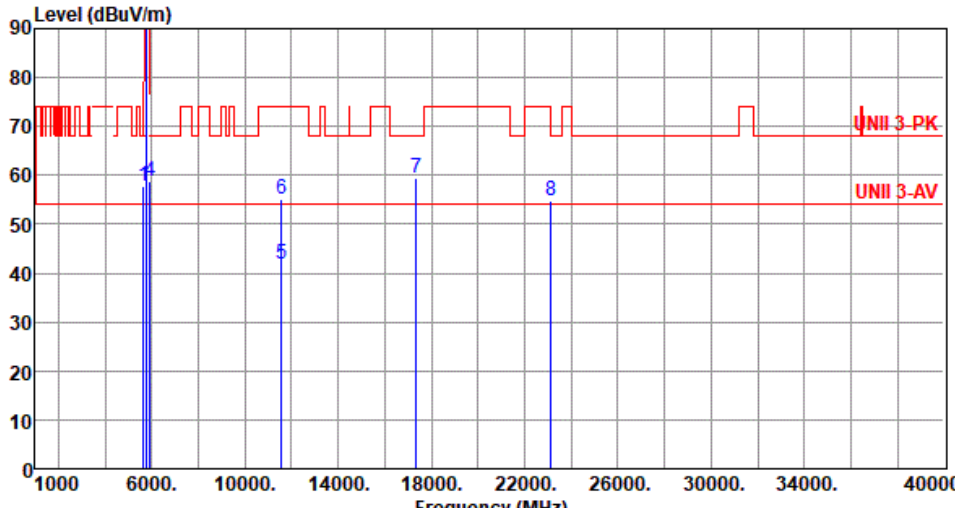

Modulation	be EHT20	Test Freq. (MHz)	5785																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sena Yu Temperature(°C):24 Humidity(%):65																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>57.77</td><td>68.20</td><td>-10.43</td><td>57.41</td><td>0.36</td><td>Peak</td><td>238</td><td>82</td></tr><tr><td>2 *</td><td>5785.00</td><td>108.12</td><td></td><td></td><td>107.24</td><td>0.88</td><td>Average</td><td>238</td><td>82</td></tr><tr><td>3 *</td><td>5785.00</td><td>119.99</td><td></td><td></td><td>119.11</td><td>0.88</td><td>Peak</td><td>238</td><td>82</td></tr><tr><td>4</td><td>5925.00</td><td>58.75</td><td>68.20</td><td>-9.45</td><td>57.36</td><td>1.39</td><td>Peak</td><td>238</td><td>82</td></tr><tr><td>5</td><td>11570.00</td><td>41.73</td><td>54.00</td><td>-12.27</td><td>33.45</td><td>8.28</td><td>Average</td><td>100</td><td>205</td></tr><tr><td>6</td><td>11570.00</td><td>55.04</td><td>74.00</td><td>-18.96</td><td>46.76</td><td>8.28</td><td>Peak</td><td>100</td><td>205</td></tr><tr><td>7</td><td>17355.00</td><td>59.57</td><td>68.20</td><td>-8.63</td><td>51.43</td><td>8.14</td><td>Peak</td><td>100</td><td>118</td></tr><tr><td>8</td><td>23140.00</td><td>54.66</td><td>68.20</td><td>-13.54</td><td>47.57</td><td>7.09</td><td>Peak</td><td>100</td><td>258</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5650.00	57.77	68.20	-10.43	57.41	0.36	Peak	238	82	2 *	5785.00	108.12			107.24	0.88	Average	238	82	3 *	5785.00	119.99			119.11	0.88	Peak	238	82	4	5925.00	58.75	68.20	-9.45	57.36	1.39	Peak	238	82	5	11570.00	41.73	54.00	-12.27	33.45	8.28	Average	100	205	6	11570.00	55.04	74.00	-18.96	46.76	8.28	Peak	100	205	7	17355.00	59.57	68.20	-8.63	51.43	8.14	Peak	100	118	8	23140.00	54.66	68.20	-13.54	47.57	7.09	Peak	100	258
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1	5650.00	57.77	68.20	-10.43	57.41	0.36	Peak	238	82																																																																																																								
2 *	5785.00	108.12			107.24	0.88	Average	238	82																																																																																																								
3 *	5785.00	119.99			119.11	0.88	Peak	238	82																																																																																																								
4	5925.00	58.75	68.20	-9.45	57.36	1.39	Peak	238	82																																																																																																								
5	11570.00	41.73	54.00	-12.27	33.45	8.28	Average	100	205																																																																																																								
6	11570.00	55.04	74.00	-18.96	46.76	8.28	Peak	100	205																																																																																																								
7	17355.00	59.57	68.20	-8.63	51.43	8.14	Peak	100	118																																																																																																								
8	23140.00	54.66	68.20	-13.54	47.57	7.09	Peak	100	258																																																																																																								

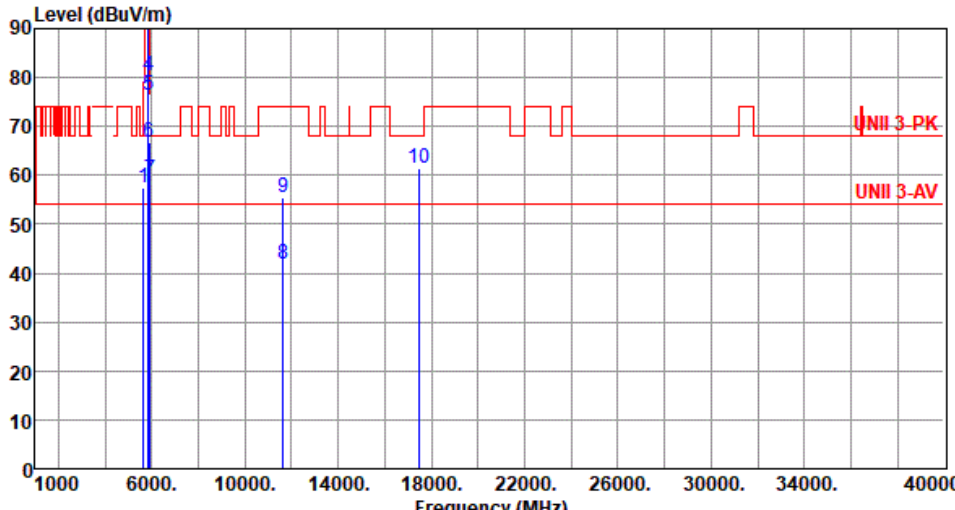

Modulation	be EHT20	Test Freq. (MHz)	5825																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sena Yu Temperature(°C):24 Humidity(%):65																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>57.49</td><td>68.20</td><td>-10.71</td><td>57.13</td><td>0.36</td><td>Peak</td><td>274</td><td>274</td></tr><tr><td>2 *</td><td>5825.00</td><td>102.56</td><td></td><td></td><td>101.55</td><td>1.01</td><td>Average</td><td>274</td><td>274</td></tr><tr><td>3 *</td><td>5825.00</td><td>115.28</td><td></td><td></td><td>114.27</td><td>1.01</td><td>Peak</td><td>274</td><td>274</td></tr><tr><td>4</td><td>5850.00</td><td>80.32</td><td>122.20</td><td>-41.88</td><td>79.24</td><td>1.08</td><td>Peak</td><td>274</td><td>274</td></tr><tr><td>5</td><td>5855.00</td><td>76.43</td><td>110.80</td><td>-34.37</td><td>75.32</td><td>1.11</td><td>Peak</td><td>274</td><td>274</td></tr><tr><td>6</td><td>5875.00</td><td>66.66</td><td>105.20</td><td>-38.54</td><td>65.46</td><td>1.20</td><td>Peak</td><td>274</td><td>274</td></tr><tr><td>7</td><td>5925.00</td><td>59.23</td><td>68.20</td><td>-8.97</td><td>57.84</td><td>1.39</td><td>Peak</td><td>274</td><td>274</td></tr><tr><td>8</td><td>11650.00</td><td>41.79</td><td>54.00</td><td>-12.21</td><td>33.82</td><td>7.97</td><td>Average</td><td>100</td><td>61</td></tr><tr><td>9</td><td>11650.00</td><td>55.38</td><td>74.00</td><td>-18.62</td><td>47.41</td><td>7.97</td><td>Peak</td><td>100</td><td>61</td></tr><tr><td>10</td><td>17475.00</td><td>61.38</td><td>68.20</td><td>-6.82</td><td>52.86</td><td>8.52</td><td>Peak</td><td>100</td><td>93</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	57.49	68.20	-10.71	57.13	0.36	Peak	274	274	2 *	5825.00	102.56			101.55	1.01	Average	274	274	3 *	5825.00	115.28			114.27	1.01	Peak	274	274	4	5850.00	80.32	122.20	-41.88	79.24	1.08	Peak	274	274	5	5855.00	76.43	110.80	-34.37	75.32	1.11	Peak	274	274	6	5875.00	66.66	105.20	-38.54	65.46	1.20	Peak	274	274	7	5925.00	59.23	68.20	-8.97	57.84	1.39	Peak	274	274	8	11650.00	41.79	54.00	-12.21	33.82	7.97	Average	100	61	9	11650.00	55.38	74.00	-18.62	47.41	7.97	Peak	100	61	10	17475.00	61.38	68.20	-6.82	52.86	8.52	Peak	100	93
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	57.49	68.20	-10.71	57.13	0.36	Peak	274	274																																																																																																								
2 *	5825.00	102.56			101.55	1.01	Average	274	274																																																																																																								
3 *	5825.00	115.28			114.27	1.01	Peak	274	274																																																																																																								
4	5850.00	80.32	122.20	-41.88	79.24	1.08	Peak	274	274																																																																																																								
5	5855.00	76.43	110.80	-34.37	75.32	1.11	Peak	274	274																																																																																																								
6	5875.00	66.66	105.20	-38.54	65.46	1.20	Peak	274	274																																																																																																								
7	5925.00	59.23	68.20	-8.97	57.84	1.39	Peak	274	274																																																																																																								
8	11650.00	41.79	54.00	-12.21	33.82	7.97	Average	100	61																																																																																																								
9	11650.00	55.38	74.00	-18.62	47.41	7.97	Peak	100	61																																																																																																								
10	17475.00	61.38	68.20	-6.82	52.86	8.52	Peak	100	93																																																																																																								



Modulation	be EHT20	Test Freq. (MHz)	5825																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sena Yu Temperature(°C):24 Humidity(%):65																																																																																																																	
Level (dBuV/m) UNII 3-PK UNII 3-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>58.69</td><td>68.20</td><td>-9.51</td><td>58.33</td><td>0.36</td><td>Peak</td><td>248</td><td>79</td></tr><tr><td>2 *</td><td>5825.00</td><td>107.83</td><td></td><td></td><td>106.82</td><td>1.01</td><td>Average</td><td>248</td><td>79</td></tr><tr><td>3 *</td><td>5825.00</td><td>121.14</td><td></td><td></td><td>120.13</td><td>1.01</td><td>Peak</td><td>248</td><td>79</td></tr><tr><td>4</td><td>5850.00</td><td>83.24</td><td>122.20</td><td>-38.96</td><td>82.16</td><td>1.08</td><td>Peak</td><td>248</td><td>79</td></tr><tr><td>5</td><td>5855.00</td><td>79.37</td><td>110.80</td><td>-31.43</td><td>78.26</td><td>1.11</td><td>Peak</td><td>248</td><td>79</td></tr><tr><td>6</td><td>5875.00</td><td>68.50</td><td>105.20</td><td>-36.70</td><td>67.30</td><td>1.20</td><td>Peak</td><td>248</td><td>79</td></tr><tr><td>7</td><td>5925.00</td><td>60.52</td><td>68.20</td><td>-7.68</td><td>59.13</td><td>1.39</td><td>Peak</td><td>248</td><td>79</td></tr><tr><td>8</td><td>11650.00</td><td>41.69</td><td>54.00</td><td>-12.31</td><td>33.72</td><td>7.97</td><td>Average</td><td>100</td><td>115</td></tr><tr><td>9</td><td>11650.00</td><td>55.08</td><td>74.00</td><td>-18.92</td><td>47.11</td><td>7.97</td><td>Peak</td><td>100</td><td>115</td></tr><tr><td>10</td><td>17475.00</td><td>61.14</td><td>68.20</td><td>-7.06</td><td>52.62</td><td>8.52</td><td>Peak</td><td>100</td><td>142</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	58.69	68.20	-9.51	58.33	0.36	Peak	248	79	2 *	5825.00	107.83			106.82	1.01	Average	248	79	3 *	5825.00	121.14			120.13	1.01	Peak	248	79	4	5850.00	83.24	122.20	-38.96	82.16	1.08	Peak	248	79	5	5855.00	79.37	110.80	-31.43	78.26	1.11	Peak	248	79	6	5875.00	68.50	105.20	-36.70	67.30	1.20	Peak	248	79	7	5925.00	60.52	68.20	-7.68	59.13	1.39	Peak	248	79	8	11650.00	41.69	54.00	-12.31	33.72	7.97	Average	100	115	9	11650.00	55.08	74.00	-18.92	47.11	7.97	Peak	100	115	10	17475.00	61.14	68.20	-7.06	52.62	8.52	Peak	100	142
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	58.69	68.20	-9.51	58.33	0.36	Peak	248	79																																																																																																								
2 *	5825.00	107.83			106.82	1.01	Average	248	79																																																																																																								
3 *	5825.00	121.14			120.13	1.01	Peak	248	79																																																																																																								
4	5850.00	83.24	122.20	-38.96	82.16	1.08	Peak	248	79																																																																																																								
5	5855.00	79.37	110.80	-31.43	78.26	1.11	Peak	248	79																																																																																																								
6	5875.00	68.50	105.20	-36.70	67.30	1.20	Peak	248	79																																																																																																								
7	5925.00	60.52	68.20	-7.68	59.13	1.39	Peak	248	79																																																																																																								
8	11650.00	41.69	54.00	-12.31	33.72	7.97	Average	100	115																																																																																																								
9	11650.00	55.08	74.00	-18.92	47.11	7.97	Peak	100	115																																																																																																								
10	17475.00	61.14	68.20	-7.06	52.62	8.52	Peak	100	142																																																																																																								

Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Horizontal		
Test By :Sena Yu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m) </			



Modulation	be EHT40	Test Freq. (MHz)	5190																																																																																
Polarization	Vertical																																																																																		
Test By :Sena Yu Temperature(°C):24 Humidity(%):65																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>53.52</td><td>54.00</td><td>-0.48</td><td>52.97</td><td>0.55</td><td>Average</td><td>263</td><td>152</td></tr><tr><td>2</td><td>5150.00</td><td>73.06</td><td>74.00</td><td>-0.94</td><td>72.51</td><td>0.55</td><td>Peak</td><td>263</td><td>152</td></tr><tr><td>3 *</td><td>5190.00</td><td>101.43</td><td></td><td></td><td>101.12</td><td>0.31</td><td>Average</td><td>263</td><td>152</td></tr><tr><td>4 *</td><td>5190.00</td><td>114.27</td><td></td><td></td><td>113.96</td><td>0.31</td><td>Peak</td><td>263</td><td>152</td></tr><tr><td>5</td><td>10380.00</td><td>54.84</td><td>68.20</td><td>-13.36</td><td>46.52</td><td>8.32</td><td>Peak</td><td>100</td><td>81</td></tr><tr><td>6</td><td>15570.00</td><td>42.24</td><td>54.00</td><td>-11.76</td><td>37.27</td><td>4.97</td><td>Average</td><td>100</td><td>134</td></tr><tr><td>7</td><td>15570.00</td><td>55.30</td><td>74.00</td><td>-18.70</td><td>50.33</td><td>4.97</td><td>Peak</td><td>100</td><td>134</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	53.52	54.00	-0.48	52.97	0.55	Average	263	152	2	5150.00	73.06	74.00	-0.94	72.51	0.55	Peak	263	152	3 *	5190.00	101.43			101.12	0.31	Average	263	152	4 *	5190.00	114.27			113.96	0.31	Peak	263	152	5	10380.00	54.84	68.20	-13.36	46.52	8.32	Peak	100	81	6	15570.00	42.24	54.00	-11.76	37.27	4.97	Average	100	134	7	15570.00	55.30	74.00	-18.70	50.33	4.97	Peak	100	134
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	53.52	54.00	-0.48	52.97	0.55	Average	263	152																																																																										
2	5150.00	73.06	74.00	-0.94	72.51	0.55	Peak	263	152																																																																										
3 *	5190.00	101.43			101.12	0.31	Average	263	152																																																																										
4 *	5190.00	114.27			113.96	0.31	Peak	263	152																																																																										
5	10380.00	54.84	68.20	-13.36	46.52	8.32	Peak	100	81																																																																										
6	15570.00	42.24	54.00	-11.76	37.27	4.97	Average	100	134																																																																										
7	15570.00	55.30	74.00	-18.70	50.33	4.97	Peak	100	134																																																																										

Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		
Test By :Sena Yu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m) </			



Modulation	be EHT40	Test Freq. (MHz)	5230																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Sena Yu Temperature(°C):24 Humidity(%):65																																																																																																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>51.81</td><td>54.00</td><td>-2.19</td><td>51.26</td><td>0.55</td><td>Average</td><td>264</td><td>150</td></tr><tr><td>2</td><td>5150.00</td><td>67.12</td><td>74.00</td><td>-6.88</td><td>66.57</td><td>0.55</td><td>Peak</td><td>264</td><td>150</td></tr><tr><td>3 *</td><td>5230.00</td><td>103.93</td><td></td><td></td><td>103.90</td><td>0.03</td><td>Average</td><td>264</td><td>150</td></tr><tr><td>4 *</td><td>5230.00</td><td>116.58</td><td></td><td></td><td>116.55</td><td>0.03</td><td>Peak</td><td>264</td><td>150</td></tr><tr><td>5</td><td>5350.00</td><td>50.82</td><td>54.00</td><td>-3.18</td><td>50.88</td><td>-0.06</td><td>Average</td><td>264</td><td>150</td></tr><tr><td>6</td><td>5350.00</td><td>65.48</td><td>74.00</td><td>-8.52</td><td>65.54</td><td>-0.06</td><td>Peak</td><td>264</td><td>150</td></tr><tr><td>7</td><td>10460.00</td><td>56.12</td><td>68.20</td><td>-12.08</td><td>47.76</td><td>8.36</td><td>Peak</td><td>100</td><td>72</td></tr><tr><td>8</td><td>15690.00</td><td>42.67</td><td>54.00</td><td>-11.33</td><td>37.67</td><td>5.00</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>9</td><td>15690.00</td><td>55.12</td><td>74.00</td><td>-18.88</td><td>50.12</td><td>5.00</td><td>Peak</td><td>100</td><td>108</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	51.81	54.00	-2.19	51.26	0.55	Average	264	150	2	5150.00	67.12	74.00	-6.88	66.57	0.55	Peak	264	150	3 *	5230.00	103.93			103.90	0.03	Average	264	150	4 *	5230.00	116.58			116.55	0.03	Peak	264	150	5	5350.00	50.82	54.00	-3.18	50.88	-0.06	Average	264	150	6	5350.00	65.48	74.00	-8.52	65.54	-0.06	Peak	264	150	7	10460.00	56.12	68.20	-12.08	47.76	8.36	Peak	100	72	8	15690.00	42.67	54.00	-11.33	37.67	5.00	Average	100	108	9	15690.00	55.12	74.00	-18.88	50.12	5.00	Peak	100	108
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	51.81	54.00	-2.19	51.26	0.55	Average	264	150																																																																																														
2	5150.00	67.12	74.00	-6.88	66.57	0.55	Peak	264	150																																																																																														
3 *	5230.00	103.93			103.90	0.03	Average	264	150																																																																																														
4 *	5230.00	116.58			116.55	0.03	Peak	264	150																																																																																														
5	5350.00	50.82	54.00	-3.18	50.88	-0.06	Average	264	150																																																																																														
6	5350.00	65.48	74.00	-8.52	65.54	-0.06	Peak	264	150																																																																																														
7	10460.00	56.12	68.20	-12.08	47.76	8.36	Peak	100	72																																																																																														
8	15690.00	42.67	54.00	-11.33	37.67	5.00	Average	100	108																																																																																														
9	15690.00	55.12	74.00	-18.88	50.12	5.00	Peak	100	108																																																																																														



Modulation	be EHT40	Test Freq. (MHz)	5270																																																																																																																								
Polarization	Horizontal																																																																																																																										
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																																											
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>42.69</td><td>54.00</td><td>-11.31</td><td>42.14</td><td>0.55</td><td>Average</td><td>109</td><td>280</td></tr><tr><td>2</td><td>5150.00</td><td>54.74</td><td>74.00</td><td>-19.26</td><td>54.19</td><td>0.55</td><td>Peak</td><td>109</td><td>280</td></tr><tr><td>3 *</td><td>5270.00</td><td>95.38</td><td></td><td></td><td>95.52</td><td>-0.14</td><td>Average</td><td>109</td><td>280</td></tr><tr><td>4 *</td><td>5270.00</td><td>108.32</td><td></td><td></td><td>108.46</td><td>-0.14</td><td>Peak</td><td>109</td><td>280</td></tr><tr><td>5</td><td>5350.00</td><td>42.86</td><td>54.00</td><td>-11.14</td><td>42.92</td><td>-0.06</td><td>Average</td><td>109</td><td>280</td></tr><tr><td>6</td><td>5350.00</td><td>54.99</td><td>74.00</td><td>-19.01</td><td>55.05</td><td>-0.06</td><td>Peak</td><td>109</td><td>280</td></tr><tr><td>7</td><td>10540.00</td><td>56.06</td><td>68.20</td><td>-12.14</td><td>47.63</td><td>8.43</td><td>Peak</td><td>100</td><td>86</td></tr><tr><td>8</td><td>15810.00</td><td>42.82</td><td>54.00</td><td>-11.18</td><td>37.72</td><td>5.10</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>9</td><td>15810.00</td><td>55.33</td><td>74.00</td><td>-18.67</td><td>50.23</td><td>5.10</td><td>Peak</td><td>100</td><td>68</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5150.00	42.69	54.00	-11.31	42.14	0.55	Average	109	280	2	5150.00	54.74	74.00	-19.26	54.19	0.55	Peak	109	280	3 *	5270.00	95.38			95.52	-0.14	Average	109	280	4 *	5270.00	108.32			108.46	-0.14	Peak	109	280	5	5350.00	42.86	54.00	-11.14	42.92	-0.06	Average	109	280	6	5350.00	54.99	74.00	-19.01	55.05	-0.06	Peak	109	280	7	10540.00	56.06	68.20	-12.14	47.63	8.43	Peak	100	86	8	15810.00	42.82	54.00	-11.18	37.72	5.10	Average	100	68	9	15810.00	55.33	74.00	-18.67	50.23	5.10	Peak	100	68
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
	MHz	level			reading			High	Table																																																																																																																		
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																																		
1	5150.00	42.69	54.00	-11.31	42.14	0.55	Average	109	280																																																																																																																		
2	5150.00	54.74	74.00	-19.26	54.19	0.55	Peak	109	280																																																																																																																		
3 *	5270.00	95.38			95.52	-0.14	Average	109	280																																																																																																																		
4 *	5270.00	108.32			108.46	-0.14	Peak	109	280																																																																																																																		
5	5350.00	42.86	54.00	-11.14	42.92	-0.06	Average	109	280																																																																																																																		
6	5350.00	54.99	74.00	-19.01	55.05	-0.06	Peak	109	280																																																																																																																		
7	10540.00	56.06	68.20	-12.14	47.63	8.43	Peak	100	86																																																																																																																		
8	15810.00	42.82	54.00	-11.18	37.72	5.10	Average	100	68																																																																																																																		
9	15810.00	55.33	74.00	-18.67	50.23	5.10	Peak	100	68																																																																																																																		



Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):25 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	5310																																																																																																																									
Polarization	Horizontal																																																																																																																											
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																																												
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>*</td><td>5310.00</td><td>95.76</td><td></td><td></td><td>95.92</td><td>-0.16</td><td>Average</td><td>108</td><td>276</td></tr><tr><td>2</td><td>*</td><td>5310.00</td><td>109.21</td><td></td><td></td><td>109.37</td><td>-0.16</td><td>Peak</td><td>108</td><td>276</td></tr><tr><td>3</td><td></td><td>5350.00</td><td>48.37</td><td>54.00</td><td>-5.63</td><td>48.43</td><td>-0.06</td><td>Average</td><td>108</td><td>276</td></tr><tr><td>4</td><td></td><td>5350.00</td><td>63.49</td><td>74.00</td><td>-10.51</td><td>63.55</td><td>-0.06</td><td>Peak</td><td>108</td><td>276</td></tr><tr><td>5</td><td></td><td>10620.00</td><td>42.06</td><td>54.00</td><td>-11.94</td><td>33.55</td><td>8.51</td><td>Average</td><td>100</td><td>109</td></tr><tr><td>6</td><td></td><td>10620.00</td><td>55.46</td><td>74.00</td><td>-18.54</td><td>46.95</td><td>8.51</td><td>Peak</td><td>100</td><td>109</td></tr><tr><td>7</td><td></td><td>15930.00</td><td>42.58</td><td>54.00</td><td>-11.42</td><td>37.36</td><td>5.22</td><td>Average</td><td>100</td><td>154</td></tr><tr><td>8</td><td></td><td>15930.00</td><td>56.05</td><td>74.00</td><td>-17.95</td><td>50.83</td><td>5.22</td><td>Peak</td><td>100</td><td>154</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.						Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn			MHz	level			reading			High	Table				dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	*	5310.00	95.76			95.92	-0.16	Average	108	276	2	*	5310.00	109.21			109.37	-0.16	Peak	108	276	3		5350.00	48.37	54.00	-5.63	48.43	-0.06	Average	108	276	4		5350.00	63.49	74.00	-10.51	63.55	-0.06	Peak	108	276	5		10620.00	42.06	54.00	-11.94	33.55	8.51	Average	100	109	6		10620.00	55.46	74.00	-18.54	46.95	8.51	Peak	100	109	7		15930.00	42.58	54.00	-11.42	37.36	5.22	Average	100	154	8		15930.00	56.05	74.00	-17.95	50.83	5.22	Peak	100	154
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
		MHz	level			reading			High	Table																																																																																																																		
			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																																		
1	*	5310.00	95.76			95.92	-0.16	Average	108	276																																																																																																																		
2	*	5310.00	109.21			109.37	-0.16	Peak	108	276																																																																																																																		
3		5350.00	48.37	54.00	-5.63	48.43	-0.06	Average	108	276																																																																																																																		
4		5350.00	63.49	74.00	-10.51	63.55	-0.06	Peak	108	276																																																																																																																		
5		10620.00	42.06	54.00	-11.94	33.55	8.51	Average	100	109																																																																																																																		
6		10620.00	55.46	74.00	-18.54	46.95	8.51	Peak	100	109																																																																																																																		
7		15930.00	42.58	54.00	-11.42	37.36	5.22	Average	100	154																																																																																																																		
8		15930.00	56.05	74.00	-17.95	50.83	5.22	Peak	100	154																																																																																																																		



Modulation	be EHT40	Test Freq. (MHz)	5310																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>5310.00</td><td>101.99</td><td></td><td></td><td>102.15</td><td>-0.16</td><td>Average</td><td>294</td><td>145</td></tr><tr><td>2 *</td><td>5310.00</td><td>115.43</td><td></td><td></td><td>115.59</td><td>-0.16</td><td>Peak</td><td>294</td><td>145</td></tr><tr><td>3</td><td>5350.00</td><td>53.71</td><td>54.00</td><td>-0.29</td><td>53.77</td><td>-0.06</td><td>Average</td><td>294</td><td>145</td></tr><tr><td>4</td><td>5350.00</td><td>68.87</td><td>74.00</td><td>-5.13</td><td>68.93</td><td>-0.06</td><td>Peak</td><td>294</td><td>145</td></tr><tr><td>5</td><td>10620.00</td><td>42.18</td><td>54.00</td><td>-11.82</td><td>33.67</td><td>8.51</td><td>Average</td><td>100</td><td>76</td></tr><tr><td>6</td><td>10620.00</td><td>55.65</td><td>74.00</td><td>-18.35</td><td>47.14</td><td>8.51</td><td>Peak</td><td>100</td><td>76</td></tr><tr><td>7</td><td>15930.00</td><td>42.69</td><td>54.00</td><td>-11.31</td><td>37.47</td><td>5.22</td><td>Average</td><td>100</td><td>89</td></tr><tr><td>8</td><td>15930.00</td><td>55.58</td><td>74.00</td><td>-18.42</td><td>50.36</td><td>5.22</td><td>Peak</td><td>100</td><td>89</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1 *	5310.00	101.99			102.15	-0.16	Average	294	145	2 *	5310.00	115.43			115.59	-0.16	Peak	294	145	3	5350.00	53.71	54.00	-0.29	53.77	-0.06	Average	294	145	4	5350.00	68.87	74.00	-5.13	68.93	-0.06	Peak	294	145	5	10620.00	42.18	54.00	-11.82	33.67	8.51	Average	100	76	6	10620.00	55.65	74.00	-18.35	47.14	8.51	Peak	100	76	7	15930.00	42.69	54.00	-11.31	37.47	5.22	Average	100	89	8	15930.00	55.58	74.00	-18.42	50.36	5.22	Peak	100	89
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level			reading			High	Table																																																																																																								
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																								
1 *	5310.00	101.99			102.15	-0.16	Average	294	145																																																																																																								
2 *	5310.00	115.43			115.59	-0.16	Peak	294	145																																																																																																								
3	5350.00	53.71	54.00	-0.29	53.77	-0.06	Average	294	145																																																																																																								
4	5350.00	68.87	74.00	-5.13	68.93	-0.06	Peak	294	145																																																																																																								
5	10620.00	42.18	54.00	-11.82	33.67	8.51	Average	100	76																																																																																																								
6	10620.00	55.65	74.00	-18.35	47.14	8.51	Peak	100	76																																																																																																								
7	15930.00	42.69	54.00	-11.31	37.47	5.22	Average	100	89																																																																																																								
8	15930.00	55.58	74.00	-18.42	50.36	5.22	Peak	100	89																																																																																																								



Modulation	be EHT40	Test Freq. (MHz)	5510																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>42.58</td><td>54.00</td><td>-11.42</td><td>42.26</td><td>0.32</td><td>Average</td><td>104</td><td>266</td></tr><tr><td>2</td><td>5460.00</td><td>55.89</td><td>74.00</td><td>-18.11</td><td>55.57</td><td>0.32</td><td>Peak</td><td>104</td><td>266</td></tr><tr><td>3</td><td>5470.00</td><td>56.58</td><td>68.20</td><td>-11.62</td><td>56.22</td><td>0.36</td><td>Peak</td><td>104</td><td>266</td></tr><tr><td>4 *</td><td>5510.00</td><td>95.54</td><td></td><td></td><td>95.05</td><td>0.49</td><td>Average</td><td>104</td><td>266</td></tr><tr><td>5 *</td><td>5510.00</td><td>110.48</td><td></td><td></td><td>109.99</td><td>0.49</td><td>Peak</td><td>104</td><td>266</td></tr><tr><td>6</td><td>11020.00</td><td>42.60</td><td>54.00</td><td>-11.40</td><td>33.87</td><td>8.73</td><td>Average</td><td>100</td><td>124</td></tr><tr><td>7</td><td>11020.00</td><td>55.87</td><td>74.00</td><td>-18.13</td><td>47.14</td><td>8.73</td><td>Peak</td><td>100</td><td>124</td></tr><tr><td>8</td><td>16530.00</td><td>58.56</td><td>68.20</td><td>-9.64</td><td>51.07</td><td>7.49</td><td>Peak</td><td>100</td><td>83</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	42.58	54.00	-11.42	42.26	0.32	Average	104	266	2	5460.00	55.89	74.00	-18.11	55.57	0.32	Peak	104	266	3	5470.00	56.58	68.20	-11.62	56.22	0.36	Peak	104	266	4 *	5510.00	95.54			95.05	0.49	Average	104	266	5 *	5510.00	110.48			109.99	0.49	Peak	104	266	6	11020.00	42.60	54.00	-11.40	33.87	8.73	Average	100	124	7	11020.00	55.87	74.00	-18.13	47.14	8.73	Peak	100	124	8	16530.00	58.56	68.20	-9.64	51.07	7.49	Peak	100	83
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	42.58	54.00	-11.42	42.26	0.32	Average	104	266																																																																																				
2	5460.00	55.89	74.00	-18.11	55.57	0.32	Peak	104	266																																																																																				
3	5470.00	56.58	68.20	-11.62	56.22	0.36	Peak	104	266																																																																																				
4 *	5510.00	95.54			95.05	0.49	Average	104	266																																																																																				
5 *	5510.00	110.48			109.99	0.49	Peak	104	266																																																																																				
6	11020.00	42.60	54.00	-11.40	33.87	8.73	Average	100	124																																																																																				
7	11020.00	55.87	74.00	-18.13	47.14	8.73	Peak	100	124																																																																																				
8	16530.00	58.56	68.20	-9.64	51.07	7.49	Peak	100	83																																																																																				



Modulation	be EHT40	Test Freq. (MHz)	5510																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>46.78</td><td>54.00</td><td>-7.22</td><td>46.46</td><td>0.32</td><td>Average</td><td>257</td><td>85</td></tr><tr><td>2</td><td>5460.00</td><td>62.03</td><td>74.00</td><td>-11.97</td><td>61.71</td><td>0.32</td><td>Peak</td><td>257</td><td>85</td></tr><tr><td>3</td><td>5470.00</td><td>62.87</td><td>68.20</td><td>-5.33</td><td>62.51</td><td>0.36</td><td>Peak</td><td>257</td><td>85</td></tr><tr><td>4 *</td><td>5510.00</td><td>101.72</td><td></td><td></td><td>101.23</td><td>0.49</td><td>Average</td><td>257</td><td>85</td></tr><tr><td>5 *</td><td>5510.00</td><td>116.71</td><td></td><td></td><td>116.22</td><td>0.49</td><td>Peak</td><td>257</td><td>85</td></tr><tr><td>6</td><td>11020.00</td><td>42.72</td><td>54.00</td><td>-11.28</td><td>33.99</td><td>8.73</td><td>Average</td><td>100</td><td>133</td></tr><tr><td>7</td><td>11020.00</td><td>55.18</td><td>74.00</td><td>-18.82</td><td>46.45</td><td>8.73</td><td>Peak</td><td>100</td><td>133</td></tr><tr><td>8</td><td>16530.00</td><td>59.34</td><td>68.20</td><td>-8.86</td><td>51.85</td><td>7.49</td><td>Peak</td><td>100</td><td>67</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	46.78	54.00	-7.22	46.46	0.32	Average	257	85	2	5460.00	62.03	74.00	-11.97	61.71	0.32	Peak	257	85	3	5470.00	62.87	68.20	-5.33	62.51	0.36	Peak	257	85	4 *	5510.00	101.72			101.23	0.49	Average	257	85	5 *	5510.00	116.71			116.22	0.49	Peak	257	85	6	11020.00	42.72	54.00	-11.28	33.99	8.73	Average	100	133	7	11020.00	55.18	74.00	-18.82	46.45	8.73	Peak	100	133	8	16530.00	59.34	68.20	-8.86	51.85	7.49	Peak	100	67
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	46.78	54.00	-7.22	46.46	0.32	Average	257	85																																																																																				
2	5460.00	62.03	74.00	-11.97	61.71	0.32	Peak	257	85																																																																																				
3	5470.00	62.87	68.20	-5.33	62.51	0.36	Peak	257	85																																																																																				
4 *	5510.00	101.72			101.23	0.49	Average	257	85																																																																																				
5 *	5510.00	116.71			116.22	0.49	Peak	257	85																																																																																				
6	11020.00	42.72	54.00	-11.28	33.99	8.73	Average	100	133																																																																																				
7	11020.00	55.18	74.00	-18.82	46.45	8.73	Peak	100	133																																																																																				
8	16530.00	59.34	68.20	-8.86	51.85	7.49	Peak	100	67																																																																																				



Modulation	be EHT40	Test Freq. (MHz)	5590
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):25 Humidity(%):65			
Level (dBUV/m)			



Modulation	be EHT40	Test Freq. (MHz)	5590						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):25 Humidity(%):65									
Level (dBuV/m) Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5460.00	44.46	54.00	-9.54	44.14	0.32	Average	244	84
2	5460.00	56.13	74.00	-17.87	55.81	0.32	Peak	244	84
3	5470.00	56.85	68.20	-11.35	56.49	0.36	Peak	244	84
4 *	5590.00	101.82			101.29	0.53	Average	244	84
5 *	5590.00	115.00			114.47	0.53	Peak	244	84
6	5725.00	58.39	68.20	-9.81	57.74	0.65	Peak	244	84
7	11180.00	42.02	54.00	-11.98	33.78	8.24	Average	100	158
8	11180.00	55.42	74.00	-18.58	47.18	8.24	Peak	100	158
9	16770.00	59.38	68.20	-8.82	51.08	8.30	Peak	100	116

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency.




Modulation	be EHT40	Test Freq. (MHz)	5670																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>5670.00</td><td>95.31</td><td></td><td></td><td>94.85</td><td>0.46</td><td>Average</td><td>102</td><td>267</td></tr><tr><td>2 *</td><td>5670.00</td><td>109.51</td><td></td><td></td><td>109.05</td><td>0.46</td><td>Peak</td><td>102</td><td>267</td></tr><tr><td>3</td><td>5725.00</td><td>56.38</td><td>68.20</td><td>-11.82</td><td>55.73</td><td>0.65</td><td>Peak</td><td>102</td><td>267</td></tr><tr><td>4</td><td>11340.00</td><td>42.71</td><td>54.00</td><td>-11.29</td><td>34.47</td><td>8.24</td><td>Average</td><td>100</td><td>114</td></tr><tr><td>5</td><td>11340.00</td><td>55.89</td><td>74.00</td><td>-18.11</td><td>47.65</td><td>8.24</td><td>Peak</td><td>100</td><td>114</td></tr><tr><td>6</td><td>17010.00</td><td>59.43</td><td>68.20</td><td>-8.77</td><td>51.46</td><td>7.97</td><td>Peak</td><td>100</td><td>64</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1 *	5670.00	95.31			94.85	0.46	Average	102	267	2 *	5670.00	109.51			109.05	0.46	Peak	102	267	3	5725.00	56.38	68.20	-11.82	55.73	0.65	Peak	102	267	4	11340.00	42.71	54.00	-11.29	34.47	8.24	Average	100	114	5	11340.00	55.89	74.00	-18.11	47.65	8.24	Peak	100	114	6	17010.00	59.43	68.20	-8.77	51.46	7.97	Peak	100	64
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level			reading			High	Table																																																																																				
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																				
1 *	5670.00	95.31			94.85	0.46	Average	102	267																																																																																				
2 *	5670.00	109.51			109.05	0.46	Peak	102	267																																																																																				
3	5725.00	56.38	68.20	-11.82	55.73	0.65	Peak	102	267																																																																																				
4	11340.00	42.71	54.00	-11.29	34.47	8.24	Average	100	114																																																																																				
5	11340.00	55.89	74.00	-18.11	47.65	8.24	Peak	100	114																																																																																				
6	17010.00	59.43	68.20	-8.77	51.46	7.97	Peak	100	64																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																													



Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) <			




Modulation	be EHT40	Test Freq. (MHz)	5710																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.06</td><td>54.00</td><td>-10.94</td><td>42.74</td><td>0.32</td><td>Average</td><td>105</td><td>271</td></tr><tr><td>2</td><td>5460.00</td><td>55.19</td><td>74.00</td><td>-18.81</td><td>54.87</td><td>0.32</td><td>Peak</td><td>105</td><td>271</td></tr><tr><td>3</td><td>5470.00</td><td>55.79</td><td>68.20</td><td>-12.41</td><td>55.43</td><td>0.36</td><td>Peak</td><td>105</td><td>271</td></tr><tr><td>4 *</td><td>5710.00</td><td>96.15</td><td></td><td></td><td>95.54</td><td>0.61</td><td>Average</td><td>105</td><td>271</td></tr><tr><td>5 *</td><td>5710.00</td><td>108.62</td><td></td><td></td><td>108.01</td><td>0.61</td><td>Peak</td><td>105</td><td>271</td></tr><tr><td>6</td><td>5850.00</td><td>56.95</td><td>68.20</td><td>-11.25</td><td>55.87</td><td>1.08</td><td>Peak</td><td>105</td><td>271</td></tr><tr><td>7</td><td>11420.00</td><td>42.89</td><td>54.00</td><td>-11.11</td><td>34.51</td><td>8.38</td><td>Average</td><td>100</td><td>79</td></tr><tr><td>8</td><td>11420.00</td><td>55.76</td><td>74.00</td><td>-18.24</td><td>47.38</td><td>8.38</td><td>Peak</td><td>100</td><td>79</td></tr><tr><td>9</td><td>17130.00</td><td>59.16</td><td>68.20</td><td>-9.04</td><td>51.37</td><td>7.79</td><td>Peak</td><td>100</td><td>114</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.06	54.00	-10.94	42.74	0.32	Average	105	271	2	5460.00	55.19	74.00	-18.81	54.87	0.32	Peak	105	271	3	5470.00	55.79	68.20	-12.41	55.43	0.36	Peak	105	271	4 *	5710.00	96.15			95.54	0.61	Average	105	271	5 *	5710.00	108.62			108.01	0.61	Peak	105	271	6	5850.00	56.95	68.20	-11.25	55.87	1.08	Peak	105	271	7	11420.00	42.89	54.00	-11.11	34.51	8.38	Average	100	79	8	11420.00	55.76	74.00	-18.24	47.38	8.38	Peak	100	79	9	17130.00	59.16	68.20	-9.04	51.37	7.79	Peak	100	114
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	43.06	54.00	-10.94	42.74	0.32	Average	105	271																																																																																														
2	5460.00	55.19	74.00	-18.81	54.87	0.32	Peak	105	271																																																																																														
3	5470.00	55.79	68.20	-12.41	55.43	0.36	Peak	105	271																																																																																														
4 *	5710.00	96.15			95.54	0.61	Average	105	271																																																																																														
5 *	5710.00	108.62			108.01	0.61	Peak	105	271																																																																																														
6	5850.00	56.95	68.20	-11.25	55.87	1.08	Peak	105	271																																																																																														
7	11420.00	42.89	54.00	-11.11	34.51	8.38	Average	100	79																																																																																														
8	11420.00	55.76	74.00	-18.24	47.38	8.38	Peak	100	79																																																																																														
9	17130.00	59.16	68.20	-9.04	51.37	7.79	Peak	100	114																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																							

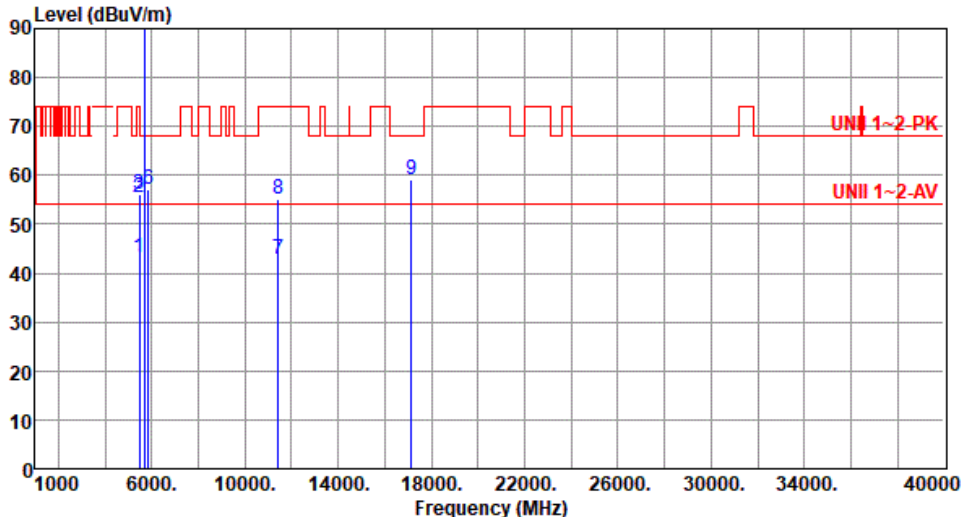Modulation	be EHT40	Test Freq. (MHz)	5710																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.23</td><td>54.00</td><td>-10.77</td><td>42.91</td><td>0.32</td><td>Average</td><td>244</td><td>84</td></tr><tr><td>2</td><td>5460.00</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>54.99</td><td>0.32</td><td>Peak</td><td>244</td><td>84</td></tr><tr><td>3</td><td>5470.00</td><td>55.97</td><td>68.20</td><td>-12.23</td><td>55.61</td><td>0.36</td><td>Peak</td><td>244</td><td>84</td></tr><tr><td>4 *</td><td>5710.00</td><td>102.09</td><td></td><td></td><td>101.48</td><td>0.61</td><td>Average</td><td>244</td><td>84</td></tr><tr><td>5 *</td><td>5710.00</td><td>114.86</td><td></td><td></td><td>114.25</td><td>0.61</td><td>Peak</td><td>244</td><td>84</td></tr><tr><td>6</td><td>5850.00</td><td>57.17</td><td>68.20</td><td>-11.03</td><td>56.09</td><td>1.08</td><td>Peak</td><td>244</td><td>84</td></tr><tr><td>7</td><td>11420.00</td><td>42.72</td><td>54.00</td><td>-11.28</td><td>34.34</td><td>8.38</td><td>Average</td><td>100</td><td>43</td></tr><tr><td>8</td><td>11420.00</td><td>55.29</td><td>74.00</td><td>-18.71</td><td>46.91</td><td>8.38</td><td>Peak</td><td>100</td><td>43</td></tr><tr><td>9</td><td>17130.00</td><td>59.26</td><td>68.20</td><td>-8.94</td><td>51.47</td><td>7.79</td><td>Peak</td><td>100</td><td>85</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.23	54.00	-10.77	42.91	0.32	Average	244	84	2	5460.00	55.31	74.00	-18.69	54.99	0.32	Peak	244	84	3	5470.00	55.97	68.20	-12.23	55.61	0.36	Peak	244	84	4 *	5710.00	102.09			101.48	0.61	Average	244	84	5 *	5710.00	114.86			114.25	0.61	Peak	244	84	6	5850.00	57.17	68.20	-11.03	56.09	1.08	Peak	244	84	7	11420.00	42.72	54.00	-11.28	34.34	8.38	Average	100	43	8	11420.00	55.29	74.00	-18.71	46.91	8.38	Peak	100	43	9	17130.00	59.26	68.20	-8.94	51.47	7.79	Peak	100	85
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	43.23	54.00	-10.77	42.91	0.32	Average	244	84																																																																																														
2	5460.00	55.31	74.00	-18.69	54.99	0.32	Peak	244	84																																																																																														
3	5470.00	55.97	68.20	-12.23	55.61	0.36	Peak	244	84																																																																																														
4 *	5710.00	102.09			101.48	0.61	Average	244	84																																																																																														
5 *	5710.00	114.86			114.25	0.61	Peak	244	84																																																																																														
6	5850.00	57.17	68.20	-11.03	56.09	1.08	Peak	244	84																																																																																														
7	11420.00	42.72	54.00	-11.28	34.34	8.38	Average	100	43																																																																																														
8	11420.00	55.29	74.00	-18.71	46.91	8.38	Peak	100	43																																																																																														
9	17130.00	59.26	68.20	-8.94	51.47	7.79	Peak	100	85																																																																																														




Modulation	be EHT40	Test Freq. (MHz)	5755																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) UNII 3-PK UNII 3-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>62.38</td><td>68.20</td><td>-5.82</td><td>62.02</td><td>0.36</td><td>Peak</td><td>266</td><td>275</td></tr><tr><td>2</td><td>5700.00</td><td>74.45</td><td>105.20</td><td>-30.75</td><td>73.85</td><td>0.60</td><td>Peak</td><td>266</td><td>275</td></tr><tr><td>3</td><td>5720.00</td><td>79.18</td><td>110.80</td><td>-31.62</td><td>78.54</td><td>0.64</td><td>Peak</td><td>266</td><td>275</td></tr><tr><td>4</td><td>5725.00</td><td>80.26</td><td>122.20</td><td>-41.94</td><td>79.61</td><td>0.65</td><td>Peak</td><td>266</td><td>275</td></tr><tr><td>5 *</td><td>5755.00</td><td>100.24</td><td></td><td></td><td>99.50</td><td>0.74</td><td>Average</td><td>266</td><td>275</td></tr><tr><td>6 *</td><td>5755.00</td><td>113.49</td><td></td><td></td><td>112.75</td><td>0.74</td><td>Peak</td><td>266</td><td>275</td></tr><tr><td>7</td><td>5925.00</td><td>57.67</td><td>68.20</td><td>-10.53</td><td>56.28</td><td>1.39</td><td>Peak</td><td>266</td><td>275</td></tr><tr><td>8</td><td>11510.00</td><td>42.21</td><td>54.00</td><td>-11.79</td><td>33.78</td><td>8.43</td><td>Average</td><td>100</td><td>130</td></tr><tr><td>9</td><td>11510.00</td><td>55.76</td><td>74.00</td><td>-18.24</td><td>47.33</td><td>8.43</td><td>Peak</td><td>100</td><td>130</td></tr><tr><td>10</td><td>17265.00</td><td>60.05</td><td>68.20</td><td>-8.15</td><td>52.22</td><td>7.83</td><td>Peak</td><td>100</td><td>179</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	62.38	68.20	-5.82	62.02	0.36	Peak	266	275	2	5700.00	74.45	105.20	-30.75	73.85	0.60	Peak	266	275	3	5720.00	79.18	110.80	-31.62	78.54	0.64	Peak	266	275	4	5725.00	80.26	122.20	-41.94	79.61	0.65	Peak	266	275	5 *	5755.00	100.24			99.50	0.74	Average	266	275	6 *	5755.00	113.49			112.75	0.74	Peak	266	275	7	5925.00	57.67	68.20	-10.53	56.28	1.39	Peak	266	275	8	11510.00	42.21	54.00	-11.79	33.78	8.43	Average	100	130	9	11510.00	55.76	74.00	-18.24	47.33	8.43	Peak	100	130	10	17265.00	60.05	68.20	-8.15	52.22	7.83	Peak	100	179
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	62.38	68.20	-5.82	62.02	0.36	Peak	266	275																																																																																																								
2	5700.00	74.45	105.20	-30.75	73.85	0.60	Peak	266	275																																																																																																								
3	5720.00	79.18	110.80	-31.62	78.54	0.64	Peak	266	275																																																																																																								
4	5725.00	80.26	122.20	-41.94	79.61	0.65	Peak	266	275																																																																																																								
5 *	5755.00	100.24			99.50	0.74	Average	266	275																																																																																																								
6 *	5755.00	113.49			112.75	0.74	Peak	266	275																																																																																																								
7	5925.00	57.67	68.20	-10.53	56.28	1.39	Peak	266	275																																																																																																								
8	11510.00	42.21	54.00	-11.79	33.78	8.43	Average	100	130																																																																																																								
9	11510.00	55.76	74.00	-18.24	47.33	8.43	Peak	100	130																																																																																																								
10	17265.00	60.05	68.20	-8.15	52.22	7.83	Peak	100	179																																																																																																								

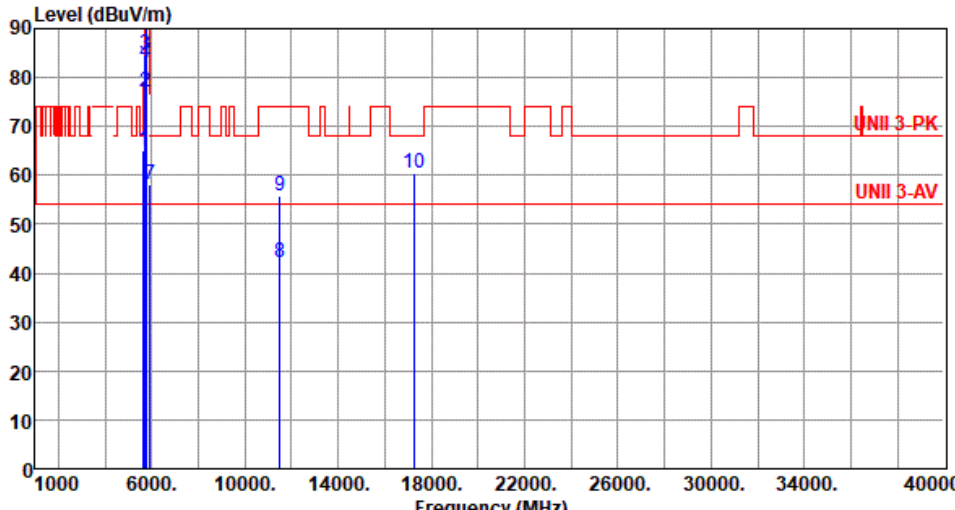

Modulation	be EHT40	Test Freq. (MHz)	5755																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>65.20</td><td>68.20</td><td>-3.00</td><td>64.84</td><td>0.36</td><td>Peak</td><td>243</td><td>87</td></tr><tr><td>2</td><td>5700.00</td><td>77.17</td><td>105.20</td><td>-28.03</td><td>76.57</td><td>0.60</td><td>Peak</td><td>243</td><td>87</td></tr><tr><td>3</td><td>5720.00</td><td>84.81</td><td>110.80</td><td>-25.99</td><td>84.17</td><td>0.64</td><td>Peak</td><td>243</td><td>87</td></tr><tr><td>4</td><td>5725.00</td><td>83.08</td><td>122.20</td><td>-39.12</td><td>82.43</td><td>0.65</td><td>Peak</td><td>243</td><td>87</td></tr><tr><td>5 *</td><td>5755.00</td><td>105.35</td><td></td><td></td><td>104.61</td><td>0.74</td><td>Average</td><td>243</td><td>87</td></tr><tr><td>6 *</td><td>5755.00</td><td>119.28</td><td></td><td></td><td>118.54</td><td>0.74</td><td>Peak</td><td>243</td><td>87</td></tr><tr><td>7</td><td>5925.00</td><td>57.96</td><td>68.20</td><td>-10.24</td><td>56.57</td><td>1.39</td><td>Peak</td><td>243</td><td>87</td></tr><tr><td>8</td><td>11510.00</td><td>42.33</td><td>54.00</td><td>-11.67</td><td>33.90</td><td>8.43</td><td>Average</td><td>100</td><td>141</td></tr><tr><td>9</td><td>11510.00</td><td>55.70</td><td>74.00</td><td>-18.30</td><td>47.27</td><td>8.43</td><td>Peak</td><td>100</td><td>141</td></tr><tr><td>10</td><td>17265.00</td><td>60.28</td><td>68.20</td><td>-7.92</td><td>52.45</td><td>7.83</td><td>Peak</td><td>100</td><td>107</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	65.20	68.20	-3.00	64.84	0.36	Peak	243	87	2	5700.00	77.17	105.20	-28.03	76.57	0.60	Peak	243	87	3	5720.00	84.81	110.80	-25.99	84.17	0.64	Peak	243	87	4	5725.00	83.08	122.20	-39.12	82.43	0.65	Peak	243	87	5 *	5755.00	105.35			104.61	0.74	Average	243	87	6 *	5755.00	119.28			118.54	0.74	Peak	243	87	7	5925.00	57.96	68.20	-10.24	56.57	1.39	Peak	243	87	8	11510.00	42.33	54.00	-11.67	33.90	8.43	Average	100	141	9	11510.00	55.70	74.00	-18.30	47.27	8.43	Peak	100	141	10	17265.00	60.28	68.20	-7.92	52.45	7.83	Peak	100	107
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	65.20	68.20	-3.00	64.84	0.36	Peak	243	87																																																																																																								
2	5700.00	77.17	105.20	-28.03	76.57	0.60	Peak	243	87																																																																																																								
3	5720.00	84.81	110.80	-25.99	84.17	0.64	Peak	243	87																																																																																																								
4	5725.00	83.08	122.20	-39.12	82.43	0.65	Peak	243	87																																																																																																								
5 *	5755.00	105.35			104.61	0.74	Average	243	87																																																																																																								
6 *	5755.00	119.28			118.54	0.74	Peak	243	87																																																																																																								
7	5925.00	57.96	68.20	-10.24	56.57	1.39	Peak	243	87																																																																																																								
8	11510.00	42.33	54.00	-11.67	33.90	8.43	Average	100	141																																																																																																								
9	11510.00	55.70	74.00	-18.30	47.27	8.43	Peak	100	141																																																																																																								
10	17265.00	60.28	68.20	-7.92	52.45	7.83	Peak	100	107																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																																	

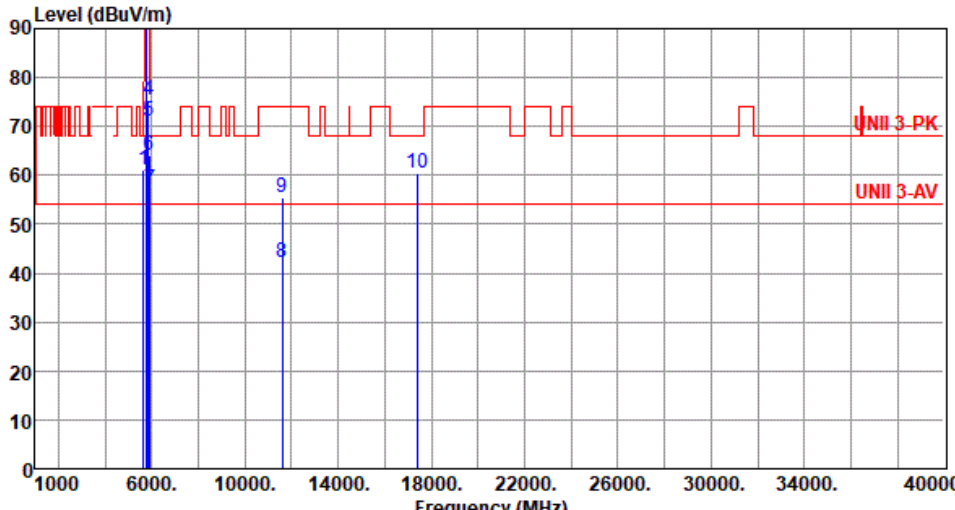

Modulation	be EHT40	Test Freq. (MHz)	5795						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):25 Humidity(%):65									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	61.09	68.20	-7.11	60.73	0.36	Peak	267	273
2 *	5795.00	99.88			98.96	0.92	Average	267	273
3 *	5795.00	112.48			111.56	0.92	Peak	267	273
4	5850.00	75.26	122.20	-46.94	74.18	1.08	Peak	267	273
5	5855.00	71.08	110.80	-39.72	69.97	1.11	Peak	267	273
6	5875.00	64.15	105.20	-41.05	62.95	1.20	Peak	267	273
7	5925.00	56.98	68.20	-11.22	55.59	1.39	Peak	267	273
8	11590.00	42.28	54.00	-11.72	34.06	8.22	Average	100	78
9	11590.00	55.31	74.00	-18.69	47.09	8.22	Peak	100	78
10	17385.00	60.33	68.20	-7.87	52.02	8.31	Peak	100	119

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency.



Modulation	be EHT40	Test Freq. (MHz)	5795																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																																	
Level (dBuV/m) UNII 3-PK UNII 3-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>61.92</td><td>68.20</td><td>-6.28</td><td>61.56</td><td>0.36</td><td>Peak</td><td>244</td><td>79</td></tr><tr><td>2 *</td><td>5795.00</td><td>105.11</td><td></td><td></td><td>104.19</td><td>0.92</td><td>Average</td><td>244</td><td>79</td></tr><tr><td>3 *</td><td>5795.00</td><td>118.26</td><td></td><td></td><td>117.34</td><td>0.92</td><td>Peak</td><td>244</td><td>79</td></tr><tr><td>4</td><td>5850.00</td><td>80.43</td><td>122.20</td><td>-41.77</td><td>79.35</td><td>1.08</td><td>Peak</td><td>244</td><td>79</td></tr><tr><td>5</td><td>5855.00</td><td>77.26</td><td>110.80</td><td>-33.54</td><td>76.15</td><td>1.11</td><td>Peak</td><td>244</td><td>79</td></tr><tr><td>6</td><td>5875.00</td><td>70.16</td><td>105.20</td><td>-35.04</td><td>68.96</td><td>1.20</td><td>Peak</td><td>244</td><td>79</td></tr><tr><td>7</td><td>5925.00</td><td>56.49</td><td>68.20</td><td>-11.71</td><td>55.10</td><td>1.39</td><td>Peak</td><td>244</td><td>79</td></tr><tr><td>8</td><td>11590.00</td><td>42.20</td><td>54.00</td><td>-11.80</td><td>33.98</td><td>8.22</td><td>Average</td><td>100</td><td>92</td></tr><tr><td>9</td><td>11590.00</td><td>55.13</td><td>74.00</td><td>-18.87</td><td>46.91</td><td>8.22</td><td>Peak</td><td>100</td><td>92</td></tr><tr><td>10</td><td>17385.00</td><td>60.50</td><td>68.20</td><td>-7.70</td><td>52.19</td><td>8.31</td><td>Peak</td><td>100</td><td>152</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	61.92	68.20	-6.28	61.56	0.36	Peak	244	79	2 *	5795.00	105.11			104.19	0.92	Average	244	79	3 *	5795.00	118.26			117.34	0.92	Peak	244	79	4	5850.00	80.43	122.20	-41.77	79.35	1.08	Peak	244	79	5	5855.00	77.26	110.80	-33.54	76.15	1.11	Peak	244	79	6	5875.00	70.16	105.20	-35.04	68.96	1.20	Peak	244	79	7	5925.00	56.49	68.20	-11.71	55.10	1.39	Peak	244	79	8	11590.00	42.20	54.00	-11.80	33.98	8.22	Average	100	92	9	11590.00	55.13	74.00	-18.87	46.91	8.22	Peak	100	92	10	17385.00	60.50	68.20	-7.70	52.19	8.31	Peak	100	152
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	61.92	68.20	-6.28	61.56	0.36	Peak	244	79																																																																																																								
2 *	5795.00	105.11			104.19	0.92	Average	244	79																																																																																																								
3 *	5795.00	118.26			117.34	0.92	Peak	244	79																																																																																																								
4	5850.00	80.43	122.20	-41.77	79.35	1.08	Peak	244	79																																																																																																								
5	5855.00	77.26	110.80	-33.54	76.15	1.11	Peak	244	79																																																																																																								
6	5875.00	70.16	105.20	-35.04	68.96	1.20	Peak	244	79																																																																																																								
7	5925.00	56.49	68.20	-11.71	55.10	1.39	Peak	244	79																																																																																																								
8	11590.00	42.20	54.00	-11.80	33.98	8.22	Average	100	92																																																																																																								
9	11590.00	55.13	74.00	-18.87	46.91	8.22	Peak	100	92																																																																																																								
10	17385.00	60.50	68.20	-7.70	52.19	8.31	Peak	100	152																																																																																																								

Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5210						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):25 Humidity(%):65									
Level (dBUV/m) Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg
1	5150.00	47.52	54.00	-6.48	46.97	0.55	Average	266	151
2	5150.00	60.18	74.00	-13.82	59.63	0.55	Peak	266	151
3 *	5210.00	92.43			92.25	0.18	Average	266	151
4 *	5210.00	105.09			104.91	0.18	Peak	266	151
5	5350.00	43.38	54.00	-10.62	43.44	-0.06	Average	266	151
6	5350.00	55.97	74.00	-18.03	56.03	-0.06	Peak	266	151
7	10420.00	55.08	68.20	-13.12	46.72	8.36	Peak	100	58
8	15630.00	42.31	54.00	-11.69	37.39	4.92	Average	100	127
9	15630.00	55.17	74.00	-18.83	50.25	4.92	Peak	100	127


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3:"*" is Peak / Average value of fundamental frequency.

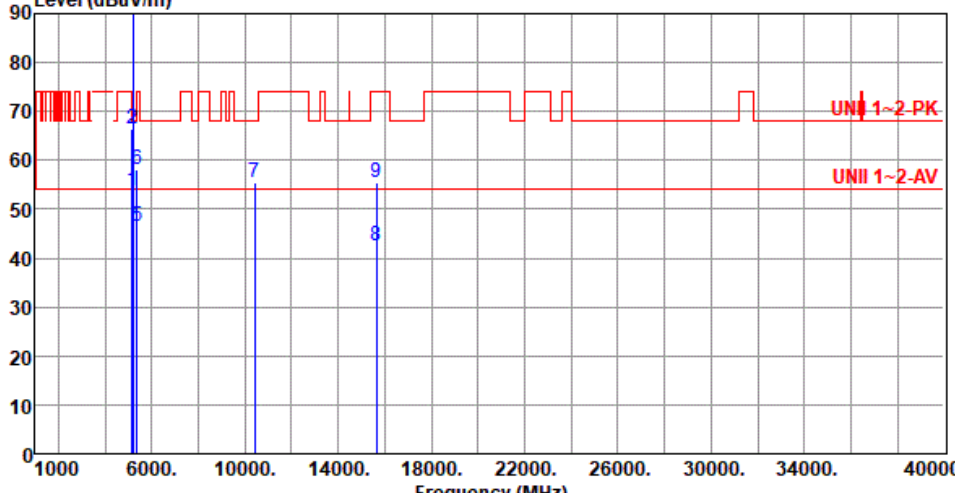


Modulation	be EHT80	Test Freq. (MHz)	5210																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																							
Level (dBuV/m)  Frequency (MHz)																																																																																																							
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>53.87</td><td>54.00</td><td>-0.13</td><td>53.32</td><td>0.55</td><td>Average</td><td>228</td><td>85</td></tr><tr><td>2</td><td>5150.00</td><td>66.51</td><td>74.00</td><td>-7.49</td><td>65.96</td><td>0.55</td><td>Peak</td><td>228</td><td>85</td></tr><tr><td>3 *</td><td>5210.00</td><td>98.65</td><td></td><td></td><td>98.47</td><td>0.18</td><td>Average</td><td>228</td><td>85</td></tr><tr><td>4 *</td><td>5210.00</td><td>111.38</td><td></td><td></td><td>111.20</td><td>0.18</td><td>Peak</td><td>228</td><td>85</td></tr><tr><td>5</td><td>5350.00</td><td>46.45</td><td>54.00</td><td>-7.55</td><td>46.51</td><td>-0.06</td><td>Average</td><td>228</td><td>85</td></tr><tr><td>6</td><td>5350.00</td><td>58.09</td><td>74.00</td><td>-15.91</td><td>58.15</td><td>-0.06</td><td>Peak</td><td>228</td><td>85</td></tr><tr><td>7</td><td>10420.00</td><td>55.39</td><td>68.20</td><td>-12.81</td><td>47.03</td><td>8.36</td><td>Peak</td><td>100</td><td>48</td></tr><tr><td>8</td><td>15630.00</td><td>42.42</td><td>54.00</td><td>-11.58</td><td>37.50</td><td>4.92</td><td>Average</td><td>100</td><td>96</td></tr><tr><td>9</td><td>15630.00</td><td>55.60</td><td>74.00</td><td>-18.40</td><td>50.68</td><td>4.92</td><td>Peak</td><td>100</td><td>96</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	53.87	54.00	-0.13	53.32	0.55	Average	228	85	2	5150.00	66.51	74.00	-7.49	65.96	0.55	Peak	228	85	3 *	5210.00	98.65			98.47	0.18	Average	228	85	4 *	5210.00	111.38			111.20	0.18	Peak	228	85	5	5350.00	46.45	54.00	-7.55	46.51	-0.06	Average	228	85	6	5350.00	58.09	74.00	-15.91	58.15	-0.06	Peak	228	85	7	10420.00	55.39	68.20	-12.81	47.03	8.36	Peak	100	48	8	15630.00	42.42	54.00	-11.58	37.50	4.92	Average	100	96	9	15630.00	55.60	74.00	-18.40	50.68	4.92	Peak	100	96
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	53.87	54.00	-0.13	53.32	0.55	Average	228	85																																																																																														
2	5150.00	66.51	74.00	-7.49	65.96	0.55	Peak	228	85																																																																																														
3 *	5210.00	98.65			98.47	0.18	Average	228	85																																																																																														
4 *	5210.00	111.38			111.20	0.18	Peak	228	85																																																																																														
5	5350.00	46.45	54.00	-7.55	46.51	-0.06	Average	228	85																																																																																														
6	5350.00	58.09	74.00	-15.91	58.15	-0.06	Peak	228	85																																																																																														
7	10420.00	55.39	68.20	-12.81	47.03	8.36	Peak	100	48																																																																																														
8	15630.00	42.42	54.00	-11.58	37.50	4.92	Average	100	96																																																																																														
9	15630.00	55.60	74.00	-18.40	50.68	4.92	Peak	100	96																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																							



Modulation	be EHT80	Test Freq. (MHz)	5290																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.15</td><td>54.00</td><td>-10.85</td><td>42.60</td><td>0.55</td><td>Average</td><td>112</td><td>283</td></tr><tr><td>2</td><td>5150.00</td><td>56.22</td><td>74.00</td><td>-17.78</td><td>55.67</td><td>0.55</td><td>Peak</td><td>112</td><td>283</td></tr><tr><td>3 *</td><td>5290.00</td><td>92.58</td><td></td><td></td><td>92.76</td><td>-0.18</td><td>Average</td><td>112</td><td>283</td></tr><tr><td>4 *</td><td>5290.00</td><td>105.94</td><td></td><td></td><td>106.12</td><td>-0.18</td><td>Peak</td><td>112</td><td>283</td></tr><tr><td>5</td><td>5350.00</td><td>46.08</td><td>54.00</td><td>-7.92</td><td>46.14</td><td>-0.06</td><td>Average</td><td>112</td><td>283</td></tr><tr><td>6</td><td>5350.00</td><td>59.45</td><td>74.00</td><td>-14.55</td><td>59.51</td><td>-0.06</td><td>Peak</td><td>112</td><td>283</td></tr><tr><td>7</td><td>10580.00</td><td>55.53</td><td>68.20</td><td>-12.67</td><td>47.04</td><td>8.49</td><td>Peak</td><td>100</td><td>56</td></tr><tr><td>8</td><td>15870.00</td><td>42.57</td><td>54.00</td><td>-11.43</td><td>37.33</td><td>5.24</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>9</td><td>15870.00</td><td>55.66</td><td>74.00</td><td>-18.34</td><td>50.42</td><td>5.24</td><td>Peak</td><td>100</td><td>34</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.15	54.00	-10.85	42.60	0.55	Average	112	283	2	5150.00	56.22	74.00	-17.78	55.67	0.55	Peak	112	283	3 *	5290.00	92.58			92.76	-0.18	Average	112	283	4 *	5290.00	105.94			106.12	-0.18	Peak	112	283	5	5350.00	46.08	54.00	-7.92	46.14	-0.06	Average	112	283	6	5350.00	59.45	74.00	-14.55	59.51	-0.06	Peak	112	283	7	10580.00	55.53	68.20	-12.67	47.04	8.49	Peak	100	56	8	15870.00	42.57	54.00	-11.43	37.33	5.24	Average	100	34	9	15870.00	55.66	74.00	-18.34	50.42	5.24	Peak	100	34
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	43.15	54.00	-10.85	42.60	0.55	Average	112	283																																																																																														
2	5150.00	56.22	74.00	-17.78	55.67	0.55	Peak	112	283																																																																																														
3 *	5290.00	92.58			92.76	-0.18	Average	112	283																																																																																														
4 *	5290.00	105.94			106.12	-0.18	Peak	112	283																																																																																														
5	5350.00	46.08	54.00	-7.92	46.14	-0.06	Average	112	283																																																																																														
6	5350.00	59.45	74.00	-14.55	59.51	-0.06	Peak	112	283																																																																																														
7	10580.00	55.53	68.20	-12.67	47.04	8.49	Peak	100	56																																																																																														
8	15870.00	42.57	54.00	-11.43	37.33	5.24	Average	100	34																																																																																														
9	15870.00	55.66	74.00	-18.34	50.42	5.24	Peak	100	34																																																																																														

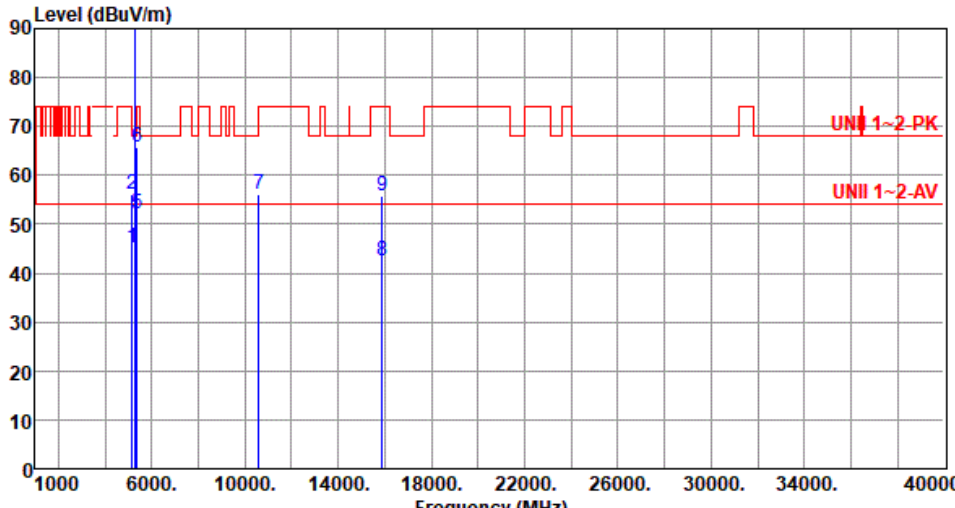

Modulation	be EHT80	Test Freq. (MHz)	5290																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>45.07</td><td>54.00</td><td>-8.93</td><td>44.52</td><td>0.55</td><td>Average</td><td>247</td><td>84</td></tr><tr><td>2</td><td>5150.00</td><td>56.14</td><td>74.00</td><td>-17.86</td><td>55.59</td><td>0.55</td><td>Peak</td><td>247</td><td>84</td></tr><tr><td>3 *</td><td>5290.00</td><td>98.73</td><td></td><td></td><td>98.91</td><td>-0.18</td><td>Average</td><td>247</td><td>84</td></tr><tr><td>4 *</td><td>5290.00</td><td>112.10</td><td></td><td></td><td>112.28</td><td>-0.18</td><td>Peak</td><td>247</td><td>84</td></tr><tr><td>5</td><td>5350.00</td><td>52.21</td><td>54.00</td><td>-1.79</td><td>52.27</td><td>-0.06</td><td>Average</td><td>247</td><td>84</td></tr><tr><td>6</td><td>5350.00</td><td>65.62</td><td>74.00</td><td>-8.38</td><td>65.68</td><td>-0.06</td><td>Peak</td><td>247</td><td>84</td></tr><tr><td>7</td><td>10580.00</td><td>56.00</td><td>68.20</td><td>-12.20</td><td>47.51</td><td>8.49</td><td>Peak</td><td>100</td><td>133</td></tr><tr><td>8</td><td>15870.00</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>37.42</td><td>5.24</td><td>Average</td><td>100</td><td>97</td></tr><tr><td>9</td><td>15870.00</td><td>55.94</td><td>74.00</td><td>-18.06</td><td>50.70</td><td>5.24</td><td>Peak</td><td>100</td><td>97</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	45.07	54.00	-8.93	44.52	0.55	Average	247	84	2	5150.00	56.14	74.00	-17.86	55.59	0.55	Peak	247	84	3 *	5290.00	98.73			98.91	-0.18	Average	247	84	4 *	5290.00	112.10			112.28	-0.18	Peak	247	84	5	5350.00	52.21	54.00	-1.79	52.27	-0.06	Average	247	84	6	5350.00	65.62	74.00	-8.38	65.68	-0.06	Peak	247	84	7	10580.00	56.00	68.20	-12.20	47.51	8.49	Peak	100	133	8	15870.00	42.66	54.00	-11.34	37.42	5.24	Average	100	97	9	15870.00	55.94	74.00	-18.06	50.70	5.24	Peak	100	97
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	45.07	54.00	-8.93	44.52	0.55	Average	247	84																																																																																														
2	5150.00	56.14	74.00	-17.86	55.59	0.55	Peak	247	84																																																																																														
3 *	5290.00	98.73			98.91	-0.18	Average	247	84																																																																																														
4 *	5290.00	112.10			112.28	-0.18	Peak	247	84																																																																																														
5	5350.00	52.21	54.00	-1.79	52.27	-0.06	Average	247	84																																																																																														
6	5350.00	65.62	74.00	-8.38	65.68	-0.06	Peak	247	84																																																																																														
7	10580.00	56.00	68.20	-12.20	47.51	8.49	Peak	100	133																																																																																														
8	15870.00	42.66	54.00	-11.34	37.42	5.24	Average	100	97																																																																																														
9	15870.00	55.94	74.00	-18.06	50.70	5.24	Peak	100	97																																																																																														




Modulation	be EHT80	Test Freq. (MHz)	5530																																																																																										
Polarization	Horizontal																																																																																												
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>49.41</td><td>54.00</td><td>-4.59</td><td>49.09</td><td>0.32</td><td>Average</td><td>102</td><td>315</td></tr><tr><td>2</td><td>5460.00</td><td>62.49</td><td>74.00</td><td>-11.51</td><td>62.17</td><td>0.32</td><td>Peak</td><td>102</td><td>315</td></tr><tr><td>3</td><td>5470.00</td><td>62.98</td><td>68.20</td><td>-5.22</td><td>62.62</td><td>0.36</td><td>Peak</td><td>102</td><td>315</td></tr><tr><td>4 *</td><td>5530.00</td><td>92.74</td><td></td><td></td><td>92.24</td><td>0.50</td><td>Average</td><td>102</td><td>315</td></tr><tr><td>5 *</td><td>5530.00</td><td>105.37</td><td></td><td></td><td>104.87</td><td>0.50</td><td>Peak</td><td>102</td><td>315</td></tr><tr><td>6</td><td>11060.00</td><td>42.48</td><td>54.00</td><td>-11.52</td><td>33.87</td><td>8.61</td><td>Average</td><td>100</td><td>105</td></tr><tr><td>7</td><td>11060.00</td><td>55.94</td><td>74.00</td><td>-18.06</td><td>47.33</td><td>8.61</td><td>Peak</td><td>100</td><td>105</td></tr><tr><td>8</td><td>16590.00</td><td>58.34</td><td>68.20</td><td>-9.86</td><td>50.99</td><td>7.35</td><td>Peak</td><td>100</td><td>129</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	49.41	54.00	-4.59	49.09	0.32	Average	102	315	2	5460.00	62.49	74.00	-11.51	62.17	0.32	Peak	102	315	3	5470.00	62.98	68.20	-5.22	62.62	0.36	Peak	102	315	4 *	5530.00	92.74			92.24	0.50	Average	102	315	5 *	5530.00	105.37			104.87	0.50	Peak	102	315	6	11060.00	42.48	54.00	-11.52	33.87	8.61	Average	100	105	7	11060.00	55.94	74.00	-18.06	47.33	8.61	Peak	100	105	8	16590.00	58.34	68.20	-9.86	50.99	7.35	Peak	100	129
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	49.41	54.00	-4.59	49.09	0.32	Average	102	315																																																																																				
2	5460.00	62.49	74.00	-11.51	62.17	0.32	Peak	102	315																																																																																				
3	5470.00	62.98	68.20	-5.22	62.62	0.36	Peak	102	315																																																																																				
4 *	5530.00	92.74			92.24	0.50	Average	102	315																																																																																				
5 *	5530.00	105.37			104.87	0.50	Peak	102	315																																																																																				
6	11060.00	42.48	54.00	-11.52	33.87	8.61	Average	100	105																																																																																				
7	11060.00	55.94	74.00	-18.06	47.33	8.61	Peak	100	105																																																																																				
8	16590.00	58.34	68.20	-9.86	50.99	7.35	Peak	100	129																																																																																				



Modulation	be EHT80	Test Freq. (MHz)	5530						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):25 Humidity(%):65									
Level (dBuV/m) Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5460.00	53.66	54.00	-0.34	53.34	0.32	Average	246	82
2	5460.00	65.12	74.00	-8.88	64.80	0.32	Peak	246	82
3	5470.00	67.26	68.20	-0.94	66.90	0.36	Peak	246	82
4 *	5530.00	99.41			98.91	0.50	Average	246	82
5 *	5530.00	112.32			111.82	0.50	Peak	246	82
6	11060.00	42.62	54.00	-11.38	34.01	8.61	Average	100	161
7	11060.00	55.74	74.00	-18.26	47.13	8.61	Peak	100	161
8	16590.00	59.03	68.20	-9.17	51.68	7.35	Peak	100	67

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency.

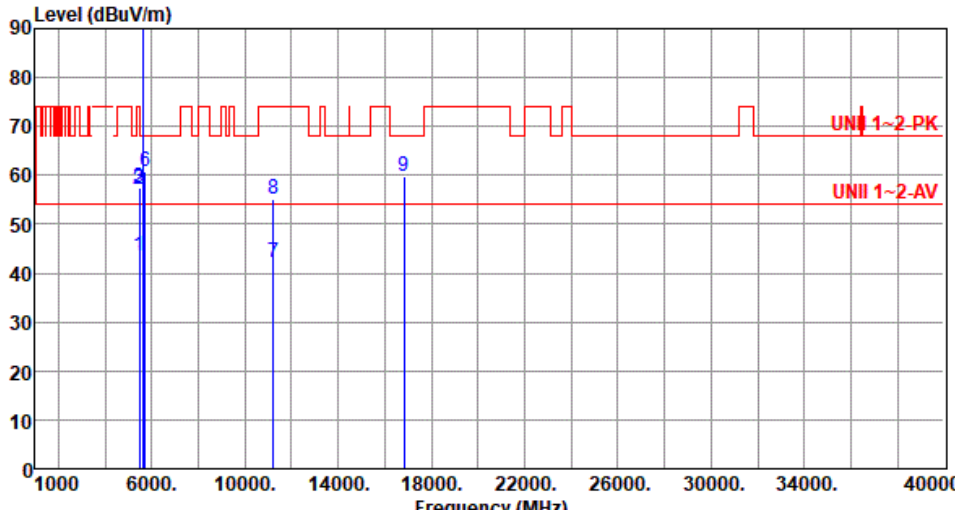

Modulation	be EHT80	Test Freq. (MHz)	5610																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.50</td><td>54.00</td><td>-10.50</td><td>43.18</td><td>0.32</td><td>Average</td><td>104</td><td>261</td></tr><tr><td>2</td><td>5460.00</td><td>57.18</td><td>74.00</td><td>-16.82</td><td>56.86</td><td>0.32</td><td>Peak</td><td>104</td><td>261</td></tr><tr><td>3</td><td>5470.00</td><td>57.56</td><td>68.20</td><td>-10.64</td><td>57.20</td><td>0.36</td><td>Peak</td><td>104</td><td>261</td></tr><tr><td>4 *</td><td>5610.00</td><td>93.41</td><td></td><td></td><td>92.90</td><td>0.51</td><td>Average</td><td>104</td><td>261</td></tr><tr><td>5 *</td><td>5610.00</td><td>106.52</td><td></td><td></td><td>106.01</td><td>0.51</td><td>Peak</td><td>104</td><td>261</td></tr><tr><td>6</td><td>5725.00</td><td>60.76</td><td>68.20</td><td>-7.44</td><td>60.11</td><td>0.65</td><td>Peak</td><td>104</td><td>261</td></tr><tr><td>7</td><td>11220.00</td><td>42.07</td><td>54.00</td><td>-11.93</td><td>33.89</td><td>8.18</td><td>Average</td><td>100</td><td>144</td></tr><tr><td>8</td><td>11220.00</td><td>55.13</td><td>74.00</td><td>-18.87</td><td>46.95</td><td>8.18</td><td>Peak</td><td>100</td><td>144</td></tr><tr><td>9</td><td>16830.00</td><td>59.63</td><td>68.20</td><td>-8.57</td><td>51.23</td><td>8.40</td><td>Peak</td><td>100</td><td>27</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.50	54.00	-10.50	43.18	0.32	Average	104	261	2	5460.00	57.18	74.00	-16.82	56.86	0.32	Peak	104	261	3	5470.00	57.56	68.20	-10.64	57.20	0.36	Peak	104	261	4 *	5610.00	93.41			92.90	0.51	Average	104	261	5 *	5610.00	106.52			106.01	0.51	Peak	104	261	6	5725.00	60.76	68.20	-7.44	60.11	0.65	Peak	104	261	7	11220.00	42.07	54.00	-11.93	33.89	8.18	Average	100	144	8	11220.00	55.13	74.00	-18.87	46.95	8.18	Peak	100	144	9	16830.00	59.63	68.20	-8.57	51.23	8.40	Peak	100	27
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	43.50	54.00	-10.50	43.18	0.32	Average	104	261																																																																																														
2	5460.00	57.18	74.00	-16.82	56.86	0.32	Peak	104	261																																																																																														
3	5470.00	57.56	68.20	-10.64	57.20	0.36	Peak	104	261																																																																																														
4 *	5610.00	93.41			92.90	0.51	Average	104	261																																																																																														
5 *	5610.00	106.52			106.01	0.51	Peak	104	261																																																																																														
6	5725.00	60.76	68.20	-7.44	60.11	0.65	Peak	104	261																																																																																														
7	11220.00	42.07	54.00	-11.93	33.89	8.18	Average	100	144																																																																																														
8	11220.00	55.13	74.00	-18.87	46.95	8.18	Peak	100	144																																																																																														
9	16830.00	59.63	68.20	-8.57	51.23	8.40	Peak	100	27																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency.																																																																																																							



Modulation	be EHT80	Test Freq. (MHz)	5610																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																							
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>43.51</td><td>54.00</td><td>-10.49</td><td>43.19</td><td>0.32</td><td>Average</td><td>249</td><td>85</td></tr><tr><td>2</td><td>5460.00</td><td>57.45</td><td>74.00</td><td>-16.55</td><td>57.13</td><td>0.32</td><td>Peak</td><td>249</td><td>85</td></tr><tr><td>3</td><td>5470.00</td><td>57.91</td><td>68.20</td><td>-10.29</td><td>57.55</td><td>0.36</td><td>Peak</td><td>249</td><td>85</td></tr><tr><td>4 *</td><td>5610.00</td><td>99.34</td><td></td><td></td><td>98.83</td><td>0.51</td><td>Average</td><td>249</td><td>85</td></tr><tr><td>5 *</td><td>5610.00</td><td>112.60</td><td></td><td></td><td>112.09</td><td>0.51</td><td>Peak</td><td>249</td><td>85</td></tr><tr><td>6</td><td>5725.00</td><td>61.11</td><td>68.20</td><td>-7.09</td><td>60.46</td><td>0.65</td><td>Peak</td><td>249</td><td>85</td></tr><tr><td>7</td><td>11220.00</td><td>42.10</td><td>54.00</td><td>-11.90</td><td>33.92</td><td>8.18</td><td>Average</td><td>100</td><td>64</td></tr><tr><td>8</td><td>11220.00</td><td>55.35</td><td>74.00</td><td>-18.65</td><td>47.17</td><td>8.18</td><td>Peak</td><td>100</td><td>64</td></tr><tr><td>9</td><td>16830.00</td><td>59.81</td><td>68.20</td><td>-8.39</td><td>51.41</td><td>8.40</td><td>Peak</td><td>100</td><td>112</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.51	54.00	-10.49	43.19	0.32	Average	249	85	2	5460.00	57.45	74.00	-16.55	57.13	0.32	Peak	249	85	3	5470.00	57.91	68.20	-10.29	57.55	0.36	Peak	249	85	4 *	5610.00	99.34			98.83	0.51	Average	249	85	5 *	5610.00	112.60			112.09	0.51	Peak	249	85	6	5725.00	61.11	68.20	-7.09	60.46	0.65	Peak	249	85	7	11220.00	42.10	54.00	-11.90	33.92	8.18	Average	100	64	8	11220.00	55.35	74.00	-18.65	47.17	8.18	Peak	100	64	9	16830.00	59.81	68.20	-8.39	51.41	8.40	Peak	100	112
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	43.51	54.00	-10.49	43.19	0.32	Average	249	85																																																																																														
2	5460.00	57.45	74.00	-16.55	57.13	0.32	Peak	249	85																																																																																														
3	5470.00	57.91	68.20	-10.29	57.55	0.36	Peak	249	85																																																																																														
4 *	5610.00	99.34			98.83	0.51	Average	249	85																																																																																														
5 *	5610.00	112.60			112.09	0.51	Peak	249	85																																																																																														
6	5725.00	61.11	68.20	-7.09	60.46	0.65	Peak	249	85																																																																																														
7	11220.00	42.10	54.00	-11.90	33.92	8.18	Average	100	64																																																																																														
8	11220.00	55.35	74.00	-18.65	47.17	8.18	Peak	100	64																																																																																														
9	16830.00	59.81	68.20	-8.39	51.41	8.40	Peak	100	112																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency.																																																																																																							




Modulation	be EHT80	Test Freq. (MHz)	5690
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) </			




Modulation	be EHT80	Test Freq. (MHz)	5690																																																																																										
Polarization	Vertical																																																																																												
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																													
Level (dBuV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn MHz level dBuV/m dBuV/m dB dB reading dBuV dB/m cm Table deg <table><tr><td>1</td><td>5460.00</td><td>43.27</td><td>54.00</td><td>-10.73</td><td>42.95</td><td>0.32</td><td>Average</td><td>249</td><td>85</td></tr><tr><td>2</td><td>5460.00</td><td>55.38</td><td>74.00</td><td>-18.62</td><td>55.06</td><td>0.32</td><td>Peak</td><td>249</td><td>85</td></tr><tr><td>3</td><td>5470.00</td><td>56.93</td><td>68.20</td><td>-11.27</td><td>56.57</td><td>0.36</td><td>Peak</td><td>249</td><td>85</td></tr><tr><td>4 *</td><td>5690.00</td><td>99.06</td><td></td><td></td><td>98.51</td><td>0.55</td><td>Average</td><td>249</td><td>85</td></tr><tr><td>5 *</td><td>5690.00</td><td>112.02</td><td></td><td></td><td>111.47</td><td>0.55</td><td>Peak</td><td>249</td><td>85</td></tr><tr><td>6</td><td>5850.00</td><td>57.44</td><td>68.20</td><td>-10.76</td><td>56.36</td><td>1.08</td><td>Peak</td><td>249</td><td>85</td></tr><tr><td>7</td><td>11380.00</td><td>42.64</td><td>54.00</td><td>-11.36</td><td>34.32</td><td>8.32</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>8</td><td>11380.00</td><td>55.41</td><td>74.00</td><td>-18.59</td><td>47.09</td><td>8.32</td><td>Peak</td><td>100</td><td>155</td></tr><tr><td>9</td><td>17070.00</td><td>59.31</td><td>68.20</td><td>-8.89</td><td>51.47</td><td>7.84</td><td>Peak</td><td>100</td><td>96</td></tr></table>				1	5460.00	43.27	54.00	-10.73	42.95	0.32	Average	249	85	2	5460.00	55.38	74.00	-18.62	55.06	0.32	Peak	249	85	3	5470.00	56.93	68.20	-11.27	56.57	0.36	Peak	249	85	4 *	5690.00	99.06			98.51	0.55	Average	249	85	5 *	5690.00	112.02			111.47	0.55	Peak	249	85	6	5850.00	57.44	68.20	-10.76	56.36	1.08	Peak	249	85	7	11380.00	42.64	54.00	-11.36	34.32	8.32	Average	100	155	8	11380.00	55.41	74.00	-18.59	47.09	8.32	Peak	100	155	9	17070.00	59.31	68.20	-8.89	51.47	7.84	Peak	100	96
1	5460.00	43.27	54.00	-10.73	42.95	0.32	Average	249	85																																																																																				
2	5460.00	55.38	74.00	-18.62	55.06	0.32	Peak	249	85																																																																																				
3	5470.00	56.93	68.20	-11.27	56.57	0.36	Peak	249	85																																																																																				
4 *	5690.00	99.06			98.51	0.55	Average	249	85																																																																																				
5 *	5690.00	112.02			111.47	0.55	Peak	249	85																																																																																				
6	5850.00	57.44	68.20	-10.76	56.36	1.08	Peak	249	85																																																																																				
7	11380.00	42.64	54.00	-11.36	34.32	8.32	Average	100	155																																																																																				
8	11380.00	55.41	74.00	-18.59	47.09	8.32	Peak	100	155																																																																																				
9	17070.00	59.31	68.20	-8.89	51.47	7.84	Peak	100	96																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency.																																																																																													

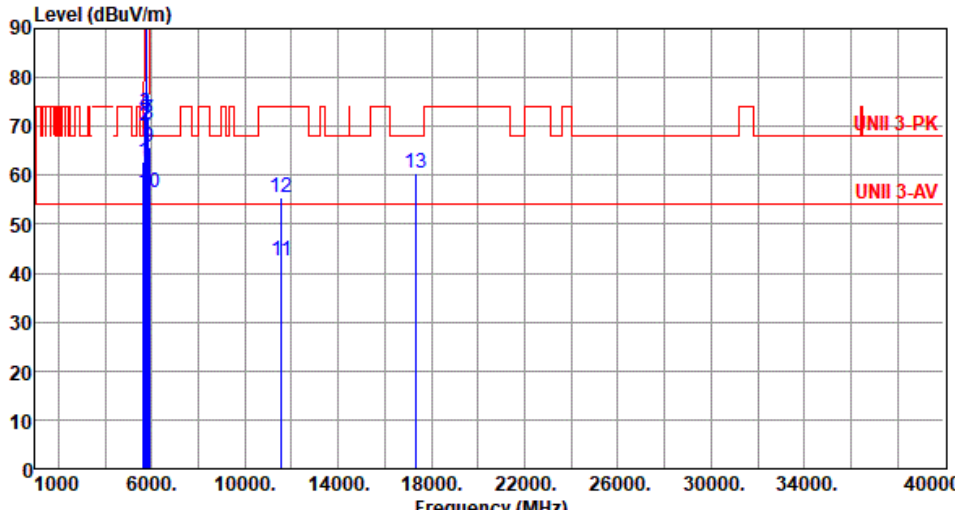

Modulation	be EHT80	Test Freq. (MHz)	5775						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):25 Humidity(%):65									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	62.91	68.20	-5.29	62.55	0.36	Peak	267	274
2	5700.00	70.01	105.20	-35.19	69.41	0.60	Peak	267	274
3	5720.00	72.75	110.80	-38.05	72.11	0.64	Peak	267	274
4	5725.00	72.88	122.20	-49.32	72.23	0.65	Peak	267	274
5 *	5775.00	95.21			94.38	0.83	Average	267	274
6 *	5775.00	108.43			107.60	0.83	Peak	267	274
7	5850.00	71.34	122.20	-50.86	70.26	1.08	Peak	267	274
8	5855.00	70.56	110.80	-40.24	69.45	1.11	Peak	267	274
9	5875.00	65.72	105.20	-39.48	64.52	1.20	Peak	267	274
10	5925.00	56.51	68.20	-11.69	55.12	1.39	Peak	267	274
11	11550.00	42.48	54.00	-11.52	34.15	8.33	Average	100	52
12	11550.00	55.60	74.00	-18.40	47.27	8.33	Peak	100	52
13	17325.00	60.52	68.20	-7.68	52.55	7.97	Peak	100	67


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency.

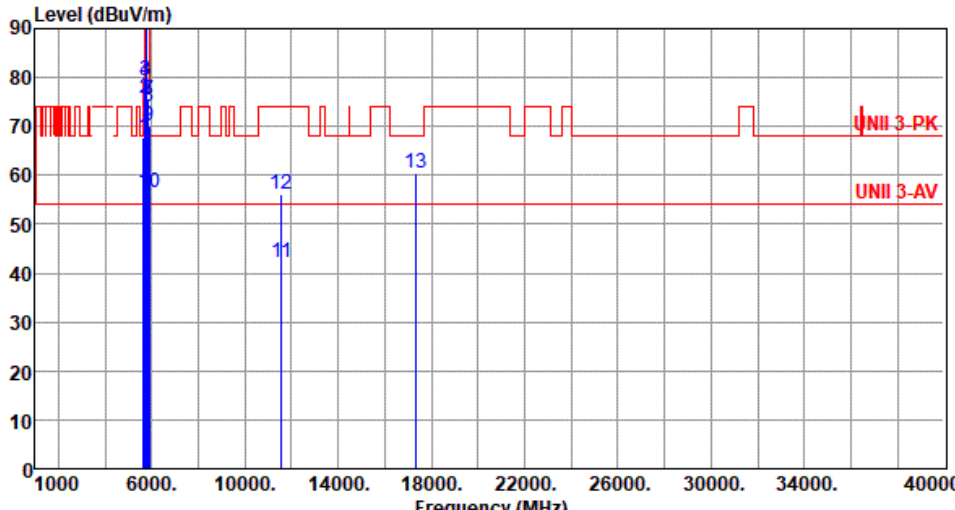

Modulation	be EHT80	Test Freq. (MHz)	5775						
Polarization	Vertical								
Test By :Paul Lin Temperature(°C):25 Humidity(%):65									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	67.80	68.20	-0.40	67.44	0.36	Peak	263	84
2	5700.00	75.80	105.20	-29.40	75.20	0.60	Peak	263	84
3	5720.00	79.47	110.80	-31.33	78.83	0.64	Peak	263	84
4	5725.00	79.43	122.20	-42.77	78.78	0.65	Peak	263	84
5 *	5775.00	101.11			100.28	0.83	Average	263	84
6 *	5775.00	114.82			113.99	0.83	Peak	263	84
7	5850.00	75.32	122.20	-46.88	74.24	1.08	Peak	263	84
8	5855.00	74.13	110.80	-36.67	73.02	1.11	Peak	263	84
9	5875.00	70.06	105.20	-35.14	68.86	1.20	Peak	263	84
10	5925.00	56.40	68.20	-11.80	55.01	1.39	Peak	263	84
11	11550.00	42.25	54.00	-11.75	33.92	8.33	Average	100	60
12	11550.00	56.13	74.00	-17.87	47.80	8.33	Peak	100	60
13	17325.00	60.31	68.20	-7.89	52.34	7.97	Peak	100	103


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency.

Unwanted Emissions (Above 1GHz) for be EHT160

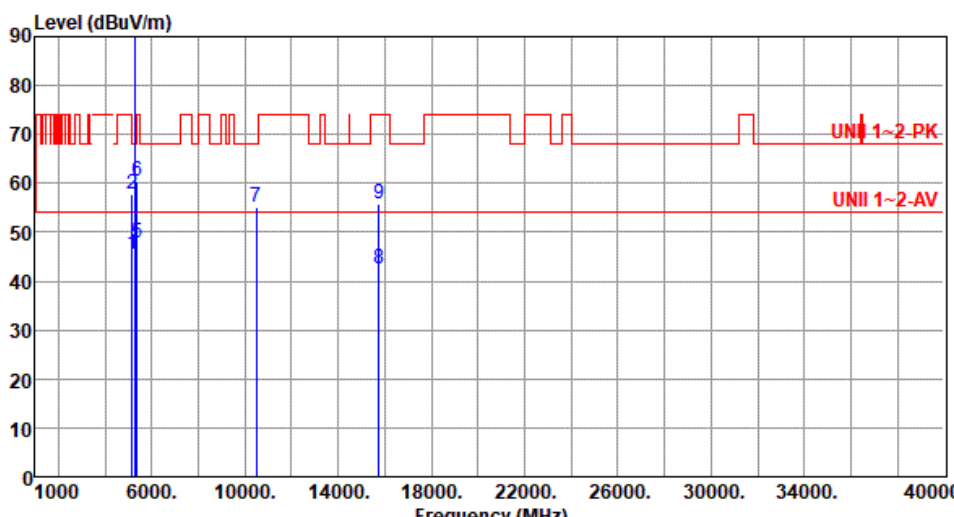Modulation	be EHT160	Test Freq. (MHz)	5250						
Polarization	Horizontal								
Test By :Paul Lin Temperature(°C):25 Humidity(%):65									
Level (dBUV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	45.57	54.00	-8.43	45.02	0.55	Average	254	295
2	5150.00	57.76	74.00	-16.24	57.21	0.55	Peak	254	295
3 *	5250.00	88.96			89.08	-0.12	Average	254	295
4 *	5250.00	102.03			102.15	-0.12	Peak	254	295
5	5350.00	47.79	54.00	-6.21	47.85	-0.06	Average	254	295
6	5350.00	60.45	74.00	-13.55	60.51	-0.06	Peak	254	295
7	10500.00	55.20	68.20	-13.00	46.84	8.36	Peak	100	94
8	15750.00	42.57	54.00	-11.43	37.52	5.05	Average	100	138
9	15750.00	55.87	74.00	-18.13	50.82	5.05	Peak	100	138

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency.

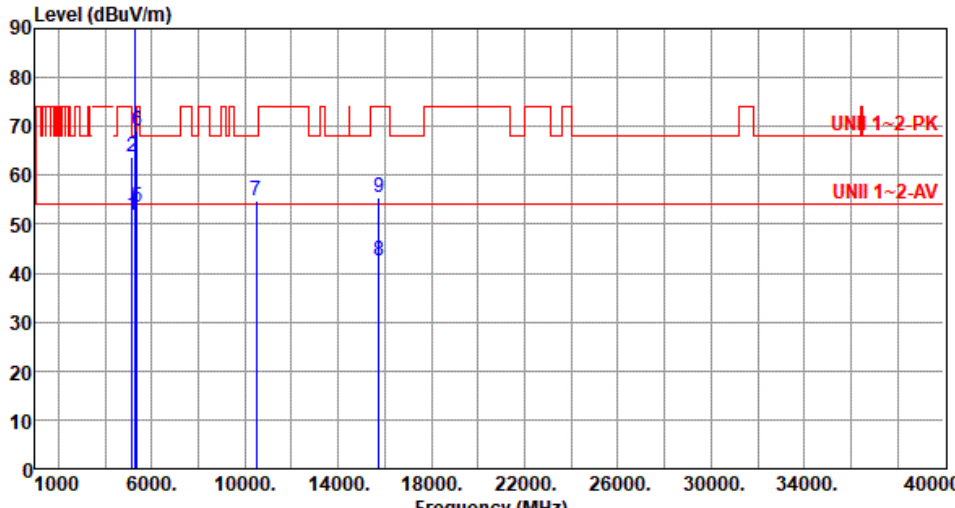

Modulation	be EHT160	Test Freq. (MHz)	5250																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Paul Lin Temperature(°C):25 Humidity(%):65																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>51.72</td><td>54.00</td><td>-2.28</td><td>51.17</td><td>0.55</td><td>Average</td><td>250</td><td>86</td></tr><tr><td>2</td><td>5150.00</td><td>63.81</td><td>74.00</td><td>-10.19</td><td>63.26</td><td>0.55</td><td>Peak</td><td>250</td><td>86</td></tr><tr><td>3 *</td><td>5250.00</td><td>95.94</td><td></td><td></td><td>96.06</td><td>-0.12</td><td>Average</td><td>250</td><td>86</td></tr><tr><td>4 *</td><td>5250.00</td><td>109.35</td><td></td><td></td><td>109.47</td><td>-0.12</td><td>Peak</td><td>250</td><td>86</td></tr><tr><td>5</td><td>5350.00</td><td>53.58</td><td>54.00</td><td>-0.42</td><td>53.64</td><td>-0.06</td><td>Average</td><td>250</td><td>86</td></tr><tr><td>6</td><td>5350.00</td><td>69.16</td><td>74.00</td><td>-4.84</td><td>69.22</td><td>-0.06</td><td>Peak</td><td>250</td><td>86</td></tr><tr><td>7</td><td>10500.00</td><td>54.95</td><td>68.20</td><td>-13.25</td><td>46.59</td><td>8.36</td><td>Peak</td><td>100</td><td>111</td></tr><tr><td>8</td><td>15750.00</td><td>42.60</td><td>54.00</td><td>-11.40</td><td>37.55</td><td>5.05</td><td>Average</td><td>100</td><td>71</td></tr><tr><td>9</td><td>15750.00</td><td>55.46</td><td>74.00</td><td>-18.54</td><td>50.41</td><td>5.05</td><td>Peak</td><td>100</td><td>71</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency.					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	51.72	54.00	-2.28	51.17	0.55	Average	250	86	2	5150.00	63.81	74.00	-10.19	63.26	0.55	Peak	250	86	3 *	5250.00	95.94			96.06	-0.12	Average	250	86	4 *	5250.00	109.35			109.47	-0.12	Peak	250	86	5	5350.00	53.58	54.00	-0.42	53.64	-0.06	Average	250	86	6	5350.00	69.16	74.00	-4.84	69.22	-0.06	Peak	250	86	7	10500.00	54.95	68.20	-13.25	46.59	8.36	Peak	100	111	8	15750.00	42.60	54.00	-11.40	37.55	5.05	Average	100	71	9	15750.00	55.46	74.00	-18.54	50.41	5.05	Peak	100	71
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	51.72	54.00	-2.28	51.17	0.55	Average	250	86																																																																																														
2	5150.00	63.81	74.00	-10.19	63.26	0.55	Peak	250	86																																																																																														
3 *	5250.00	95.94			96.06	-0.12	Average	250	86																																																																																														
4 *	5250.00	109.35			109.47	-0.12	Peak	250	86																																																																																														
5	5350.00	53.58	54.00	-0.42	53.64	-0.06	Average	250	86																																																																																														
6	5350.00	69.16	74.00	-4.84	69.22	-0.06	Peak	250	86																																																																																														
7	10500.00	54.95	68.20	-13.25	46.59	8.36	Peak	100	111																																																																																														
8	15750.00	42.60	54.00	-11.40	37.55	5.05	Average	100	71																																																																																														
9	15750.00	55.46	74.00	-18.54	50.41	5.05	Peak	100	71																																																																																														



Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):25 Humidity(%):65			
Level (dBuV/m)			



Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):25 Humidity(%):65			
Level (dBuV/m)			

Unwanted Emissions (Above 1GHz) for be EHT240

Modulation	be EHT240	Test Freq. (MHz)	5610
Polarization	Horizontal		
Test By :Paul Lin Temperature(°C):25 Humidity(%):65			
Level (dBuV/m) 90 80 70 60 50 40 30 20 10 0 6 5 4 3 2 1 0			



Modulation	be EHT240	Test Freq. (MHz)	5610
Polarization	Vertical		
Test By :Paul Lin Temperature(°C):25 Humidity(%):65			
Level (dBuV/m)			



Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	2.79	3.97	5.08	5.59
T20°C Vmin	2.69	3.84	5.03	5.43
T50°C Vnom	4.64	5.11	5.62	5.74
T40°C Vnom	4.13	4.78	5.45	5.67
T30°C Vnom	3.81	4.60	5.36	5.63
T20°C Vnom	2.75	4.07	4.99	5.49
T10°C Vnom	8.15	9.03	9.83	10.08
T0°C Vnom	13.73	14.50	15.10	15.38
T-10°C Vnom	14.70	15.48	16.25	16.64
T-20°C Vnom	15.30	15.90	16.62	16.77
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 50		Tmin [°C]: -20	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	2.58	3.67	4.52	4.94
T20°C Vmin	2.52	3.56	4.43	4.86
T50°C Vnom	3.77	4.87	5.87	6.27
T40°C Vnom	3.45	4.70	5.56	5.99
T30°C Vnom	3.21	4.23	5.17	5.60
T20°C Vnom	2.54	3.57	4.46	4.91
T10°C Vnom	7.45	8.46	9.32	9.64
T0°C Vnom	12.53	13.47	14.34	14.55
T-10°C Vnom	13.96	14.91	15.68	16.04
T-20°C Vnom	14.07	15.07	15.90	16.11
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 50		Tmin [°C]: -20	




Adapter mode

Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Line		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

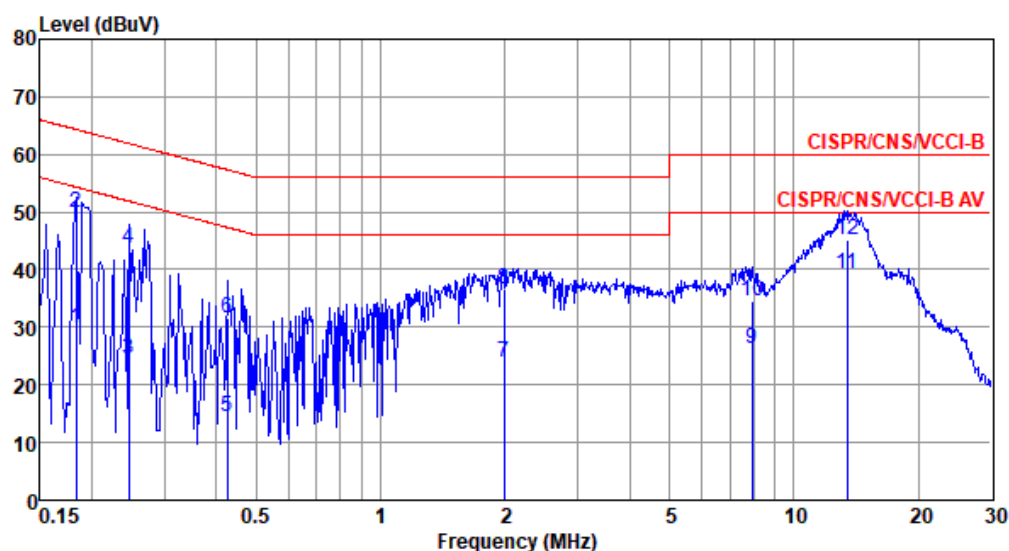

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	
	MHz	dBuV	Line	Limit	Level		loss		Remark
			dBuV	dB	dBuV	dB	dB	dB	
1	0.183	29.91	54.33	-24.42	19.98	9.62	0.07	0.24	Average
2	0.183	50.01	64.33	-14.32	40.08	9.62	0.07	0.24	QP
3	0.246	24.60	51.91	-27.31	14.64	9.62	0.07	0.27	Average
4	0.246	43.78	61.91	-18.13	33.82	9.62	0.07	0.27	QP
5	0.426	14.56	47.33	-32.77	4.53	9.62	0.08	0.33	Average
6	0.426	31.67	57.33	-25.66	21.64	9.62	0.08	0.33	QP
7	1.991	23.88	46.00	-22.12	13.76	9.63	0.11	0.38	Average
8	1.991	36.47	56.00	-19.53	26.35	9.63	0.11	0.38	QP
9	7.935	26.31	50.00	-23.69	15.88	9.68	0.31	0.44	Average
10	7.935	34.51	60.00	-25.49	24.08	9.68	0.31	0.44	QP
11*	13.479	39.35	50.00	-10.65	28.77	9.69	0.41	0.48	Average
12	13.479	45.27	60.00	-14.73	34.69	9.69	0.41	0.48	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

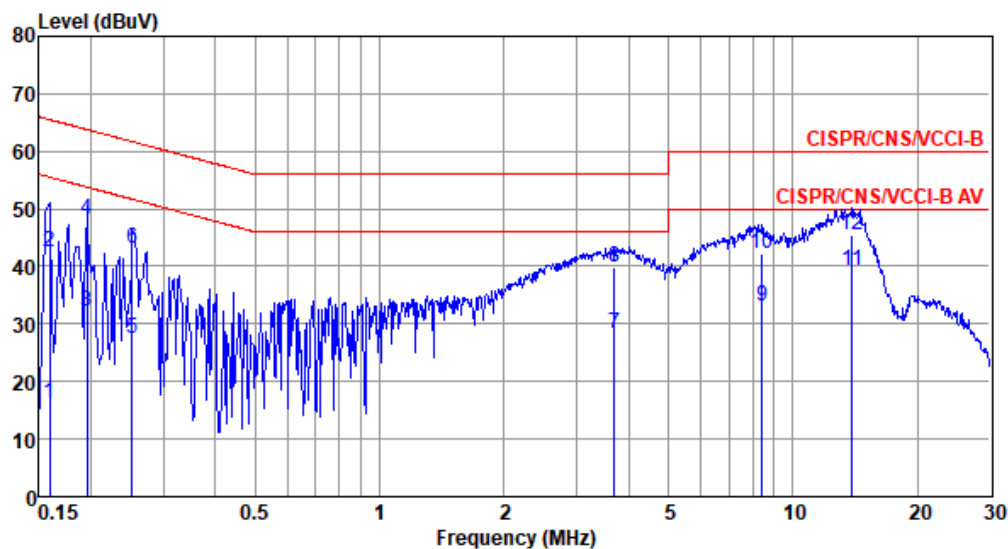

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.159	16.24	55.52	-39.28	6.40	9.63	0.08	0.13	Average
2	0.159	42.52	65.52	-23.00	32.68	9.63	0.08	0.13	QP
3	0.195	32.07	53.80	-21.73	22.21	9.63	0.06	0.17	Average
4	0.195	48.17	63.80	-15.63	38.31	9.63	0.06	0.17	QP
5	0.252	27.38	51.69	-24.31	17.48	9.63	0.07	0.20	Average
6	0.252	43.20	61.69	-18.49	33.30	9.63	0.07	0.20	QP
7	3.700	28.27	46.00	-17.73	18.06	9.65	0.17	0.39	Average
8	3.700	39.87	56.00	-16.13	29.66	9.65	0.17	0.39	QP
9	8.412	33.05	50.00	-16.95	22.61	9.70	0.32	0.42	Average
10	8.412	42.25	60.00	-17.75	31.81	9.70	0.32	0.42	QP
11*	13.915	39.22	50.00	-10.78	28.57	9.75	0.42	0.48	Average
12	13.915	45.42	60.00	-14.58	34.77	9.75	0.42	0.48	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mode	be EHT20	Test Freq. (MHz)	5745
Power Phase	Line		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

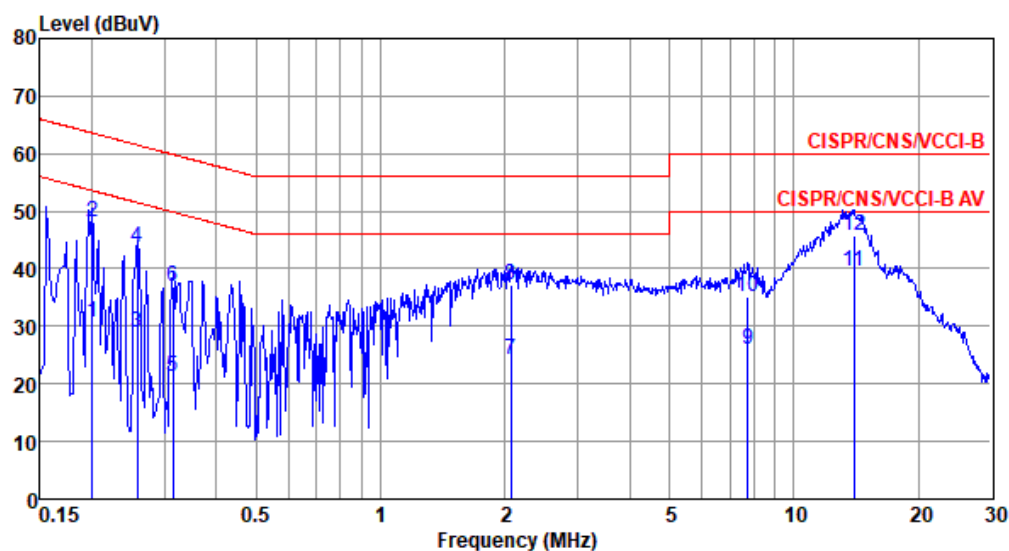

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	
			dBuV	dB	dBuV		dB		
1	0.201	30.61	53.58	-22.97	20.68	9.62	0.06	0.25	Average
2	0.201	48.21	63.58	-15.37	38.28	9.62	0.06	0.25	QP
3	0.258	29.00	51.51	-22.51	19.03	9.62	0.07	0.28	Average
4	0.258	43.57	61.51	-17.94	33.60	9.62	0.07	0.28	QP
5	0.315	21.32	49.84	-28.52	11.33	9.62	0.07	0.30	Average
6	0.315	36.96	59.84	-22.88	26.97	9.62	0.07	0.30	QP
7	2.066	24.26	46.00	-21.74	14.14	9.63	0.11	0.38	Average
8	2.066	37.26	56.00	-18.74	27.14	9.63	0.11	0.38	QP
9	7.728	26.02	50.00	-23.98	15.60	9.68	0.30	0.44	Average
10	7.728	35.03	60.00	-24.97	24.61	9.68	0.30	0.44	QP
11*	13.989	39.58	50.00	-10.42	28.99	9.69	0.42	0.48	Average
12	13.989	45.76	60.00	-14.24	35.17	9.69	0.42	0.48	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Modulation Mode	be EHT20	Test Freq. (MHz)	5745
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

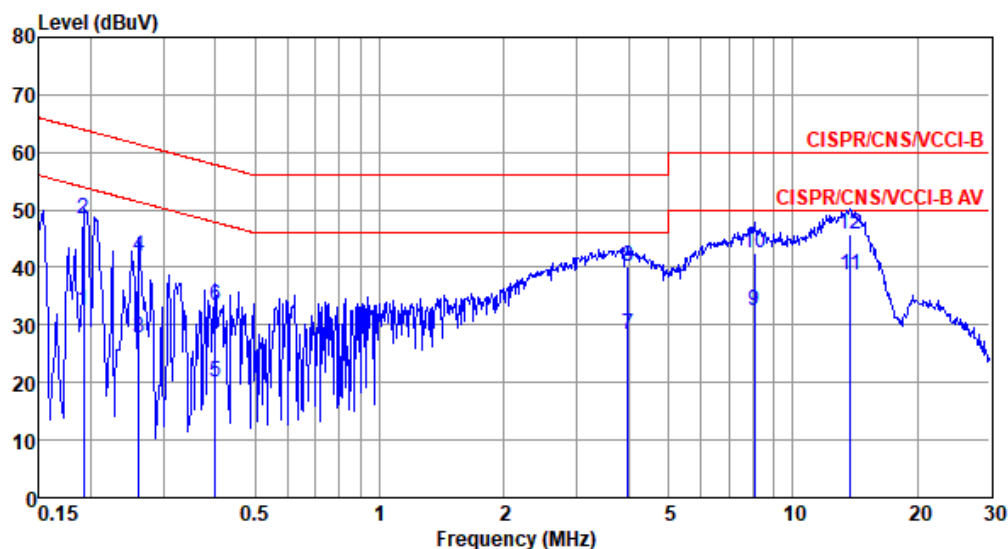

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark
			dBuV	dB	dBuV		dB		
1	0.192	32.54	53.93	-21.39	22.69	9.63	0.06	0.16	Average
2	0.192	48.42	63.93	-15.51	38.57	9.63	0.06	0.16	QP
3	0.262	27.76	51.38	-23.62	17.86	9.63	0.07	0.20	Average
4	0.262	41.99	61.38	-19.39	32.09	9.63	0.07	0.20	QP
5	0.400	19.95	47.86	-27.91	10.00	9.62	0.08	0.25	Average
6	0.400	33.22	57.86	-24.64	23.27	9.62	0.08	0.25	QP
7	3.985	28.46	46.00	-17.54	18.23	9.65	0.18	0.40	Average
8	3.985	40.04	56.00	-15.96	29.81	9.65	0.18	0.40	QP
9	8.062	32.55	50.00	-17.45	22.12	9.70	0.31	0.42	Average
10	8.062	42.43	60.00	-17.57	32.00	9.70	0.31	0.42	QP
11*	13.768	38.60	50.00	-11.40	27.96	9.75	0.42	0.47	Average
12	13.768	45.63	60.00	-14.37	34.99	9.75	0.42	0.47	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).




POE mode

Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Line		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

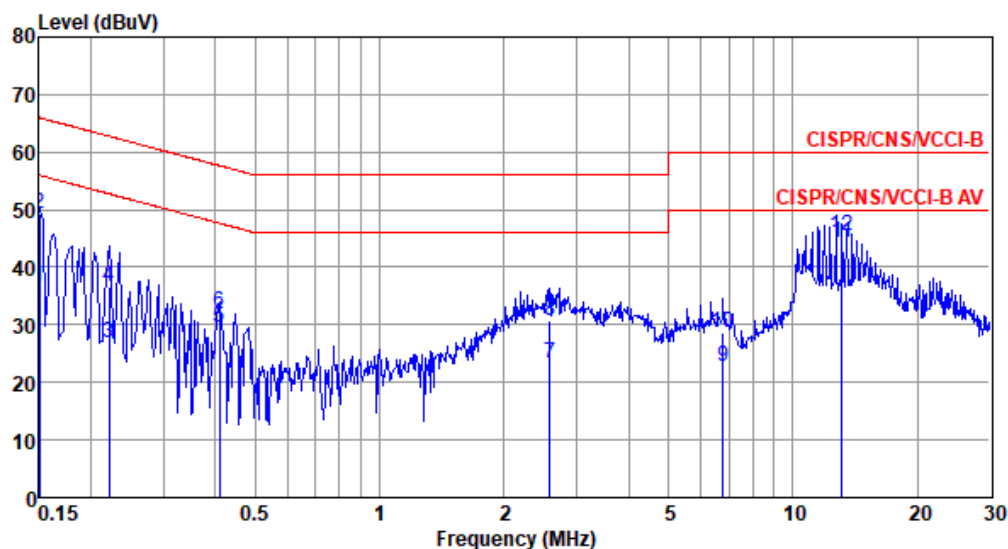

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	36.61	56.00	-19.39	26.70	9.63	0.08	0.20	Average
2	0.150	49.20	66.00	-16.80	39.29	9.63	0.08	0.20	QP
3	0.222	26.96	52.74	-25.78	17.02	9.62	0.06	0.26	Average
4	0.222	36.57	62.74	-26.17	26.63	9.62	0.06	0.26	QP
5	0.410	29.57	47.64	-18.07	19.54	9.62	0.08	0.33	Average
6	0.410	32.30	57.64	-25.34	22.27	9.62	0.08	0.33	QP
7	2.581	23.19	46.00	-22.81	13.02	9.64	0.14	0.39	Average
8	2.581	30.65	56.00	-25.35	20.48	9.64	0.14	0.39	QP
9	6.769	22.86	50.00	-27.14	12.48	9.67	0.28	0.43	Average
10	6.769	28.52	60.00	-31.48	18.14	9.67	0.28	0.43	QP
11*	13.117	44.21	50.00	-5.79	33.63	9.69	0.41	0.48	Average
12	13.117	45.32	60.00	-14.68	34.74	9.69	0.41	0.48	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).




Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

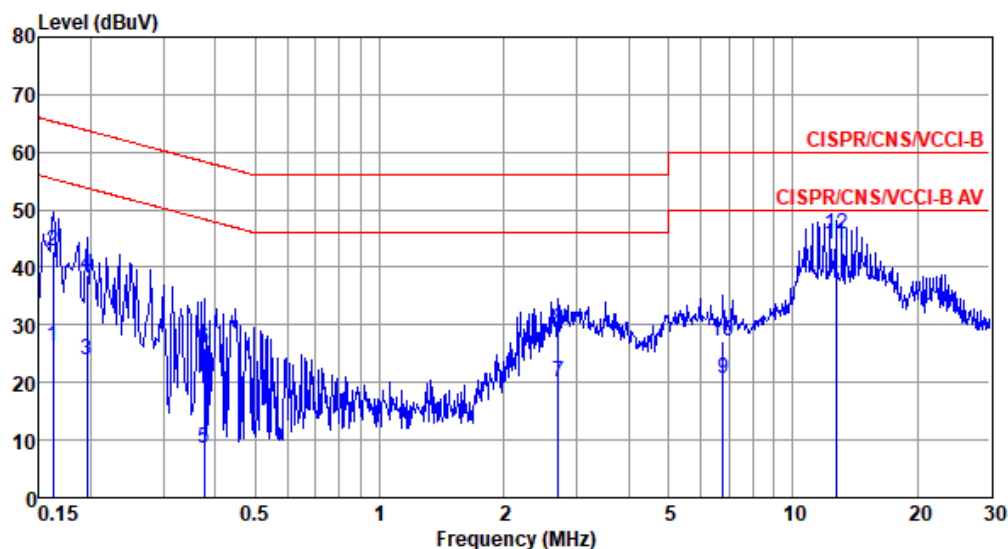

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.162	26.31	55.34	-29.03	16.48	9.63	0.07	0.13	Average
2	0.162	42.70	65.34	-22.64	32.87	9.63	0.07	0.13	QP
3	0.195	24.04	53.80	-29.76	14.18	9.63	0.06	0.17	Average
4	0.195	38.61	63.80	-25.19	28.75	9.63	0.06	0.17	QP
5	0.377	8.66	48.34	-39.68	-1.28	9.62	0.08	0.24	Average
6	0.377	25.91	58.34	-32.43	15.97	9.62	0.08	0.24	QP
7	2.707	20.17	46.00	-25.83	10.02	9.64	0.14	0.37	Average
8	2.707	29.36	56.00	-26.64	19.21	9.64	0.14	0.37	QP
9	6.769	20.54	50.00	-29.46	10.17	9.68	0.28	0.41	Average
10	6.769	27.06	60.00	-32.94	16.69	9.68	0.28	0.41	QP
11*	12.713	43.97	50.00	-6.03	33.37	9.74	0.40	0.46	Average
12	12.713	45.67	60.00	-14.33	35.07	9.74	0.40	0.46	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).




Modulation Mode	be EHT20	Test Freq. (MHz)	5745
Power Phase	Line		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

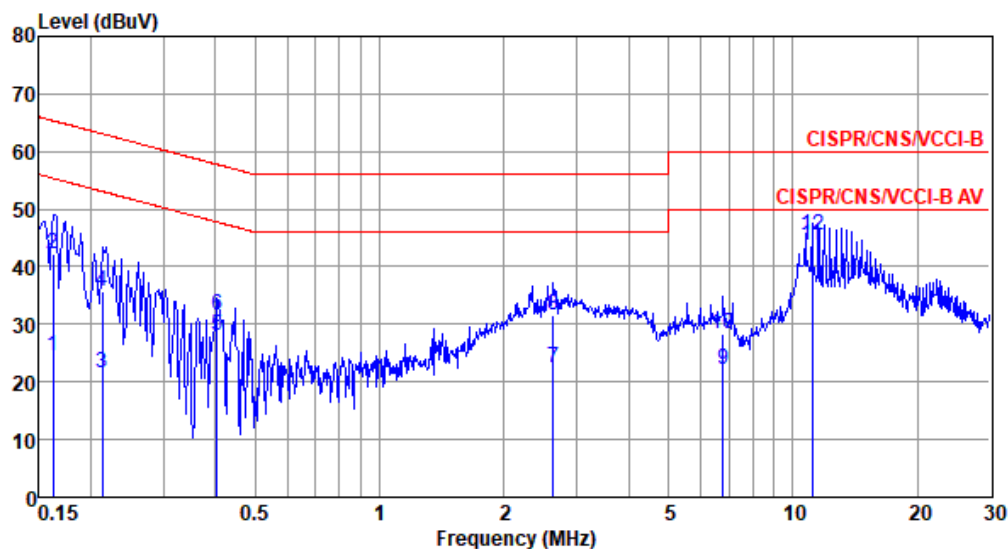

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark
	MHz	dBuV	Line	Limit	Level		loss		
			dBuV	dB	dBuV	dB	dB	dB	
1	0.162	24.65	55.34	-30.69	14.74	9.63	0.07	0.21	Average
2	0.162	42.20	65.34	-23.14	32.29	9.63	0.07	0.21	QP
3	0.213	21.52	53.10	-31.58	11.58	9.62	0.06	0.26	Average
4	0.213	35.81	63.10	-27.29	25.87	9.62	0.06	0.26	QP
5	0.404	28.10	47.77	-19.67	18.07	9.62	0.08	0.33	Average
6	0.404	31.63	57.77	-26.14	21.60	9.62	0.08	0.33	QP
7	2.636	22.38	46.00	-23.62	12.21	9.64	0.14	0.39	Average
8	2.636	31.51	56.00	-24.49	21.34	9.64	0.14	0.39	QP
9	6.769	22.13	50.00	-27.87	11.75	9.67	0.28	0.43	Average
10	6.769	28.27	60.00	-31.73	17.89	9.67	0.28	0.43	QP
11*	11.126	43.65	50.00	-6.35	33.13	9.69	0.37	0.46	Average
12	11.126	45.34	60.00	-14.66	34.82	9.69	0.37	0.46	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mode	be EHT20	Test Freq. (MHz)	5745
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 23°C

Humidity: 63%

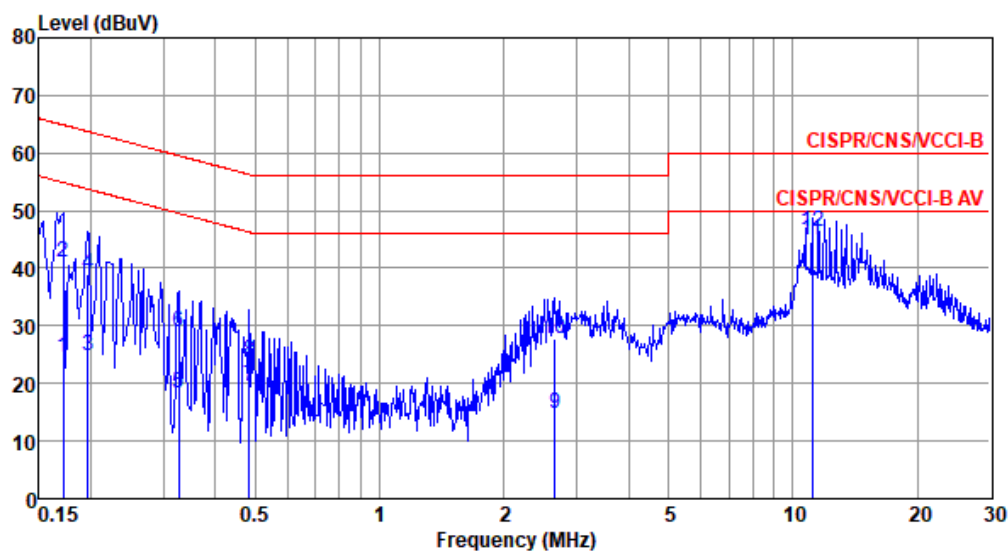

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.171	24.57	54.90	-30.33	14.73	9.63	0.07	0.14	Average
2	0.171	41.03	64.90	-23.87	31.19	9.63	0.07	0.14	QP
3	0.197	24.79	53.76	-28.97	14.93	9.63	0.06	0.17	Average
4	0.197	38.86	63.76	-24.90	29.00	9.63	0.06	0.17	QP
5	0.327	18.42	49.53	-31.11	8.50	9.62	0.07	0.23	Average
6	0.327	28.84	59.53	-30.69	18.92	9.62	0.07	0.23	QP
7	0.484	19.48	46.27	-26.79	9.52	9.62	0.08	0.26	Average
8	0.484	23.89	56.27	-32.38	13.93	9.62	0.08	0.26	QP
9	2.650	14.91	46.00	-31.09	4.77	9.64	0.14	0.36	Average
10	2.650	27.71	56.00	-28.29	17.57	9.64	0.14	0.36	QP
11*	11.125	44.84	50.00	-5.16	34.31	9.72	0.37	0.44	Average
12	11.125	46.20	60.00	-13.80	35.67	9.72	0.37	0.44	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).