
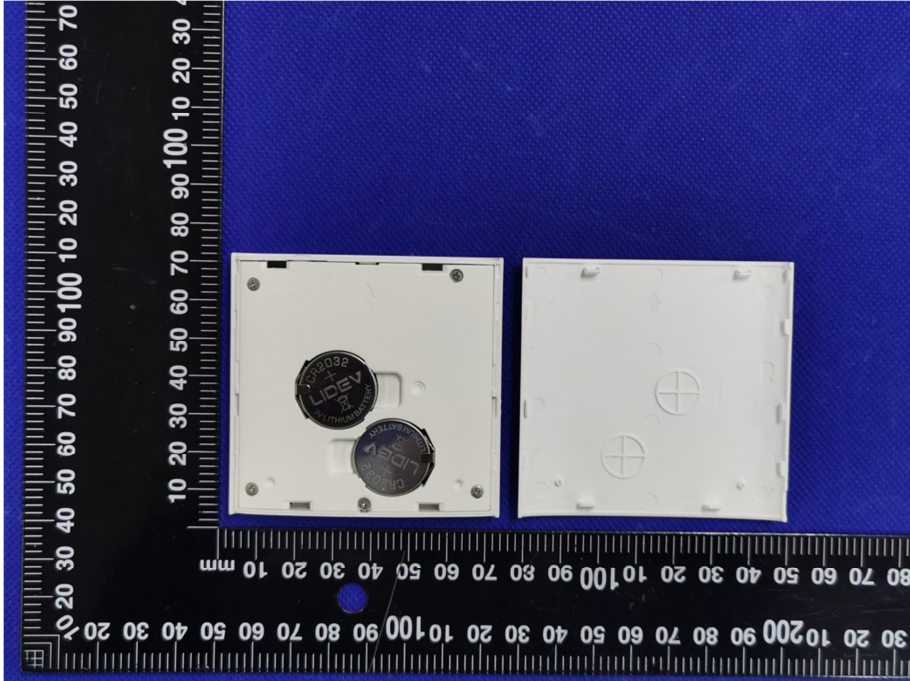
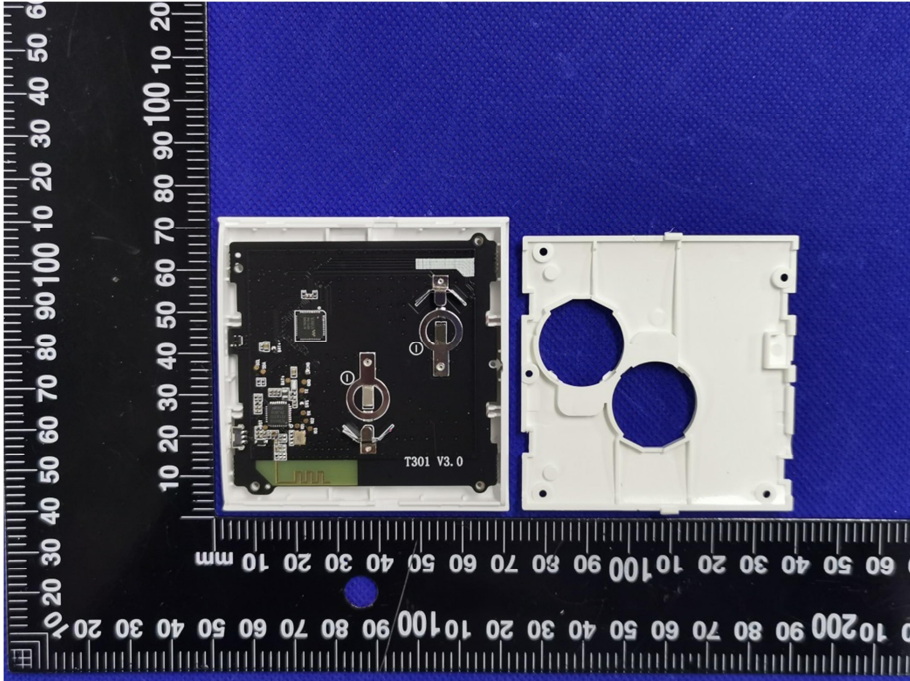
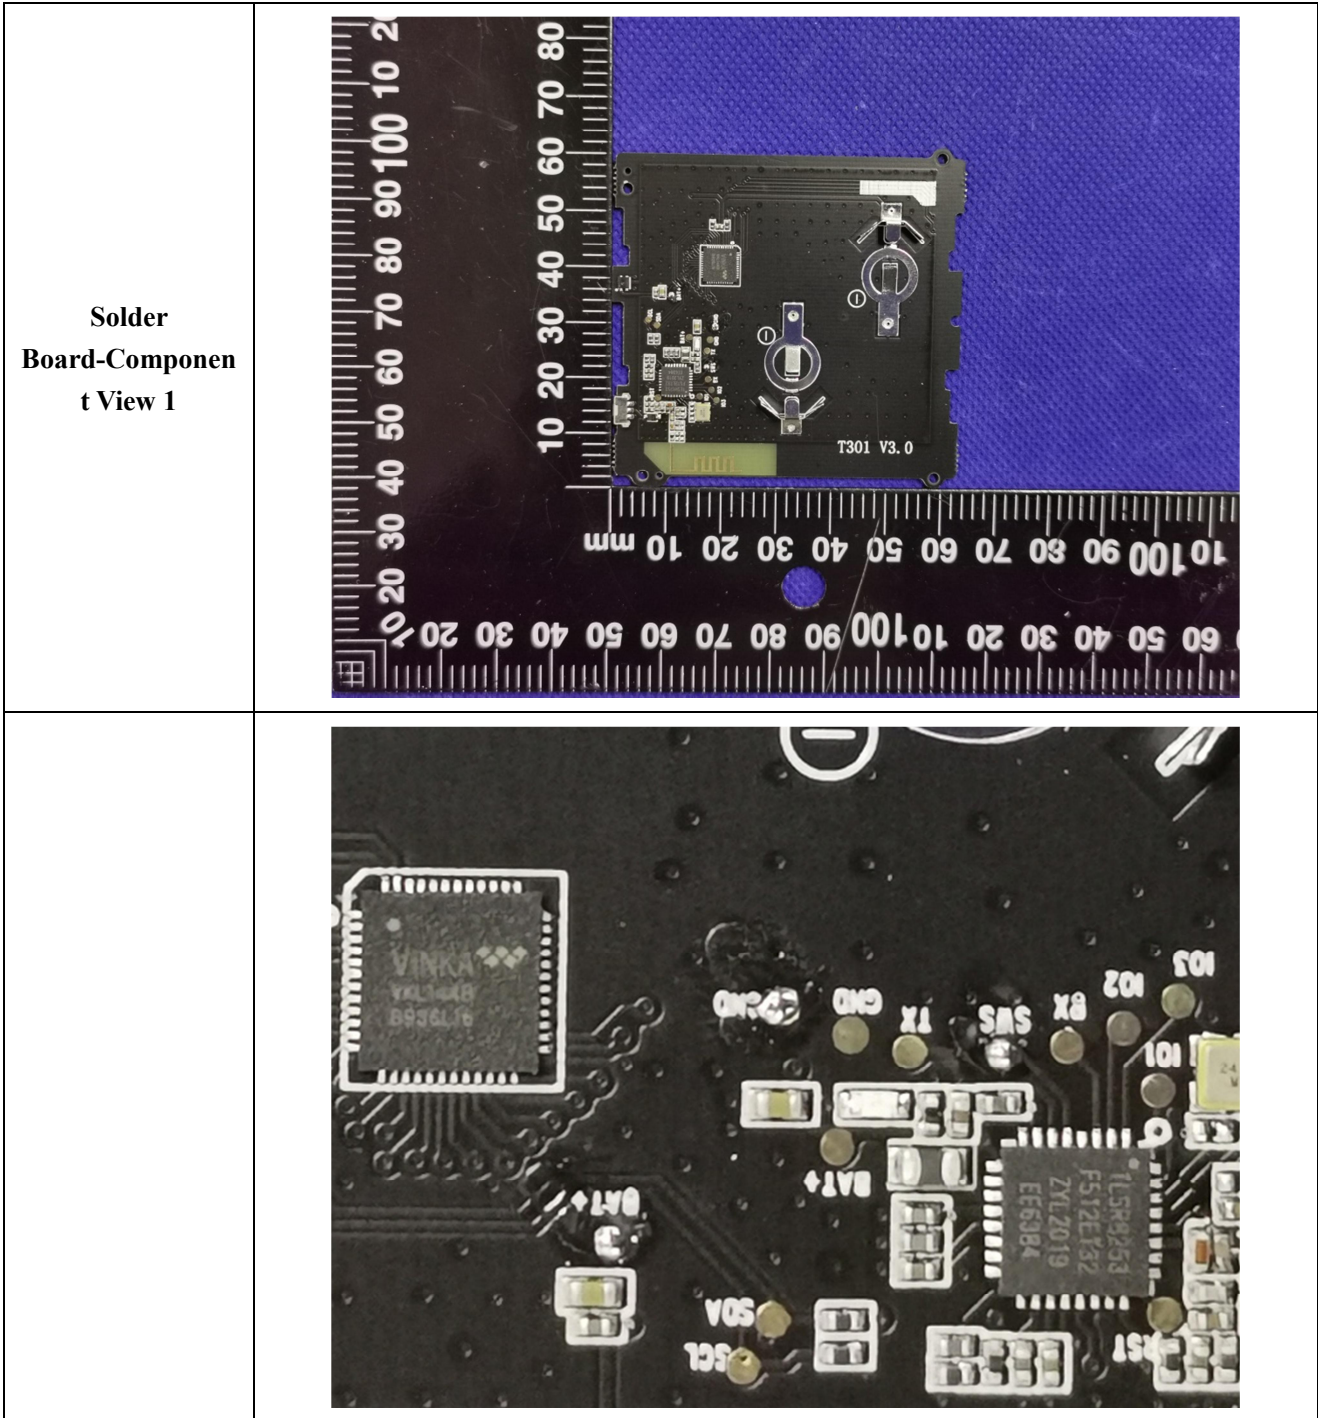
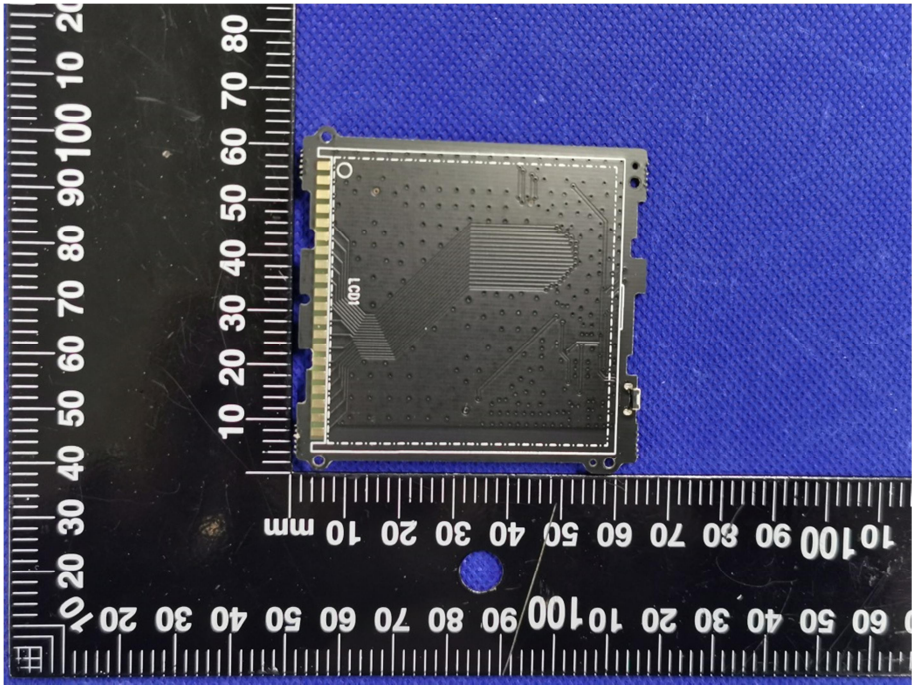


EXHIBIT 3 - EUT INTERNAL PHOTOGRAPHS

<p>EUT Housing and Board View 1</p>	 <p>A photograph showing the internal components of an EUT housing. On the left is the white plastic housing with two CR2032 3V lithium coin cells inserted. On the right is the white plastic board with two circular cutouts. A black ruler with white markings is placed below the components for scale, showing measurements in millimeters. The background is a blue textured surface.</p>
<p>EUT Housing and Board View 2</p>	 <p>A photograph showing the internal components of an EUT housing from a different perspective. On the left is the white plastic housing with a black PCB mounted inside. The PCB has various components and is labeled 'T301 V3.0'. On the right is the white plastic board with two circular cutouts. A black ruler with white markings is placed below the components for scale, showing measurements in millimeters. The background is a blue textured surface.</p>

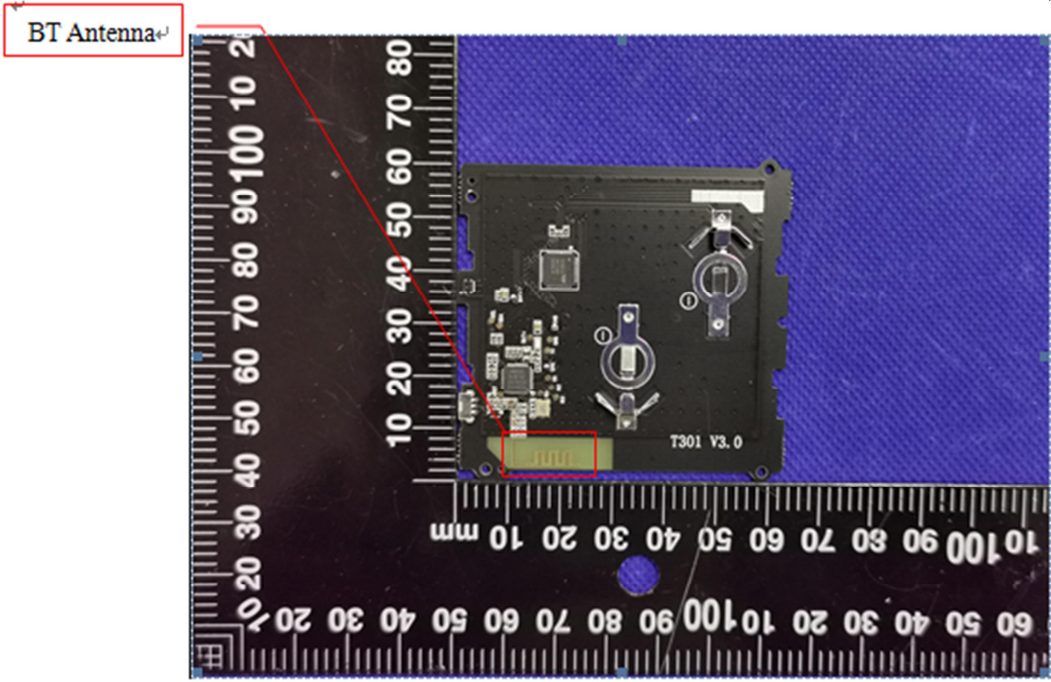

<p>Solder Board-Component View 2</p>	 <p>A photograph of a rectangular printed circuit board (PCB) component, likely a BT antenna, mounted on a blue textured surface. The component is dark grey with a complex pattern of fine lines and pads. A white dashed line outlines the perimeter of the component. A ruler is placed below the component for scale, showing measurements in millimeters. The ruler has markings every 10 mm, with sub-markings every 1 mm. The component is approximately 60 mm wide and 40 mm high. The number '1001' is visible on the component.</p>
<p>Antenna View</p>	 <p>A photograph of the same PCB component from a different perspective, showing the underside. The component is dark grey with various components and traces. A red box highlights a specific area on the left side of the component, labeled 'BT Antenna'. A red line points from this label to the highlighted area. The component is placed on a blue textured surface. A ruler is placed below the component for scale, showing measurements in millimeters. The ruler has markings every 10 mm, with sub-markings every 1 mm. The component is approximately 60 mm wide and 40 mm high. The text 'T301 V3.0' is visible on the component.</p>