



# FCC TEST REPORT

## FCC ID:2AU7O-LK-A62

Report Number..... : ZKT-2303101566E-1  
 Date of Test..... Mar.09, 2023 to Mar.23, 2023  
 Date of issue..... : Mar.23, 2023  
 Total number of pages..... 54  
 Test Result ..... : PASS

Testing Laboratory..... : **Shenzhen ZKT Technology Co., Ltd.**  
 Address ..... : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name ..... : **Shenzhen Phaten Technology Co.,Ltd.**  
 Address ..... : 602,Building 1,Edmonto Industrial Park, No.4 Industrial Zone,Shutianpu Community, Matian Street, Guangming District, Shenzhen China

Manufacturer's name ..... : **Shenzhen Phaten Technology Co.,Ltd.**  
 Address ..... : 602,Building 1,Edmonto Industrial Park, No.4 Industrial Zone,Shutianpu Community, Matian Street, Guangming District, Shenzhen China

Test specification:  
 Standard..... : FCC CFR Title 47 Part 15 Subpart C Section 15.407  
 ANSI C63.10:2013  
 KDB 789033 D02 v01r02  
 Test procedure..... : /  
 Non-standard test method ..... : N/A

**Test Report Form No**..... : TRF-EL-113\_V0  
**Test Report Form(s) Originator**..... : ZKT Testing  
**Master TRF** ..... : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.  
 This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : **Wifi wireless network card**  
 Trademark ..... : N/A  
 Model/Type reference..... : LK-A62  
 LK62-101、LK62-102、LK62-103  
 Ratings..... : Input: DC 5V



Testing procedure and testing location:

Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Tested by (name + signature).....: Tom Zou

*Tom Zou*

Reviewer (name + signature).....: Jackson Fang

*Jackson Fang*

Approved (name + signature).....: Lake Xie





Table of Contents	Page
<b>1. VERSION .....</b>	<b>6</b>
<b>2.SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
2.1 TEST FACILITY .....	7
2.2 MEASUREMENT UNCERTAINTY .....	8
<b>3. GENERAL INFORMATION .....</b>	<b>9</b>
3.1 GENERAL DESCRIPTION OF EUT .....	9
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED .....	12
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) .....	12
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS .....	12
<b>4.EMC EMISSION TEST .....</b>	<b>14</b>
4.1 CONDUCTED EMISSION MEASUREMENT .....	14
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS .....	14
4.1.2 TEST PROCEDURE .....	14
4.1.3 DEVIATION FROM TEST STANDARD .....	14
4.1.4 TEST SETUP .....	15
4.1.5 EUT OPERATING CONDITIONS .....	15
4.1.6 TEST RESULT .....	16
4.2 RADIATED EMISSION MEASUREMENT .....	17
4.2.1 APPLICABLE STANDARD .....	17
4.2.2 CONFORMANCE LIMIT .....	18
4.2.3 MEASURING INSTRUMENTS .....	18
4.2.4 TEST CONFIGURATION .....	19
4.2.5 TEST PROCEDURE .....	20
4.2.6 TEST RESULT .....	21
<b>5.POWER SPECTRAL DENSITY TEST .....</b>	<b>26</b>
5.1 APPLIED PROCEDURES / LIMIT .....	26
5.2 TEST PROCEDURE .....	27



Table of Contents	Page
<b>5.3 DEVIATION FROM STANDARD .....</b>	<b>27</b>
<b>5.4 TEST SETUP .....</b>	<b>27</b>
<b>5.5 EUT OPERATION CONDITIONS .....</b>	<b>27</b>
<b>5.6 TEST RESULTS .....</b>	<b>28</b>
<b>6. 26DB &amp; 6DB &amp; 99% EMISSION BANDWIDTH .....</b>	<b>32</b>
<b>6.1 APPLIED PROCEDURES / LIMIT .....</b>	<b>32</b>
<b>6.2 TEST PROCEDURE .....</b>	<b>32</b>
<b>6.3 EUT OPERATION CONDITIONS .....</b>	<b>32</b>
<b>6.4 TEST RESULTS .....</b>	<b>33</b>
<b>7. MAXIMUM CONDUCTED OUTPUT POWER .....</b>	<b>37</b>
7.1 PPLIED PROCEDURES / LIMIT .....	37
7.2 TEST PROCEDURE .....	37
7.3 DEVIATION FROM STANDARD .....	38
7.4 TEST SETUP .....	38
7.5 EUT OPERATION CONDITIONS .....	38
7.6 TEST RESULTS .....	39
<b>8. OUT OF BAND EMISSIONS .....</b>	<b>39</b>
8.1 APPLICABLE STANDARD .....	39
8.2 TEST PROCEDURE .....	40
8.3 DEVIATION FROM STANDARD .....	40
8.4 TEST SETUP .....	40
8.5 EUT OPERATION CONDITIONS .....	40
8.6 TEST RESULTS .....	40
9.1 CONFORMANCE LIMIT .....	43
9.2 MEASURING INSTRUMENTS .....	43
9.3 TEST SETUP .....	43
9.4 TEST PROCEDURE .....	43
9.5 TEST RESULTS .....	44
<b>10. FREQUENCY STABILITY MEASUREMENT .....</b>	<b>47</b>
10.1 LIMIT .....	47
10.2 TEST PROCEDURES .....	47
10.3 TEST SETUP LAYOUT .....	47
10.4 EUT OPERATION DURING TEST .....	47
10.5 TEST RESULTS .....	48
<b>11. ANTENNA REQUIREMENT .....</b>	<b>53</b>



Table of Contents	Page
12. TEST SETUP PHOTO .....	54
13. EUT CONSTRUCTIONAL DETAILS .....	54



**1. VERSION**

Report No.	Version	Description	Approved
ZKT-2303101566E-1	Rev.01	Initial issue of report	Mar.23, 2023



## 2.SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(8)	Spurious Radiated Emissions	PASS	
15.207	Conducted Emission	PASS	
15.407 (a)(12) 15.1049	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	6 dB bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
2.1051, 15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
2.1051, 15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	

**NOTE:**

(1)" N/A" denotes test is not applicable in this Test Report

### 2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.  
Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225  
Designation Number: CN1299  
IC Registered No.: 27033  
CAB identifier: CN0110



## 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$  · where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  · providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8dB
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59℃





### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Wifi wireless network card	
Model No.:	LK-A62 LK62-101、LK62-102、LK62-103	
Model Different.:	Only for different model name	
Sample ID	ZKT-2303101566E-1	
Sample(s) Status:	Engineer sample	
Product Description	IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a/ac/n (20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac/n (40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(80MHz channel bandwidth)
	Data Rate	802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps; 802.11n (HT20): MCS0~MCS7 6.5~72.2Mbps; 802.11n (HT40): MCS0~MCS7) 13.5~150Mbps; 802.11ac (VHT20): MCS0~MCS8 6.5~86.7Mbps; 802.11ac (VHT40): MCS0~MCS9 13.5~200Mbps; 802.11ac (VHT80): MCS0~MCS9 29.3~433.3Mbps;
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	<input checked="" type="checkbox"/> 5180-5240MHz for 802.11a/ac/n(HT20); 5190-5230MHz for 802.11ac/n(HT40); 5210MHz for 802.11 ac80; <input type="checkbox"/> 5745-5825 MHz for 802.11a/ac/n(HT20); 5755-5795 MHz for 802.11ac/n(HT40); 5775MHz for 802.11 ac80;
	Number of Channels	<input checked="" type="checkbox"/> 4 channels for 802.11a/ac/n20 in the 5180-5240MHz band ; 2 channels for 802.11 ac/n40 in the 5190-5230 MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; <input type="checkbox"/> 5 channels for 802.11a/ac/n20 in the 5745-5825MHz band ; 2 channels for 802.11 ac/n40 in the 5755-5795 MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ;
Channel List	Please refer to the Note 2.	
Antenna Type:	FPCB Antenna	
Antenna gain:	4.15dBi	
Power supply:	Input: DC 5V	
SWITCHING POWER ADAPTER:	N/A	

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



802.11a/ac/n( 20MHz) Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

802.11ac/n(40MHz) Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

802.11ac (80MHz) Frequency Channel	
Channel	Frequency (MHz)
42	5210



### 3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Pretest Mode	Description
Mode 1	802.11a/ac / n 20 CH36/ CH40/ CH 48 802.11a/ac /n 20 CH149/ CH157/ CH 165
Mode 2	802.11ac / n 40 CH38/ CH 46 802.11ac / n 40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 42/CH 155
Mode 4	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a/ac / n 20 CH36/ CH40/ CH 48
Mode 2	802.11ac / n 40 CH38/ CH 46
Mode 3	802.11 ac80 CH 42

Note:


(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.




Test Software	Realtek Test Tool
Power level setup	<10dBm

### 3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Emission



Conducted Spurious



### 3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Wifi wireless network card	N/A	BL-M8811CU2	N/A	EUT
A-1	Computer	HuaWei	ZKT-01	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

### 3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS



Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	KEYSIGHT	9020A	MY55370835	Oct. 28, 2022	Oct. 27, 2023
	(9kHz-26.5GHz)					
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSQ	100363	Oct. 28, 2022	Oct. 27, 2023
3	EMI Test Receiver	R&S	ESCI7	101169	Oct. 28, 2022	Oct. 27, 2023
	(9kHz-7GHz)					
4	Bilog Antenna	Schwarzbeck	VULB9168	N/A	Nov. 02, 2022	Nov. 01, 2023
	(30MHz-1500MHz)					
5	Horn Antenna	Agilent	AH-118	071145	Nov. 01, 2022	Oct. 31, 2023
	(1GHz-18GHz)					
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	Oct. 28, 2022	Oct. 27, 2023
7	Loop Antenna	TESEQ	HLA6121	58357	Nov. 01, 2022	Oct. 31, 2023
8	Amplifier	EM Electronics	EM330 Amplifier	060747	Nov. 15, 2022	Nov. 14, 2023
	(30-1000MHz)					
9	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Oct. 28, 2022	Oct. 27, 2023
10	Amplifier (500MHz-40GHz)	全聚达	DLE-161	097	Oct. 28, 2022	Oct. 27, 2023
11	Test Cable	N/A	R-01	N/A	Oct. 28, 2022	Oct. 27, 2023
12	Test Cable	N/A	R-02	N/A	Oct. 28, 2022	Oct. 27, 2023
13	Test Cable	N/A	R-03	N/A	Oct. 28, 2022	Oct. 27, 2023
14	Magnetic Field Probe Tester	Narda	ELT-400	0-0344	Nov. 15, 2022	Nov. 14, 2023
15	D.C. Power Supply	LongWei	TPR-6405D	N/A	\	\
16	EMC Software	Frad	EZ-EMC	Ver.EMC-CON 3A1.1	\	\
17	Turntable	MF	MF-7802BS	N/A	\	\
18	Antenna tower	MF	MF-7802BS	N/A	\	\

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Oct. 21, 2022	Oct. 20, 2023
2	LISN	CYBERTEK	EM5040A	E185040014 9	Oct. 21, 2022	Oct. 20, 2023
3	Test Cable	N/A	C-01	N/A	Oct. 21, 2022	Oct. 20, 2023
4	Test Cable	N/A	C-02	N/A	Oct. 21, 2022	Oct. 20, 2023
5	Test Cable	N/A	C-03	N/A	Oct. 21, 2022	Oct. 20, 2023
6	EMI Test Receiver	R&S	ESCI3	101393	Oct. 28, 2022	Oct. 27, 2023
7	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	\	\



#### 4.EMC EMISSION TEST

##### 4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

##### 4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) \*Decreases with the logarithm of the frequency.

##### 4.1.2 TEST PROCEDURE


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

##### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation



#### 4.1.4 TEST SETUP

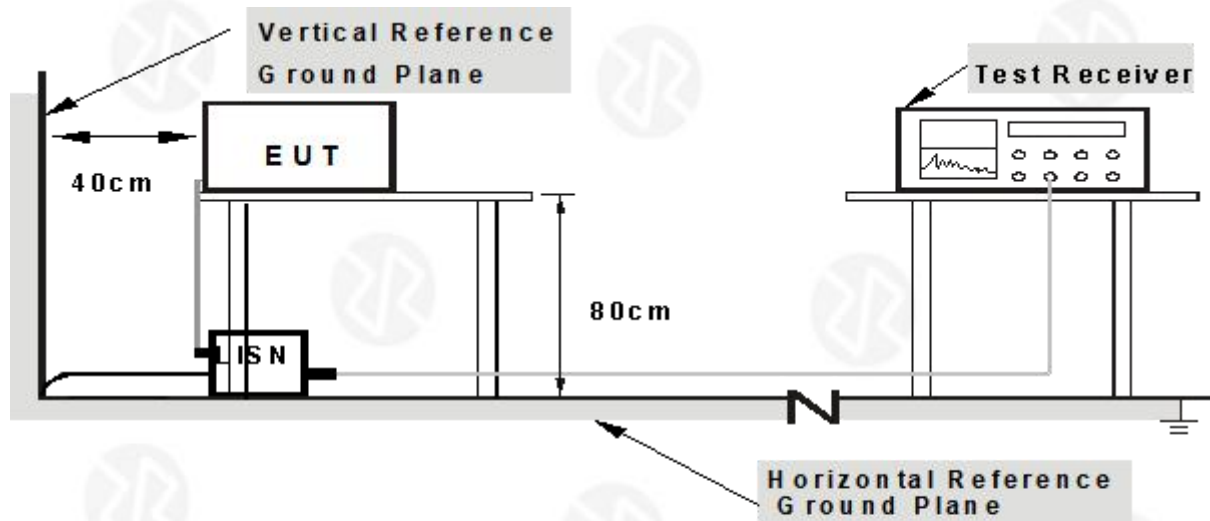

- Note:**
- 1.Support units were connected to second LISN.
  - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.





4.1.6 TEST RESULT

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

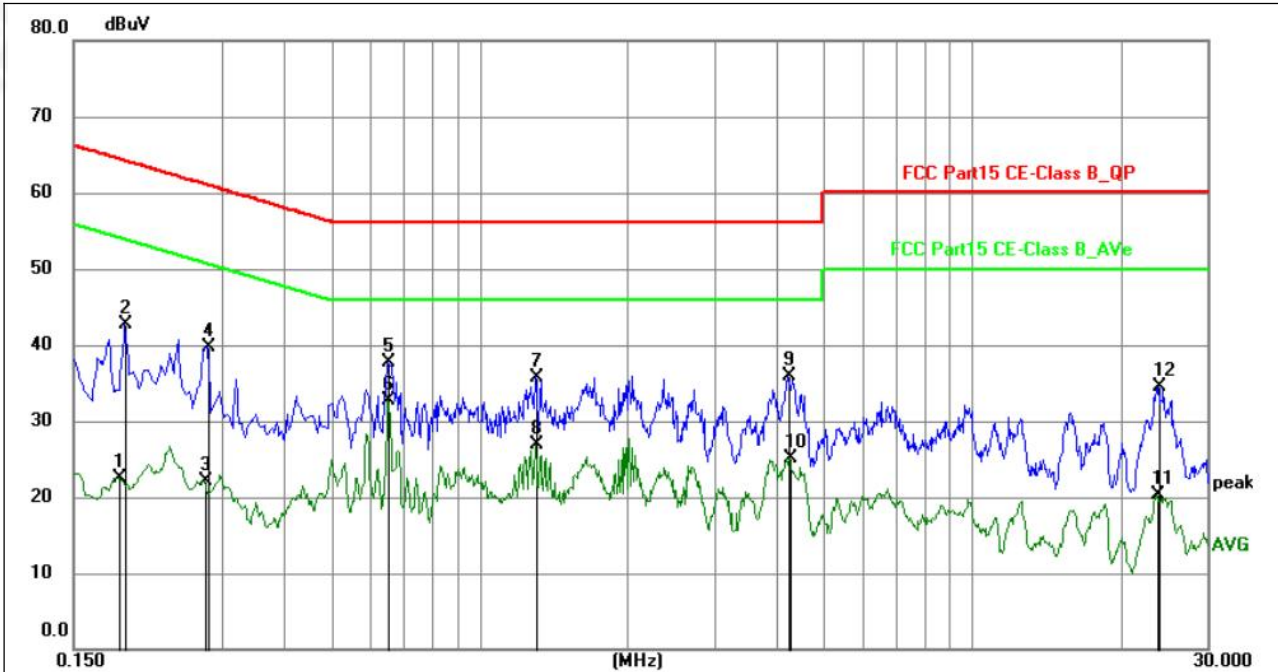

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1862	11.15	11.32	22.47	54.20	-31.73	AVG	P	
2	0.1905	31.32	11.34	42.66	64.01	-21.35	QP	P	
3	0.2760	10.78	11.40	22.18	50.94	-28.76	AVG	P	
4	0.2805	28.25	11.40	39.65	60.80	-21.15	QP	P	
5	0.6539	26.35	11.37	37.72	56.00	-18.28	QP	P	
6	0.6539	21.35	11.37	32.72	46.00	-13.28	AVG	P	
7	1.3018	24.49	11.31	35.80	56.00	-20.20	QP	P	
8	1.3018	15.63	11.31	26.94	46.00	-19.06	AVG	P	
9	4.2404	24.44	11.51	35.95	56.00	-20.05	QP	P	
10	4.2538	13.68	11.51	25.19	46.00	-20.81	AVG	P	
11	23.7435	8.79	11.49	20.28	50.00	-29.72	AVG	P	
12	23.9145	22.93	11.50	34.43	60.00	-25.57	QP	P	


Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor





Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

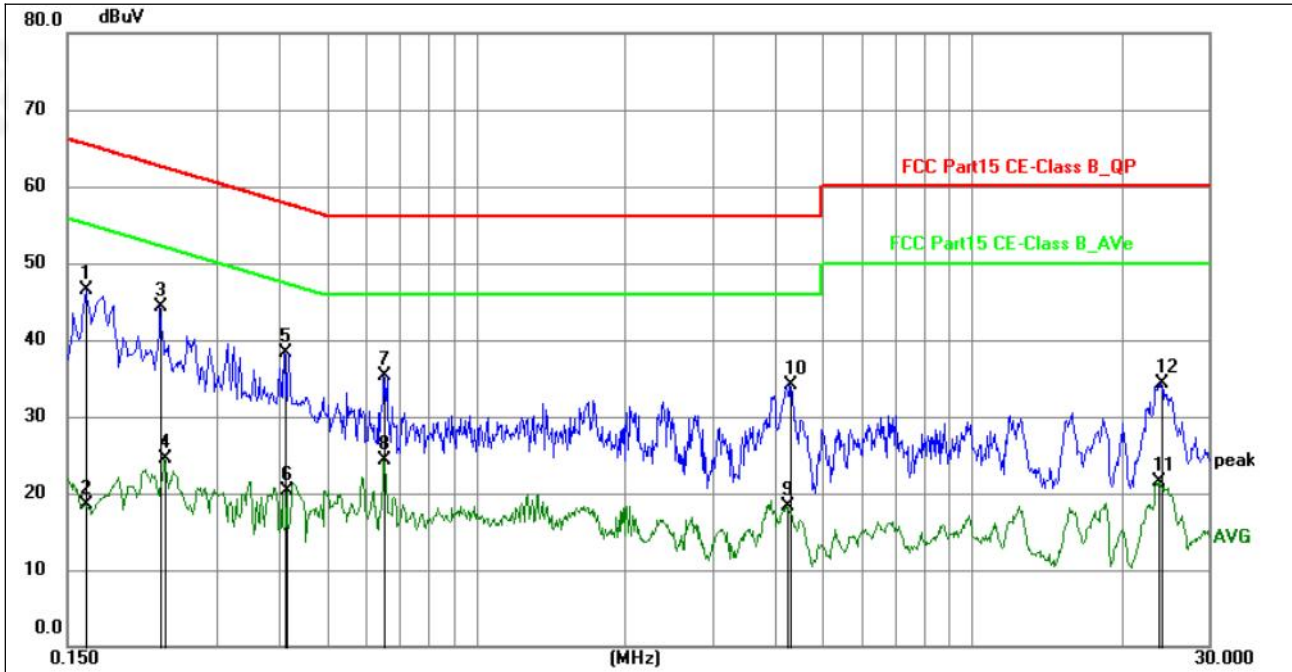

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1635	35.37	11.20	46.57	65.28	-18.71	QP	P	
2	0.1635	7.25	11.20	18.45	55.28	-36.83	AVG	P	
3	0.2310	32.84	11.40	44.24	62.41	-18.17	QP	P	
4	0.2354	13.07	11.40	24.47	52.26	-27.79	AVG	P	
5	0.4109	26.80	11.43	38.23	57.63	-19.40	QP	P	
6	0.4154	8.91	11.44	20.35	47.54	-27.19	AVG	P	
7	0.6539	24.02	11.38	35.40	56.00	-20.60	QP	P	
8	0.6539	12.94	11.38	24.32	46.00	-21.68	AVG	P	
9	4.2359	6.71	11.52	18.23	46.00	-27.77	AVG	P	
10	4.3125	22.67	11.52	34.19	56.00	-21.81	QP	P	
11	23.8604	9.93	11.50	21.43	50.00	-28.57	AVG	P	
12	24.0180	22.89	11.51	34.40	60.00	-25.60	QP	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209



#### 4.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

#### Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)( dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.


#### 4.2.3 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.




#### 4.2.4 TEST CONFIGURATION

1. For radiated emissions below 30MHz

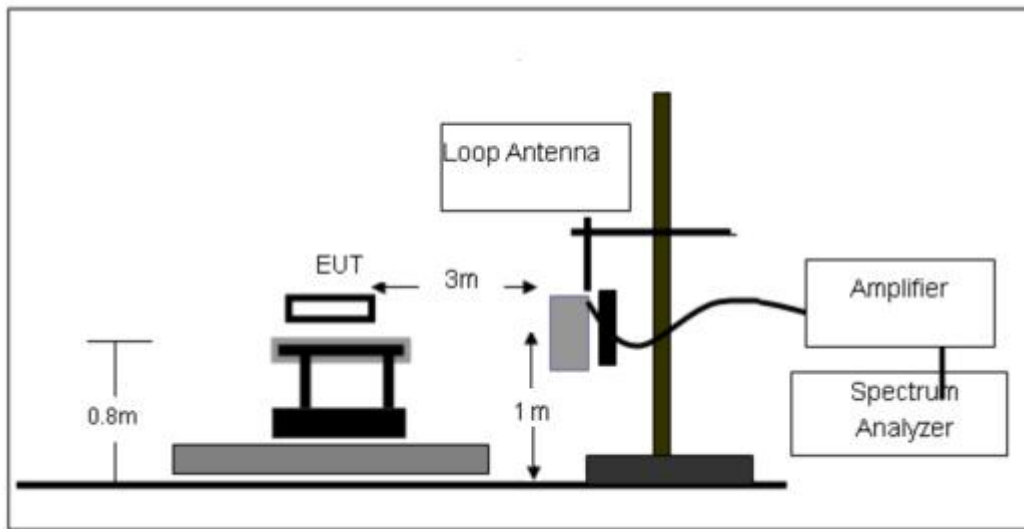


2. For radiated emissions from 30MHz to 1000MHz

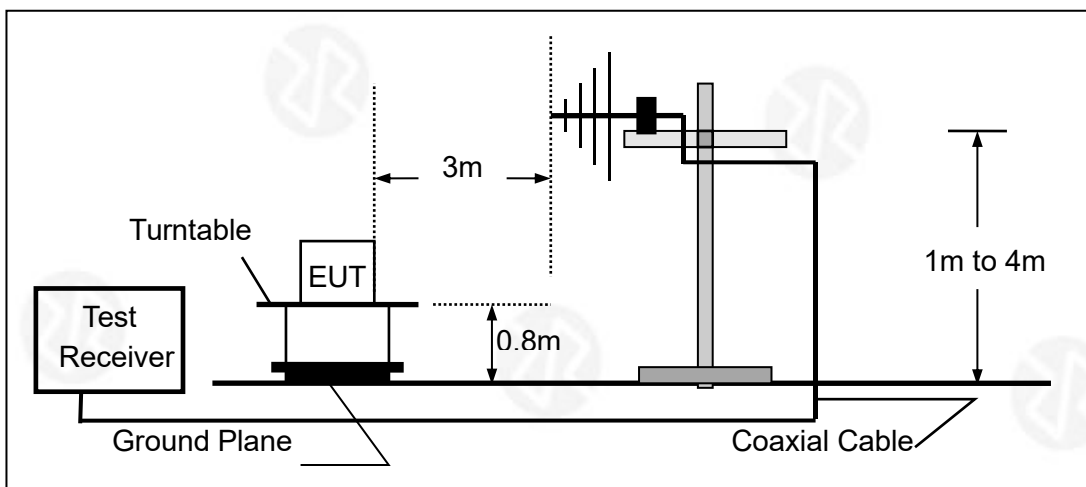



### 3. Radiated Emission Test-Up Frequency Above 1GHz

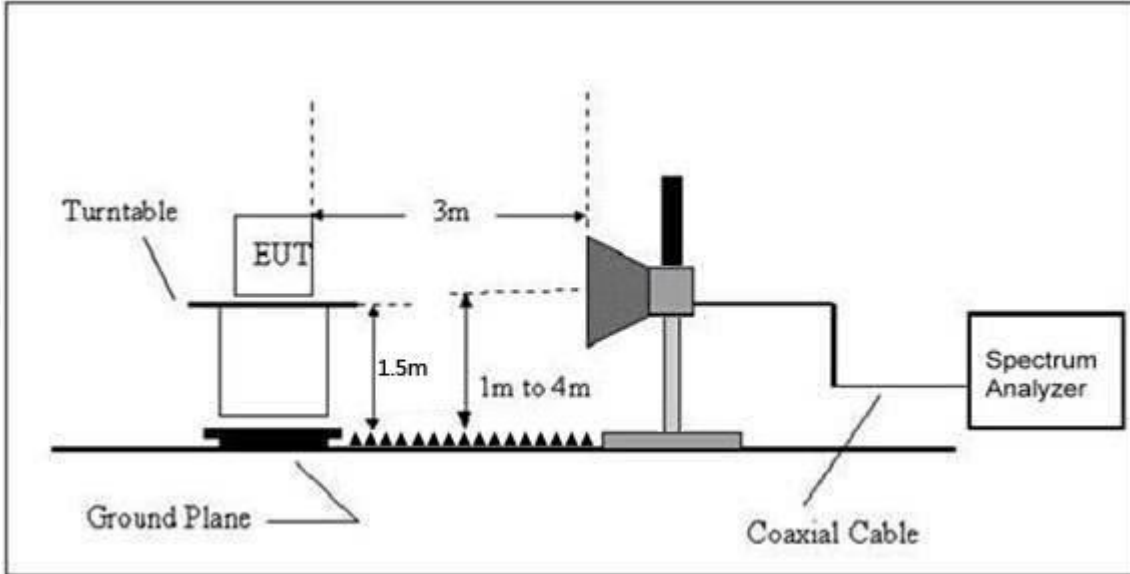

#### 4.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported



During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz]/\text{narrower RBW [kHz]})$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

#### 4.2.6 TEST RESULT

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.





Between 30MHz – 1GHz


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 5V		

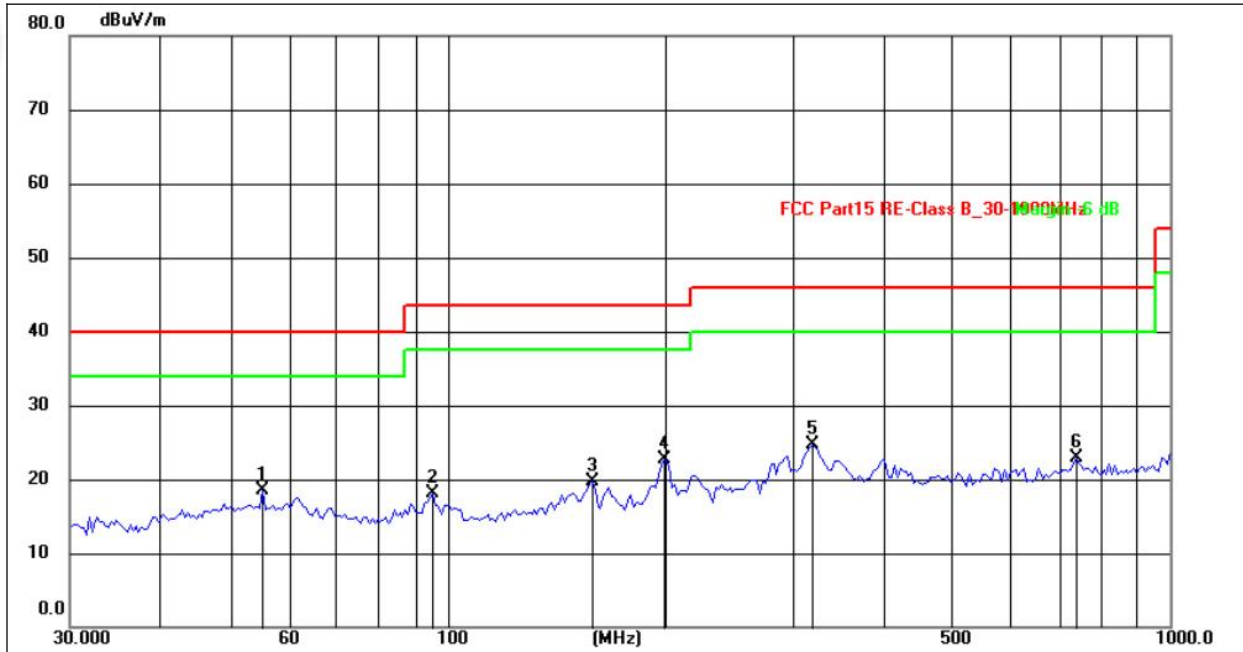

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	55.4147	32.73	-14.15	18.58	40.00	-21.42	QP
2	95.4269	38.09	-19.99	18.10	43.50	-25.40	QP
3	158.6673	35.85	-16.24	19.61	43.50	-23.89	QP
4	199.2855	41.53	-18.76	22.77	43.50	-20.73	QP
5	319.9368	41.58	-16.91	24.67	46.00	-21.33	QP
6	742.2586	29.79	-6.81	22.98	46.00	-23.02	QP



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 5V		

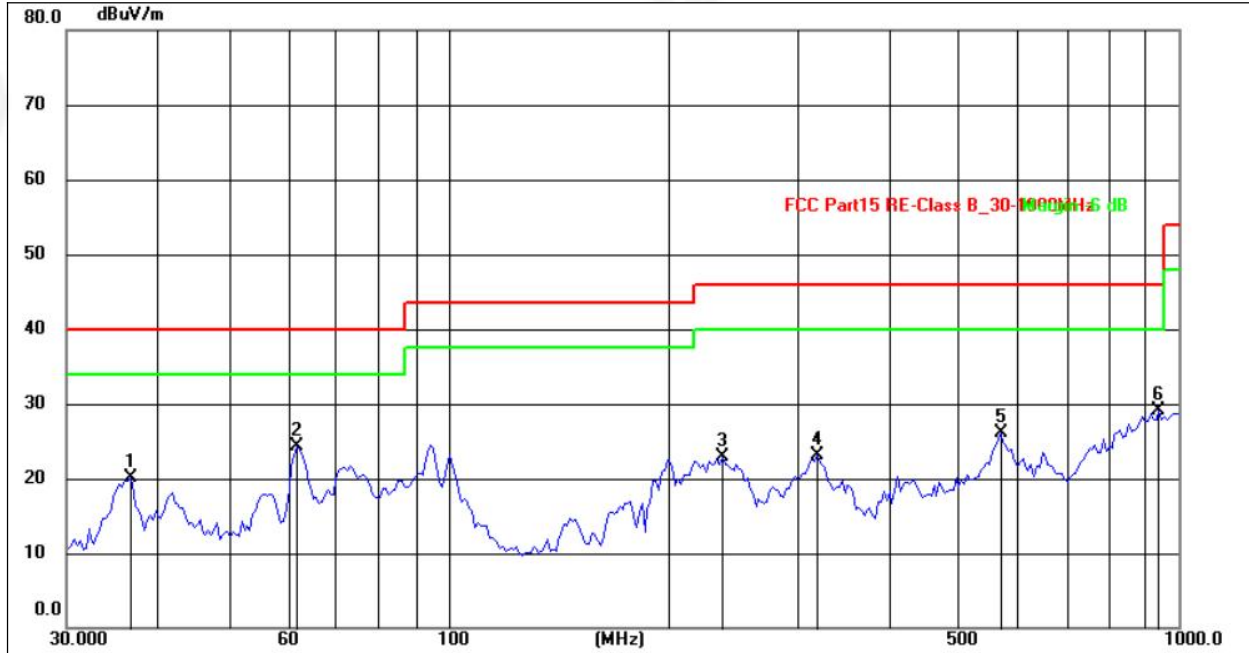

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.7017	37.48	-17.35	20.13	40.00	-19.87	QP
2	62.1037	42.90	-18.53	24.37	40.00	-15.63	QP
3	237.4755	43.26	-20.28	22.98	46.00	-23.02	QP
4	319.9368	40.73	-17.68	23.05	46.00	-22.95	QP
5	570.6100	35.08	-8.89	26.19	46.00	-19.81	QP
6	940.4800	29.62	-0.53	29.09	46.00	-16.91	QP

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The test data shows only the worst case 802.11n20 5240MHz mode



Between 1GHz – 40GHz

Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	DC 5V
Test Mode :	5.1G TX- 802.11n20		

## 802.11n20

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:5180MHz									
V	10360.00	51.70	30.55	5.77	24.66	51.58	74.00	-22.42	PK
V	10360.00	43.46	30.55	5.77	24.66	43.34	54.00	-10.66	AV
V	15540.00	51.96	30.33	6.32	24.55	52.50	74.00	-21.50	PK
V	15540.00	43.32	30.33	6.32	24.55	43.86	54.00	-10.14	AV
V	20720.00	51.35	30.85	7.45	24.69	52.64	74.00	-21.36	PK
V	20720.00	43.97	30.85	7.45	24.69	45.26	54.00	-8.74	AV
V	25900.00	52.89	31.02	8.99	25.57	56.43	74.00	-17.57	PK
V	25900.00	43.40	31.02	8.99	25.57	46.94	54.00	-7.06	AV
H	10360.00	54.11	30.55	5.77	24.66	53.99	74.00	-20.01	PK
H	10360.00	43.37	30.55	5.77	24.66	43.25	54.00	-10.75	AV
H	15540.00	50.55	30.33	6.32	24.55	51.09	74.00	-22.91	PK
H	15540.00	43.95	30.33	6.32	24.55	44.49	54.00	-9.51	AV
H	20720.00	53.86	30.85	7.45	24.69	55.15	74.00	-18.85	PK
H	20720.00	43.47	30.85	7.45	24.69	44.76	54.00	-9.24	AV
H	25900.00	53.94	31.02	8.99	25.57	57.48	74.00	-16.52	PK
H	25900.00	43.91	31.02	8.99	25.57	47.45	54.00	-6.55	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:5200MHz									
V	10400.00	50.11	30.55	5.77	24.66	49.99	74.00	-24.01	PK
V	10400.00	43.11	30.55	5.77	24.66	42.99	54.00	-11.01	AV
V	15600.00	52.42	30.33	6.32	24.55	52.96	74.00	-21.04	PK
V	15600.00	43.57	30.33	6.32	24.55	44.11	54.00	-9.89	AV
V	20800.00	50.15	30.85	7.45	24.69	51.44	74.00	-22.56	PK
V	20800.00	43.59	30.85	7.45	24.69	44.88	54.00	-9.12	AV
V	26000.00	50.06	31.02	8.99	25.57	53.60	74.00	-20.40	PK
V	26000.00	43.51	31.02	8.99	25.57	47.05	54.00	-6.95	AV
H	10400.00	52.08	30.55	5.77	24.66	51.96	74.00	-22.04	PK
H	10400.00	43.08	30.55	5.77	24.66	42.96	54.00	-11.04	AV
H	15600.00	53.32	30.33	6.32	24.55	53.86	74.00	-20.14	PK
H	15600.00	43.33	30.33	6.32	24.55	43.87	54.00	-10.13	AV
H	20800.00	54.21	30.85	7.45	24.69	55.50	74.00	-18.50	PK
H	20800.00	43.21	30.85	7.45	24.69	44.50	54.00	-9.50	AV
H	26000.00	54.11	31.02	8.99	25.57	57.65	74.00	-16.35	PK
H	26000.00	43.90	31.02	8.99	25.57	47.44	54.00	-6.56	AV





Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:5240MHz									
V	10480.00	53.88	30.55	5.77	24.66	53.76	74.00	-20.24	PK
V	10480.00	43.32	30.55	5.77	24.66	43.20	54.00	-10.80	AV
V	15720.00	52.16	30.33	6.32	24.55	52.70	74.00	-21.30	PK
V	15720.00	43.29	30.33	6.32	24.55	43.83	54.00	-10.17	AV
V	20960.00	53.75	30.85	7.45	24.69	55.04	74.00	-18.96	PK
V	20960.00	43.36	30.85	7.45	24.69	44.65	54.00	-9.35	AV
V	26200.00	54.58	31.02	8.99	25.57	58.12	74.00	-15.88	PK
V	26200.00	43.73	31.02	8.99	25.57	47.27	54.00	-6.73	AV
H	10480.00	50.61	30.55	5.77	24.66	50.49	74.00	-23.51	PK
H	10480.00	43.42	30.55	5.77	24.66	43.30	54.00	-10.70	AV
H	15720.00	53.40	30.33	6.32	24.55	53.94	74.00	-20.06	PK
H	15720.00	43.63	30.33	6.32	24.55	44.17	54.00	-9.83	AV
H	20960.00	54.48	30.85	7.45	24.69	55.77	74.00	-18.23	PK
H	20960.00	43.06	30.85	7.45	24.69	44.35	54.00	-9.65	AV
H	26200.00	54.17	31.02	8.99	25.57	57.71	74.00	-16.29	PK
H	26200.00	43.86	31.02	8.99	25.57	47.40	54.00	-6.60	AV

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst mode is 802.11n20, only the worst data is recorded.



## 5. POWER SPECTRAL DENSITY TEST

### 5.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(3)

Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.



## 5.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.I.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

## 5.3 DEVIATION FROM STANDARD

No deviation.

## 5.4 TEST SETUP



## 5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.




### 5.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	DC 5V
Test Mode :	TX		


Test mode	Test Channel (MHz)	PSD [dBm/MHz]	Limit (dBm/MHz)	Result
802.11a20	5180	0.344	11	Pass
	5200	2.365	11	Pass
	5240	2.805	11	Pass
802.11n(HT20)	5180	0.796	11	Pass
	5200	2.196	11	Pass
	5240	0.056	11	Pass
802.11n(HT40)	5190	-4.913	11	Pass
	5230	0.965	11	Pass
802.11ac(VH20)	5210	-5.263	11	Pass
	5180	1.264	11	Pass
	5200	2.594	11	Pass
802.11ac(VH40)	5240	1.851	11	Pass
	5190	-4.536	11	Pass
802.11ac(VH80)	5230	0.578	11	Pass




(802.11a20) PSD plot on channel 36

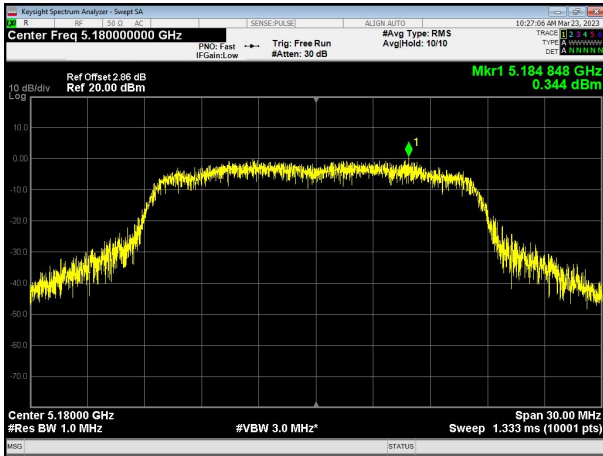

(802.11a20) PSD plot on channel 40

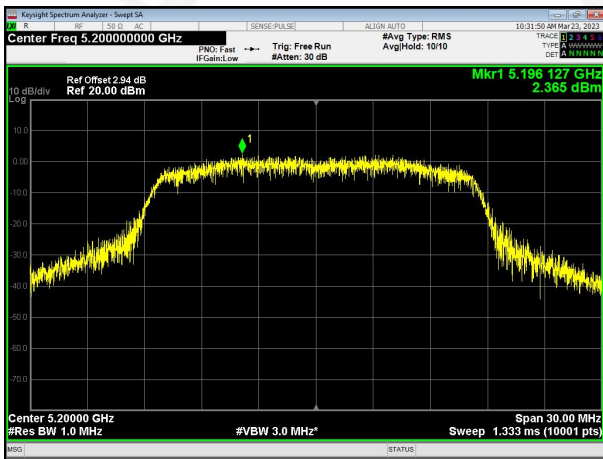


(802.11a20) PSD plot on channel 48

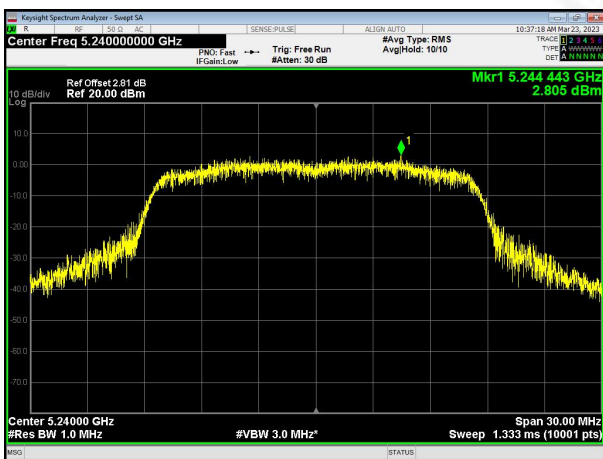







(802.11n20) PSD plot on channel 36

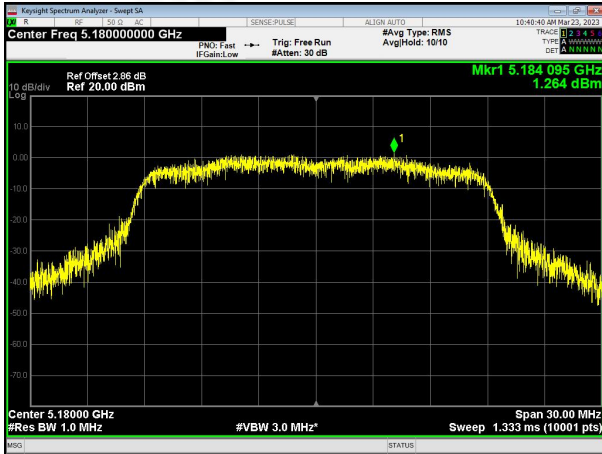


(802.11n40) PSD plot on channel 38

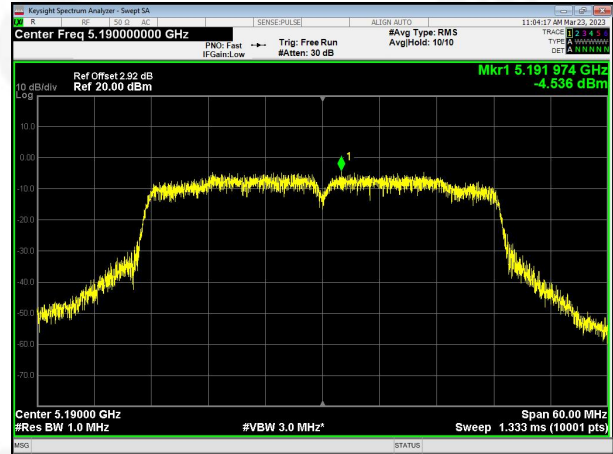


(802.11n20) PSD plot on channel 40

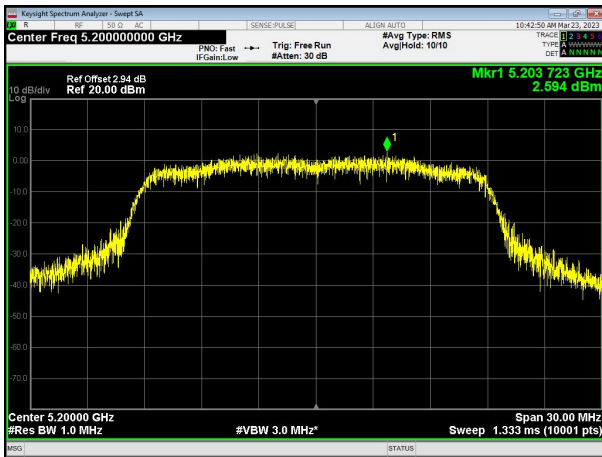

(802.11n40) PSD plot on channel 46

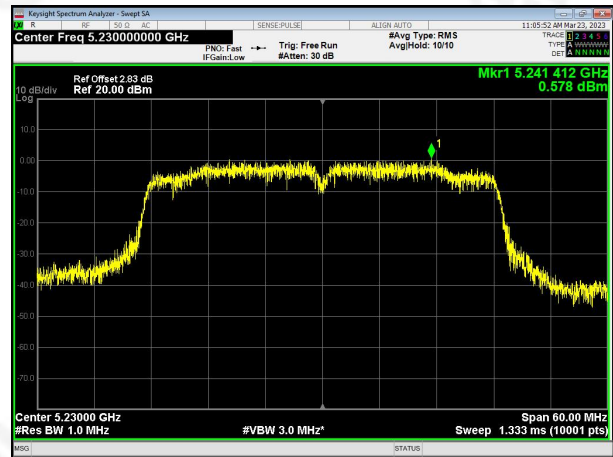


(802.11n20) PSD plot on channel 48

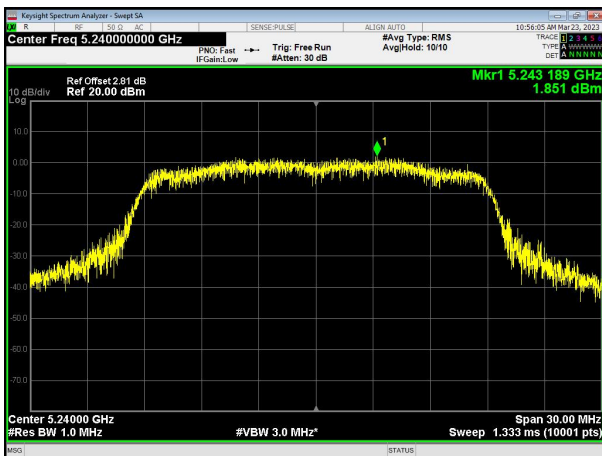




(802.11ac20) PSD plot on channel 36

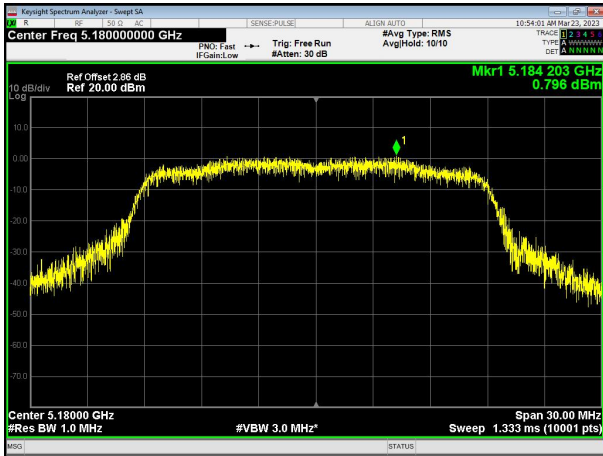


(802.11ac40) PSD plot on channel 38

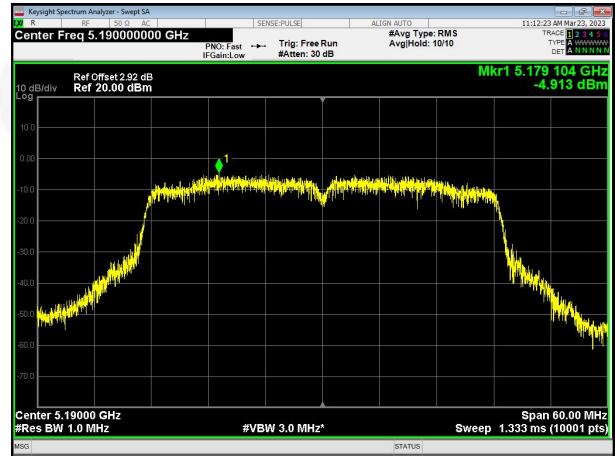


(802.11ac20) PSD plot on channel 40




(802.11ac40) PSD plot on channel 46

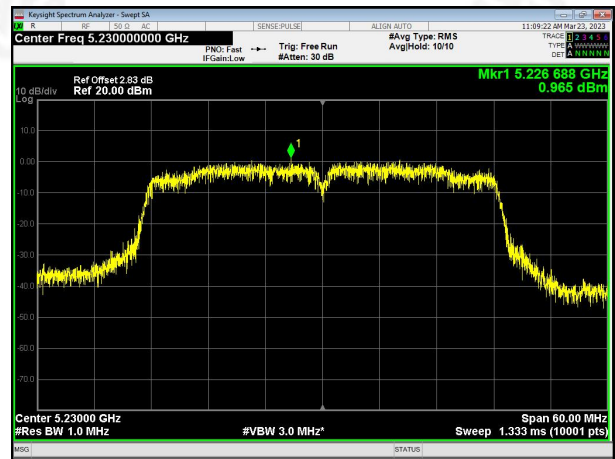

(802.11ac20) PSD plot on channel 48

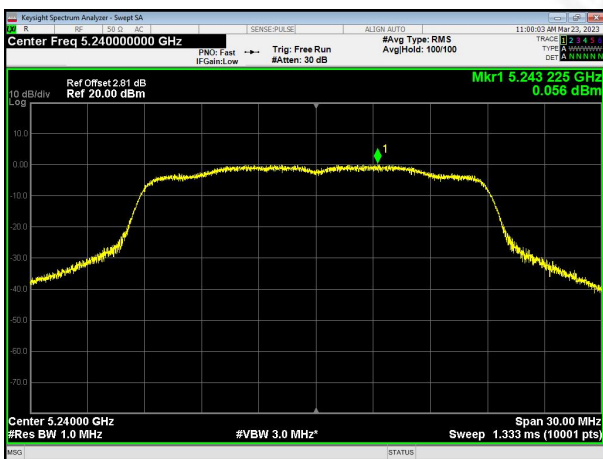

(802.11ac80) PSD plot on channel 42

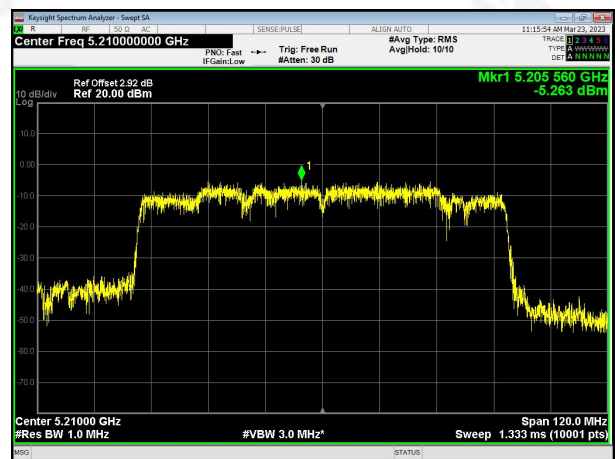



## 6. 26DB & 99% Emission Bandwidth

### 6.1 APPLIED PROCEDURES / LIMIT

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

### 6.2 TEST PROCEDURE

a) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW.
3. Detector = Peak.
4. Trace mode = max hold.

b) The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 \cdot$  RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.



### 6.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.





## 6.4 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX		


Test CH	-26dB Channel Bandwidth (MHz)				Result
	802.11a20	802.11n(HT20)	802.11n(HT40)	/	
Lowest	20.19	21.34	40.96	/	Pass
Middle	20.62	21.26	/	/	
Highest	20.36	21.19	40.43	/	

Test CH	-26dB Channel Bandwidth (MHz)				Result
		802.11ac(HT20)	802.11ac(HT40)	802.11ac(HT80)	
Lowest	/	21.40	41.06	/	Pass
Middle	/	21.30	/	79.39	
Highest	/	21.11	40.60	/	




Test plot


(802.11 a20) 26dB Bandwidth plot on channel 36

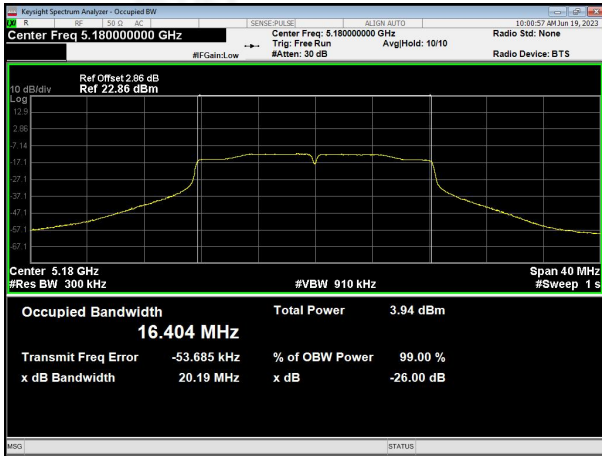

(802.11 a20) 26dB Bandwidth plot on channel 40

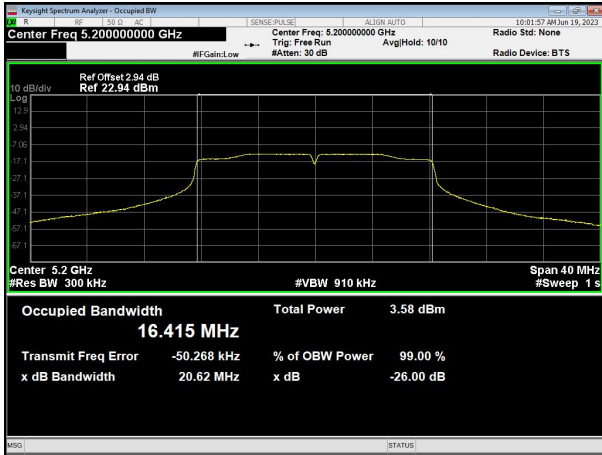


(802.11 a20) 26dB Bandwidth plot on channel 48

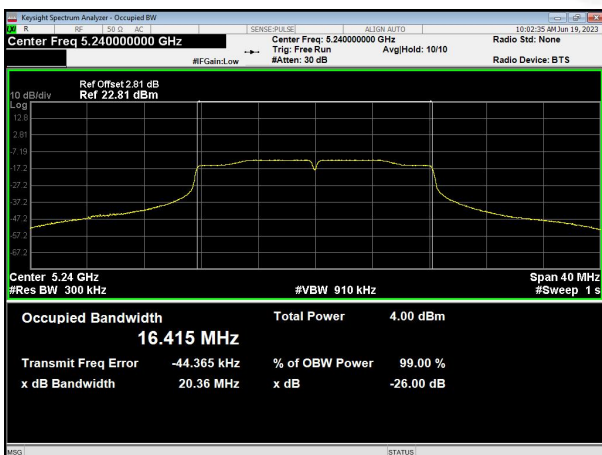




Test plot


(802.11 n20) 26dB Bandwidth plot on channel 36

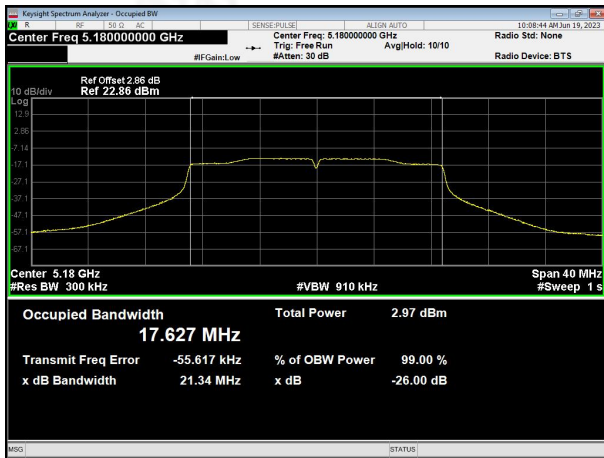


(802.11 n40) 26dB Bandwidth plot on channel 38

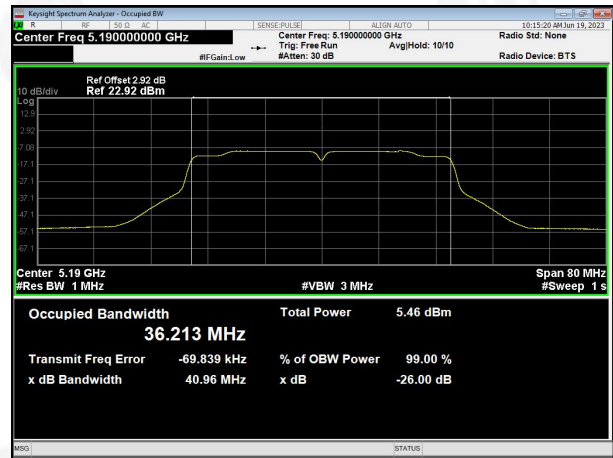


(802.11 n20) 26dB Bandwidth plot on channel 40

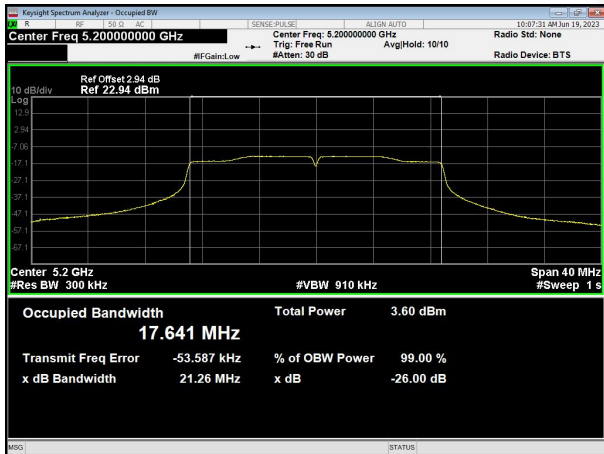

(802.11 n40) 26dB Bandwidth plot on channel 46

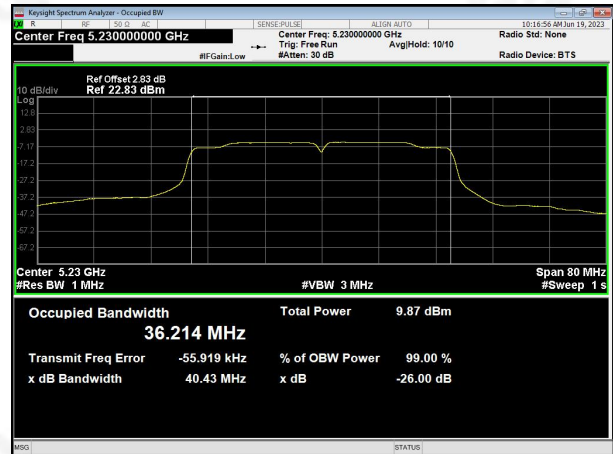


(802.11 n20) 26dB Bandwidth plot on channel 48

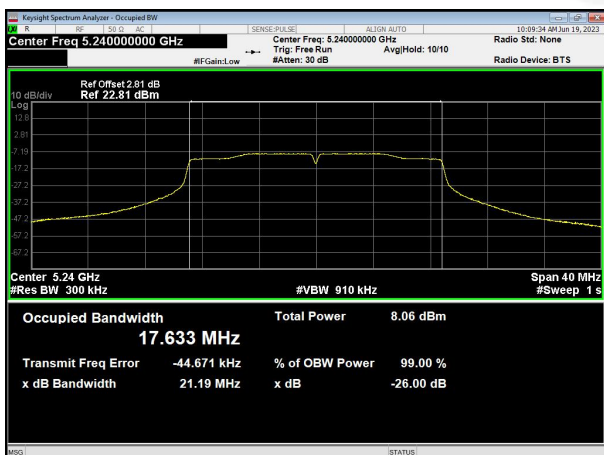




Test plot


(802.11ac20) 26dB Bandwidth plot on channel 36

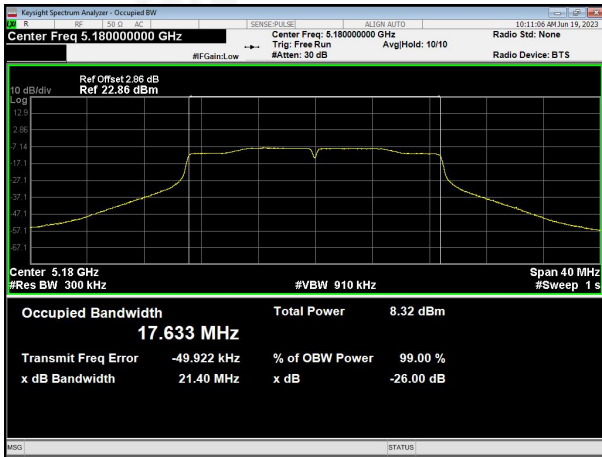


(802.11 ac40) 26dB Bandwidth plot on channel 42

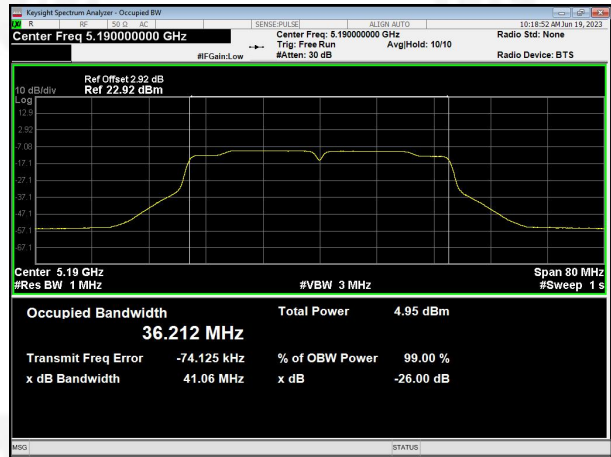


(802.11ac20) 26dB Bandwidth plot on channel 40

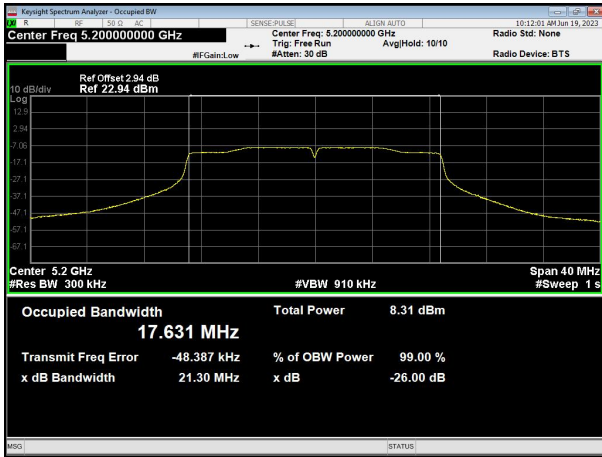


(802.11 ac40) 26dB Bandwidth plot on channel 42

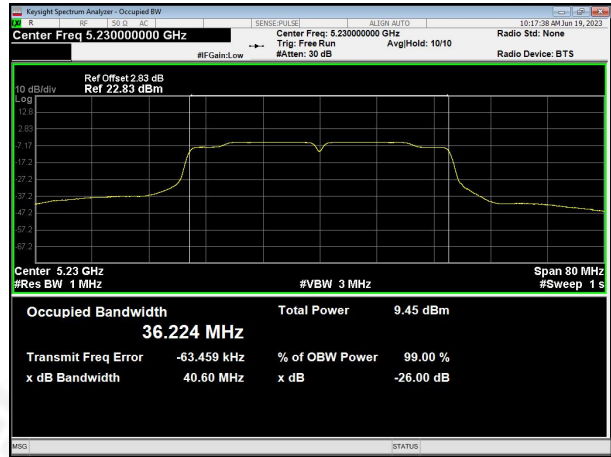

(802.11ac20) 26dB Bandwidth plot on channel 48

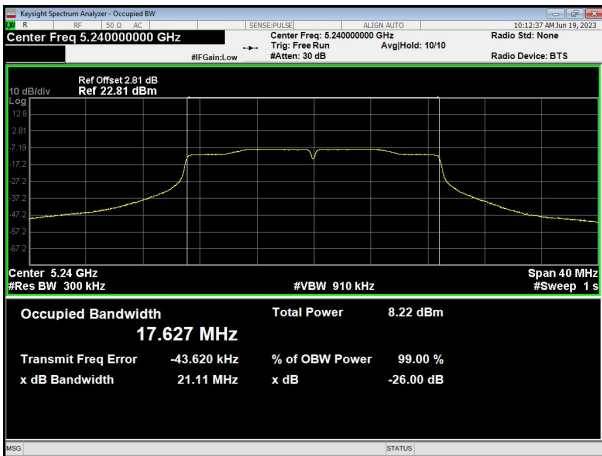

(802.11 ac80) 26dB Bandwidth plot on channel 42

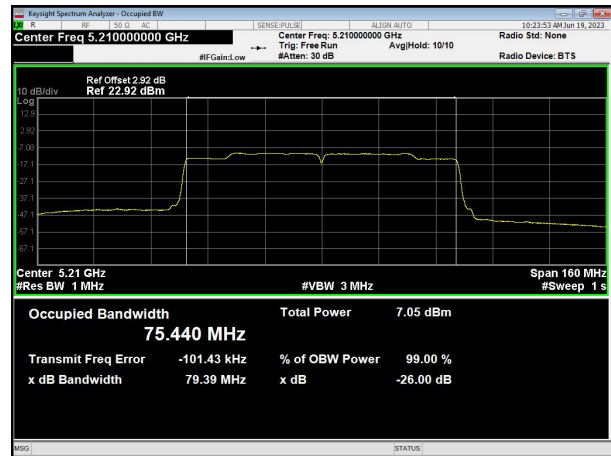



## 7. MAXIMUM CONDUCTED OUTPUT POWER

### 7.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

### 7.2 TEST PROCEDURE

The EUT was directly connected to the Power meter

#### 1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

#### 2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal. However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle  $\geq 98$  percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $\pm 2$  percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW  $\geq 3$  MHz.

(iv) Number of points in sweep  $\geq 2$  Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle  $< 98$  percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98$  percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.





(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP



### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.