



RF TEST REPORT

Applicant Smawave Technology Co. ,Ltd

FCC ID 2AU8HSPH320-A

Product smart phone

Brand Smawave

Model SPH320-a

Report No. R2005A0340-R2V1

Issue Date January 12, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2019)/ FCC CFR47 Part 27C (2019)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Peng Tao

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1	Test Laboratory	5
1.1	Notes of the Test Report	5
1.2.	Test facility	5
1.3	Testing Location	5
2	General Description of Equipment under Test	6
2.1	Applicant and Manufacturer Information	6
2.2	General information	6
3	Applied Standards	7
4	Test Configuration	8
5	Test Case Results	9
5.1	RF Power Output and Effective Isotropic Radiated Power	9
5.2	Radiates Spurious Emission	13
6	Main Test Instruments	17



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	November 19, 2020
Rev.1	Update description. Add RF power output and Effective Radiated power.	January 12, 2022
Note: This revised report (Report No. R2005A0340-R2V1) supersedes and replaces the previously issued report (Report No. R2005A0340-R2). Please discard or destroy the previously issued report and dispose of it accordingly.		



Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	RF Power Output and Effective Isotropic Radiated Power	/27.50(h)(2)	PASS
2	Radiates Spurious Emission	2.1053 /27.53(m)	PASS

Date of Testing: June 16, 2020~ July 20, 2020

Note: PASS: The EUT complies with the essential requirements in the standard.
FAIL: The EUT does not comply with the essential requirements in the standard.
All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

There is only tested RF Power Output and Effective Isotropic Radiated Power and Radiates Spurious Emission in this report. Other test items please refer to the MGM5607A Module report (Report No. : R2001A0008-R1V1; FCC ID: 2AU8HMG5607A).



1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com



2 General Description of Equipment under Test

2.1 Applicant and Manufacturer Information

Applicant	Smawave Technology Co. ,Ltd
Applicant address	3/F, Building 8, 1001 North Qinzhou Road, Xuhui District, Shanghai, China
Manufacturer	Smawave Technology Co. ,Ltd
Manufacturer address	3/F, Building 8, 1001 North Qinzhou Road, Xuhui District, Shanghai, China

2.2 General information

EUT Description					
Model	SPH320-a				
IMEI:	IMEI 1:869922040046018 IMEI 2:869922040056017				
Hardware Version	V2.2				
Software Version	SMAWAVE-SPH320-a				
Power Supply	Battery/ AC Adapter				
Antenna Type	Internal Antenna				
Antenna Gain	3.1dBi				
Test Mode(s)	LTE Band 41;				
Test Modulation	(LTE)QPSK, 16QAM,64QAM;				
LTE Category	6				
Maximum E.I.R.P./ E.R.P.	LTE Band 41:	24.18 dBm			
Rated Power Supply Voltage:	3.8V				
Extreme Voltage	Minimum: 3.6V Maximum: 4.35V				
Extreme Temperature	Lowest: -20°C Highest: +55°C				
Operating Frequency Range(s)	Mode	Tx (MHz)	Rx (MHz)		
	LTE Band 41	2496 ~ 2690	2496 ~ 2690		
EUT Accessory					
Adapter	Manufacturer: Shenzhen Aquilstar Technology Co., LTD Model: ASSA107W-050200				
Battery	Manufacturer: Guangdong fenghua New Energy Co.,Ltd Model: A106				
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.					



3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 27C (2019)

ANSI C63.26 (2015)

Reference standard:

FCC CFR47 Part 2 (2019)

KDB 971168 D01 Power Meas License Digital Systems v03r01



4 Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

The following testing in different Bandwidth is set to detail in the following table:

Test modes are chosen to be reported as the worst case configuration below for LTE Band 41:

Test items	Modes	Bandwidth (MHz)						Modulation			RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	50%	100%	L	M	H
RF Power Output and Effective Isotropic Radiated Power	LTE 41	-	-	O	O	O	O	O	O	O	O	O	O	O	O	O
Radiates Spurious Emission	LTE 41	-	-	O	O	O	O	O	-	-	O	-	-	-	O	-
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.															

5 Test Case Results

5.1 RF Power Output and Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to the Base Station Simulator with a known loss. The EUT is controlled by the Base Station Simulator test set to ensure max power transmission with proper modulation.


ERP can then be calculated as follows:

$$\text{EIRP (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBi)}$$

where: dBd refers to gain relative to an ideal dipole.

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15 \text{ (dB.)}$$

Test Setup

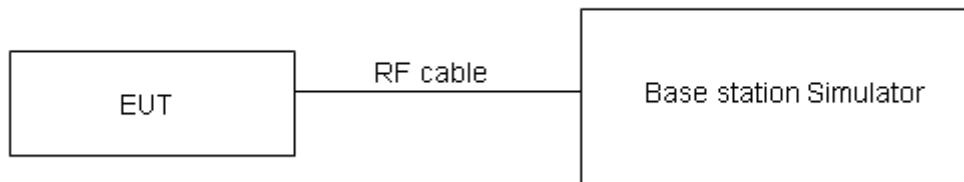

Limits

No specific RF power output requirements in part 2.1046.

Rule Part 27.50(h) (2) specifies that "Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power."

Part 27.50(h)(2) Limit	$\leq 2 \text{ W (33 dBm)}$
------------------------	-----------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.4$ dB for RF power output, $k = 2$, $U= 1.19$ dB for ERP/EIRP.



Test Results

LTE TDD Band 41				Maximum Output Power(dBm)			EIRP (dBm)						
Bandwidth	Modulation	RB allocation	offset	Channel/Frequency(MHz)			Channel/Frequency(MHz)						
				39675/2498.5	40620/2593	41565/2687.5	39675/2498.5	40620/2593	41565/2687.5				
5MHz	QPSK	1	0	19.66	20.62	20.27	22.76	23.72	23.37				
		1	13	19.57	20.76	20.11	22.67	23.86	23.21				
		1	24	19.81	21.05	20.48	22.91	24.15	23.58				
		12	0	18.66	19.72	19.00	21.76	22.82	22.10				
		12	6	18.48	19.80	19.01	21.58	22.90	22.11				
		12	13	18.75	20.01	19.17	21.85	23.11	22.27				
		25	0	18.55	19.77	19.12	21.65	22.87	22.22				
	16QAM	1	0	18.73	19.88	19.33	21.83	22.98	22.43				
		1	13	18.71	20.04	19.22	21.81	23.14	22.32				
		1	24	19.02	20.18	19.70	22.12	23.28	22.80				
		12	0	17.48	18.79	18.02	20.58	21.89	21.12				
		12	6	17.43	18.78	18.09	20.53	21.88	21.19				
		12	13	17.55	19.10	19.13	20.65	22.20	22.23				
		25	0	17.38	18.84	18.27	20.48	21.94	21.37				
10MHz	QPSK	1	0	18.67	19.68	19.19	21.77	22.78	22.29				
		1	13	18.46	19.83	19.07	21.56	22.93	22.17				
		1	24	18.82	20.09	19.55	21.92	23.19	22.65				
		12	0	17.43	18.80	18.01	20.53	21.90	21.11				
		12	6	17.46	18.75	18.04	20.56	21.85	21.14				
		12	13	17.48	19.06	18.20	20.58	22.16	21.30				
		25	0	17.41	18.89	18.22	20.51	21.99	21.32				
	16QAM	RB allocation	offset	Channel/Frequency(MHz)			Channel/Frequency(MHz)						
				39700/2501	40620/2593	41540/2685	39700/2501	40620/2593	41540/2685				
				1	0	19.68	20.65	20.28	22.78	23.75	23.38		
				1	25	19.60	20.80	20.16	22.70	23.90	23.26		
				1	49	19.83	21.08	20.52	22.93	24.18	23.62		
				25	0	18.69	19.76	19.05	21.79	22.86	22.15		
				25	13	18.51	19.84	19.06	21.61	22.94	22.16		
				25	25	18.77	20.06	19.21	21.87	23.16	22.31		
				50	0	18.59	19.81	19.14	21.69	22.91	22.24		
	16QAM			1	0	18.75	19.90	19.36	21.85	23.00	22.46		
				1	25	18.74	20.07	19.26	21.84	23.17	22.36		
				1	49	19.05	20.11	19.72	22.15	23.21	22.82		
				25	0	17.51	18.83	18.07	20.61	21.93	21.17		
				25	13	17.45	18.81	18.13	20.55	21.91	21.23		



	64QAM	25	25	17.58	19.14	19.18	20.68	22.24	22.28
		50	0	17.41	18.88	18.32	20.51	21.98	21.42
		1	0	18.69	19.70	19.18	21.79	22.80	22.28
		1	25	18.49	19.86	19.07	21.59	22.96	22.17
		1	49	18.81	20.12	19.57	21.91	23.22	22.67
		25	0	17.46	18.80	18.06	20.56	21.90	21.16
		25	13	17.48	18.78	18.08	20.58	21.88	21.18
		25	25	17.51	19.10	18.25	20.61	22.20	21.35
		50	0	17.44	18.93	18.27	20.54	22.03	21.37
Bandwidth	Modulation	RB allocation	offset	Channel/Frequency(MHz)			Channel/Frequency(MHz)		
				39725/ 2503.5	40620/ 2593	41515/ 2682.5	39725/ 2503.5	40620/ 2593	41515/ 2682.5
15MHz	QPSK	1	0	19.67	20.63	20.24	22.77	23.73	23.34
		1	38	19.58	20.77	20.15	22.68	23.87	23.25
		1	74	19.80	21.04	20.47	22.90	24.14	23.57
		36	0	18.67	19.73	19.01	21.77	22.83	22.11
		36	18	18.48	19.80	19.01	21.58	22.90	22.11
		36	39	18.74	20.02	19.18	21.84	23.12	22.28
		75	0	18.57	19.76	19.10	21.67	22.86	22.20
	16QAM	1	0	18.70	19.88	19.34	21.80	22.98	22.44
		1	38	18.72	20.05	19.23	21.82	23.15	22.33
		1	74	19.02	20.18	19.68	22.12	23.28	22.78
		36	0	17.48	18.80	18.05	20.58	21.90	21.15
		36	18	17.42	18.77	18.08	20.52	21.87	21.18
		36	39	17.56	19.11	19.14	20.66	22.21	22.24
		75	0	17.38	18.84	18.27	20.48	21.94	21.37
	64QAM	1	0	18.64	19.68	19.16	21.74	22.78	22.26
		1	38	18.47	19.84	19.04	21.57	22.94	22.14
		1	74	18.82	20.13	19.56	21.92	23.23	22.66
		36	0	17.45	18.81	18.08	20.55	21.91	21.18
		36	18	17.46	18.77	18.05	20.56	21.87	21.15
		36	39	17.49	19.07	18.21	20.59	22.17	21.31
		75	0	17.41	18.89	18.22	20.51	21.99	21.32
Bandwidth	Modulation	RB allocation	offset	Channel/Frequency(MHz)			Channel/Frequency(MHz)		
				39750/ 2506	40620/ 2593	41490/ 2680	39750/ 2506	40620/ 2593	41490/ 2680
20MHz	QPSK	1	0	19.64	20.60	20.20	22.74	23.70	23.30
		1	50	19.57	20.75	20.11	22.67	23.85	23.21
		1	99	19.78	21.01	20.46	22.88	24.11	23.56
		50	0	18.64	19.69	18.96	21.74	22.79	22.06
		50	25	18.46	19.77	18.97	21.56	22.87	22.07
		50	50	18.71	19.98	19.13	21.81	23.08	22.23
		100	0	18.54	19.72	19.05	21.64	22.82	22.15



		1	0	18.86	19.83	19.30	21.96	22.93	22.40
		1	50	18.68	20.01	19.21	21.78	23.11	22.31
		1	99	19.00	20.16	19.65	22.10	23.26	22.75
	16QAM	50	0	17.45	18.77	18.01	20.55	21.87	21.11
		50	25	17.39	18.74	18.06	20.49	21.84	21.16
		50	50	17.53	19.07	19.09	20.63	22.17	22.19
		100	0	17.36	18.81	18.23	20.46	21.91	21.33
		1	0	18.62	19.63	19.12	21.72	22.73	22.22
	64QAM	1	50	18.43	19.80	19.02	21.53	22.90	22.12
		1	99	18.76	20.07	19.50	21.86	23.17	22.60
		50	0	17.40	18.74	18.00	20.50	21.84	21.10
		50	25	17.42	18.71	18.01	20.52	21.81	21.11
		50	50	17.46	19.03	18.16	20.56	22.13	21.26
		100	0	17.39	18.86	18.18	20.49	21.96	21.28



5.2 Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=200Hz,VBW=600Hz for 9kHz150kHz , RBW=10kHz, VBW=30kHz 150kHz-30MHz ,RBW=100kHz,VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$

The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$

8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

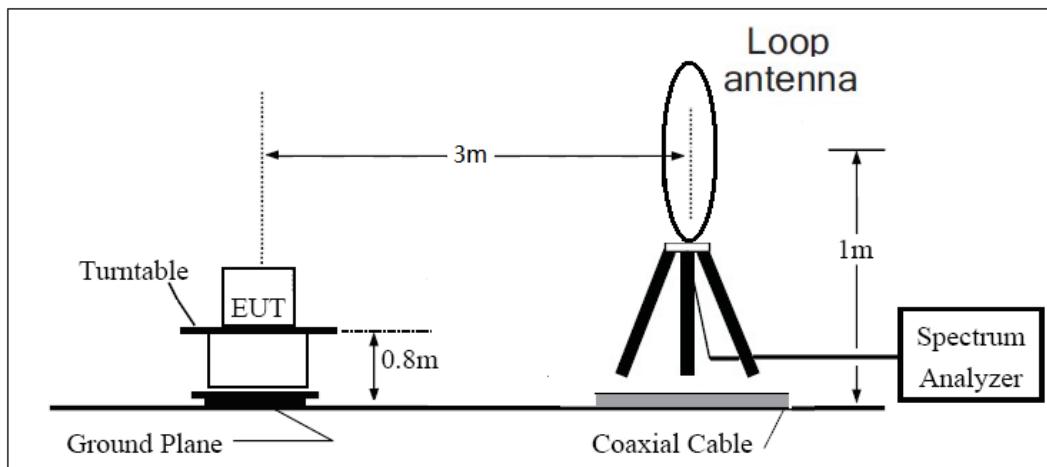

30MHz ~ 1GHz

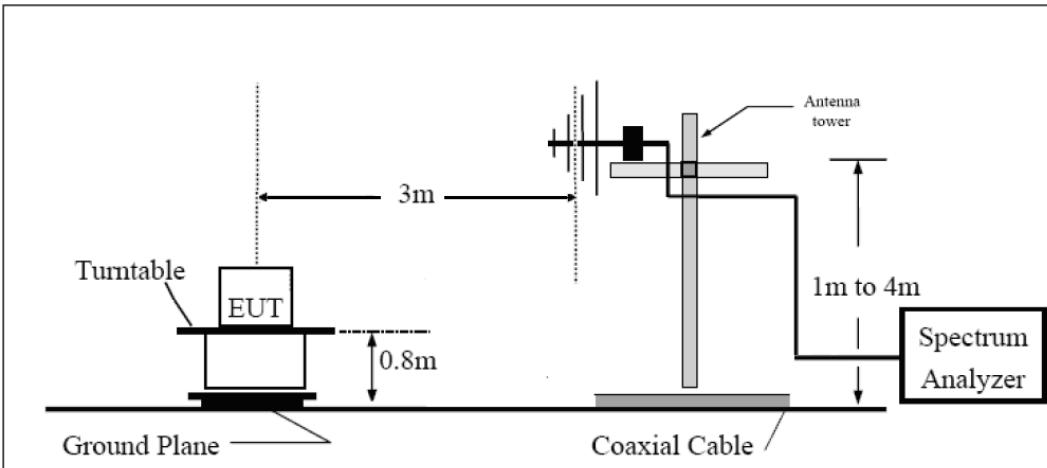

Above 1GHz

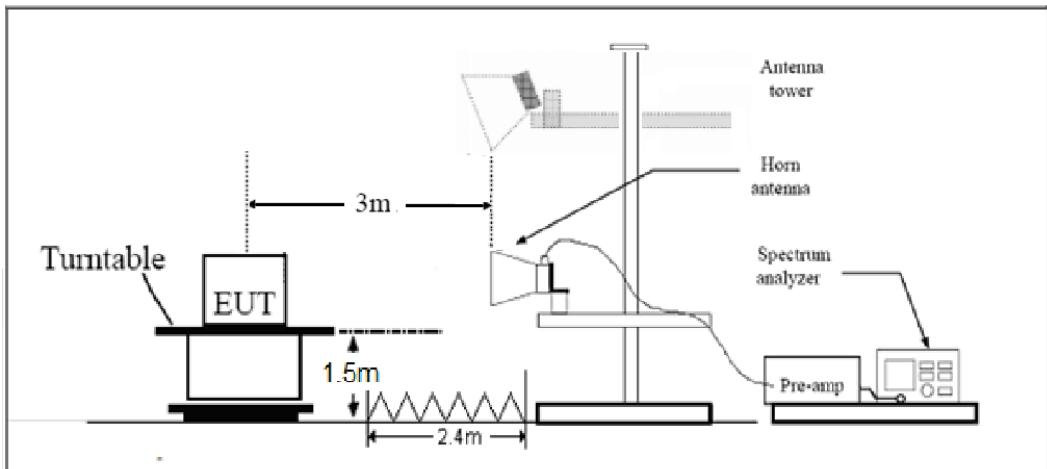

Note: Area side:2.4mX3.6m



Limits

Rule Part 27.53(m) $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.

Part 27.53(m) Limit	-25 dBm
---------------------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = \pm 1.96$, $U = \pm 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

LTE Band 41 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5181.8	-38.98	2.00	9.15	Horizontal	-31.83	-25.00	6.83	45
3	7775.6	-49.03	2.50	11.35	Horizontal	-40.18	-25.00	15.18	315
4	10371.5	-46.74	4.20	12.05	Horizontal	-38.89	-25.00	13.89	225
5	12969.4	-46.59	5.20	12.85	Horizontal	-38.94	-25.00	13.94	180
6	15569.3	-49.94	5.50	14.23	Horizontal	-41.21	-25.00	16.21	45
7	18171.2	--	--	--	--	--	--	--	--
8	20775.0	--	--	--	--	--	--	--	--
9	23380.9	--	--	--	--	--	--	--	--
10	25988.8	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 41 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5186.0	-43.61	2.00	10.15	Horizontal	-35.46	-25.00	10.46	90
3	7779.0	-50.79	2.50	11.35	Horizontal	-41.94	-25.00	16.94	0
4	10372.0	-44.45	4.20	12.05	Horizontal	-36.60	-25.00	11.60	45
5	12965.0	-47.55	5.20	14.85	Horizontal	-37.90	-25.00	12.90	225
6	15558.0	-49.23	5.50	13.23	Horizontal	-41.50	-25.00	16.50	315
7	18151.0	--	--	--	--	--	--	--	--
8	20744.0	--	--	--	--	--	--	--	--
9	23337.0	--	--	--	--	--	--	--	--
10	25930.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



6 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2020-05-18	2021-05-17
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2020-05-18	2021-05-17
Signal Analyzer	R&S	FSV30	100815	2019-12-15	2020-12-14
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2020-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2020-11-17
Horn Antenna	R&S	HF907	102723	2018-08-11	2021-08-10
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2021-06-19
Signal generator	R&S	SMB 100A	102594	2020-05-18	2021-05-17
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2020-05-18	2021-05-17
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2020-05-18	2021-05-17
RF Cable	Agilent	SMA 15cm	0001	2020-06-12	2020-12-11
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT*****