



# FCC Test Report

APPLICANT : Smawave Technology Co. ,Ltd  
EQUIPMENT : 5G ODU\_NA  
BRAND NAME : smawave  
MODEL NAME : SRE620-b  
FCC ID : 2AU8HSRE620-B  
STANDARD : 47 CFR Part 15 Subpart B  
CLASSIFICATION : Certification  
TEST DATE(S) : Apr. 27, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1. GENERAL DESCRIPTION ..... 5**

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 5

    1.5. Modification of EUT ..... 6

    1.6. Test Location ..... 6

    1.7. Test Software ..... 6

    1.8. Applicable Standards ..... 6

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 7**

    2.1. Test Mode ..... 7

    2.2. Connection Diagram of Test System ..... 7

    2.3. Support Unit used in test configuration and system ..... 8

    2.4. EUT Operation Test Setup ..... 8

**3. TEST RESULT ..... 9**

    3.1. Test of AC Conducted Emission Measurement ..... 9

    3.2. Test of Radiated Emission Measurement ..... 13

**4. LIST OF MEASURING EQUIPMENT ..... 17**

**5. MEASUREMENT UNCERTAINTY ..... 18**

**APPENDIX A. SETUP PHOTOGRAPHS**





## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 15.26 dB at 0.151 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 9.24 dB at 30.97 MHz

**Conformity Assessment Condition:**

The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1. General Description

## 1.1. Applicant

**Smawave Technology Co. ,Ltd**

3/F, Building 8, 1001 North Qinzhou Road , Xuhui District, Shanghai, China

## 1.2. Manufacturer

**Smawave Technology Co. ,Ltd**

3/F, Building 8, 1001 North Qinzhou Road , Xuhui District, Shanghai, China

## 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	5G ODU_NA
Brand Name	smawave
Model Name	SRE620-b
FCC ID	2AU8HSRE620-B
EUT supports Radios application	LTE/5G NR
IMEI Code	Conduction/Radiation: 863109050027833
HW Version	V1.0
SW Version	Codium_FW_5G_1.0.8

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 48 : 3550 MHz ~ 3700 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz
Rx Frequency	LTE Band 41 : 2496 MHz ~ 2690 MHz LTE Band 48 : 3550 MHz ~ 3700 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz
Antenna Type	WWAN : Fixed External Antenna
Type of Modulation	LTE: QPSK / 16QAM / 64QAM / 256QAM 5G NR: DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)



### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6. Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH04-KS	CN1257	314309

### 1.7. Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

## 2. Test Configuration of Equipment Under Test


### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1 : 5G N48 Rx + LAN Link + POE + Adapter
Radiated Emissions	Mode 1 : 5G N48 Rx + LAN Link + POE + Adapter

### 2.2.Connection Diagram of Test System

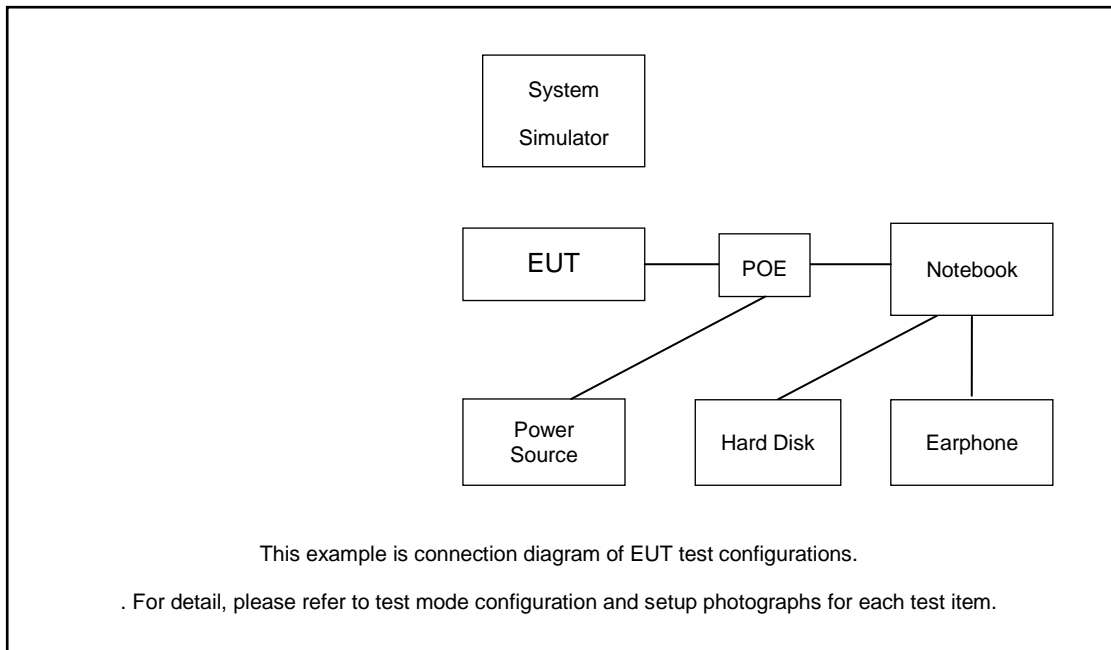

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

### 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	Earphone	Lenovo	P121	N/A	N/A	Unshielded,1.2m
4.	Hard Disk	WD	C6B	N/A	N/A	N/A
5.	RJ45 Cable	N/A	N/A	N/A	N/A	N/A

### 2.4. EUT Operation Test Setup

The EUT was in 5G NR idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the following programs installed in the EUT were programmed during the test.

1. LAN Link with notebook via RJ45 cable.





### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup

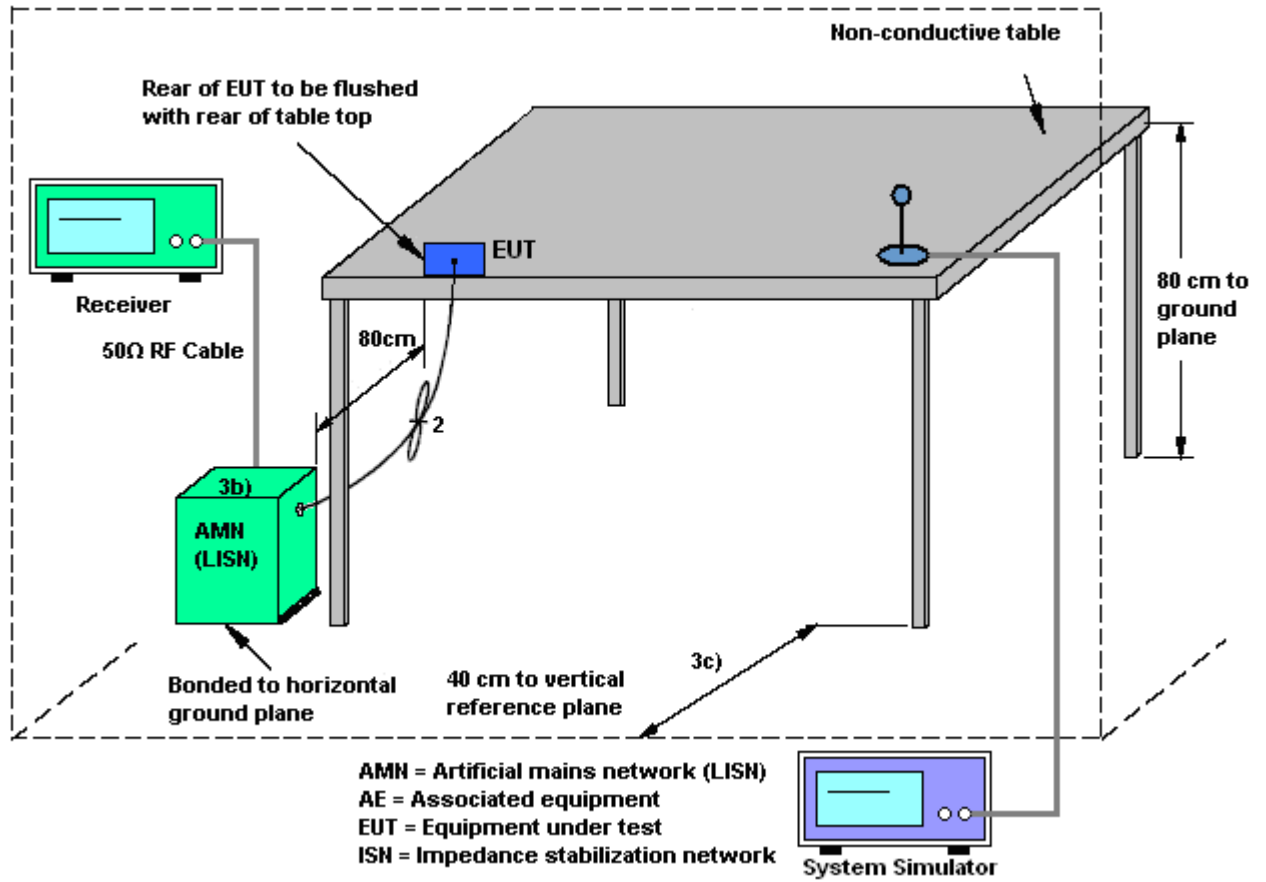



3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

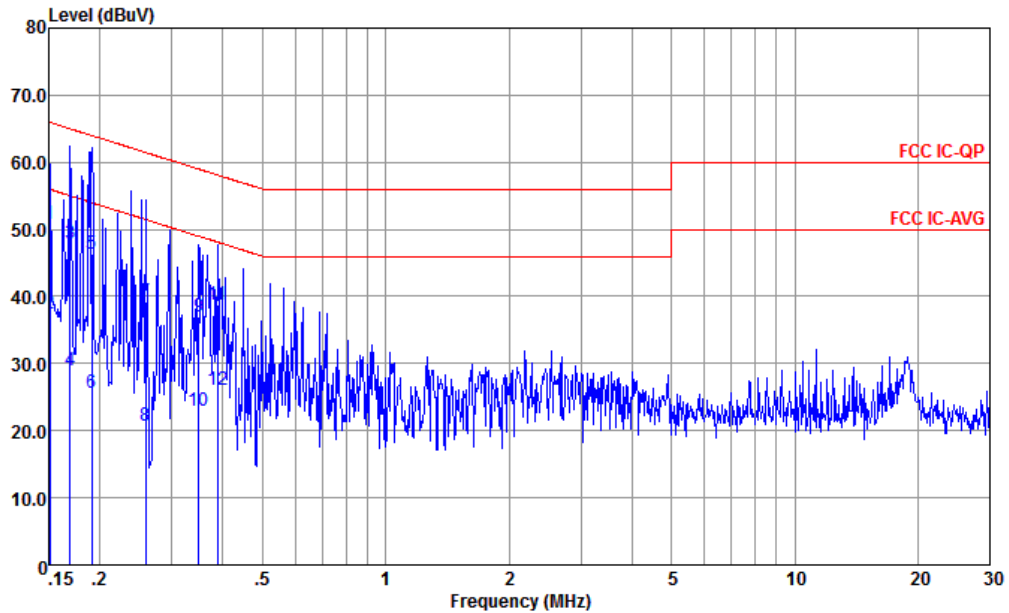


Site : CO01-KS  
 Condition : FCC IC-QP LISN-060105-LINE LINE  
 Project : (FC) 342001  
 mode : Mode 1  
 IMEI : 863109050027833 #2

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.151	50.70	-15.26	65.96	40.20	0.07	10.43	QP
2	0.151	37.40	-18.56	55.96	26.90	0.07	10.43	Average
3	0.169	47.97	-17.02	64.99	37.49	0.05	10.43	QP
4	0.169	28.97	-26.02	54.99	18.49	0.05	10.43	Average
5	0.191	46.25	-17.73	63.98	35.80	0.03	10.42	QP
6	0.191	25.65	-28.33	53.98	15.20	0.03	10.42	Average
7	0.259	39.32	-22.15	61.47	28.89	0.05	10.38	QP
8	0.259	20.62	-30.85	51.47	10.19	0.05	10.38	Average
9	0.348	36.96	-22.04	59.00	26.61	0.03	10.32	QP
10	0.348	22.86	-26.14	49.00	12.51	0.03	10.32	Average
11	0.387	38.82	-19.30	58.12	28.50	0.01	10.31	QP
12	0.387	26.12	-22.00	48.12	15.80	0.01	10.31	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

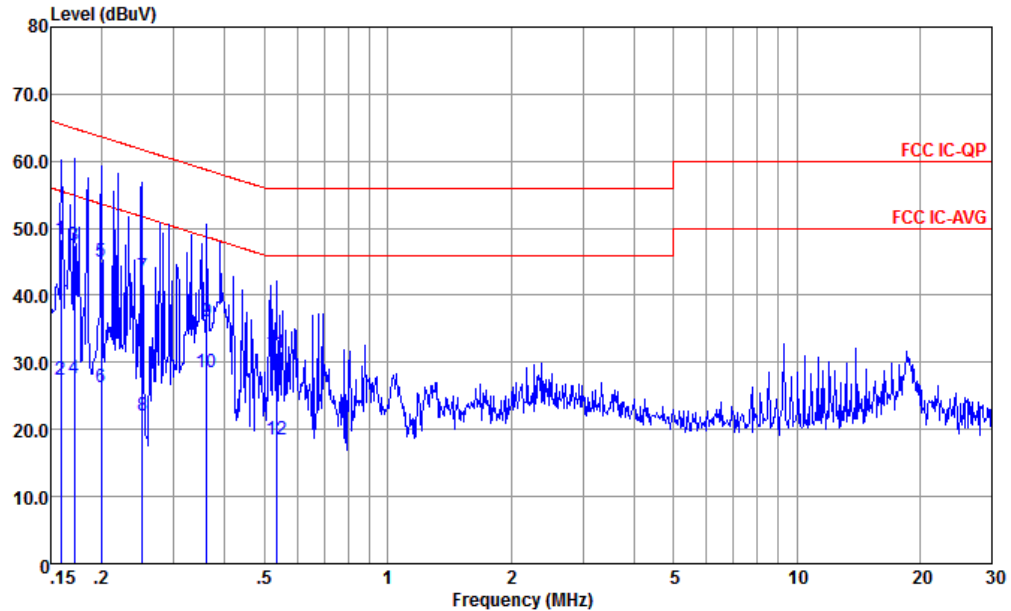

Site : CO01-KS  
 Condition : FCC IC-QP LISN-060105-NEUTRAL NEUTRAL  
 Project : (FC) 342001  
 mode : Mode 1  
 IMEI : 863109050027833 #2

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.159	48.26	-17.26	65.52	37.80	0.03	10.43	QP
2	0.159	27.36	-28.16	55.52	16.90	0.03	10.43	Average
3	0.171	47.36	-17.54	64.90	36.89	0.04	10.43	QP
4	0.171	27.66	-27.24	54.90	17.19	0.04	10.43	Average
5	0.200	44.97	-18.65	63.62	34.50	0.05	10.42	QP
6	0.200	26.37	-27.25	53.62	15.90	0.05	10.42	Average
7	0.251	42.87	-18.86	61.73	32.50	-0.01	10.38	QP
8	0.251	21.97	-29.76	51.73	11.60	-0.01	10.38	Average
9	0.361	36.06	-22.63	58.69	25.80	-0.06	10.32	QP
10	0.361	28.46	-20.23	48.69	18.20	-0.06	10.32	Average
11	0.535	31.32	-24.68	56.00	21.20	-0.08	10.20	QP
12	0.535	18.42	-27.58	46.00	8.30	-0.08	10.20	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


#### 3.2.3. Test Procedures

1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


- Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation (attitude) that maximizes the emissions.

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

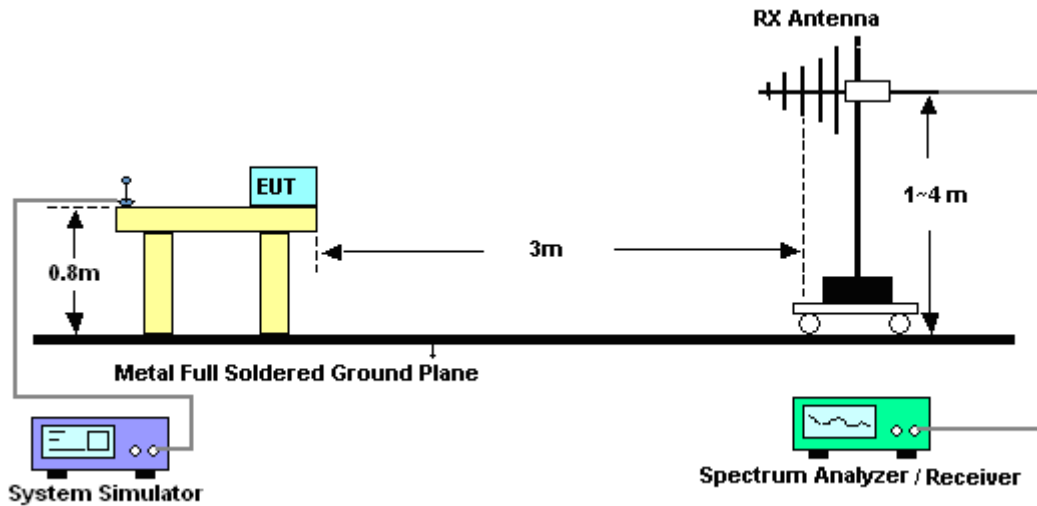


For radiated emissions above 1GHz

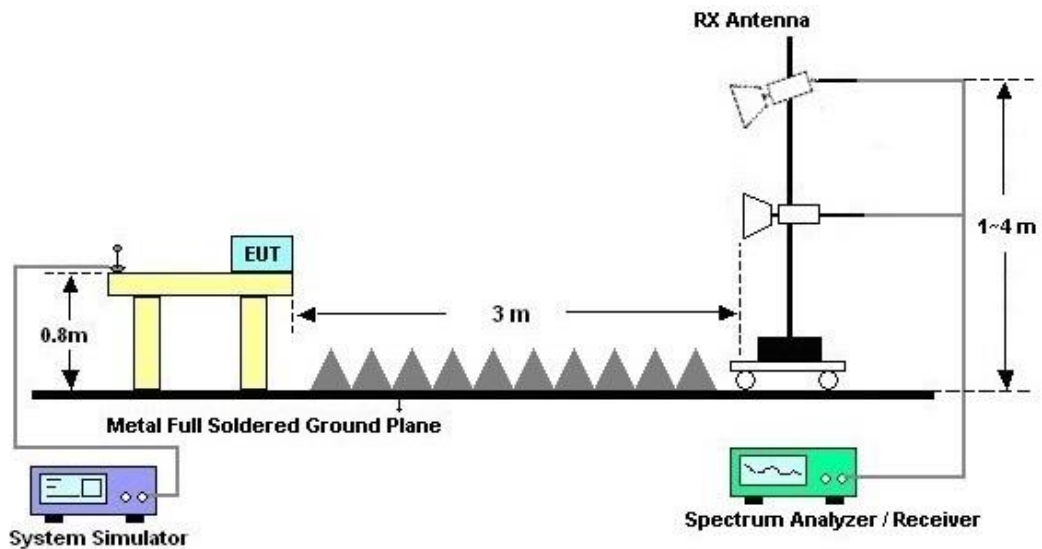



3.2.5. Test Result of Radiated Emission

Test Engineer :	Henry Li	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal

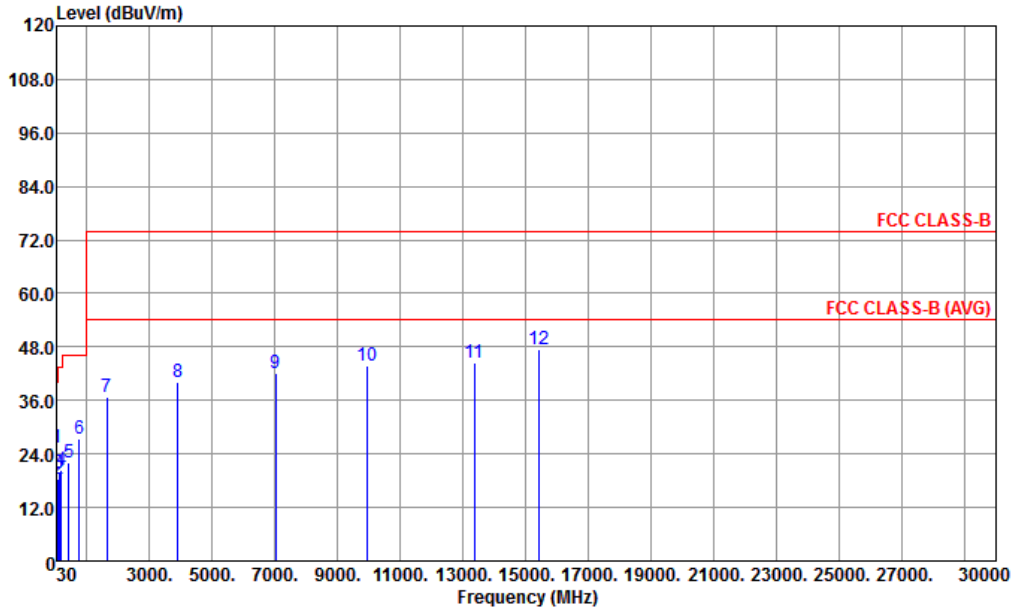


Site : 03CH04-KS  
 Condition : FCC CLASS-B 3m CBL6111D-44483 HORIZONTAL  
 Project : 342001  
 mode : 1  
 IMEI : 8631090500027833 #2

	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	30.00	25.34	40.00	-14.66	32.58	25.10	0.68	33.02	---	---	HORIZONTAL
2	96.93	18.38	43.50	-25.12	34.08	15.71	1.46	32.87	---	---	HORIZONTAL
3	120.21	19.83	43.50	-23.67	33.48	17.60	1.60	32.85	---	---	HORIZONTAL
4	187.14	20.42	43.50	-23.08	36.36	14.89	2.00	32.83	---	---	HORIZONTAL
5	420.91	22.08	46.00	-23.92	29.59	22.41	3.01	32.93	---	---	HORIZONTAL
6	753.62	27.48	46.00	-18.52	28.05	28.20	4.02	32.79	---	---	HORIZONTAL
7	1646.00	36.81	74.00	-37.19	65.41	28.74	5.95	63.29	---	---	HORIZONTAL
8	3890.00	40.10	74.00	-33.90	61.53	33.39	9.18	64.00	---	---	HORIZONTAL
9	7018.00	42.15	74.00	-31.85	56.62	36.51	12.46	63.44	---	---	HORIZONTAL
10	9942.00	43.84	74.00	-30.16	53.55	38.13	15.26	63.10	---	---	HORIZONTAL
11	13359.00	44.55	74.00	-29.45	50.80	39.98	17.46	63.69	---	---	HORIZONTAL
12	15433.00	47.39	74.00	-26.61	52.87	40.65	18.73	64.86	---	---	HORIZONTAL



Test Engineer :	Henry Li	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical

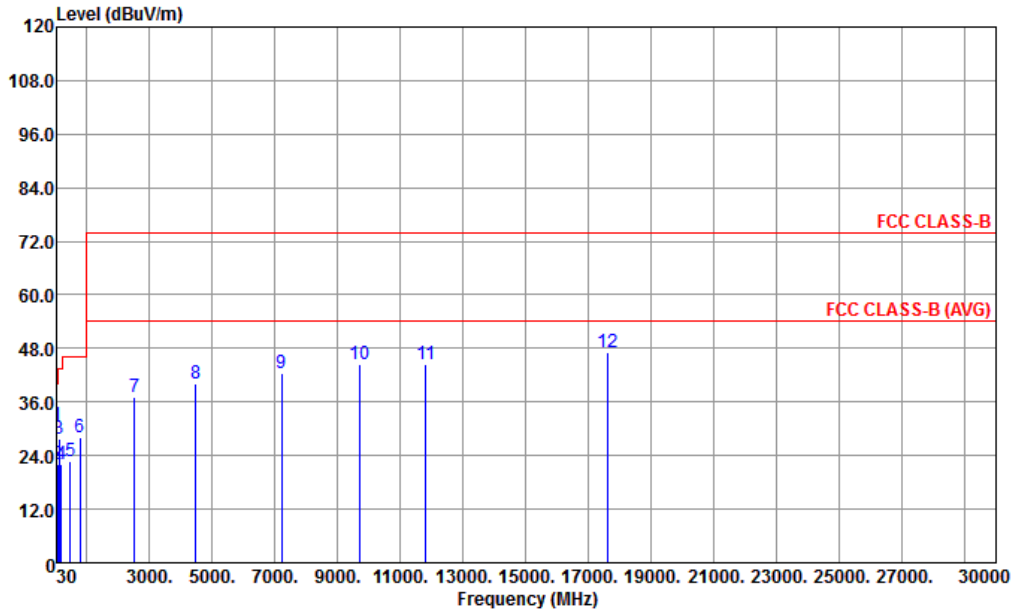

Site : 03CH04-KS  
 Condition : FCC CLASS-B 3m CBL6111D-44483 VERTICAL  
 Project : 342001  
 mode : 1  
 IMEI : 8631090500027833 #2

	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	30.97	30.76	40.00	-9.24	38.48	24.57	0.70	32.99	---	---	VERTICAL
2	63.95	22.01	40.00	-17.99	41.65	12.14	1.13	32.91	---	---	VERTICAL
3	103.72	27.63	43.50	-15.87	42.56	16.46	1.48	32.87	---	---	VERTICAL
4	186.17	22.08	43.50	-21.42	38.00	14.92	1.99	32.83	---	---	VERTICAL
5	478.14	22.79	46.00	-23.21	28.95	23.60	3.22	32.98	---	---	VERTICAL
6	782.72	28.24	46.00	-17.76	28.70	28.20	4.10	32.76	---	---	VERTICAL
7	2513.00	36.95	74.00	-37.05	61.96	31.20	7.37	63.58	---	---	VERTICAL
8	4485.00	40.11	74.00	-33.89	60.41	34.00	9.87	64.17	---	---	VERTICAL
9	7205.00	42.49	74.00	-31.51	56.93	36.54	12.67	63.65	---	---	VERTICAL
10	9721.00	44.36	74.00	-29.64	55.08	37.92	14.85	63.49	---	---	VERTICAL
11	11812.00	44.57	74.00	-29.43	51.23	38.76	16.42	61.84	---	---	VERTICAL
12	17626.00	46.99	74.00	-27.01	49.98	42.38	20.09	65.46	---	---	VERTICAL

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)





### 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 24, 2022	Apr. 27, 2023	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Apr. 27, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Apr. 27, 2023	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Apr. 27, 2023	Oct. 11, 2023	Conduction (CO01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 13, 2022	Apr. 27, 2023	Oct. 12, 2023	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 12, 2022	Apr. 27, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24, 2022	Apr. 27, 2023	May 23, 2023	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Oct. 16, 2022	Apr. 27, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	Apr. 27, 2023	Jan. 07, 2024	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2023	Apr. 27, 2023	Jan. 04, 2024	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	May 24, 2022	Apr. 27, 2023	May 23, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 12, 2022	Apr. 27, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Apr. 27, 2023	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Apr. 27, 2023	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Apr. 27, 2023	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



## 5. Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.94dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)-03CH08-KS

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.28dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)-03CH08-KS

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.90dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)-03CH08-KS

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.26dB
---	--------