

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230900159903

Page: 1 of 13

TEST REPORT

Application No.: KSCR2309001599AT

FCC ID: 2AU8HSRP620-B

Applicant: Smawave Technology Co. ,Ltd

Address of Applicant: 3/F, Building 8, 1001 North Qinzhou Road, Xuhui District, Shanghai, China

Manufacturer: Smawave Technology Co. ,Ltd

Address of Manufacturer: 3/F, Building 8, 1001 North Qinzhou Road, Xuhui District, Shanghai, China

Equipment Under Test (EUT):

EUT Name: 5G IP67 Ruggedized Router

Model No.: SRP620-b
Standard(s): FCC Part 96.47

FCC KDB 940660 D01 Part 96 CBRS Egpt v03

WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification

WINNF-18-IN-00178 CBRS End User Device as UUT Test Guidelines

Date of Receipt: 2023-09-12

Date of Test: 2023-09-17 to 2023-09-28

Date of Issue: 2023-10-08

Test Result: Pass*

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

^{*} In the configuration tested, the EUT complied with the standards specified above.



CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230900159903

Page: 2 of 13

Revision Record					
Version	Description	Date	Remark		
00	Original	2023-10-08	/		

Authorized for issue by:		
Tested By	Damon zhou	
	Damon Zhou / Project Engineer	
Approved By	Verry Hon	
	Terry Hou / Reviewer	



CCSEM-TRF-001 Rev. 02 Sep 01, 2023 Report No.: KSCR230900159903

Page: 3 of 13

2 Test Summary

Item	Standard	Test Case ID	Result
End User Device additional requirement	96.47	/	Pass

The UUT is an End User Device. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC Part 96.47

FCC KDB 940660 D01 Part 96 CBRS Eqpt v03

WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification

WINNF-18-IN-00178 CBRS End User Device as UUT Test Guidelines



CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230900159903

Page: 4 of 13

3 Contents

			Page
1	СО	OVER PAGE	1
2	Tes	st Summary	3
3		ntents	
J	CO	interits	
4	Ge	neral Information	5
	4.1	Details of E.U.T.	5
	4.2	Measurement Uncertainty	
	4.3	Description of Support Units	
	4.4	Test Location	
	4.5	Test Facility	6
	4.6	Deviation from Standards	
	4.7	Abnormalities from Standard Conditions	6
5	Eq	uipment List	7
6	Tes	st Method and Environment	8
	6.1	End User Device Conformance and Performance	g
	6.2	Test Environment	
	6.3	Test Requirement	
	6.4	Test Procedure	
	6.5	Test Setup	
	6.6	Test Result	
7	Т	at Catura Dhiata ayamba	40



CCSEM-TRF-001 Rev. 02 Sep 01, 2023 Report No.: KSCR230900159903

Page: 5 of 13

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 24V by AC/DC power adapter Adapter Model: TPA289B-24240-US Input:100-240V~50/60Hz 0.7A Output:DC 24V 1A
Sample Type:	Fixed production
EUT Type:	End user device
Transmitter Frequency Band:	5GNR: n48/n78
Transmitter Frequency Range:	3550~3700MHz
Antenna Type:	External Antenna
Hardware Version:	V1.0
Software Version:	SQXR60_V1.0
Antenna Gain:	1.29dBi (Provided by manufacturer)

4.2 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	± 7.25 x 10 ⁻⁸
2	RF conducted power	± 0.75dB
3	Temperature test	± 1°C
4	Humidity test	± 3%
5	Supply voltages	± 1.5%
6	Time	± 3%

4.3 Description of Support Units

For 5GNR test:

Description	Manufacturer	Model No.	Serial No.
DP	Mavenir	Dell PowerEdge R740	2SVG243
Base station	Mavenir Systems, Inc.	MU44UA (FCC ID: 2AWAS-MU44UA)	LX2151MU44UA000007



CCSEM-TRF-001 Rev. 02 Sep 01, 2023 Report No.: KSCR230900159903

Page: 6 of 13

4.4 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).

2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

A2LA

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

• FCC

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

• ISED

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

VCCI

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



CCSEM-TRF-001 Rev. 02 Sep 01, 2023 Report No.: KSCR230900159903

Page: 7 of 13

5 Equipment List

Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
Laptop	Lenovo	Y510P	HFL000026	N/A	N/A
Spectrum Analyzer	KEYSIGHT	N9020A	KUS2001M00 1-2	2023/8/24	2024/8/23
Shield Room	YanChuang	N/A	KS301115-2	N/A	N/A
Coaxial Cable	Thermax	N/A	13	2023/9/15	2024/9/14
Attenuator	Mini-Circuits	NAT-6-2W	15542-1	N.C.R.	N.C.R.
Humidity / Temperature Indicator	Renke	RS-WS-N01- 6J	1032844	2023/3/22	2024/3/21



CCSEM-TRF-001 Rev. 02 Sep 01, 2023 Report No.: KSCR230900159903

Page: 8 of 13

6 Test Method and Environment

6.1 End User Device Conformance and Performance

Test Requirement: FCC Part 96.47

Test Method: WINNF-18-IN-00178 CBRS End User Device as UUT Test Guidelines

6.2 Test Environment

Environmental Conditions: 25°C, 65%RH

6.3 Test Requirement

FCC Part 96.47

- a). End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.
- b). An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.



CCSEM-TRF-001 Rev. 02 Sep 01, 2023 Report No.: KSCR230900159903

Page: 9 of 13

6.4 Test Procedure

Following procedure can be done by applying WINNF-TS-0122-V1.0.2 CBRS CBSD Test Specification, use the certified 5GNR Base station CBSD (FCC ID: 2AWAS-MU44UA) as companion device to show compliance with Part 96.47 requirement for End User Device (EUD):

For 5G NR:


- 1. Setup with frequency 3550-3650MHz and power level 14dBm/MHz;
- 2. Enable CBSD service;
- 3. Check EUD Tx Frequency and power;
- 4. Disable AP service;
- 5. Check EUD stops transmission within 10seconds;
- 6. Setup with 3600-3700MHz & power level 8dBm/MHz;
- 7. Enable CBSD service;
- 8. Check EUD Tx Frequency and power;
- 9. Disable CBSD service;
- 10. Check EUD stops transmission within 10seconds.



CCSEM-TRF-001 Rev. 02 Sep 01, 2023 Report No.: KSCR230900159903

Page: 10 of 13

6.5 Test Setup

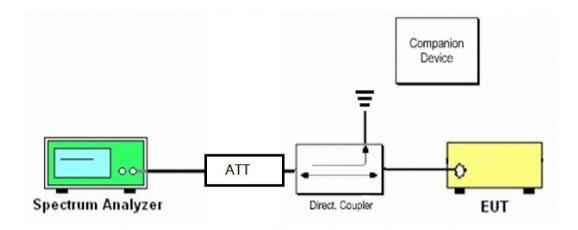

For 5G NR:

End User Device as UUT, the companion device is certified CBRS (FCC ID: 2AWAS-MU44UA)



CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230900159903


Page: 11 of 13

6.6 Test Result

For 5GNR

[Step 1] Setup with frequency 3550-3650MHz and power level 14dBm/MHz

[Step 3] Check EUD Tx Frequency and power

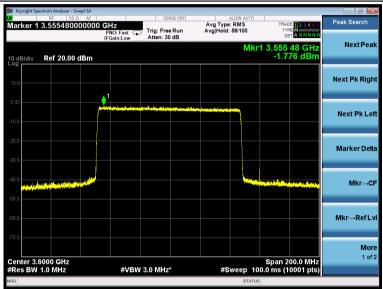

EIRP PSD=-1.776+2.19+6=6.414dBm/MHz, Antenna gain is 2.19dBi, the path loss is 6dB

[Step 5] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.






CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR230900159903

Page: 12 of 13

[Step 6] Setup with frequency 3600-3700MHz and power level 8dBm/MHz

[Step 8] Check EUD Tx Frequency and power

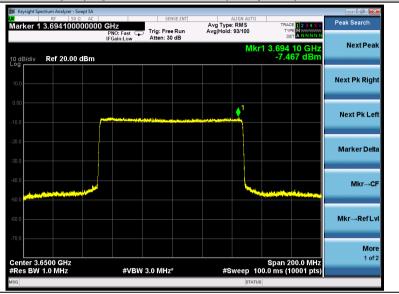

EIRP PSD=-7.467+2.19+6=0.723dBm/MHz, Antenna gain is 2.19dBi, the path loss is 6dB [Step 10] EUD stops transmission within 10 seconds of receiving instructions from its associated CBSD.





CCSEM-TRF-001 Rev. 02 Sep 01, 2023 Report No.: KSCR230900159903

Page: 13 of 13

7 Test Setup Photographs

Refer to the < Test Setup photos>.

- End of the Report -