

FCC Radio Test Report

FCC ID: 2AU8R-L107

Original Grant

Report No. : TB-FCC170303
Applicant : Shenzhen BOJINGnet Technology Co., Ltd
Equipment Under Test (EUT)
EUT Name : BOJINGnet L107 IOT Router Module
Model No. : L107
Series Model No. : N/A
Brand Name : N/A
Receipt Date : 2019-11-12
Test Date : 2019-11-12 to 2019-11-25
Issue Date : 2019-11-26
Standards : FCC Part 15, Subpart C (15.247 :2019)
Test Method : ANSI C63.10: 2013
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above,
The EUT technically complies with the FCC and IC requirements

Test/Witness Engineer : Garen Garen

Engineer Supervisor : Ivan Su Ivan Su

Engineer Manager : Ray Lai Ray Lai

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS.....	2
1. GENERAL INFORMATION ABOUT EUT	5
1.1 Client Information.....	5
1.2 General Description of EUT (Equipment Under Test)	5
1.3 Block Diagram Showing the Configuration of System Tested.....	6
1.4 Description of Support Units	7
1.5 Description of Test Mode.....	7
1.6 Description of Test Software Setting	8
1.7 Measurement Uncertainty	8
1.8 Test Facility.....	9
2. TEST SUMMARY	10
3. TEST EQUIPMENT.....	11
4. CONDUCTED EMISSION TEST	11
4.1 Test Standard and Limit.....	12
4.2 Test Setup.....	12
4.3 Test Procedure.....	12
4.4 EUT Operating Mode	13
4.5 Test Data.....	13
5. RADIATED EMISSION TEST	14
5.1 Test Standard and Limit.....	14
5.2 Test Setup.....	15
5.3 Test Procedure.....	16
5.4 EUT Operating Condition	16
5.5 Test Data.....	17
6. RESTRICTED BANDS REQUIREMENT	18
6.1 Test Standard and Limit.....	18
6.2 Test Setup.....	18
6.3 Test Procedure.....	18
6.4 EUT Operating Condition	19
6.5 Test Data.....	19
7. BANDWIDTH TEST.....	20
7.1 Test Standard and Limit.....	20
7.2 Test Setup.....	20
7.3 Test Procedure.....	20
7.4 EUT Operating Condition	20
7.5 Test Data.....	20
8. PEAK OUTPUT POWER TEST.....	21
8.1 Test Standard and Limit.....	21
8.2 Test Setup.....	21

8.3 Test Procedure.....	21
8.4 EUT Operating Condition	21
8.5 Test Data.....	21
9. POWER SPECTRAL DENSITY TEST	22
9.1 Test Standard and Limit.....	22
9.2 Test Setup.....	22
9.3 Test Procedure.....	22
9.4 EUT Operating Condition	22
9.5 Test Data.....	22
10. ANTENNA REQUIREMENT.....	23
10.1 Standard Requirement.....	23
10.2 Antenna Connected Construction	23
ATTACHMENT A-- CONDUCTED EMISSION TEST DATA	24
ATTACHMENT C-- RESTRICTED BANDS REQUIREMENT AND BAND-EDGE TEST DATA	43
ATTACHMENT D-- BANDWIDTH TEST DATA.....	63
ATTACHMENT E-- PEAK OUTPUT POWER TEST DATA.....	71
ATTACHMENT F-- POWER SPECTRAL DENSITY TEST DATA.....	75

1. General Information about EUT

1.1 Client Information

Applicant	:	Shenzhen BOJINGnet Technology Co., Ltd
Address	:	3a11, floor 4, building C, Baoyuan Huafeng headquarters economic building, Xixiang Avenue, Xixiang street, Baoan District, Shenzhen, China
Manufacturer	:	Shenzhen BOJINGnet Technology Co., Ltd
Address	:	3a11, floor 4, building C, Baoyuan Huafeng headquarters economic building, Xixiang Avenue, Xixiang street, Baoan District, Shenzhen, China

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	BOJINGnet L107 IOT Router Module	
Models No.	:	L107	
Model Difference	:	N/A	
Product Description	:	Operation Frequency:	802.11b/g/n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
		Number of Channel:	802.11b/g/n(HT20):11 channels see note(3) 802.11n(HT40):7 channels see note(3)
		RF Output Power:	802.11b: 15.62 dBm 802.11g: 14.47 dBm 802.11n (HT20): 13.80 dBm 802.11n (HT40): 12.60 dBm
		Modulation Type:	802.11b: DSSS(CCK, DQPSK, DBPSK) 802.11g/n: OFDM(BPSK,QPSK,16QAM, 64QAM)
		Antenna Gain:	3dBi Wire Antenna
Power Supply	:	Voltage Input: DC 3.3V	
Software Version	:	1.0	
Hardware Version	:	1.1	
Connecting I/O Port(S)	:	Please refer to the User's Manual	
Remark	:	The antenna gain provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.	

Note:

- (1) This Test Report is FCC Part 15.247 for 802.11b/g/n, the test procedure follows the FCC KDB 558074 D01 DTS Meas Guidance v05.

(2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

(3) Channel List:


Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452
02	2417	06	2437	10	2457
03	2422	07	2442	11	2462
04	2427	08	2447		

Note: CH 01~CH 11 for 802.11b/g/n(HT20)
CH 03~CH 9 for 802.11n(HT40)

(4) The Antenna information about the equipment is provided by the applicant.

1.3 Block Diagram Showing the Configuration of System Tested

TX Mode

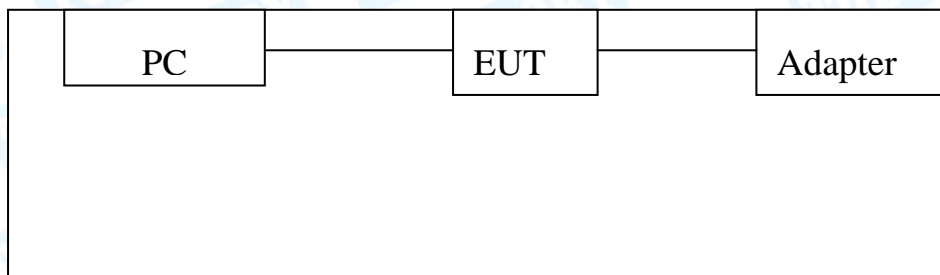

1.4 Description of Support Units

Equipment Information				
Name	Model	FCC ID/VOC	Manufacturer	Note
ADAPTER	SAN-05015	----	/	Accessories
Test board	L100_POWER_REV1.1	----	Shenzhen BOJINGnet Technology Co., Ltd	Accessories

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	Power Supply with TX B Mode

For Radiated Test	
Final Test Mode	Description
Mode 2	TX Mode B Mode Channel 01/06/11
Mode 3	TX Mode G Mode Channel 01/06/11
Mode 4	TX Mode N(HT20) Mode Channel 01/06/11
Mode 5	TX Mode N(HT40) Mode Channel 03/06/09

Note:

- For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.
According to ANSI C63.10 standards, the measurements are performed at the highest, Middle, lowest available channels, and the worst case data rate as follows:
 - 802.11b Mode: CCK (1 Mbps)
 - 802.11g Mode: OFDM (6 Mbps)
 - 802.11n (HT20) Mode: MCS 0 (6.5 Mbps)
 - 802.11n (HT40) Mode: MCS 0 (13 Mbps)
- During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- The EUT is mobile unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel&Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN.

Test Software Version	n/a		
Channel	CH 01	CH 06	CH 11
IEEE 802.11b DSSS	15	15	15
IEEE 802.11g OFDM	17	17	17
IEEE 802.11n (HT20)	17	17	17
Test Software Version	n/a		
Channel	CH 03	CH 06	CH 09
IEEE 802.11n (HT40)	18	18	18

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz	± 3.42 dB
	150kHz to 30MHz	± 3.42 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.40 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB

1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01. FCC Accredited Test Site Number: 854351.

IC Registration No.: (11950A-1)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

2. Test Summary

FCC Part 15 Subpart C(15.247)/ RSS 247 Issue 2				
Standard Section		Test Item	Judgment	Remark
FCC	IC			
15.203	/	Antenna Requirement	PASS	N/A
15.207	RSS-GEN 7.2.4	Conducted Emission	PASS	N/A
15.205	RSS-GEN 7.2.2	Restricted Bands	PASS	N/A
15.247(a)(2)	RSS 247 5.2 (1)	6dB Bandwidth	PASS	N/A
15.247(b)	RSS 247 5.4 (4)	Peak Output Power	PASS	N/A
15.247(e)	RSS 247 5.2 (2)	Power Spectral Density	PASS	N/A
15.247(d)	RSS 247 5.5	Band Edge	PASS	N/A
15.247(d)& 15.209	RSS 247 5.5	Transmitter Radiated Spurious Emission	PASS	N/A

Note: “/” for no requirement for this test item.
N/A is an abbreviation for Not Applicable.

Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
RF Conducted Measurement	MTS-8310	MWRfTest	V2.0.0.0

3. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jul. 13, 2019	Jul. 12, 2020
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 13, 2019	Jul. 12, 2020
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 13, 2019	Jul. 12, 2020
LISN	Rohde & Schwarz	ENV216	101131	Jul. 13, 2019	Jul. 12, 2020
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 13, 2019	Jul. 12, 2020
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul. 13, 2019	Jul. 12, 2020
Spectrum Analyzer	Rohde & Schwarz	FSVR	1311.006K40-10094 5-DH	Feb. 10, 2019	Feb. 09, 2020
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Jan. 27, 2019	Jan. 26, 2020
Bilog Antenna	ETS-LINDGREN	3142E	00117542	Jan. 27, 2019	Jan. 26, 2020
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar.03, 2019	Mar. 02, 2020
Horn Antenna	ETS-LINDGREN	3117	00143209	Mar.03, 2019	Mar. 02, 2020
Horn Antenna	ETS-LINDGREN	BBHA 9170	BBHA9170582	Mar.03, 2019	Mar. 02, 2020
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jul. 13, 2019	Jul. 12, 2020
Pre-amplifier	Sonoma	310N	185903	Mar.04, 2019	Mar. 03, 2020
Pre-amplifier	HP	8449B	3008A00849	Mar.03, 2019	Mar. 02, 2020
Pre-amplifier	EMCI	EMC02325	980217	Mar.03, 2019	Mar. 02, 2020
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar.03, 2019	Mar. 02, 2020
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 13, 2019	Jul. 12, 2020
Spectrum Analyzer	Rohde & Schwarz	ESCI	100010/007	Jul. 13, 2019	Jul. 12, 2020
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 16, 2019	Sep. 15, 2020
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 16, 2019	Sep. 15, 2020
Analog Signal Generator	Agilent	N5181A	MY50141953	Sep. 16, 2019	Sep. 15, 2020
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO26	Sep. 16, 2019	Sep. 15, 2020
	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO29	Sep. 16, 2019	Sep. 15, 2020
	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO31	Sep. 16, 2019	Sep. 15, 2020
	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO33	Sep. 16, 2019	Sep. 15, 2020

4. Conducted Emission Test

4.1 Test Standard and Limit

4.1.1 Test Standard

FCC Part 15.207

4.1.2 Test Limit

Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50


Notes:

(1) *Decreasing linearly with logarithm of the frequency.

(2) The lower limit shall apply at the transition frequencies.

(3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2 Test Setup

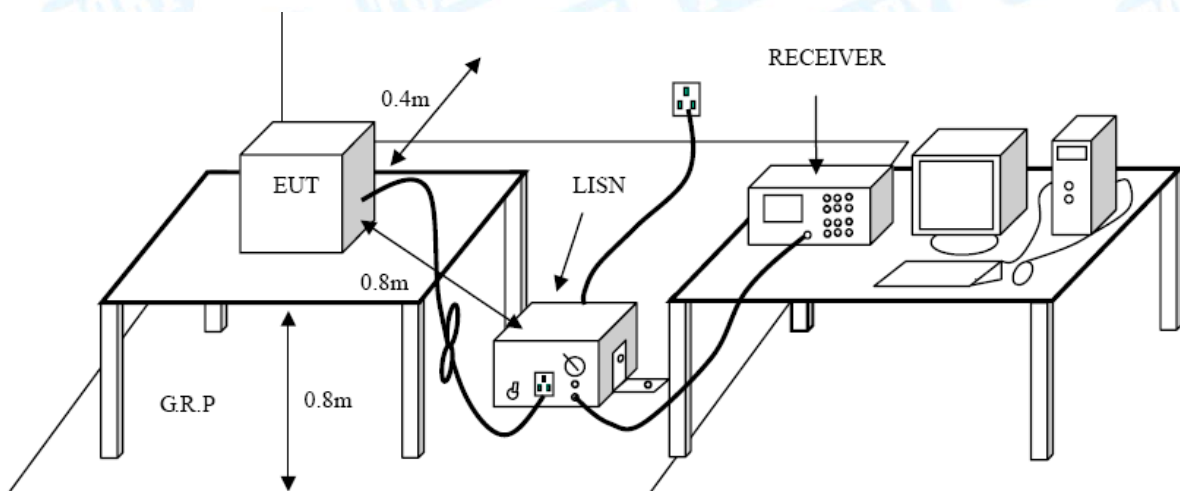

4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

4.4 EUT Operating Mode

Please refer to the description of test mode.

4.5 Test Data

Please refer to the Attachment A.

5. Radiated Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard

FCC Part 15.209

5.1.2 Test Limit

Radiated Emission Limits (9 kHz~1000 MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance of 3m (dBuV/m)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)


5.2 Test Setup

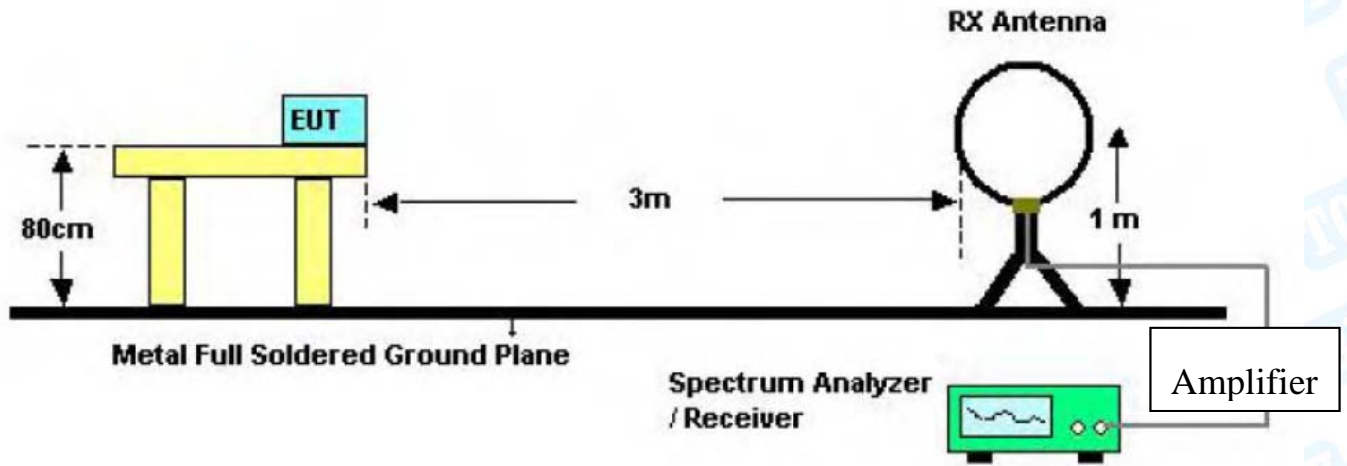

Below 30MHz Test Setup

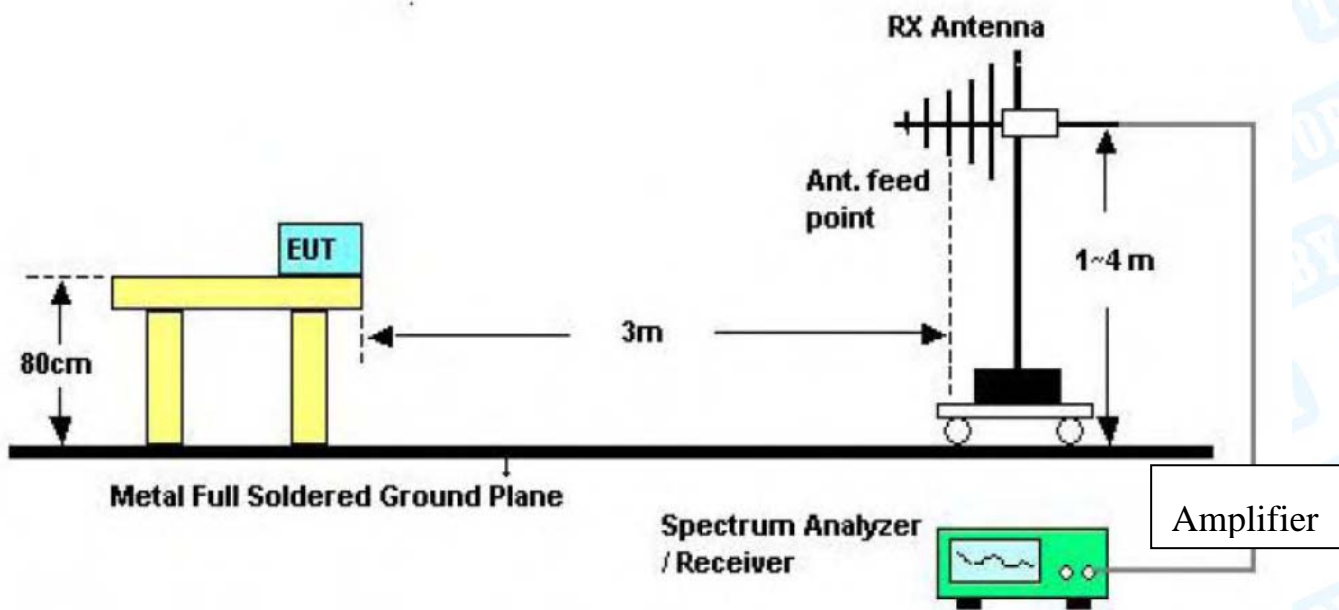

Below 1000MHz Test Setup

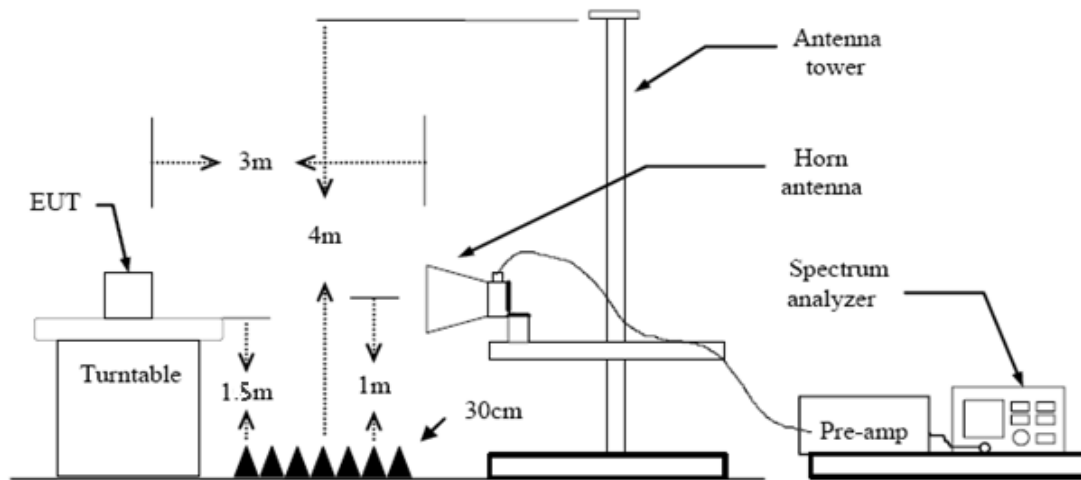

Above 1GHz Test Setup

5.3 Test Procedure

- (1) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency Below 1GHz. The EUT was placed on a rotating 0.8m high above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

5.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

5.5 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Please refer to the Attachment B.

6. Restricted Bands Requirement

6.1 Test Standard and Limit

6.1.1 Test Standard

FCC Part 15.247(d)


FCC Part 15.209

FCC Part 15.205

6.1.2 Test Limit

Restricted Frequency Band (MHz)	Distance of 3m (dBuV/m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

6.2 Test Setup

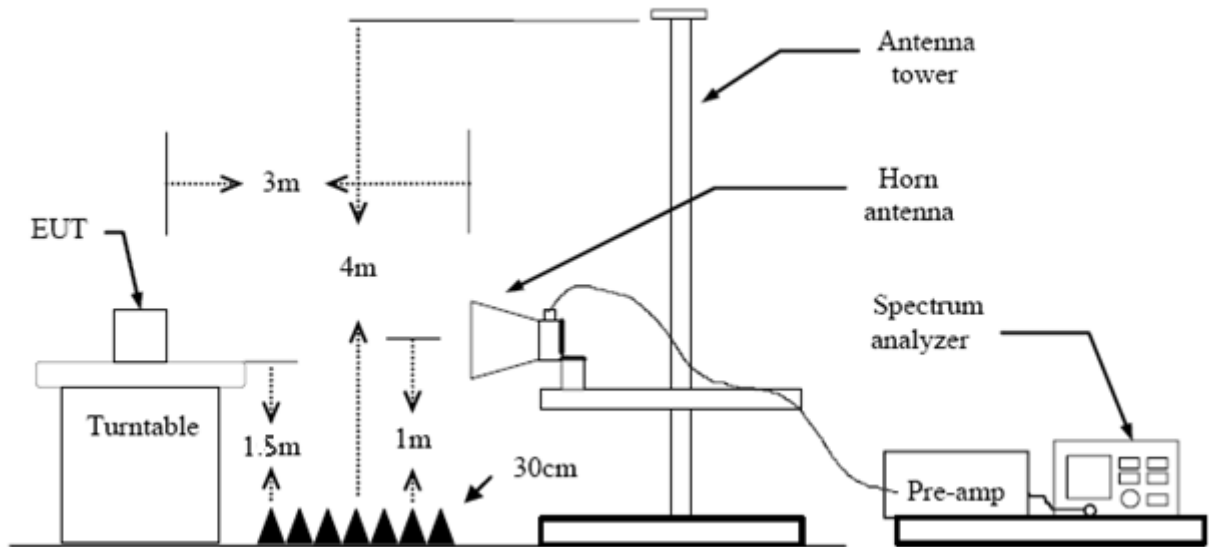

6.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency below 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.

- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

6.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

6.5 Test Data

Please refer to the Attachment C.

7. Bandwidth Test

7.1 Test Standard and Limit


7.1.1 Test Standard

FCC Part 15.247 (a)(2)

7.1.2 Test Limit

FCC Part 15 Subpart C(15.247)/RSS-210		
Test Item	Limit	Frequency Range(MHz)
Bandwidth	≥ 500 KHz (6dB bandwidth)	2400~2483.5

7.2 Test Setup

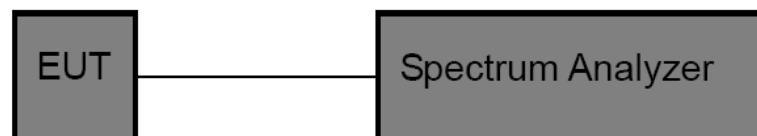

7.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst -case (i.e the widest) bandwidth.
- (3) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:100 kHz, and Video Bandwidth:300 kHz, Detector: Peak, Sweep Time set auto.

7.4 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, Digital photo framesdle and high channel for the test.

7.5 Test Data

Please refer to the Attachment D.

8. Peak Output Power Test

8.1 Test Standard and Limit


8.1.1 Test Standard

FCC Part 15.247 (b)

8.1.2 Test Limit

FCC Part 15 Subpart C(15.247)/RSS-210		
Test Item	Limit	Frequency Range(MHz)
Peak Output Power	1 Watt or 30 dBm	2400~2483.5

8.2 Test Setup

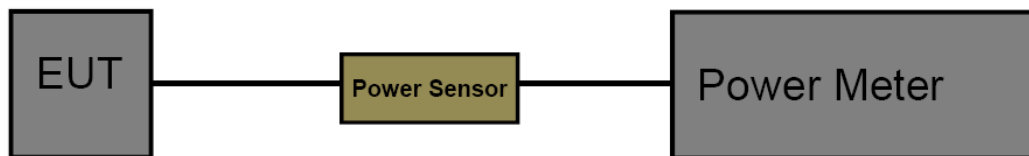

8.3 Test Procedure

The measurement is according to section 9.1.2 of KDB 558074 D01 DTS Meas Guidance v05. The EUT was connected to RF power meter via a broadband power sensor as show the block above. The power sensor video bandwidth is greater than or equal to the DTS bandwidth of the equipment.

8.4 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

8.5 Test Data

Please refer to the Attachment E.

9. Power Spectral Density Test

9.1 Test Standard and Limit


9.1.1 Test Standard

FCC Part 15.247 (e)

9.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5

9.2 Test Setup

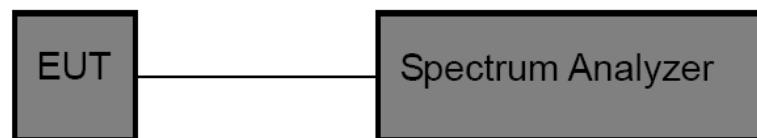

9.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser center frequency to DTS channel center frequency.
- (3) Set the span to 1.5 times the DTS bandwidth.
- (4) Set the RBW to: 3 kHz
- (5) Set the VBW to: 10 kHz
- (6) Detector: peak
- (7) Sweep time: auto
- (8) Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

9.4 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, Digital photo framesdle and high channel for the test.

9.5 Test Data

Please refer to the Attachment F.

10. Antenna Requirement

10.1 Standard Requirement

10.1.1 Standard

FCC Part 15.203

10.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

10.2 Antenna Connected Construction

The gains of the antenna used for transmitting is 3dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.


Result

The EUT antenna is a Wire Antenna. It complies with the standard requirement.

Antenna Type
<input type="checkbox"/> Permanent attached antenna
<input checked="" type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna

Attachment A-- Conducted Emission Test Data


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Terminal:	Line		
Test Mode:	Charging with TX B Mode		
Remark:	Only worse case is reported		

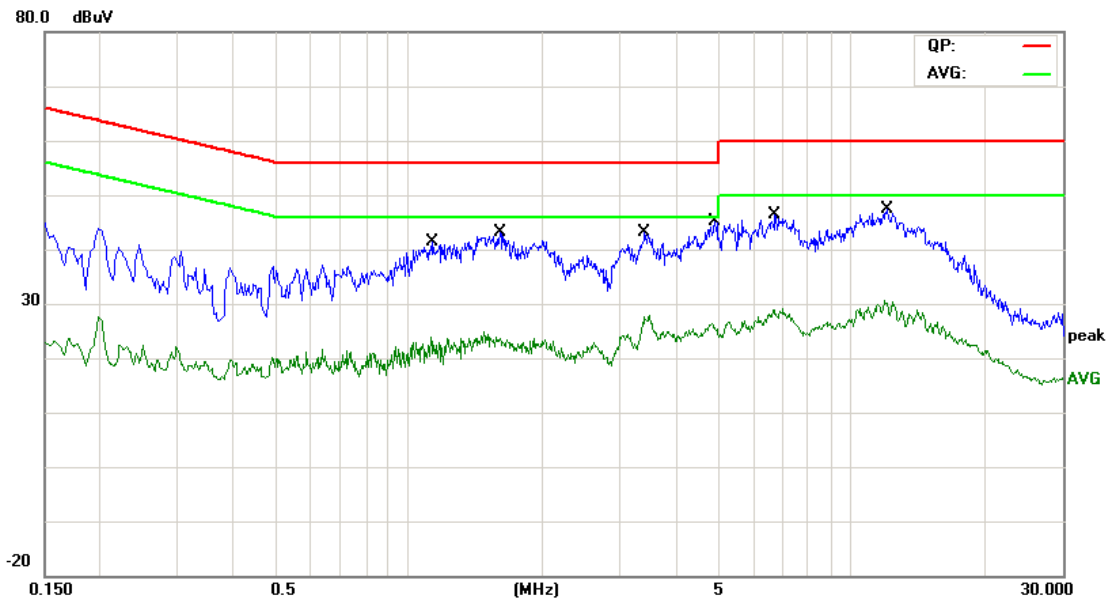

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		1.1300	25.92	9.66	35.58	56.00	-20.42	QP
2		1.1300	11.70	9.66	21.36	46.00	-24.64	AVG
3	*	1.6060	27.54	9.85	37.39	56.00	-18.61	QP
4		1.6060	11.94	9.85	21.79	46.00	-24.21	AVG
5		3.4100	26.33	9.85	36.18	56.00	-19.82	QP
6		3.4100	15.09	9.85	24.94	46.00	-21.06	AVG
7		4.9060	27.39	9.86	37.25	56.00	-18.75	QP
8		4.9060	13.97	9.86	23.83	46.00	-22.17	AVG
9		6.7140	28.53	9.83	38.36	60.00	-21.64	QP
10		6.7140	15.77	9.83	25.60	50.00	-24.40	AVG
11		12.0219	30.45	9.82	40.27	60.00	-19.73	QP
12		12.0219	18.03	9.82	27.85	50.00	-22.15	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Terminal:	Neutral		
Test Mode:	Charging with TX B Mode		
Remark:	Only worse case is reported		

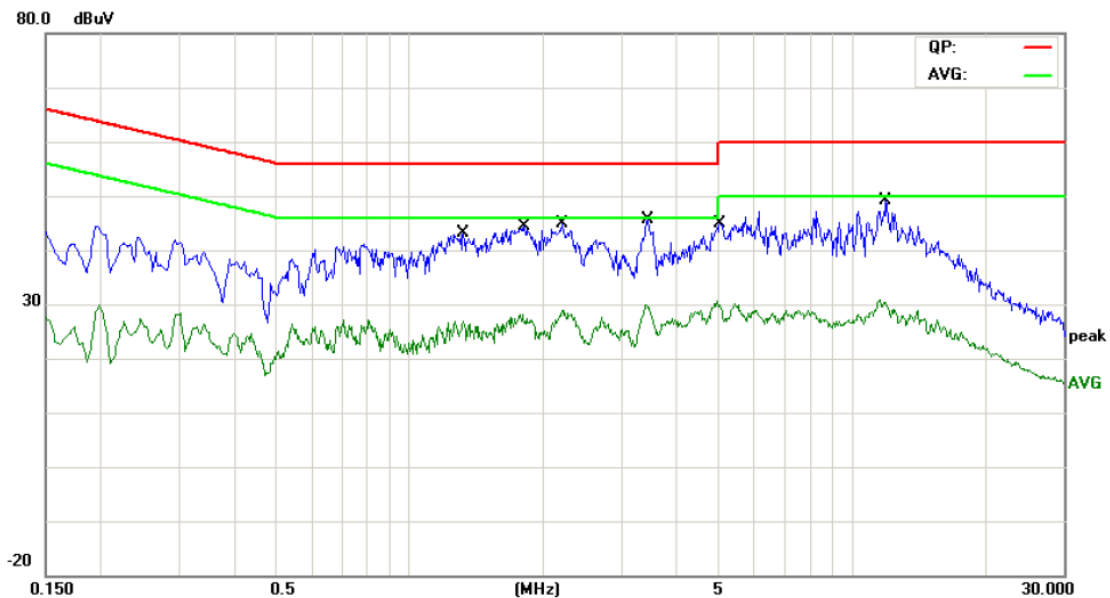

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		1.3180	27.81	9.70	37.51	56.00	-18.49	QP
2		1.3180	16.08	9.70	25.78	46.00	-20.22	AVG
3		1.8140	28.44	9.85	38.29	56.00	-17.71	QP
4		1.8140	16.26	9.85	26.11	46.00	-19.89	AVG
5		2.2100	28.95	9.85	38.80	56.00	-17.20	QP
6		2.2100	17.63	9.85	27.48	46.00	-18.52	AVG
7		3.4500	25.39	9.85	35.24	56.00	-20.76	QP
8	*	3.4500	19.05	9.85	28.90	46.00	-17.10	AVG
9		5.0060	28.59	9.82	38.41	60.00	-21.59	QP
10		5.0060	18.26	9.82	28.08	50.00	-21.92	AVG
11		11.8700	29.37	9.86	39.23	60.00	-20.77	QP
12		11.8700	18.32	9.86	28.18	50.00	-21.82	AVG

Emission Level= Read Level+ Correct Factor

Attachment B-- Radiated Emission Test Data


9KHz~30MHz

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

30MHz~1GHz

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2437MHz		
Remark:	Only worse case is reported		

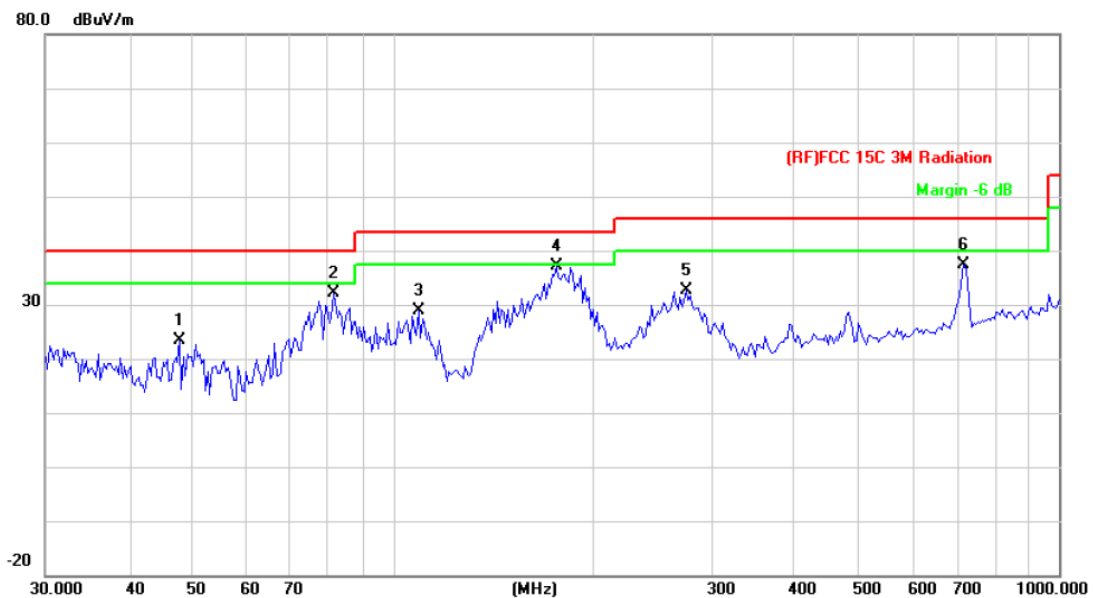


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		47.6586	45.96	-22.56	23.40	40.00	-16.60	QP
2		81.2117	54.54	-22.49	32.05	40.00	-7.95	QP
3		109.0286	51.44	-22.45	28.99	43.50	-14.51	QP
4	*	175.6516	57.34	-20.29	37.05	43.50	-6.45	QP
5		275.1570	49.16	-16.52	32.64	46.00	-13.36	QP
6		719.1995	43.82	-6.52	37.30	46.00	-8.70	QP

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2437MHz		
Remark:	Only worse case is reported		

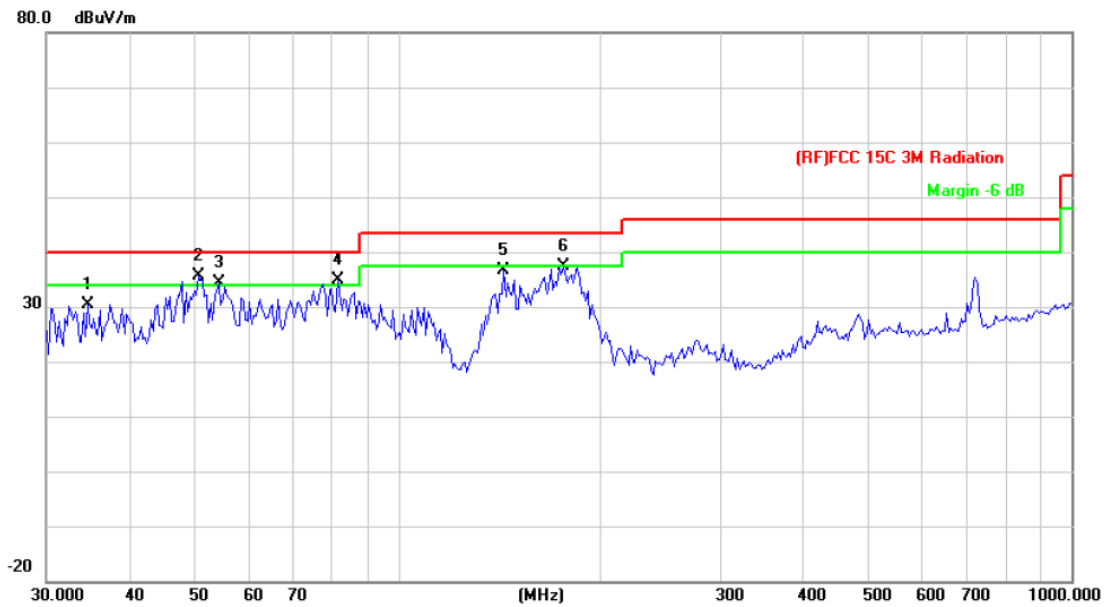

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		34.5173	46.76	-16.41	30.35	40.00	-9.65	QP
2	*	50.4089	58.91	-23.40	35.51	40.00	-4.49	QP
3	!	54.0711	58.07	-23.80	34.27	40.00	-5.73	QP
4	!	81.2117	57.28	-22.49	34.79	40.00	-5.21	QP
5		143.3261	58.75	-22.14	36.61	43.50	-6.89	QP
6		175.6516	57.76	-20.29	37.47	43.50	-6.03	QP

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

Above 1GHz

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2412MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		4824.022	41.42	14.55	55.97	74.00	-18.03	peak
2	*	4824.144	27.42	14.55	41.97	54.00	-12.03	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4824.125	29.87	14.55	44.42	54.00	-9.58	AVG
2		4824.256	41.87	14.55	56.42	74.00	-17.58	peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2437MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		4874.155	42.62	14.86	57.48	74.00	-16.52	peak
2	*	4874.253	28.92	14.86	43.78	54.00	-10.22	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2437MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		4872.352	43.21	14.85	58.06	74.00	-15.94	peak
2	*	4872.741	29.32	14.85	44.17	54.00	-9.83	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2462MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1	*	4924.102	27.95	15.17	43.12	54.00	-10.88	AVG
2		4924.152	42.45	15.17	57.62	74.00	-16.38	peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2462MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		4924.155	42.66	15.17	57.83	74.00	-16.17	peak
2	*	4924.251	28.71	15.17	43.88	54.00	-10.12	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%																																				
Test Voltage:	AC 120V/60 HZ																																						
Ant. Pol.	Horizontal																																						
Test Mode:	TX G Mode 2412MHz																																						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>4824.105</td> <td>41.79</td> <td>14.55</td> <td>56.34</td> <td>74.00</td> <td>-17.66</td> <td>peak</td> </tr> <tr> <td>2</td> <td>*</td> <td>4824.200</td> <td>27.48</td> <td>14.55</td> <td>42.03</td> <td>54.00</td> <td>-11.97</td> <td>AVG</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over				MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	1		4824.105	41.79	14.55	56.34	74.00	-17.66	peak	2	*	4824.200	27.48	14.55	42.03	54.00	-11.97	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector																															
1		4824.105	41.79	14.55	56.34	74.00	-17.66	peak																															
2	*	4824.200	27.48	14.55	42.03	54.00	-11.97	AVG																															
<p>Emission Level= Read Level+ Correct Factor</p>																																							

Temperature:	25 °C	Relative Humidity:	55%																																				
Test Voltage:	AC 120V/60 HZ																																						
Ant. Pol.	Vertical																																						
Test Mode:	TX G Mode 2412MHz																																						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>4824.145</td> <td>41.96</td> <td>14.55</td> <td>56.51</td> <td>74.00</td> <td>-17.49</td> <td>peak</td> </tr> <tr> <td>2</td> <td>*</td> <td>4824.251</td> <td>28.29</td> <td>14.55</td> <td>42.84</td> <td>54.00</td> <td>-11.16</td> <td>AVG</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over				MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	1		4824.145	41.96	14.55	56.51	74.00	-17.49	peak	2	*	4824.251	28.29	14.55	42.84	54.00	-11.16	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector																															
1		4824.145	41.96	14.55	56.51	74.00	-17.49	peak																															
2	*	4824.251	28.29	14.55	42.84	54.00	-11.16	AVG																															
<p>Emission Level= Read Level+ Correct Factor</p>																																							

Temperature:	25 °C	Relative Humidity:	55%																																				
Test Voltage:	AC 120V/60 HZ																																						
Ant. Pol.	Horizontal																																						
Test Mode:	TX G Mode 2437MHz																																						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th>Detector</th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>4874.254</td> <td>42.09</td> <td>14.86</td> <td>56.95</td> <td>74.00</td> <td>-17.05</td> <td>peak</td> </tr> <tr> <td>2</td> <td>*</td> <td>4874.255</td> <td>29.16</td> <td>14.86</td> <td>44.02</td> <td>54.00</td> <td>-9.98</td> <td>AVG</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		1		4874.254	42.09	14.86	56.95	74.00	-17.05	peak	2	*	4874.255	29.16	14.86	44.02	54.00	-9.98	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector																															
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB																																
1		4874.254	42.09	14.86	56.95	74.00	-17.05	peak																															
2	*	4874.255	29.16	14.86	44.02	54.00	-9.98	AVG																															
<p>Emission Level= Read Level+ Correct Factor</p>																																							

Temperature:	25 °C	Relative Humidity:	55%																																				
Test Voltage:	AC 120V/60 HZ																																						
Ant. Pol.	Vertical																																						
Test Mode:	TX G Mode 2437MHz																																						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th>Detector</th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>*</td> <td>4874.254</td> <td>28.65</td> <td>14.86</td> <td>43.51</td> <td>54.00</td> <td>-10.49</td> <td>AVG</td> </tr> <tr> <td>2</td> <td></td> <td>4874.455</td> <td>42.73</td> <td>14.86</td> <td>57.59</td> <td>74.00</td> <td>-16.41</td> <td>peak</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		1	*	4874.254	28.65	14.86	43.51	54.00	-10.49	AVG	2		4874.455	42.73	14.86	57.59	74.00	-16.41	peak
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector																															
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB																																
1	*	4874.254	28.65	14.86	43.51	54.00	-10.49	AVG																															
2		4874.455	42.73	14.86	57.59	74.00	-16.41	peak																															
<p>Emission Level= Read Level+ Correct Factor</p>																																							

Temperature:	25 °C	Relative Humidity:	55%																																				
Test Voltage:	AC 120V/60 HZ																																						
Ant. Pol.	Horizontal																																						
Test Mode:	TX G Mode 2462MHz																																						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>*</td> <td>4925.112</td> <td>28.29</td> <td>15.19</td> <td>43.48</td> <td>54.00</td> <td>-10.52</td> <td>AVG</td> </tr> <tr> <td>2</td> <td></td> <td>4925.145</td> <td>41.52</td> <td>15.19</td> <td>56.71</td> <td>74.00</td> <td>-17.29</td> <td>peak</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over				MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	1	*	4925.112	28.29	15.19	43.48	54.00	-10.52	AVG	2		4925.145	41.52	15.19	56.71	74.00	-17.29	peak
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector																															
1	*	4925.112	28.29	15.19	43.48	54.00	-10.52	AVG																															
2		4925.145	41.52	15.19	56.71	74.00	-17.29	peak																															
Emission Level= Read Level+ Correct Factor																																							

Temperature:	25 °C	Relative Humidity:	55%																																				
Test Voltage:	AC 120V/60 HZ																																						
Ant. Pol.	Vertical																																						
Test Mode:	TX G Mode 2462MHz																																						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>4925.141</td> <td>41.92</td> <td>15.19</td> <td>57.11</td> <td>74.00</td> <td>-16.89</td> <td>peak</td> </tr> <tr> <td>2</td> <td>*</td> <td>4925.617</td> <td>28.26</td> <td>15.19</td> <td>43.45</td> <td>54.00</td> <td>-10.55</td> <td>AVG</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over				MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	1		4925.141	41.92	15.19	57.11	74.00	-16.89	peak	2	*	4925.617	28.26	15.19	43.45	54.00	-10.55	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector																															
1		4925.141	41.92	15.19	57.11	74.00	-16.89	peak																															
2	*	4925.617	28.26	15.19	43.45	54.00	-10.55	AVG																															
Emission Level= Read Level+ Correct Factor																																							

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2412MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		4824.321	42.38	14.55	56.93	74.00	-17.07	peak
2	*	4824.551	27.79	14.55	42.34	54.00	-11.66	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2412MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4823.145	28.54	14.55	43.09	54.00	-10.91	AVG
2		4823.541	40.26	14.55	54.81	74.00	-19.19	peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%																																				
Test Voltage:	AC 120V/60 HZ																																						
Ant. Pol.	Horizontal																																						
Test Mode:	TX N(HT20) Mode 2437MHz																																						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>*</td> <td>4873.155</td> <td>28.05</td> <td>14.85</td> <td>42.90</td> <td>54.00</td> <td>-11.10</td> <td>AVG</td> </tr> <tr> <td>2</td> <td></td> <td>4873.254</td> <td>41.30</td> <td>14.86</td> <td>56.16</td> <td>74.00</td> <td>-17.84</td> <td>peak</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over				MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	1	*	4873.155	28.05	14.85	42.90	54.00	-11.10	AVG	2		4873.254	41.30	14.86	56.16	74.00	-17.84	peak
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector																															
1	*	4873.155	28.05	14.85	42.90	54.00	-11.10	AVG																															
2		4873.254	41.30	14.86	56.16	74.00	-17.84	peak																															
<p>Emission Level= Read Level+ Correct Factor</p>																																							

Temperature:	25 °C	Relative Humidity:	55%																																				
Test Voltage:	AC 120V/60 HZ																																						
Ant. Pol.	Vertical																																						
Test Mode:	TX N(HT20) Mode 2437MHz																																						
Remark:	No report for the emission which more than 20 dB below the prescribed limit.																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>4873.251</td> <td>43.39</td> <td>14.85</td> <td>58.24</td> <td>74.00</td> <td>-15.76</td> <td>peak</td> </tr> <tr> <td>2</td> <td>*</td> <td>4874.256</td> <td>29.23</td> <td>14.86</td> <td>44.09</td> <td>54.00</td> <td>-9.91</td> <td>AVG</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over				MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	1		4873.251	43.39	14.85	58.24	74.00	-15.76	peak	2	*	4874.256	29.23	14.86	44.09	54.00	-9.91	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector																															
1		4873.251	43.39	14.85	58.24	74.00	-15.76	peak																															
2	*	4874.256	29.23	14.86	44.09	54.00	-9.91	AVG																															
<p>Emission Level= Read Level+ Correct Factor</p>																																							

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2462MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	4924.155	42.17	15.17	57.34	74.00	-16.66	peak
2	* 4924.455	28.22	15.17	43.39	54.00	-10.61	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2462MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	* 4923.255	28.37	15.17	43.54	54.00	-10.46	AVG
2	4923.524	41.30	15.17	56.47	74.00	-17.53	peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2422MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4844.123	28.21	14.68	42.89	54.00	-11.11	AVG
2		4844.251	41.56	14.68	56.24	74.00	-17.76	peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2422MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4844.251	27.32	14.68	42.00	54.00	-12.00	AVG
2		4844.452	40.69	14.68	55.37	74.00	-18.63	peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2437MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		4875.155	42.26	14.87	57.13	74.00	-16.87	peak
2	*	4875.452	27.83	14.87	42.70	54.00	-11.30	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2437MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4874.104	29.03	14.86	43.89	54.00	-10.11	AVG
2		4874.255	42.21	14.86	57.07	74.00	-16.93	peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2452MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4904.254	28.44	15.04	43.48	54.00	-10.52	AVG
2		4904.455	42.46	15.05	57.51	74.00	-16.49	peak

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2452MHz		
Remark:	No report for the emission which more than 20 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4905.125	28.22	15.05	43.27	54.00	-10.73	AVG
2		4905.144	42.21	15.05	57.26	74.00	-16.74	peak



Emission Level= Read Level+ Correct Factor


Conducted RF Spurious Emission Test Data


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	DC 5V		
Test Mode:	TX B Mode		
Remark:	This report only shall the worst case mode for TX IEEE 802.11b.		

2412 MHz

0.03GHz-25GHz

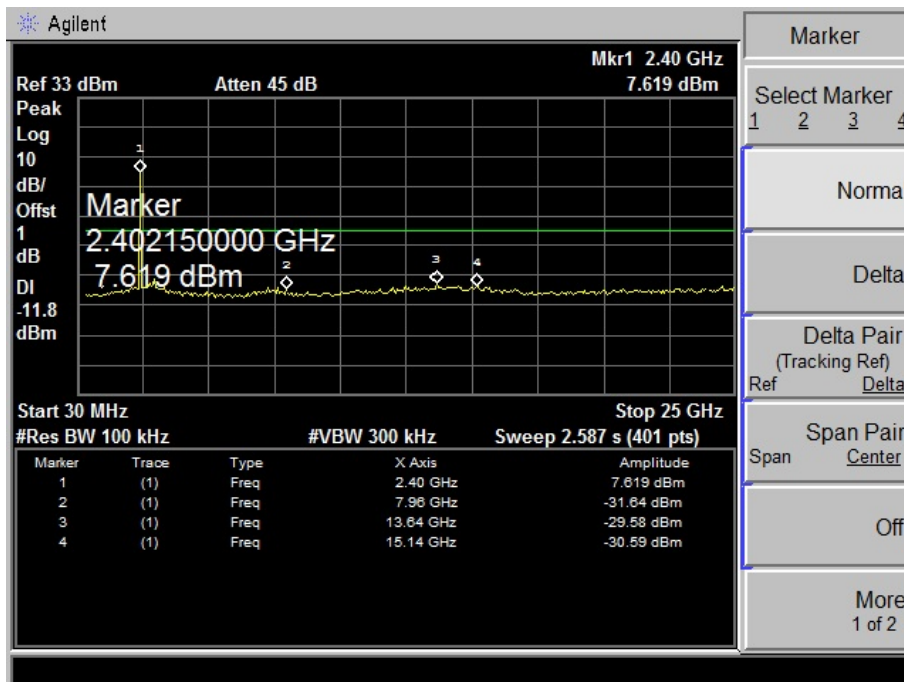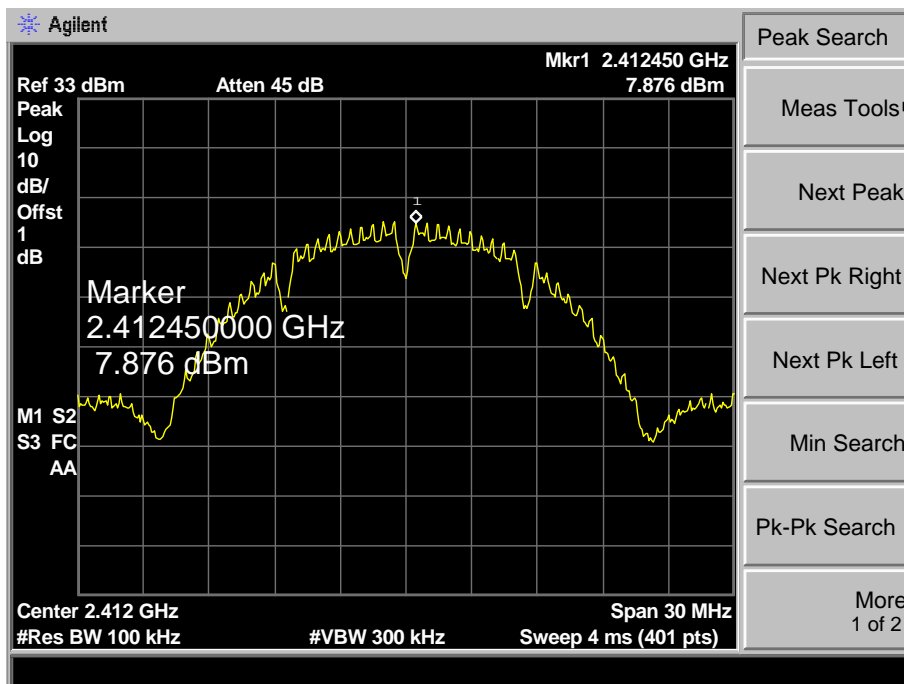

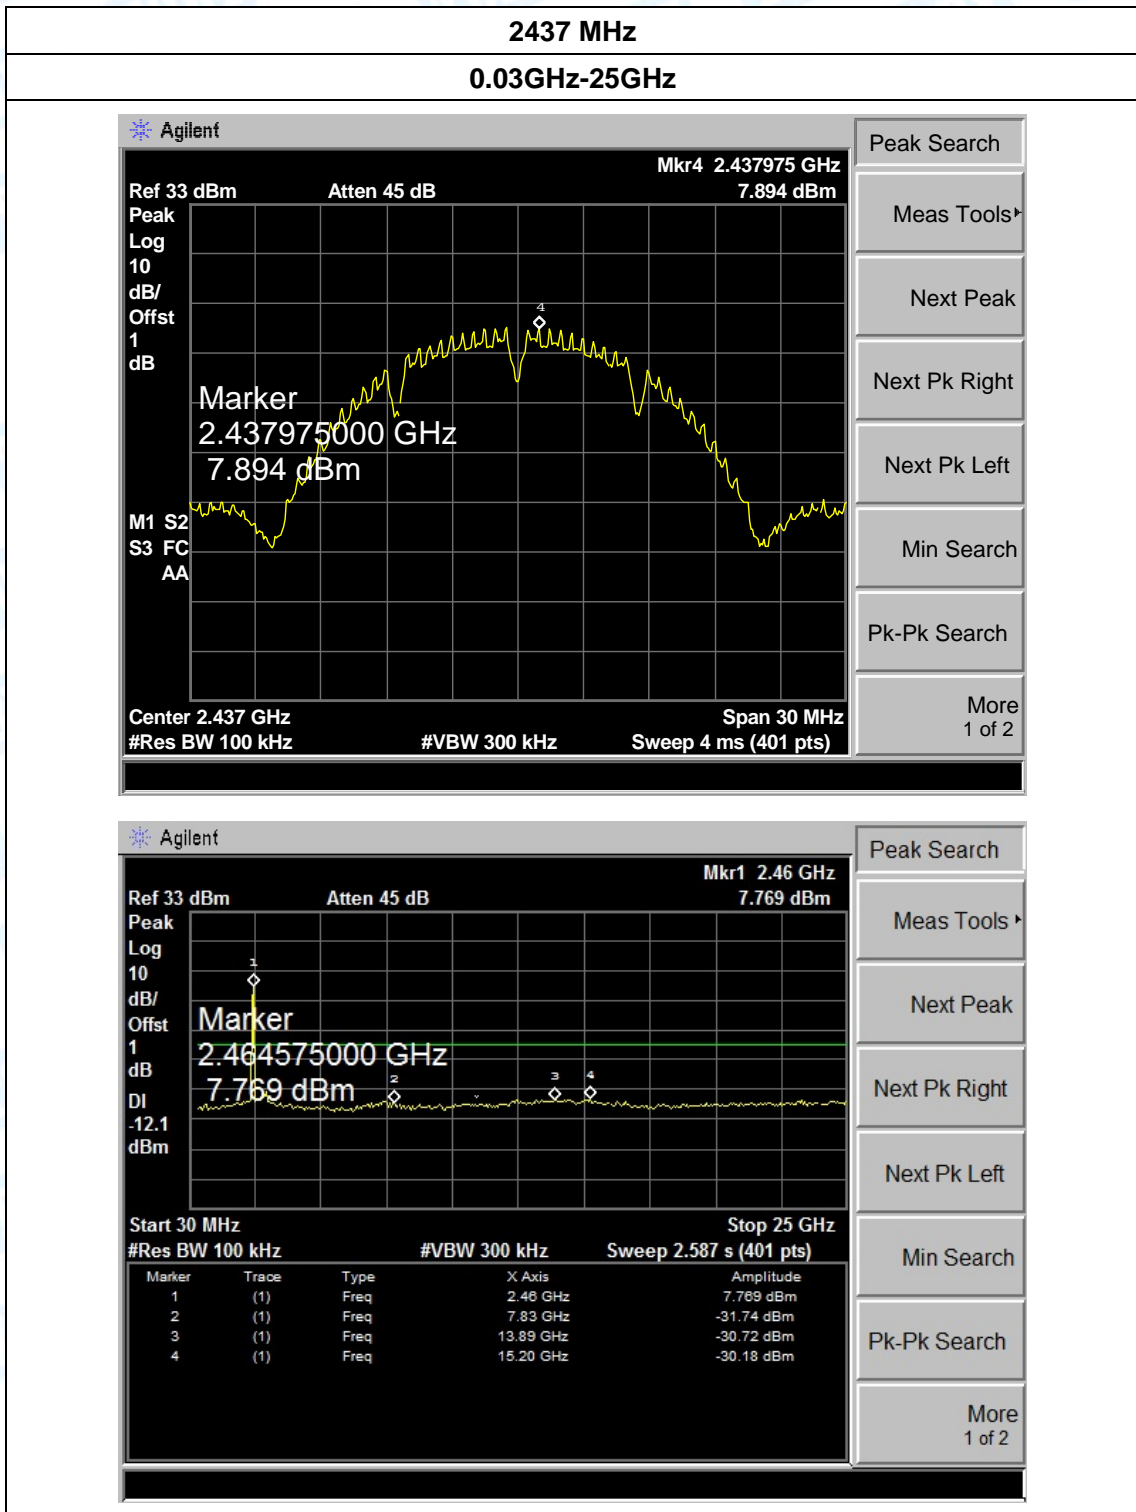


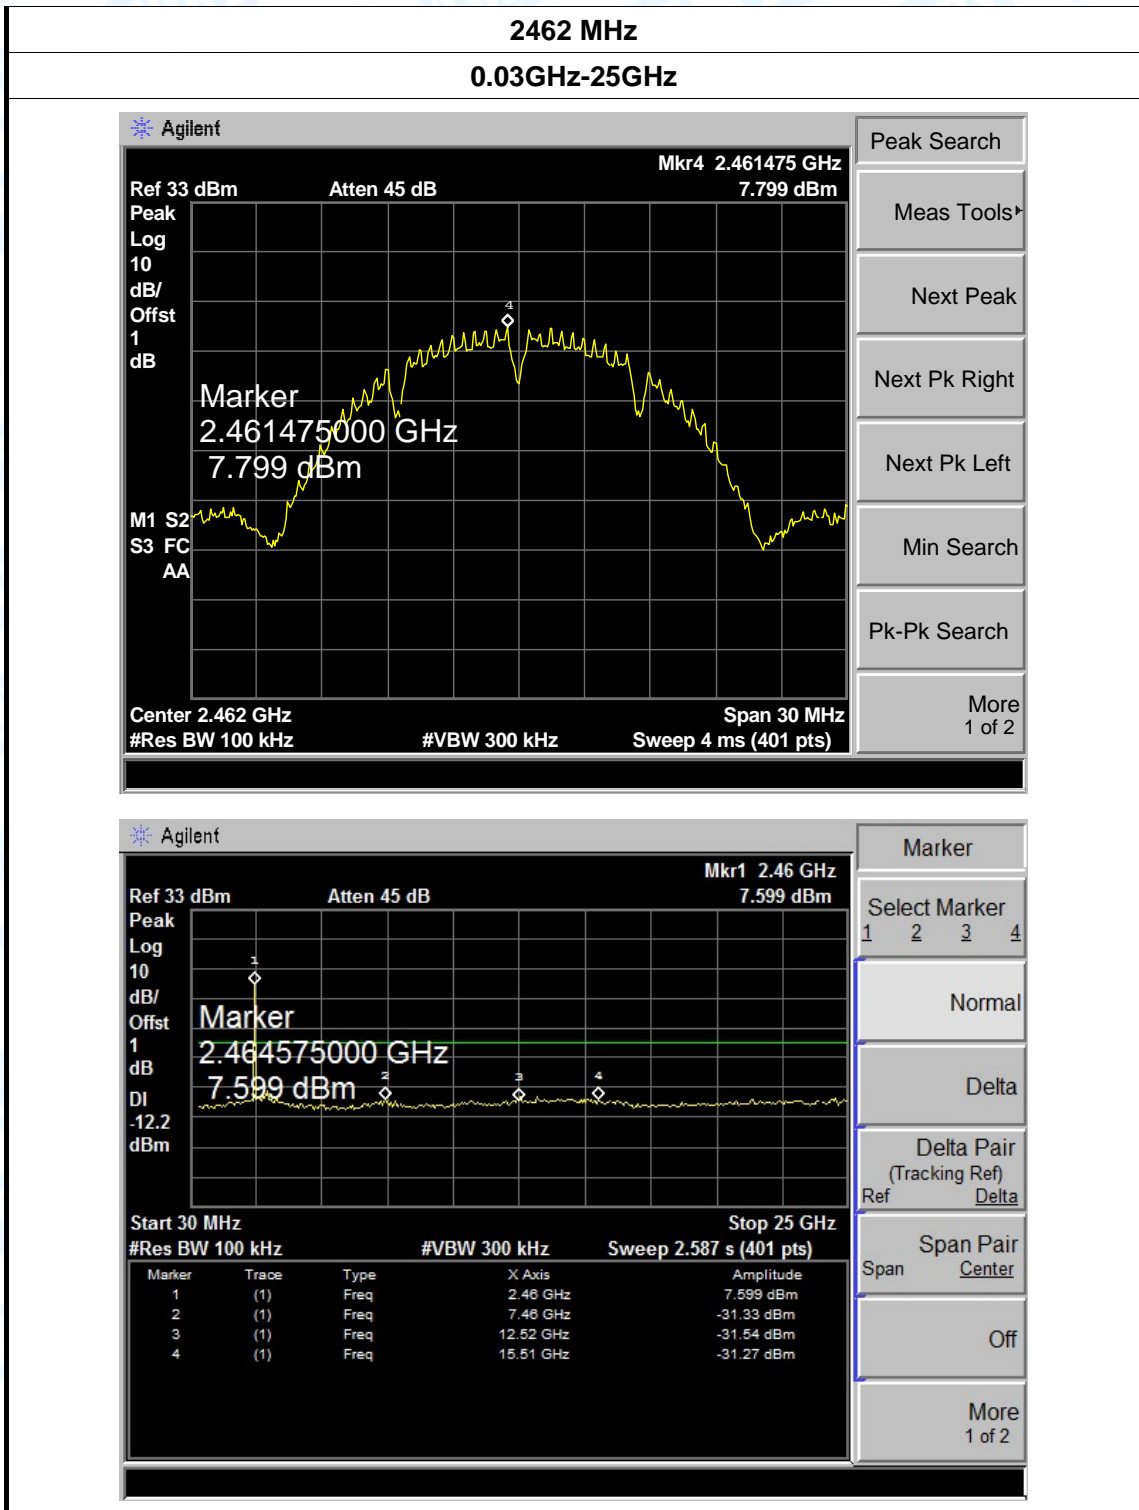

Attachment C-- Restricted Bands Requirement and Band-edge Test Data

(1) Radiation Test


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2412MHz		
Remark:	N/A		

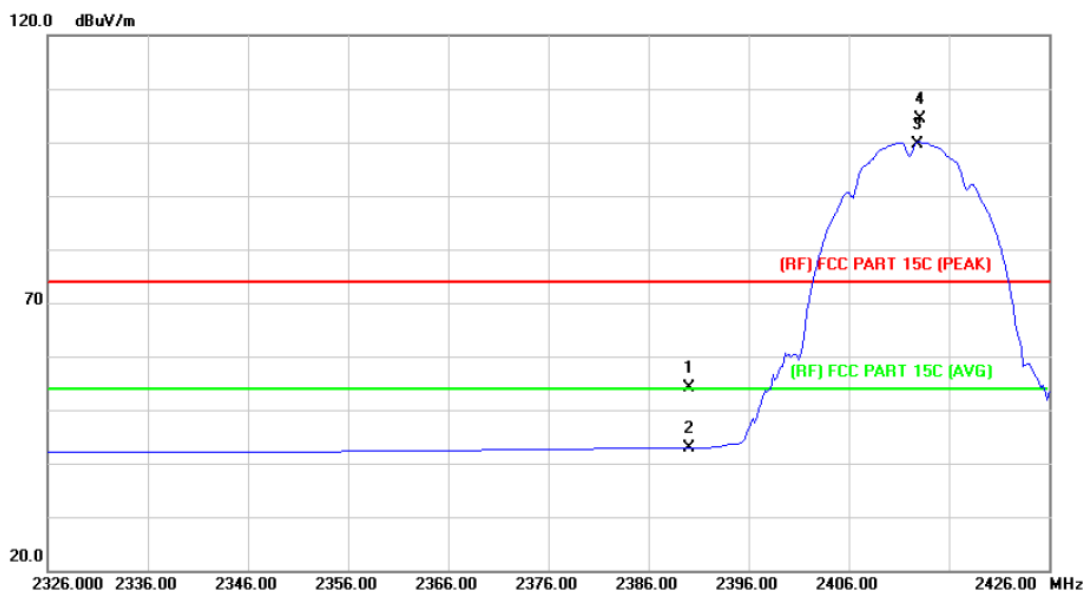

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		2390.000	51.39	2.82	54.21	74.00	-19.79	peak
2		2390.000	40.02	2.82	42.84	54.00	-11.16	AVG
3	*	2412.800	96.62	2.94	99.56	Fundamental Frequency		AVG
4	X	2413.200	101.55	2.95	104.50	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz		
Remark:	N/A		

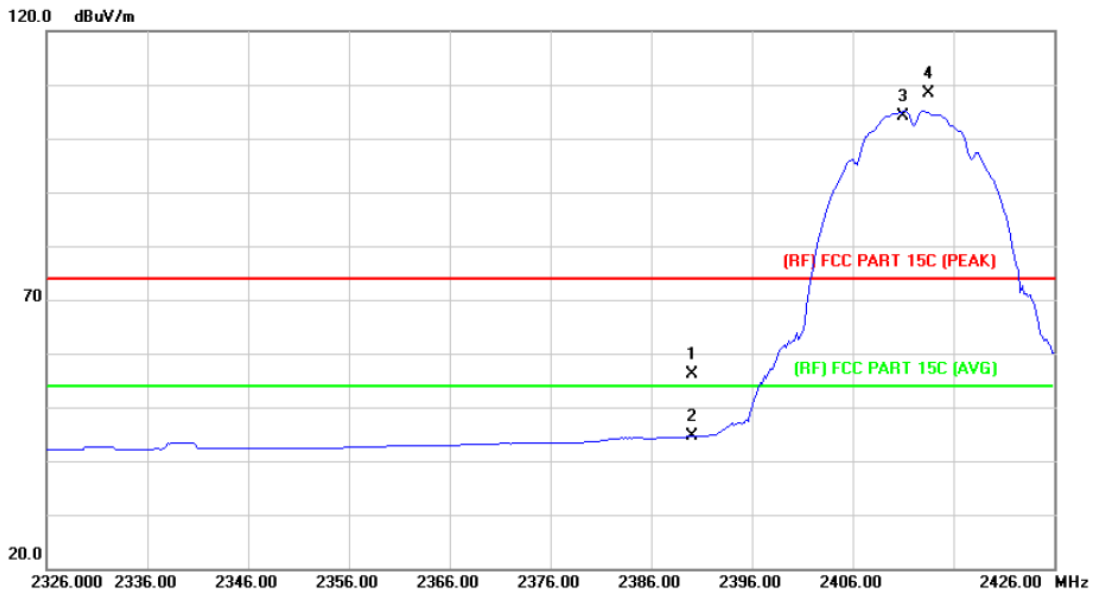

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	53.42	2.82	56.24	74.00	-17.76	peak
2		2390.000	41.75	2.82	44.57	54.00	-9.43	AVG
3	*	2411.000	101.32	2.93	104.25	Fundamental Frequency		AVG
4	X	2413.600	105.49	2.95	108.44	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2462MHz		
Remark:	N/A		

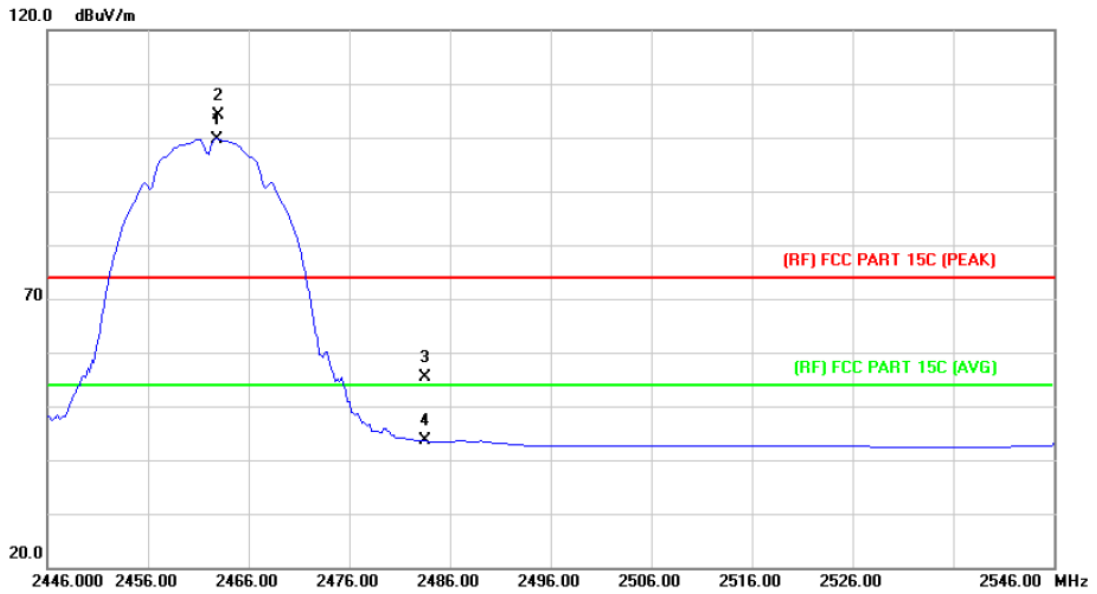

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2462.800	96.48	3.27	99.75	Fundamental Frequency		AVG
2	X	2463.000	100.75	3.27	104.02	Fundamental Frequency		peak
3		2483.500	52.02	3.41	55.43	74.00	-18.57	peak
4		2483.500	40.13	3.41	43.54	54.00	-10.46	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2462MHz		
Remark:	N/A		

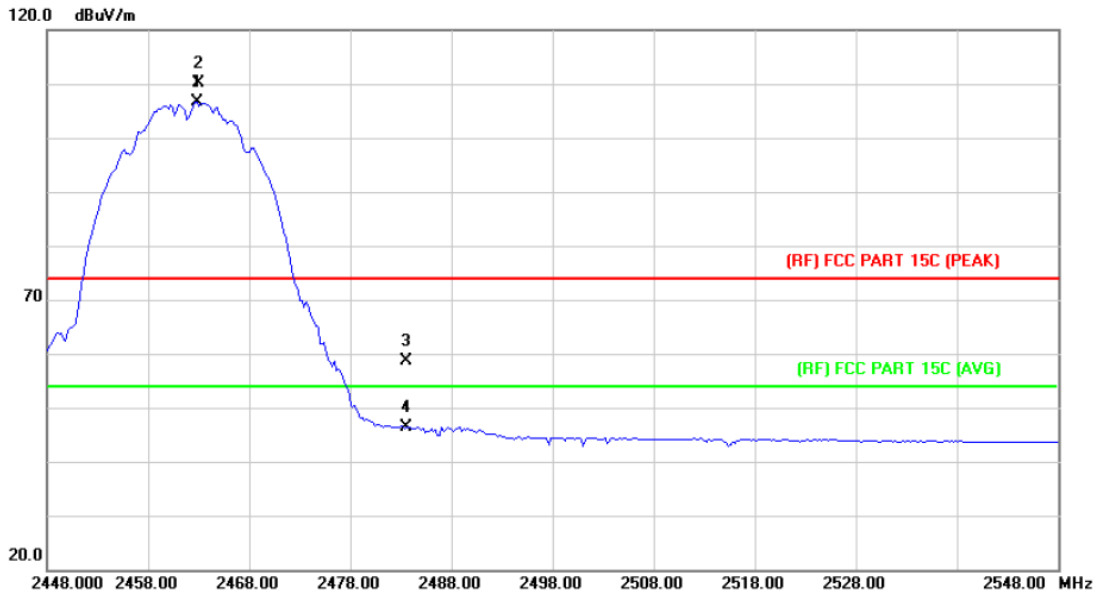

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2462.800	103.30	3.27	106.57	Fundamental Frequency		AVG
2	X	2463.000	106.98	3.27	110.25	Fundamental Frequency		peak
3		2483.500	55.33	3.41	58.74	74.00	-15.26	peak
4		2483.500	42.97	3.41	46.38	54.00	-7.62	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2412MHz		
Remark:	N/A		

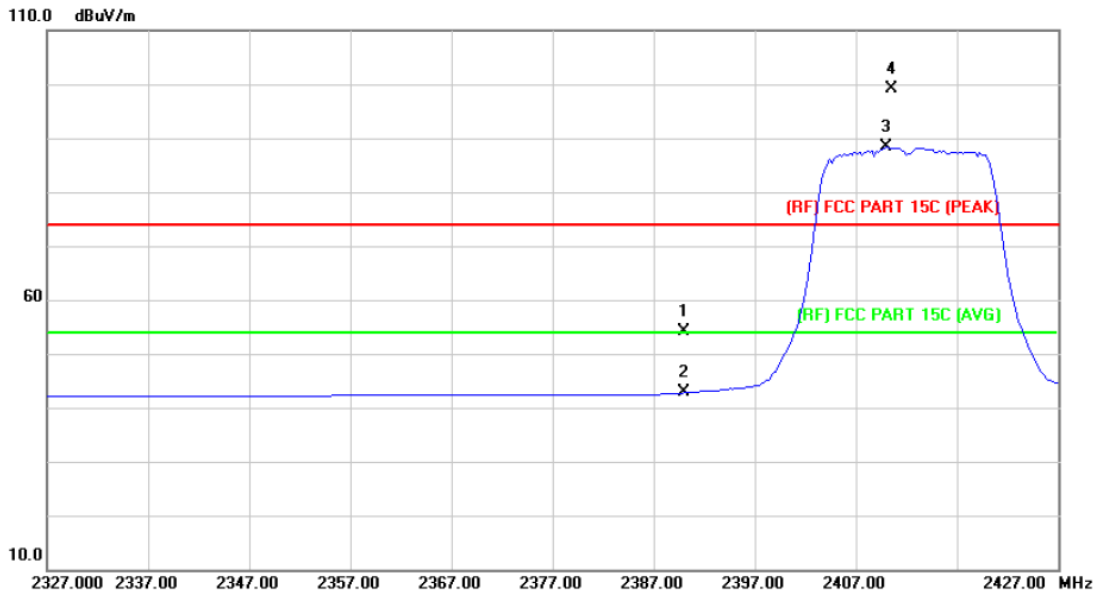

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		2390.000	51.30	2.82	54.12	74.00	-19.88	peak
2		2390.000	40.01	2.82	42.83	54.00	-11.17	AVG
3	*	2410.000	85.43	2.93	88.36	Fundamental Frequency		AVG
4	X	2410.600	96.19	2.93	99.12	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2412MHz		
Remark:	N/A		

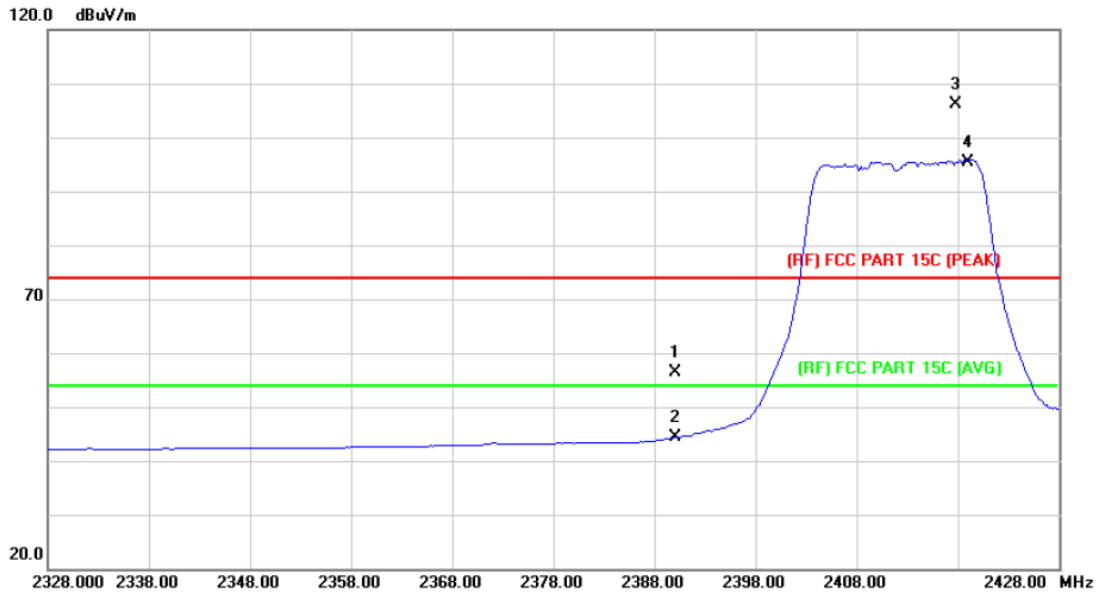

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		2390.000	53.56	2.82	56.38	74.00	-17.62	peak
2		2390.000	41.50	2.82	44.32	54.00	-9.68	AVG
3	X	2417.800	103.16	2.98	106.14	Fundamental Frequency		peak
4	*	2419.000	92.47	2.98	95.45	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2462MHz		
Remark:	N/A		

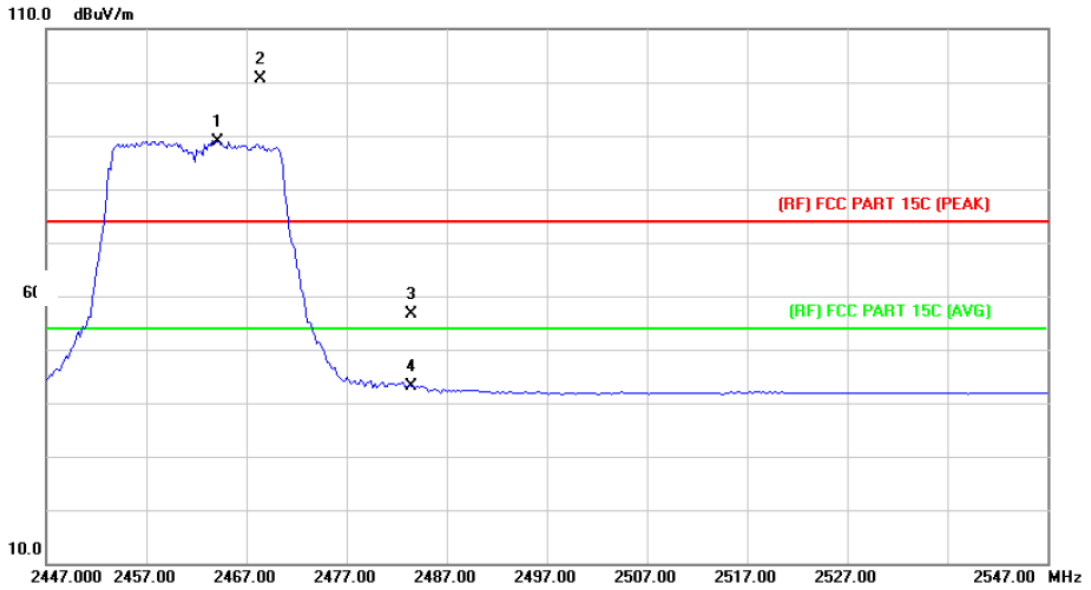

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2464.200	85.70	3.28	88.98	Fundamental Frequency		AVG
2	X	2468.400	97.27	3.31	100.58	Fundamental Frequency		peak
3		2483.500	53.34	3.41	56.75	74.00	-17.25	peak
4		2483.500	39.72	3.41	43.13	54.00	-10.87	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2462MHz		
Remark:	N/A		

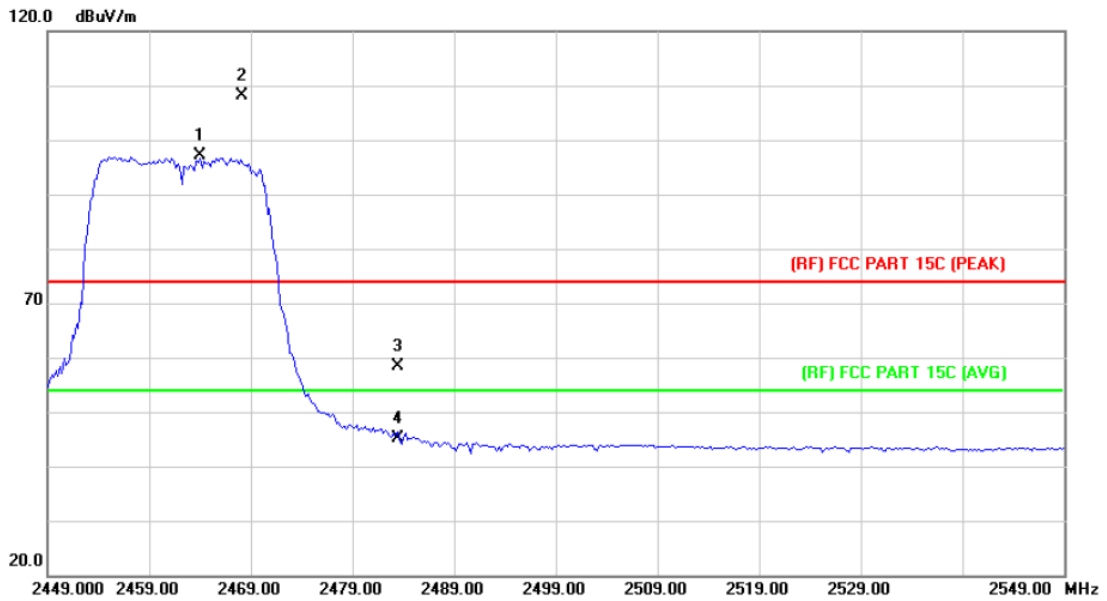

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2464.000	93.76	3.28	97.04	Fundamental Frequency		AVG
2	X	2468.200	104.83	3.31	108.14	Fundamental Frequency		peak
3		2483.500	55.00	3.41	58.41	74.00	-15.59	peak
4		2483.500	41.74	3.41	45.15	54.00	-8.85	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2412MHz		
Remark:	N/A		

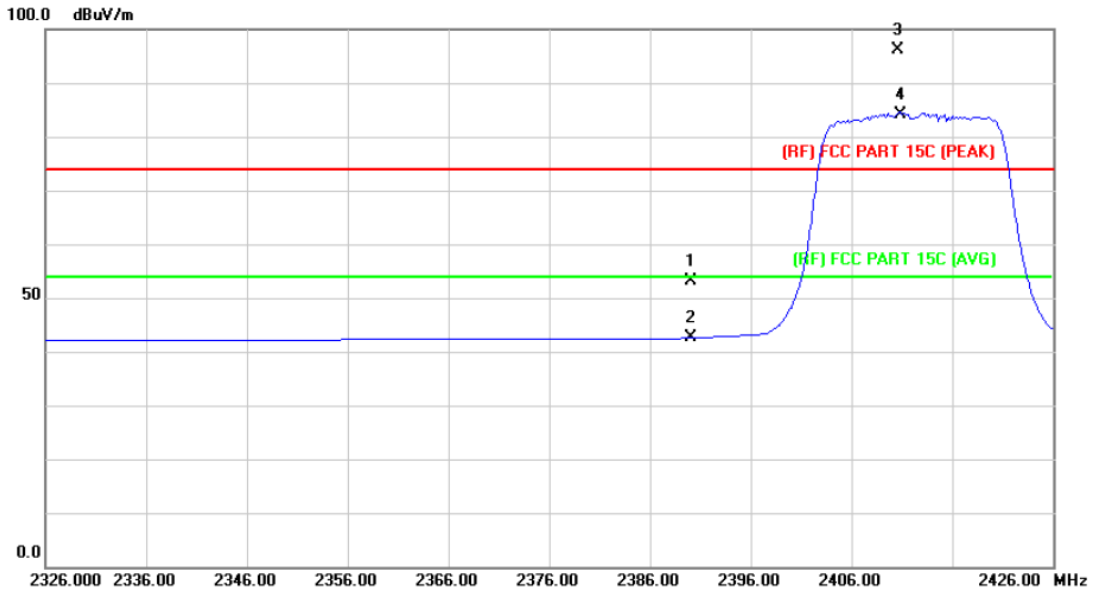

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	50.34	2.82	53.16	74.00	-20.84	peak
2		2390.000	39.81	2.82	42.63	54.00	-11.37	AVG
3	X	2410.600	93.22	2.93	96.15	Fundamental Frequency		peak
4	*	2410.800	81.32	2.93	84.25	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2412MHz		
Remark:	N/A		

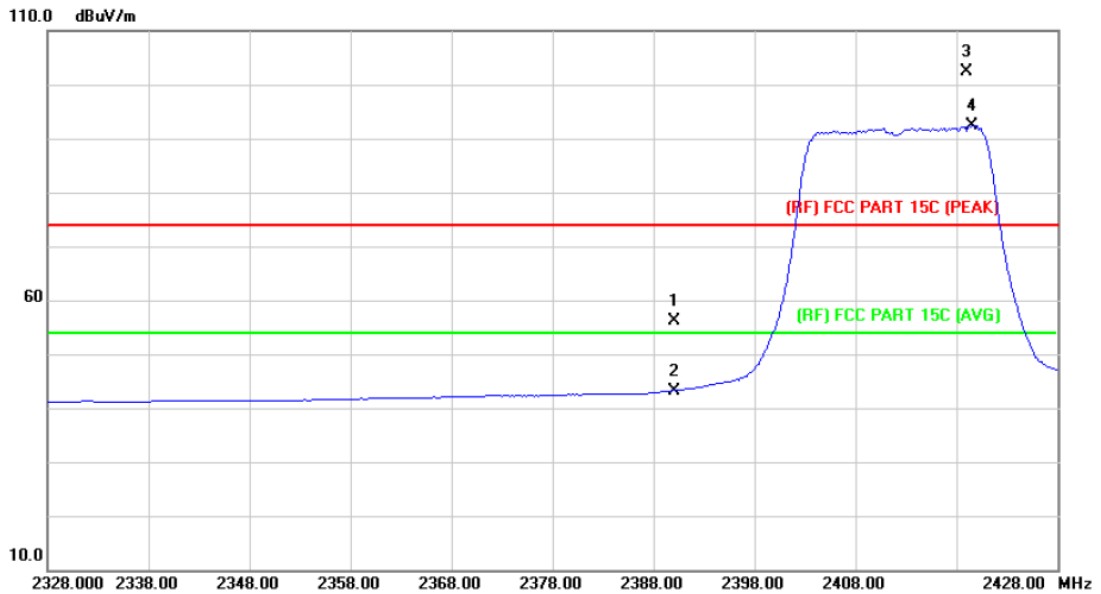

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		2390.000	53.32	2.82	56.14	74.00	-17.86	peak
2		2390.000	40.42	2.82	43.24	54.00	-10.76	AVG
3	X	2419.000	99.33	2.98	102.31	Fundamental Frequency		peak
4	*	2419.600	89.48	2.99	92.47	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2462MHz		
Remark:	N/A		

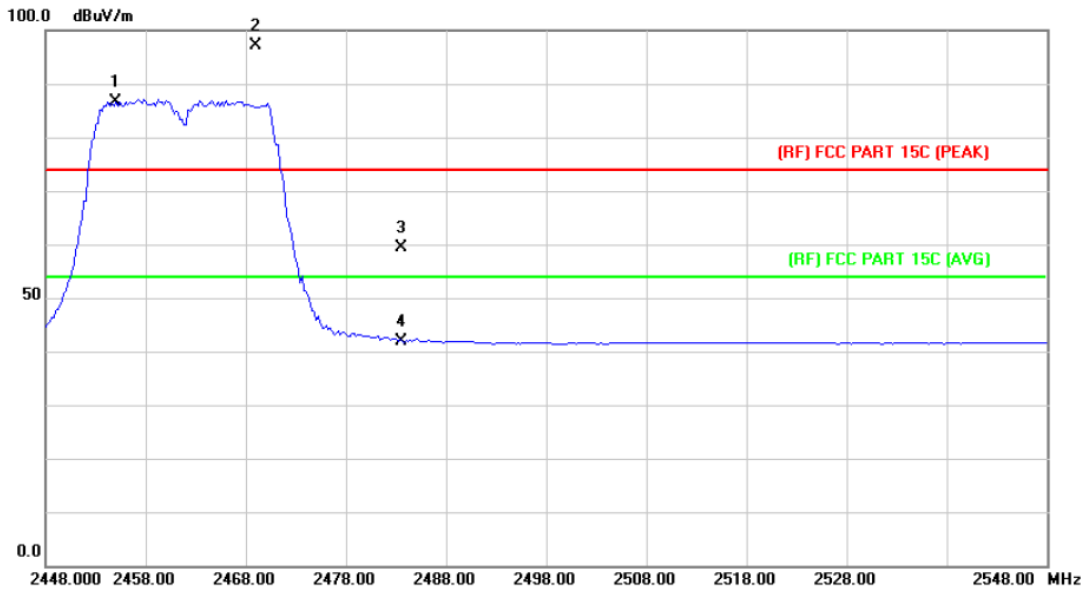

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2455.000	83.39	3.22	86.61	Fundamental Frequency		AVG
2	X	2469.000	93.81	3.31	97.12	Fundamental Frequency		peak
3		2483.500	56.00	3.41	59.41	74.00	-14.59	peak
4		2483.500	38.53	3.41	41.94	54.00	-12.06	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2462MHz		
Remark:	N/A		

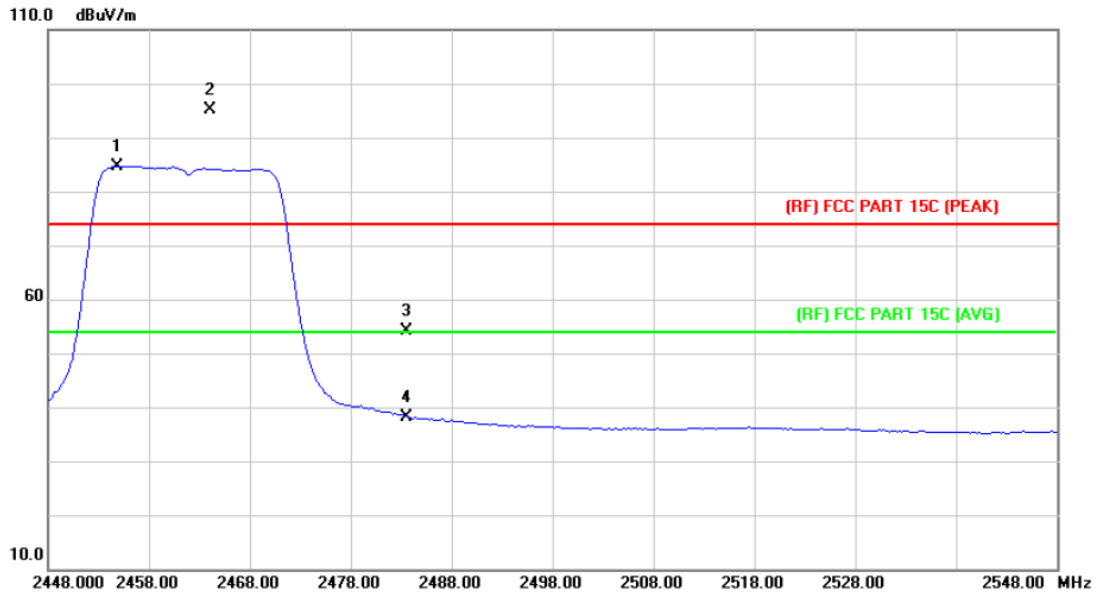

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2454.800	81.51	3.22	84.73	Fundamental Frequency		AVG
2	X	2464.000	91.89	3.28	95.17	Fundamental Frequency		peak
3		2483.500	50.74	3.41	54.15	74.00	-19.85	peak
4		2483.500	34.70	3.41	38.11	54.00	-15.89	AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2422MHz		
Remark:	N/A		

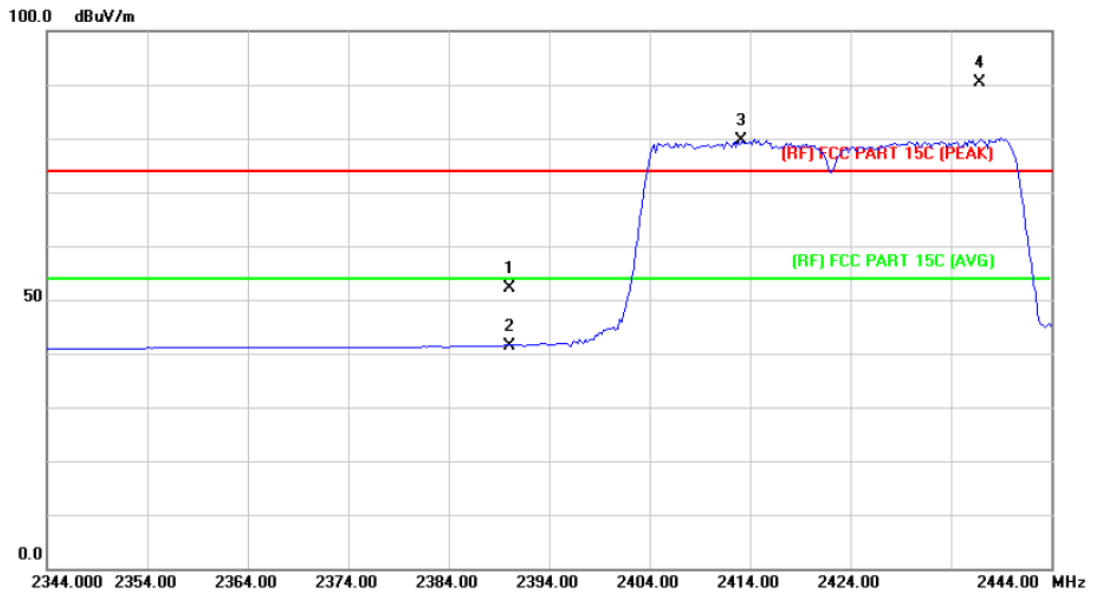

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	49.32	2.82	52.14	74.00	-21.86	peak
2		2390.000	38.68	2.82	41.50	54.00	-12.50	AVG
3	*	2413.200	76.57	2.95	79.52	Fundamental Frequency		AVG
4	X	2436.800	87.39	3.09	90.48	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2422MHz		
Remark:	N/A		

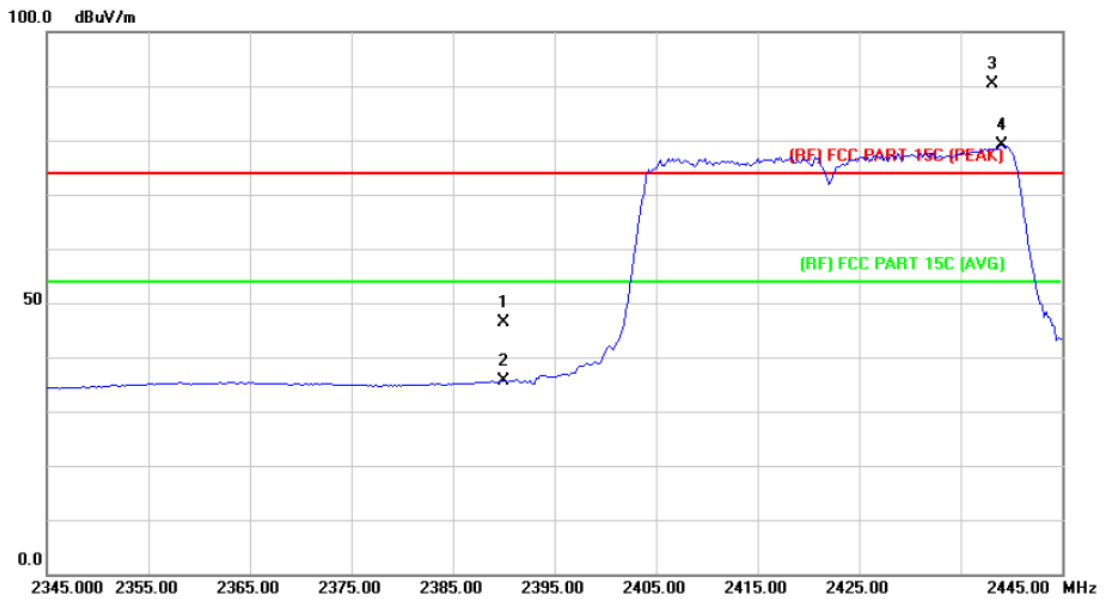

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	43.63	2.82	46.45	74.00	-27.55	peak
2		2390.000	32.75	2.82	35.57	54.00	-18.43	AVG
3	X	2438.200	87.33	3.11	90.44	Fundamental Frequency		peak
4	*	2439.000	75.95	3.11	79.06	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2452MHz		
Remark:	N/A		

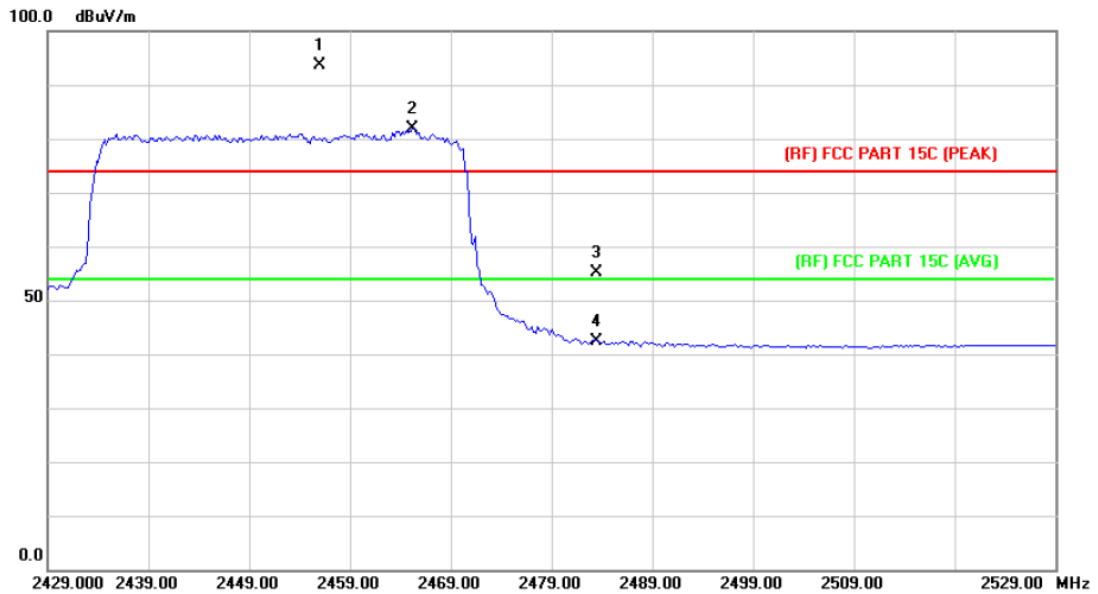

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	X	2456.000	90.29	3.23	93.52	Fundamental Frequency		peak
2	*	2465.200	78.68	3.29	81.97	Fundamental Frequency		AVG
3		2483.500	51.73	3.41	55.14	74.00	-18.86	peak
4		2483.500	38.99	3.41	42.40	54.00	-11.60	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2452MHz		
Remark:	N/A		


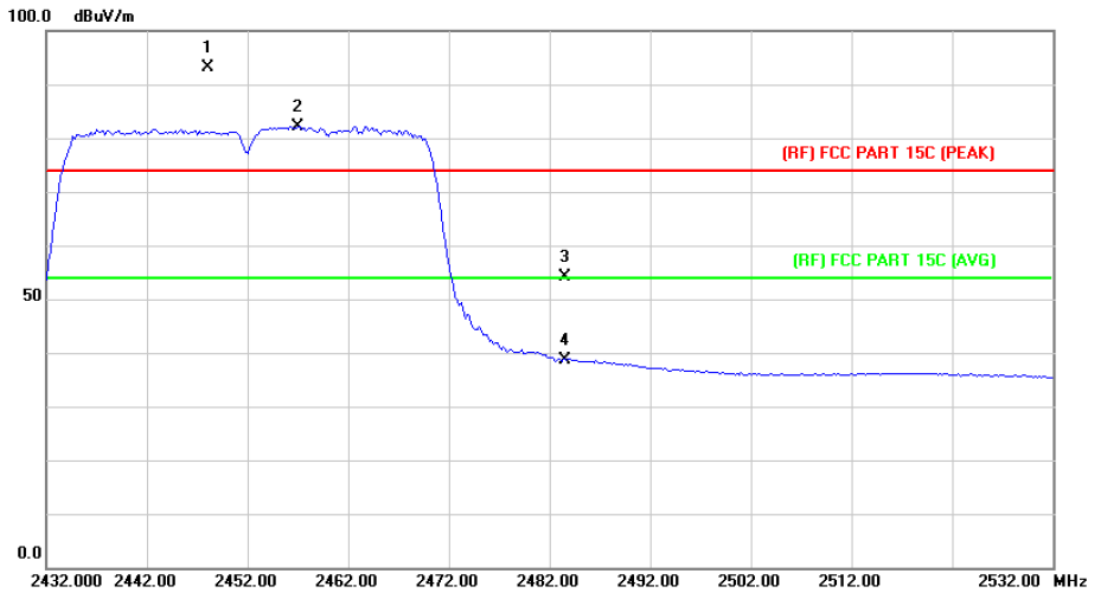


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2448.000	89.97	3.17	93.14	Fundamental Frequency		peak
2	*	2457.000	78.88	3.23	82.11	Fundamental Frequency		AVG
3		2483.500	50.74	3.41	54.15	74.00	-19.85	peak
4		2483.500	35.32	3.41	38.73	54.00	-15.27	AVG



Emission Level= Read Level+ Correct Factor

(2) Conducted Test



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX B Mode 2412MHz / TX B Mode 2462MHz		
Remark:	The EUT is programed in continuously transmitting mode		

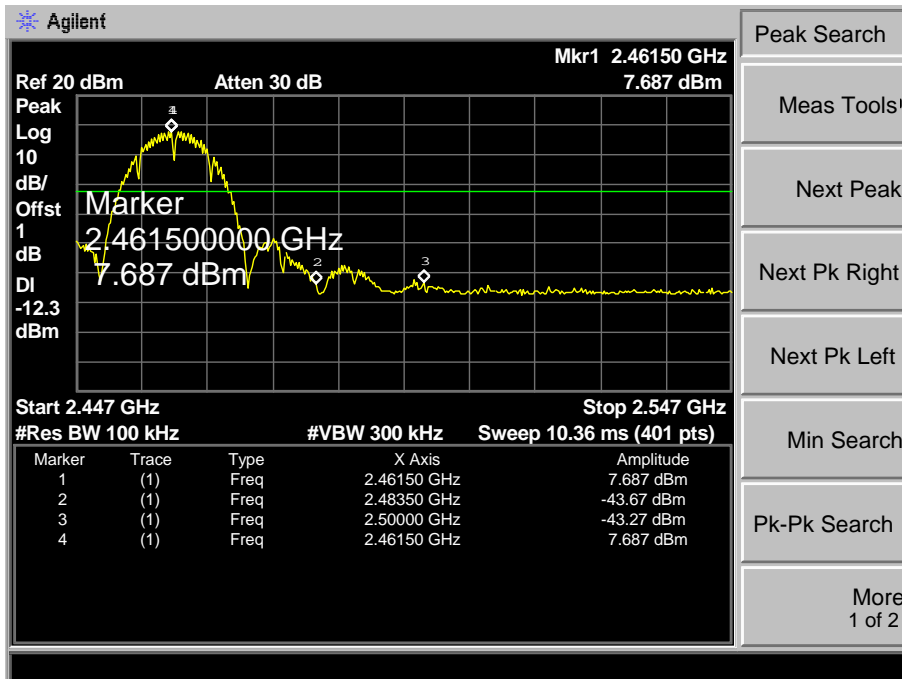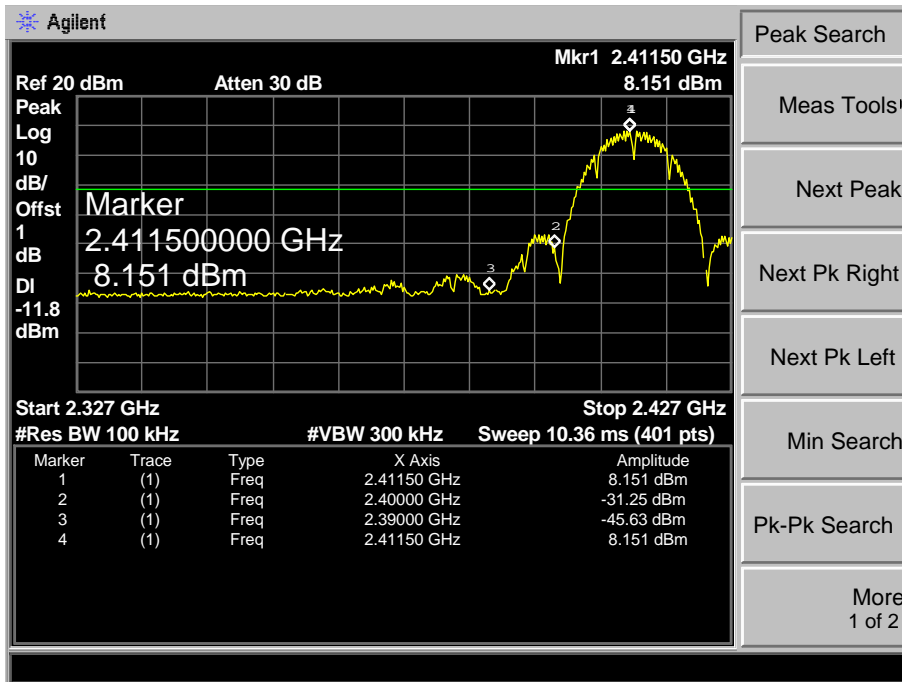



Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX G Mode 2412MHz / TX G Mode 2462MHz		
Remark:	The EUT is programed in continuously transmitting mode		

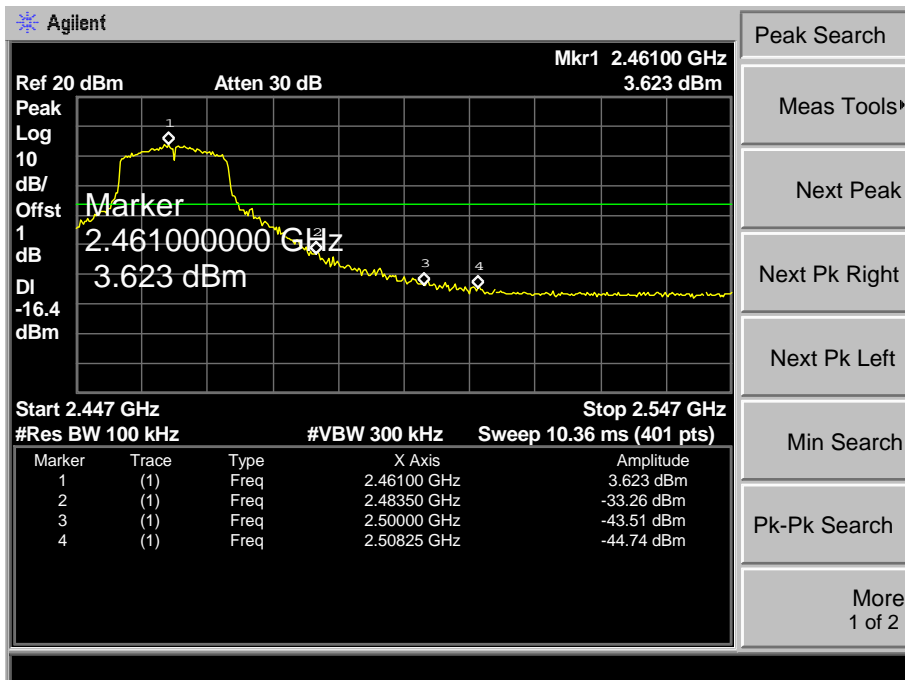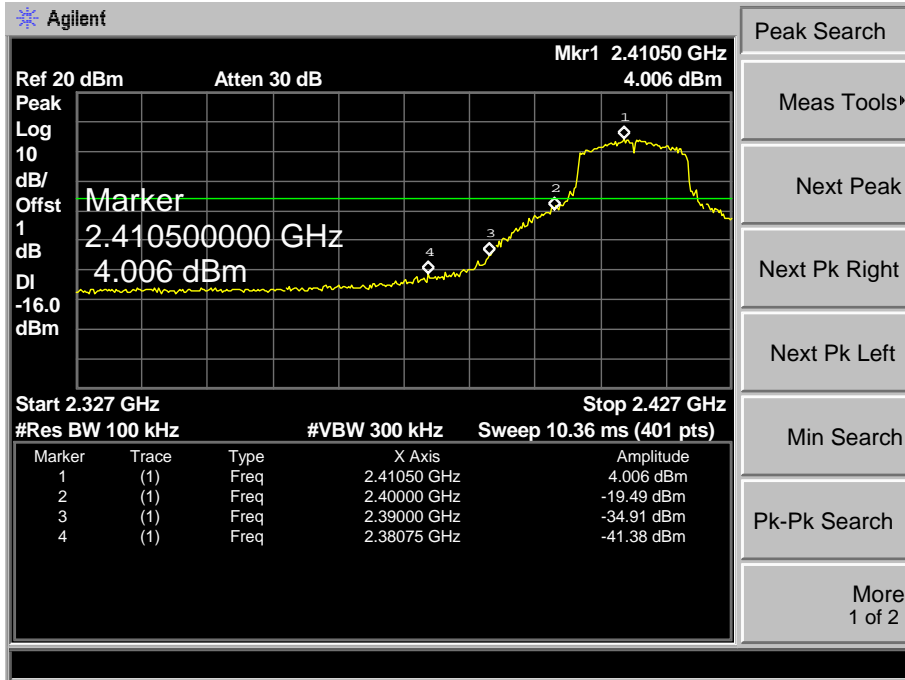

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX N(HT20) Mode 2412MHz / TX N(HT20) Mode 2462MHz		
Remark:	The EUT is programed in continuously transmitting mode		

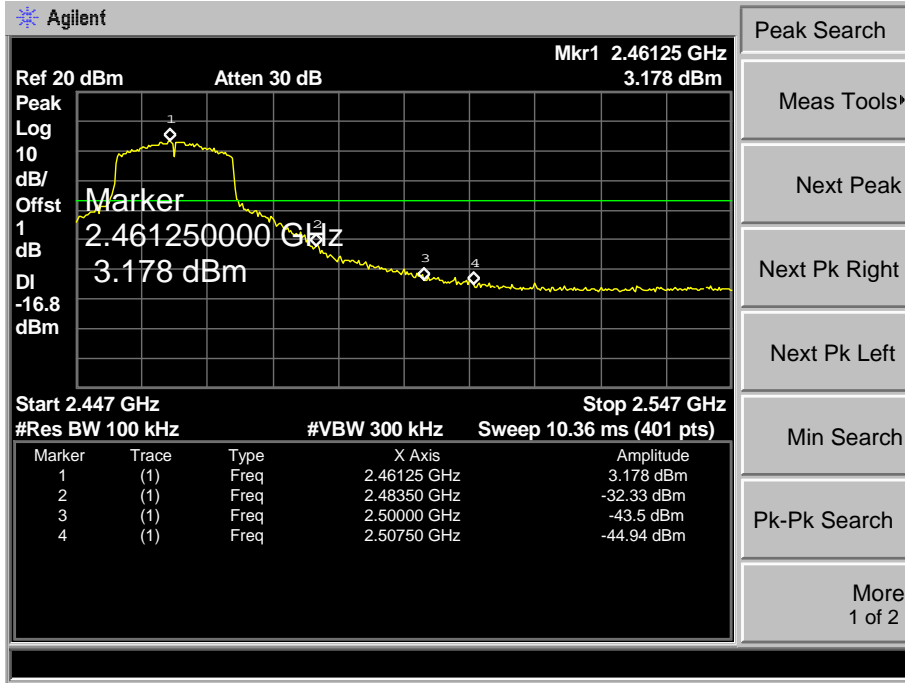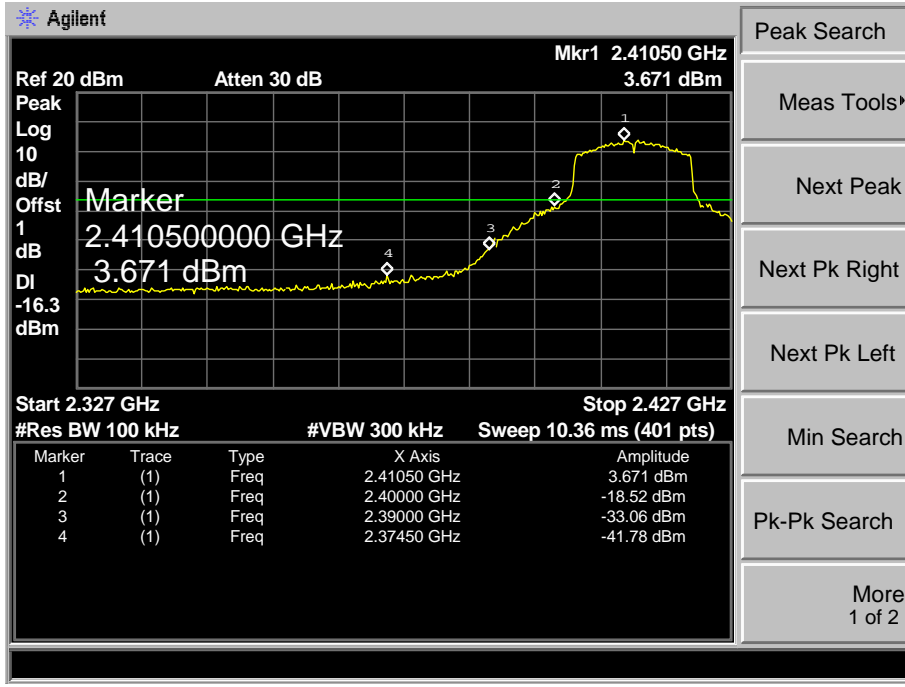

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX N(HT40) Mode 2422MHz / TX N(HT40) Mode 2452MHz		
Remark:	The EUT is programed in continuously transmitting mode		

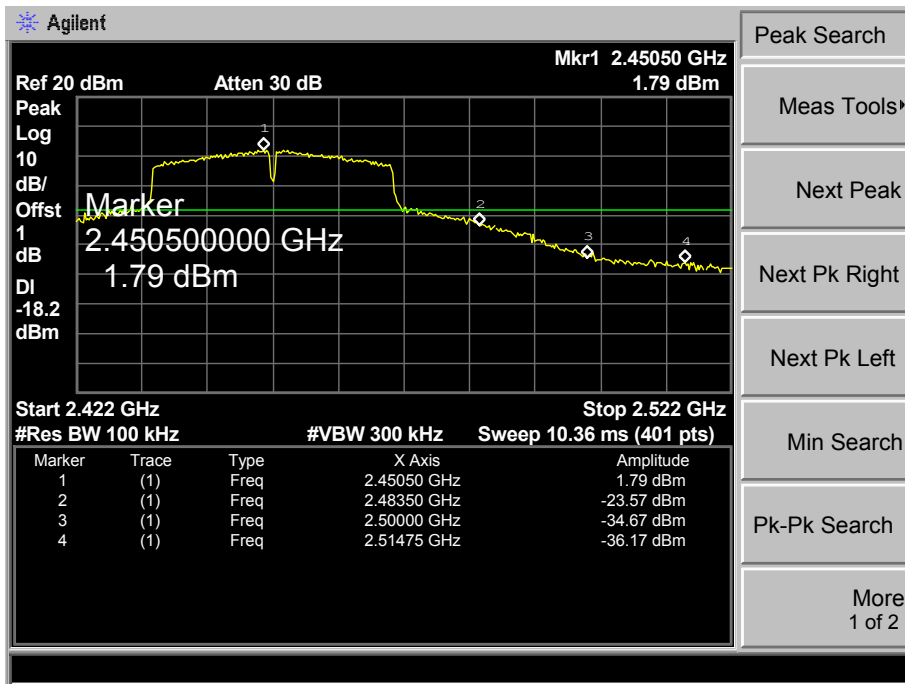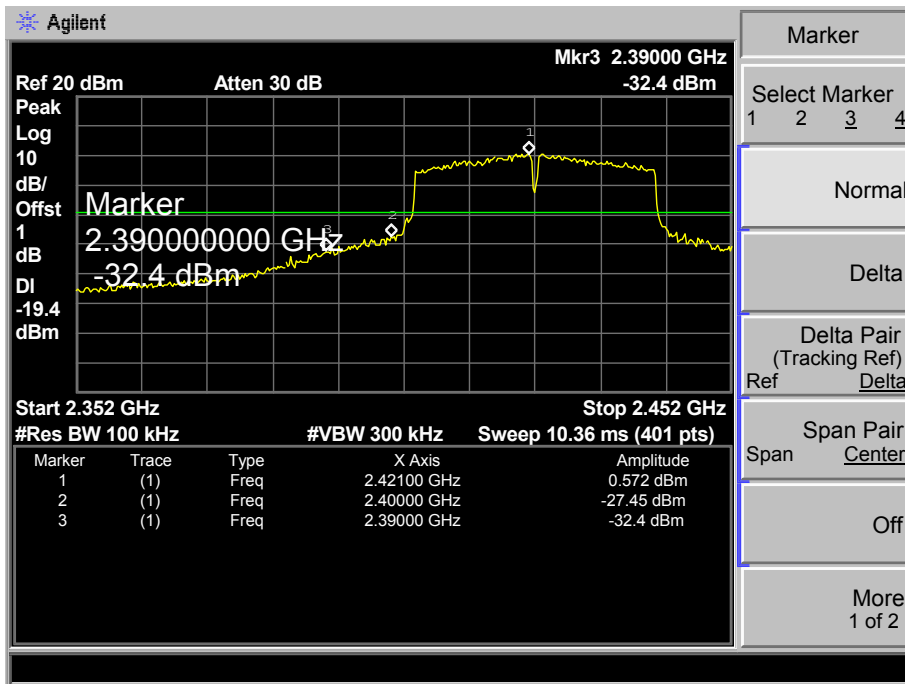


Attachment D-- Bandwidth Test Data

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX 802.11B Mode		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	9.684	14.8693	>=0.5
2437	10.028	14.7811	
2462	9.168	14.6582	


802.11B Mode

2412 MHz

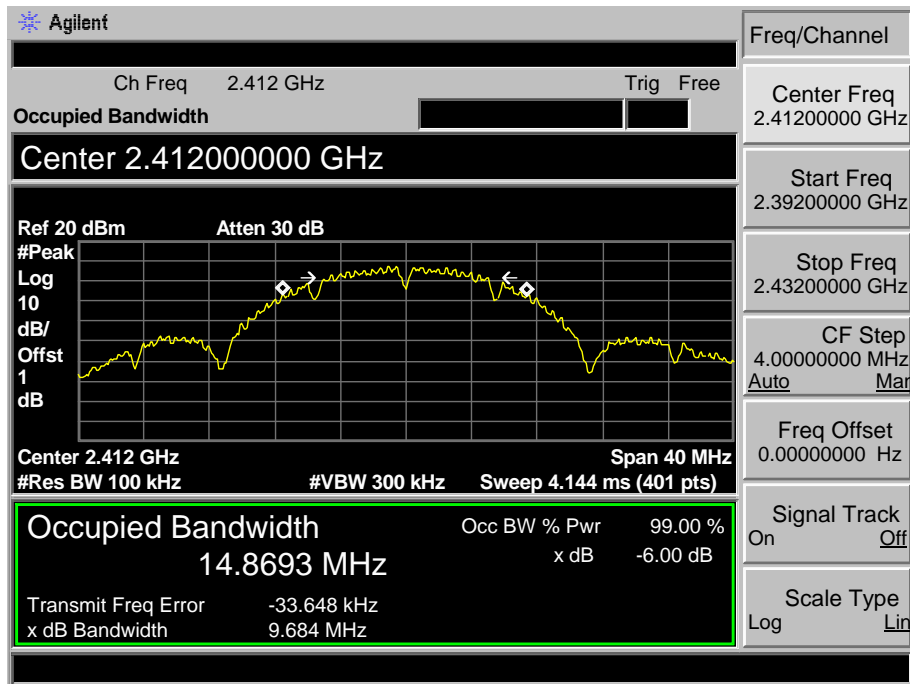


802.11B Mode

2437 MHz

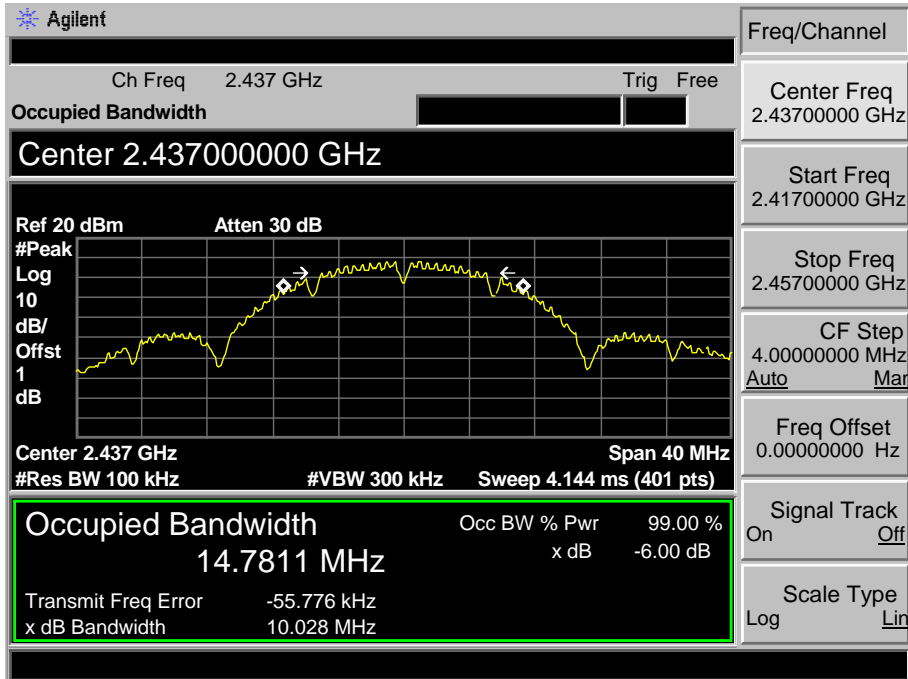

802.11B Mode


2462 MHz

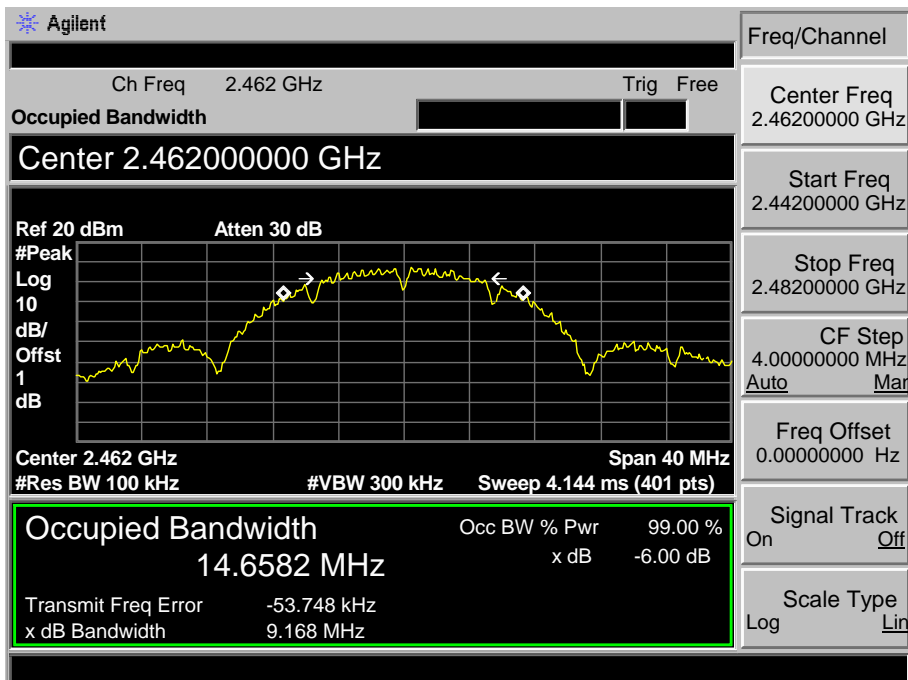

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX 802.11G Mode		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	16.331	16.7748	>=0.5
2437	16.336	16.6568	
2462	16.365	16.5049	
802.11G Mode			
2412 MHz			


802.11G Mode

2437 MHz

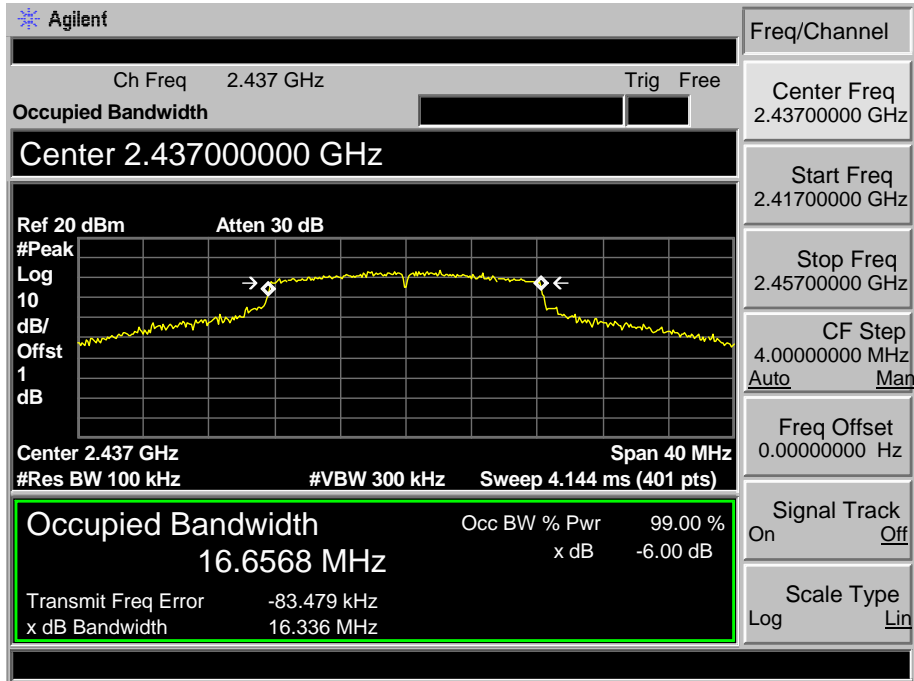

802.11G Mode


2462 MHz

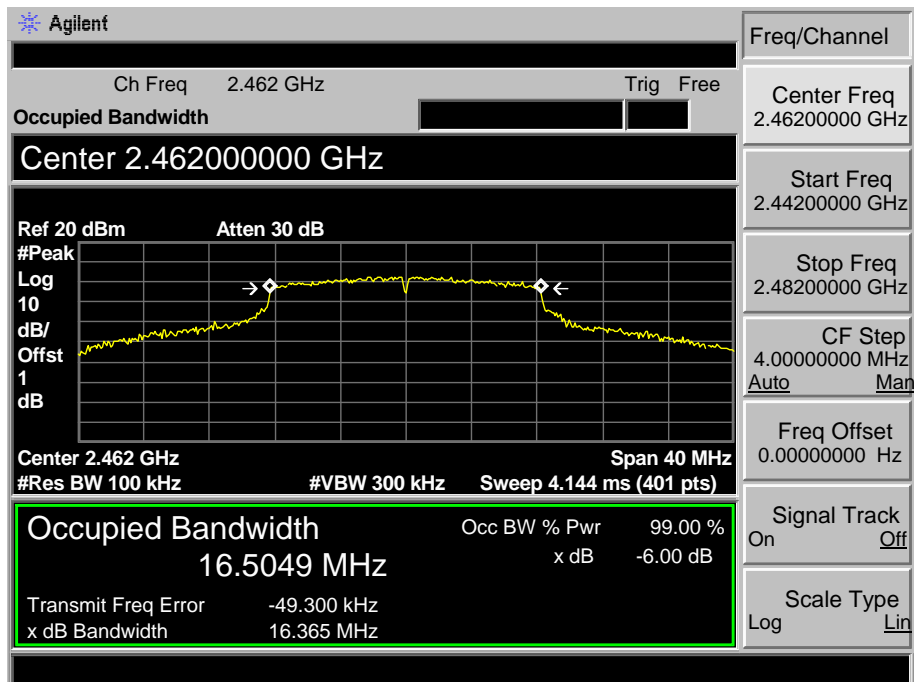

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX 802.11N(HT20) Mode		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	17.328	17.7602	>=0.5
2437	17.548	17.7683	
2462	17.525	17.7102	
802.11N(HT20) Mode			
2412 MHz			


802.11N(HT20) Mode

2437 MHz

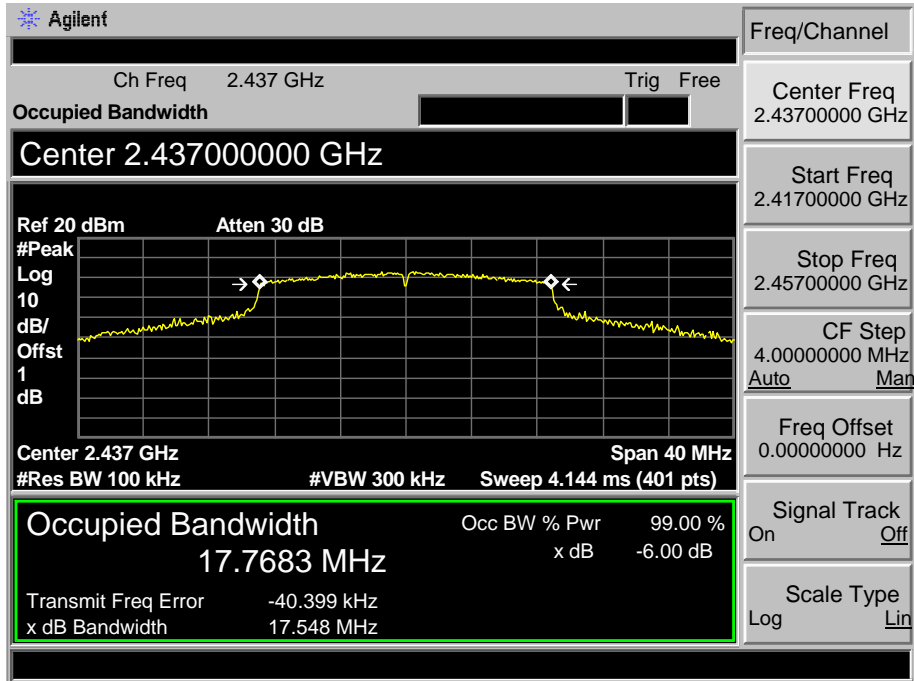

802.11N(HT20) Mode


2462 MHz

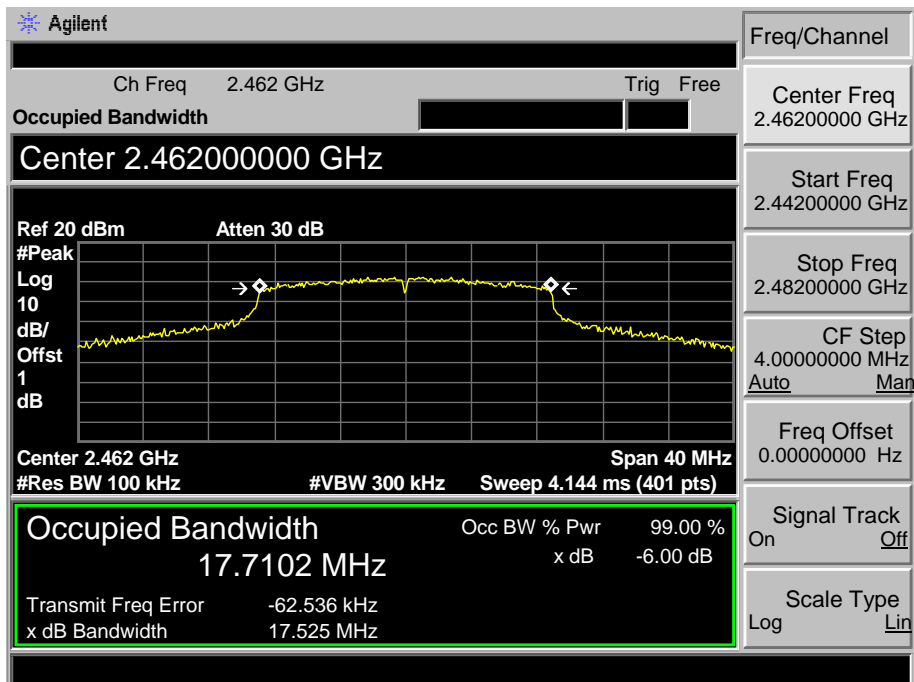

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX 802.11N(HT40) Mode		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2422	36.160	37.0537	>=0.5
2437	35.456	37.0399	
2452	35.628	36.6613	


802.11N(HT40) Mode

2422 MHz

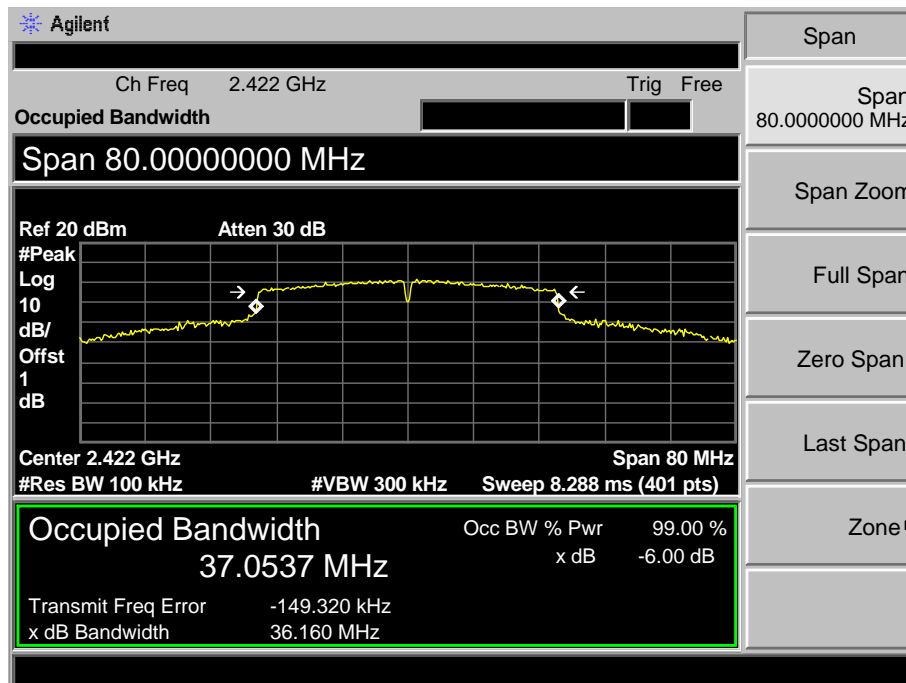


802.11N(HT40) Mode

2437 MHz

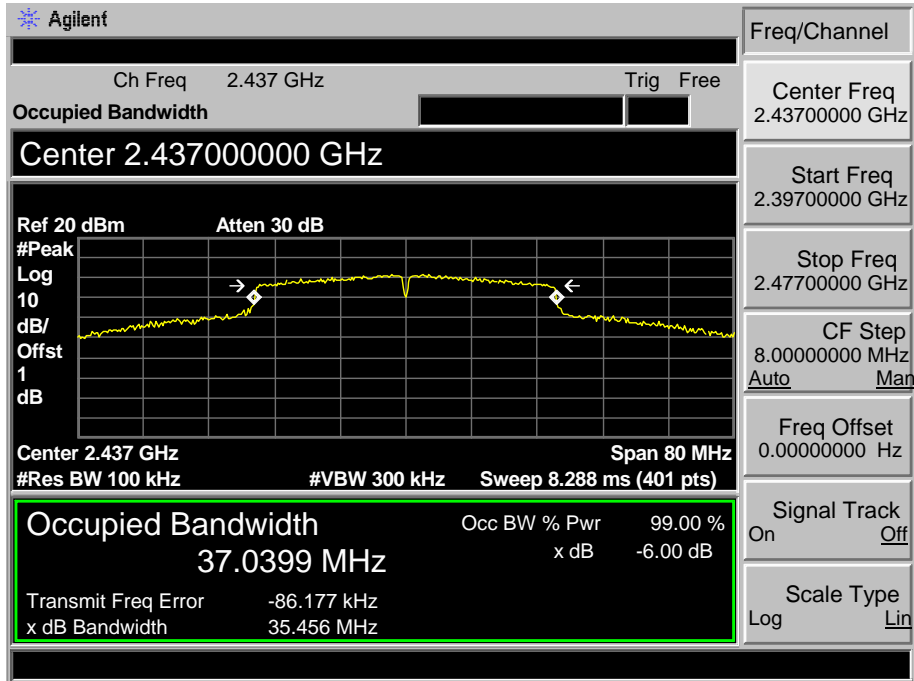

802.11N(HT40) Mode

2452 MHz

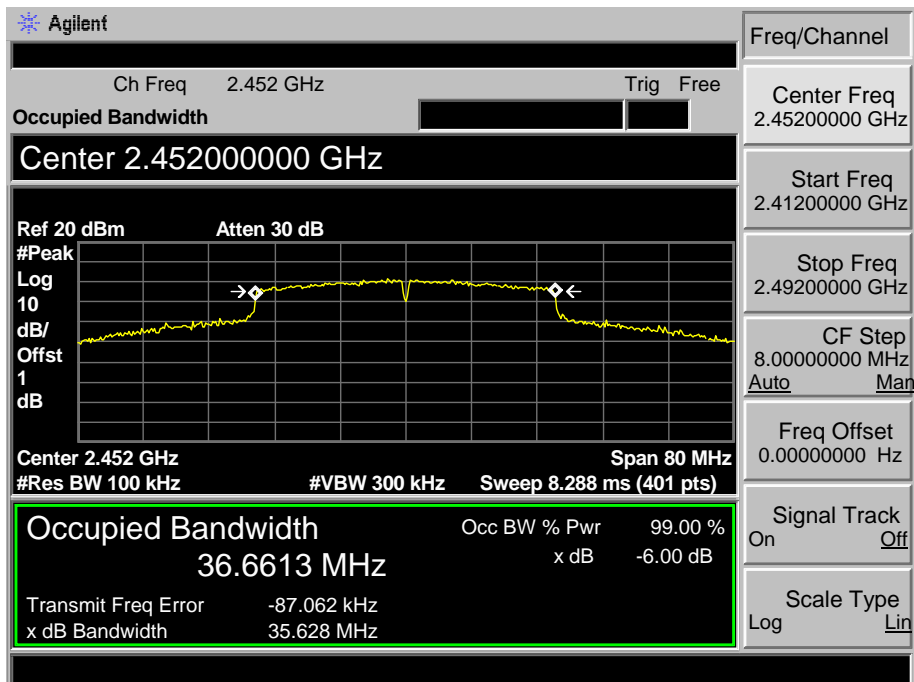


Attachment E-- Peak Output Power Test Data

Test Conditions:		Continuous Transmitting Mode	
Temperature:		25 °C	Relative Humidity: 55%
Test Voltage:		AC 120V/60 HZ	
Mode	Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)
802.11b	2412	15.57	30
	2437	15.62	
	2462	15.57	
802.11g	2412	14.15	
	2437	14.47	
	2462	14.06	
802.11n (HT20)	2412	13.80	
	2437	13.31	
	2462	13.54	
802.11n (HT40)	2422	12.60	
	2437	12.11	
	2452	12.20	
Result: PASS			


Duty Cycle		
Mode	Channel frequency (MHz)	Test Result
802.11b	2412	>98%
	2437	
	2462	
802.11g	2412	
	2437	
	2462	
802.11n (HT20)	2412	
	2437	
	2462	
802.11n (HT40)	2422	
	2437	
	2452	

Please see below plots


802.11 B Mode 2437 MHz

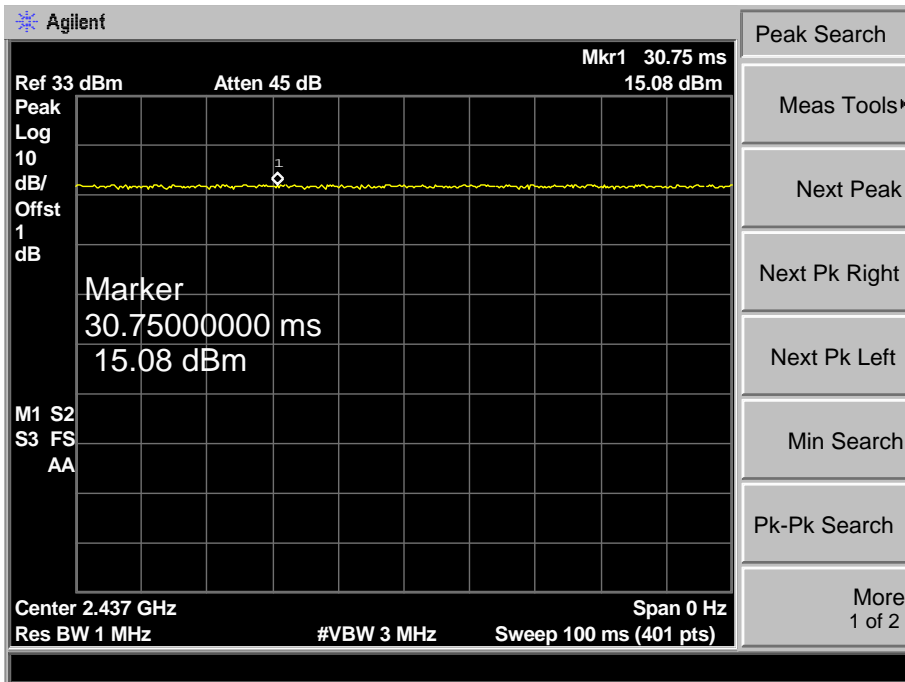


802.11 G Mode 2437 MHz

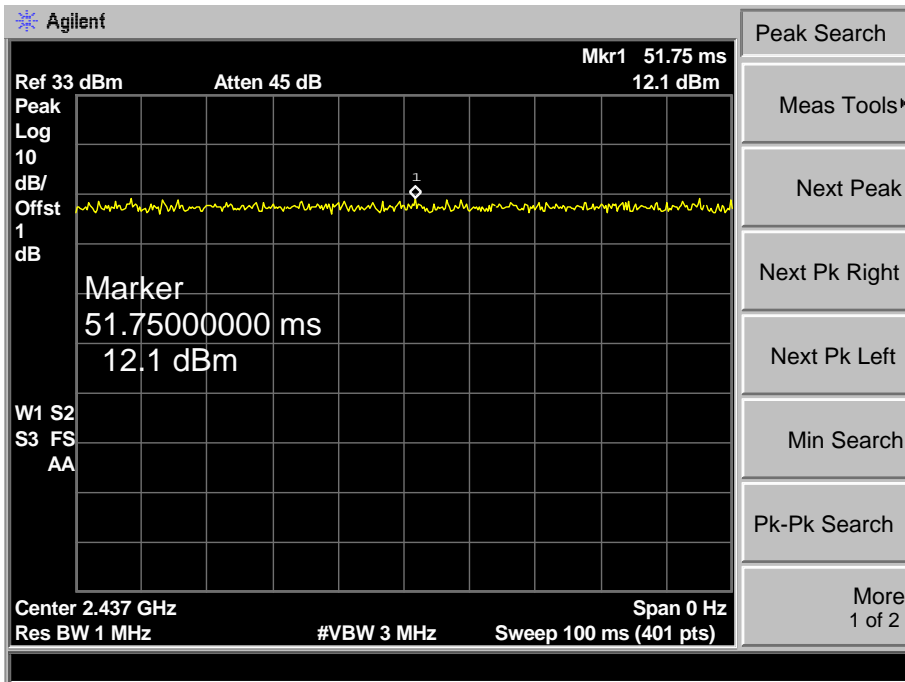

802.11 N20 Mode 2437 MHz

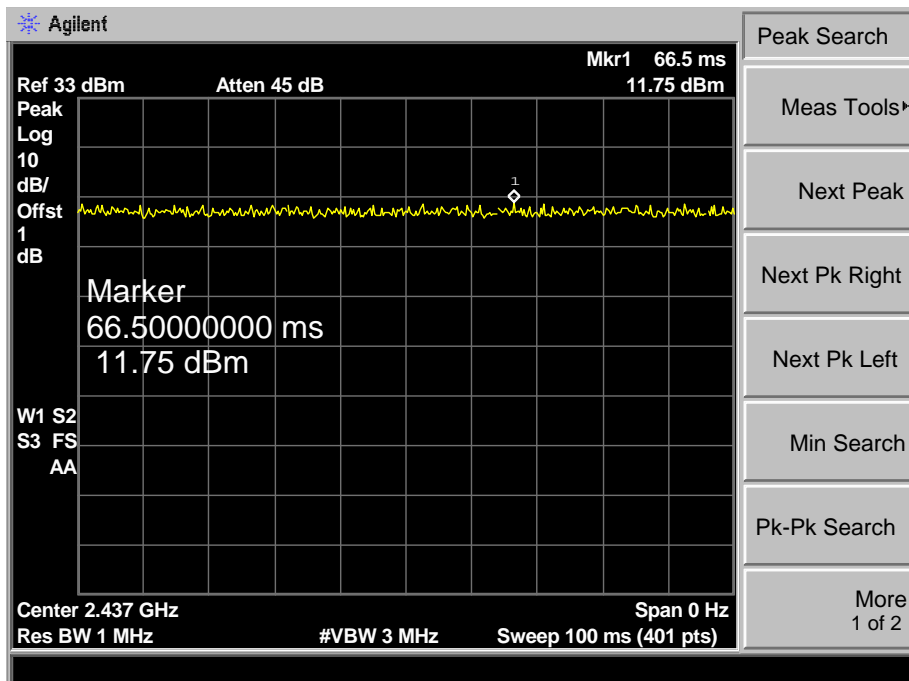

802.11 N40 Mode 2437 MHz

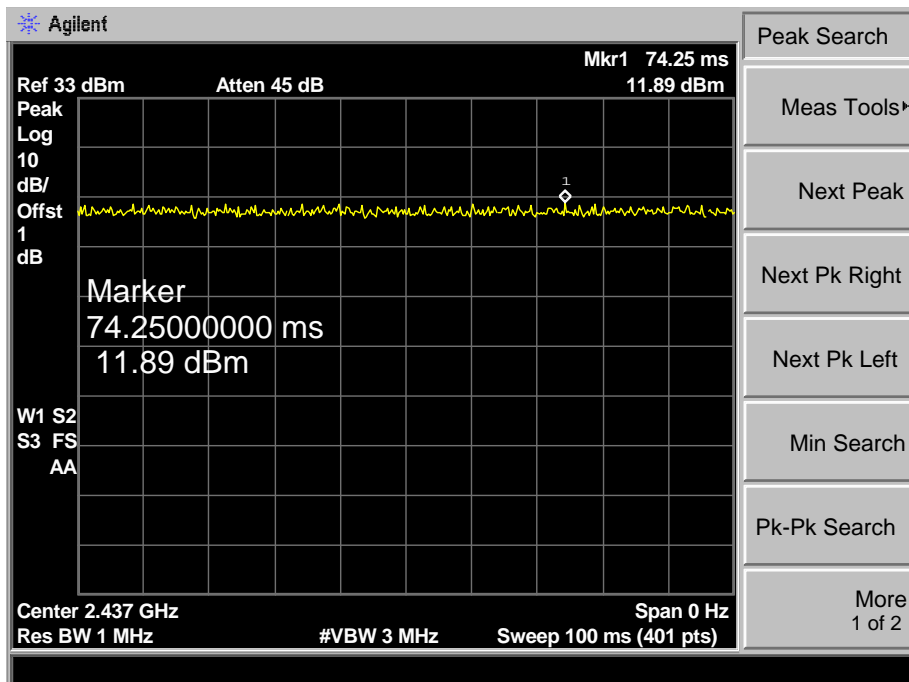


Attachment F-- Power Spectral Density Test Data

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX 802.11B Mode		
Channel Frequency (MHz)	Power Density (dBm/3 kHz)	Limit (dBm/3 kHz)	
2412	-5.509	8	
2437	-5.649		
2462	-4.806		
802.11B Mode			
2412 MHz			
<p>The figure is a screenshot of an Agilent Power Spectral Density (PSD) plot. The main display area shows a yellow trace on a black grid. A peak is marked with a white diamond and labeled 'Mkr1 2.412957125 GHz -5.509 dBm'. The plot parameters are: Ref 20 dBm, Atten 30 dB, Center 2.412 GHz, Span 20.15 MHz, #Res BW 3 kHz, #VBW 10 kHz, Sweep 2.304 s (401 pts). On the right side, there is a vertical toolbar with buttons: Peak Search, Meas Tools, Next Peak, Next Pk Right, Next Pk Left, Min Search, Pk-Pk Search, and More 1 of 2.</p>			


802.11B Mode

2437 MHz

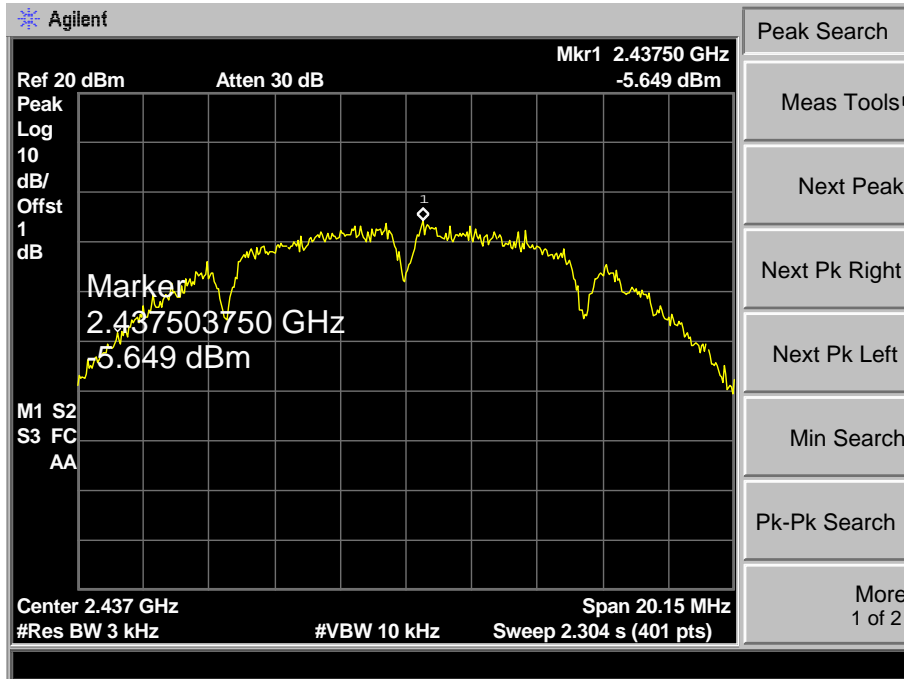

802.11B Mode


2462 MHz

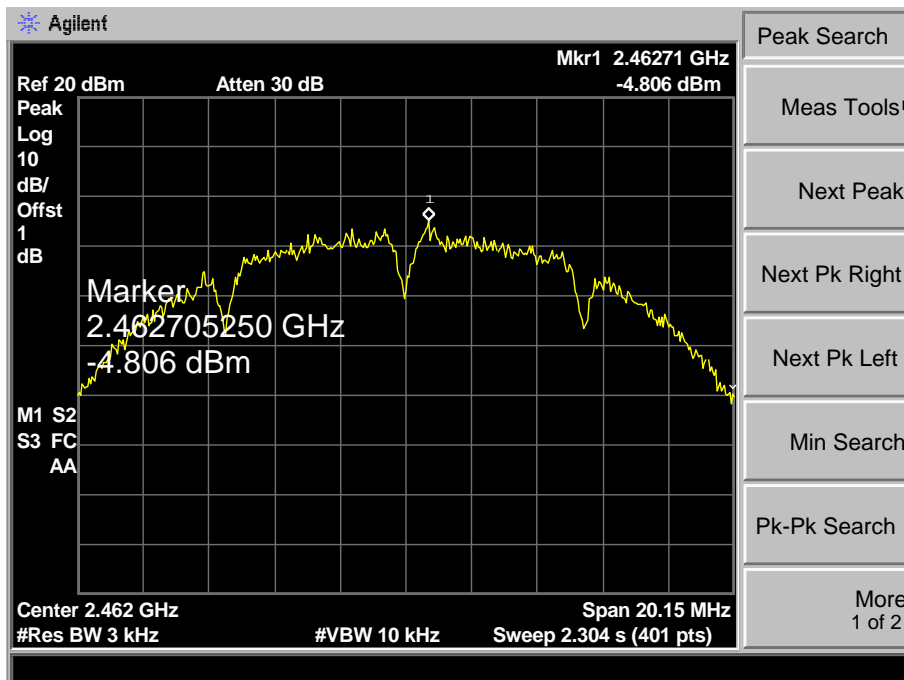

Temperature:	25 °C	Temperature:	25 °C
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX 802.11G Mode		
Channel Frequency (MHz)	Power Density (dBm/3 kHz)	Limit (dBm/3 kHz)	
2412	-8.393	8	
2437	-8.340		
2462	-8.736		
802.11G Mode			
2412 MHz			
<p>The screenshot shows an Agilent spectrum analyzer interface. The main display area shows a signal trace with a peak at 2.412226275 GHz and a power density of -8.393 dBm. The reference level is 20 dBm and the attenuation is 30 dB. The center frequency is 2.412 GHz, the span is 30.17 MHz, and the resolution bandwidth is 3 kHz. The sweep time is 3.45 seconds. On the right side, there is a vertical toolbar with buttons for Peak Search, Meas Tools, Next Peak, Next Pk Right, Next Pk Left, Min Search, Pk-Pk Search, and More (1 of 2).</p>			


802.11G Mode

2437 MHz

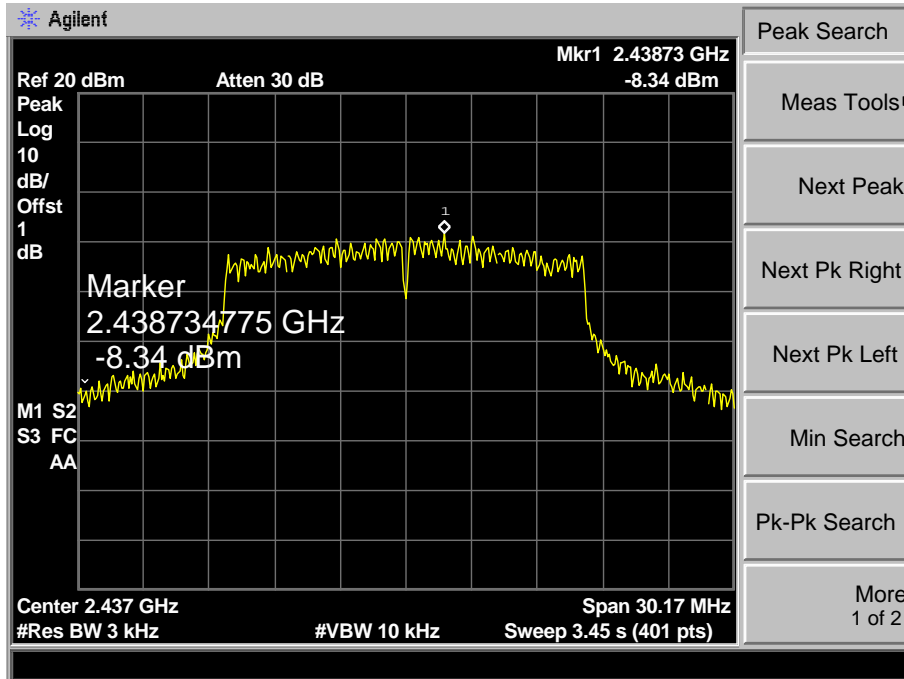

802.11G Mode


2462 MHz

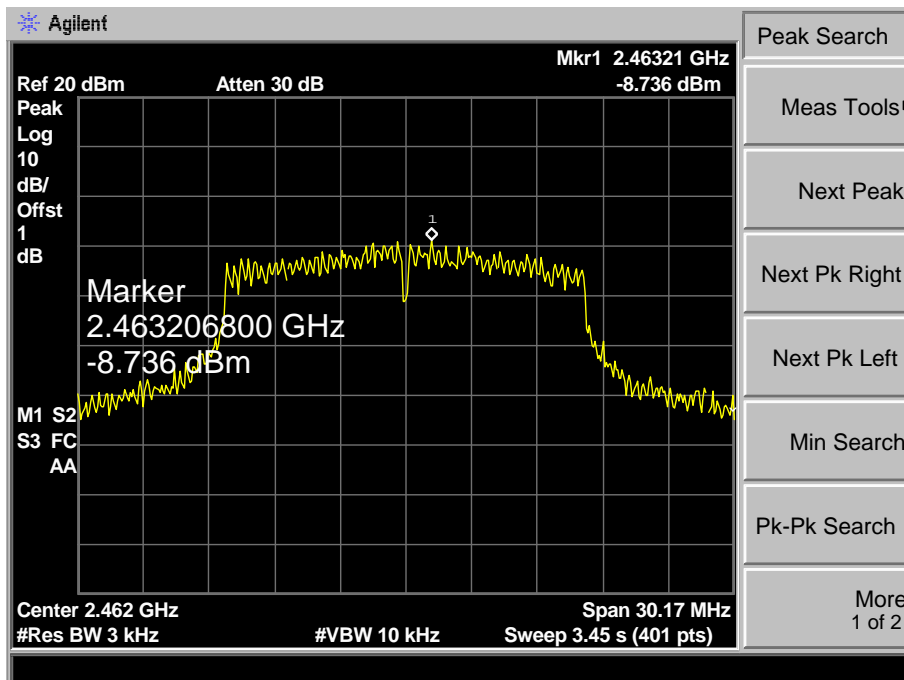

Temperature:	25 °C	Temperature:	25 °C
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX 802.11N(HT20) Mode		
Channel Frequency (MHz)	Power Density (dBm/3 kHz)	Limit (dBm/3 kHz)	
2412	-8.412	8	
2437	-9.236		
2462	-9.368		
802.11N(HT20) Mode			
2412 MHz			
<p>The screenshot shows an Agilent spectrum analyzer interface. The main display area shows a signal trace with a peak at 2.410340650 GHz and a power density of -8.412 dBm. The center frequency is set to 2.412 GHz, and the span is 30.17 MHz. The resolution bandwidth is 3 kHz, and the video bandwidth is 10 kHz. The sweep time is 3.45 seconds. The interface includes a peak search menu on the right with options like Peak Search, Meas Tools, Next Peak, Next Pk Right, Next Pk Left, Min Search, Pk-Pk Search, and More. The top status bar shows 'Agilent' and 'Mkr1 2.41034 GHz -8.412 dBm'.</p>			


802.11N(HT20) Mode

2437 MHz

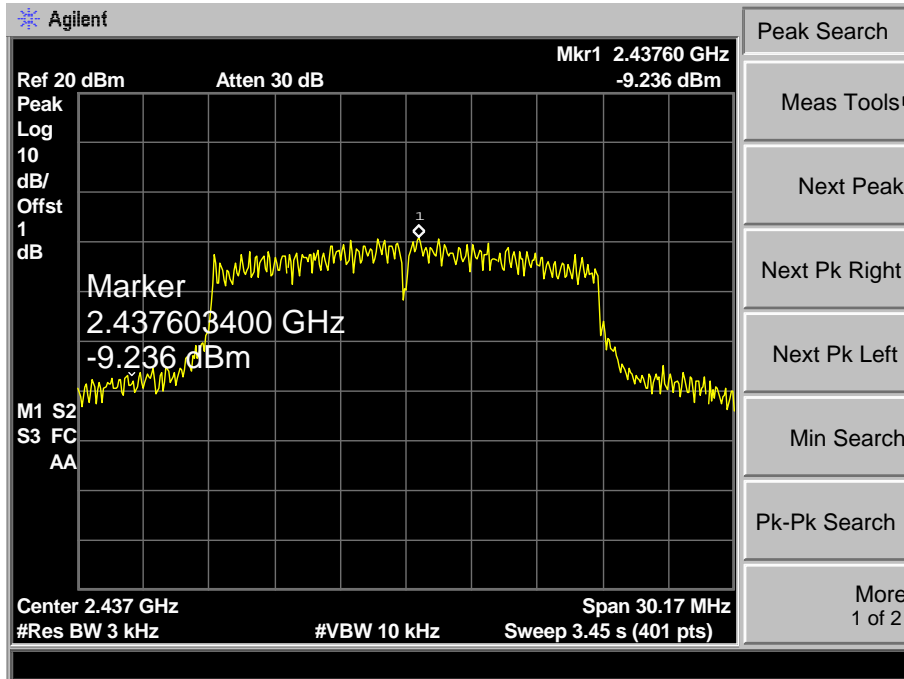

802.11N(HT20) Mode


2462 MHz

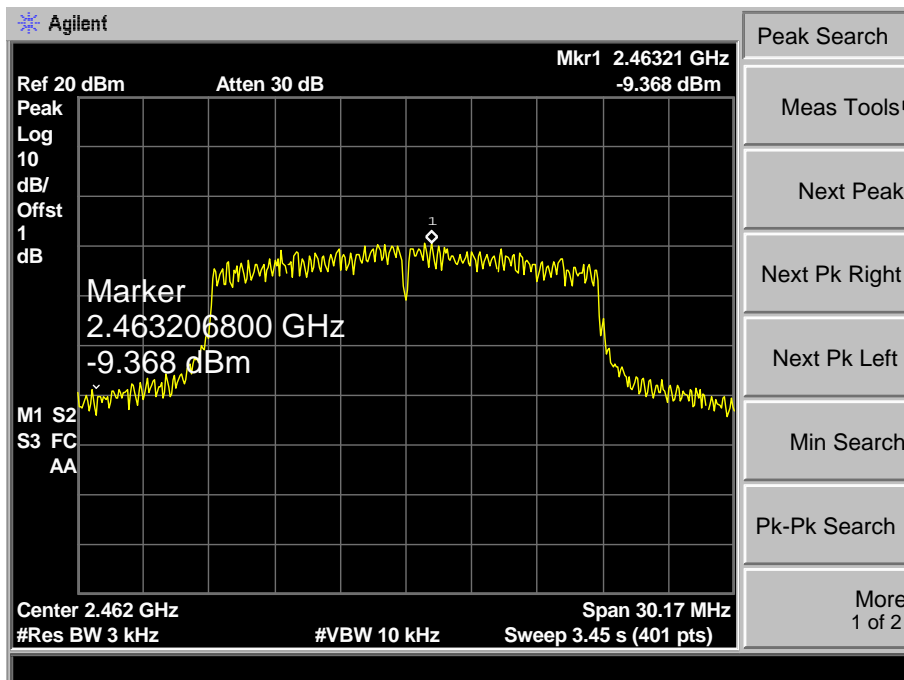

Temperature:	25 °C	Temperature:	25 °C
Test Voltage:	AC 120V/60 HZ		
Test Mode:	TX 802.11N(HT40) Mode		
Channel Frequency (MHz)	Power Density (dBm/3 kHz)	Limit (dBm/3 kHz)	
2422	-10.10	8	
2437	-11.02		
2452	-10.58		


802.11N(HT40) Mode

2422 MHz

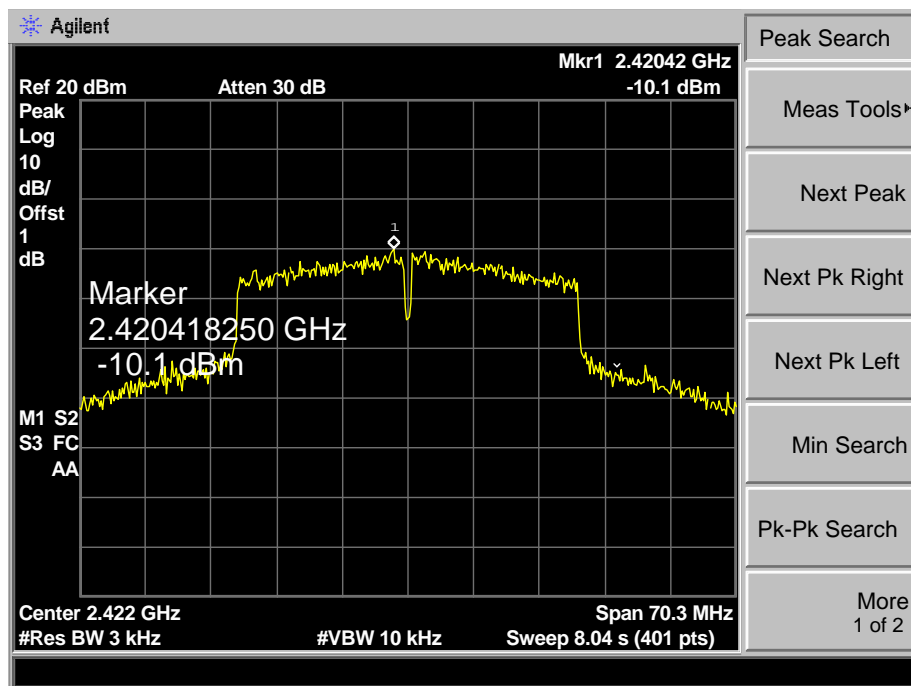


802.11N(HT40) Mode

2437 MHz

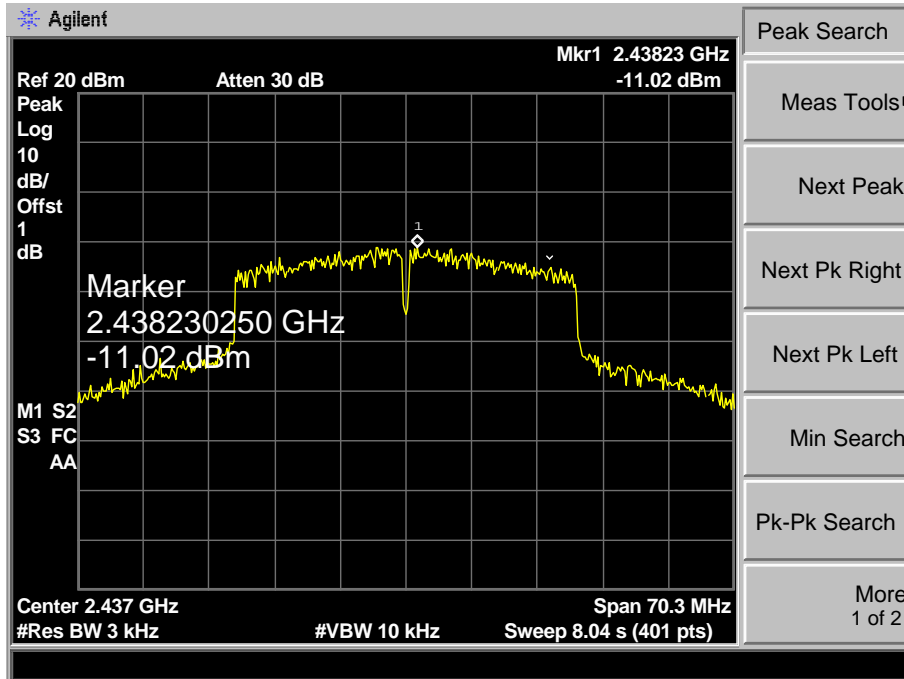

802.11N(HT40) Mode

2452 MHz

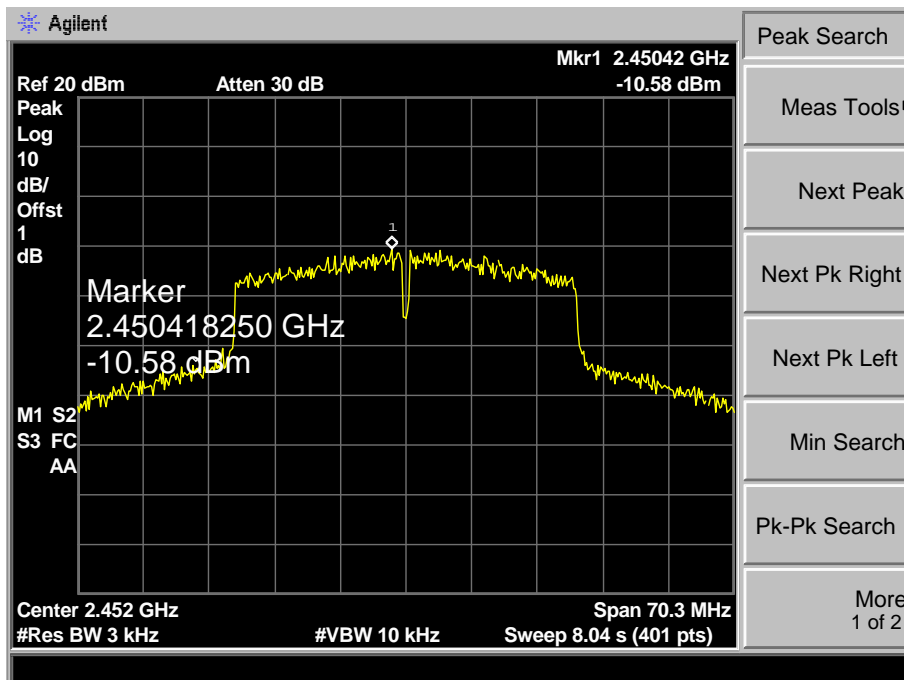

-----END OF REPORT-----