



**中认信通**

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



## TEST REPORT

**Applicant: Shenzhen Renqing Excellent Technology Co., Ltd.**

Address: 104, No.15, Longfu Industrial Zone, Huarong Road, Tongsheng Community,  
Dalang Street, Longhua District, Shenzhen, China

**FCC ID: 2AUA9-RQZY010**

**Product Name: AX3200 Smart Wi-Fi 6 Router**

**Model Number: RSD0620**

**Standard(s): 47 CFR Part 15, Subpart E(15.407)**

**ANSI C63.10-2013**

**KDB 789033 D02 General U-NII Test Procedures New  
Rules v02r01**

The above equipment has been tested and found compliant with the requirement of the relative standards  
by China Certification ICT Co., Ltd (Dongguan)

**Report Number: CR21090071-00B**

**Date Of Issue: 2022-06-24**

**Reviewed By: Sun Zhong**

*Sun Zhong*

Title: Manager

**Test Laboratory: China Certification ICT Co., Ltd (Dongguan)**

No. 113, Pingkang Road, Dalang Town, Dongguan,  
Guangdong, China

Tel: +86-769-82016888

## Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

## Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

# CONTENTS

<b>TEST FACILITY .....</b>	<b>2</b>
<b>DECLARATIONS.....</b>	<b>2</b>
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
<b>1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....</b>	<b>5</b>
<b>1.2 DESCRIPTION OF TEST CONFIGURATION.....</b>	<b>7</b>
1.2.1 EUT Operation Condition:.....	7
1.2.2 Support Equipment List and Details .....	10
1.2.3 Support Cable List and Details .....	10
1.2.4 Block Diagram of Test Setup.....	10
<b>1.3 MEASUREMENT UNCERTAINTY .....</b>	<b>12</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>13</b>
<b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>	<b>14</b>
<b>3.1 AC LINE CONDUCTED EMISSIONS.....</b>	<b>14</b>
3.1.1 Applicable Standard.....	14
3.1.2 EUT Setup.....	15
3.1.3 EMI Test Receiver Setup .....	15
3.1.4 Test Procedure .....	16
3.1.5 Corrected Amplitude & Margin Calculation.....	16
<b>3.2 RADIATION SPURIOUS EMISSIONS .....</b>	<b>17</b>
3.2.1 Applicable Standard.....	17
3.2.2 EUT Setup.....	18
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup .....	19
3.2.4 Test Procedure .....	19
3.2.5 Corrected Amplitude & Margin Calculation.....	20
<b>3.3 EMISSION BANDWIDTH: .....</b>	<b>21</b>
3.3.1 Applicable Standard.....	21
3.3.2 EUT Setup.....	21
3.3.3 Test Procedure .....	21
<b>3.4 MAXIMUM CONDUCTED OUTPUT POWER:.....</b>	<b>23</b>
3.4.1 Applicable Standard.....	23
3.4.2 EUT Setup.....	24
3.4.3 Test Procedure .....	24
<b>3.5 MAXIMUM POWER SPECTRAL DENSITY: .....</b>	<b>25</b>
3.5.1 Applicable Standard.....	25
3.5.2 EUT Setup.....	26
3.5.3 Test Procedure .....	26
<b>3.6 DUTY CYCLE:.....</b>	<b>27</b>
3.6.1 EUT Setup.....	27
3.6.2 Test Procedure .....	27
<b>3.7 ANTENNA REQUIREMENT.....</b>	<b>28</b>
3.7.1 Applicable Standard.....	28

3.7.2 Judgment.....28

**4. Test DATA AND RESULTS ..... 29**

**4.1 AC LINE CONDUCTED EMISSIONS .....29**

**4.2 RADIATION SPURIOUS EMISSIONS ..... 32**

**4.3 EMISSION BANDWIDTH: .....56**

**4.4 MAXIMUM CONDUCTED OUTPUT POWER: ..... 78**

**4.5 MAXIMUM POWER SPECTRAL DENSITY: .....82**

**4.6 DUTY CYCLE: ..... 198**

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

#### 1.1.1 General:

<b>EUT Name:</b>	AX3200 Smart Wi-Fi 6 Router
<b>EUT Model:</b>	RSD0620
<b>Operation Frequency:</b>	5180-5240 MHz (802.11a/n ht20/ac vht20/ax hew20) 5190-5230 MHz(802.11n ht40/ac vht40/ax hew40) 5210 MHz(802.11ac vht80/ax hew80) 5745-5825 MHz (802.11a/n ht20/ac vht20/ax hew20) 5755-5795 MHz(802.11n ht40/ac vht40/ax hew40) 5775 MHz(802.11ac vht80/ax hew80)
<b>Maximum Average Output Power (Conducted):</b>	5150-5250 MHz: 17.04dBm 5725-5850 MHz: 21.90dBm
<b>Modulation Type:</b>	802.11a/n/ac:OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM 802.11ax: OFDMA- BPSK, QPSK, 16QAM, 64QAM,256QAM, 1024QAM
<b>Rated Input Voltage:</b>	DC 12V from Adapter
<b>Serial Number:</b>	CR21090071-RF-S1
<b>EUT Received Date:</b>	2021.9.30
<b>EUT Received Status:</b>	Good

#### 1.1.2 Operation Frequency Detail:

##### For 802.11a/n ht20/ac vht20/ax hew20:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	149	5745
40	5200	153	5765
44	5220	157	5785
48	5240	161	5805
/	/	165	5825
Per section 15.31(m), the below frequencies were performed the test as below:			
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

##### For 802.11n ht40/ac vht40/ax hew40:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	151	5755
46	5230	159	5795
Per section 15.31(m), the below frequencies were performed the test as below:			
38	5190	151	5755
46	5230	159	5795

**For 802.11ac vht80/ax hew80:**

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	155	5775
Per section 15.31(m), the below frequencies were performed the test as below:			
42	5210	155	5775

**1.1.3 Antenna Information Detail ▲ :**

Antenna Chain	Manufacturer	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range	§15.203 Requirement
0,1,2,3	Shenzhen Renqing Excellent Technology Co., Ltd.	PCB	50	5dBi/ 2.4~2.5GHz 5dBi/ 5.15~5.85GHz	Compliance

The Method of §15.203 Compliance:

- Antenna must be permanently attached to the unit.  
 Antenna must use a unique type of connector to attach to the EUT.  
 Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

**1.1.4 Accessory Information:**

Accessory Description	Manufacturer	Model	Parameters
Adapter1#	SHENZHEN EAST SUN ELECTRONIC CO.,LTD	ES088G-X120150XYF	INPUT: 100-240V~50/60Hz 0.6A OUTPUT: DC12V 1.5A

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

<b>EUT Operation Mode:</b>				The system was configured for testing in Engineering Mode, which was provided by the manufacturer.			
<b>Equipment Modifications:</b>				No			
<b>EUT Exercise Software:</b>				RTL8852A MP Toolkit.exe			
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲ :							
<b>5150-5250 MHz Band(except 802.11ax):</b>							
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting			
				Chain 0	Chain 1	Chain 2	Chain 3
802.11a	Lowest	5180	6Mbps	16	16	16	16
	Middle	5200	6Mbps	16	16	16	16
	Highest	5240	6Mbps	16	16	16	16
802.11n ht20	Lowest	5180	MCS0	9	9	9	9
	Middle	5200	MCS0	9	9	9	9
	Highest	5240	MCS0	9	9	9	9
802.11n ht40	Lowest	5190	MCS0	9	9	9	9
	Highest	5230	MCS0	9	9	9	9
802.11ac vht80	Middle	5210	MCS0	16	16	16	16
<b>5725-5850 MHz Band(except 802.11ax):</b>							
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting			
				Chain 0	Chain 1	Chain 2	Chain 3
802.11a	Lowest	5745	6Mbps	16	16	16	15
	Middle	5785	6Mbps	16	16	16	15
	Highest	5825	6Mbps	16	16	16	15
802.11n ht20	Lowest	5745	MCS0	8.5	8.5	8.5	8.5
	Middle	5785	MCS0	8.5	8.5	8.5	8.5
	Highest	5825	MCS0	8.5	8.5	8.5	8.5
802.11n ht40	Lowest	5755	MCS0	8.5	9	8.5	8.5
	Highest	5795	MCS0	8.5	9	8.5	8.5
802.11ac vht80	Middle	5775	MCS0	16	16	16	16

802.11ax modes:

5150-5250 MHz Band(except 802.11ax):								
Test Modes	Test Channels	Test Frequency (MHz)	Data Rate	RU Config.	Power Level Setting			
					Chain 0	Chain 1	Chain 2	Chain 3
802.11ax hew20	Lowest	5180	MCS0	26/0	13	13	13	13
				52/37	13	13	13	13
				106/53	13	13	13	13
				242/61	13	13	13	13
	Middle	5200	MCS0	26/0	13	13	13	13
				52/37	13	13	13	13
				106/53	13	13	13	13
				242/61	13	13	13	13
	Highest	5240	MCS0	26/8	13	13	13	13
				52/40	13	13	13	13
				106/54	13	13	13	13
				242/61	13	13	13	13
802.11ax hew40	Lowest	5190	MCS0	26/0	13	13	13	13
				52/37	13	13	13	13
				106/53	13	13	13	13
				242/61	13	13	13	13
				484/65	13	13	13	13
	Highest	5230	MCS0	26/0	13	13	13	13
				52/37	13	13	13	13
				106/53	13	13	13	13
				242/61	13	13	13	13
				484/65	13	13	13	13
802.11ax hew80	Middle	5210	MCS0	26/0	12	12	12	12
				52/37	12	12	12	12
				106/53	12	12	12	12
				242/61	12	12	12	12
				484/65	12	12	12	12
				996/67	12	12	12	12



5725-5850 MHz Band(except 802.11ax):								
Test Modes	Test Channels	Test Frequency (MHz)	Data Rate	RU Config.	Power Level Setting			
					Chain 0	Chain 1	Chain 2	Chain 3
802.11ax hew20	Lowest	5745	MCS0	26/0	13	13	13	13
				52/37	13	13	13	13
				106/53	13	13	13	13
				242/61	13	13	13	13
	Middle	5785	MCS0	26/0	13	13	13	13
				52/37	13	13	13	13
				106/53	13	13	13	13
				242/61	13	13	13	13
	Highest	5825	MCS0	26/8	13	13	13	13
				52/40	13	13	13	13
				106/54	13	13	13	13
				242/61	13	13	13	13
802.11ax hew40	Lowest	5755	MCS0	26/0	13	13	13	13
				52/37	13	13	13	13
				106/53	13	13	13	13
				242/61	13	13	13	13
				484/65	13	13	13	13
	Highest	5795	MCS0	26/0	13	13	13	13
				52/37	13	13	13	13
				106/53	13	13	13	13
				242/61	13	13	13	13
				484/65	13	13	13	13
802.11ax hew80	Middle	5775	MCS0	26/0	12	12	12	12
				52/37	12	12	12	12
				106/53	12	12	12	12
				242/61	12	12	12	12
				484/65	12	12	12	12
				996/67	12	12	12	12

## Note:

1. The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.
2. The device supports SISO in all modes, and MIMO in 802.11n, 802.11ac and 802.11ax modes, per pretest, 4T4R mode was the worst mode and reported for 802.11n, 802.11ac and 802.11ax modes.
3. The 802.11ac vht20/vht40 was reduced since the identical parameters with 802.11n ht20 and ht40.
4. For 802.11 ax testing, all different tone and RU index configurations was performed for output power and Power Spectral Density test, the maximum result is in Full RU Configuration, so the other test was only performed at Full RU configuration(802.11ax hew20:242/61, 802.11ax hew40: 484/65, 802.11ax hew80: 996/67).

**1.2.2 Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	E480	PF-1QQYYP 19/06
Unknown	Load	RJ45 Load	RJ45 Load-1

**1.2.3 Support Cable List and Details**


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable*3	yes	No	10	EUT	Load
RJ45 Cable	yes	No	10	EUT	Laptop
DC Cable	No	No	1.2	Adapter	EUT

**1.2.4 Block Diagram of Test Setup**


AC line conducted emissions:

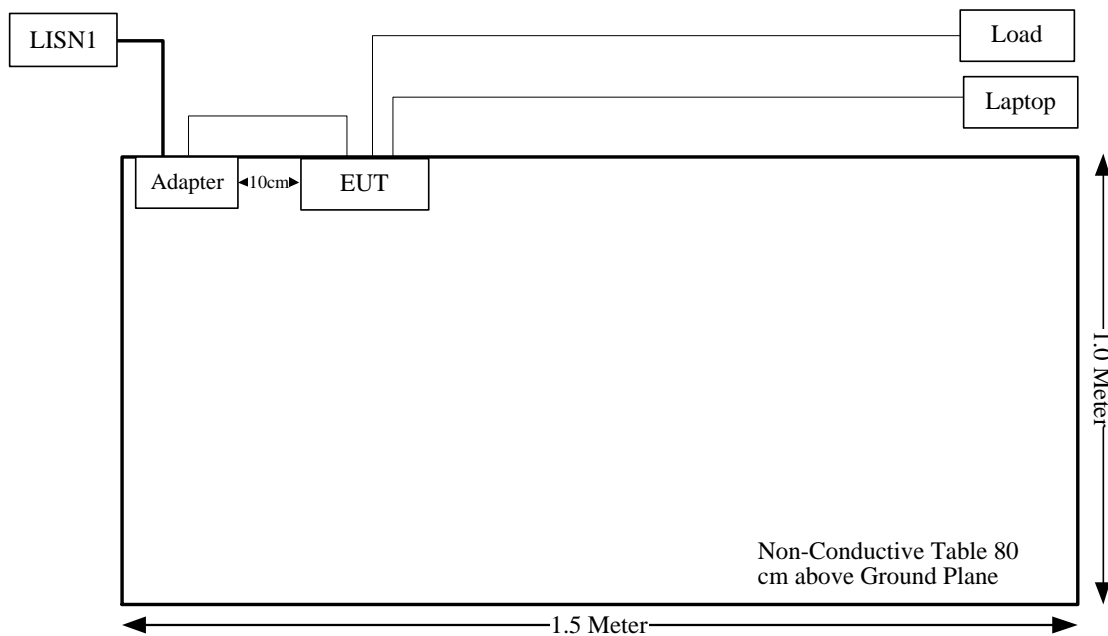

Spurious Emissions:  
Below 1GHz:

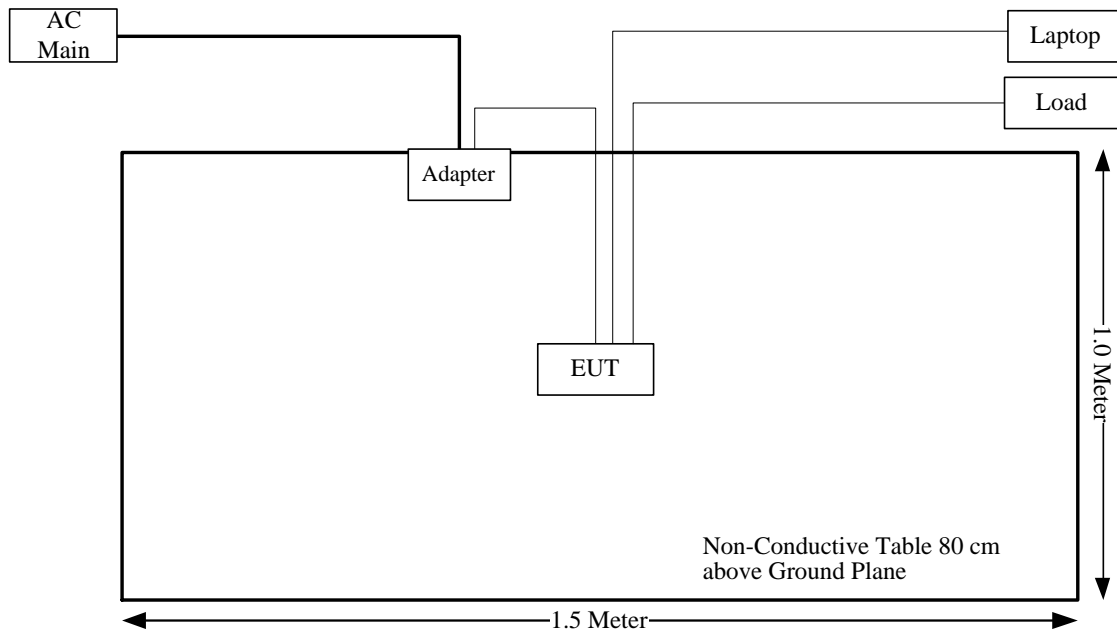

Above 1GHz:

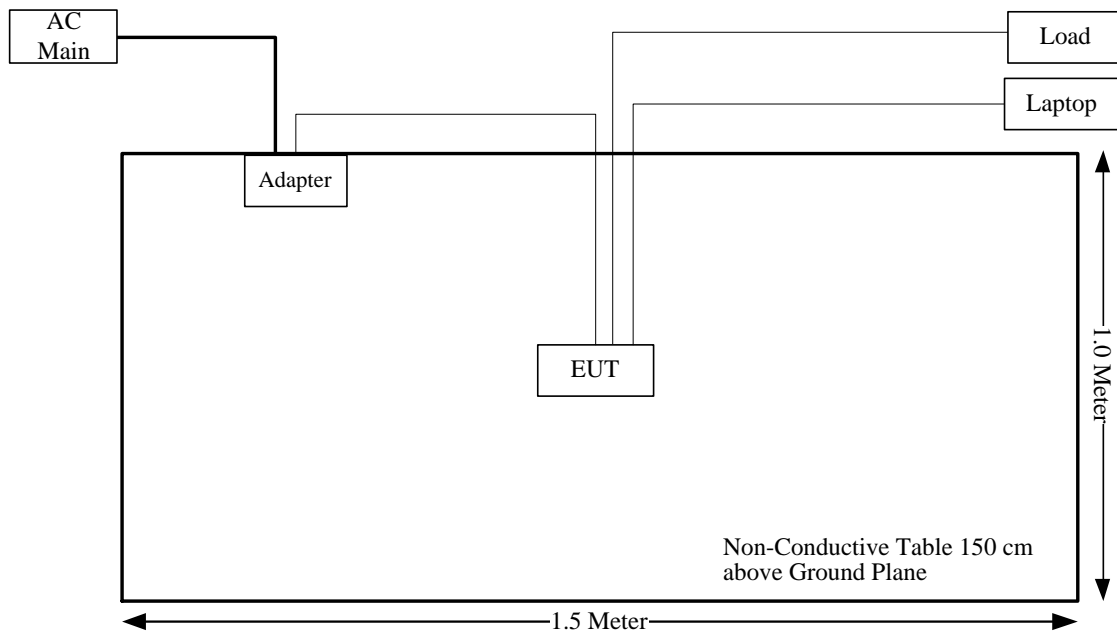

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{dB}$
Power Spectral Density, conducted	$\pm 0.61\text{dB}$
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	$\pm 1.26\text{dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

## 2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
FCC §15.207(a)	AC line conducted emissions	Compliant
FCC §15.205& §15.209 & §15.407(b)	Undesirable Emission& Restricted Bands	Compliant
FCC §15.407(a) (e)	Emission Bandwidth	Compliant
FCC §15.407(a)	Conducted Transmitter Output Power	Compliant
FCC §15.407 (a)	Power Spectral Density	Compliant
FCC §15.203	Antenna Requirement	Compliant

### 3. REQUIREMENTS AND TEST PROCEDURES

#### 3.1 AC Line Conducted Emissions

##### 3.1.1 Applicable Standard

FCC §15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

- (1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.
- (2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.
- (3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

### 3.1.2 EUT Setup

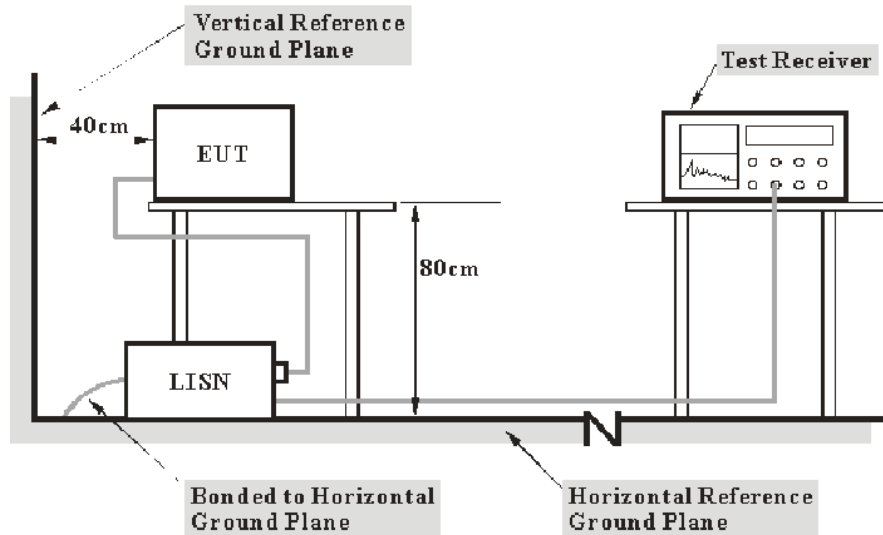

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

### 3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### 3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

### 3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result



## 3.2 Radiation Spurious Emissions

### 3.2.1 Applicable Standard

FCC §15.407 (b);

*Undesirable emission limits.* Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.


(10) The provisions of § 15.205 apply to intentional radiators operating under this section.

(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.


(c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

### 3.2.2 EUT Setup


Below 1GHz:

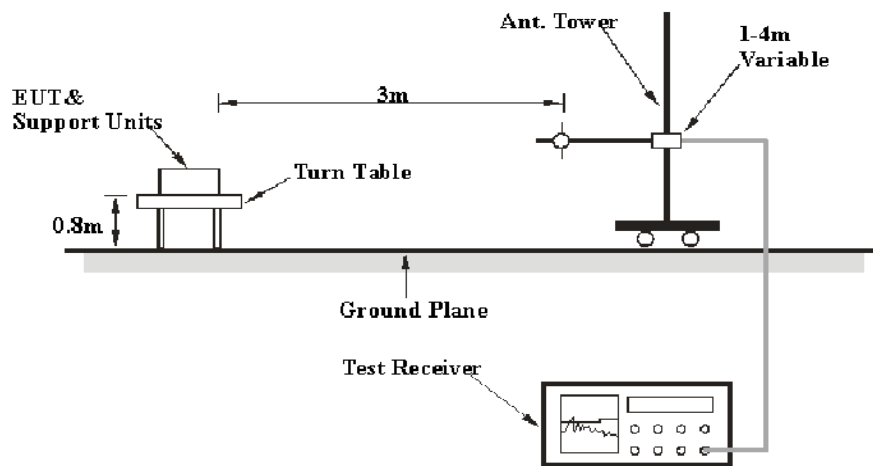

1-26.5 GHz:

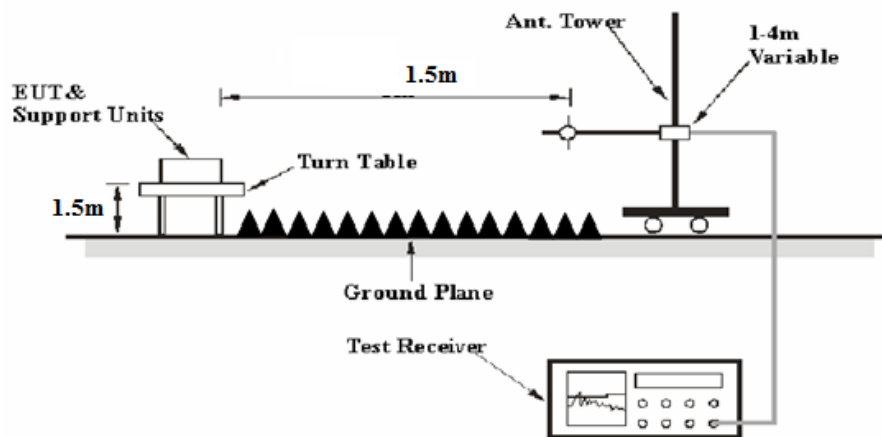

26.5-40 GHz:

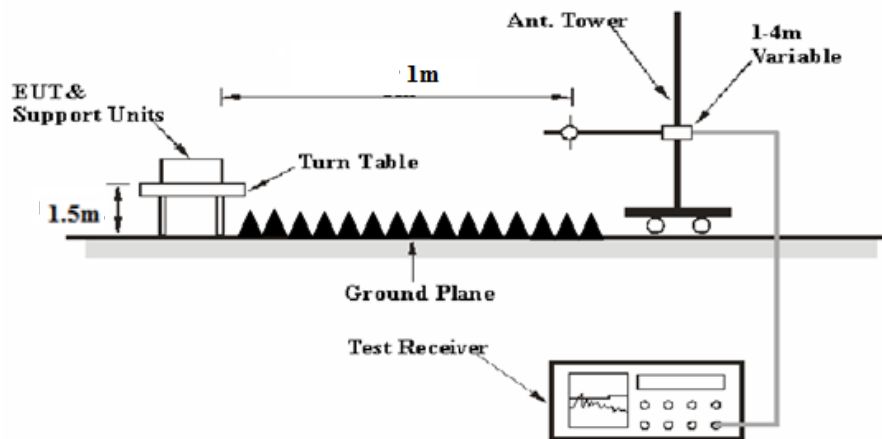

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### 3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

### 3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as:  $E [dB\mu V/m] = EIRP[dBm] + 95.2$ , for  $d = 3$  meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation Factor =  $20 \log (\text{specific distance } [3m]/\text{test distance } [1.5m])$  dB= 6.02 dB

or

Distance extrapolation Factor =  $20 \log (\text{specific distance } [3m]/\text{test distance } [1m])$  dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

### 3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

For 30MHz-1GHz:

$$\text{Result} = \text{Reading} + \text{Factor}$$

For 1GHz-40GHz

$$\text{Result} = \text{Reading} + \text{Factor} - \text{Distance extrapolation Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Result}$$

### 3.3 Emission Bandwidth:

#### 3.3.1 Applicable Standard


FCC §15.407 (a),(h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

#### 3.3.2 EUT Setup

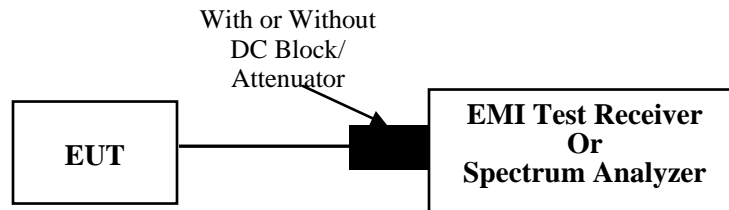

#### 3.3.3 Test Procedure

##### 26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = peak.
- d) Trace mode = max hold
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

**99% Occupied Bandwidth:**

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (OBW/RBW)]$  below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

**6 dB emission bandwidth:**

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

### 3.4 Maximum conducted output power:

#### 3.4.1 Applicable Standard

FCC §15.407(a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 3.4.2 EUT Setup

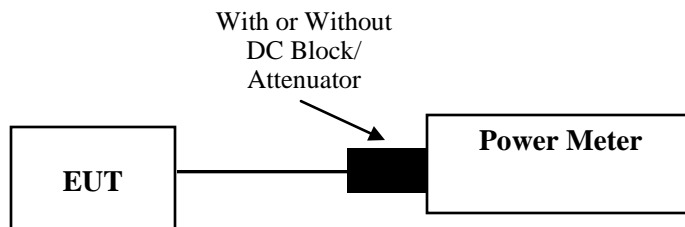

### 3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.1.3

Method PM-G is measurement using a gated RF average power meter. Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.



### 3.5 Maximum power spectral density:

#### 3.5.1 Applicable Standard

FCC §15.407(a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 3.5.2 EUT Setup

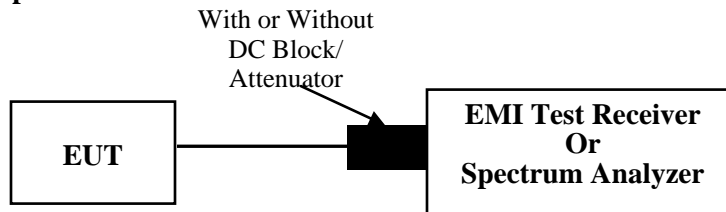

### 3.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

**Method SA-3** (power averaging (rms) detection with max hold):

(i) Set span to encompass the entire EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set sweep trigger to “free run.”

(iii) Set RBW = 1 MHz.

(iv) Set VBW  $\geq$  3 MHz

(v) Number of points in sweep  $\geq 2 \times \text{span} / \text{RBW}$ . (This ensures that bin-to-bin spacing is  $\leq \text{RBW}/2$ , so that narrowband signals are not lost between frequency bins.)

(vi) Sweep time  $\leq (\text{number of points in sweep}) \times T$ , where  $T$  is defined in II.B.1.a).

Note: If this results in a sweep time less than the auto sweep time of the analyzer, Method SA-3 Alternative shall not be used. (The purpose of this step is to ensure that averaging time in each bin is less than or equal to the minimum time of a transmission.)

(vii) Detector = power averaging (rms).


(viii) Trace mode = max hold.

(ix) Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used.

### 3.6 Duty Cycle:

#### 3.6.1 EUT Setup

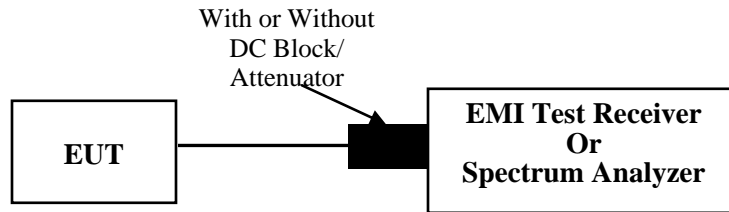

#### 3.6.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.
- 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

## **3.7 Antenna Requirement**

### **3.7.1 Applicable Standard**

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### **3.7.2 Judgment**

Please refer to the Antenna Information detail in Section 1.

## 4. Test DATA AND RESULTS

### 4.1 AC Line Conducted Emissions

Serial Number:	CR21090071-RF-S1	Test Date:	2022-04-14
Test Site:	CE	Test Mode:	Transmitting (802.11a Chain 0 5785MHz was the worst )
Tester:	Nick Tang	Test Result:	Pass

#### Environmental Conditions:


Temperature: (°C)	23	Relative Humidity: (%)	68	ATM Pressure: (kPa)	100.6
----------------------	----	------------------------------	----	------------------------	-------

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2022-04-01	2023-03-31
R&S	EMI Test Receiver	ESR3	102726	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2021-08-08	2022-08-07
Audix	Test Software	E3	190306 (V9)	N/A	N/A


*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Line:

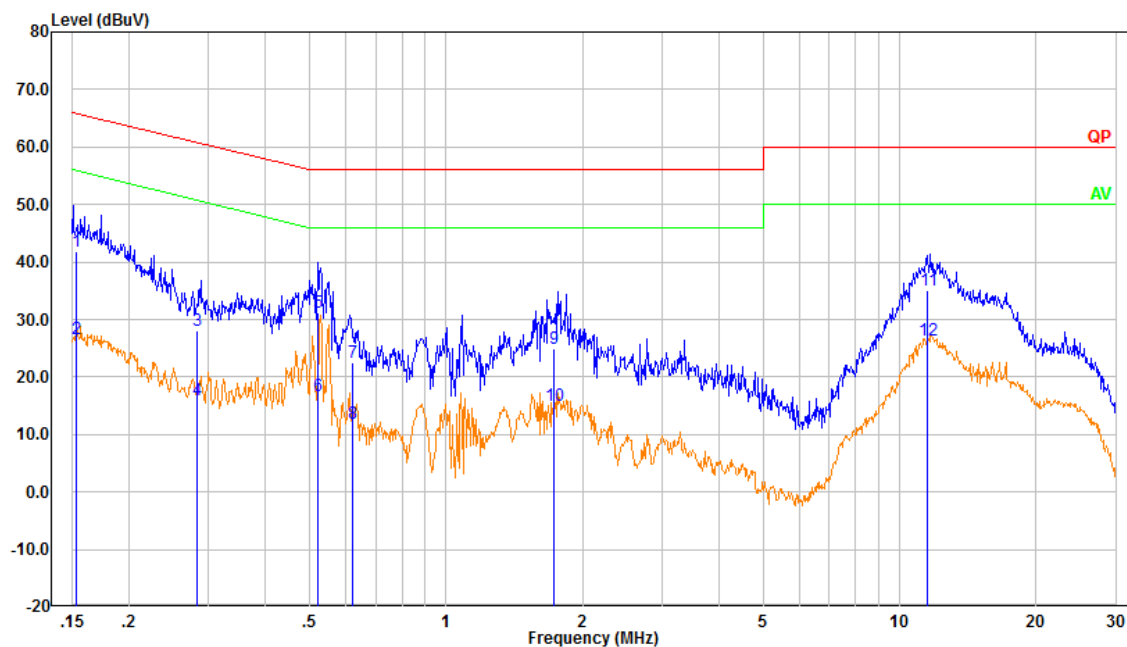

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Detector
1	0.153	32.35	9.61	41.96	65.85	23.89	QP
2	0.153	16.91	9.61	26.52	55.85	29.33	Average
3	0.282	18.46	9.61	28.07	60.74	32.67	QP
4	0.282	6.41	9.61	16.02	50.74	34.72	Average
5	0.520	21.63	9.61	31.24	56.00	24.76	QP
6	0.520	7.20	9.61	16.81	46.00	29.19	Average
7	0.621	12.86	9.62	22.48	56.00	33.52	QP
8	0.621	2.25	9.62	11.87	46.00	34.13	Average
9	1.735	15.24	9.63	24.86	56.00	31.14	QP
10	1.735	5.35	9.63	14.97	46.00	31.03	Average
11	11.545	25.51	9.67	35.18	60.00	24.82	QP
12	11.545	16.75	9.67	26.42	50.00	23.58	Average

Neutral:

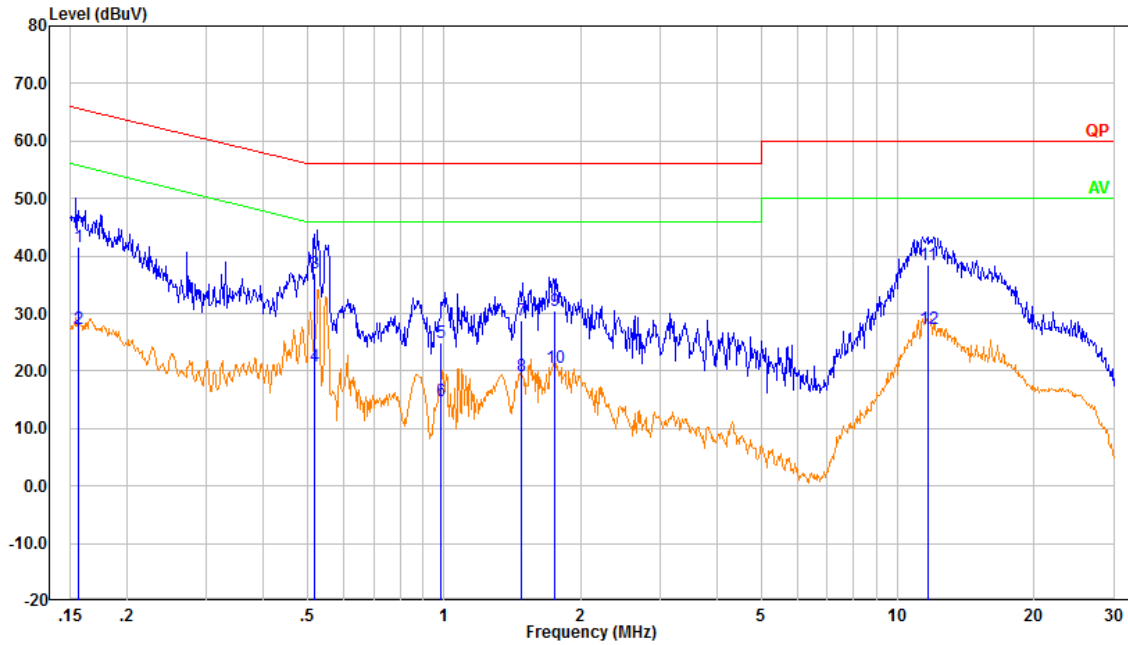

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.156	31.91	9.61	41.52	65.66	24.14	QP
2	0.156	17.77	9.61	27.38	55.66	28.28	Average
3	0.519	27.29	9.61	36.91	56.00	19.09	QP
4	0.519	11.17	9.61	20.79	46.00	25.21	Average
5	0.985	15.20	9.62	24.82	56.00	31.18	QP
6	0.985	5.23	9.62	14.85	46.00	31.15	Average
7	1.480	19.12	9.62	28.74	56.00	27.26	QP
8	1.480	9.61	9.62	19.23	46.00	26.77	Average
9	1.754	20.78	9.63	30.41	56.00	25.59	QP
10	1.754	10.83	9.63	20.46	46.00	25.54	Average
11	11.663	28.71	9.67	38.38	60.00	21.62	QP
12	11.663	17.76	9.67	27.43	50.00	22.57	Average

## 4.2 Radiation Spurious Emissions

Serial Number:	CR21090071-RF-S1	Test Date:	2022-04-29~2022-05-07
Test Site:	966-1,966-2	Test Mode:	Transmitting
Tester:	Veyo Zhang, Tommy Luo	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	21.8~26.2	Relative Humidity: (%)	61~69	ATM Pressure: (kPa)	100.8~101.3

### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSV40	101591	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2021-08-08	2022-08-07
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021-02-05	2024-02-04
AH	Preamplifier	PAM-1840VH	190	2021-11-19	2022-11-18
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2021-08-08	2022-08-07
E-Microwave	Band Rejection Filter	5150-5850MHz	OE01902423	2021-08-08	2022-08-07
Mini Circuits	High Pass Filter	VHF-6010+	31119	2021-08-08	2022-08-07
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021-02-05	2024-02-04

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data:


Please refer to the below table and plots.

Note: The device can be mounted in multiple orientations, test was performed with X,Y, Z Axis according to C63.10 figure 8, the worst orientation was photographed and it's data was recorded.




1) 30MHz-1GHz(802.11a Chain 0 5785MHz was the worst)

Horizontal:

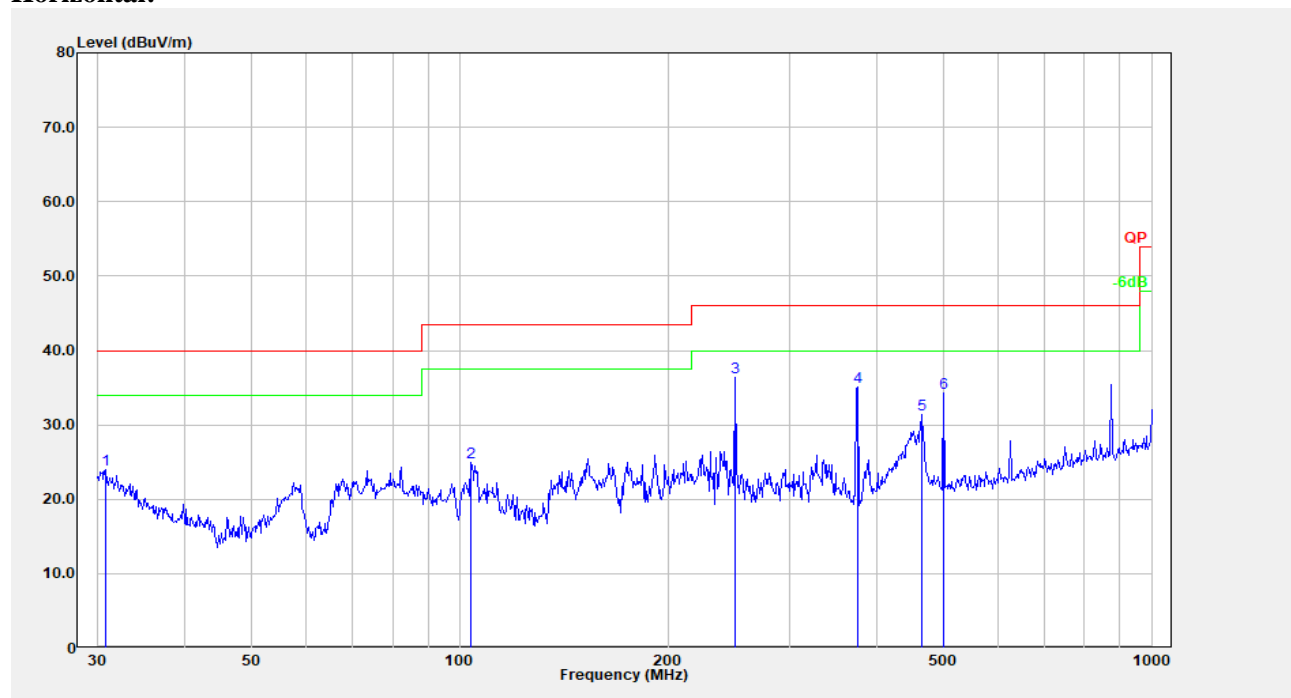

No.	Frequency (MHz)	Reading (dB $\mu$ V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
1	30.745	28.30	-4.36	23.93	40.00	16.07	Peak
2	103.806	38.84	-13.83	25.01	43.50	18.49	Peak
3	250.301	49.67	-13.25	36.41	46.00	9.59	Peak
4	375.939	44.53	-9.48	35.05	46.00	10.95	Peak
5	465.599	38.09	-6.70	31.40	46.00	14.60	Peak
6	501.179	40.57	-6.22	34.35	46.00	11.65	Peak

**Vertical:**

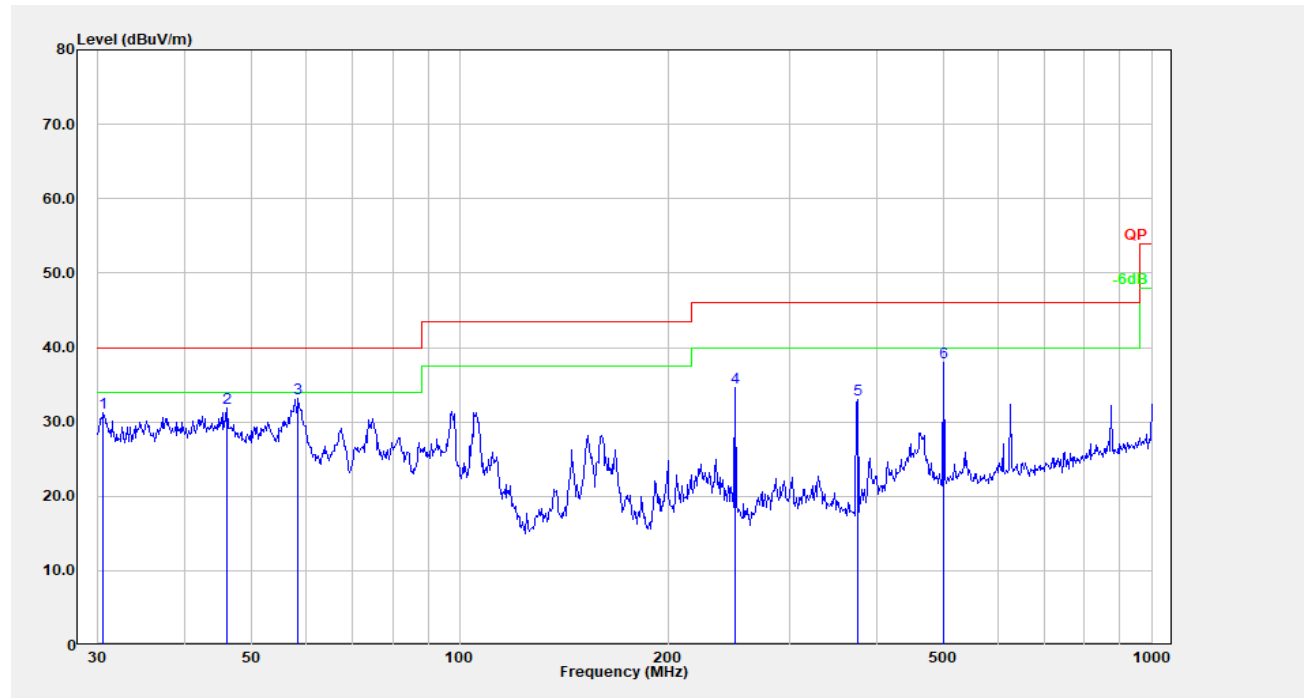

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	35.44	-4.20	31.24	40.00	8.76	Peak
2	46.016	47.02	-15.08	31.94	40.00	8.06	Peak
3	58.407	50.70	-17.59	33.11	40.00	6.89	Peak
4	250.301	47.87	-13.25	34.62	46.00	11.38	Peak
5	375.939	42.45	-9.48	32.96	46.00	13.04	Peak
6	501.179	44.19	-6.22	37.97	46.00	8.03	Peak

**2) 1GHz-40GHz:**  
**5150-5250MHz**  
**802.11a, Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5180MHz							
5180.00	69.50	PK	H	38.68	102.16	N/A	N/A
5180.00	57.85	AV	H	38.68	90.51	N/A	N/A
5180.00	80.35	PK	V	38.68	113.01	N/A	N/A
5180.00	69.27	AV	V	38.68	101.93	N/A	N/A
5150.00	36.62	PK	V	38.64	69.24	74.00	4.76
5150.00	18.00	AV	V	38.64	50.62	54.00	3.38
10360.00	32.47	PK	V	19.18	45.63	68.20	22.57
15540.00	46.93	PK	V	22.44	63.35	74.00	10.65
15540.00	29.17	AV	V	22.44	45.59	54.00	8.41
Middle Channel: 5200 MHz							
5200.00	70.87	PK	H	38.70	103.55	N/A	N/A
5200.00	60.64	AV	H	38.70	93.32	N/A	N/A
5200.00	81.20	PK	V	38.70	113.88	N/A	N/A
5200.00	69.86	AV	V	38.70	102.54	N/A	N/A
10400.00	32.61	PK	V	19.16	45.75	68.20	22.45
15600.00	44.86	PK	V	22.41	61.25	74.00	12.75
15600.00	27.05	AV	V	22.41	43.44	54.00	10.56
High Channel: 5240 MHz							
5240.00	69.65	PK	H	38.85	102.48	N/A	N/A
5240.00	58.68	AV	H	38.85	91.51	N/A	N/A
5240.00	80.27	PK	V	38.85	113.10	N/A	N/A
5240.00	67.26	AV	V	38.85	100.09	N/A	N/A
5350.00	30.67	PK	V	39.03	63.68	74.00	10.32
5350.00	16.71	AV	V	39.03	49.72	54.00	4.28
10480.00	43.83	PK	V	18.86	56.67	68.20	11.53
15720.00	46.70	PK	V	22.28	62.96	74.00	11.04
15720.00	27.11	AV	V	22.28	43.37	54.00	10.63

**802.11a, Chain 1:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5180MHz							
5180.00	68.93	PK	H	38.68	101.59	N/A	N/A
5180.00	58.22	AV	H	38.68	90.88	N/A	N/A
5180.00	80.09	PK	V	38.68	112.75	N/A	N/A
5180.00	69.33	AV	V	38.68	101.99	N/A	N/A
5150.00	38.96	PK	V	38.64	71.58	74.00	2.42
5150.00	18.15	AV	V	38.64	50.77	54.00	3.23
10360.00	32.07	PK	V	19.18	45.23	68.20	22.97
15540.00	38.32	PK	V	22.44	54.74	74.00	19.26
15540.00	23.43	AV	V	22.44	39.85	54.00	14.15
Middle Channel: 5200 MHz							
5200.00	68.93	PK	H	38.70	101.61	N/A	N/A
5200.00	58.27	AV	H	38.70	90.95	N/A	N/A
5200.00	80.39	PK	V	38.70	113.07	N/A	N/A
5200.00	69.57	AV	V	38.70	102.25	N/A	N/A
10400.00	31.35	PK	V	19.16	44.49	68.20	23.71
15600.00	36.17	PK	V	22.41	52.56	74.00	21.44
15600.00	23.74	AV	V	22.41	40.13	54.00	13.87
High Channel: 5240 MHz							
5240.00	70.46	PK	H	38.85	103.29	N/A	N/A
5240.00	59.99	AV	H	38.85	92.82	N/A	N/A
5240.00	79.92	PK	V	38.85	112.75	N/A	N/A
5240.00	69.11	AV	V	38.85	101.94	N/A	N/A
5350.00	29.52	PK	V	39.03	62.53	74.00	11.47
5350.00	16.83	AV	V	39.03	49.84	54.00	4.16
10480.00	37.49	PK	V	18.86	50.33	68.20	17.87
15720.00	36.42	PK	V	22.28	52.68	74.00	21.32
15720.00	24.69	AV	V	22.28	40.95	54.00	13.05

**802.11a, Chain 2:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5180MHz							
5180.00	67.79	PK	H	38.68	100.45	N/A	N/A
5180.00	57.14	AV	H	38.68	89.80	N/A	N/A
5180.00	77.71	PK	V	38.68	110.37	N/A	N/A
5180.00	66.45	AV	V	38.68	99.11	N/A	N/A
5150.00	37.65	PK	V	38.64	70.27	74.00	3.73
5150.00	17.82	AV	V	38.64	50.44	54.00	3.56
10360.00	32.22	PK	V	19.18	45.38	68.20	22.82
15540.00	35.30	PK	V	22.44	51.72	74.00	22.28
15540.00	23.04	AV	V	22.44	39.46	54.00	14.54
Middle Channel: 5200 MHz							
5200.00	68.48	PK	H	38.70	101.16	N/A	N/A
5200.00	57.81	AV	H	38.70	90.49	N/A	N/A
5200.00	78.10	PK	V	38.70	110.78	N/A	N/A
5200.00	67.24	AV	V	38.70	99.92	N/A	N/A
10400.00	31.81	PK	V	19.16	44.95	68.20	23.25
15600.00	36.68	PK	V	22.41	53.07	74.00	20.93
15600.00	24.50	AV	V	22.41	40.89	54.00	13.11
High Channel: 5240 MHz							
5240.00	68.72	PK	H	38.85	101.55	N/A	N/A
5240.00	58.15	AV	H	38.85	90.98	N/A	N/A
5240.00	77.34	PK	V	38.85	110.17	N/A	N/A
5240.00	66.76	AV	V	38.85	99.59	N/A	N/A
5350.00	29.84	PK	V	39.03	62.85	74.00	11.15
5350.00	16.67	AV	V	39.03	49.68	54.00	4.32
10480.00	42.41	PK	V	18.86	55.25	68.20	12.95
15720.00	36.21	PK	V	22.28	52.47	74.00	21.53
15720.00	23.87	AV	V	22.28	40.13	54.00	13.87

**802.11a, Chain 3:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5180MHz							
5180.00	70.48	PK	H	38.68	103.14	N/A	N/A
5180.00	59.82	AV	H	38.68	92.48	N/A	N/A
5180.00	77.96	PK	V	38.68	110.62	N/A	N/A
5180.00	67.35	AV	V	38.68	100.01	N/A	N/A
5150.00	30.94	PK	V	38.64	63.56	74.00	10.44
5150.00	17.45	AV	V	38.64	50.07	54.00	3.93
10360.00	32.87	PK	V	19.18	46.03	68.20	22.17
15540.00	34.93	PK	V	22.44	51.35	74.00	22.65
15540.00	22.50	AV	V	22.44	38.92	54.00	15.08
Middle Channel: 5200 MHz							
5200.00	70.10	PK	H	38.70	102.78	N/A	N/A
5200.00	59.05	AV	H	38.70	91.73	N/A	N/A
5200.00	77.75	PK	V	38.70	110.43	N/A	N/A
5200.00	66.82	AV	V	38.70	99.50	N/A	N/A
10400.00	32.74	PK	V	19.16	45.88	68.20	22.32
15600.00	35.86	PK	V	22.41	52.25	74.00	21.75
15600.00	23.27	AV	V	22.41	39.66	54.00	14.34
High Channel: 5240 MHz							
5240.00	71.22	PK	H	38.85	104.05	N/A	N/A
5240.00	61.07	AV	H	38.85	93.90	N/A	N/A
5240.00	78.19	PK	V	38.85	111.02	N/A	N/A
5240.00	68.02	AV	V	38.85	100.85	N/A	N/A
5350.00	29.88	PK	V	39.03	62.89	74.00	11.11
5350.00	16.66	AV	V	39.03	49.67	54.00	4.33
10480.00	40.29	PK	V	18.86	53.13	68.20	15.07
15720.00	36.46	PK	V	22.28	52.72	74.00	21.28
15720.00	24.21	AV	V	22.28	40.47	54.00	13.53

**802.11n ht20 Mode(4TX mode was the worst):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5180MHz							
5180.00	64.42	PK	H	38.68	97.08	N/A	N/A
5180.00	51.53	AV	H	38.68	84.19	N/A	N/A
5180.00	75.06	PK	V	38.68	107.72	N/A	N/A
5180.00	62.47	AV	V	38.68	95.13	N/A	N/A
5150.00	29.91	PK	V	38.64	62.53	74.00	11.47
5150.00	16.99	AV	V	38.64	49.61	54.00	4.39
10360.00	35.04	PK	V	19.18	48.20	68.20	20.00
15540.00	35.06	PK	V	22.44	51.48	74.00	22.52
15540.00	22.81	AV	V	22.44	39.23	54.00	14.77
Middle Channel: 5200MHz							
5200.00	66.40	PK	H	38.70	99.08	N/A	N/A
5200.00	54.01	AV	H	38.70	86.69	N/A	N/A
5200.00	77.14	PK	V	38.70	109.82	N/A	N/A
5200.00	64.02	AV	V	38.70	96.70	N/A	N/A
10400.00	34.12	PK	V	19.16	47.26	68.20	20.94
15600.00	35.93	PK	V	22.41	52.32	74.00	21.68
15600.00	23.64	AV	V	22.41	40.03	54.00	13.97
High Channel: 5240 MHz							
5240.00	64.31	PK	H	38.85	97.14	N/A	N/A
5240.00	51.54	AV	H	38.85	84.37	N/A	N/A
5240.00	75.16	PK	V	38.85	107.99	N/A	N/A
5240.00	62.34	AV	V	38.85	95.17	N/A	N/A
5350.00	29.08	PK	V	39.03	62.09	74.00	11.91
5350.00	16.58	AV	V	39.03	49.59	54.00	4.41
10480.00	41.50	PK	V	18.86	54.34	68.20	13.86
15720.00	36.27	PK	V	22.28	52.53	74.00	21.47
15720.00	24.19	AV	V	22.28	40.45	54.00	13.55

**802.11n ht40 Mode(4TX mode was the worst):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5190 MHz							
5190.00	63.53	PK	H	38.69	96.20	N/A	N/A
5190.00	49.90	AV	H	38.69	82.57	N/A	N/A
5190.00	75.07	PK	V	38.69	107.74	N/A	N/A
5190.00	60.35	AV	V	38.69	93.02	N/A	N/A
5150.00	30.37	PK	V	38.64	62.99	74.00	11.01
5150.00	17.15	AV	V	38.64	49.77	54.00	4.23
10380.00	34.61	PK	V	19.17	47.76	68.20	20.44
15570.00	34.56	PK	V	22.43	50.97	74.00	23.03
15570.00	22.17	AV	V	22.43	38.58	54.00	15.42
High Channel: 5230 MHz							
5230.00	62.39	PK	H	38.81	95.18	N/A	N/A
5230.00	48.79	AV	H	38.81	81.58	N/A	N/A
5230.00	73.98	PK	V	38.81	106.77	N/A	N/A
5230.00	59.51	AV	V	38.81	92.30	N/A	N/A
5350.00	30.29	PK	V	39.03	63.30	74.00	10.70
5350.00	16.62	AV	V	39.03	49.63	54.00	4.37
10460.00	39.61	PK	V	18.94	52.53	68.20	15.67
15690.00	36.56	PK	V	22.29	52.83	74.00	21.17
15690.00	24.03	AV	V	22.29	40.30	54.00	13.70



**802.11ax hew20 Mode(4TX mode was the worst):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5180MHz							
5180.00	70.85	PK	H	38.68	103.51	N/A	N/A
5180.00	56.61	AV	H	38.68	89.27	N/A	N/A
5180.00	79.52	PK	V	38.68	112.18	N/A	N/A
5180.00	66.76	AV	V	38.68	99.42	N/A	N/A
5150.00	31.03	PK	V	38.64	63.65	74.00	10.35
5150.00	17.44	AV	V	38.64	50.06	54.00	3.94
10360.00	35.65	PK	V	19.18	48.81	68.20	19.39
15540.00	35.11	PK	V	22.44	51.53	74.00	22.47
15540.00	22.68	AV	V	22.44	39.10	54.00	14.90
Middle Channel: 5200MHz							
5200.00	70.76	PK	H	38.70	103.44	N/A	N/A
5200.00	56.98	AV	H	38.70	89.66	N/A	N/A
5200.00	80.77	PK	V	38.70	113.45	N/A	N/A
5200.00	67.51	AV	V	38.70	100.19	N/A	N/A
10400.00	34.37	PK	V	19.16	47.51	68.20	20.69
15600.00	36.08	PK	V	22.41	52.47	74.00	21.53
15600.00	23.75	AV	V	22.41	40.14	54.00	13.86
High Channel: 5240 MHz							
5240.00	69.74	PK	H	38.85	102.57	N/A	N/A
5240.00	56.03	AV	H	38.85	88.86	N/A	N/A
5240.00	79.32	PK	V	38.85	112.15	N/A	N/A
5240.00	66.19	AV	V	38.85	99.02	N/A	N/A
5350.00	29.47	PK	V	39.03	62.48	74.00	11.52
5350.00	16.70	AV	V	39.03	49.71	54.00	4.29
10480.00	41.83	PK	V	18.86	54.67	68.20	13.53
15720.00	36.48	PK	V	22.28	52.74	74.00	21.26
15720.00	24.11	AV	V	22.28	40.37	54.00	13.63

**802.11ax hew40 Mode(4TX mode was the worst):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5190 MHz							
5190.00	62.65	PK	H	38.69	95.32	N/A	N/A
5190.00	43.07	AV	H	38.69	75.74	N/A	N/A
5190.00	73.01	PK	V	38.69	105.68	N/A	N/A
5190.00	52.69	AV	V	38.69	85.36	N/A	N/A
5150.00	30.09	PK	V	38.64	62.71	74.00	11.29
5150.00	16.95	AV	V	38.64	49.57	54.00	4.43
10380.00	33.87	PK	V	19.17	47.02	68.20	21.18
15570.00	35.12	PK	V	22.43	51.53	74.00	22.47
15570.00	22.67	AV	V	22.43	39.08	54.00	14.92
High Channel: 5230 MHz							
5230.00	62.22	PK	H	38.81	95.01	N/A	N/A
5230.00	42.78	AV	H	38.81	75.57	N/A	N/A
5230.00	72.86	PK	V	38.81	105.65	N/A	N/A
5230.00	52.47	AV	V	38.81	85.26	N/A	N/A
5350.00	29.53	PK	V	39.03	62.54	74.00	11.46
5350.00	16.60	AV	V	39.03	49.61	54.00	4.39
10460.00	38.57	PK	V	18.94	51.49	68.20	16.71
15690.00	36.02	PK	V	22.29	52.29	74.00	21.71
15690.00	23.71	AV	V	22.29	39.98	54.00	14.02

**802.11ax hew80 Mode(4TX mode was the worst):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Middle Channel: 5210 MHz							
5210.00	58.42	PK	H	38.74	91.14	N/A	N/A
5210.00	38.80	AV	H	38.74	71.52	N/A	N/A
5210.00	68.35	PK	V	38.74	101.07	N/A	N/A
5210.00	48.16	AV	V	38.74	80.88	N/A	N/A
5150.00	31.18	PK	V	38.64	63.80	74.00	10.20
5150.00	17.21	AV	V	38.64	49.83	54.00	4.17
5350.00	29.54	PK	V	39.03	62.55	74.00	11.45
5350.00	16.62	AV	V	39.03	49.63	54.00	4.37
10420.00	34.91	PK	V	19.09	47.98	68.20	20.22
15630.00	36.58	PK	V	22.37	52.93	74.00	21.07
15630.00	24.19	AV	V	22.37	40.54	54.00	13.46

Note:

Result = Reading + Factor- Distance extrapolation Factor

For 1-26.5GHz:

Distance extrapolation Factor =  $20 \log(\text{specific distance [3m]}/\text{test distance [1.5m]})$  dB= 6.02 dB

For 26.5-40GHz:

Distance extrapolation Factor =  $20 \log(\text{specific distance [3m]}/\text{test distance [1m]})$  dB= 9.54 dB

**5725-5850MHz:****802.11a Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5745MHz							
5745.00	72.30	PK	H	39.46	105.74	N/A	N/A
5745.00	61.47	AV	H	39.46	94.91	N/A	N/A
5745.00	77.46	PK	V	39.46	110.90	N/A	N/A
5745.00	66.76	AV	V	39.46	100.20	N/A	N/A
5725.00	42.76	PK	V	39.48	76.22	122.20	45.98
5720.00	36.57	PK	V	39.49	70.04	110.80	40.76
5700.00	31.03	PK	V	39.51	64.52	105.20	40.68
5650.00	30.22	PK	V	39.49	63.69	68.20	4.51
11490.00	37.79	PK	V	20.67	52.44	74.00	21.56
11490.00	24.06	AV	V	20.67	38.71	54.00	15.29
17235.00	36.08	PK	V	26.76	56.82	68.20	11.38
Middle Channel: 5785 MHz							
5785.00	72.14	PK	H	39.44	105.56	N/A	N/A
5785.00	61.22	AV	H	39.44	94.64	N/A	N/A
5785.00	77.75	PK	V	39.44	111.17	N/A	N/A
5785.00	66.57	AV	V	39.44	99.99	N/A	N/A
11570.00	39.06	PK	V	20.83	53.87	74.00	20.13
11570.00	25.43	AV	V	20.83	40.24	54.00	13.76
17355.00	34.74	PK	V	27.74	56.46	68.20	11.74
High Channel: 5825 MHz							
5825.00	72.25	PK	H	39.46	105.69	N/A	N/A
5825.00	60.83	AV	H	39.46	94.27	N/A	N/A
5825.00	76.91	PK	V	39.46	110.35	N/A	N/A
5825.00	66.26	AV	V	39.46	99.70	N/A	N/A
5850.00	38.12	PK	V	39.49	71.59	122.20	50.61
5855.00	34.59	PK	V	39.51	68.08	110.80	42.72
5875.00	31.91	PK	V	39.60	65.49	105.20	39.71
5925.00	30.79	PK	V	39.68	64.45	68.20	3.75
11650.00	38.12	PK	V	21.07	53.17	74.00	20.83
11650.00	24.55	AV	V	21.07	39.60	54.00	14.40
17475.00	34.39	PK	V	28.61	56.98	68.20	11.22

**802.11a Chain 1:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5745MHz							
5745.00	67.62	PK	H	39.46	101.06	N/A	N/A
5745.00	56.71	AV	H	39.46	90.15	N/A	N/A
5745.00	77.17	PK	V	39.46	110.61	N/A	N/A
5745.00	66.66	AV	V	39.46	100.10	N/A	N/A
5725.00	42.42	PK	V	39.48	75.88	122.20	46.32
5720.00	37.51	PK	V	39.49	70.98	110.80	39.82
5700.00	31.13	PK	V	39.51	64.62	105.20	40.58
5650.00	30.44	PK	V	39.49	63.91	68.20	4.29
11490.00	34.90	PK	V	20.67	49.55	74.00	24.45
11490.00	22.47	AV	V	20.67	37.12	54.00	16.88
17235.00	33.59	PK	V	26.76	54.33	68.20	13.87
Middle Channel: 5785 MHz							
5785.00	66.96	PK	H	39.44	100.38	N/A	N/A
5785.00	55.61	AV	H	39.44	89.03	N/A	N/A
5785.00	77.31	PK	V	39.44	110.73	N/A	N/A
5785.00	66.47	AV	V	39.44	99.89	N/A	N/A
11570.00	35.52	PK	V	20.83	50.33	74.00	23.67
11570.00	23.21	AV	V	20.83	38.02	54.00	15.98
17355.00	33.24	PK	V	27.74	54.96	68.20	13.24
High Channel: 5825 MHz							
5825.00	66.25	PK	H	39.46	99.69	N/A	N/A
5825.00	54.85	AV	H	39.46	88.29	N/A	N/A
5825.00	77.06	PK	V	39.46	110.50	N/A	N/A
5825.00	65.70	AV	V	39.46	99.14	N/A	N/A
5850.00	39.89	PK	V	39.49	73.36	122.20	48.84
5855.00	37.86	PK	V	39.51	71.35	110.80	39.45
5875.00	35.59	PK	V	39.60	69.17	105.20	36.03
5925.00	31.44	PK	V	39.68	65.10	68.20	3.10
11650.00	35.03	PK	V	21.07	50.08	74.00	23.92
11650.00	22.64	AV	V	21.07	37.69	54.00	16.31
17475.00	33.52	PK	V	28.61	56.11	68.20	12.09

**802.11a Chain 2:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5745MHz							
5745.00	69.52	PK	H	39.46	102.96	N/A	N/A
5745.00	59.41	AV	H	39.46	92.85	N/A	N/A
5745.00	76.82	PK	V	39.46	110.26	N/A	N/A
5745.00	66.57	AV	V	39.46	100.01	N/A	N/A
5725.00	44.25	PK	V	39.48	77.71	122.20	44.49
5720.00	40.16	PK	V	39.49	73.63	110.80	37.17
5700.00	30.59	PK	V	39.51	64.08	105.20	41.12
5650.00	29.85	PK	V	39.49	63.32	68.20	4.88
11490.00	33.43	PK	V	20.67	48.08	74.00	25.92
11490.00	21.16	AV	V	20.67	35.81	54.00	18.19
17235.00	33.38	PK	V	26.76	54.12	68.20	14.08
Middle Channel: 5785 MHz							
5785.00	69.98	PK	H	39.44	103.40	N/A	N/A
5785.00	59.25	AV	H	39.44	92.67	N/A	N/A
5785.00	76.14	PK	V	39.44	109.56	N/A	N/A
5785.00	65.61	AV	V	39.44	99.03	N/A	N/A
11570.00	33.61	PK	V	20.83	48.42	74.00	25.58
11570.00	21.10	AV	V	20.83	35.91	54.00	18.09
17355.00	33.46	PK	V	27.74	55.18	68.20	13.02
High Channel: 5825 MHz							
5825.00	69.44	PK	H	39.46	102.88	N/A	N/A
5825.00	58.87	AV	H	39.46	92.31	N/A	N/A
5825.00	77.48	PK	V	39.46	110.92	N/A	N/A
5825.00	65.49	AV	V	39.46	98.93	N/A	N/A
5850.00	40.58	PK	V	39.49	74.05	122.20	48.15
5855.00	37.55	PK	V	39.51	71.04	110.80	39.76
5875.00	31.10	PK	V	39.60	64.68	105.20	40.52
5925.00	31.17	PK	V	39.68	64.83	68.20	3.37
11650.00	33.74	PK	V	21.07	48.79	74.00	25.21
11650.00	21.36	AV	V	21.07	36.41	54.00	17.59
17475.00	33.42	PK	V	28.61	56.01	68.20	12.19

**802.11a Chain 3:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5745MHz							
5745.00	69.05	PK	H	39.46	102.49	N/A	N/A
5745.00	58.56	AV	H	39.46	92.00	N/A	N/A
5745.00	76.59	PK	V	39.46	110.03	N/A	N/A
5745.00	66.04	AV	V	39.46	99.48	N/A	N/A
5725.00	44.89	PK	V	39.48	78.35	122.20	43.85
5720.00	42.47	PK	V	39.49	75.94	110.80	34.86
5700.00	33.02	PK	V	39.51	66.51	105.20	38.69
5650.00	29.84	PK	V	39.49	63.31	68.20	4.89
11490.00	33.51	PK	V	20.67	48.16	74.00	25.84
11490.00	21.27	AV	V	20.67	35.92	54.00	18.08
17235.00	34.79	PK	V	26.76	55.53	68.20	12.67
Middle Channel: 5785 MHz							
5785.00	68.29	PK	H	39.44	101.71	N/A	N/A
5785.00	57.75	AV	H	39.44	91.17	N/A	N/A
5785.00	75.85	PK	V	39.44	109.27	N/A	N/A
5785.00	64.91	AV	V	39.44	98.33	N/A	N/A
11570.00	33.44	PK	V	20.83	48.25	74.00	25.75
11570.00	21.15	AV	V	20.83	35.96	54.00	18.04
17355.00	33.52	PK	V	27.74	55.24	68.20	12.96
High Channel: 5825 MHz							
5825.00	67.99	PK	H	39.46	101.43	N/A	N/A
5825.00	57.26	AV	H	39.46	90.70	N/A	N/A
5825.00	76.21	PK	V	39.46	109.65	N/A	N/A
5825.00	64.99	AV	V	39.46	98.43	N/A	N/A
5850.00	38.86	PK	V	39.49	72.33	122.20	49.87
5855.00	35.12	PK	V	39.51	68.61	110.80	42.19
5875.00	31.17	PK	V	39.60	64.75	105.20	40.45
5925.00	31.01	PK	V	39.68	64.67	68.20	3.53
11650.00	34.11	PK	V	21.07	49.16	74.00	24.84
11650.00	22.08	AV	V	21.07	37.13	54.00	16.87
17475.00	33.57	PK	V	28.61	56.16	68.20	12.04

**802.11n ht20 Mode(4TX mode was the worst):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5745MHz							
5745.00	64.26	PK	H	39.46	97.70	N/A	N/A
5745.00	51.12	AV	H	39.46	84.56	N/A	N/A
5745.00	73.35	PK	V	39.46	106.79	N/A	N/A
5745.00	59.22	AV	V	39.46	92.66	N/A	N/A
5725.00	31.14	PK	V	39.48	64.60	122.20	57.60
5720.00	31.33	PK	V	39.49	64.80	110.80	46.00
5700.00	31.02	PK	V	39.51	64.51	105.20	40.69
5650.00	30.05	PK	V	39.49	63.52	68.20	4.68
11490.00	33.37	PK	V	20.67	48.02	74.00	25.98
11490.00	21.04	AV	V	20.67	35.69	54.00	18.31
17235.00	33.84	PK	V	26.76	54.58	68.20	13.62
Middle Channel: 5785 MHz							
5785.00	65.61	PK	H	39.44	99.03	N/A	N/A
5785.00	52.30	AV	H	39.44	85.72	N/A	N/A
5785.00	72.76	PK	V	39.44	106.18	N/A	N/A
5785.00	58.87	AV	V	39.44	92.29	N/A	N/A
11570.00	33.31	PK	V	20.83	48.12	74.00	25.88
11570.00	20.86	AV	V	20.83	35.67	54.00	18.33
17355.00	33.11	PK	V	27.74	54.83	68.20	13.37
High Channel: 5825 MHz							
5825.00	64.11	PK	H	39.46	97.55	N/A	N/A
5825.00	51.80	AV	H	39.46	85.24	N/A	N/A
5825.00	72.92	PK	V	39.46	106.36	N/A	N/A
5825.00	59.69	AV	V	39.46	93.13	N/A	N/A
5850.00	31.88	PK	V	39.49	65.35	122.20	56.85
5855.00	32.20	PK	V	39.51	65.69	110.80	45.11
5875.00	31.65	PK	V	39.60	65.23	105.20	39.97
5925.00	30.12	PK	V	39.68	63.78	68.20	4.42
11650.00	33.48	PK	V	21.07	48.53	74.00	25.47
11650.00	21.22	AV	V	21.07	36.27	54.00	17.73
17475.00	33.49	PK	V	28.61	56.08	68.20	12.12

**802.11n ht40 Mode(4TX mode was the worst):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5755 MHz							
5755.00	63.43	PK	H	39.45	96.86	N/A	N/A
5755.00	49.58	AV	H	39.45	83.01	N/A	N/A
5755.00	71.42	PK	V	39.45	104.85	N/A	N/A
5755.00	55.86	AV	V	39.45	89.29	N/A	N/A
5725.00	32.74	PK	V	39.48	66.20	122.20	56.00
5720.00	31.46	PK	V	39.49	64.93	110.80	45.87
5700.00	30.46	PK	V	39.51	63.95	105.20	41.25
5650.00	30.68	PK	V	39.49	64.15	68.20	4.05
11510.00	33.68	PK	V	20.67	48.33	74.00	25.67
11510.00	21.32	AV	V	20.67	35.97	54.00	18.03
17265.00	33.92	PK	V	26.94	54.84	68.20	13.36
High Channel: 5795 MHz							
5795.00	63.92	PK	H	39.43	97.33	N/A	N/A
5795.00	49.75	AV	H	39.43	83.16	N/A	N/A
5795.00	69.24	PK	V	39.43	102.65	N/A	N/A
5795.00	53.41	AV	V	39.43	86.82	N/A	N/A
5850.00	32.43	PK	V	39.49	65.90	122.20	56.30
5855.00	31.62	PK	V	39.51	65.11	110.80	45.69
5875.00	31.24	PK	V	39.60	64.82	105.20	40.38
5925.00	31.78	PK	V	39.68	65.44	68.20	2.76
11590.00	33.84	PK	V	20.88	48.70	74.00	25.30
11590.00	21.20	AV	V	20.88	36.06	54.00	17.94
17385.00	34.48	PK	V	28.07	56.53	68.20	11.67



**802.11ac vht80 Mode(4TX mode was the worst):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Middle Channel: 5775 MHz							
5775.00	61.98	PK	H	39.44	95.40	N/A	N/A
5775.00	42.37	AV	H	39.44	75.79	N/A	N/A
5775.00	68.14	PK	V	39.44	101.56	N/A	N/A
5775.00	48.67	AV	V	39.44	82.09	N/A	N/A
5725.00	31.81	PK	V	39.48	65.27	122.20	56.93
5720.00	31.99	PK	V	39.49	65.46	110.80	45.34
5700.00	30.84	PK	V	39.51	64.33	105.20	40.87
5650.00	30.57	PK	V	39.49	64.04	68.20	4.16
5850.00	32.09	PK	V	39.49	65.56	122.20	56.64
5855.00	31.84	PK	V	39.51	65.33	110.80	45.47
5875.00	31.87	PK	V	39.60	65.45	105.20	39.75
5925.00	30.50	PK	V	39.68	64.16	68.20	4.04
11550.00	33.72	PK	V	20.78	48.48	74.00	25.52
11550.00	21.26	AV	V	20.78	36.02	54.00	17.98
17325.00	33.58	PK	V	27.41	54.97	68.20	13.23

**802.11ax vht20 Mode(4TX mode was the worst):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5745MHz							
5745.00	68.78	PK	H	39.46	102.22	N/A	N/A
5745.00	48.76	AV	H	39.46	82.20	N/A	N/A
5745.00	74.82	PK	V	39.46	108.26	N/A	N/A
5745.00	54.52	AV	V	39.46	87.96	N/A	N/A
5725.00	46.52	PK	V	39.48	79.98	122.20	42.22
5720.00	31.20	PK	V	39.49	64.67	110.80	46.13
5700.00	30.94	PK	V	39.51	64.43	105.20	40.77
5650.00	30.58	PK	V	39.49	64.05	68.20	4.15
11490.00	34.67	PK	V	20.67	49.32	74.00	24.68
11490.00	22.29	AV	V	20.67	36.94	54.00	17.06
17235.00	33.63	PK	V	26.76	54.37	68.20	13.83
Middle Channel: 5785 MHz							
5785.00	68.89	PK	H	39.44	102.31	N/A	N/A
5785.00	49.07	AV	H	39.44	82.49	N/A	N/A
5785.00	75.19	PK	V	39.44	108.61	N/A	N/A
5785.00	56.18	AV	V	39.44	89.60	N/A	N/A
11570.00	34.51	PK	V	20.83	49.32	74.00	24.68
11570.00	22.10	AV	V	20.83	36.91	54.00	17.09
17355.00	33.83	PK	V	27.74	55.55	68.20	12.65
High Channel: 5825 MHz							
5825.00	69.19	PK	H	39.46	102.63	N/A	N/A
5825.00	50.13	AV	H	39.46	83.57	N/A	N/A
5825.00	73.06	PK	V	39.46	106.50	N/A	N/A
5825.00	53.88	AV	V	39.46	87.32	N/A	N/A
5850.00	32.40	PK	V	39.49	65.87	122.20	56.33
5855.00	31.94	PK	V	39.51	65.43	110.80	45.37
5875.00	31.34	PK	V	39.60	64.92	105.20	40.28
5925.00	30.44	PK	V	39.68	64.10	68.20	4.10
11650.00	33.54	PK	V	21.07	48.59	74.00	25.41
11650.00	21.16	AV	V	21.07	36.21	54.00	17.79
17475.00	33.61	PK	V	28.61	56.20	68.20	12.00

**802.11ax vht40 Mode(4TX mode was the worst):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Low Channel: 5755 MHz							
5755.00	63.21	PK	H	39.45	96.64	N/A	N/A
5755.00	42.76	AV	H	39.45	76.19	N/A	N/A
5755.00	70.73	PK	V	39.45	104.16	N/A	N/A
5755.00	49.68	AV	V	39.45	83.11	N/A	N/A
5725.00	32.97	PK	V	39.48	66.43	122.20	55.77
5720.00	31.17	PK	V	39.49	64.64	110.80	46.16
5700.00	30.55	PK	V	39.51	64.04	105.20	41.16
5650.00	30.46	PK	V	39.49	63.93	68.20	4.27
11510.00	33.53	PK	V	20.67	48.18	74.00	25.82
11510.00	21.19	AV	V	20.67	35.84	54.00	18.16
17265.00	34.19	PK	V	26.94	55.11	68.20	13.09
High Channel: 5795 MHz							
5795.00	60.47	PK	H	39.43	93.88	N/A	N/A
5795.00	39.81	AV	H	39.43	73.22	N/A	N/A
5795.00	69.98	PK	V	39.43	103.39	N/A	N/A
5795.00	48.65	AV	V	39.43	82.06	N/A	N/A
5850.00	31.63	PK	V	39.49	65.10	122.20	57.10
5855.00	31.79	PK	V	39.51	65.28	110.80	45.52
5875.00	31.43	PK	V	39.60	65.01	105.20	40.19
5925.00	31.06	PK	V	39.68	64.72	68.20	3.48
11590.00	33.79	PK	V	20.88	48.65	74.00	25.35
11590.00	21.36	AV	V	20.88	36.22	54.00	17.78
17385.00	33.45	PK	V	28.07	55.50	68.20	12.70

**802.11ax vht80 Mode(4TX mode was the worst):**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector					
Middle Channel: 5775 MHz							
5775.00	60.46	PK	H	39.44	93.88	N/A	N/A
5775.00	39.06	AV	H	39.44	72.48	N/A	N/A
5775.00	66.38	PK	V	39.44	99.80	N/A	N/A
5775.00	45.82	AV	V	39.44	79.24	N/A	N/A
5725.00	32.19	PK	V	39.48	65.65	122.20	56.55
5720.00	30.66	PK	V	39.49	64.13	110.80	46.67
5700.00	31.59	PK	V	39.51	65.08	105.20	40.12
5650.00	29.88	PK	V	39.49	63.35	68.20	4.85
5850.00	31.65	PK	V	39.49	65.12	122.20	57.08
5855.00	31.77	PK	V	39.51	65.26	110.80	45.54
5875.00	31.64	PK	V	39.60	65.22	105.20	39.98
5925.00	30.47	PK	V	39.68	64.13	68.20	4.07
11550.00	34.26	PK	V	20.78	49.02	74.00	24.98
11550.00	22.13	AV	V	20.78	36.89	54.00	17.11
17325.00	33.87	PK	V	27.41	55.26	68.20	12.94

*Note:*

*Result = Reading + Factor- Distance extrapolation Factor*

*For 1-26.5GHz:*




*Distance extrapolation Factor =20 log (specific distance [3m]/test distance [1.5m]) dB= 6.02 dB*


*For 26.5-40GHz:*

*Distance extrapolation Factor =20 log (specific distance [3m]/test distance [1m]) dB= 9.54 dB*



**Worst Test plots(802.11a chain 0 5180 MHz was the worst)**



**Horizontal:**

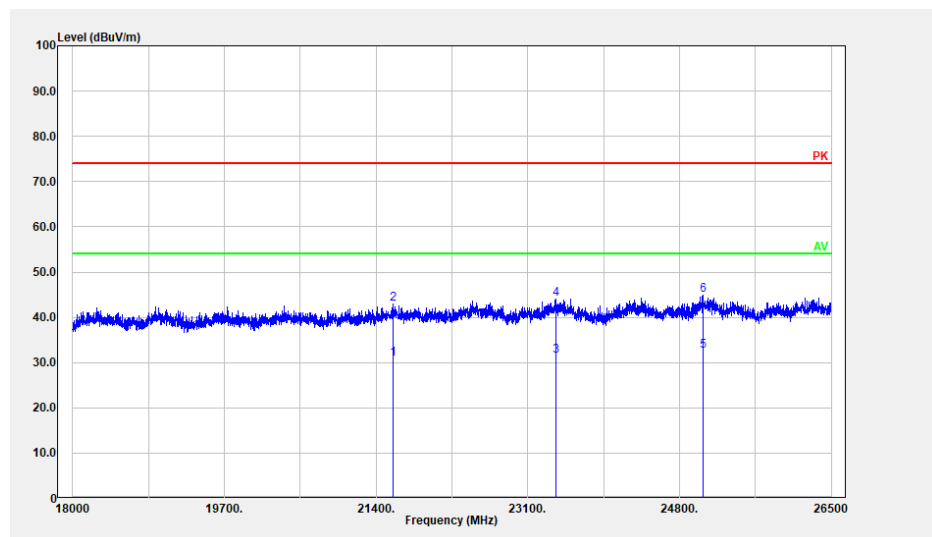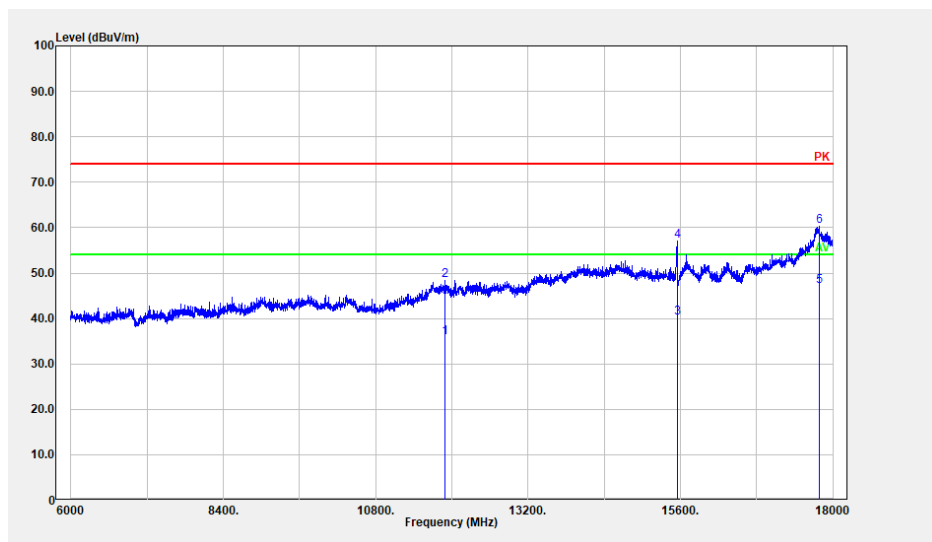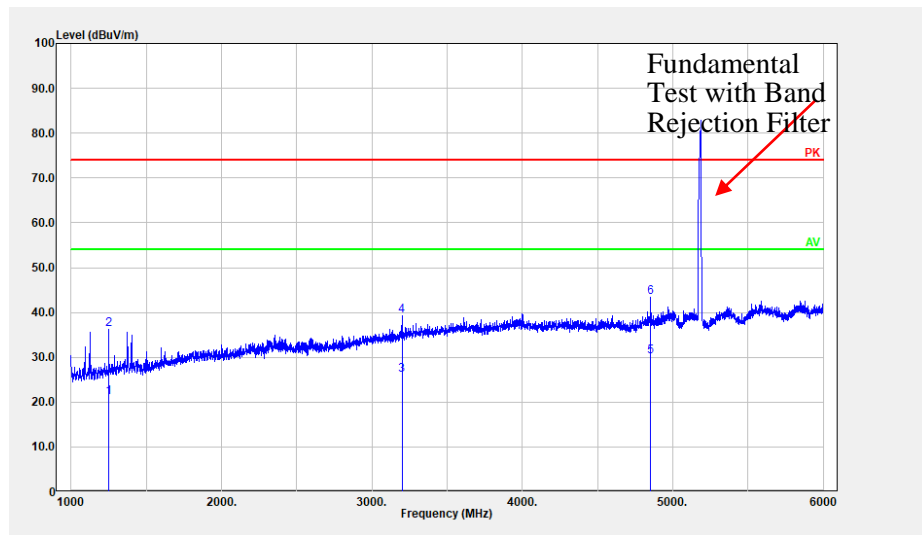

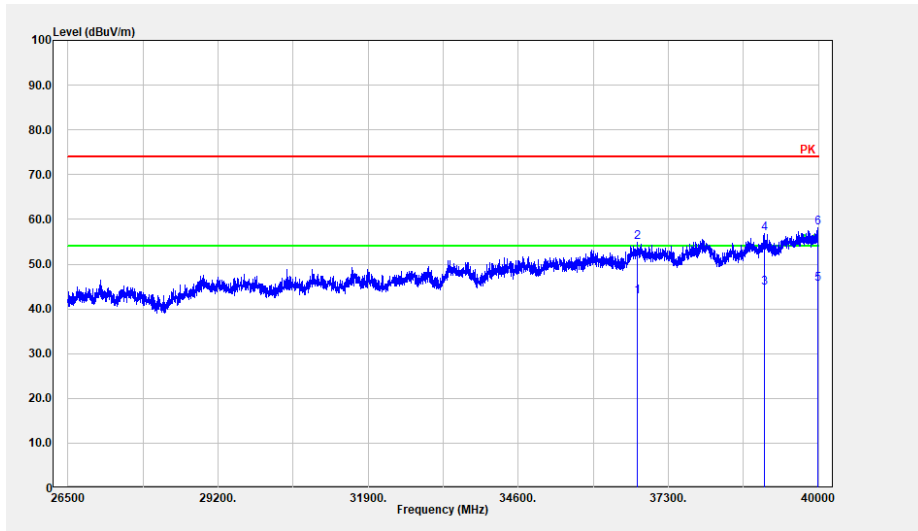

Vertical:

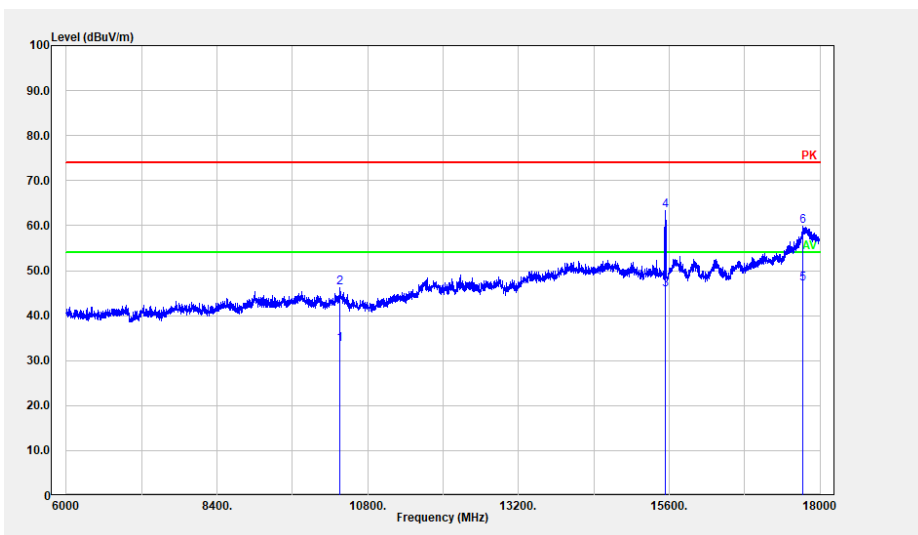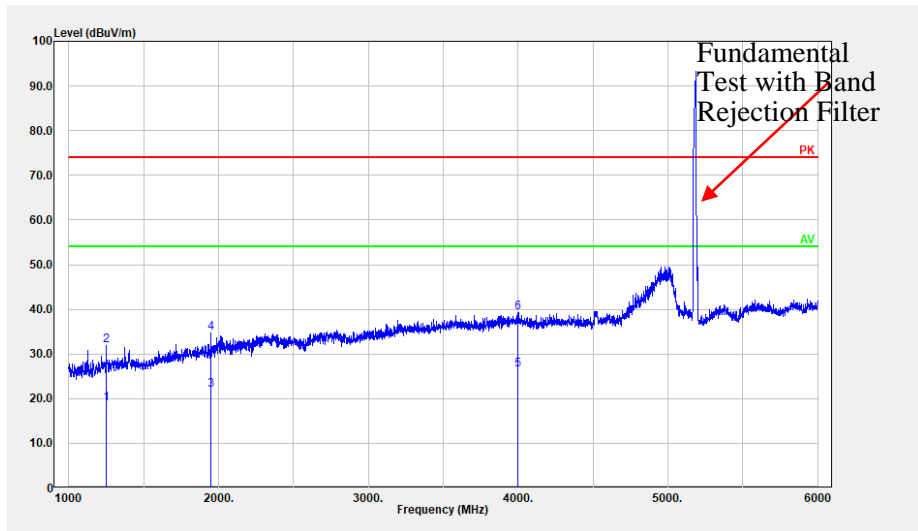

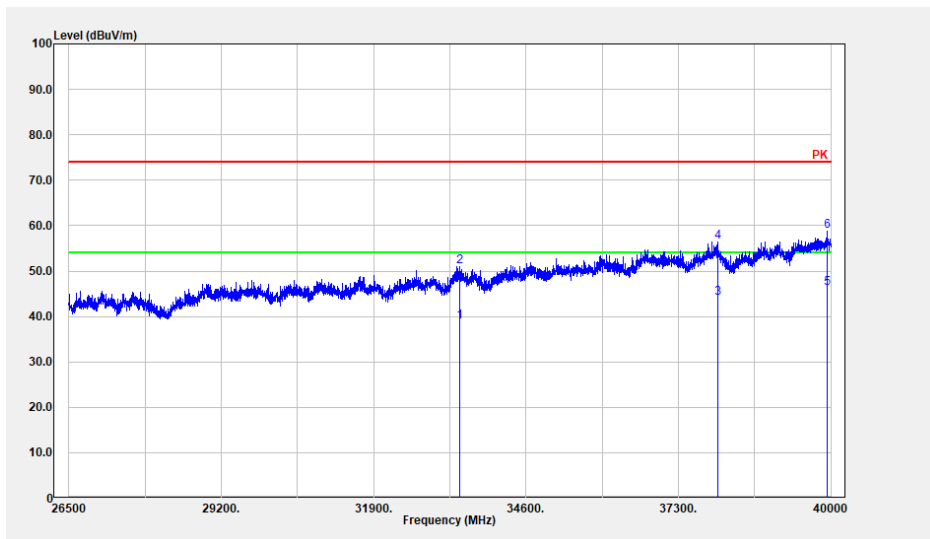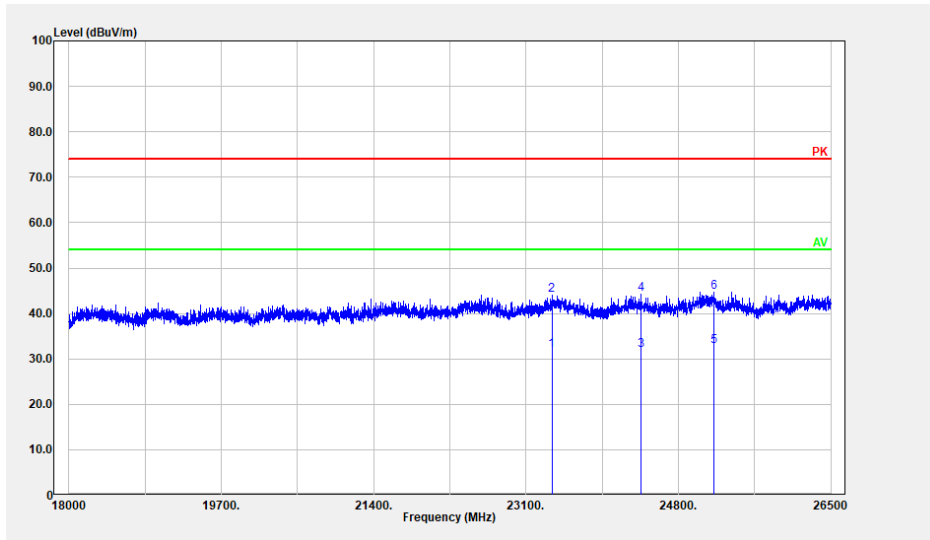

**4.3 Emission Bandwidth:**

Serial Number:	CR21090071-RF-S1	Test Date:	2022/4/26-2022/5/22
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	24.9~25.7	Relative Humidity: (%)	46~64	ATM Pressure: (kPa)	100.1~100.3
----------------------	-----------	------------------------------	-------	------------------------	-------------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	SS402	SJ0100004	2021-08-08	2022-08-07

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:**

5150-5250 MHz:


Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	20.400	16.960
	5200	20.320	16.880
	5240	20.480	16.960
802.11n ht20	5180	20.800	17.840
	5200	20.720	17.840
	5240	20.720	17.920
802.11n ht40	5190	40.000	36.000
	5230	40.160	36.160
802.11ac vht80	5210	81.280	76.160
802.11ax hew20	5180	20.923	19.360
	5200	20.859	19.440
	5240	20.240	19.040
802.11ax hew40	5190	39.680	38.080
	5230	39.840	38.080
802.11ax hew80	5210	81.280	77.760
Note: Test only was performed at Chain 0. The 99% Occupied Bandwidths are not fall into the range of 5250-5350MHz			



5725-5850 MHz:


Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745	15.760	16.960
	5785	15.680	16.960
	5825	15.920	16.960
802.11n ht20	5745	15.760	17.920
	5785	16.320	17.840
	5825	16.240	17.920
802.11n ht40	5755	33.920	36.160
	5795	35.040	36.000
802.11ac vht80	5775	76.800	76.160
802.11ax hew20	5745	19.120	19.520
	5785	19.200	19.520
	5825	19.040	19.440
802.11ax hew40	5755	38.080	38.080
	5795	38.240	38.080
802.11ax hew80	5775	78.400	77.440
Note: 6dB Emission Bandwidth Limit: $\geq 0.5$ MHz Test only was performed at Chain 0. The 99% Occupied Bandwidths are not fall into the range of 5470-5725MHz			

5150-5250MHz:

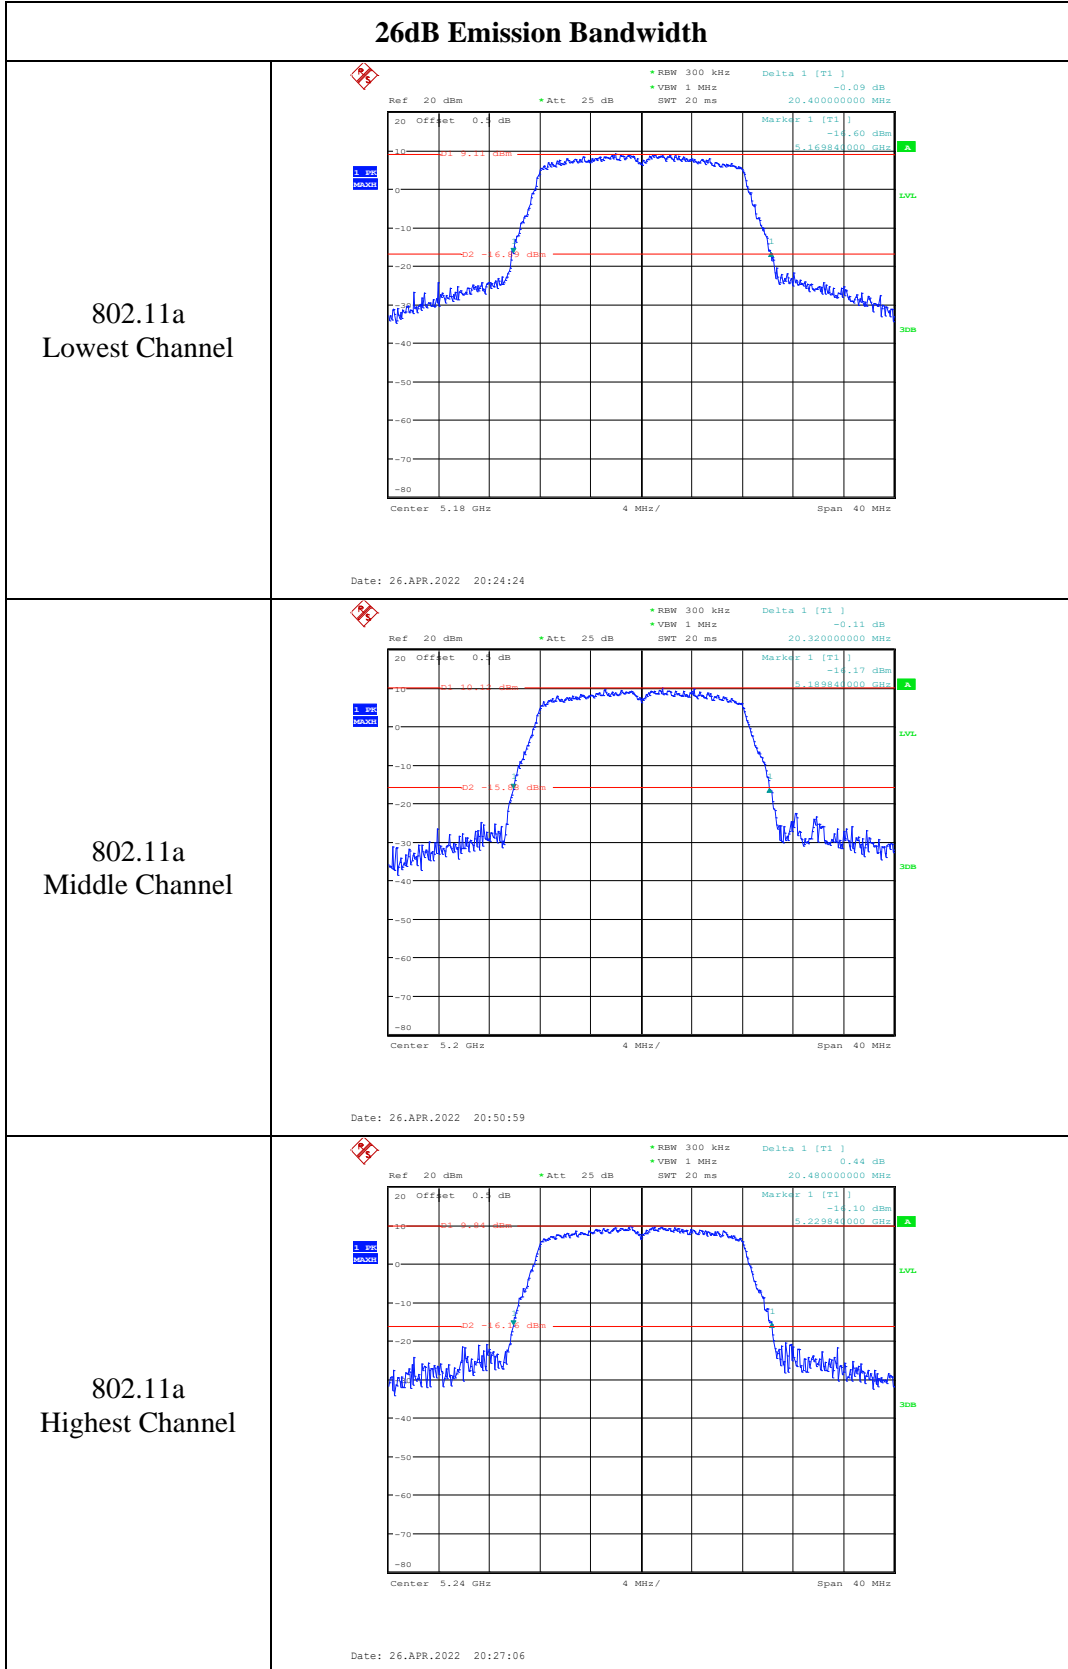


### 26dB Emission Bandwidth

802.11n ht20  
Lowest Channel

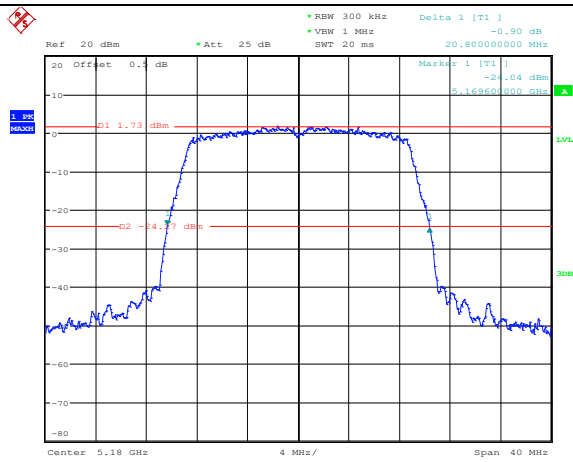


Date: 26.APR.2022 20:44:42

802.11n ht20  
Middle Channel

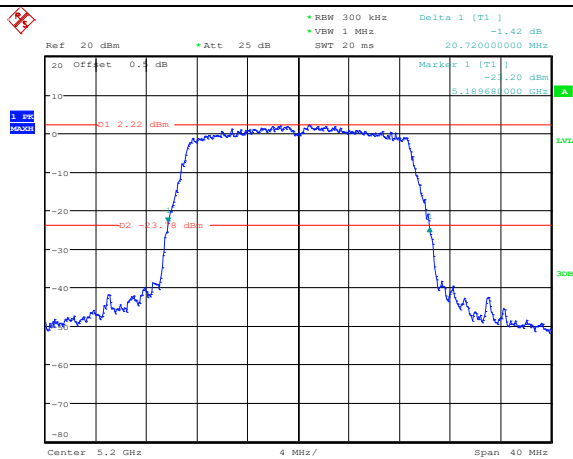

Date: 26.APR.2022 20:52:15


802.11n ht20  
Highest Channel

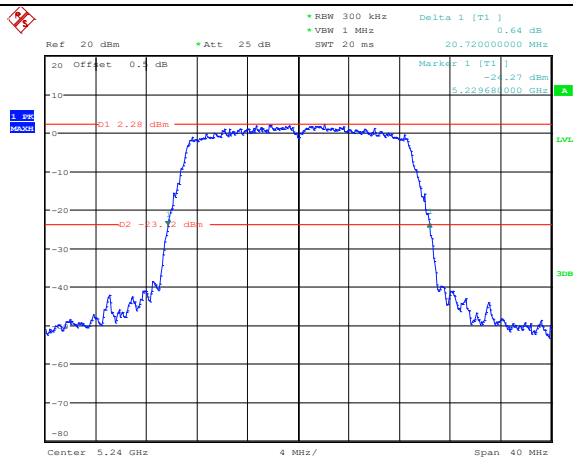

Date: 26.APR.2022 20:53:16


### 26dB Emission Bandwidth

802.11n ht40  
Lowest Channel

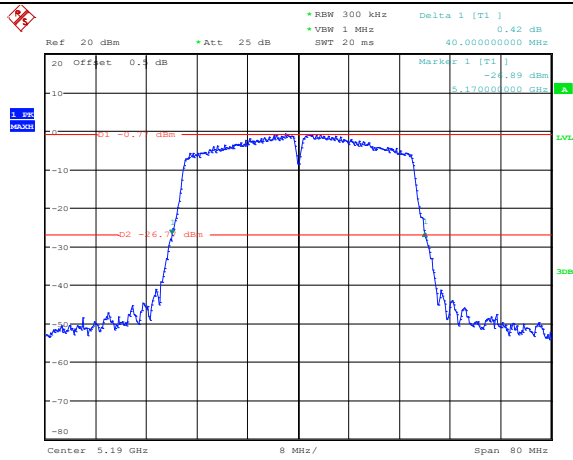


Date: 26.APR.2022 20:55:40

802.11n ht40  
Highest Channel

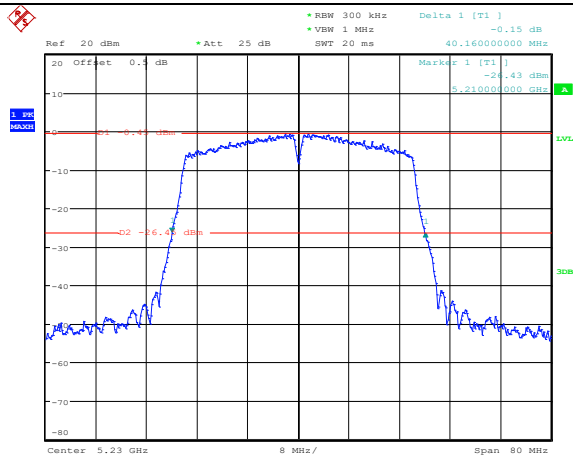

Date: 26.APR.2022 20:56:35


802.11ac vht80  
Middle Channel

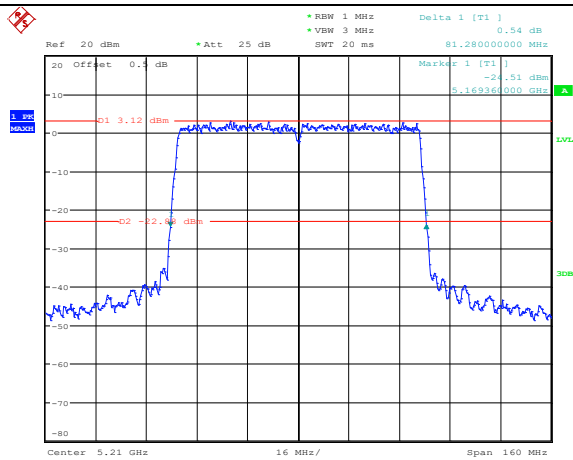

Date: 26.APR.2022 22:23:48


### 26dB Emission Bandwidth

802.11ax hew20  
Lowest Channel

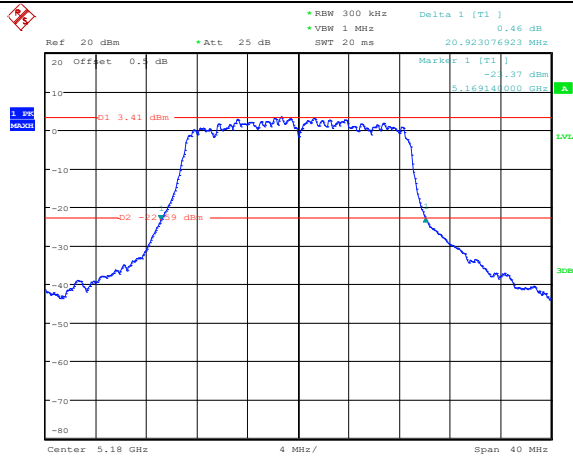


Date: 23.MAY.2022 13:27:39

802.11ax hew20  
Middle Channel

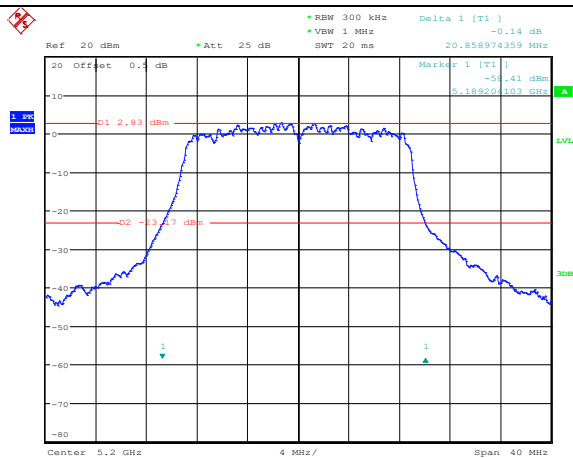

Date: 23.MAY.2022 13:29:53


802.11ax hew20  
Highest Channel

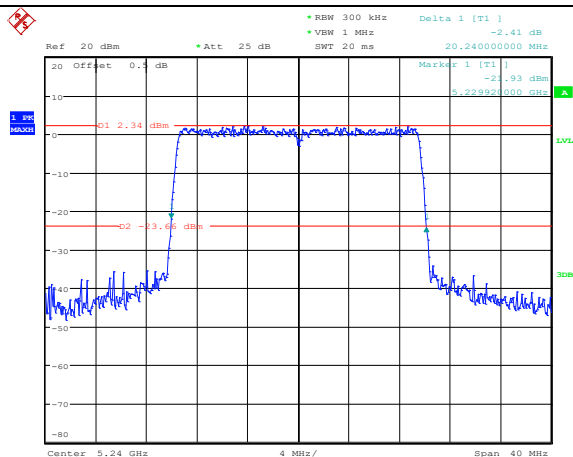

Date: 26.APR.2022 21:10:14


### 26dB Emission Bandwidth

802.11ax hew40  
Lowest Channel

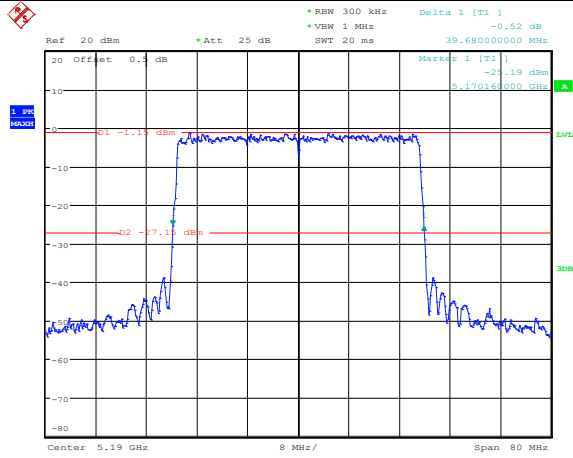


Date: 26.APR.2022 21:15:17

802.11ax hew40  
Highest Channel

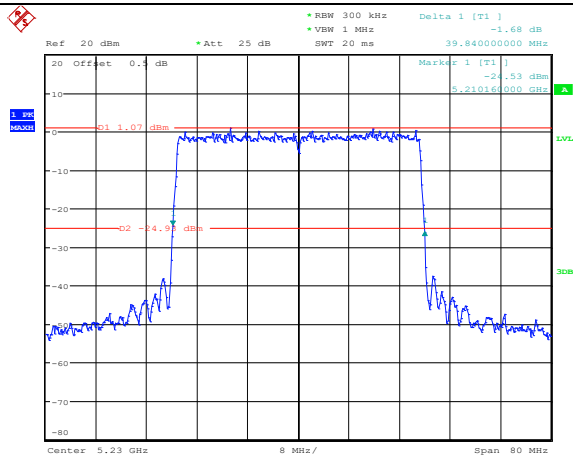

Date: 26.APR.2022 21:16:42


802.11ax hew80  
Middle Channel

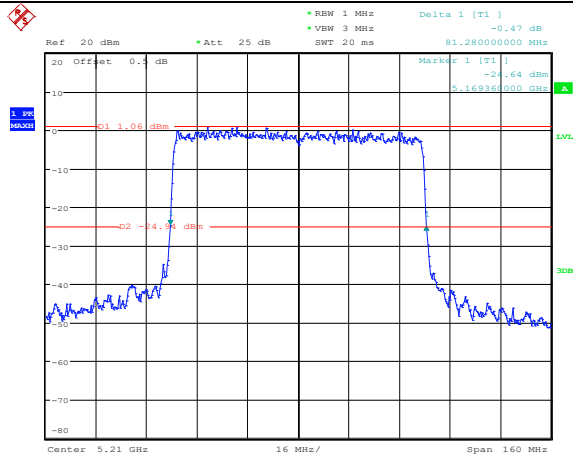

Date: 26.APR.2022 21:25:02


### 99% Occupied Bandwidth

802.11a  
Lowest Channel

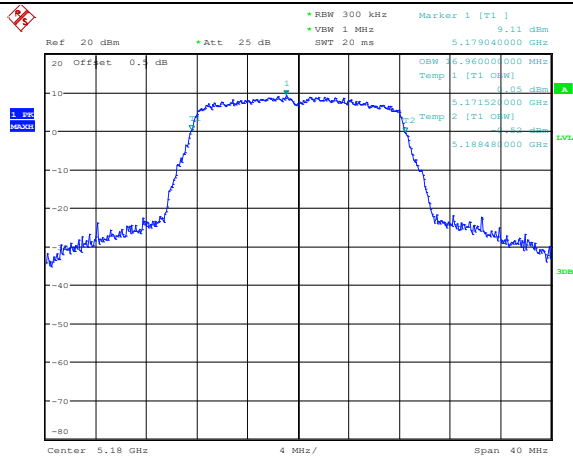


Date: 26.APR.2022 20:24:43

802.11a  
Middle Channel

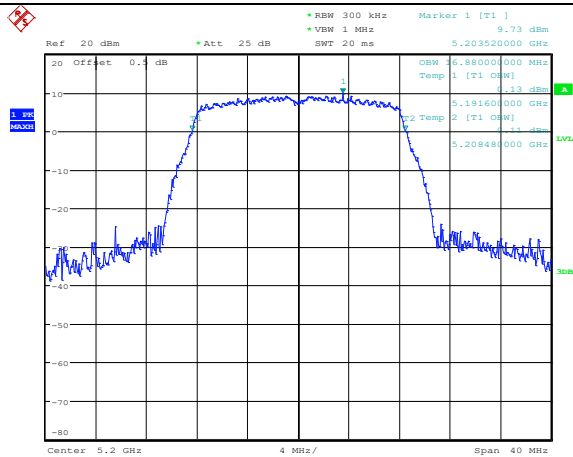

Date: 26.APR.2022 20:26:05


802.11a  
Highest Channel

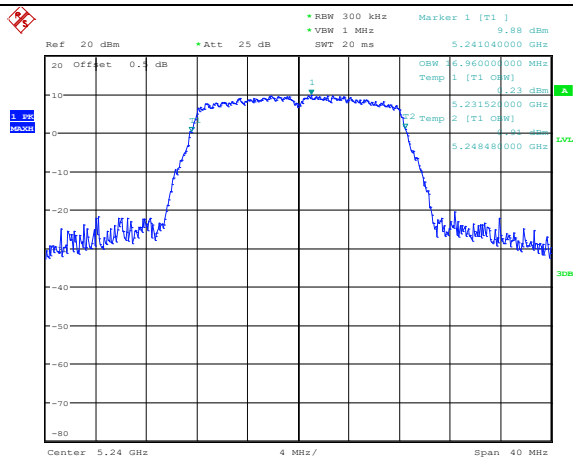

Date: 26.APR.2022 20:27:32


### 99% Occupied Bandwidth

802.11n ht20  
Lowest Channel

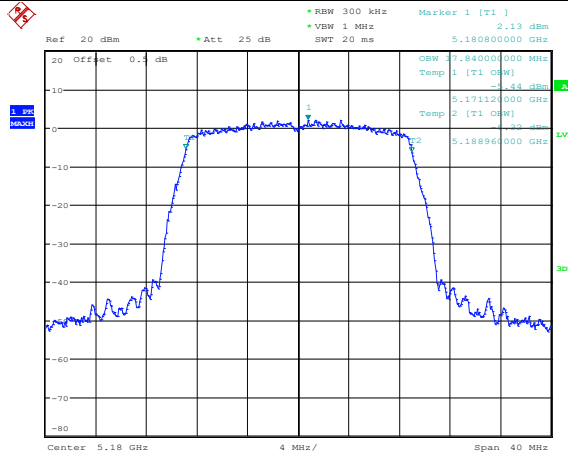


Date: 26.APR.2022 20:44:58

802.11n ht20  
Middle Channel

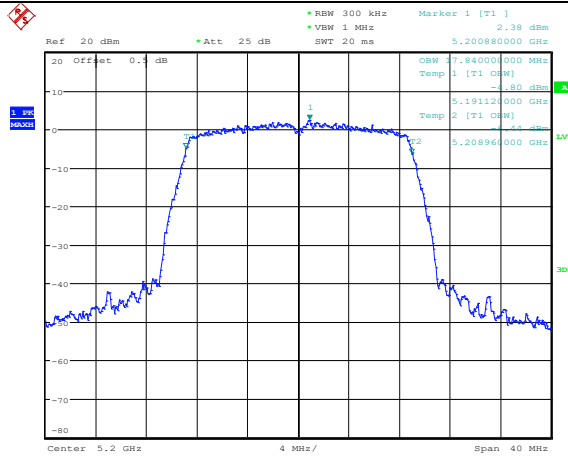

Date: 26.APR.2022 20:52:30

802.11n ht20  
Highest Channel

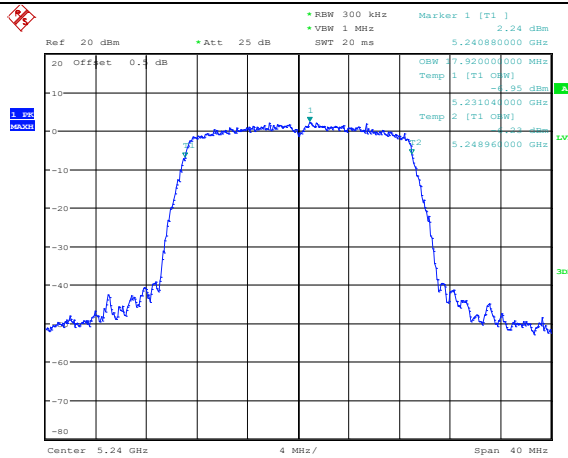


Date: 26.APR.2022 20:53:33




### 99% Occupied Bandwidth

802.11n ht40  
Lowest Channel

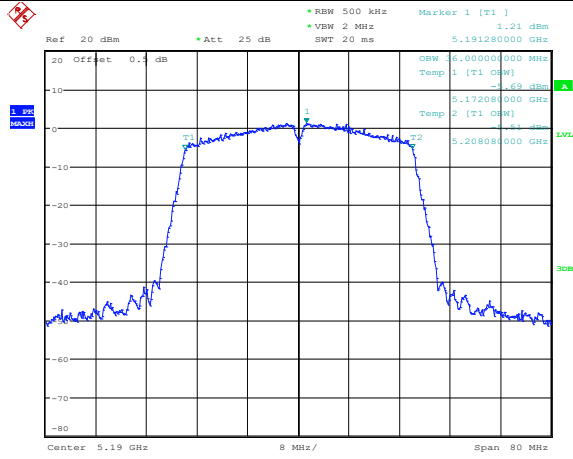


Date: 26.APR.2022 20:55:55

802.11n ht40  
Highest Channel

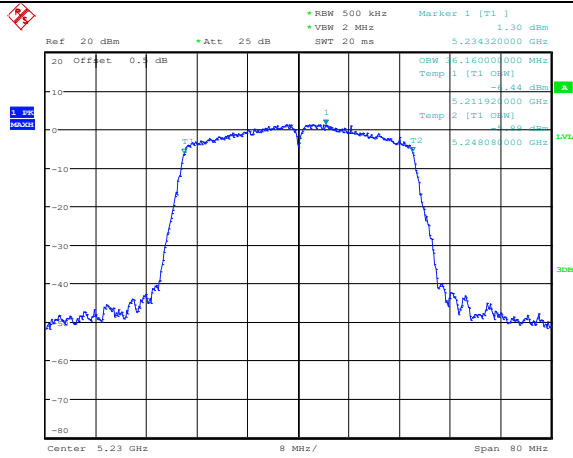

Date: 26.APR.2022 20:56:49


802.11ac vht80  
Middle Channel

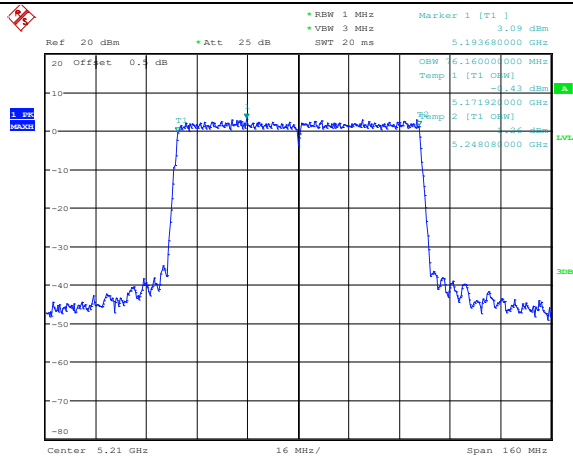

Date: 26.APR.2022 22:23:07


### 99% Occupied Bandwidth

802.11ax hew20  
Lowest Channel

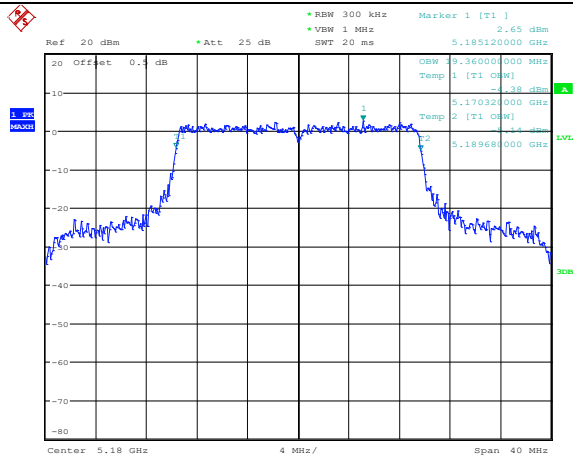


Date: 26.APR.2022 21:11:47

802.11ax hew20  
Middle Channel

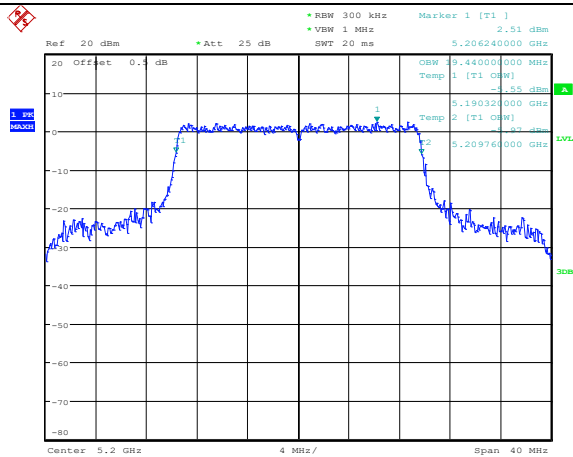

Date: 26.APR.2022 21:13:01

802.11ax hew20  
Highest Channel

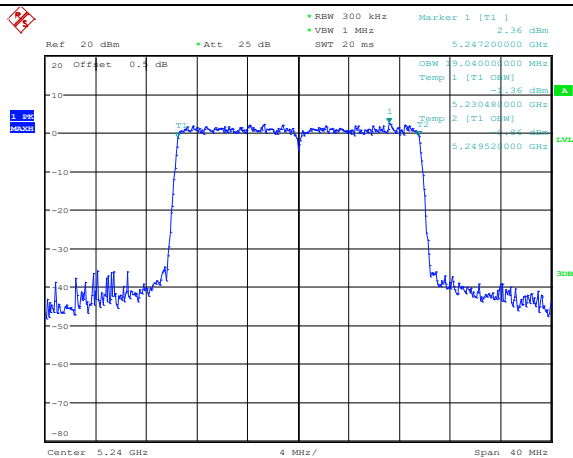



Date: 26.APR.2022 21:10:33


### 99% Occupied Bandwidth


<p>802.11ax hew40 Lowest Channel</p>	<p>Date: 26.APR.2022 21:15:37</p>
<p>802.11ax hew40 Highest Channel</p>	<p>Date: 26.APR.2022 21:17:01</p>
<p>802.11ax hew80 Middle Channel</p>	<p>Date: 26.APR.2022 21:25:22</p>


5725-5850MHz:

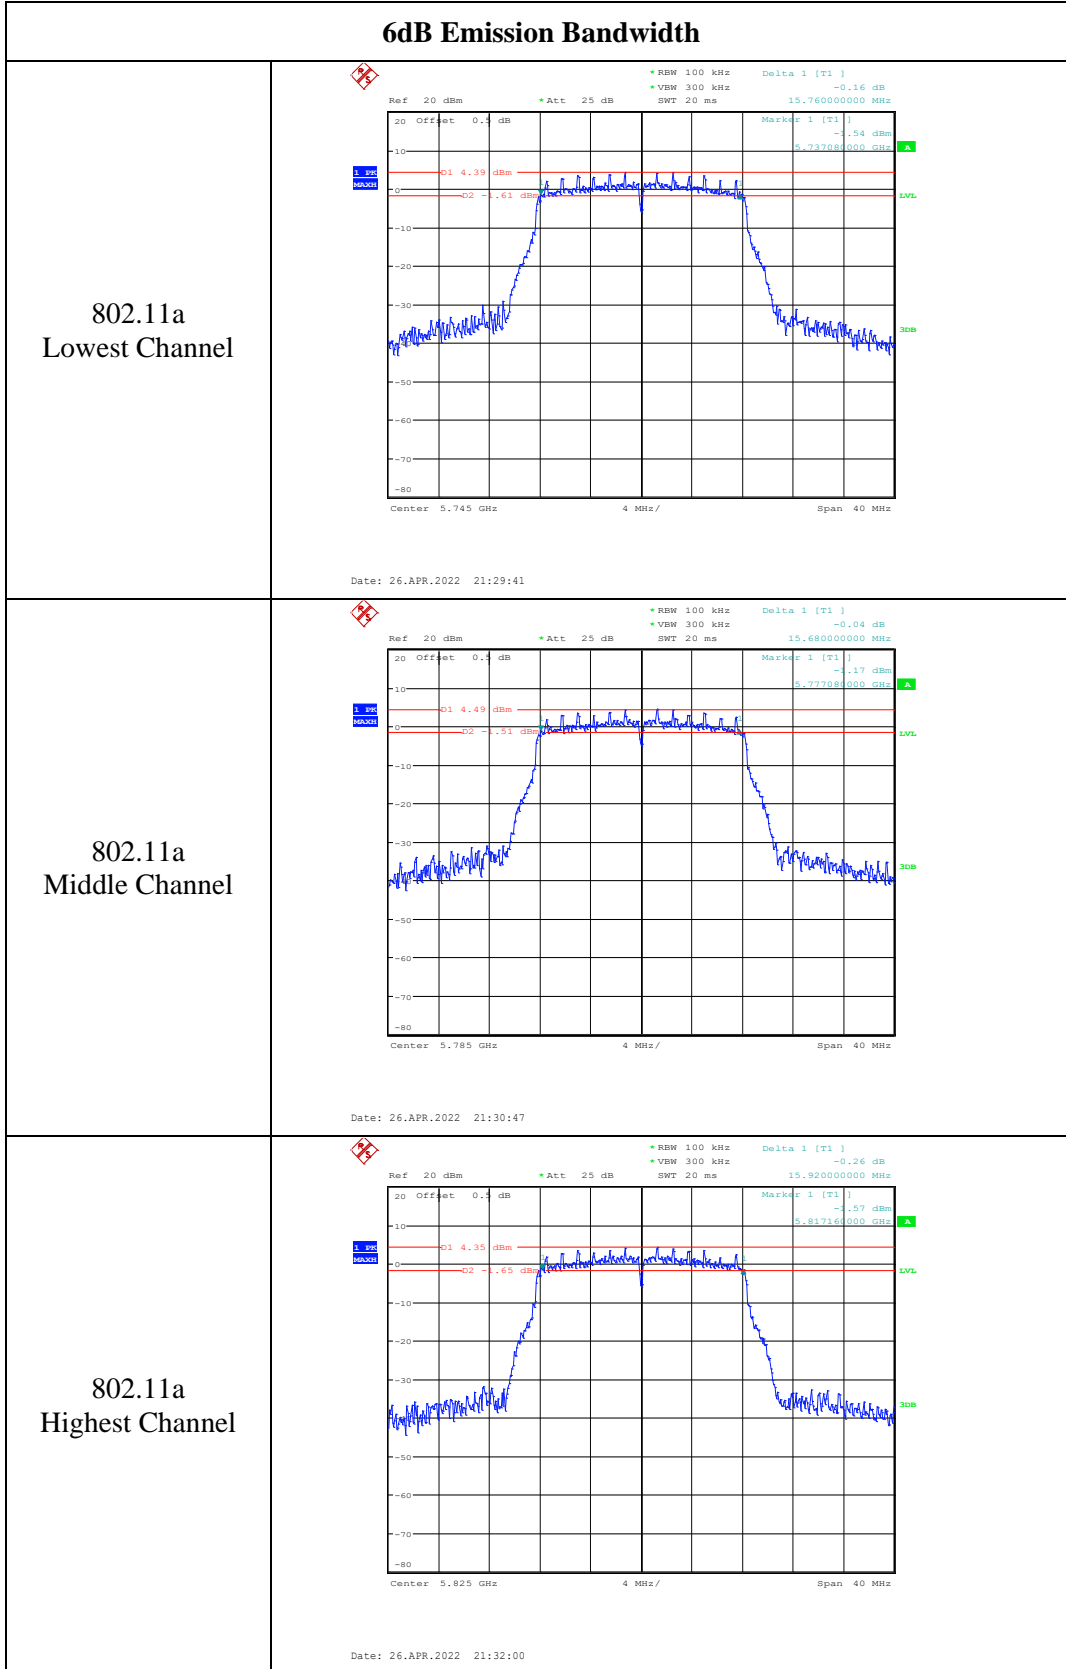

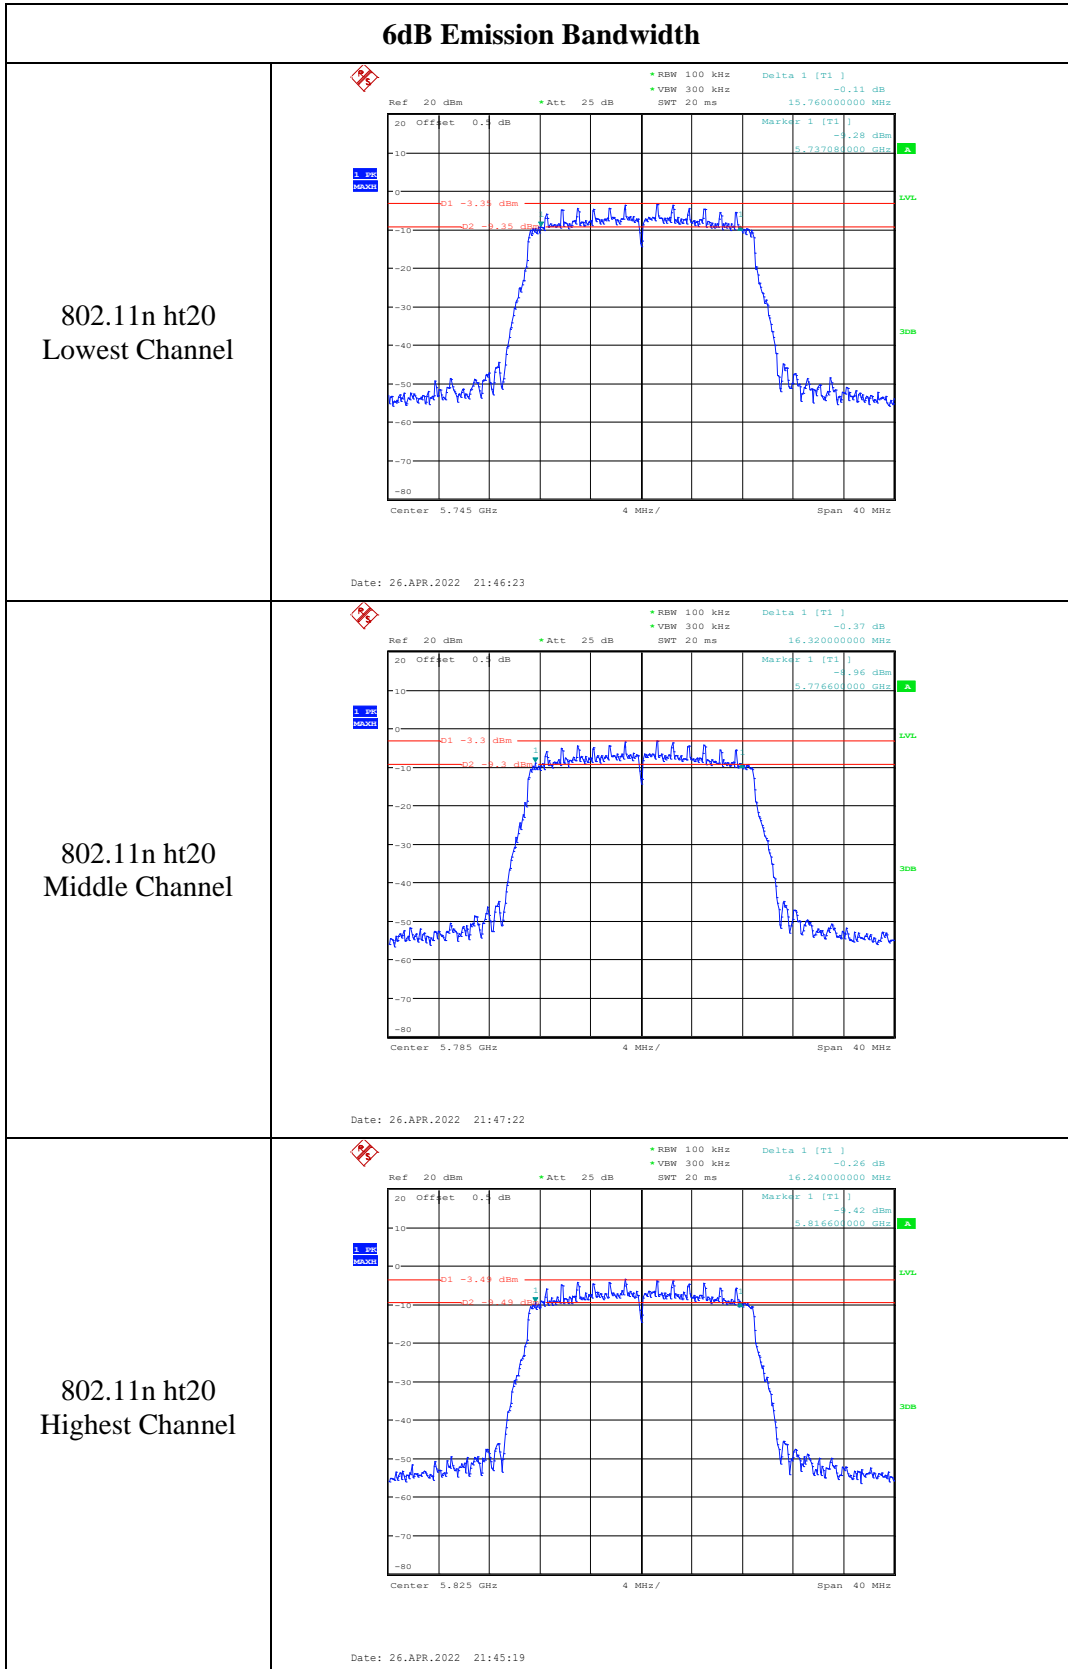

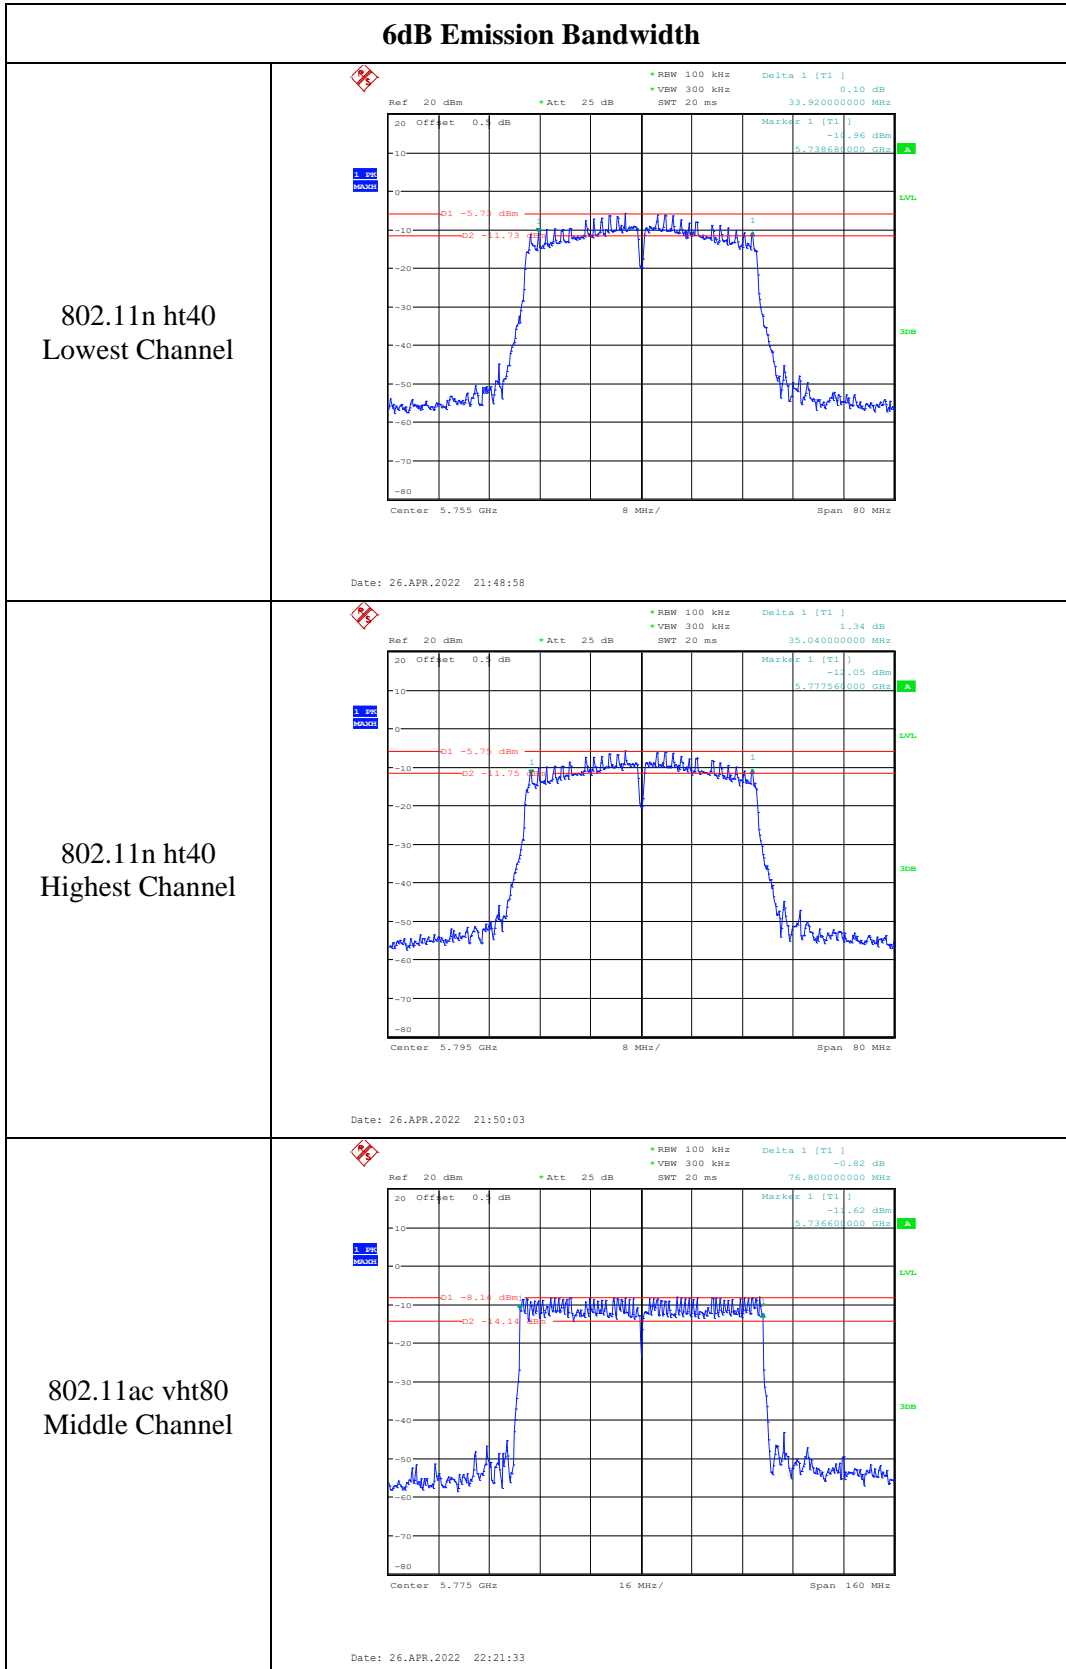

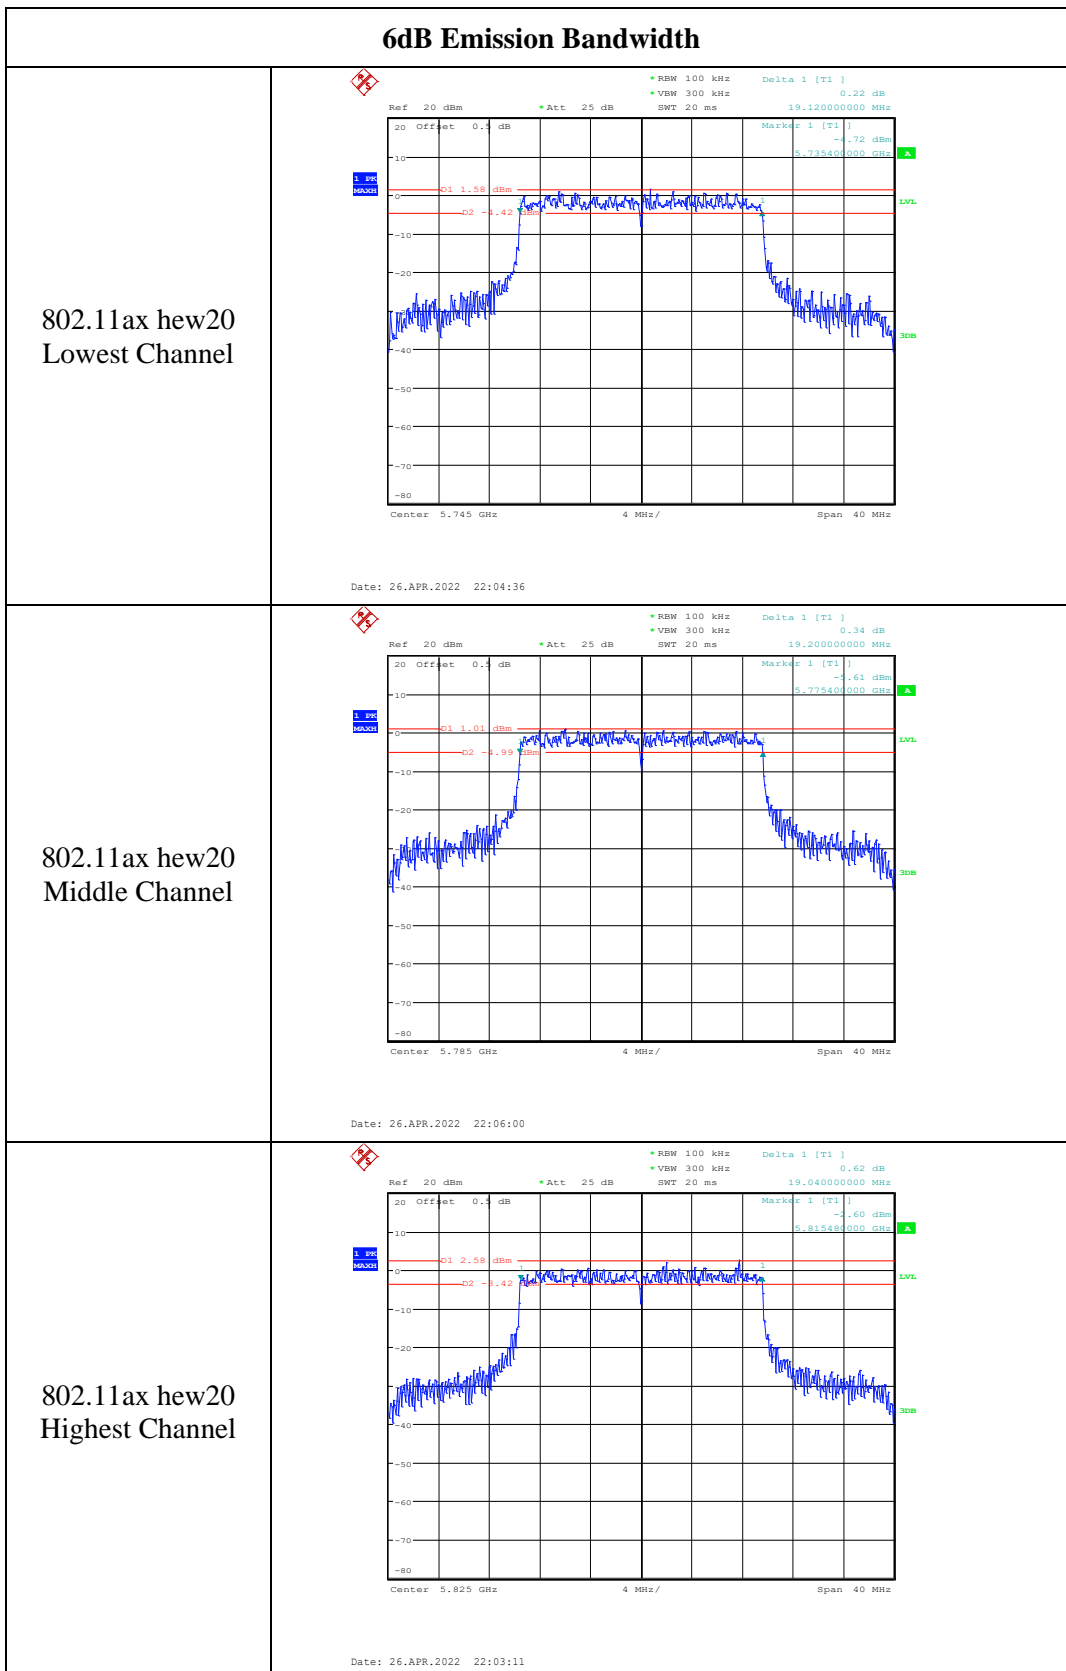


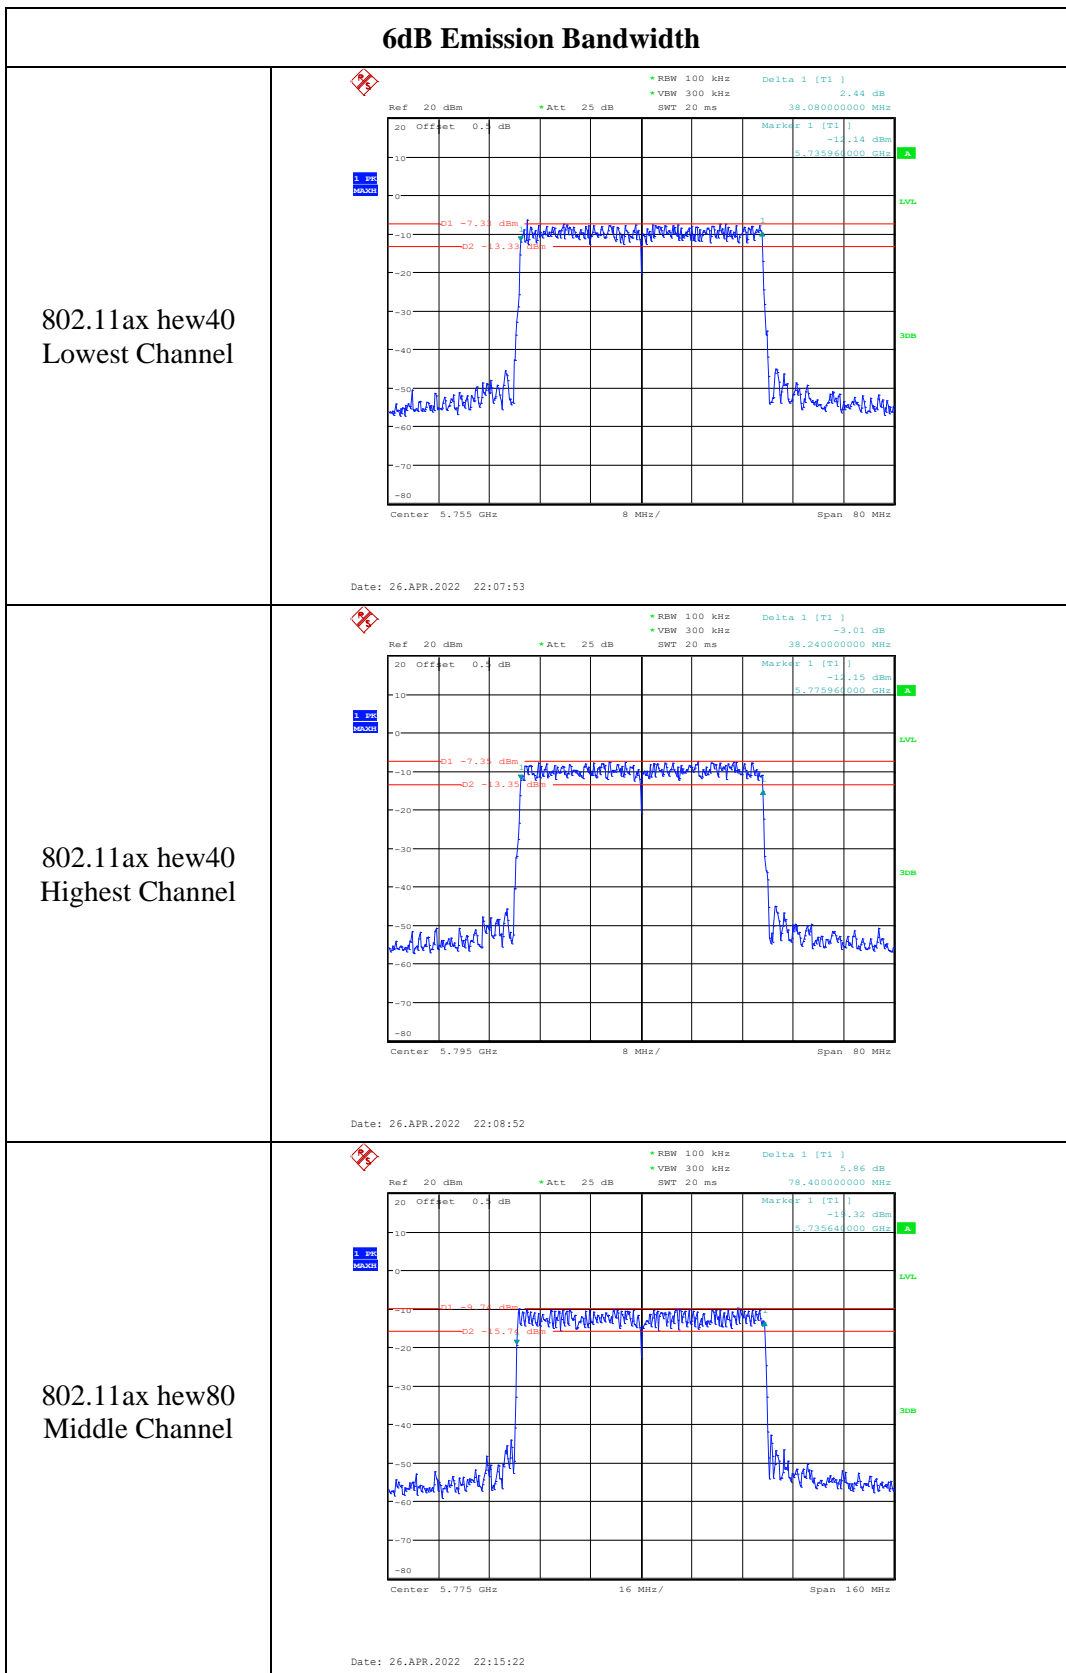




### 99% Occupied Bandwidth

802.11a  
Lowest Channel

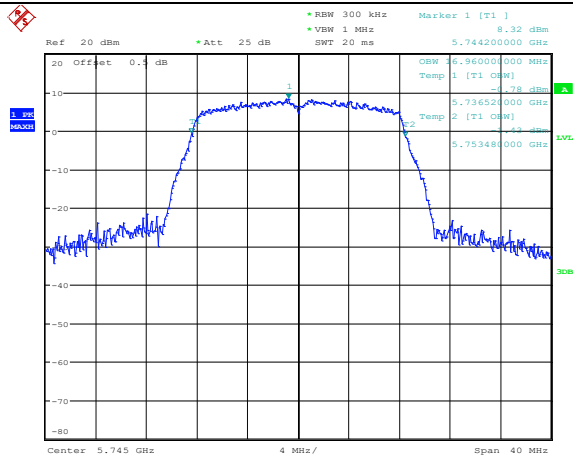


Date: 26.APR.2022 21:30:00

802.11a  
Middle Channel

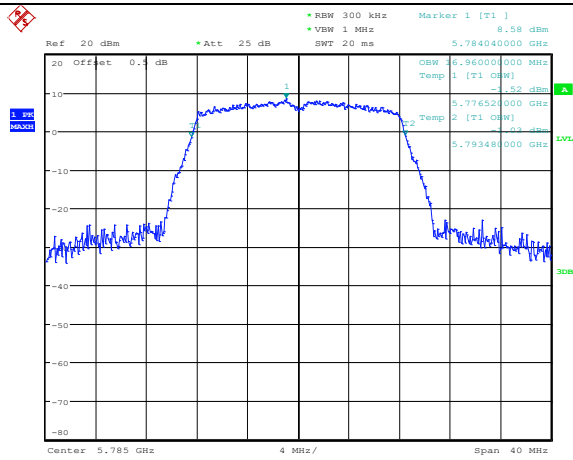

Date: 26.APR.2022 21:31:06


802.11a  
Highest Channel

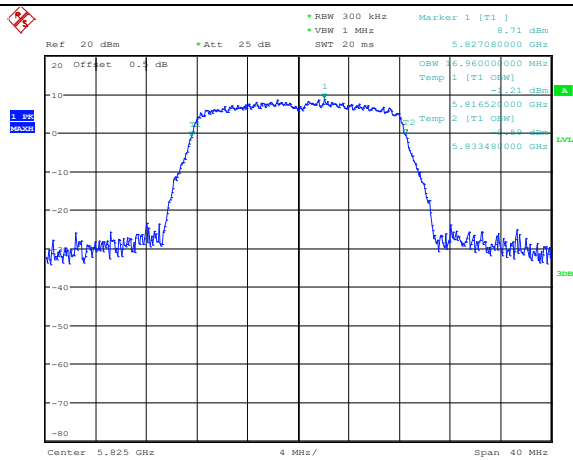

Date: 26.APR.2022 21:32:22


### 99% Occupied Bandwidth

802.11n ht20  
Lowest Channel

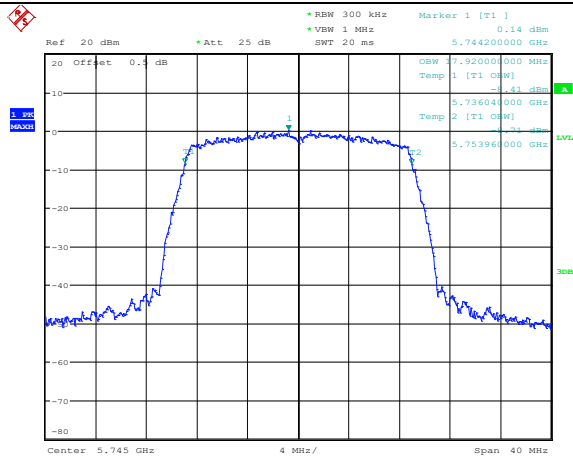


Date: 26.APR.2022 21:46:37

802.11n ht20  
Middle Channel

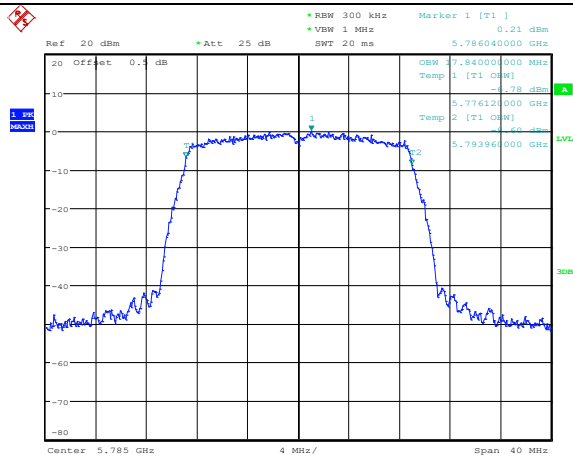

Date: 26.APR.2022 21:47:36


802.11n ht20  
Highest Channel

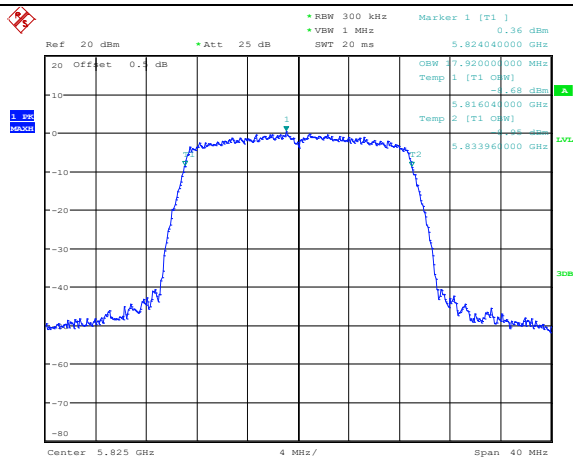

Date: 26.APR.2022 21:45:34


### 99% Occupied Bandwidth

802.11n ht40  
Lowest Channel

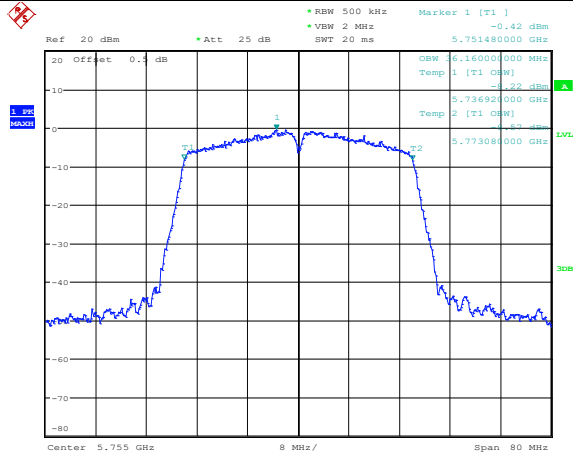


Date: 26.APR.2022 21:49:17

802.11n ht40  
Highest Channel

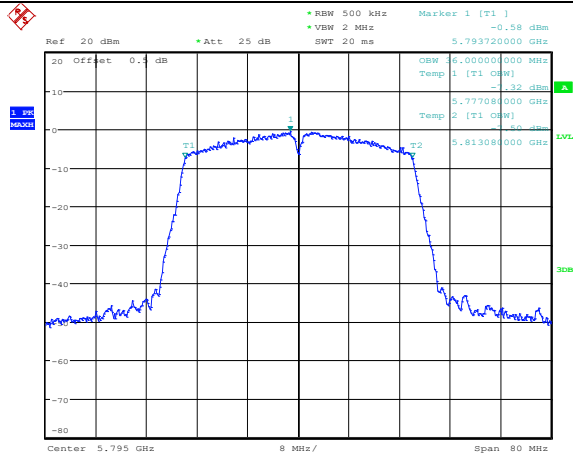


Date: 26.APR.2022 21:50:22

802.11ac vht80  
Middle Channel

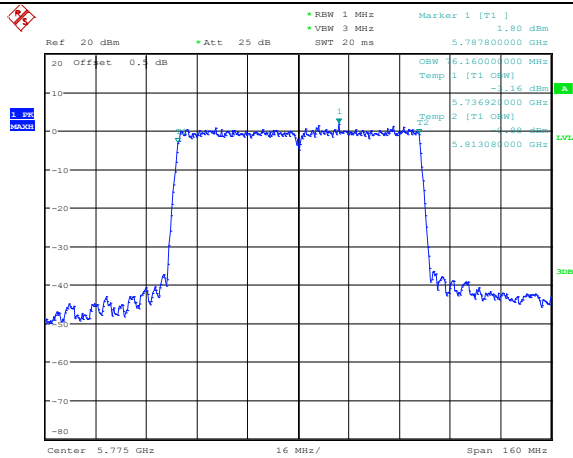

Date: 26.APR.2022 22:21:53

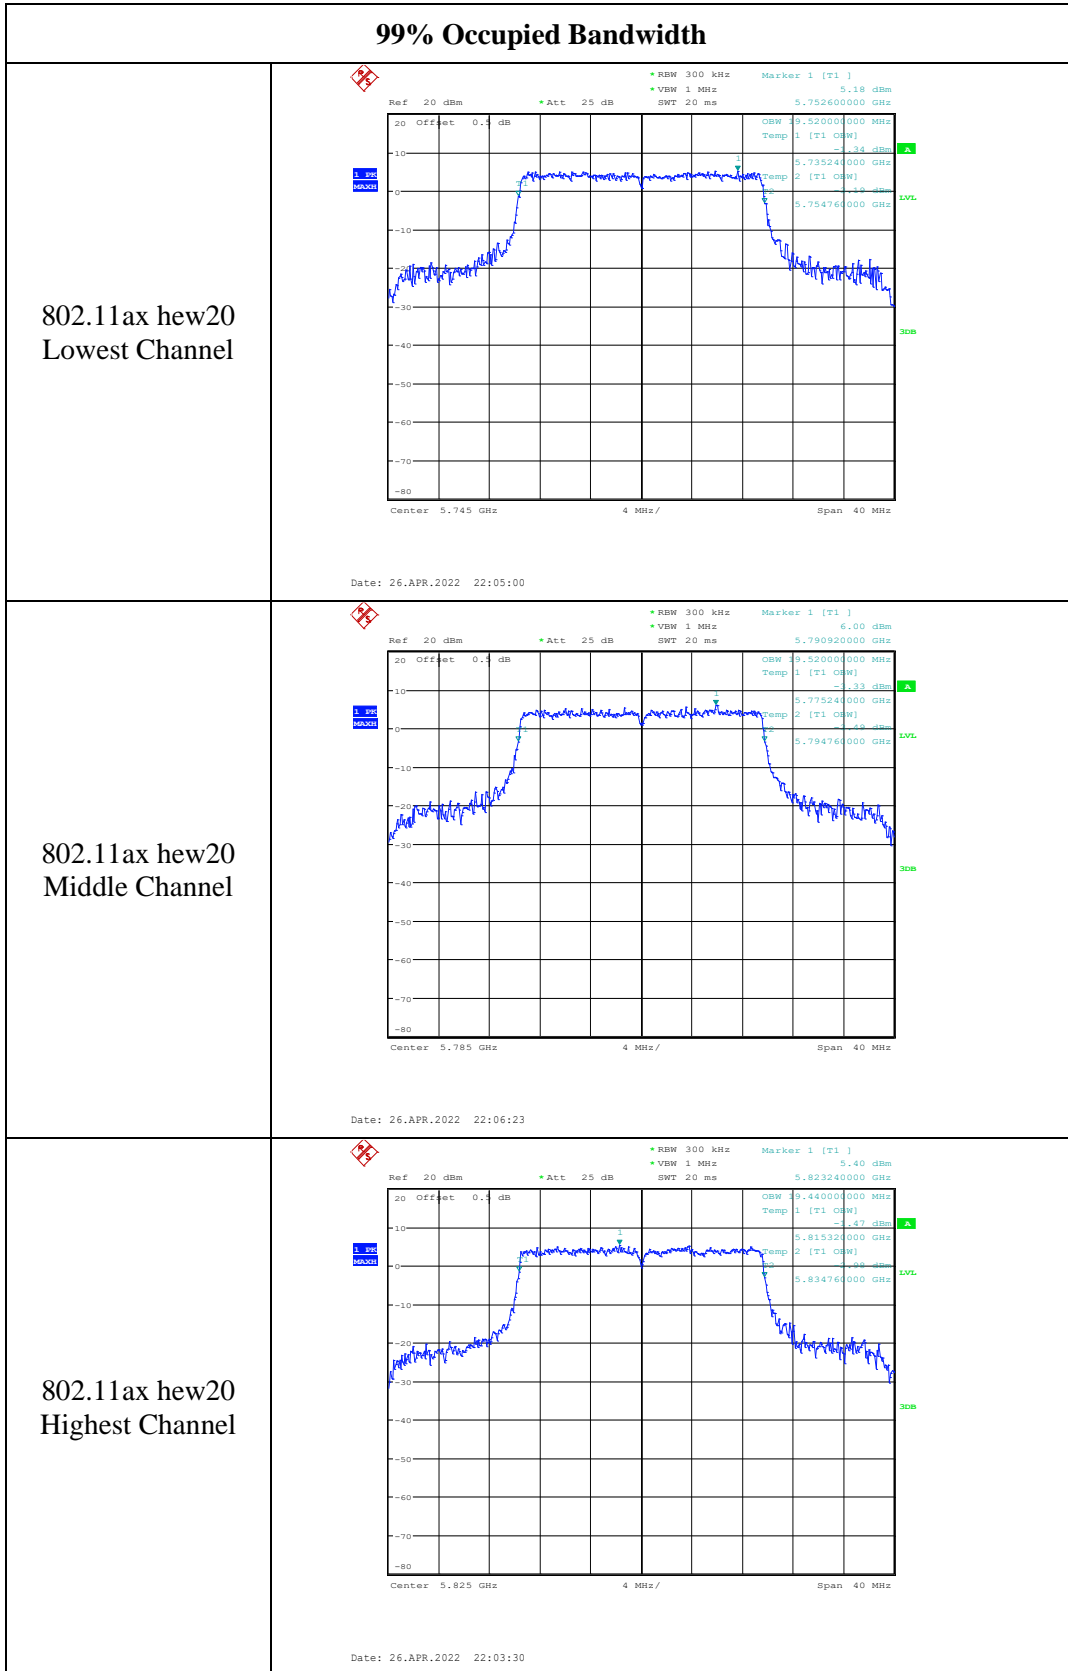

### 99% Occupied Bandwidth

<p>802.11ax hew40 Lowest Channel</p>	<p>Date: 26.APR.2022 22:08:07</p>
<p>802.11ax hew40 Highest Channel</p>	<p>Date: 26.APR.2022 22:09:11</p>
<p>802.11ax hew80 Middle Channel</p>	<p>Date: 26.APR.2022 22:15:38</p>

**4.4 Maximum Conducted Output Power:**

Serial Number:	CR21090071-RF-S1	Test Date:	2022/4/26-2022/4/27
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	24.9	Relative Humidity: (%)	46	ATM Pressure: (kPa)	100.3
----------------------	------	---------------------------	----	---------------------------	-------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2021XA	MY54080015	2021-07-22	2022-07-21
eastsheep	Coaxial Attenuator	2W-SMA- JK-18G	21060301	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100004	Each time	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Data:****5150-5250 MHz(Except 802.11ax mode):**

Test Modes	Test Frequency (MHz)	Maximum Conducted Average Output Power (dBm)					
		Chain 0	Chain 1	Chain 2	Chain 3	Total	Limit
802.11a	5180	16.38	15.94	15.05	16.15	/	30
	5200	16.76	16.08	15.23	16.83	/	30
	5240	17.04	15.84	15.34	16.66	/	30
802.11n ht20	5180	9.16	9.19	8.27	8.37	14.79	30
	5200	9.15	9.53	8.5	8.44	14.95	30
	5240	9.59	9.12	8.53	8.74	15.03	30
802.11n ht40	5190	8.71	9.23	8.16	8.12	14.60	30
	5230	8.76	8.65	8.12	8.53	14.54	30
802.11ac vht80	5210	7.82	7.98	6.95	7.03	13.49	30

Note:

The device is an indoor AP.

The maximum antenna gain is 5.0dBi in 5GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

So: Directional gain =5.0dBi

**5725-5850 MHz(Except 802.11ax mode):**

Test Modes	Test Frequency (MHz)	Maximum Conducted Average Output Power (dBm)					
		Chain 0	Chain 1	Chain 2	Chain 3	Total	Limit
802.11a	5745	16.17	15.55	16.21	16.77	/	30
	5785	16.27	15.57	16.17	16.51	/	30
	5825	16.31	15.68	16.63	15.98	/	30
802.11n ht20	5745	8	7.89	8.98	9.6	14.70	30
	5785	8.32	7.95	9.12	9.08	14.67	30
	5825	8.37	8.13	9.57	9.14	14.86	30
802.11n ht40	5755	7.91	7.97	8.56	9.59	14.58	30
	5795	7.92	8.17	8.73	8.94	14.48	30
802.11ac vht80	5775	6.51	6.89	7.03	7.73	13.08	30

Note:

The maximum antenna gain is 5.0dBi in 5GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

So:

Directional gain =5.0dBi

**802.11ax Mode, 5150-5250MHz:**

Test Modes	Test Channels	Test Frequency (MHz)	RU Config.	Maximum Conducted Average Output Power (dBm)								
				Chain 0	Chain 1	Chain 2	Chain 3	Total	Limit			
802.11ax hew20	Lowest	5180	26/0	0.32	0.84	0.94	0.31	6.63	30			
			52/37	3.83	4.36	3.99	3.46	9.94	30			
			106/53	6.93	7.26	7	6.35	12.92	30			
			242/61	10.5	10.82	10.54	10.03	16.50	30			
	Middle	5200	26/0	0.55	0.78	1.28	0.48	6.80	30			
			52/37	3.92	4.58	4.16	3.51	10.08	30			
			106/53	7.04	7.7	7.3	6.58	13.19	30			
			242/61	10.57	11.27	11	10.56	16.88	30			
	Highest	5240	26/8	0.52	0.95	0.77	0.33	6.67	30			
			52/40	3.79	4.07	3.79	3.29	9.76	30			
			106/54	6.92	7.15	6.9	6.48	12.89	30			
			242/61	10.61	10.66	10.27	10.09	16.43	30			
802.11ax hew40	Lowest	5190	26/0	-2.3	-1.29	-1.51	-1.54	4.38	30			
			52/37	0.27	1.26	0.66	0.11	6.62	30			
			106/53	3.81	5.09	4.49	3.55	10.30	30			
			242/61	9.06	9.89	9.1	8.46	15.18	30			
	Highest	5230	484/65	9.03	10.04	9.15	8.59	15.26	30			
			26/0	-2.32	-1.89	-2.17	-2.21	3.88	30			
			52/37	0.15	0.64	0.34	0.51	6.43	30			
			106/53	3.43	3.71	3.74	3.75	9.68	30			
			242/61	9.07	9.24	8.91	8.58	14.98	30			
			484/65	9.04	9.59	9.06	8.61	15.11	30			
			802.11ax hew80	Middle	5210	26/0	-8.74	-7.35	-8.03	-8.77	-2.16	30
						52/37	-5.89	-4.56	-5.2	-5.96	0.66	30
106/53	-2.4	-1.14				-1.62	-2.44	4.16	30			
242/61	1.84	3.1				2.24	1.34	8.20	30			
484/65	7.7	8.46				7.88	7.16	13.85	30			
996/67	10.97	11.96				10.9	9.88	17.01	30			

**Note:**

The device is an indoor AP.

The maximum antenna gain is 5.0dBi in 5GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

So: Directional gain =5.0dBi



**802.11ax Mode, 5725-5850MHz:**

Test Modes	Test Channels	Test Frequency (MHz)	RU Config.	Maximum Conducted Average Output Power (dBm)					
				Chain 0	Chain 1	Chain 2	Chain 3	Total	Limit
802.11ax hew20	Lowest	5745	26/0	5.08	5.72	5.4	5.6	11.48	30
			52/37	8.12	8.77	8.38	8.45	14.46	30
			106/53	12.15	12.78	11.93	12.59	18.40	30
			242/61	15.74	16.25	15.41	15.76	21.82	30
	Middle	5785	26/0	4.88	5.94	5.36	5.45	11.44	30
			52/37	7.92	8.81	8.44	8.65	14.49	30
			106/53	11.99	12.83	11.88	12.62	18.37	30
			242/61	15.26	16.04	15.37	16.07	21.72	30
	Highest	5825	26/8	4.7	5.93	5.67	5.48	11.49	30
			52/40	7.81	9.24	9	8.58	14.71	30
			106/54	11.93	12.53	12.4	12.79	18.44	30
			242/61	15.3	15.86	15.78	16.51	21.90	30
802.11ax hew40	Lowest	5755	26/0	-4.4	-4.37	-4.32	-4.02	1.75	30
			52/37	-2.54	-2.86	-2.07	-2.49	3.54	30
			106/53	3.49	4.08	4.58	4.63	10.24	30
			242/61	7.46	8.67	9.19	9.02	14.66	30
	Highest	5795	26/0	-4.37	-4.18	-4.06	-3.61	1.97	30
			52/37	-2.64	-3.03	-2.76	-2.05	3.42	30
			106/53	3.38	4	4.59	4.72	10.23	30
			242/61	7.55	8.44	9.1	9.3	14.67	30
802.11ax hew80	Middle	5775	26/0	-5.41	-5.55	-5.1	-4.61	0.87	30
			52/37	-3.71	-3.35	-3.08	-2.67	2.83	30
			106/53	0.4	0.53	0.47	1.15	6.67	30
			242/61	4.17	4.72	4.08	5.16	10.58	30
			484/65	8.2	8.72	9.11	9.25	14.86	30
			996/67	11.65	12.49	12.52	13.13	18.50	30

**Note:**

The maximum antenna gain is 5.0dBi in 5GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

So:

Directional gain = 5.0dBi

**4.5 Maximum power spectral density:**

Serial Number:	CR21090071-RF-S1	Test Date:	2022/4/26~2022/6/24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Julie Tan	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	26.2~26.9	Relative Humidity: (%)	64~66	ATM Pressure: (kPa)	100.1
----------------------	-----------	---------------------------	-------	------------------------	-------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2021/7/22	2022/7/21
R&S	Spectrum Analyzer	FSV40	101943	2021/10/10	2022/10/09
YINSAIGE	Coaxial Cable	SS402	SJ0100004	Each time	N/A
HuiXunDa	DC Block	SMA-JK 18G	DCB181108043	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data:****5150-5250 MHz(Except 802.11ax mode):**

Test Modes	Test Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)					
		Chain 0	Chain 1	Chain 2	Chain 3	Total	Limit
802.11a	5180	6.43	6.43	5.70	6.16	/	17
	5200	6.75	6.42	5.77	6.46	/	17
	5240	7.04	6.07	5.47	6.73	/	17
802.11n ht20	5180	-0.63	-0.09	-0.43	-0.77	5.55	12
	5200	-0.49	0.20	-0.41	-0.46	5.74	12
	5240	-0.23	-0.58	-0.86	-0.49	5.49	12
802.11n ht40	5190	-2.91	-2.19	-2.96	-3.10	3.25	12
	5230	-2.68	-3.20	-3.38	-2.78	3.02	12
802.11ac vht80	5210	-5.43	-5.39	-6.40	-6.17	0.20	12

**5725-5850 MHz(Except 802.11ax mode):**

Test Modes	Test Frequency (MHz)	Reading (dBm/300kHz)				Maximum Power Spectral Density (dBm/500kHz)					
		Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	Total	Limit
802.11a	5745	1.79	1.46	2.04	3.10	4.01	3.68	4.26	5.32	/	30
	5785	1.73	1.46	2.17	2.57	3.95	3.68	4.39	4.79	/	30
	5825	2.22	1.23	2.41	1.46	4.44	3.45	4.63	3.68	/	30
802.11n ht20	5745	-5.85	-6.04	-4.36	-2.53	-3.63	-3.82	-2.14	-0.31	3.78	25
	5785	-5.74	-6.61	-4.46	-3.12	-3.52	-4.39	-2.24	-0.9	3.46	25
	5825	-5.69	-5.33	-4.13	-3.68	-3.47	-3.11	-1.91	-1.46	3.61	25
802.11n ht40	5755	-8.10	-8.25	-6.70	-6.09	-5.88	-6.03	-4.48	-3.87	1.05	25
	5795	-8.32	-7.15	-7.08	-6.57	-6.1	-4.93	-4.86	-4.35	1.01	25
802.11ac vht80	5775	-10.83	-10.07	-9.21	-8.82	-8.61	-7.85	-6.99	-6.6	-1.42	25

Note:

The maximum antenna gain is 5 dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 5 + 10 * \log(4/1) = 11 \text{ dBi}$$

Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test. If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10 \log(500 \text{ kHz} / \text{RBW})$  to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement

**802.11ax Modes:  
5150-5250 MHz:**

Test Modes	Test Frequency (MHz)	RU Config.	Maximum Power Spectral Density (dBm/MHz)					Total	Limit
			Chain 0	Chain 1	Chain 2	Chain 3			
802.11ax hew20	5180	26/0	-1.76	-1.31	-1.37	-1.94	4.43	12	
		52/37	-0.8	-0.11	-0.94	-1.26	5.26	12	
		106/53	0.31	0.47	0.16	-0.44	6.16	12	
		242/61	0.51	0.72	0.25	-0.31	6.33	12	
	5200	26/0	-1.58	-0.95	-1.31	-1.89	4.60	12	
		52/37	-0.67	0.12	-0.82	-1.26	5.39	12	
		106/53	0.26	0.89	0.22	-0.35	6.30	12	
		242/61	0.46	1.07	0.8	-0.06	6.61	12	
	5240	26/8	-1.67	-1.45	-1.6	-2.3	4.28	12	
		52/40	-0.92	-0.62	-1.03	-1.62	4.99	12	
		106/54	-0.06	0.29	-0.12	-0.46	5.94	12	
		242/61	0.6	0.71	0.1	-0.12	6.36	12	
802.11ax hew40	5190	26/0	-5.8	-5.09	-5.78	-5.56	0.47	12	
		52/37	-5.21	-4.76	-5.45	-6.09	0.67	12	
		106/53	-4.08	-3.11	-4.53	-4.67	1.97	12	
		242/61	-1.64	-0.65	-1.85	-2.25	4.46	12	
		484/65	-1.34	-0.5	-1.48	-2.12	4.70	12	
	5230	26/0	-5.94	-5.54	-5.82	-6.18	0.16	12	
		52/37	-5.22	-4.96	-5.57	-6.31	0.53	12	
		106/53	-4.22	-3.12	-4.26	-4.9	1.94	12	
		242/61	-1.43	-1.11	-2.08	-2.31	4.31	12	
		484/65	-0.89	-0.75	-1.86	-1.99	4.68	12	
802.11ax hew80	5210	26/0	-9.75	-9.39	-9.57	-10.3	-3.72	12	
		52/37	-9.34	-8.85	-9.12	-9.85	-3.25	12	
		106/53	-8.6	7.72	-8.39	-9.08	8.01	12	
		242/61	-6.67	-6.14	-6.84	-7.63	-0.77	12	
		484/65	-4.5	-3.87	-4.56	-5.31	1.49	12	
		996/67	-3.77	-3.56	-4.2	-4.83	1.96	12	

**5725-5850MHz:**

Test Modes	Test Frequency (MHz)	RU Config.	Reading (dBm/300kHz)				Maximum Power Spectral Density (dBm/500kHz)					
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	Total	Limit
802.11ax hew20	5745	26/0	-2.95	-2.16	-2.66	-2.53	-0.73	0.06	-0.44	-0.31	5.67	25
		52/37	-2.36	-1.64	-2.05	-2.37	-0.14	0.58	0.17	-0.15	6.15	25
		106/53	-0.99	-0.17	-1.02	-0.86	1.23	2.05	1.2	1.36	7.49	25
		242/61	-0.91	-0.07	0.01	0.05	1.31	2.15	2.23	2.27	8.03	25
	5785	26/0	-2.97	-2.16	-2.49	-2.7	-0.75	0.06	-0.27	-0.48	5.67	25
		52/37	-2.73	-1.79	-2.1	-1.8	-0.51	0.43	0.12	0.42	6.15	25
		106/53	-1.24	-0.59	-1.3	-0.77	0.98	1.63	0.92	1.45	7.28	25
		242/61	-1.05	-0.37	-0.2	0.26	1.17	1.85	2.02	2.48	7.93	25
	5825	26/8	-3.3	-2.33	-2.26	-2.66	-1.08	-0.11	-0.04	-0.44	5.62	25
		52/40	-2.63	-1.55	-1.71	-1.82	-0.41	0.67	0.51	0.4	6.33	25
		106/54	-1.39	-0.53	-0.93	-0.24	0.83	1.69	1.29	1.98	7.49	25
		242/61	-1.12	-0.31	-0.6	0.08	1.1	1.91	1.62	2.3	7.77	25
802.11ax hew40	5755	26/0	-11.34	-11.39	-11.28	-10.28	-9.12	-9.17	-9.06	-8.06	-2.81	25
		52/37	-10.83	-10.47	-10.17	-9.75	-8.61	-8.25	-7.95	-7.53	-2.05	25
		106/53	-9.58	-9.22	-9.07	-8.34	-7.36	-7	-6.85	-6.12	-0.79	25
		242/61	-7.58	-6.64	-6.51	-6.13	-5.36	-4.42	-4.29	-3.91	1.56	25
		484/65	-6.68	-5.87	-5.85	-5.5	-4.46	-3.65	-3.63	-3.28	2.29	25
	5795	26/0	-11.65	-11.52	-10.7	-10.18	-9.43	-9.3	-8.48	-7.96	-2.73	25
		52/37	-11.03	-10.62	-9.74	-9.76	-8.81	-8.4	-7.52	-7.54	-2.01	25
		106/53	-9.9	-9.24	-8.74	-8.23	-7.68	-7.02	-6.52	-6.01	-0.74	25
		242/61	-7.54	-6.82	-6.32	-6.04	-5.32	-4.6	-4.1	-3.82	1.60	25
		484/65	-6.67	-5.84	-6.04	-5.12	-4.45	-3.62	-3.82	-2.9	2.36	25
802.11ax hew80	5775	26/0	-13.98	-14.77	-14.8	-13.36	-11.76	-12.55	-12.58	-11.14	-5.94	25
		52/37	-14.06	-13.73	-14.25	-13.17	-11.84	-11.51	-12.03	-10.95	-5.54	25
		106/53	-12.35	-12.79	-13.17	-12.19	-10.13	-10.57	-10.95	-9.97	-4.37	25
		242/61	-11.91	-11.7	-10.99	-11.21	-9.69	-9.48	-8.77	-8.99	-3.20	25
		484/65	-10.18	-9.18	-8.39	-8.65	-7.96	-6.96	-6.17	-6.43	-0.81	25
		996/67	-8.41	-7.68	-8.09	-7.05	-6.19	-5.46	-5.87	-4.83	0.46	25

Note:

The maximum antenna gain is 5 dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$


So:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 5 + 10 * \log(4/1) = 11 \text{ dBi}$$

Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test. If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10 \log(500 \text{ kHz} / \text{RBW})$  to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement

5150-5250MHz:

Chain 0:

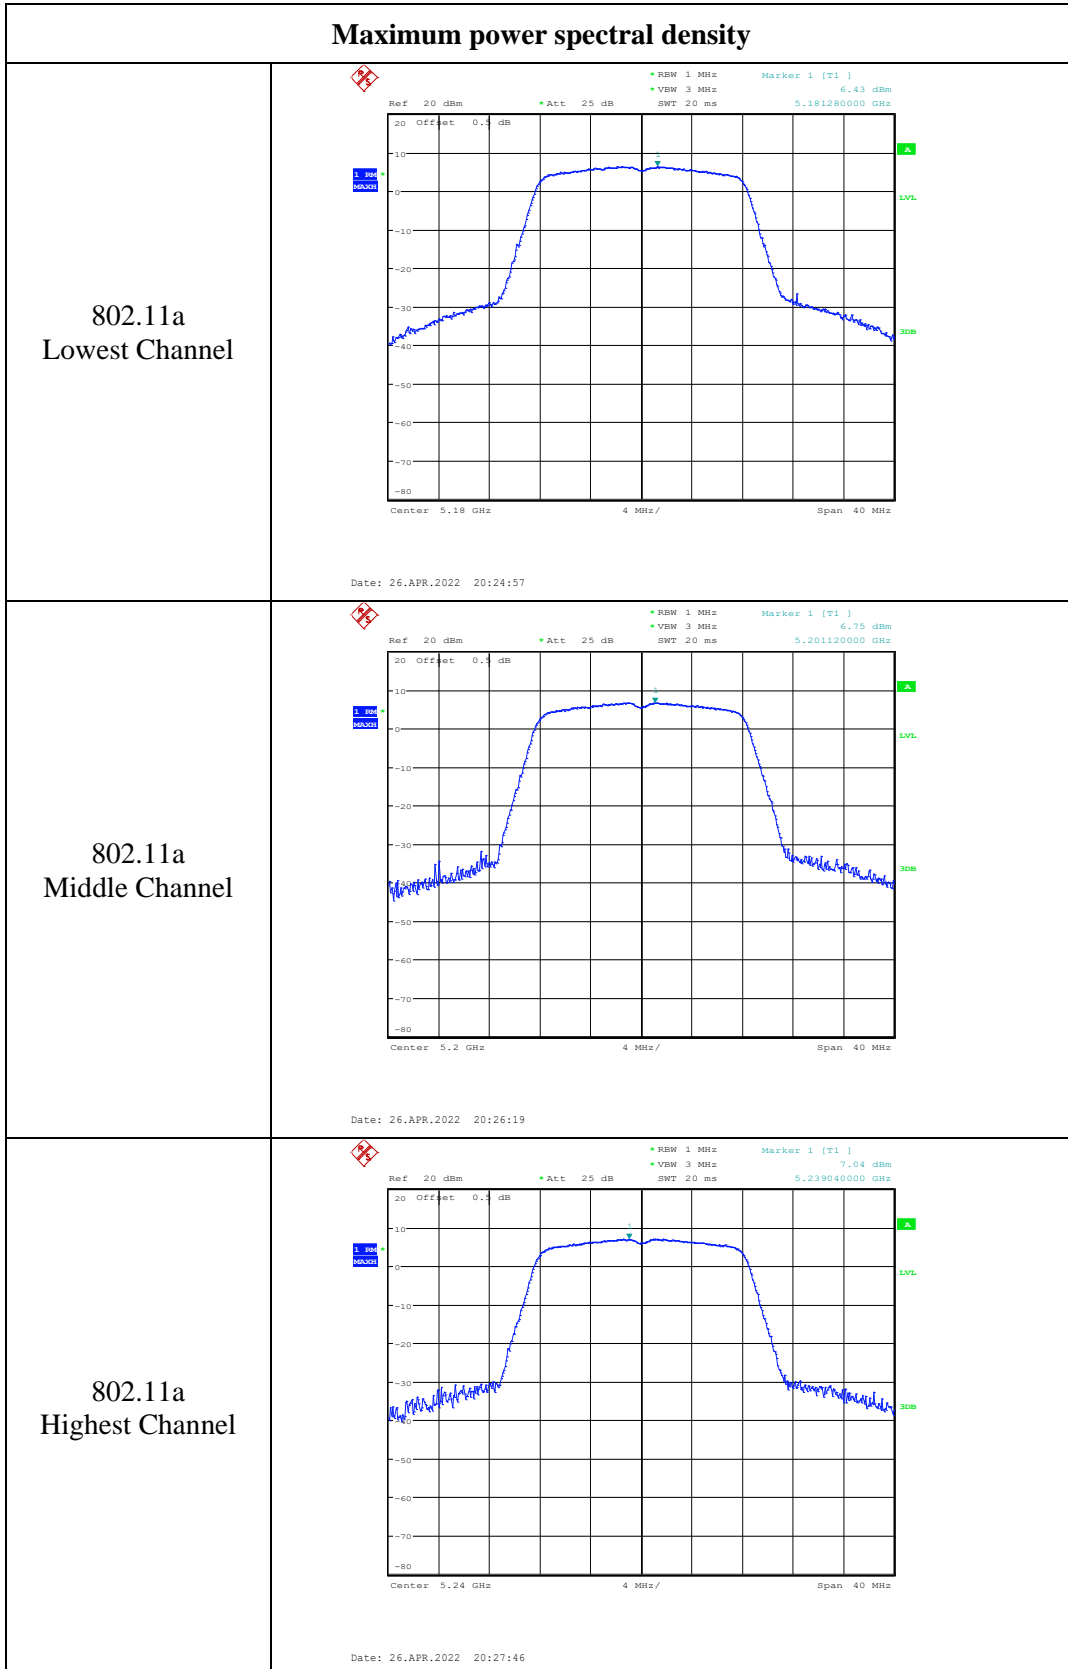

### Maximum power spectral density


<p>802.11n ht20 Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 1 MHz * VBW 3 MHz * SWT 20 ms Marker 1 [T1] -0.63 dBm 5.181360000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.18 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 26.APR.2022 20:45:09</p>
<p>802.11n ht20 Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 1 MHz * VBW 3 MHz * SWT 20 ms Marker 1 [T1] -0.49 dBm 5.199800000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.2 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 26.APR.2022 20:52:41</p>
<p>802.11n ht20 Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 1 MHz * VBW 3 MHz * SWT 20 ms Marker 1 [T1] -0.23 dBm 5.241200000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.24 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 26.APR.2022 20:53:43</p>

### Maximum power spectral density

<p>802.11n ht40 Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 1 MHz * VBW 3 MHz * SWT 20 ms Marker 1 [T1] -2.91 dBm 5.191920000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.19 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 26.APR.2022 20:56:05</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 1 MHz * VBW 3 MHz * SWT 20 ms Marker 1 [T1] -2.68 dBm 5.232720000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.23 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 26.APR.2022 20:57:00</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 1 MHz * VBW 3 MHz * SWT 20 ms Marker 1 [T1] -5.43 dBm 5.236240000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.21 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 26.APR.2022 22:23:21</p>




Chain 1:

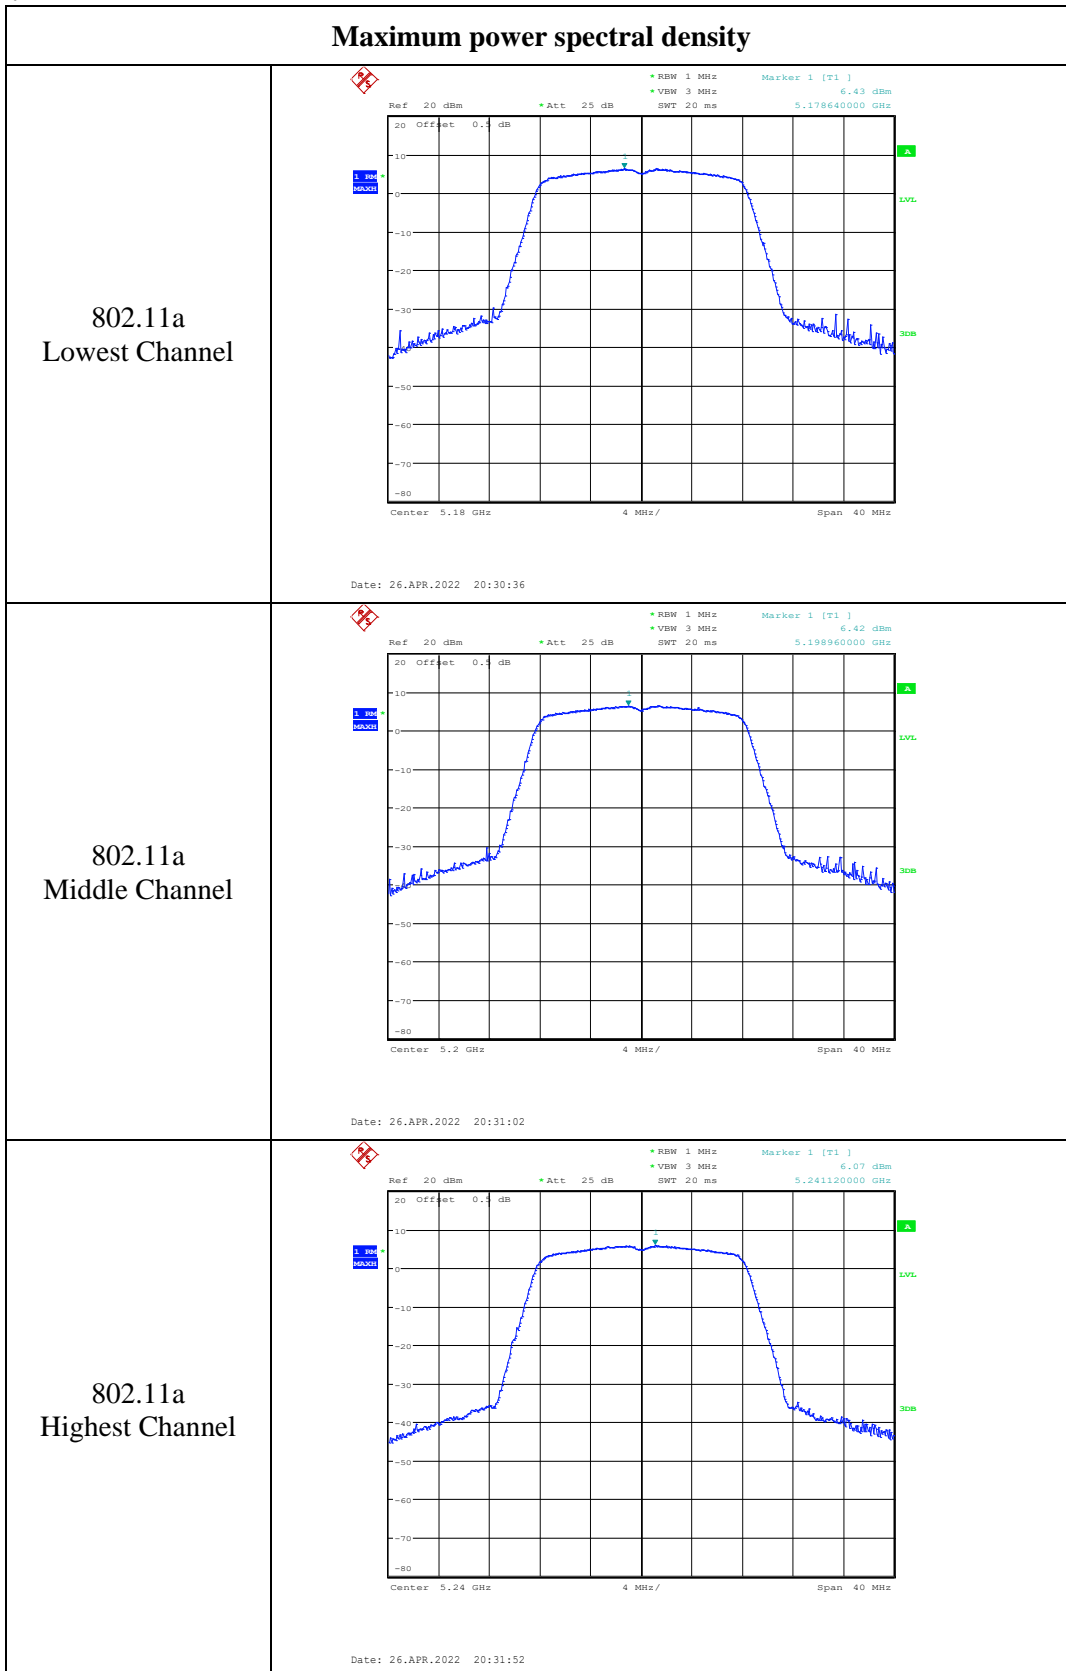


### Maximum power spectral density

802.11n ht20  
Lowest Channel

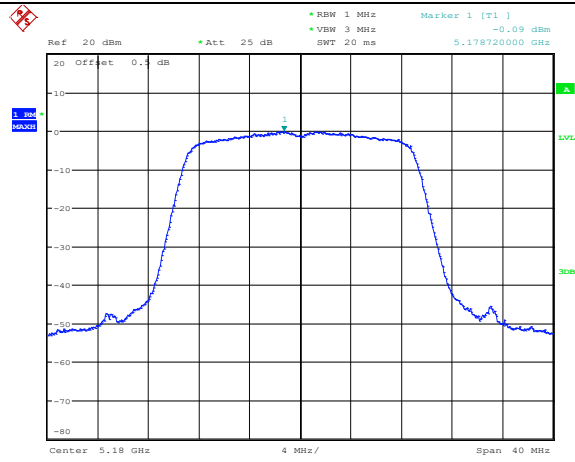


Date: 26.APR.2022 20:43:23

802.11n ht20  
Middle Channel

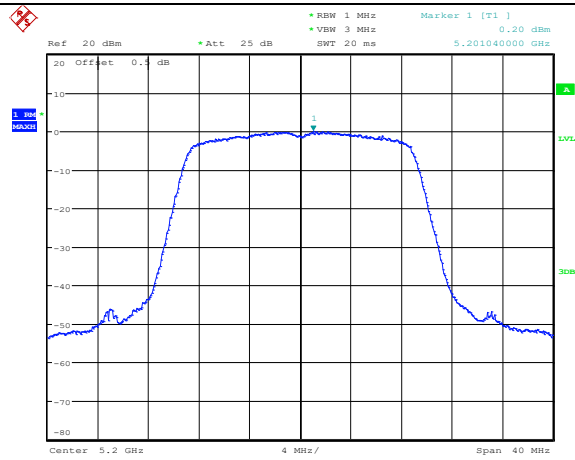

Date: 26.APR.2022 20:43:52


802.11n ht20  
Highest Channel

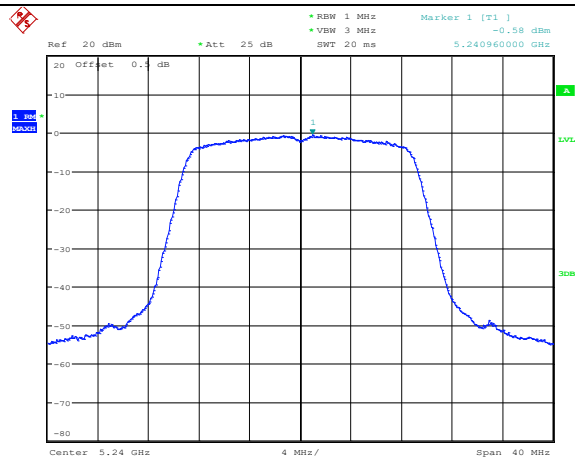

Date: 26.APR.2022 20:42:53


### Maximum power spectral density

802.11n ht40  
Lowest Channel

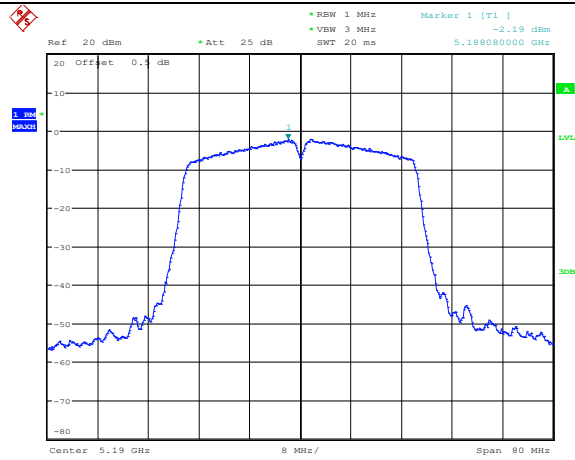


Date: 26.APR.2022 20:58:02

802.11n ht40  
Highest Channel

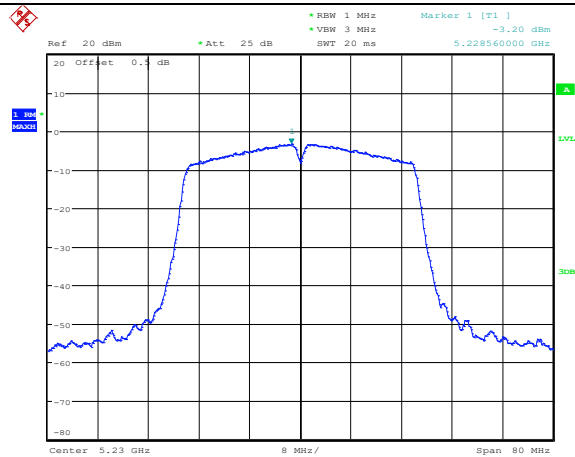


Date: 26.APR.2022 20:57:37

802.11ac vht80  
Middle Channel

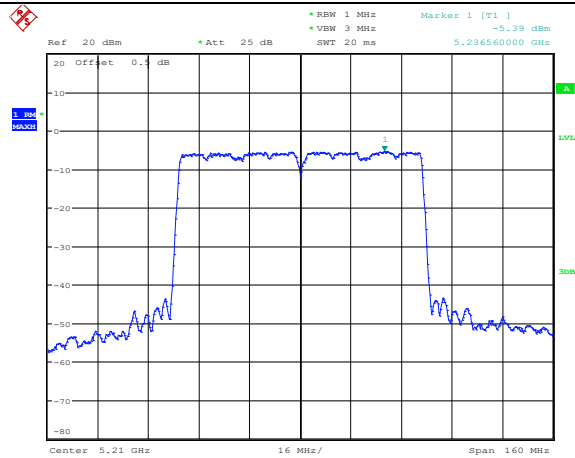


Date: 26.APR.2022 22:24:19

Chain 2:

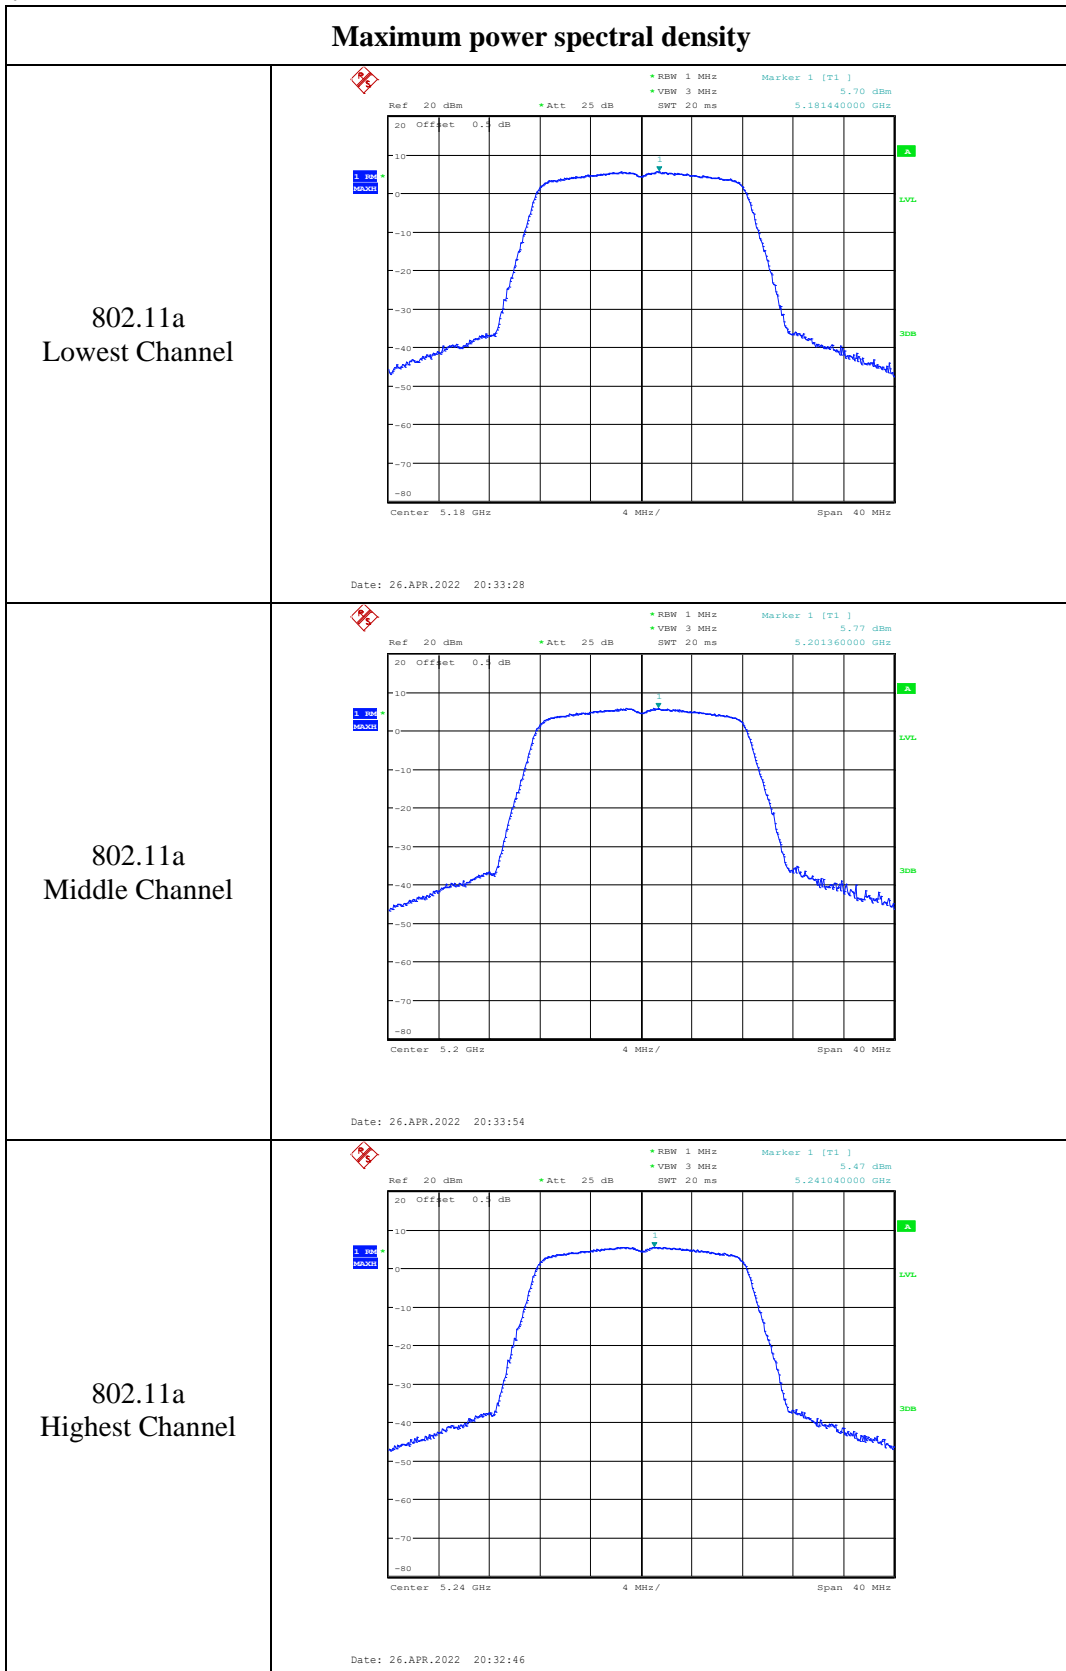


### Maximum power spectral density

802.11n ht20  
Lowest Channel

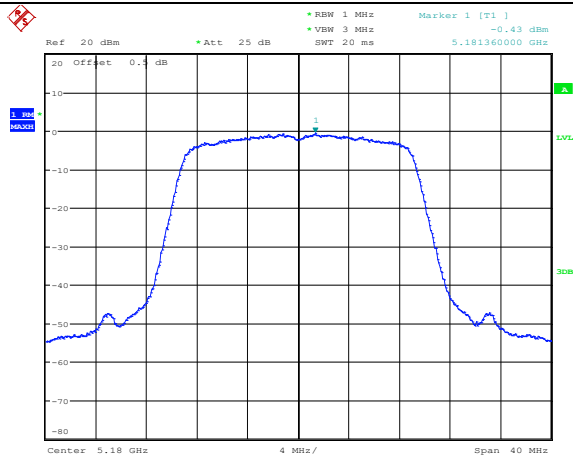


Date: 26.APR.2022 20:40:51

802.11n ht20  
Middle Channel

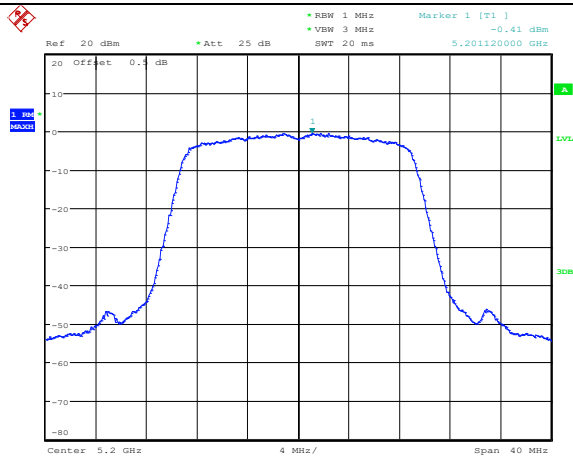

Date: 26.APR.2022 20:41:17

802.11n ht20  
Highest Channel

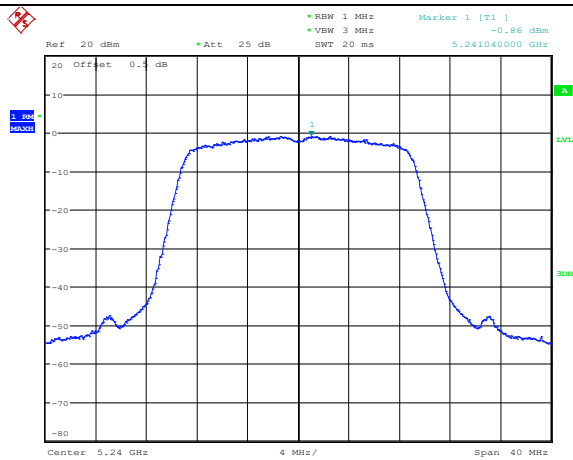


Date: 26.APR.2022 20:42:05

### Maximum power spectral density

<p>802.11n ht40 Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 1 MHz * VBW 3 MHz * SWT 20 ms * Marker 1 [T1] -2.96 dBm 5.187440000 GHz</p> <p>Offset 0.4 dB</p> <p>Center 5.19 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 26.APR.2022 20:58:45</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 1 MHz * VBW 3 MHz * SWT 20 ms * Marker 1 [T1] -3.38 dBm 5.231280000 GHz</p> <p>Offset 0.4 dB</p> <p>Center 5.23 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 26.APR.2022 20:59:06</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 1 MHz * VBW 3 MHz * SWT 20 ms * Marker 1 [T1] -6.40 dBm 5.245200000 GHz</p> <p>Offset 0.4 dB</p> <p>Center 5.21 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 26.APR.2022 22:24:46</p>

Chain 3:

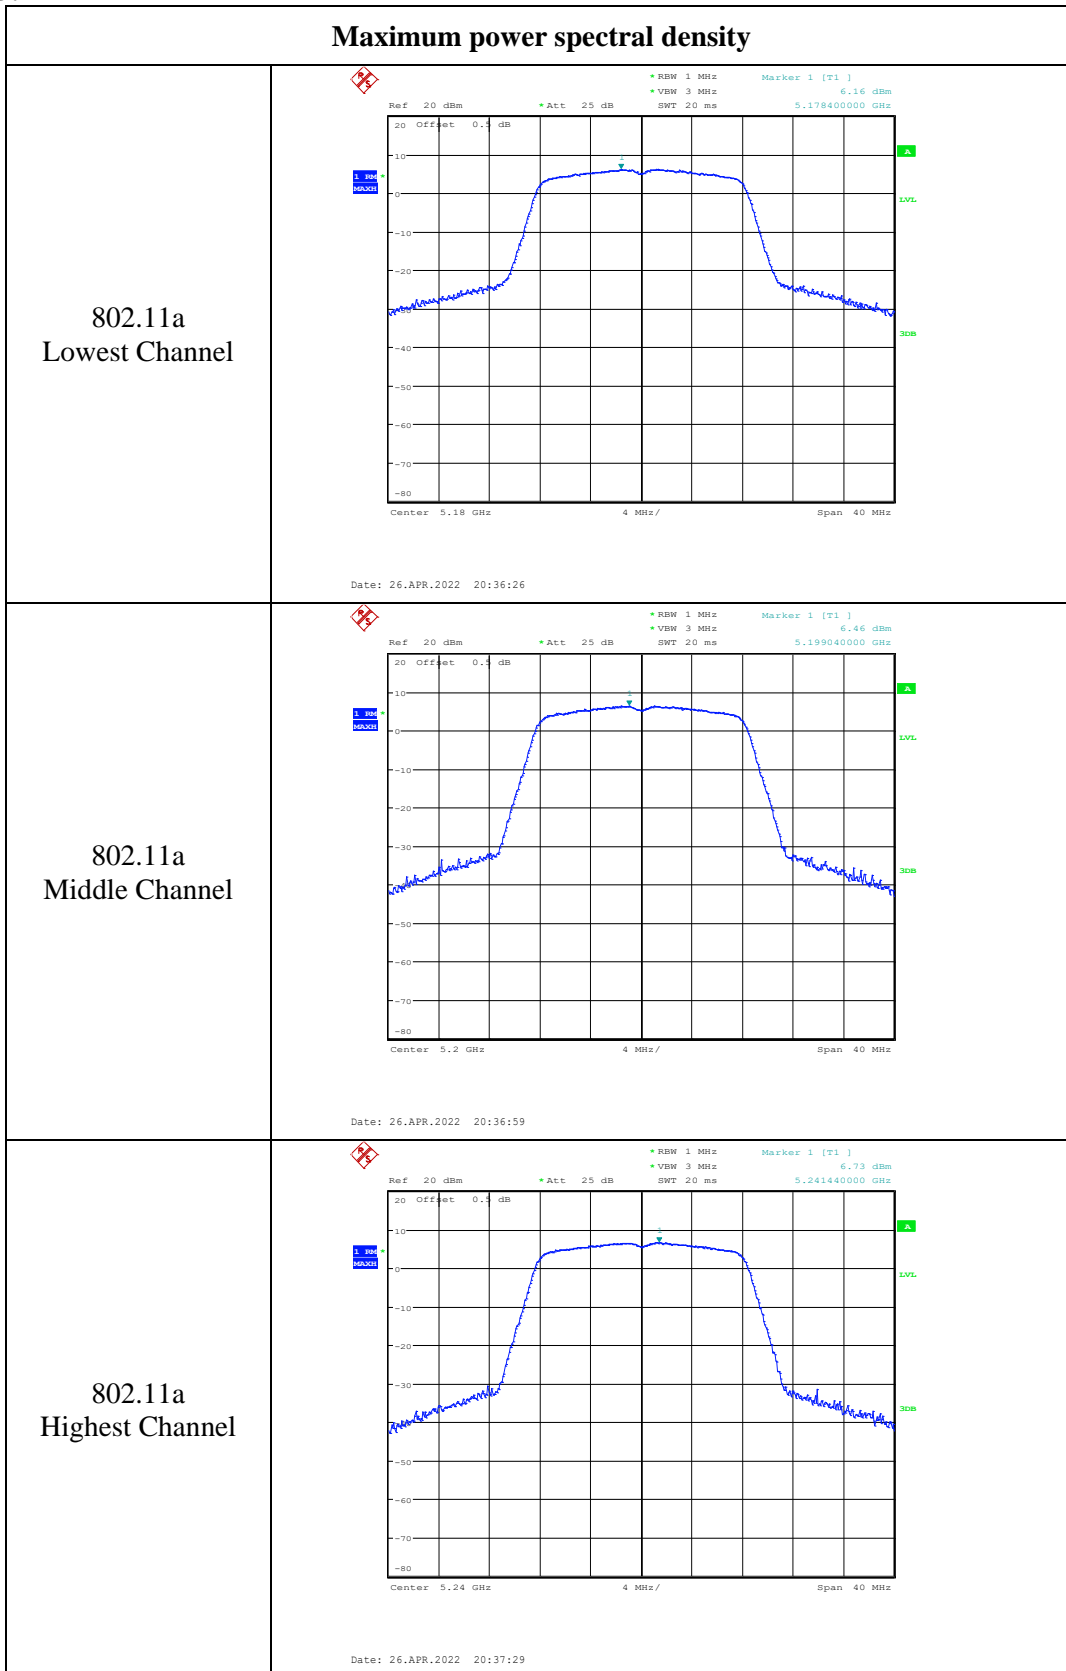


### Maximum power spectral density

<p>802.11n ht20 Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 1 MHz * VBW 3 MHz * SWT 20 ms Marker 1 [T1] -0.77 dBm 5.181360000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.18 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 26.APR.2022 20:39:27</p>
<p>802.11n ht20 Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 1 MHz * VBW 3 MHz * SWT 20 ms Marker 1 [T1] -0.46 dBm 5.198560000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.2 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 26.APR.2022 20:39:53</p>
<p>802.11n ht20 Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 1 MHz * VBW 3 MHz * SWT 20 ms Marker 1 [T1] -0.49 dBm 5.241200000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.24 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 26.APR.2022 20:39:02</p>




### Maximum power spectral density

802.11n ht40  
Lowest Channel

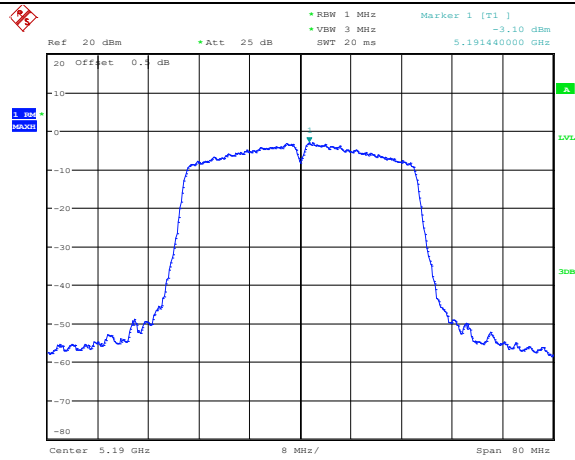


Date: 26.APR.2022 21:01:16

802.11n ht40  
Highest Channel

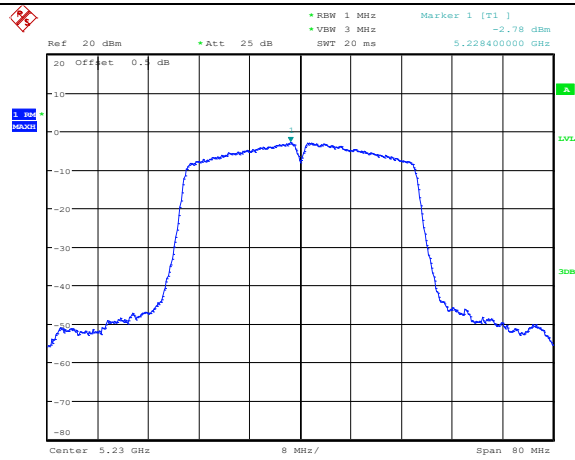

Date: 26.APR.2022 20:59:55


802.11ac vht80  
Middle Channel

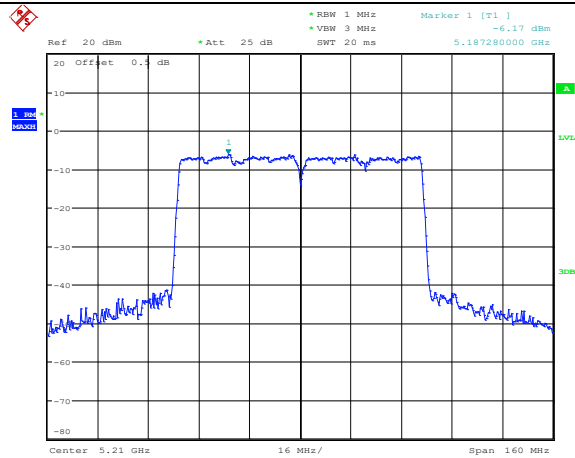

Date: 26.APR.2022 22:25:13


5725-5850MHz

Chain 0:

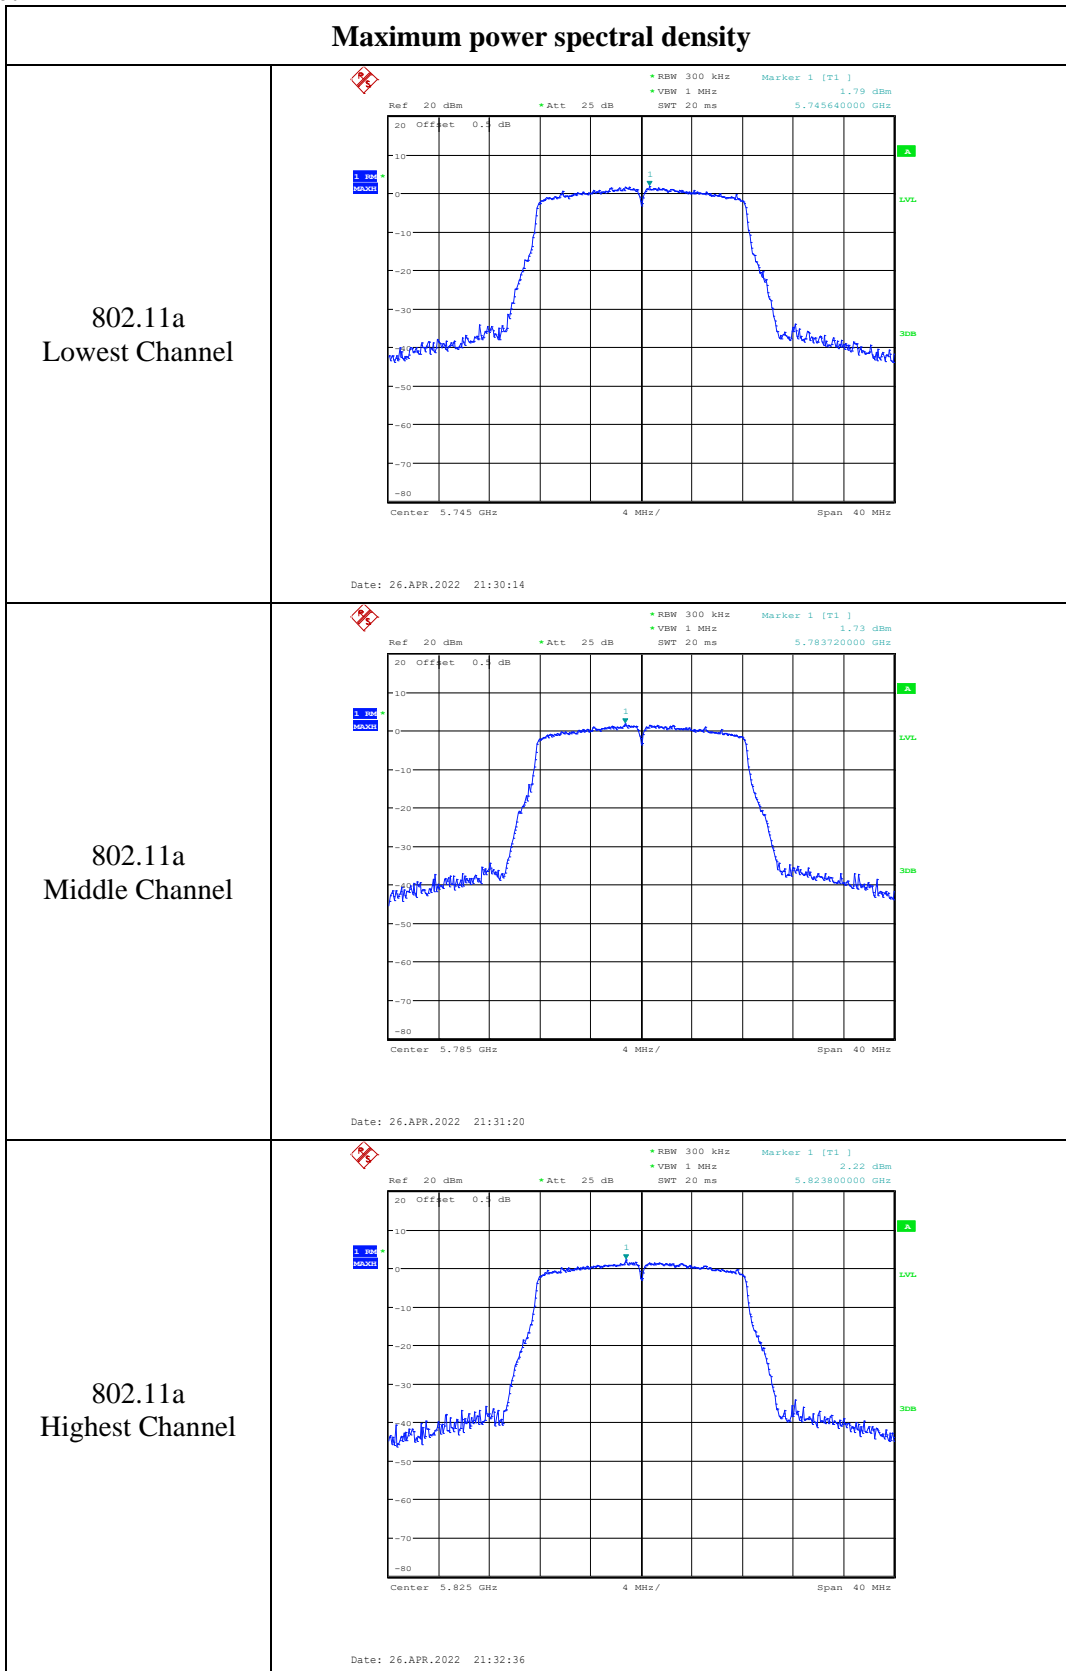


### Maximum power spectral density

802.11n ht20  
Lowest Channel

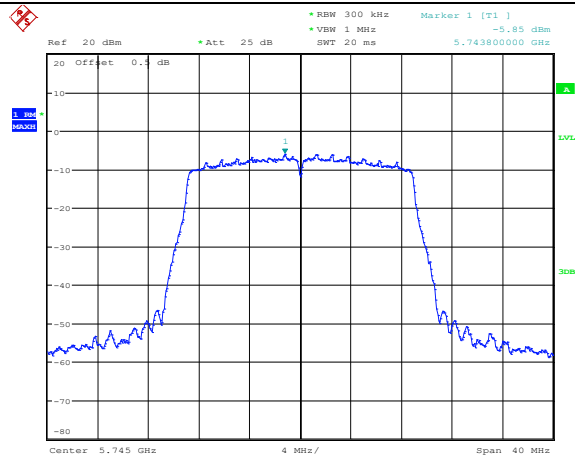


Date: 26.APR.2022 21:46:50

802.11n ht20  
Middle Channel

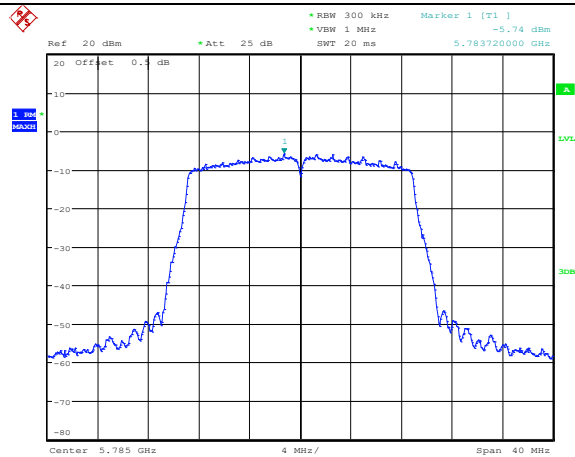

Date: 26.APR.2022 21:47:50

802.11n ht20  
Highest Channel

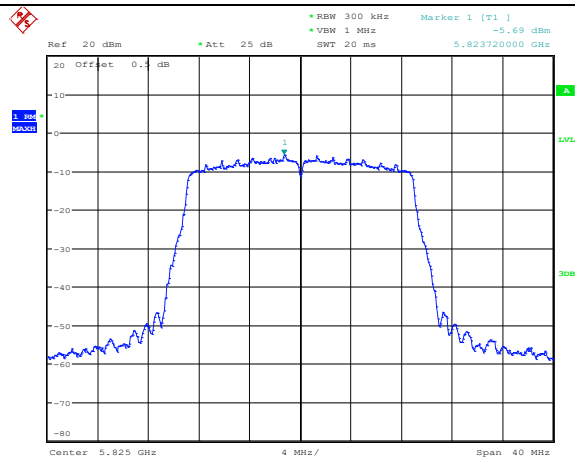


Date: 26.APR.2022 21:45:48

### Maximum power spectral density


<p>802.11n ht40 Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Marker 1 [T1] -8.10 dBm * VBW 1 MHz SWT 20 ms 5.75260000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 26.APR.2022 21:49:32</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Marker 1 [T1] -8.32 dBm * VBW 1 MHz SWT 20 ms 5.79560000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.795 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 26.APR.2022 21:50:37</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Marker 1 [T1] -10.83 dBm * VBW 1 MHz SWT 20 ms 5.807640000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.775 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 26.APR.2022 22:22:07</p>

Chain 1:

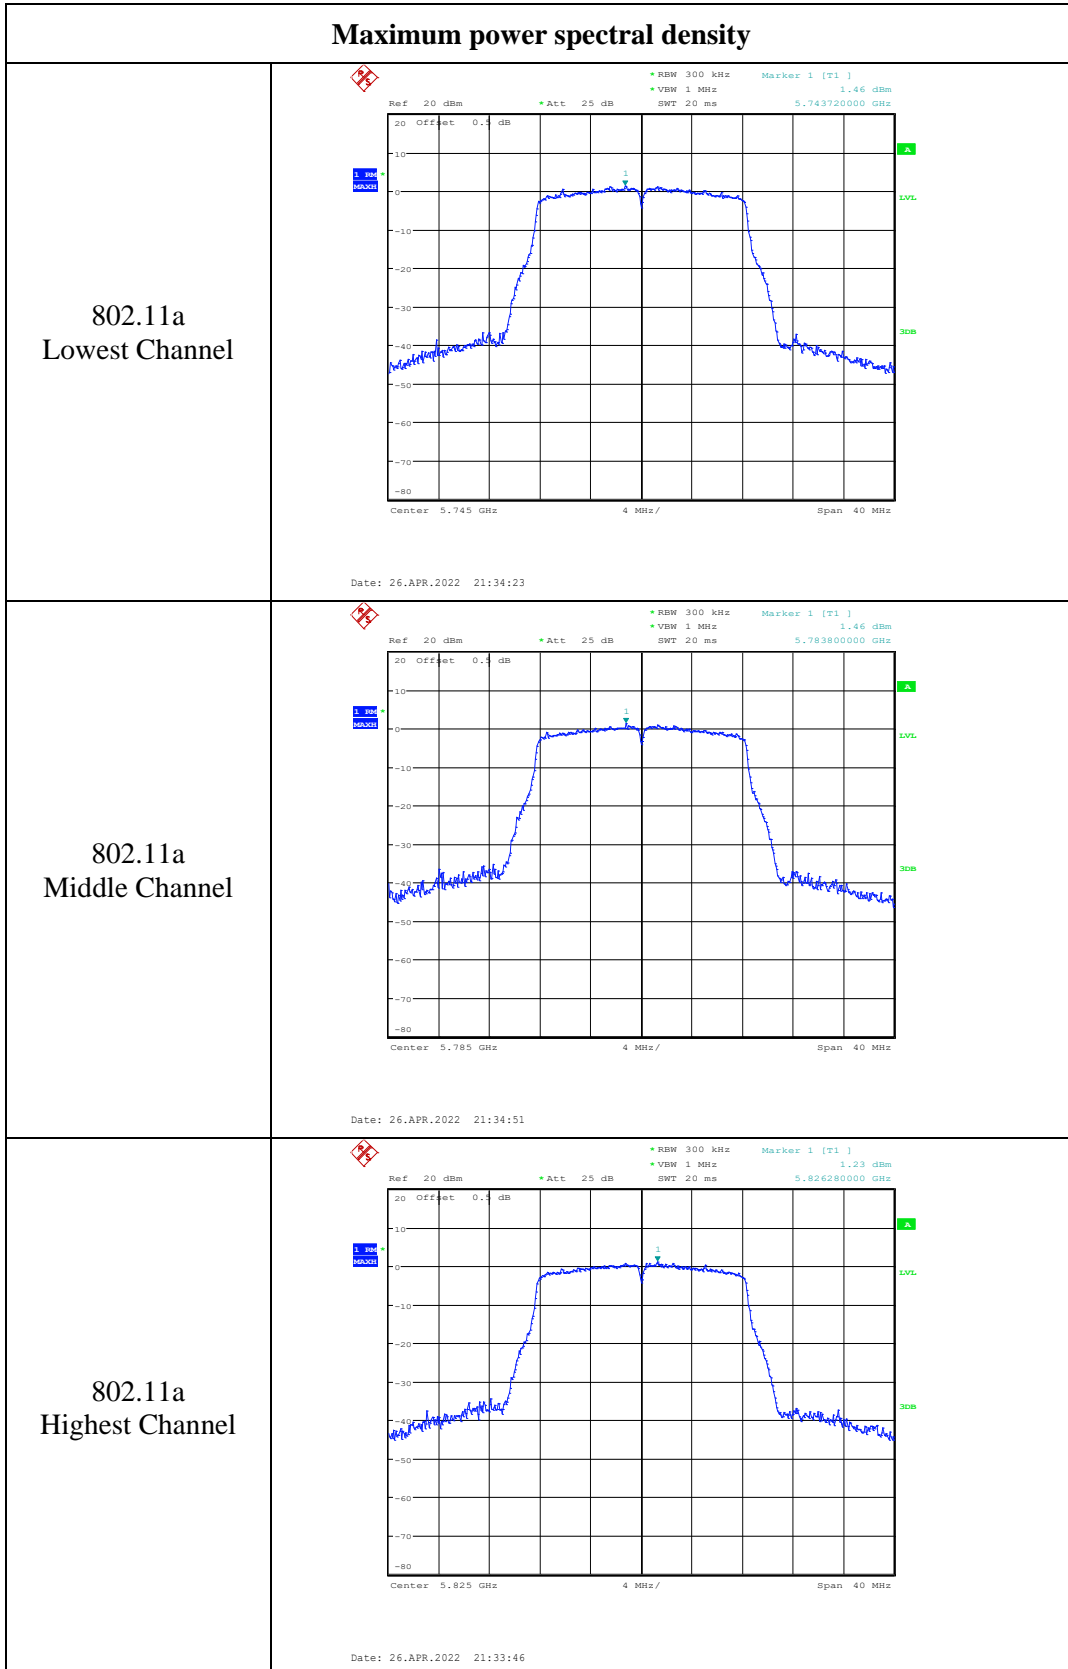


### Maximum power spectral density

802.11n ht20  
Lowest Channel

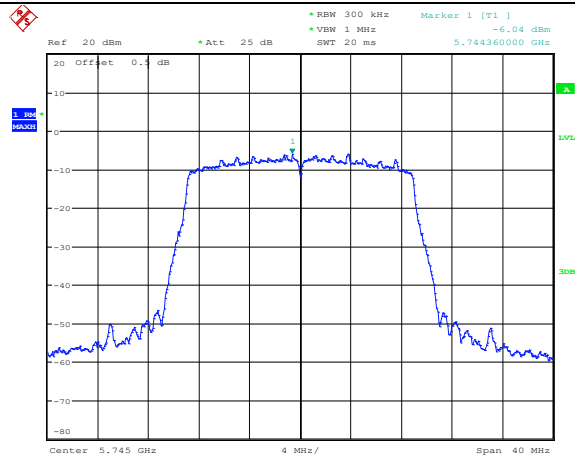


Date: 26.APR.2022 21:43:33

802.11n ht20  
Middle Channel

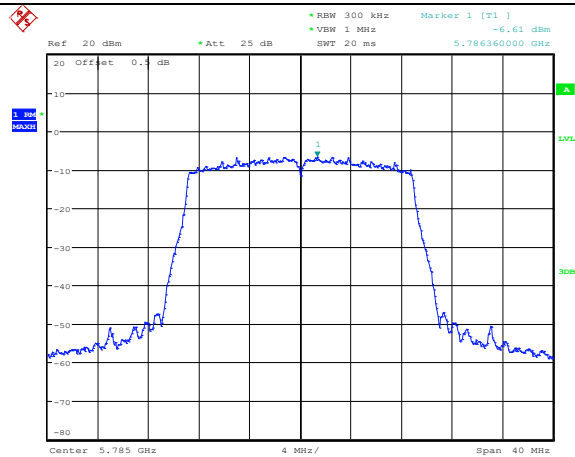

Date: 26.APR.2022 21:43:55

802.11n ht20  
Highest Channel

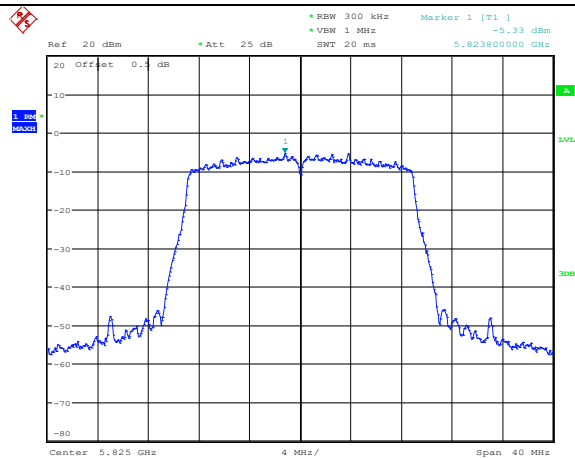


Date: 26.APR.2022 21:44:35

### Maximum power spectral density

<p>802.11n ht40 Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Marker 1 [T1] -8.25 dBm * VBW 1 MHz * SWT 20 ms 5.757560000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 26.APR.2022 21:51:42</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Marker 1 [T1] -7.15 dBm * VBW 1 MHz * SWT 20 ms 5.792600000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.795 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 26.APR.2022 21:51:15</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Marker 1 [T1] -10.07 dBm * VBW 1 MHz * SWT 20 ms 5.750040000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.775 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 26.APR.2022 22:26:44</p>


Chain 2:

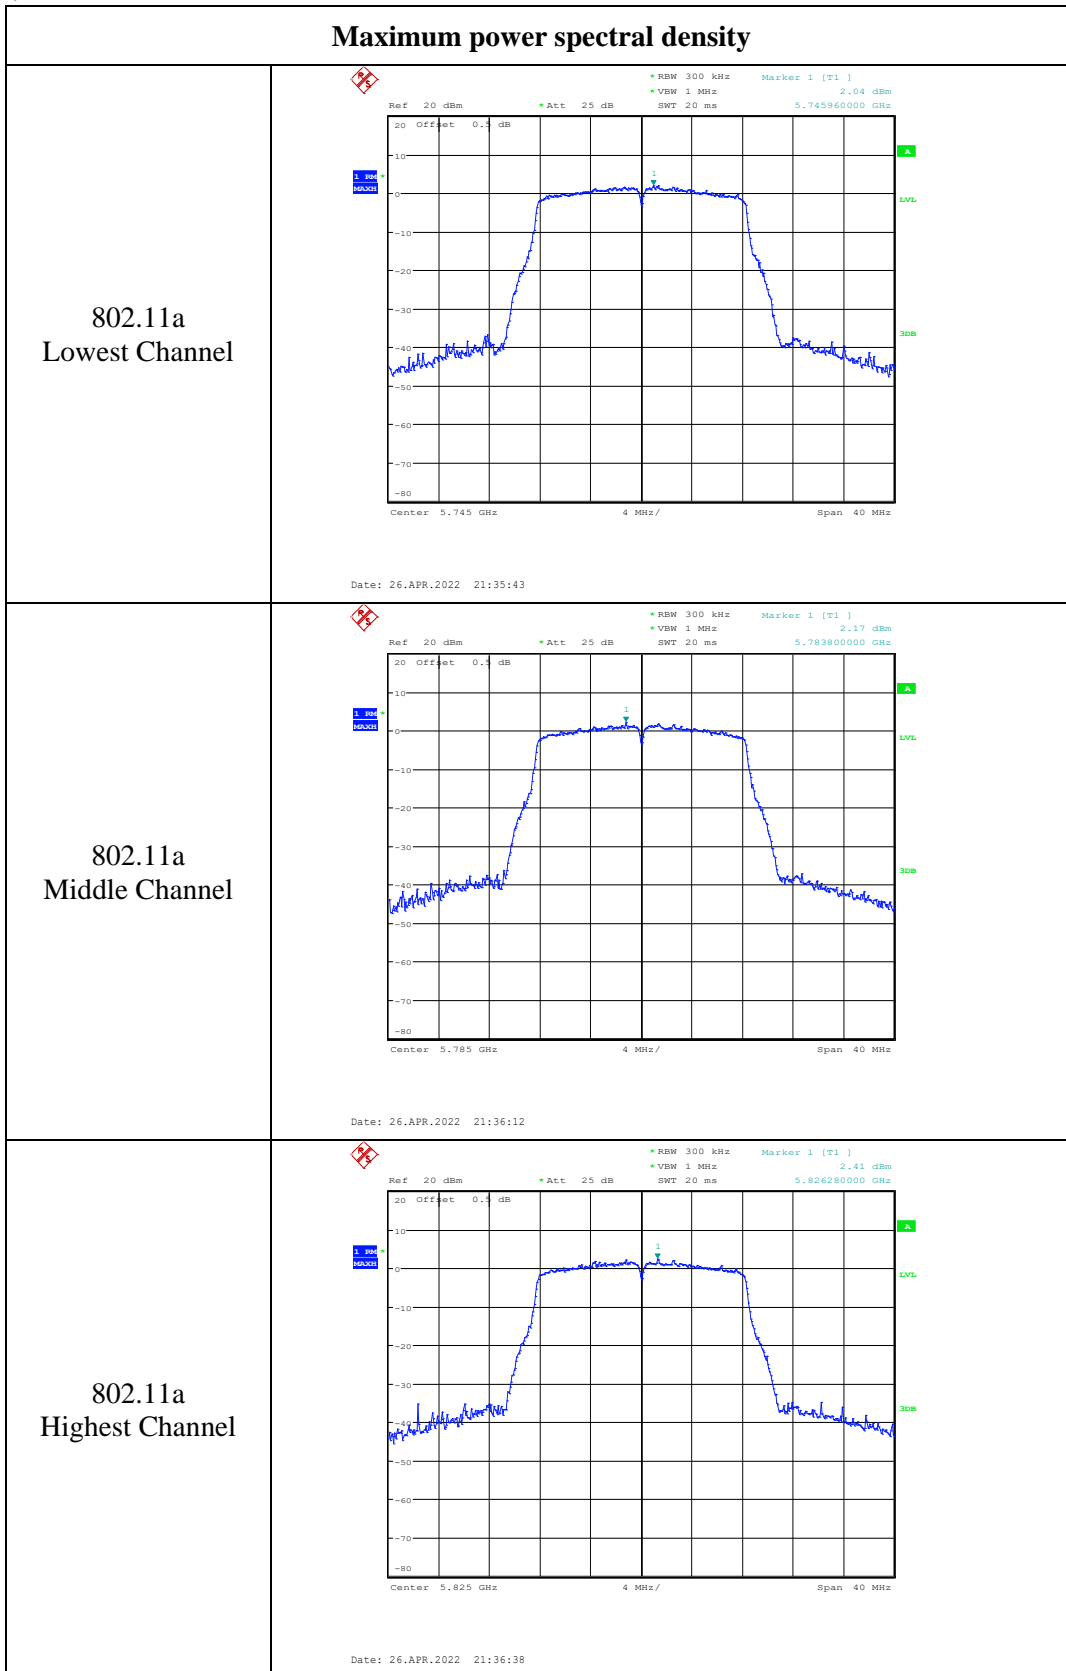




### Maximum power spectral density

802.11n ht20  
Lowest Channel

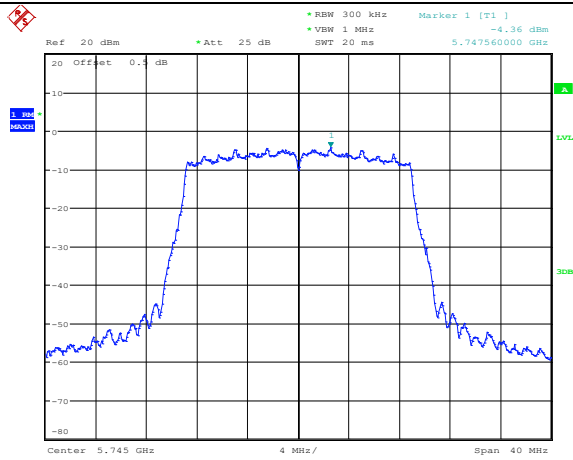


Date: 26.APR.2022 21:42:44

802.11n ht20  
Middle Channel

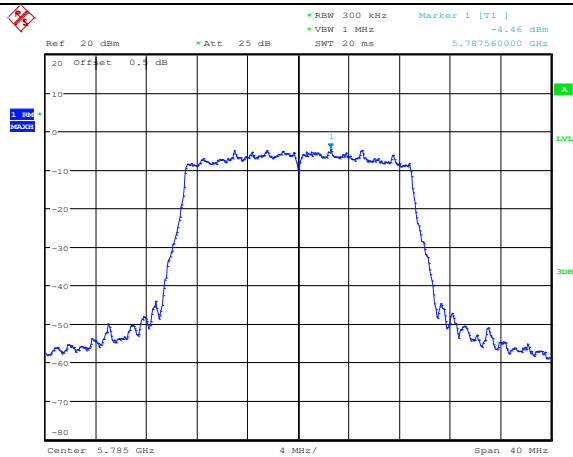

Date: 26.APR.2022 21:41:48

802.11n ht20  
Highest Channel

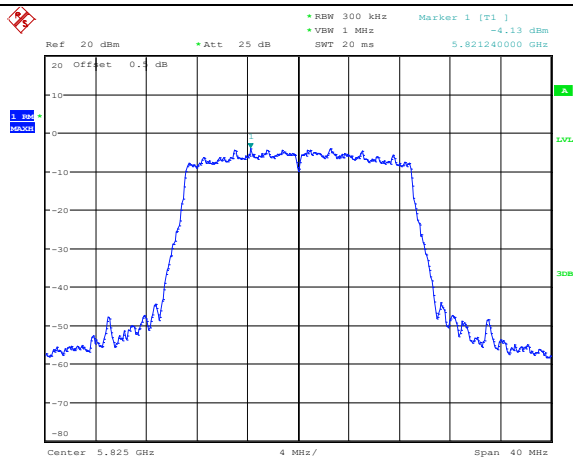


Date: 26.APR.2022 21:42:17




### Maximum power spectral density

<p>802.11n ht40 Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Marker 1 [T1] -6.70 dBm * VBW 1 MHz SWT 20 ms 5.757560000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 26.APR.2022 21:52:20</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Marker 1 [T1] -7.08 dBm * VBW 1 MHz SWT 20 ms 5.792600000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.795 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 26.APR.2022 21:52:41</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Marker 1 [T1] -9.21 dBm * VBW 1 MHz SWT 20 ms 5.750040000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.775 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 26.APR.2022 22:26:18</p>

Chain 3

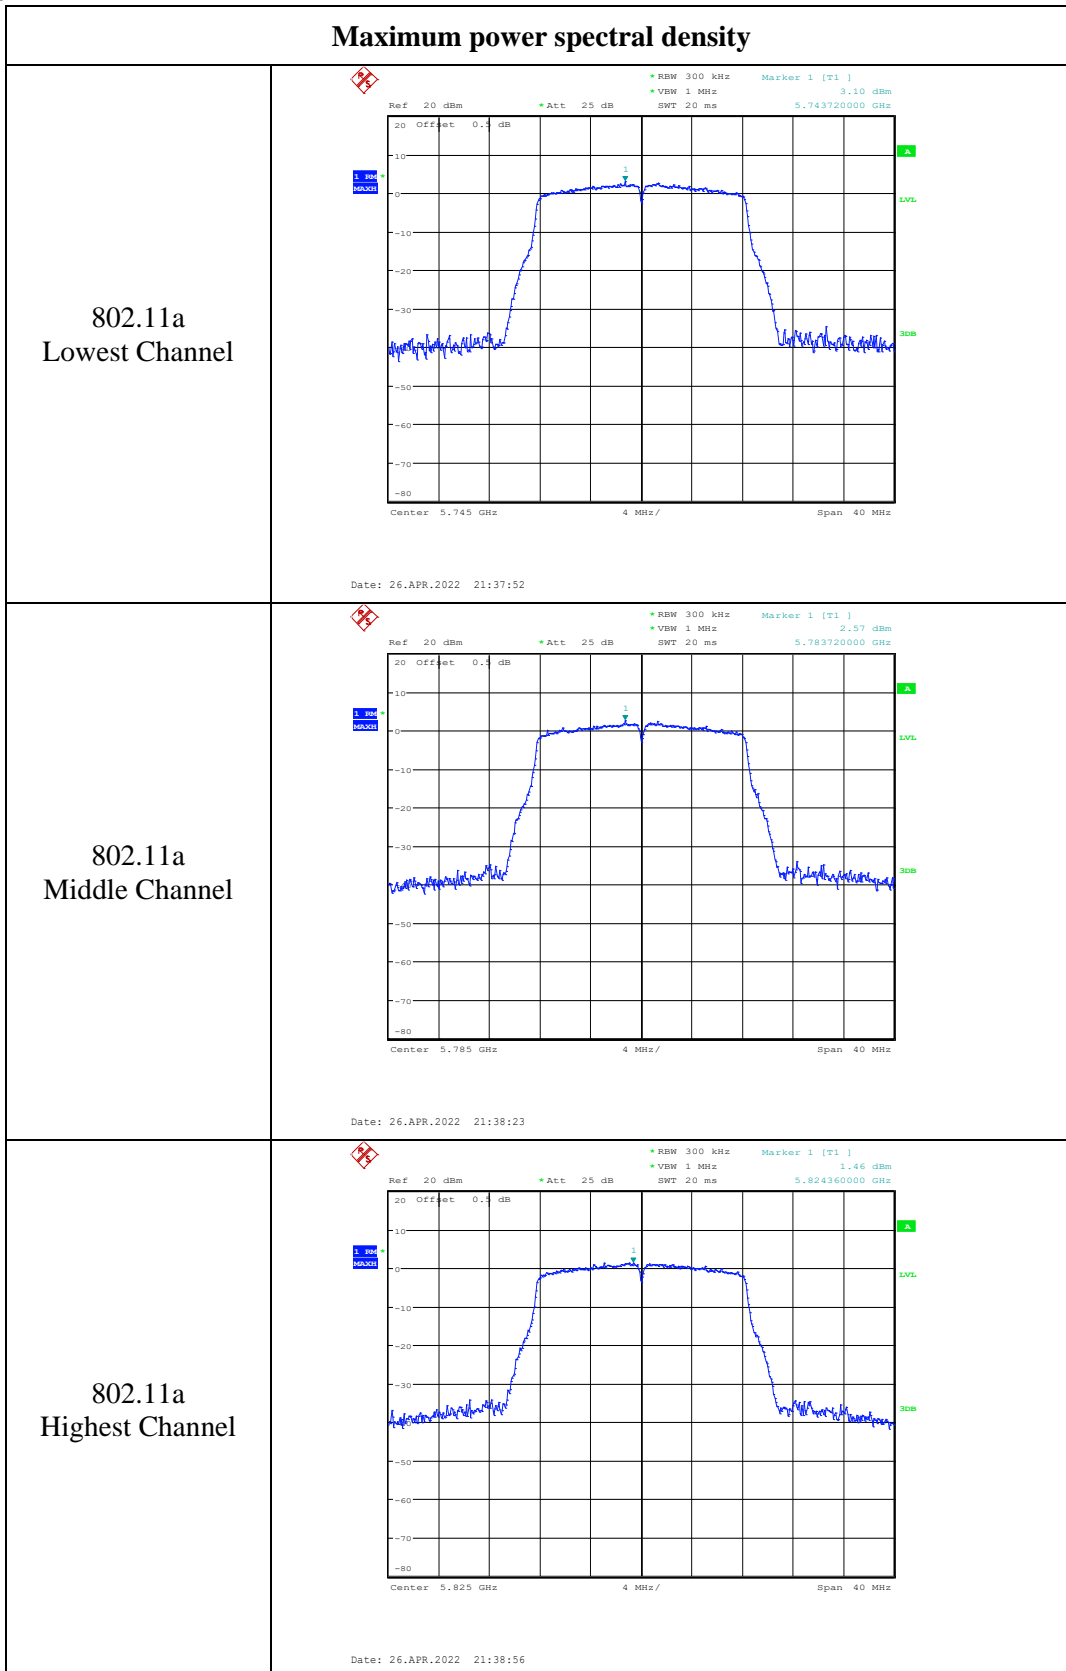

### Maximum power spectral density
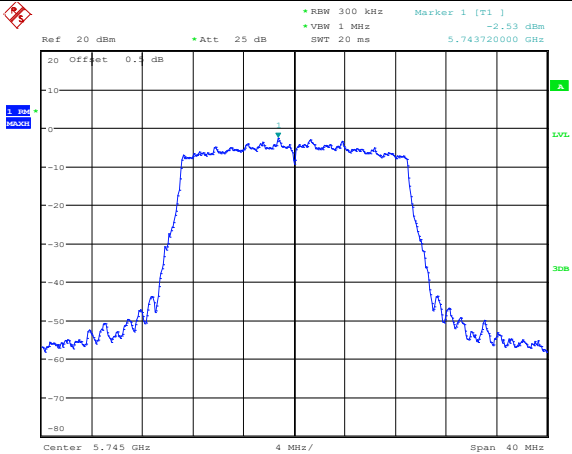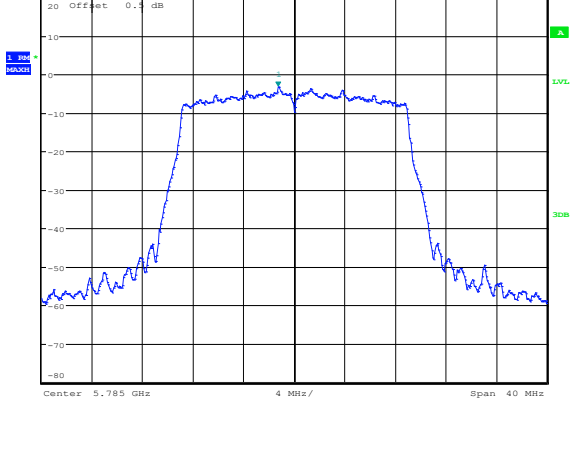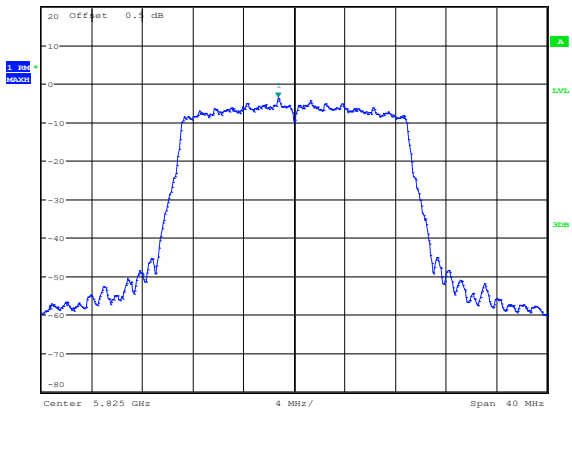
<p>802.11n ht20 Lowest Channel</p>	 <p>Ref 20 dBm * Att 25 dB * RBW 300 kHz * VBW 1 MHz * SWT 20 ms Marker 1 [T1] -2.53 dBm 5.743720000 GHz</p> <p>Offset 0.4 dB</p> <p>Center 5.745 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 26.APR.2022 21:40:27</p>
<p>802.11n ht20 Middle Channel</p>	 <p>Ref 20 dBm * Att 25 dB * RBW 300 kHz * VBW 1 MHz * SWT 20 ms Marker 1 [T1] -3.12 dBm 5.783720000 GHz</p> <p>Offset 0.4 dB</p> <p>Center 5.785 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 26.APR.2022 21:41:04</p>
<p>802.11n ht20 Highest Channel</p>	 <p>Ref 20 dBm * Att 25 dB * RBW 300 kHz * VBW 1 MHz * SWT 20 ms Marker 1 [T1] -3.68 dBm 5.823720000 GHz</p> <p>Offset 0.4 dB</p> <p>Center 5.825 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 26.APR.2022 21:39:57</p>


### Maximum power spectral density

<p>802.11n ht40 Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Marker 1 [T1] -6.09 dBm * VBW 1 MHz SWT 20 ms 5.751320000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 26.APR.2022 21:53:35</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Marker 1 [T1] -6.57 dBm * VBW 1 MHz SWT 20 ms 5.792800000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.795 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 26.APR.2022 21:53:09</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Marker 1 [T1] -8.82 dBm * VBW 1 MHz SWT 20 ms 5.763800000 GHz</p> <p>Offset 0.1 dB</p> <p>Center 5.775 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 26.APR.2022 22:25:51</p>


**802.11ax Modes:  
5150-5250MHz:Chain 0:**

**Maximum power spectral density**

802.11ax hew20  
RU Config.  
26/0  
Lowest Channel

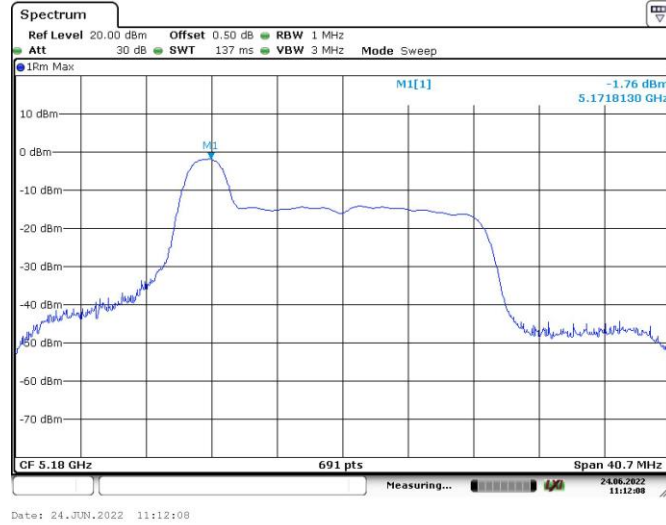

802.11ax hew20  
RU Config.  
26/0  
Middle Channel

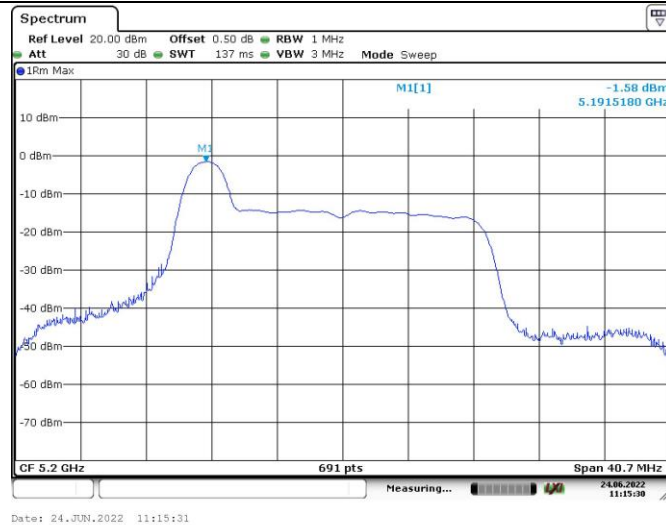

802.11ax hew20  
RU Config.  
26/0  
Highest Channel

