

Test Report No.50278819 001

Appendix D: Radiated and Mains Spurious Emission Data

(File: 50278819 001AppendixD)


Contents

Spurious Emissions, Band Edges	2
Spurious Emissions, TX Mode, 1-18G.....	56
Spurious Emissions, TX Mode, 18G-40G.....	92
Spurious Emissions, TX Mode, 30M-1G	128
Spurious Emissions, TX Mode, 9K-30M	130
Spurious Emissions, AC Mains	132

Spurious Emissions, Band Edges




TUV Rheinland Taiwan Ltd.
 11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 Fax:+886-2528-0018

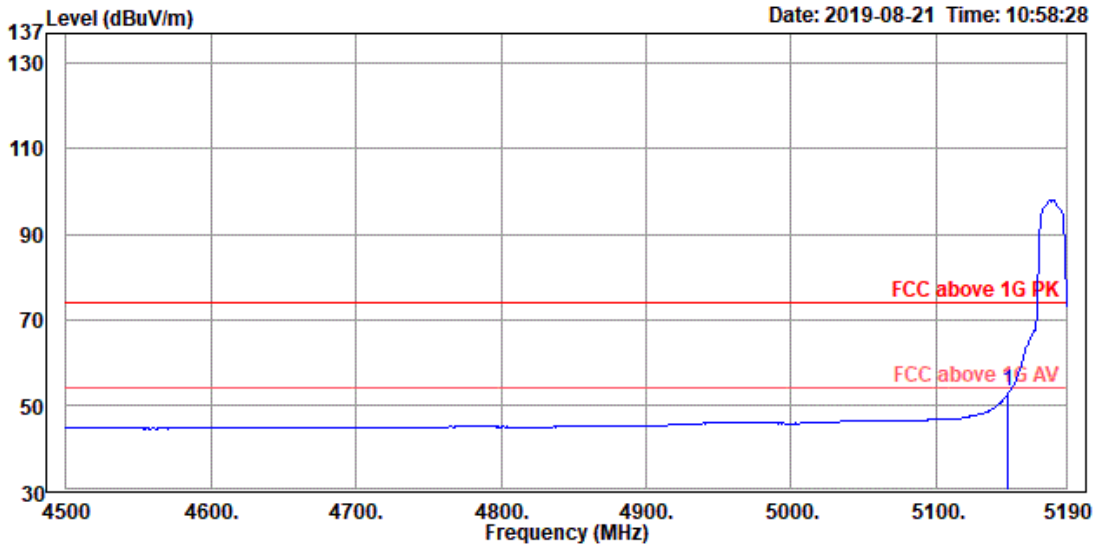


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD4705H-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : A-TX-5180
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	54.94	-1.93	53.01	54.00	-0.99	100	62	Average

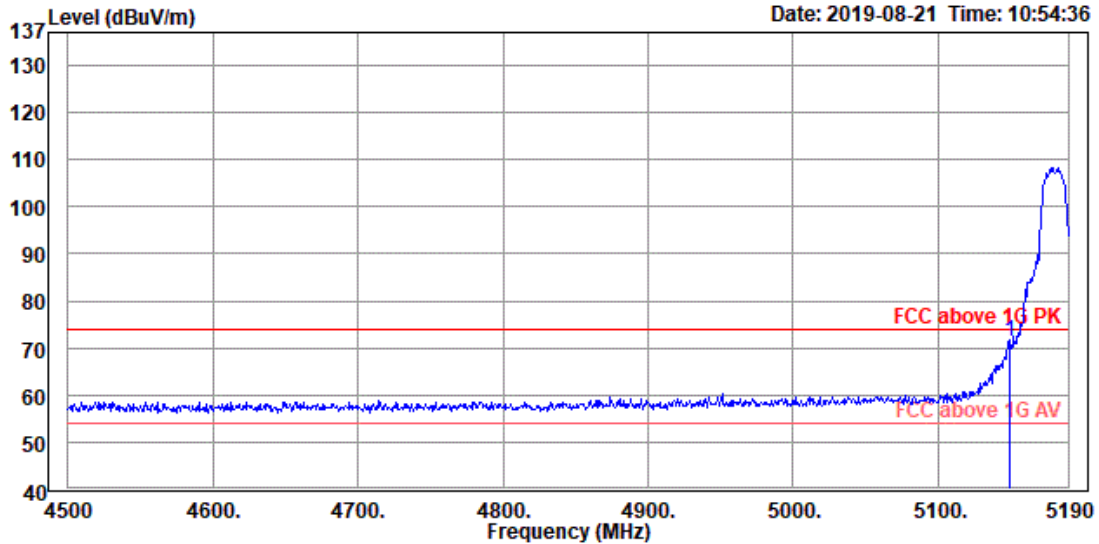


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : A-TX-5180
 Memo : Z

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	5150.000	73.23	-1.93	71.30	74.00	-2.70	100	62	Peak	

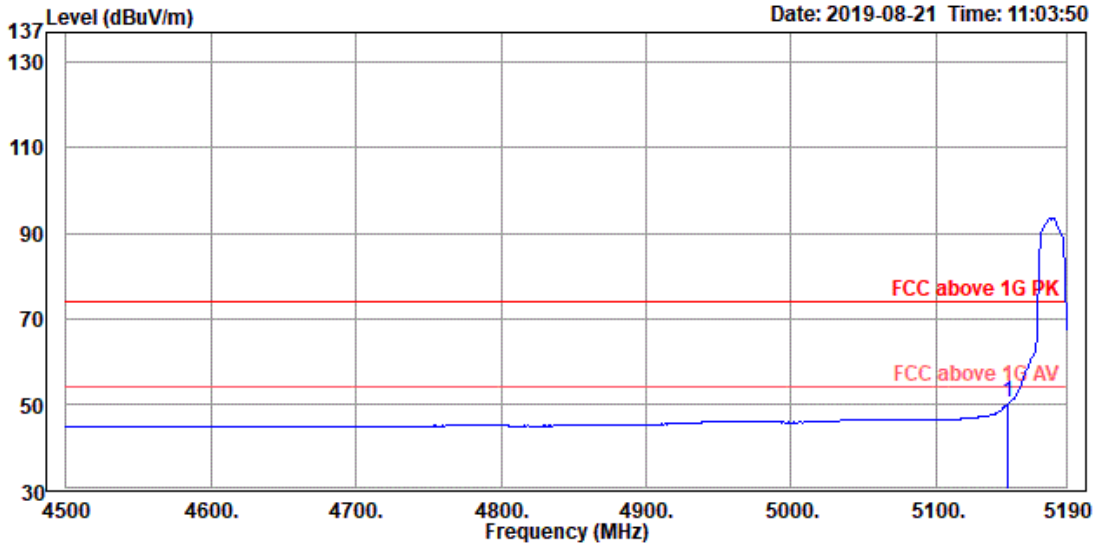


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : A-TX-5180
 Memo : Z

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	5150.000	52.20	-1.93	50.27	54.00	-3.73	100	218	Average	

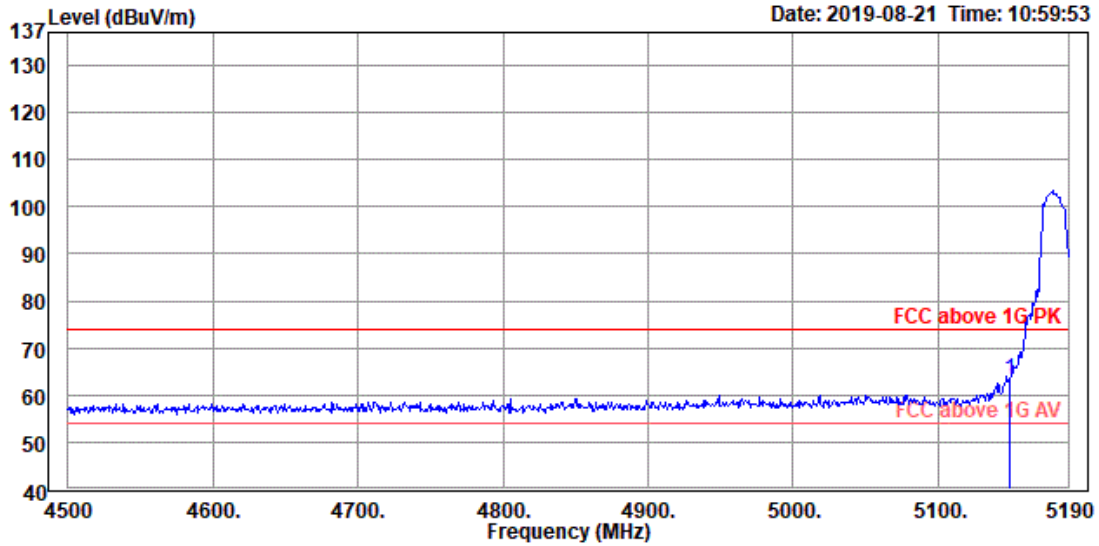


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : A-TX-5180
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	65.34	-1.93	63.41	74.00	-10.59	100	218	Peak

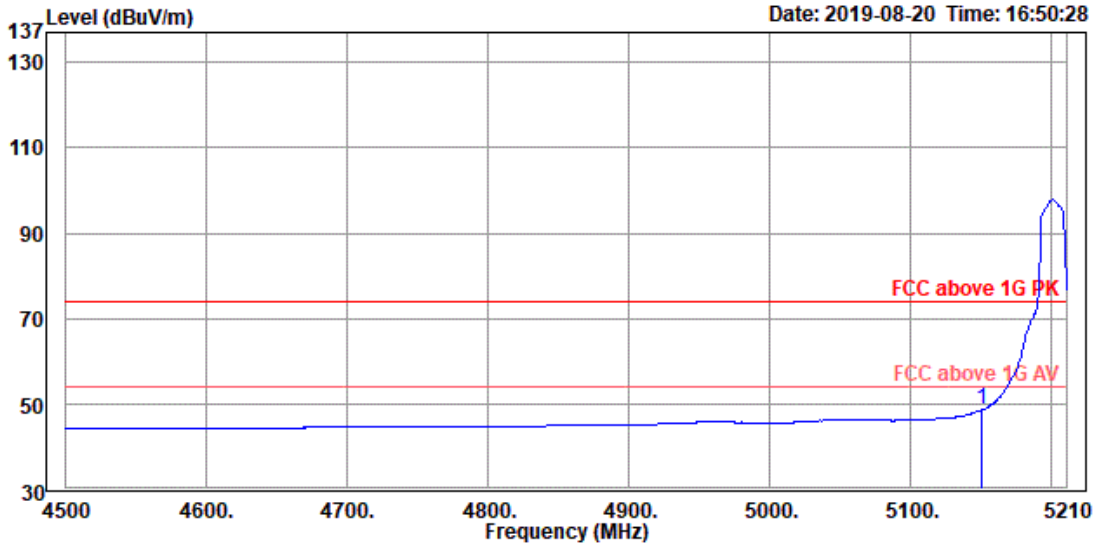


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5200
 Memo : Z

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	5150.000	50.45	-1.93	48.52	54.00	-5.48	100	354	Average	

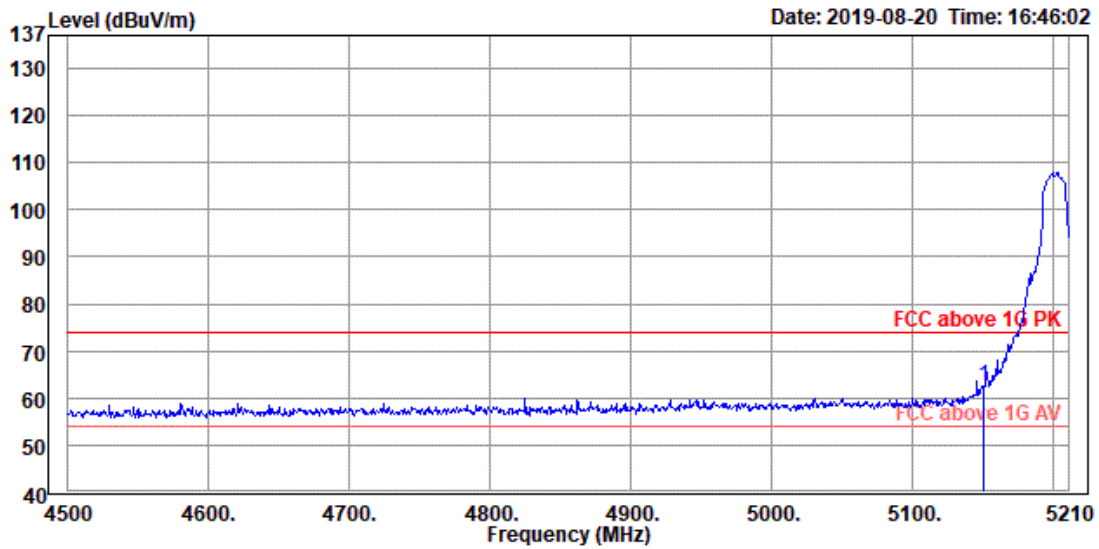


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5200
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	64.42	-1.93	62.49	74.00	-11.51	100	354	Peak

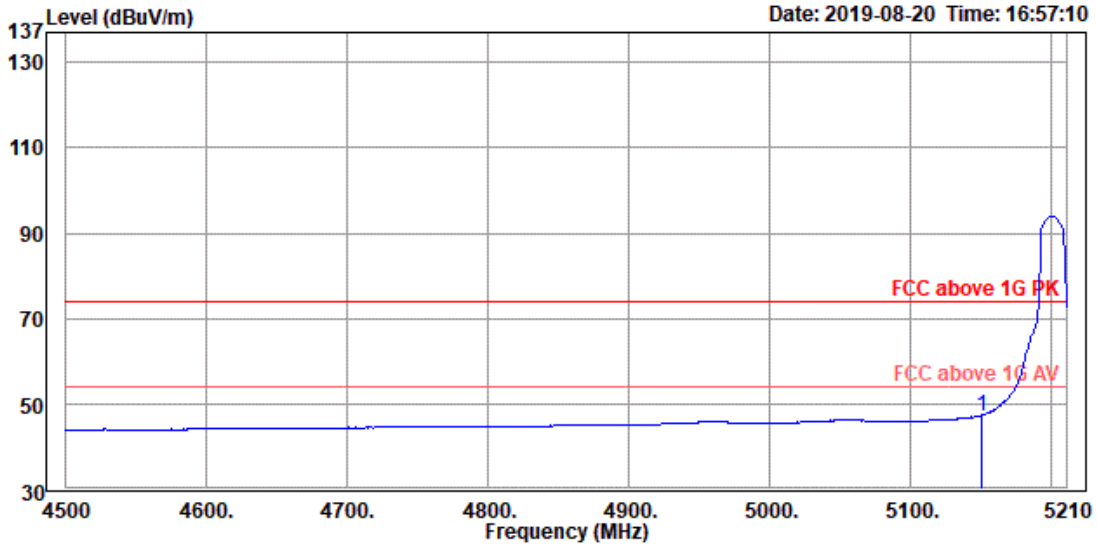


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5200
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	49.11	-1.93	47.18	54.00	-6.82	100	212	Average

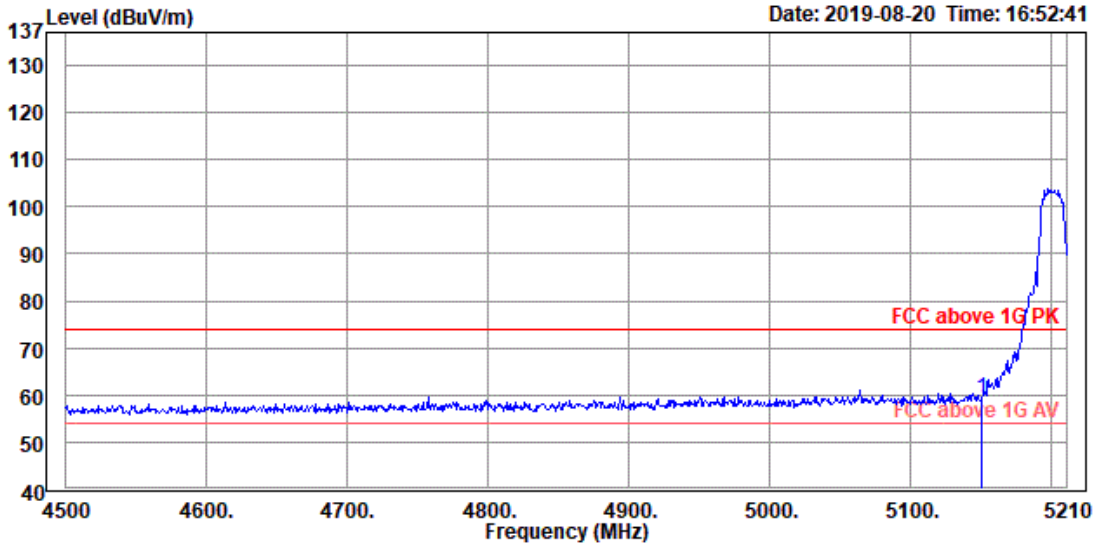


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5200
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	60.94	-1.93	59.01	74.00	-14.99	100	212	Peak

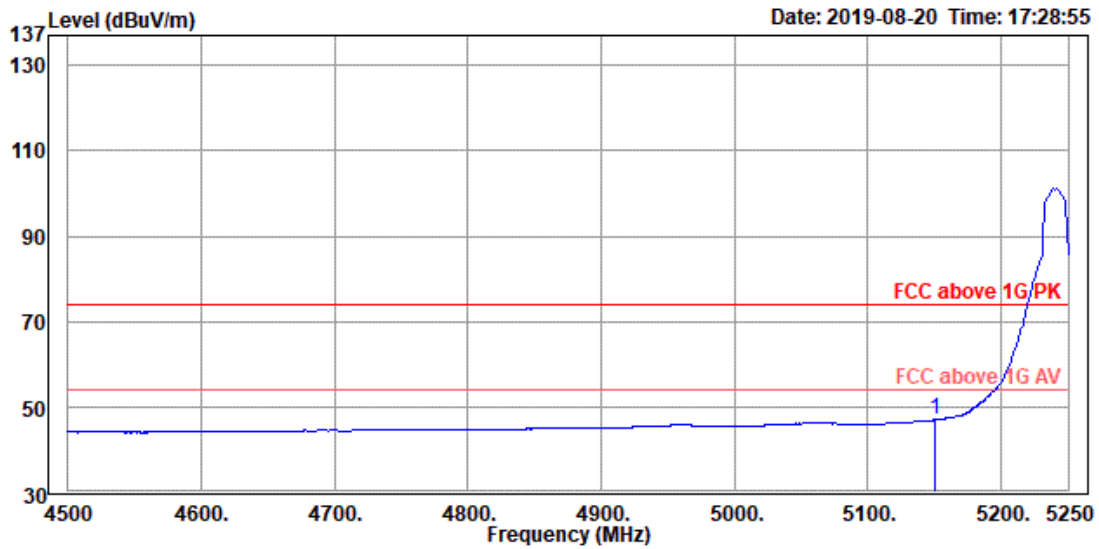


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5240
 Memo : Z

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	5150.000	48.83	-1.93	46.90	54.00	-7.10	100	191	Average	

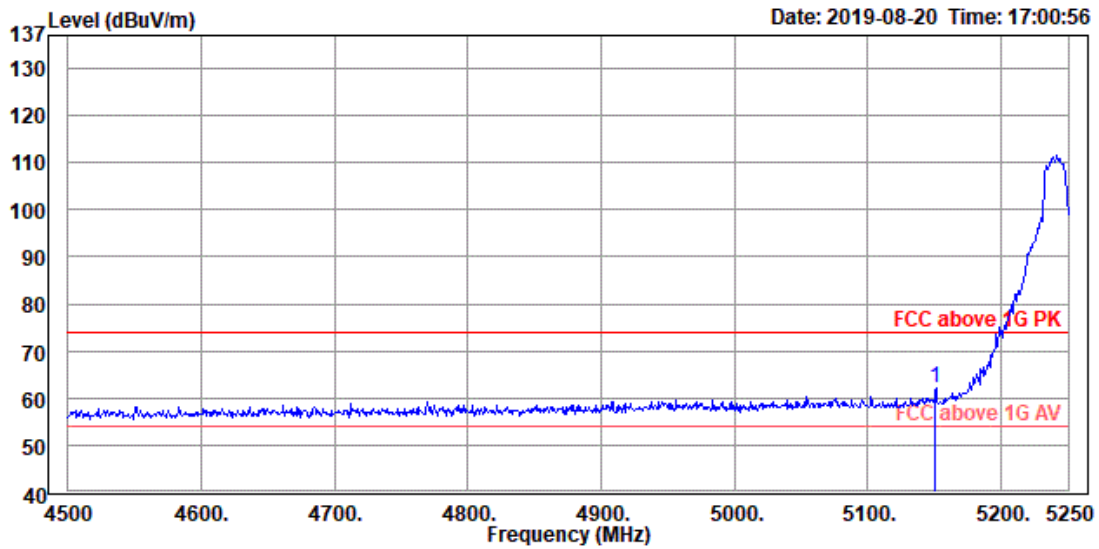


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5240
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	63.95	-1.93	62.02	74.00	-11.98	100	191	Peak

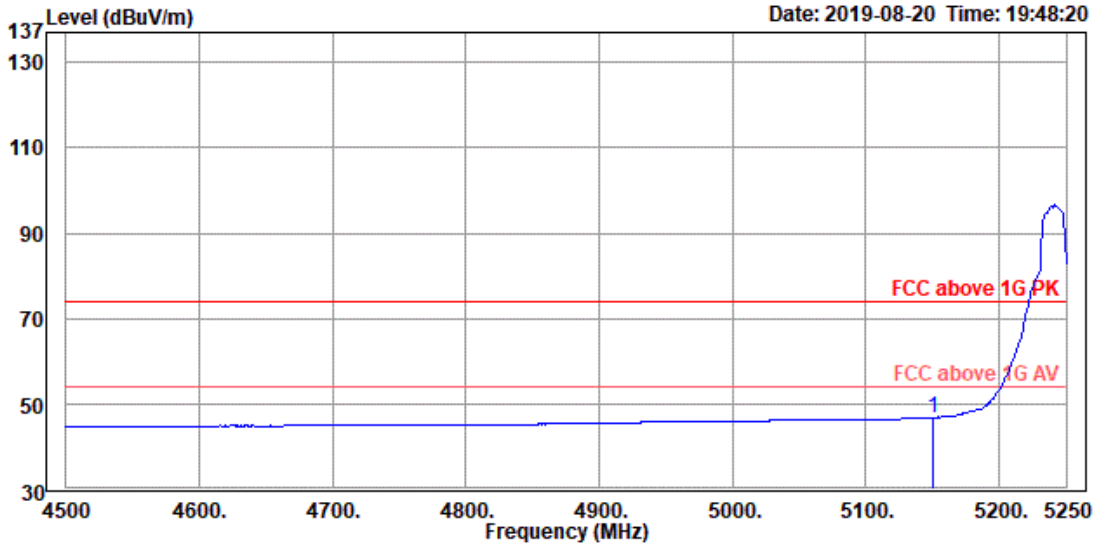


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5240
 Memo : Z

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	5150.000	48.42	-1.93	46.49	54.00	-7.51	100	238	Average	

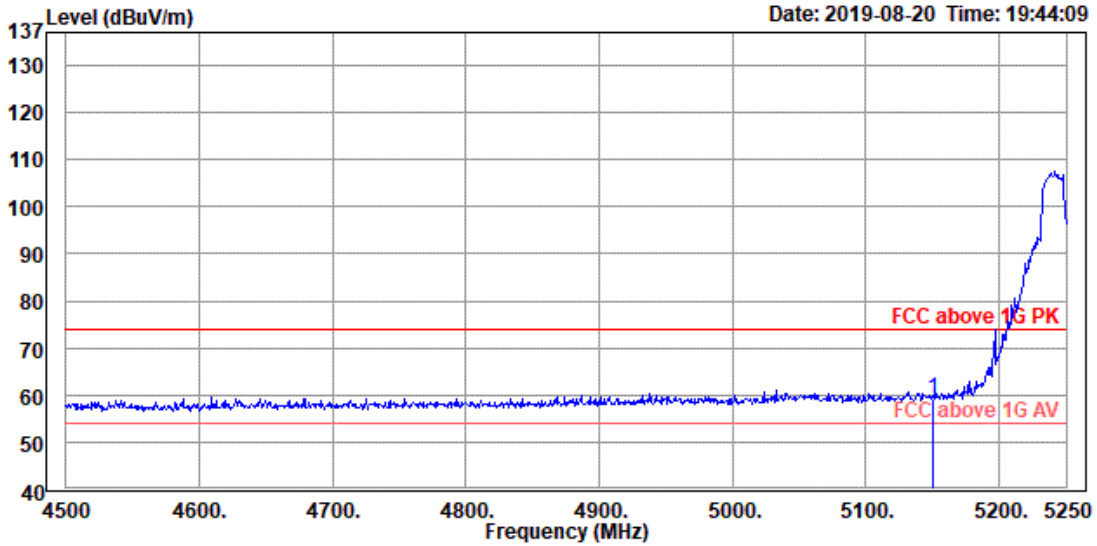


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5240
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	61.24	-1.93	59.31	74.00	-14.69	100	238	Peak

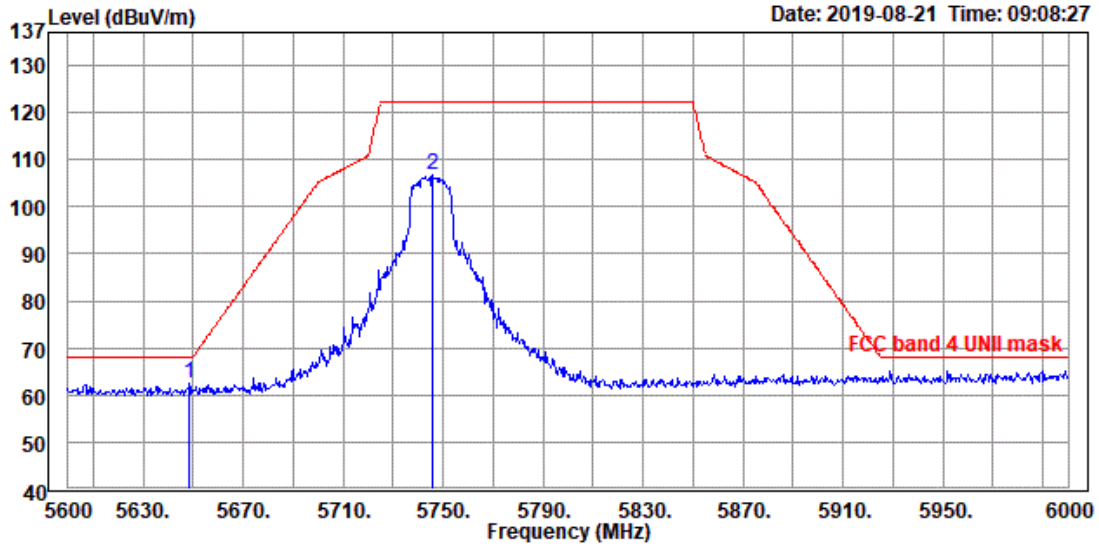


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m Horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5745
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5648.400	62.34	-0.01	62.33	68.20	-5.87	100	76 Peak
2	5745.600	106.22	0.60	106.82	122.20	-15.38	100	76 Peak

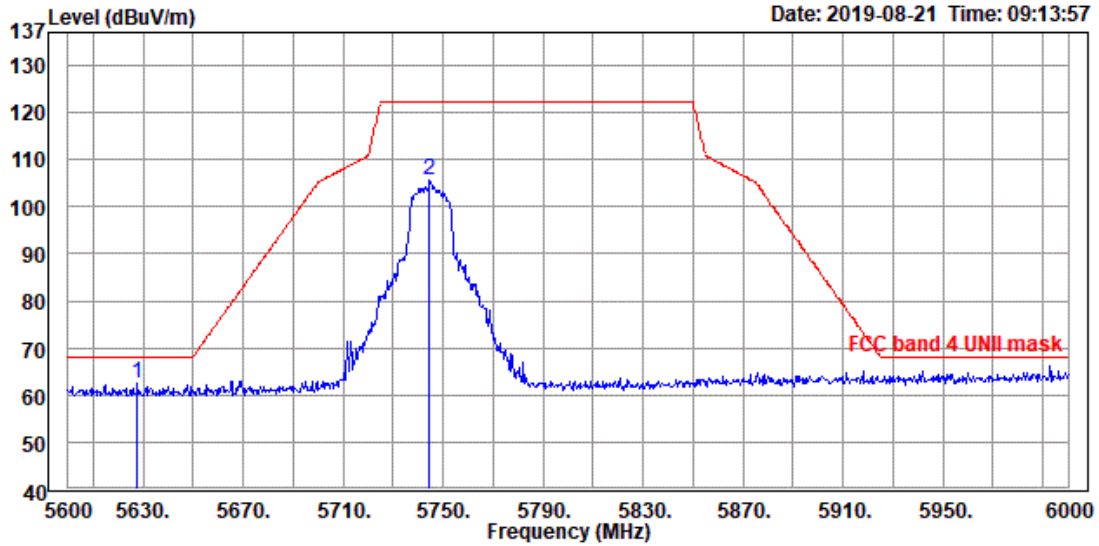


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5745
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5627.600	62.66	-0.08	62.58	68.20	-5.62	100	266 Peak
2	5744.400	104.95	0.59	105.54	122.20	-16.66	100	266 Peak

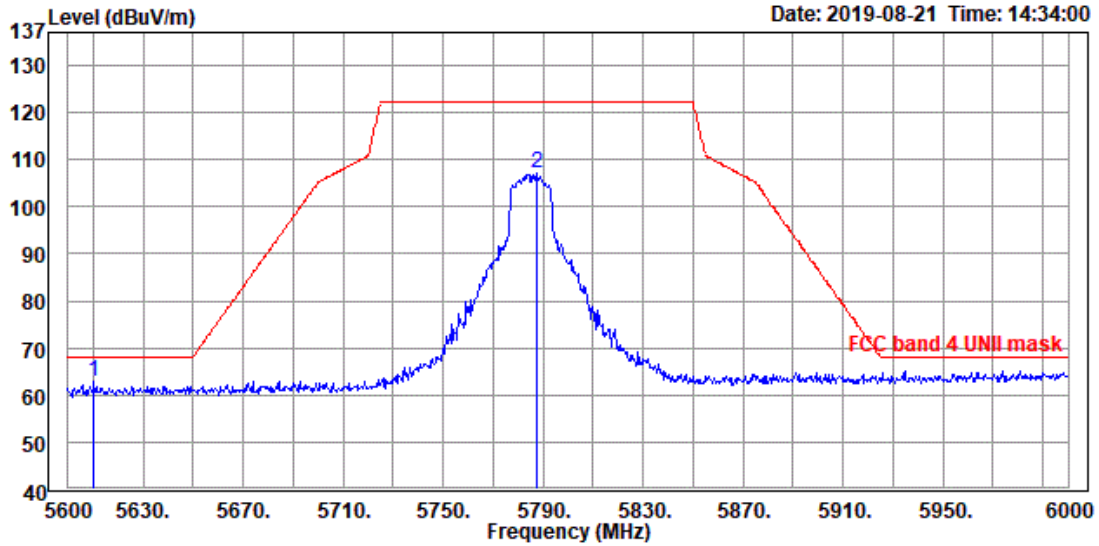


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5785
 Memo : Z

	Read	Limit	Over	APos	TPos	Remark	Note	
Freq	Level	Factor	Level	Line	Limit			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5610.400	62.98	-0.13	62.85	68.20	-5.35	100	308 Peak
2	5787.200	106.32	0.88	107.20	122.20	-15.00	100	308 Peak

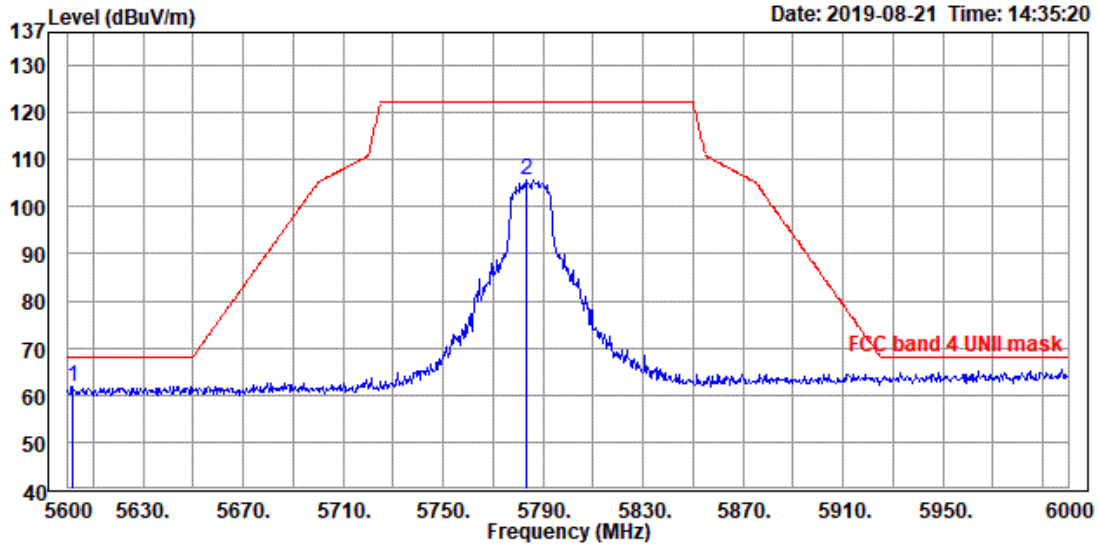


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m Vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5785
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5601.600	61.92	-0.15	61.77	68.20	-6.43	100	0 Peak
2	5783.600	104.89	0.87	105.76	122.20	-16.44	100	0 Peak

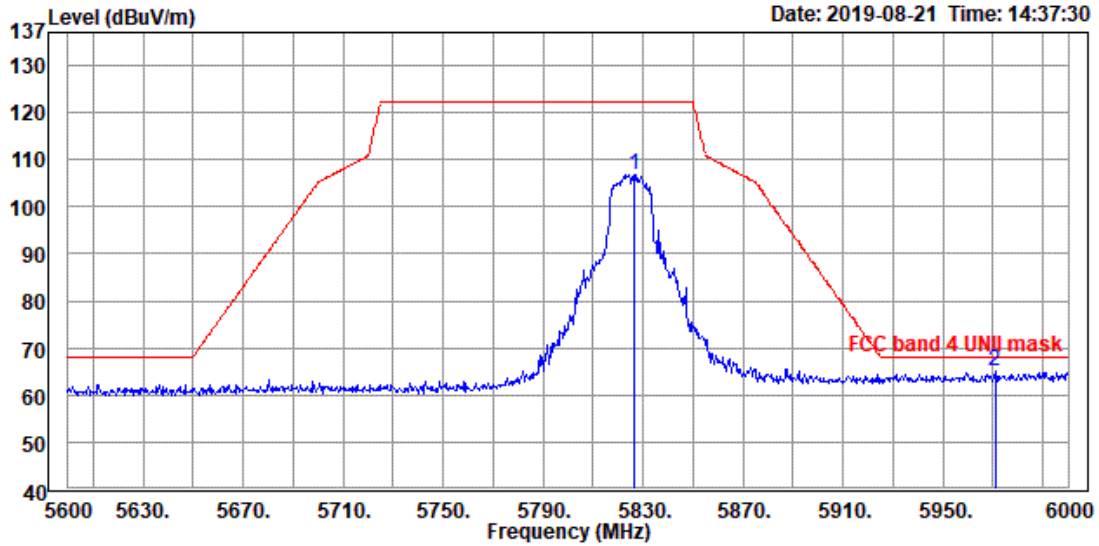


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5825
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5826.400	105.66	1.16	106.82	122.20	-15.38	100	244 Peak
2	5970.800	63.03	2.20	65.23	68.20	-2.97	100	244 Peak

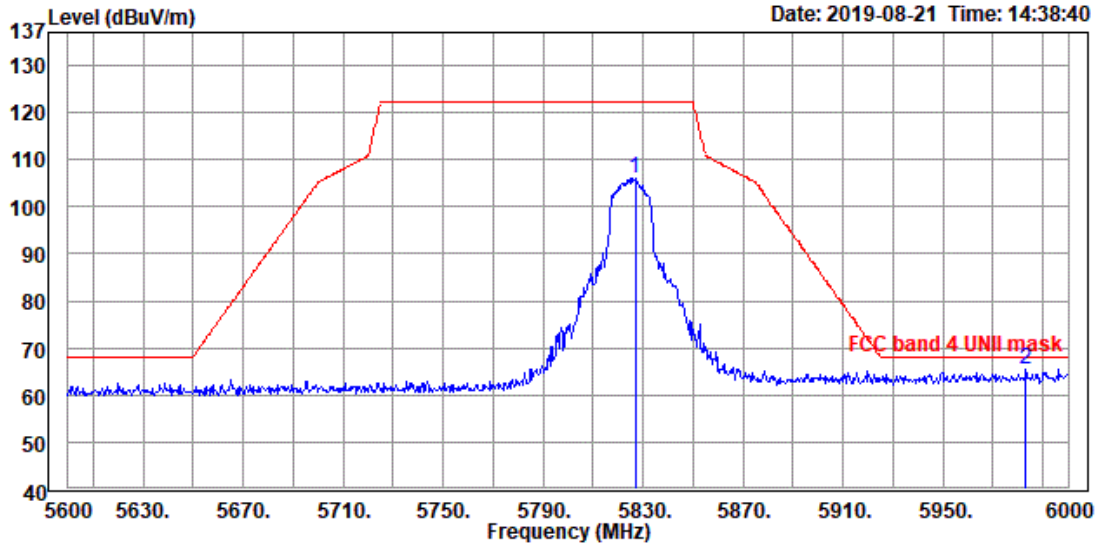


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m Vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5825
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5826.800	104.97	1.17	106.14	122.20	-16.06	100	153 Peak
2	5983.200	63.06	2.30	65.36	68.20	-2.84	100	153 Peak

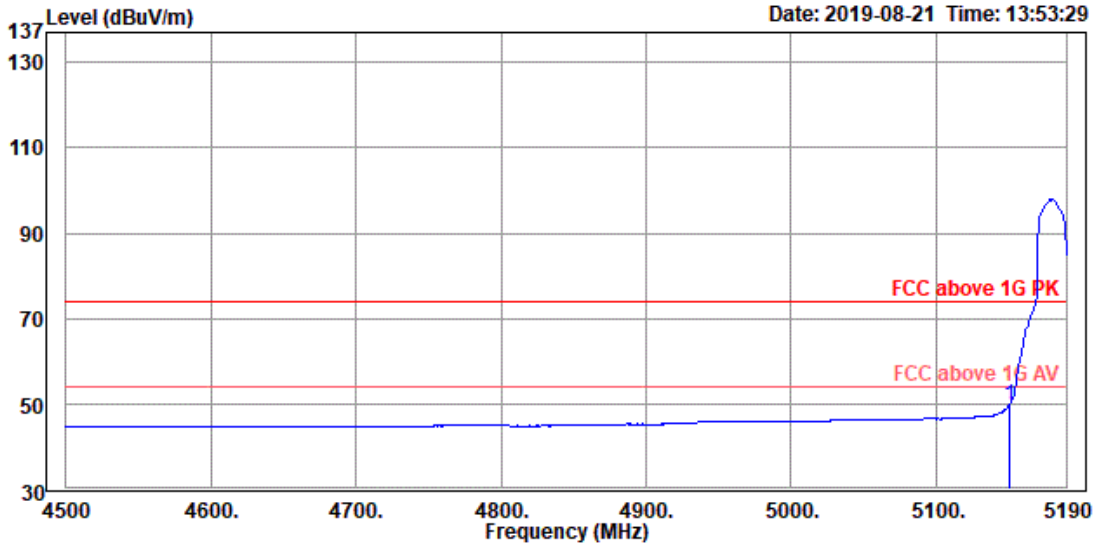


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : AC20-TX-5180
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.670	51.57	-1.93	49.64	54.00	-4.36	100	198	Average

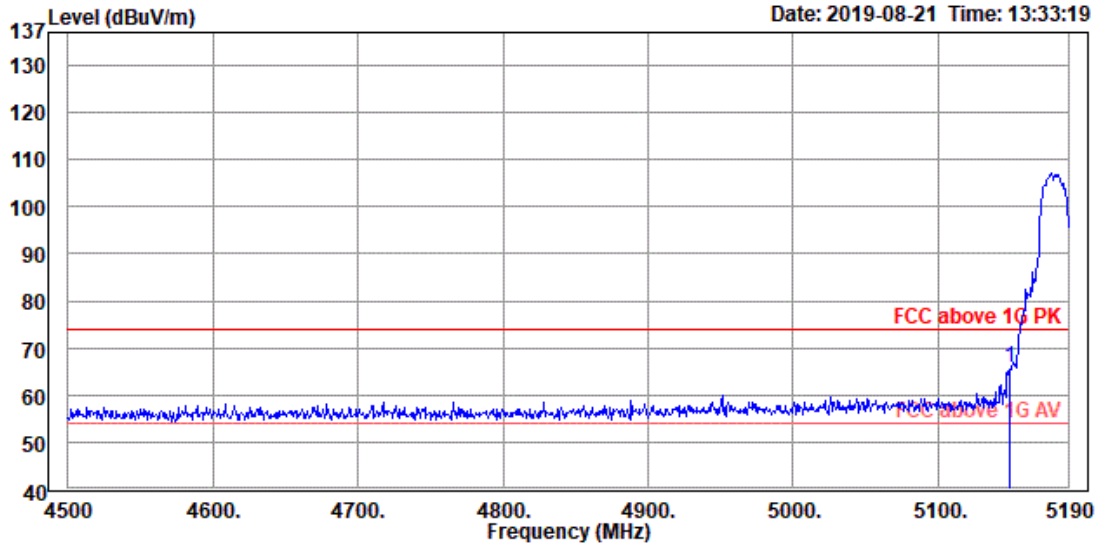


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : AC20-TX-5180
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	67.80	-1.93	65.87	74.00	-8.13	100	198 Peak	

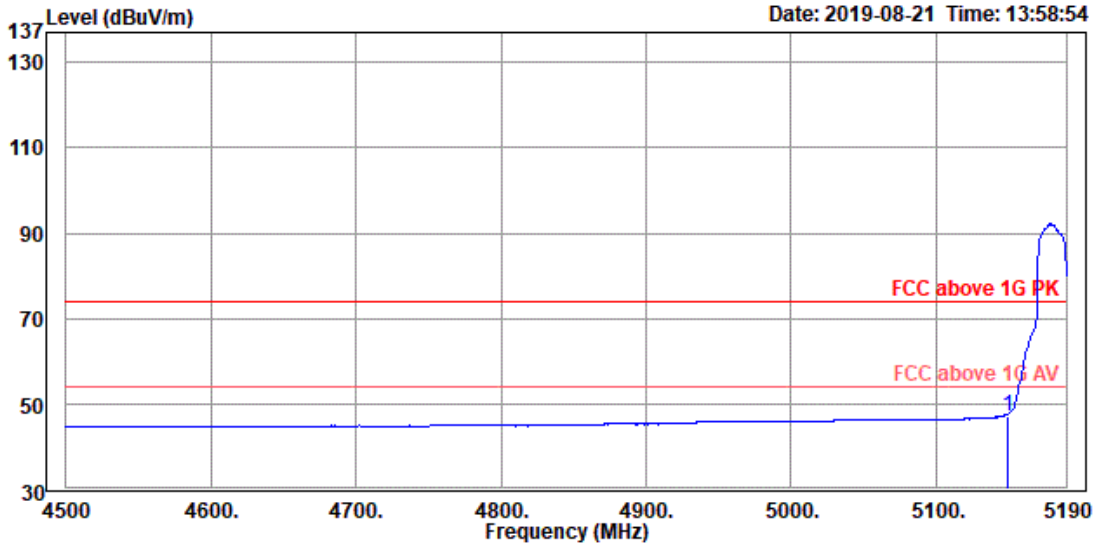


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : AC20-TX-5180
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	48.89	-1.93	46.96	54.00	-7.04	100	205	Average

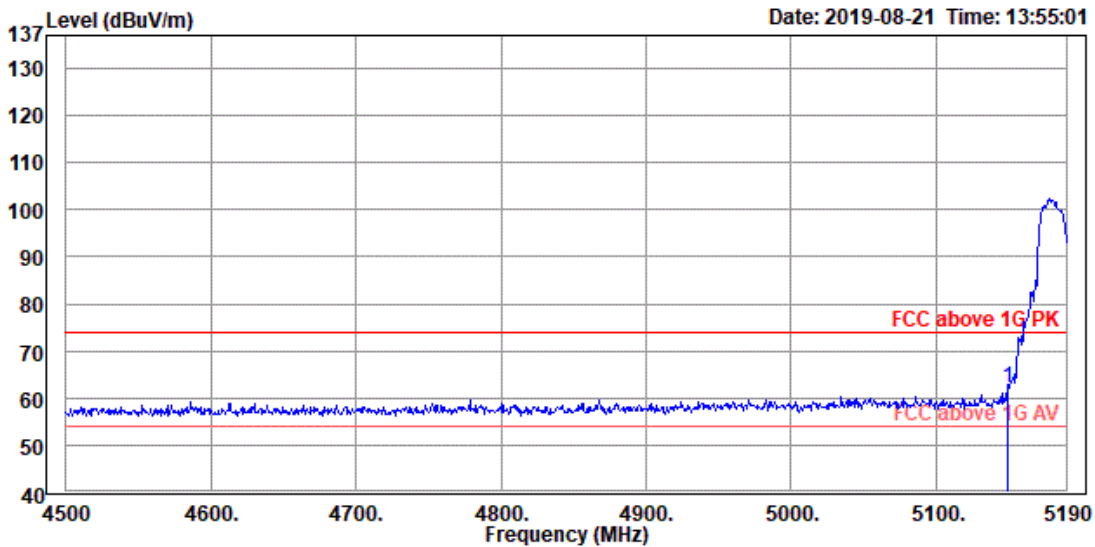


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : AC20-TX-5180
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	64.01	-1.93	62.08	74.00	-11.92	100	205	Peak

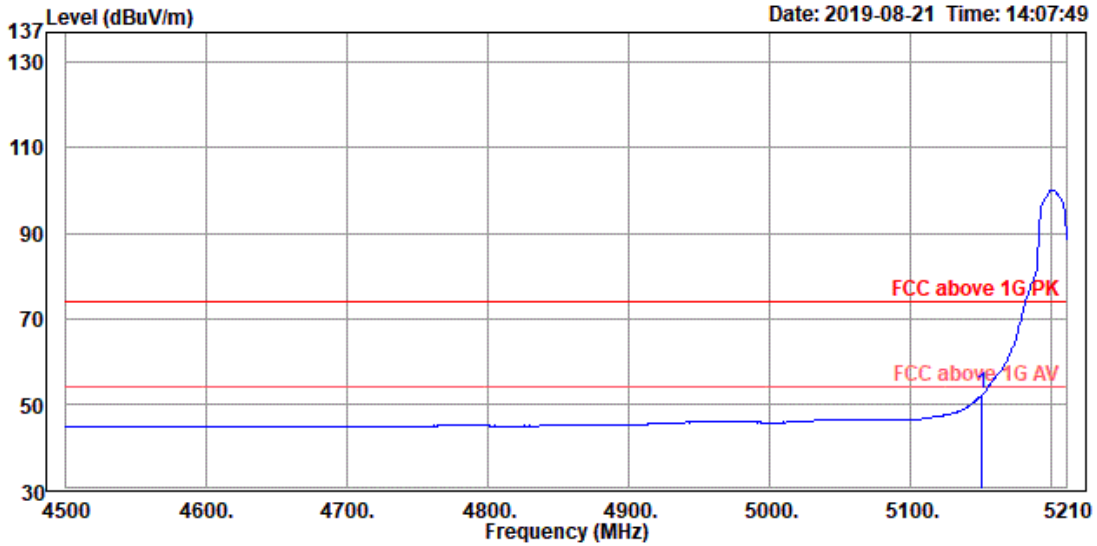


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5200
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	54.25	-1.93	52.32	54.00	-1.68	100	195	Average

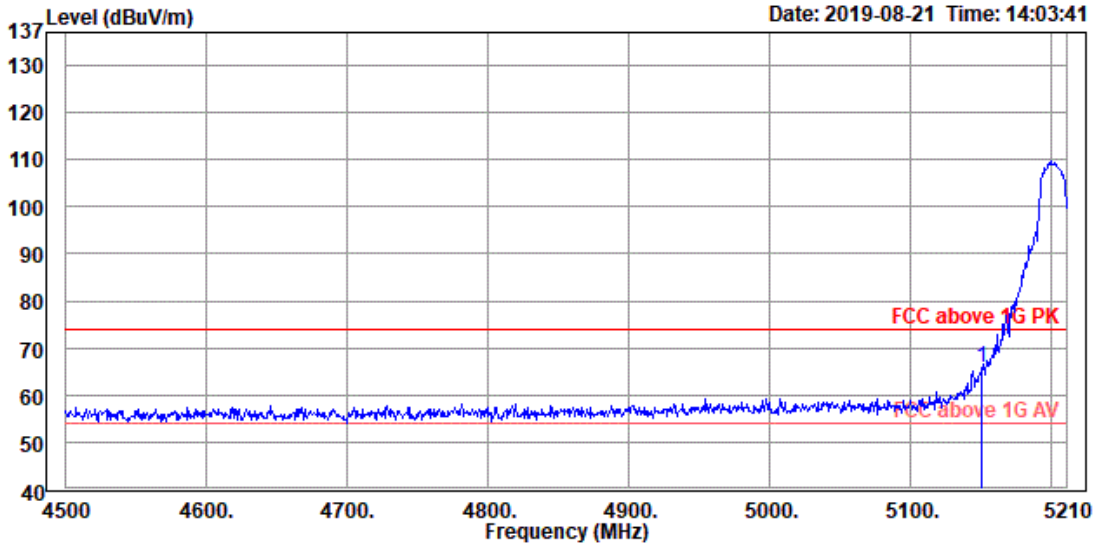


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5200
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5150.000	67.88	-1.93	65.95	74.00	-8.05	100	195 Peak

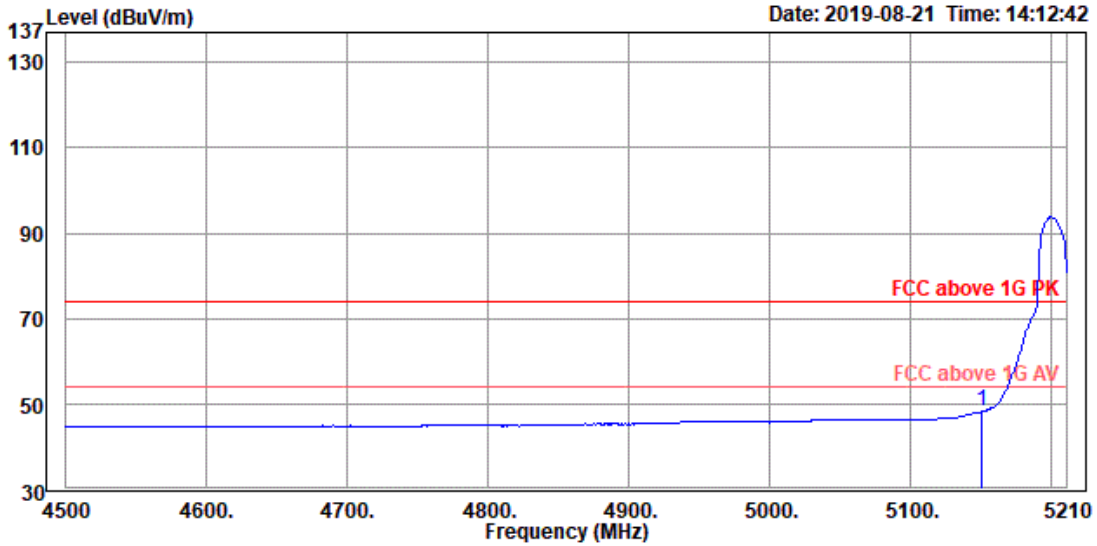


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5200
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	50.17	-1.93	48.24	54.00	-5.76	100	153	Average

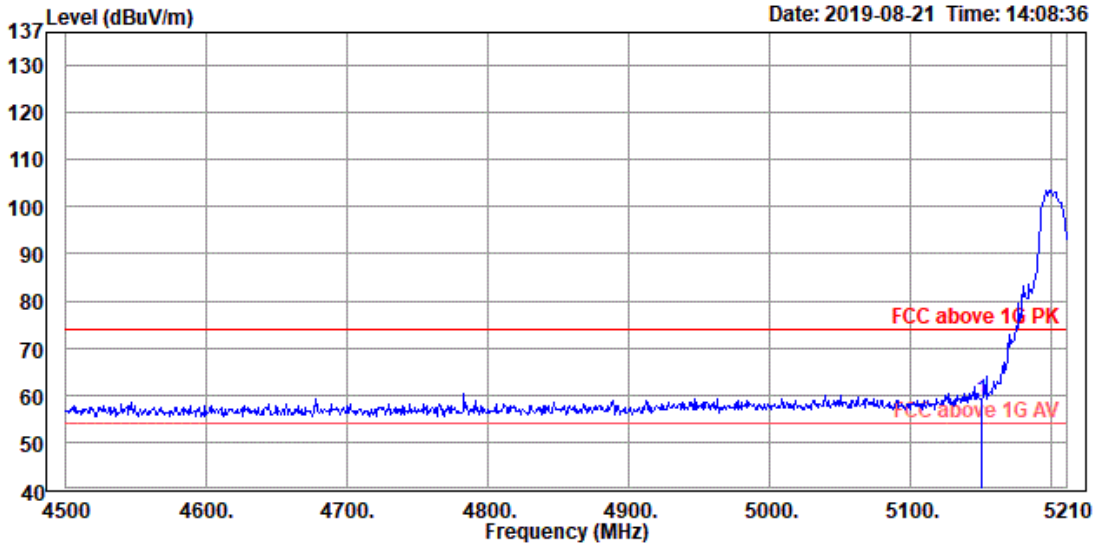


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5200
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	60.81	-1.93	58.88	74.00	-15.12	100	153	Peak

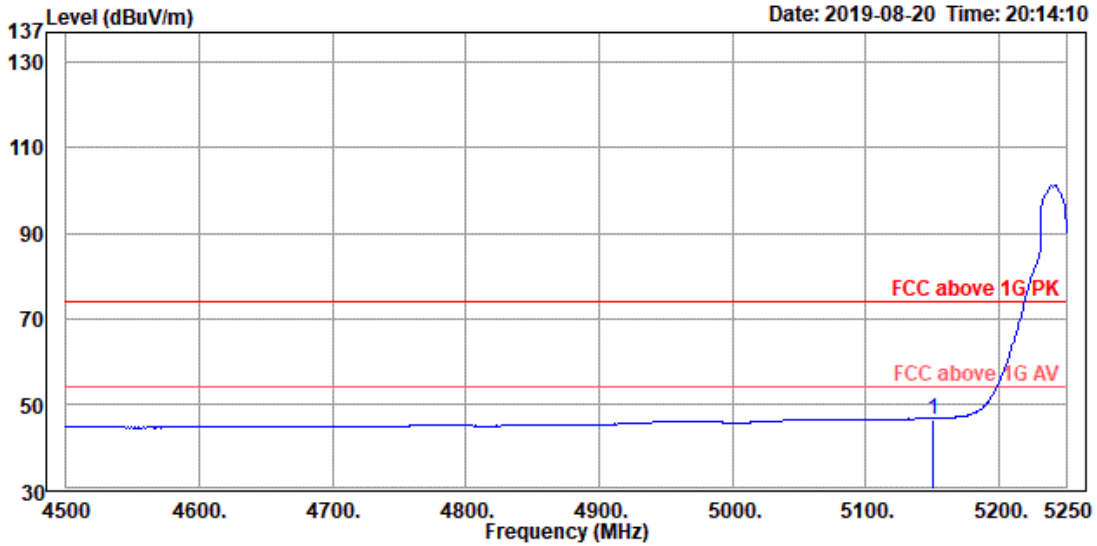


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5240
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	48.14	-1.93	46.21	54.00	-7.79	100	331	Average

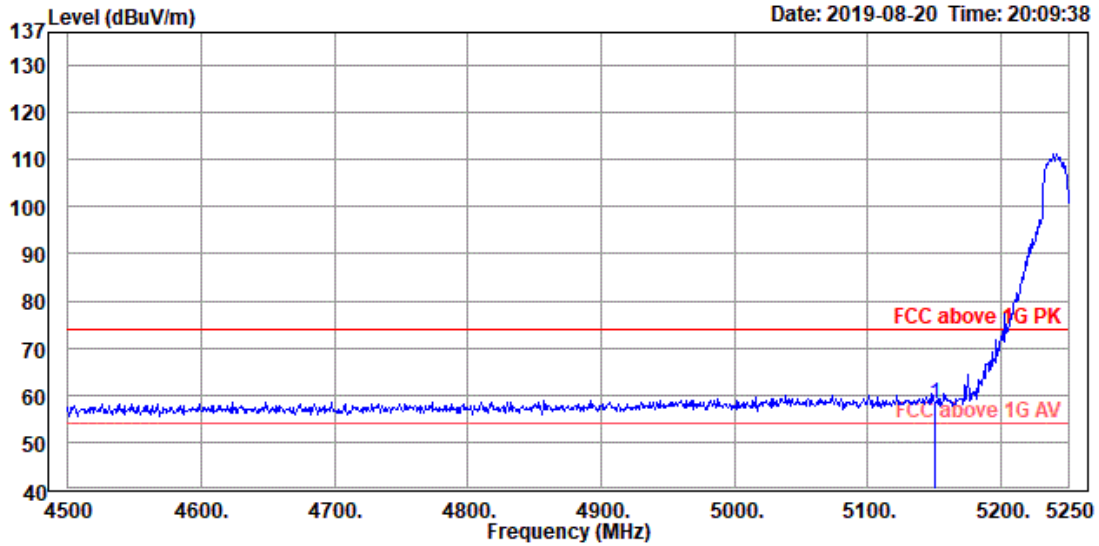


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5240
 Memo : Z

	Read	Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit	Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg
1 5150.000	60.13	-1.93	58.20	74.00	-15.80	100	331 Peak

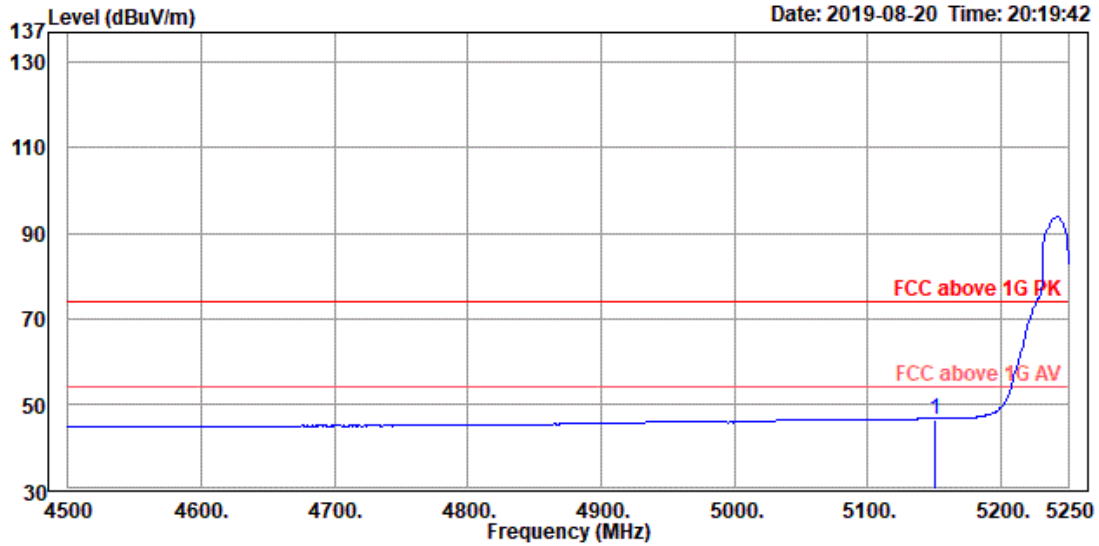


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5240
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5150.000	48.37	-1.93	46.44	54.00	-7.56	100	152 Average

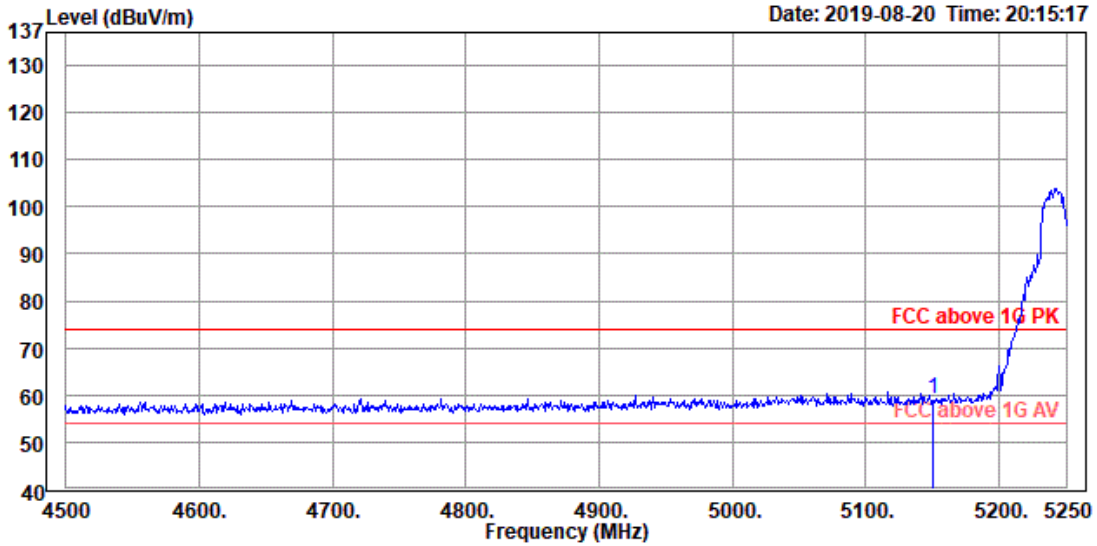


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5240
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	60.97	-1.93	59.04	74.00	-14.96	100	152	Peak

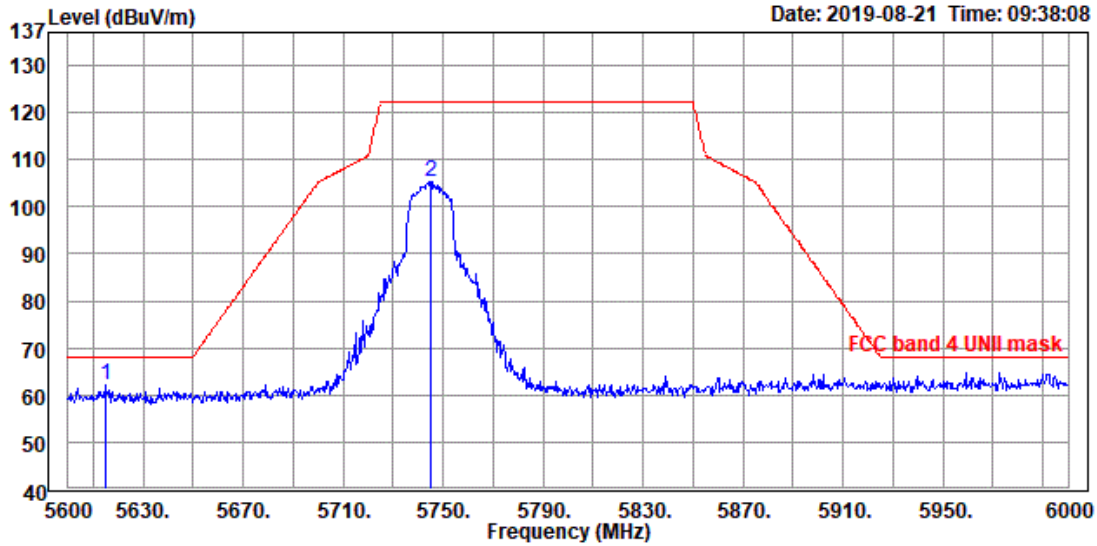


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m Horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5745
 Memo : Z

	Freq	Read Level	Factor	Level	Limit	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	5614.800	62.13	-0.12	62.01	68.20	-6.19	100	171	Peak	
2	5745.200	104.71	0.60	105.31	122.20	-16.89	100	171	Peak	

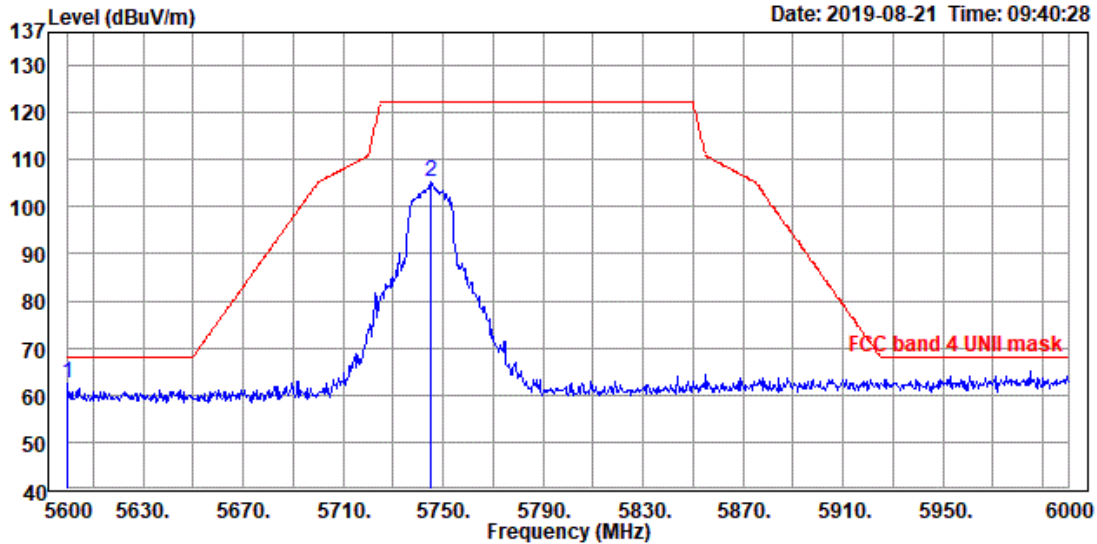


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5745
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5600.000	62.52	-0.16	62.36	68.20	-5.84	100	93 Peak
2	5745.200	104.75	0.60	105.35	122.20	-16.85	100	93 Peak

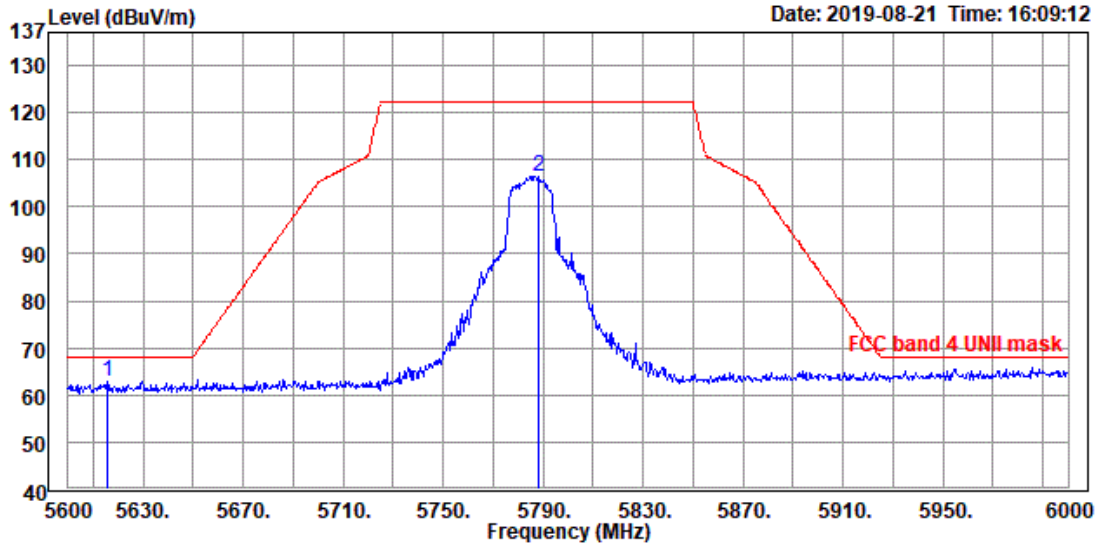


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5785
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5615.600	62.98	-0.11	62.87	68.20	-5.33	100	17 Peak
2	5788.000	105.40	0.90	106.30	122.20	-15.90	100	17 Peak

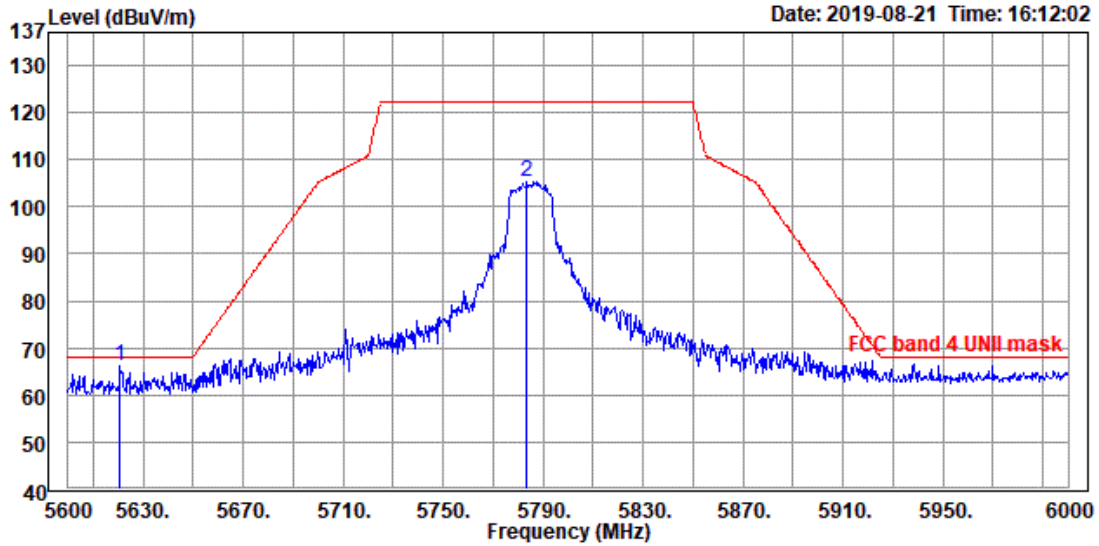


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m Vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5785
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5620.800	66.30	-0.09	66.21	68.20	-1.99	100	347 Peak
2	5783.600	104.32	0.87	105.19	122.20	-17.01	100	347 Peak

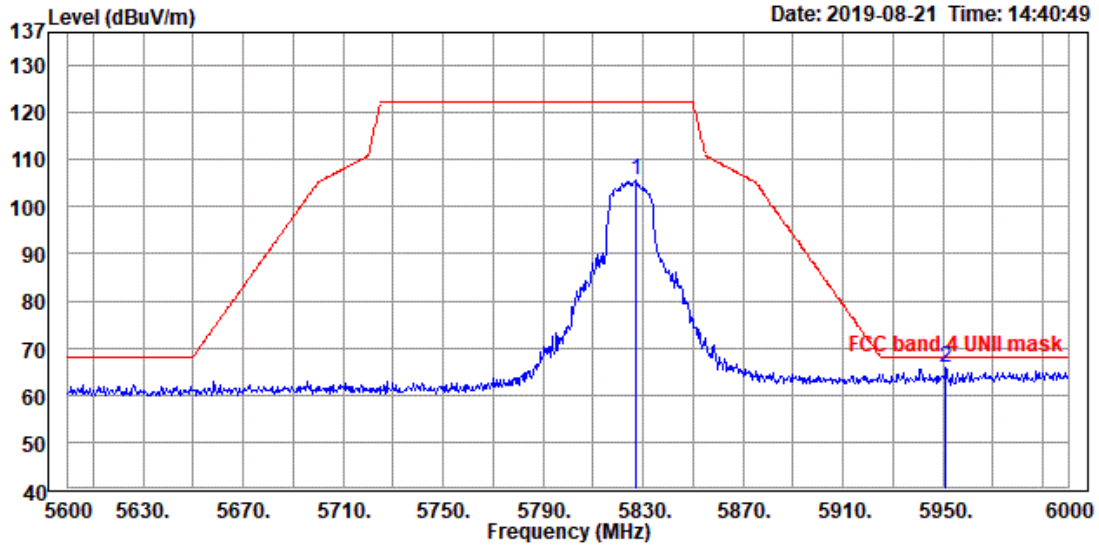


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5825
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5827.200	104.51	1.17	105.68	122.20	-16.52	100	185 Peak
2	5951.200	63.72	2.06	65.78	68.20	-2.42	100	185 Peak

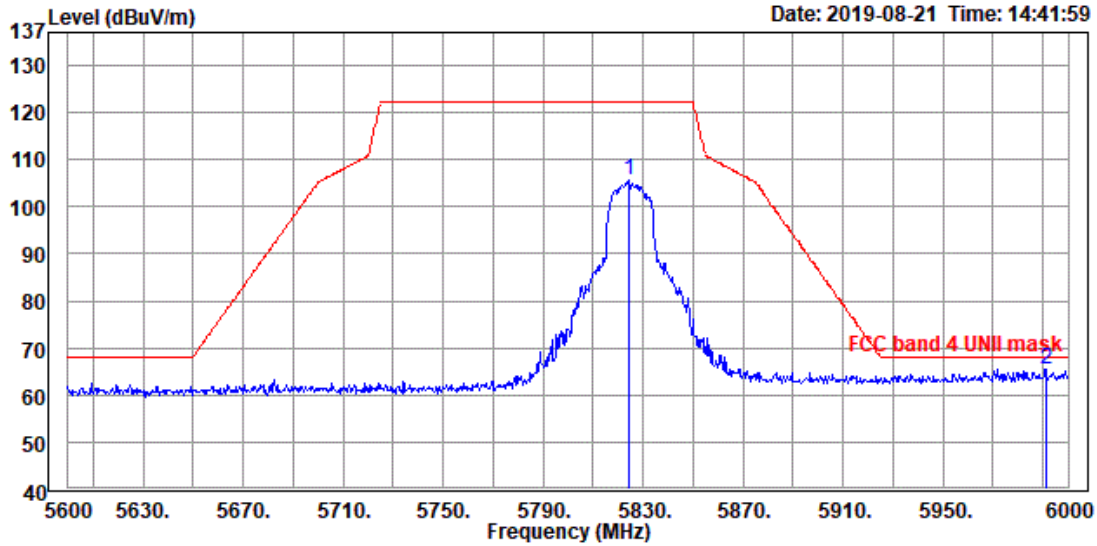


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m Vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5825
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5824.400	104.59	1.16	105.75	122.20	-16.45	100	109 Peak
2	5991.200	63.21	2.36	65.57	68.20	-2.63	100	109 Peak

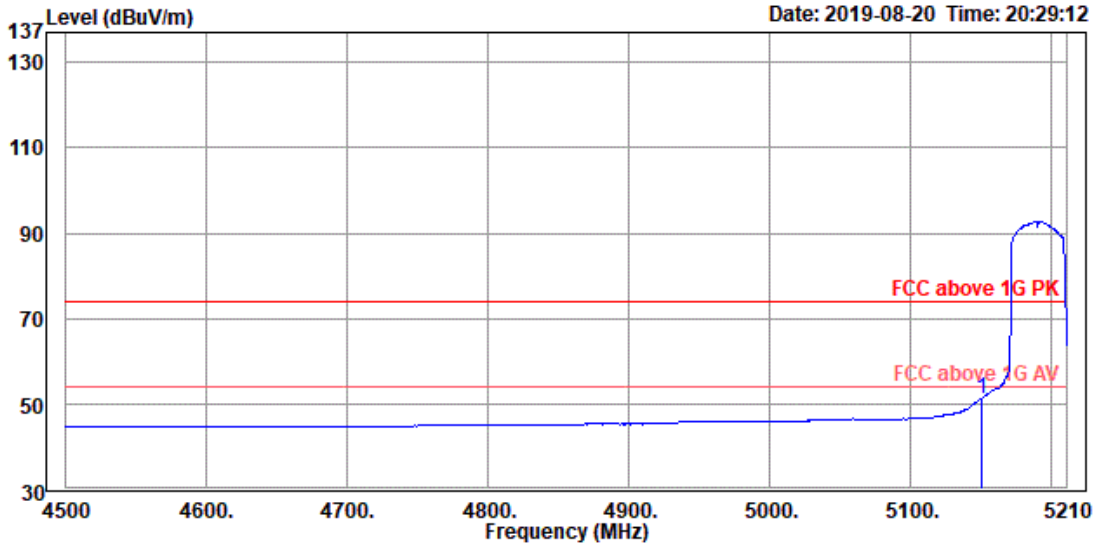


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 20
 Mode : AC40-TX-5190
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	53.25	-1.93	51.32	54.00	-2.68	100	214	Average

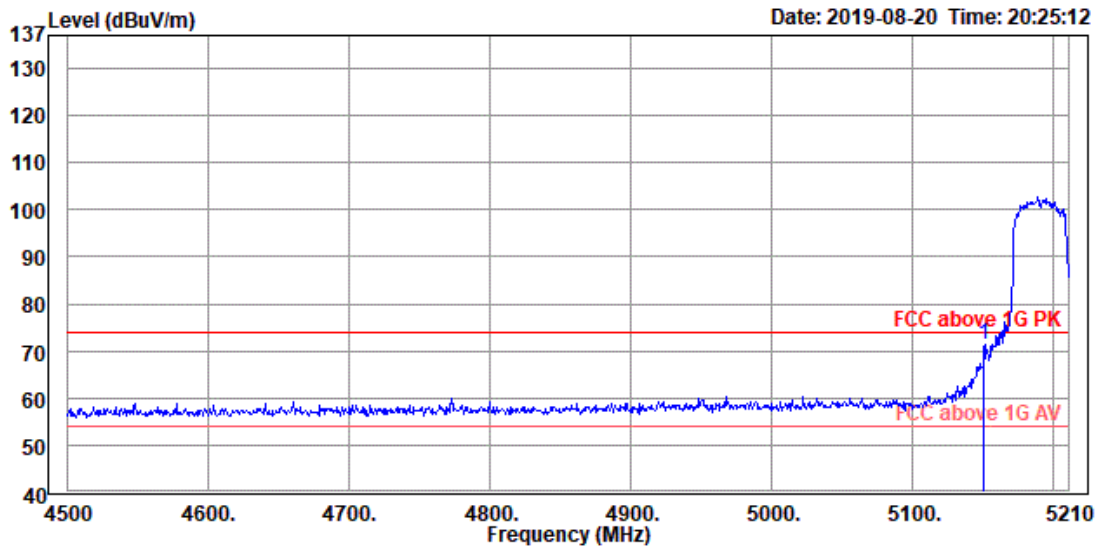


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 20
 Mode : AC40-TX-5190
 Memo : Z

	Freq	Read Level	Factor	Level	Limit	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	5150.000	73.39	-1.93	71.46	74.00	-2.54	100	214	Peak	

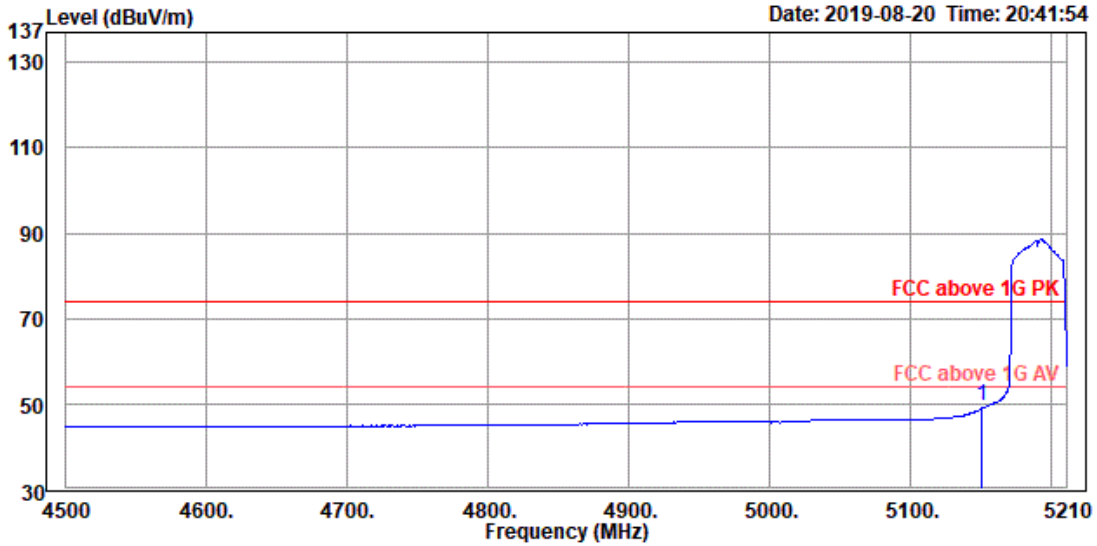


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 20
 Mode : AC40-TX-5190
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	51.62	-1.93	49.69	54.00	-4.31	100	79	Average

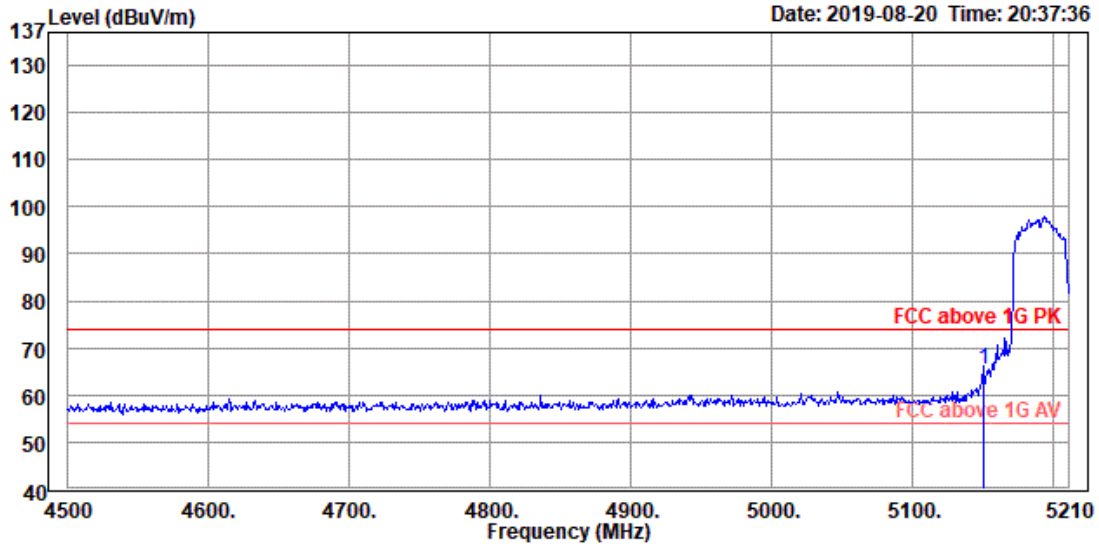


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 20
 Mode : AC40-TX-5190
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	67.26	-1.93	65.33	74.00	-8.67	100	79 Peak	

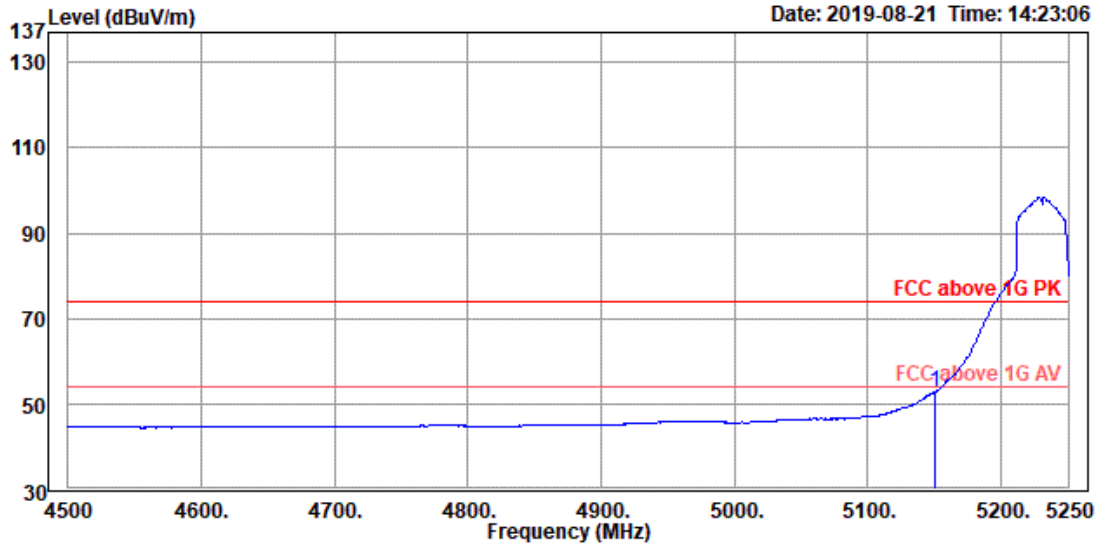


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC40-TX-5230
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	54.71	-1.93	52.78	54.00	-1.22	100	193	Average

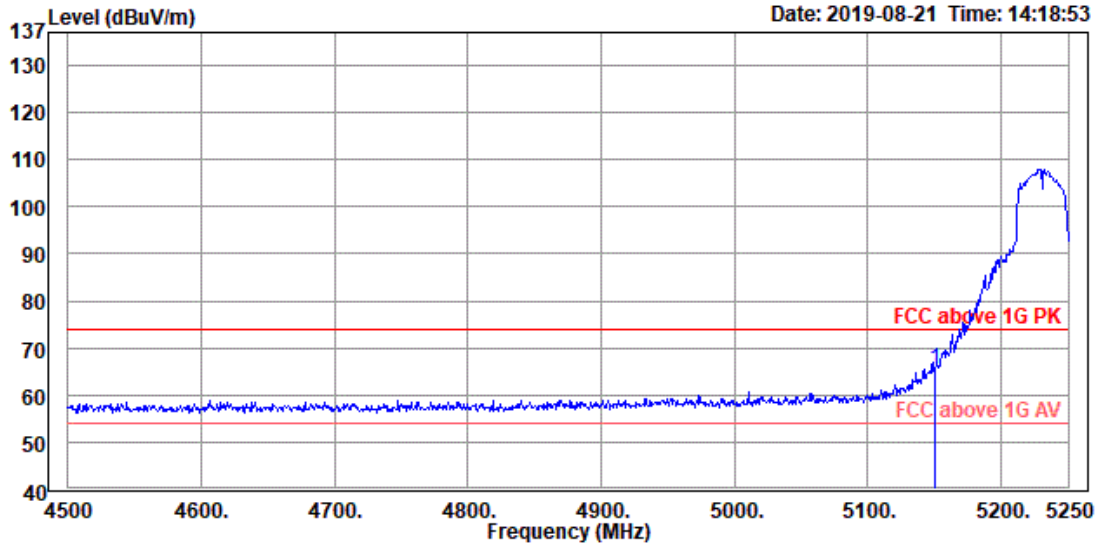


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC40-TX-5230
 Memo : Z

	Read	Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit	Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg
1 5150.000	67.51	-1.93	65.58	74.00	-8.42	100	193 Peak

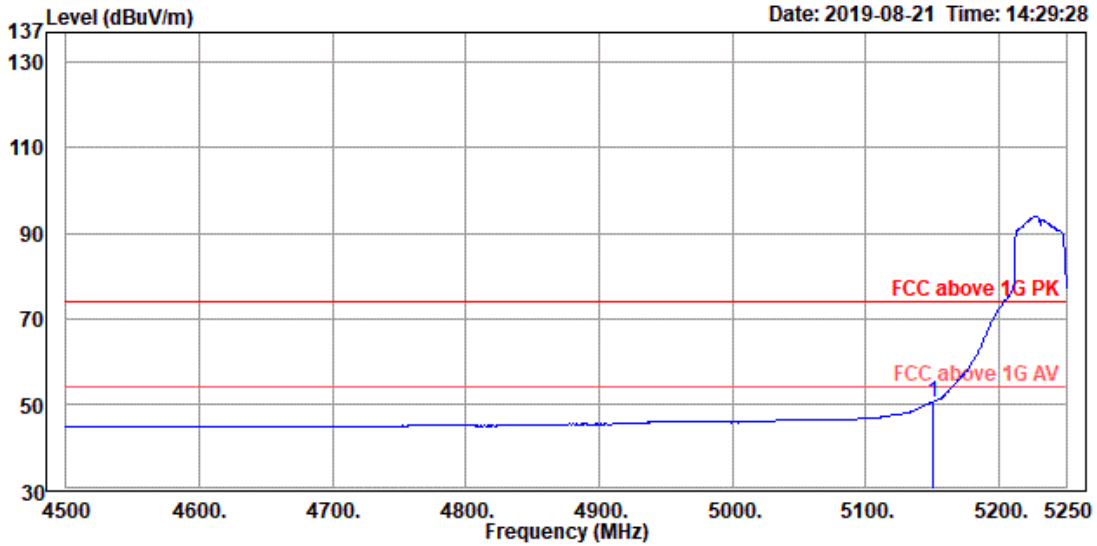


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC40-TX-5230
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	52.47	-1.93	50.54	54.00	-3.46	100	207	Average

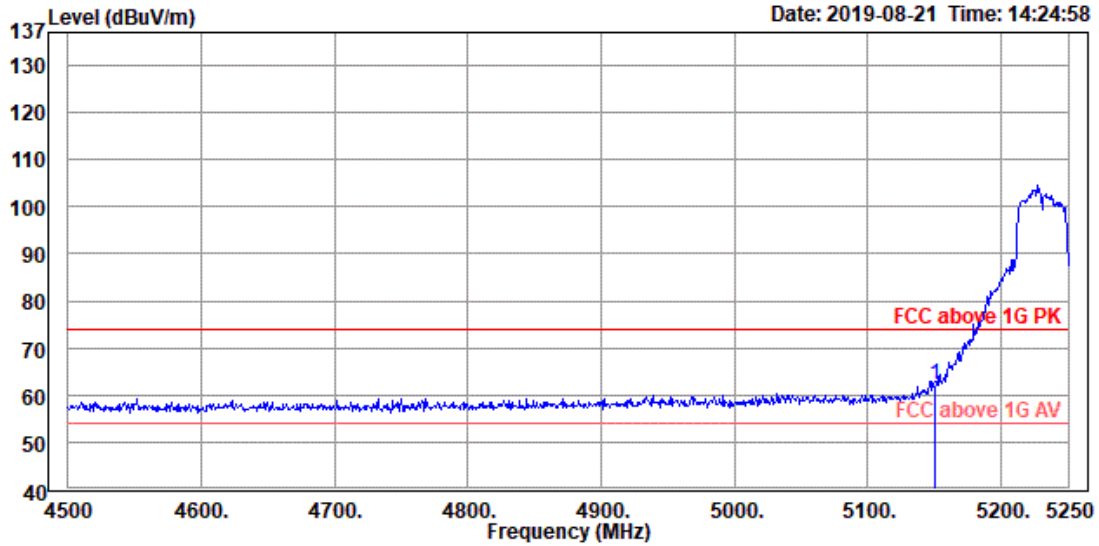


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC40-TX-5230
 Memo : Z

	Read	Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit	Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg
1 5150.000	64.00	-1.93	62.07	74.00	-11.93	100	207 Peak

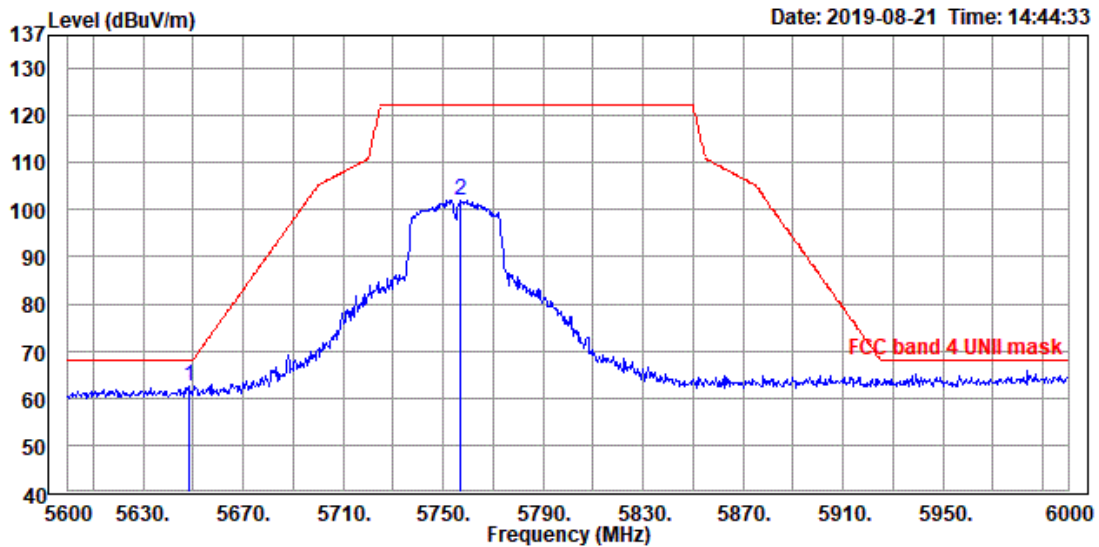


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 29
 Mode : AC40-TX-5755
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5648.400	62.60	-0.01	62.59	68.20	-5.61	100	228 Peak
2	5757.200	101.34	0.66	102.00	122.20	-20.20	100	228 Peak

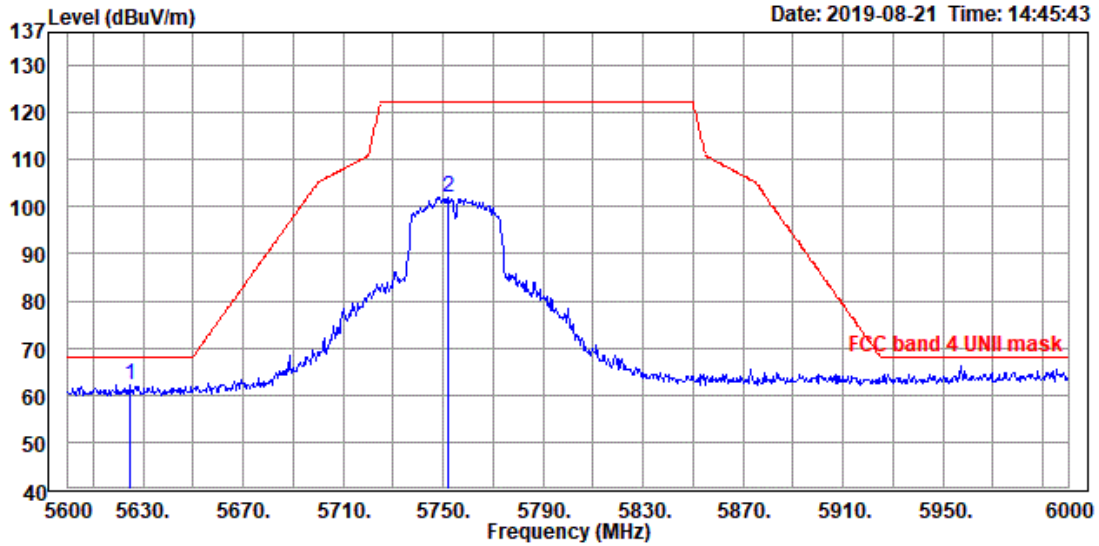


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m Vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 29
 Mode : AC40-TX-5755
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5624.400	62.28	-0.08	62.20	68.20	-6.00	100	31 Peak
2	5752.000	101.19	0.63	101.82	122.20	-20.38	100	31 Peak

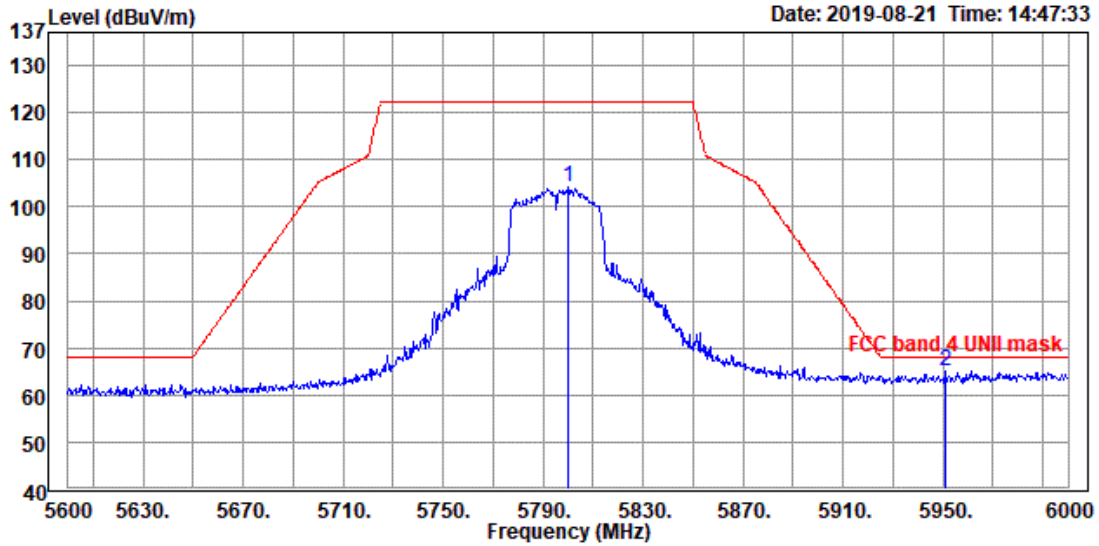


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 29
 Mode : AC40-TX-5795
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5800.000	103.09	0.98	104.07	122.20	-18.13	100	214 Peak
2	5951.200	62.90	2.06	64.96	68.20	-3.24	100	214 Peak

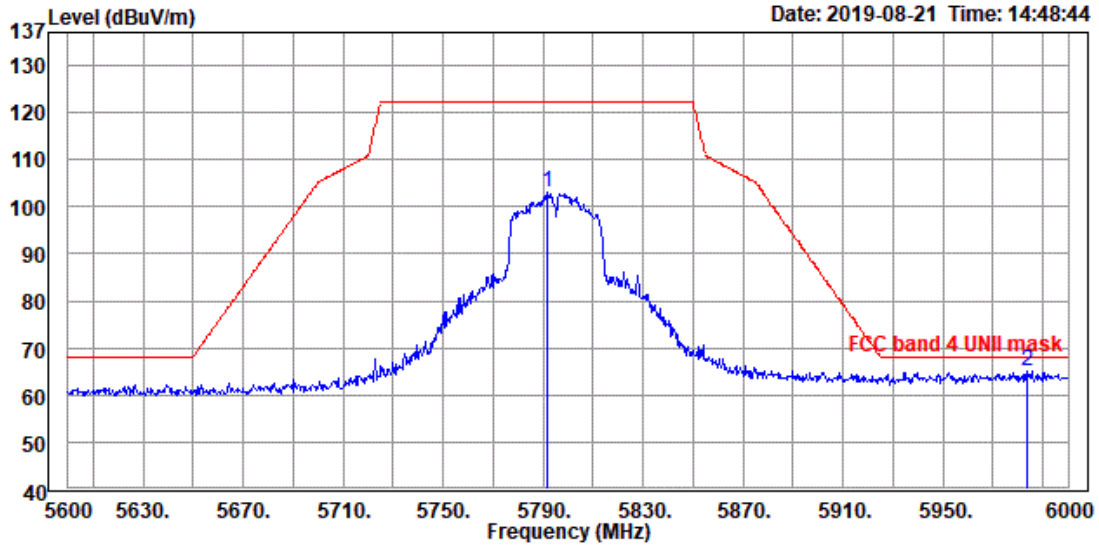


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m Vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 29
 Mode : AC40-TX-5795
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	5791.600	102.15	0.91	103.06	122.20	-19.14	100	20 Peak
2	5983.600	62.91	2.30	65.21	68.20	-2.99	100	20 Peak

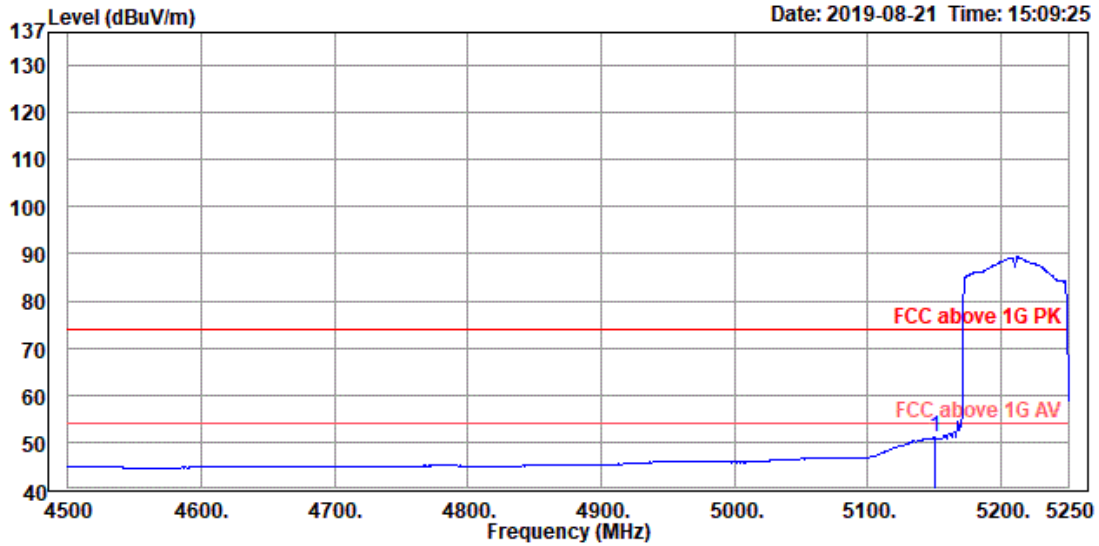


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 19
 Mode : AC80-TX-5210
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	52.98	-1.93	51.05	54.00	-2.95	100	195	Average

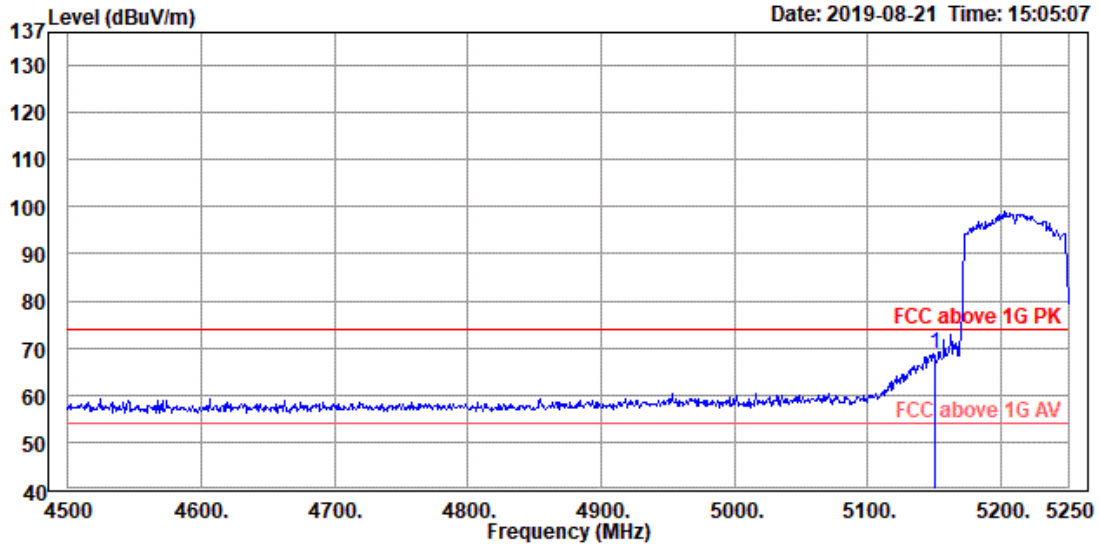


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 19
 Mode : AC80-TX-5210
 Memo : Z

	Read	Limit	Over	APos	TPos	Remark	Note
Freq	Level	Factor	Level	Line	Limit		
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg
1 5150.000	70.60	-1.93	68.67	74.00	-5.33	100	195 Peak

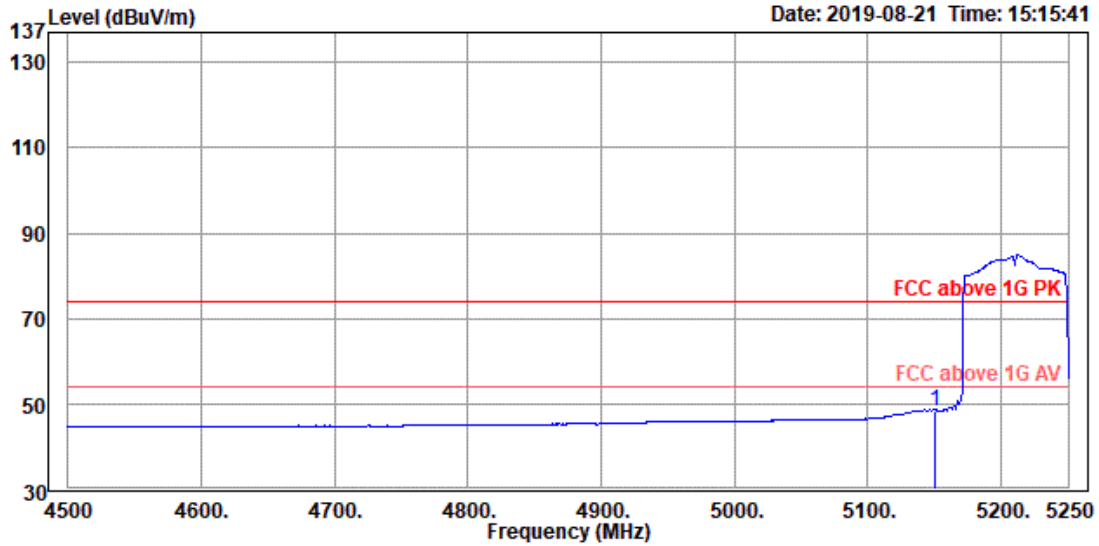


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 19
 Mode : AC80-TX-5210
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 5150.000	50.32	-1.93	48.39	54.00	-5.61	100	207	Average

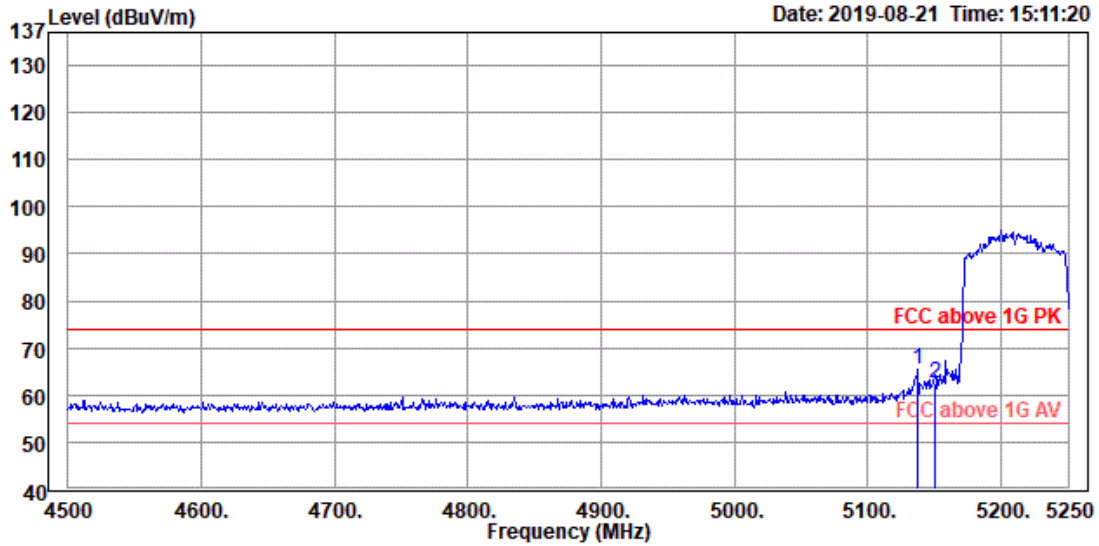


Site : 966A Chamber A
 Condition : FCC above 1G PK 3m Vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 19
 Mode : AC80-TX-5210
 Memo : Z

	Freq	Read Level	Factor	Level	Limit	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	5137.500	67.44	-2.01	65.43	74.00	-8.57	100	207	Peak	
2	5150.000	64.26	-1.93	62.33	74.00	-11.67	100	207	Peak	

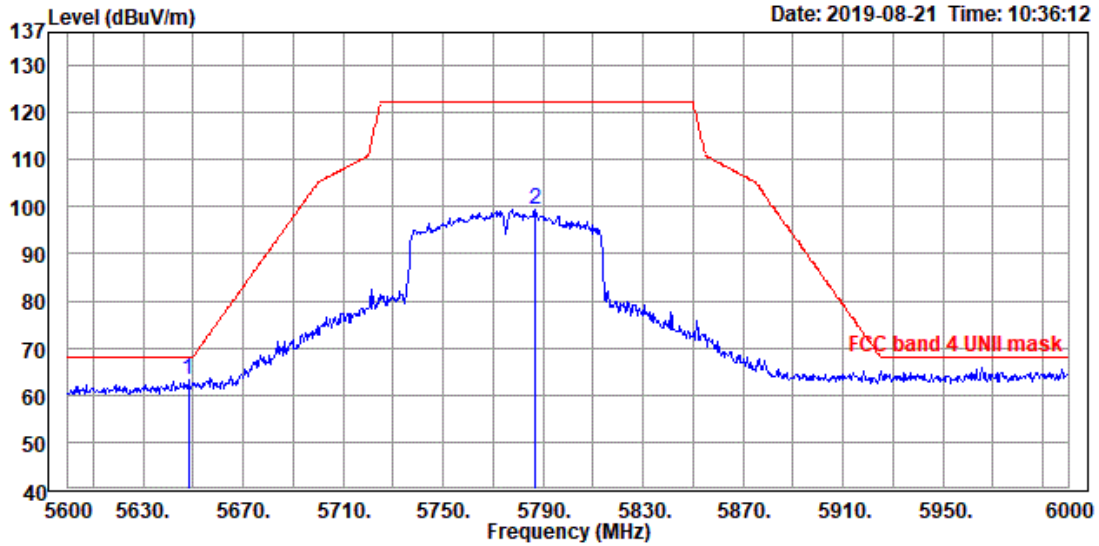

Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 10
 Mode : AC80-TX-5775
 Memo : Z

	Freq	Read Level	Factor	Level	Limit	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	5648.000	63.27	-0.01	63.26	68.20	-4.94	100	163	Peak	
2	5786.800	98.41	0.88	99.29	122.20	-22.91	100	163	Peak	

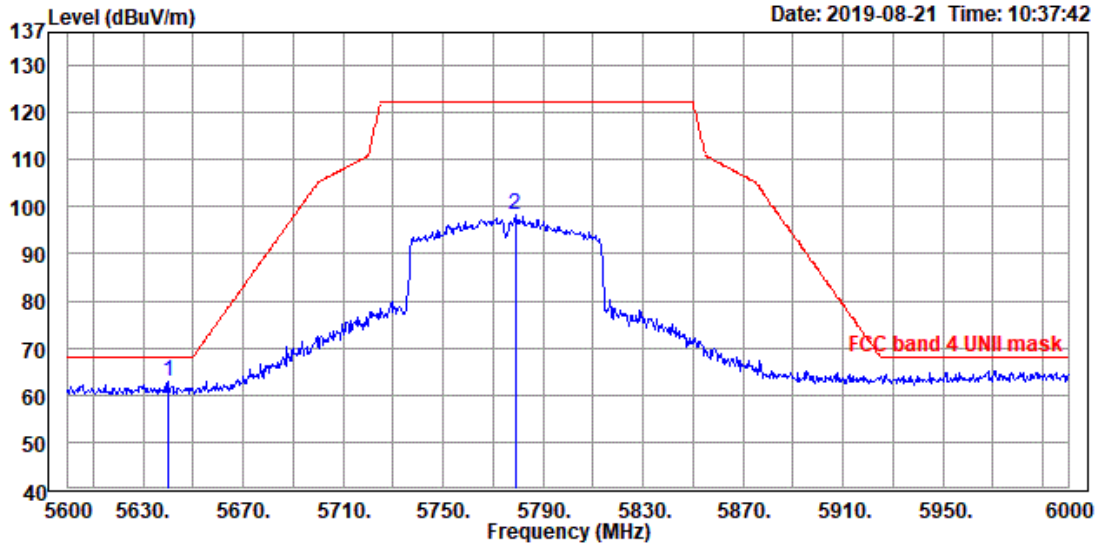


Site : 966A Chamber A
 Condition : FCC band 4 UNII mask 3m Vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 10
 Mode : AC80-TX-5775
 Memo : Z

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	5640.000	62.99	-0.03	62.96	68.20	-5.24	100	201	Peak	
2	5778.800	97.38	0.83	98.21	122.20	-23.99	100	201	Peak	

Spurious Emissions, TX Mode, 1-18G




TUV Rheinland Taiwan Ltd.
 11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 Fax:+886-2528-0018

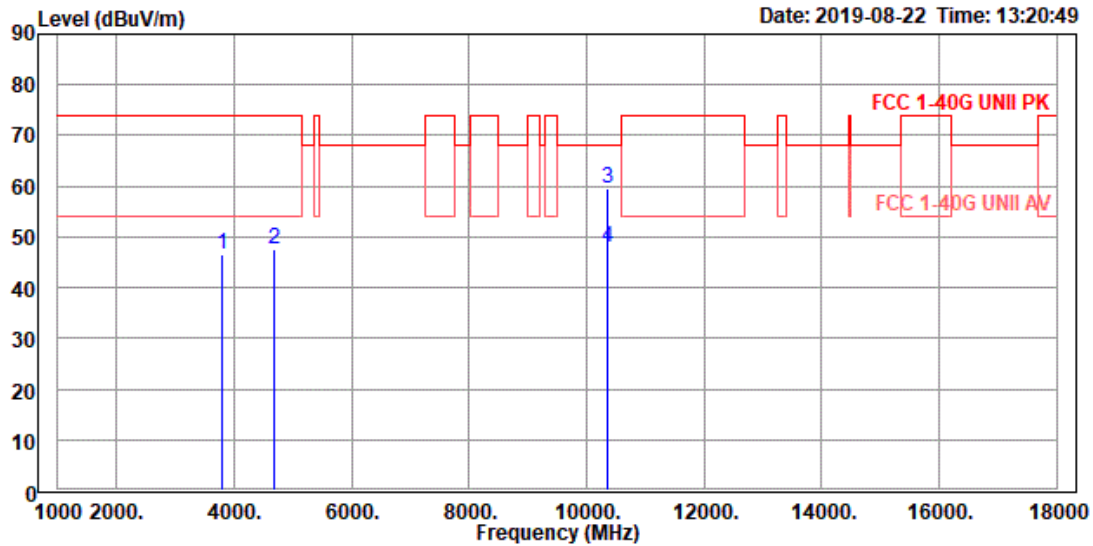


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : A-TX-5180
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	3788.000	50.76	-4.10	46.66	74.00	-27.34	100	106 Peak
2	4672.000	49.15	-1.69	47.46	74.00	-26.54	100	53 Peak
3	10360.000	53.91	5.68	59.59	68.00	-8.41	100	289 Peak
4	10360.000	42.10	5.68	47.78	68.00	-20.22	100	289 Average

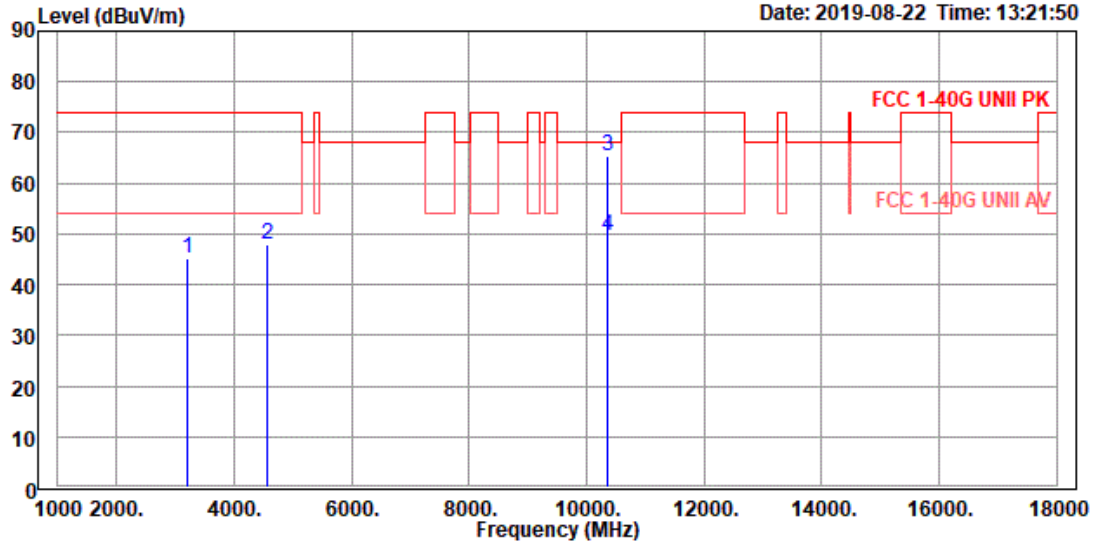


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : A-TX-5180
 Memo : Z

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3193.000	50.30	-5.10	45.20	74.00	-28.80	100	331	Peak	
2	4570.000	49.95	-1.95	48.00	74.00	-26.00	100	320	Peak	
3	10360.000	59.59	5.68	65.27	68.00	-2.73	100	39	Peak	
4	10360.000	43.77	5.68	49.45	68.00	-18.55	100	39	Average	

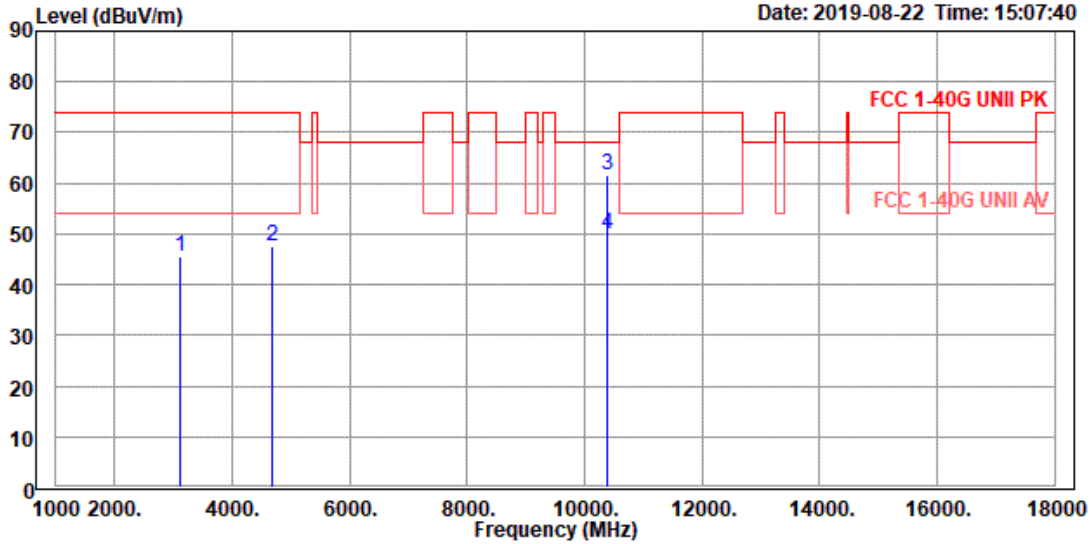


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5200
 Memo : Z

	Read Freq	Level	Factor	Level	Limit	Over	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3125.000	50.62	-5.19	45.43	74.00	-28.57	100	359	Peak	
2	4672.000	49.15	-1.69	47.46	74.00	-26.54	100	169	Peak	
3	10400.000	55.92	5.60	61.52	68.00	-6.48	100	269	Peak	
4	10400.000	44.20	5.60	49.80	68.00	-18.20	100	269	Average	

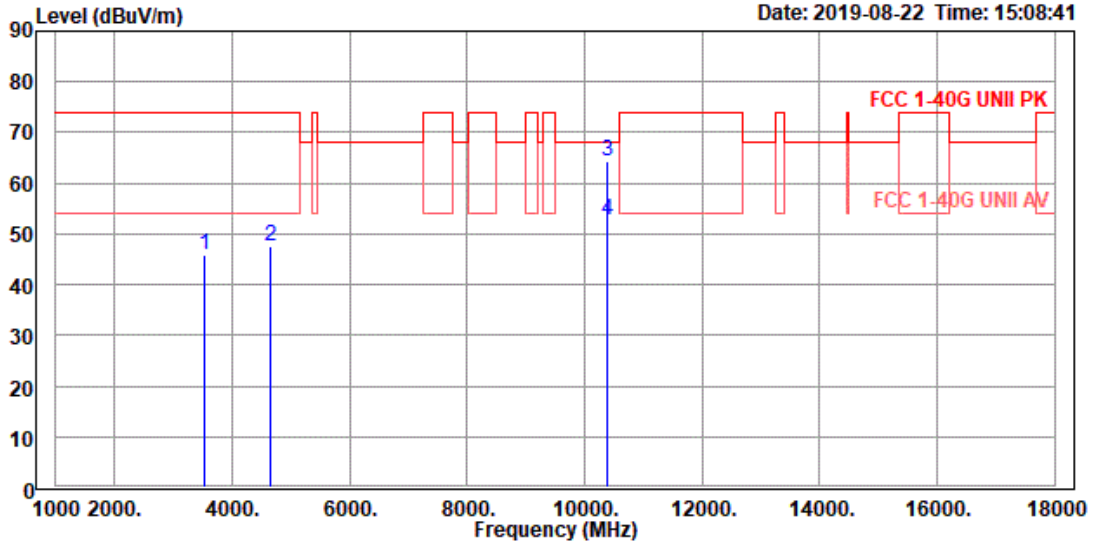


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5200
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	3533.000	50.45	-4.70	45.75	74.00	-28.25	100	170 Peak
2	4638.000	49.23	-1.74	47.49	74.00	-26.51	100	239 Peak
3	10400.000	58.63	5.60	64.23	68.00	-3.77	100	39 Peak
4	10400.000	47.19	5.60	52.79	68.00	-15.21	100	39 Average

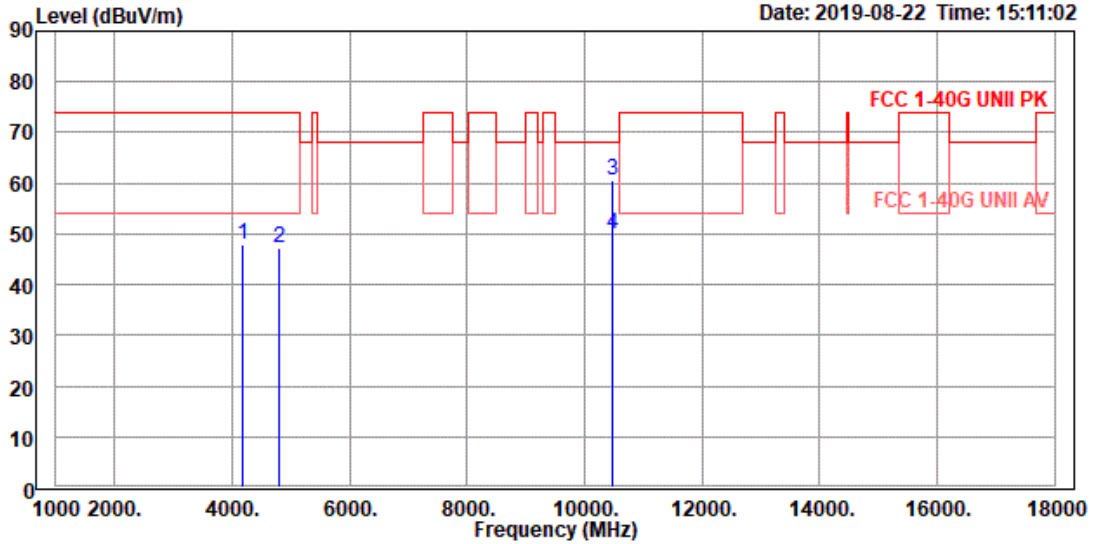


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5240
 Memo : Z

	Read Freq	Read Level	Read Factor	Limit Level	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	4179.000	51.16	-3.33	47.83	74.00	-26.17	100	357	Peak
2	4791.000	48.87	-1.49	47.38	74.00	-26.62	100	185	Peak
3	10480.000	55.04	5.43	60.47	68.00	-7.53	100	196	Peak
4	10480.000	44.39	5.43	49.82	68.00	-18.18	100	196	Average

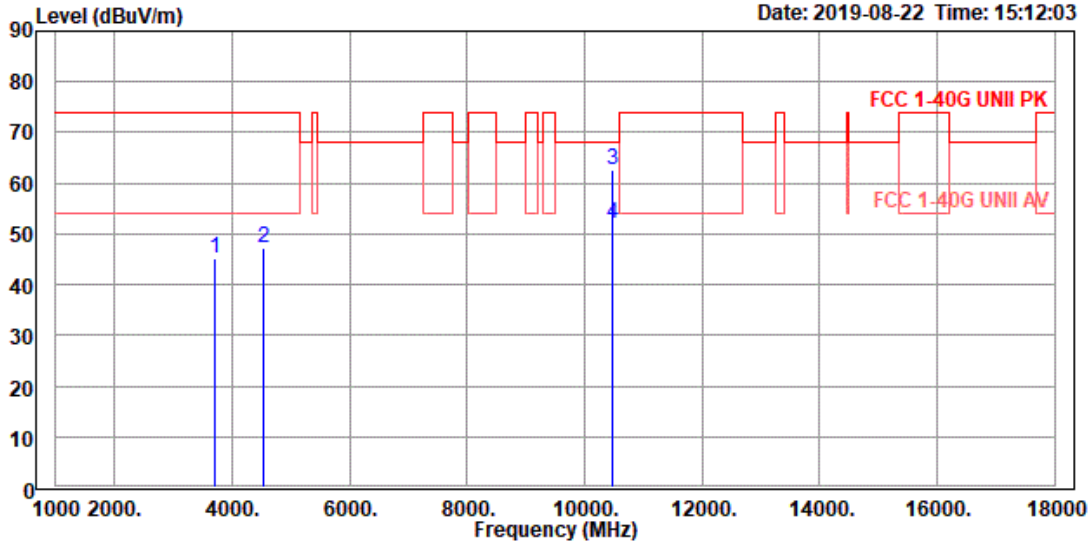


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5240
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	3703.000	49.65	-4.35	45.30	74.00	-28.70	100	112 Peak
2	4536.000	49.43	-2.05	47.38	74.00	-26.62	100	335 Peak
3	10480.000	57.06	5.43	62.49	68.00	-5.51	100	44 Peak
4	10480.000	46.50	5.43	51.93	68.00	-16.07	100	44 Average

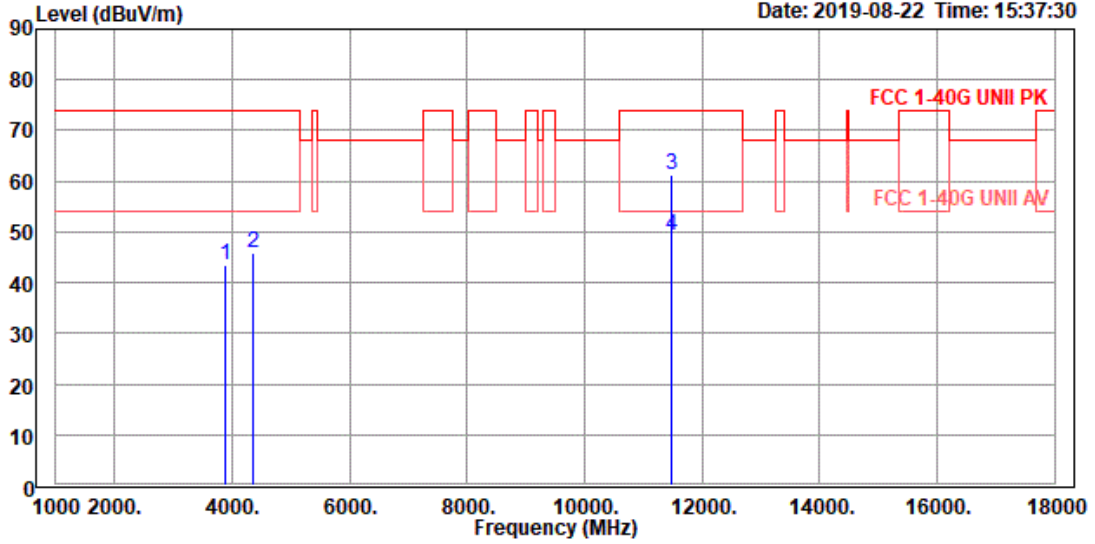


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5745
 Memo : Z

	Read Freq	Read Level	Factor	Level	Limit	Over	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3873.000	47.36	-3.85	43.51	74.00	-30.49	100	297	Peak	
2	4349.000	48.62	-2.87	45.75	74.00	-28.25	100	96	Peak	
3	11490.000	55.70	5.44	61.14	74.00	-12.86	100	264	Peak	
4	11490.000	43.89	5.44	49.33	54.00	-4.67	100	264	Average	

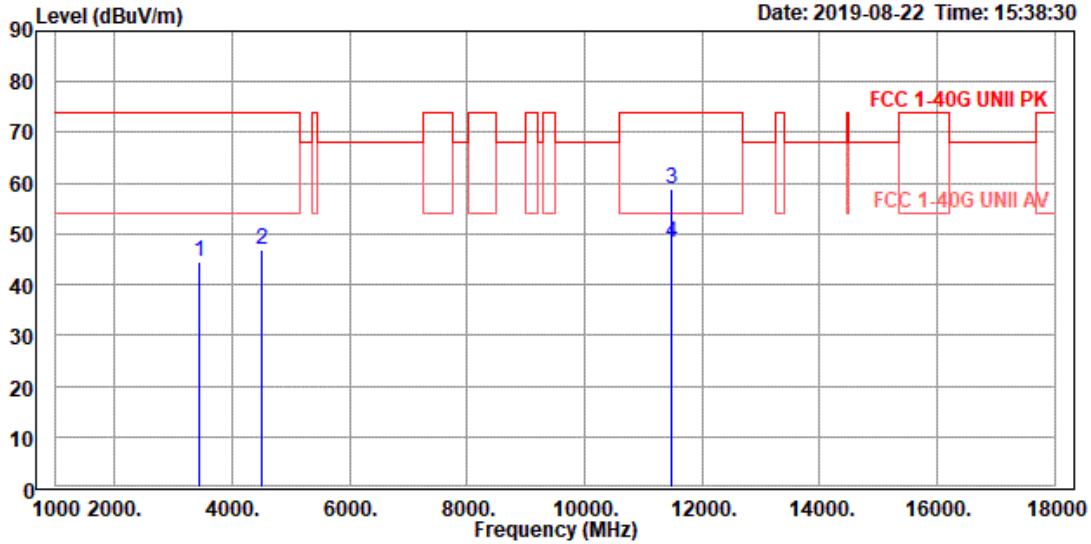


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5745
 Memo : Z

	Read Freq	Read Level	Factor	Level	Limit	Over	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3448.000	49.27	-4.90	44.37	74.00	-29.63	100	4	Peak	
2	4502.000	49.16	-2.16	47.00	74.00	-27.00	100	225	Peak	
3	11490.000	53.47	5.44	58.91	74.00	-15.09	100	355	Peak	
4	11490.000	42.94	5.44	48.38	54.00	-5.62	100	355	Average	

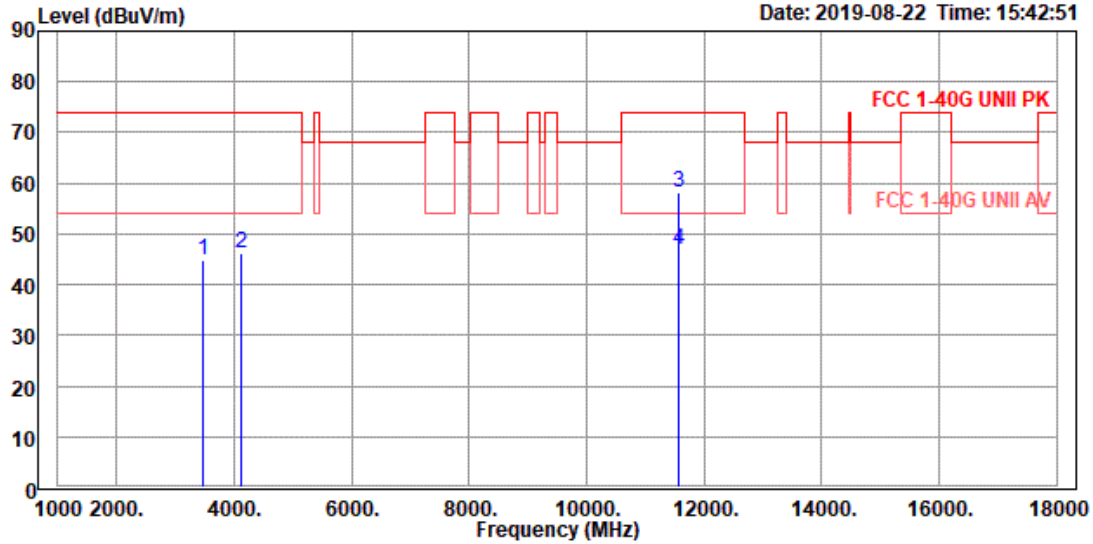


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5785
 Memo : Z

	Read Freq	Level	Factor	Level	Limit	Over	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3465.000	49.51	-4.85	44.66	74.00	-29.34	100	360	Peak	
2	4128.000	49.54	-3.43	46.11	74.00	-27.89	100	93	Peak	
3	11570.000	52.39	5.68	58.07	74.00	-15.93	100	249	Peak	
4	11570.000	41.29	5.68	46.97	54.00	-7.03	100	249	Average	

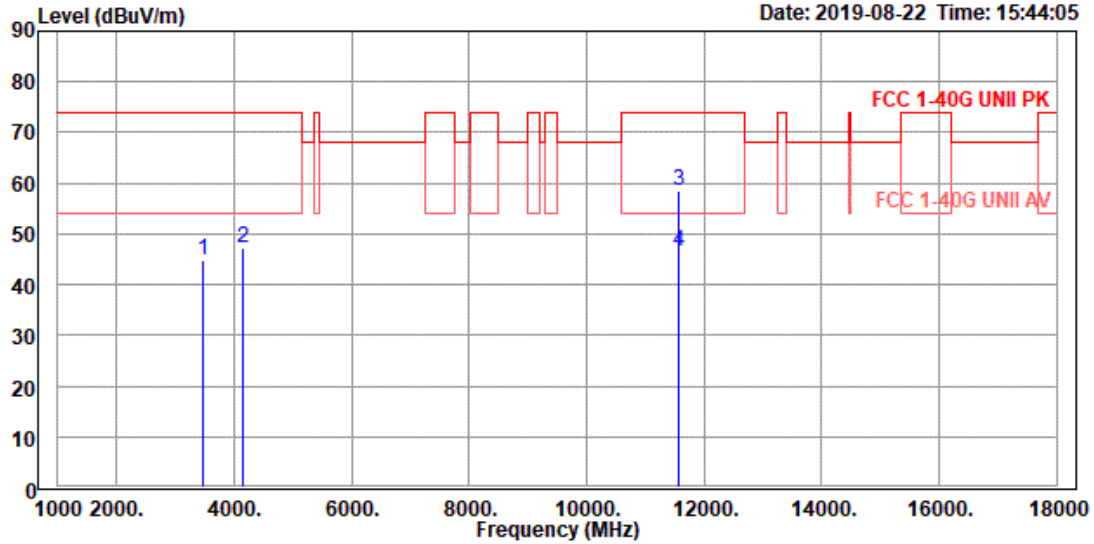


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5785
 Memo : Z

	Read Freq	Level	Factor	Level	Limit	Over	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3465.000	49.74	-4.85	44.89	74.00	-29.11	100	346	Peak	
2	4162.000	50.67	-3.36	47.31	74.00	-26.69	100	360	Peak	
3	11570.000	52.88	5.68	58.56	74.00	-15.44	100	75	Peak	
4	11570.000	40.85	5.68	46.53	54.00	-7.47	100	75	Average	

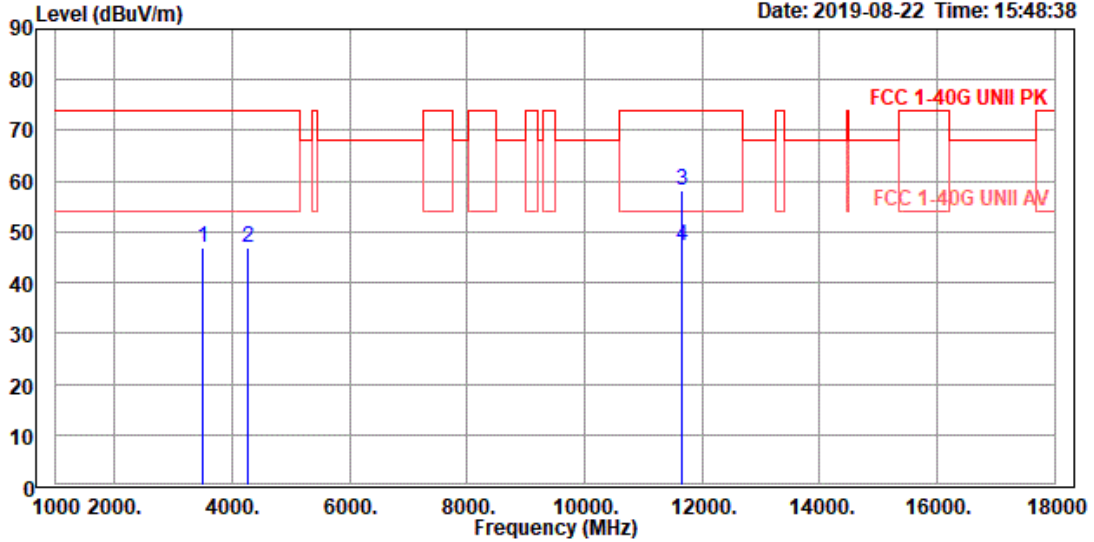


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5825
 Memo : Z

	Read Freq	Read Level	Factor	Level	Limit	Over	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3499.000	51.52	-4.73	46.79	74.00	-27.21	100	342	Peak	
2	4281.000	49.82	-3.11	46.71	74.00	-27.29	100	3	Peak	
3	11650.000	52.19	5.99	58.18	74.00	-15.82	100	259	Peak	
4	11650.000	41.09	5.99	47.08	54.00	-6.92	100	259	Average	

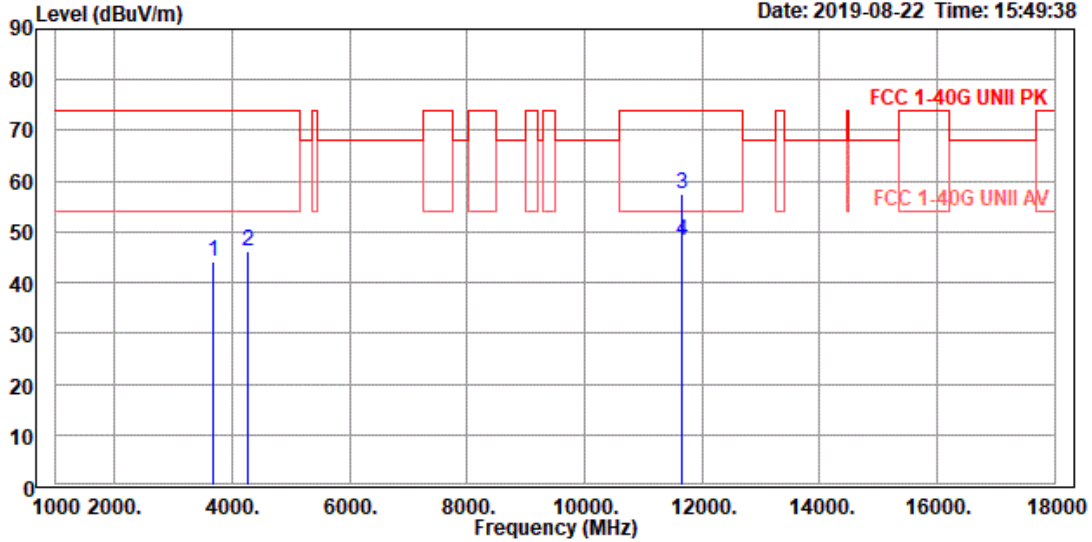


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5825
 Memo : Z

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3686.000	48.65	-4.40	44.25	74.00	-29.75	100	78	Peak	
2	4264.000	49.42	-3.15	46.27	74.00	-27.73	100	32	Peak	
3	11650.000	51.39	5.99	57.38	74.00	-16.62	100	0	Peak	
4	11650.000	42.22	5.99	48.21	54.00	-5.79	100	0	Average	

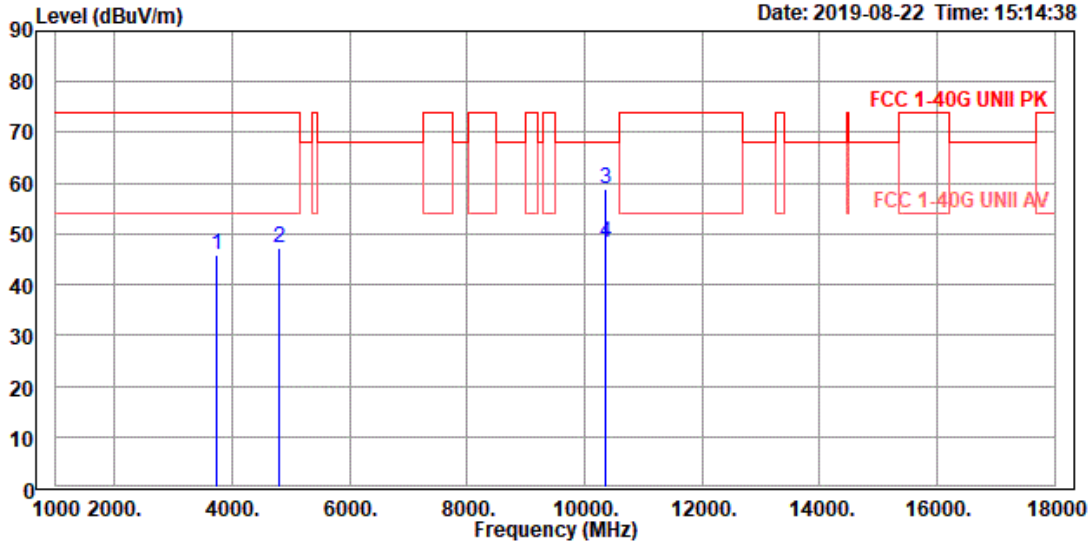


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : AC20-TX-5180
 Memo : Z

	Read Freq	Read Level	Read Factor	Limit Level	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	3737.000	49.98	-4.25	45.73	74.00	-28.27	100	191	Peak
2	4791.000	48.62	-1.49	47.13	74.00	-26.87	100	283	Peak
3	10360.000	53.15	5.68	58.83	68.00	-9.17	100	305	Peak
4	10360.000	42.61	5.68	48.29	68.00	-19.71	100	305	Average

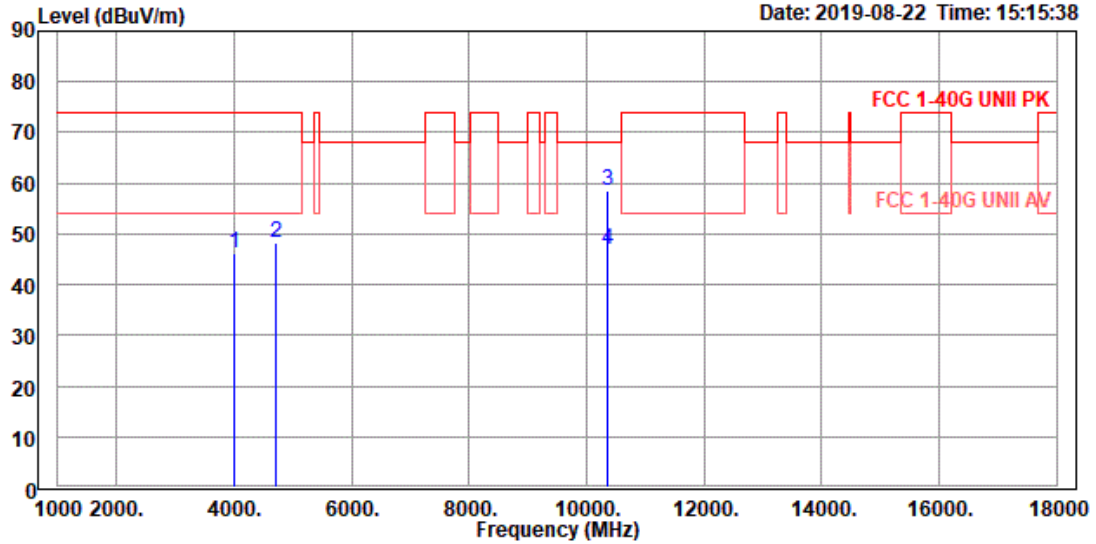


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : AC20-TX-5180
 Memo : Z

	Read Freq	Read Level	Read Factor	Limit Level	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	3992.000	49.85	-3.70	46.15	74.00	-27.85	100	183	Peak
2	4706.000	49.95	-1.65	48.30	74.00	-25.70	100	360	Peak
3	10360.000	52.89	5.68	58.57	68.00	-9.43	100	33	Peak
4	10360.000	41.12	5.68	46.80	68.00	-21.20	100	33	Average

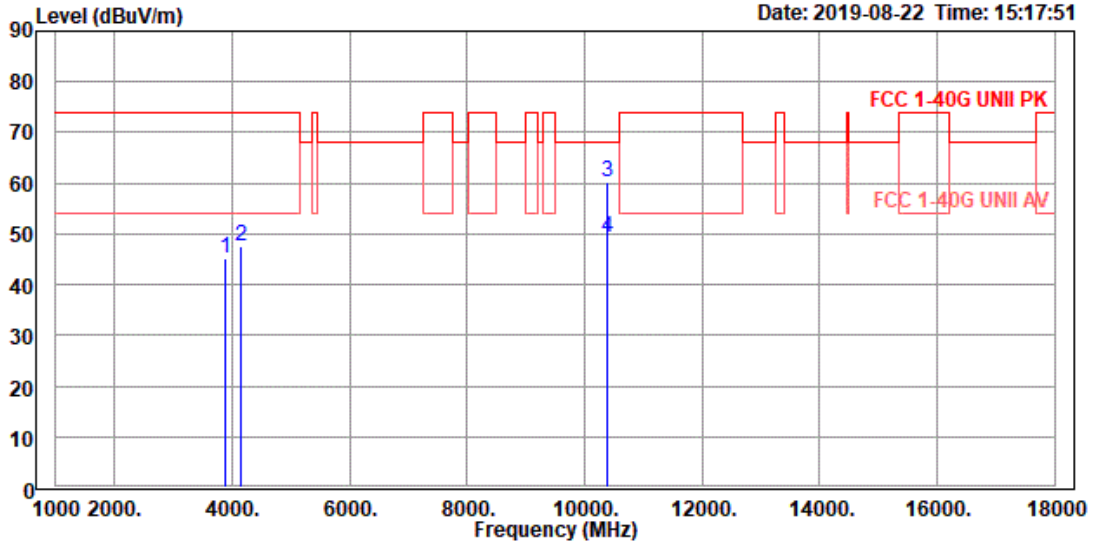


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5200
 Memo : Z

	Read Freq	Read Level	Read Factor	Level	Limit	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3890.000	49.03	-3.80	45.23	74.00	-28.77	100	299	Peak	
2	4162.000	50.94	-3.36	47.58	74.00	-26.42	100	211	Peak	
3	10400.000	54.54	5.60	60.14	68.00	-7.86	100	259	Peak	
4	10400.000	43.71	5.60	49.31	68.00	-18.69	100	259	Average	

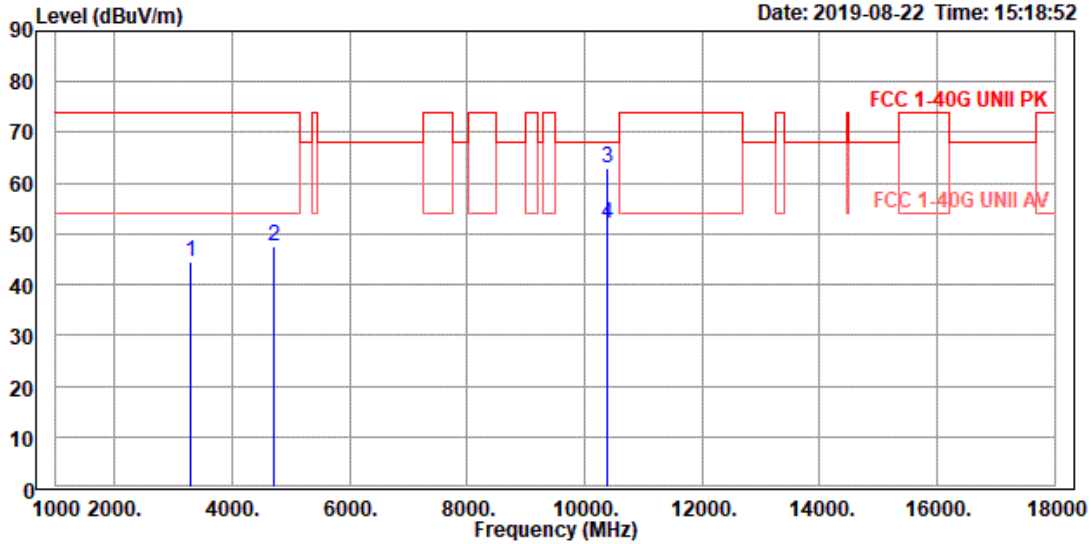


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5200
 Memo : Z

	Read Freq	Read Level	Factor	Level	Limit	Over	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3278.000	49.46	-5.04	44.42	74.00	-29.58	100	285	Peak	
2	4706.000	49.05	-1.65	47.40	74.00	-26.60	100	344	Peak	
3	10400.000	57.33	5.60	62.93	68.00	-5.07	100	43	Peak	
4	10400.000	46.29	5.60	51.89	68.00	-16.11	100	43	Average	

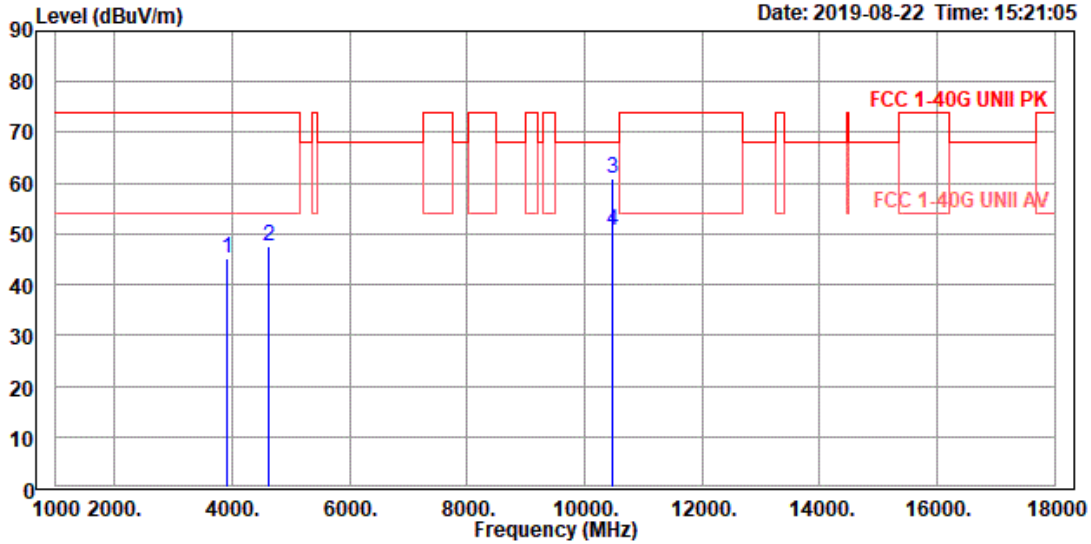


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5240
 Memo : Z

	Read Freq	Read Level	Factor	Level	Limit	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3907.000	49.02	-3.77	45.25	74.00	-28.75	100	259	Peak	
2	4621.000	49.32	-1.80	47.52	74.00	-26.48	100	359	Peak	
3	10480.000	55.34	5.43	60.77	68.00	-7.23	100	252	Peak	
4	10480.000	45.33	5.43	50.76	68.00	-17.24	100	252	Average	

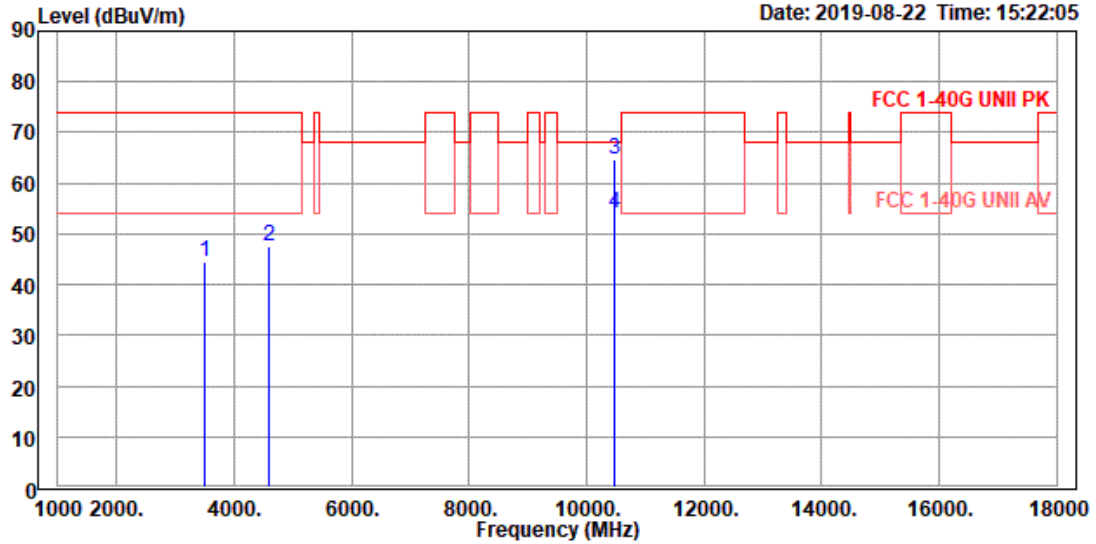


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5240
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	3499.000	49.25	-4.73	44.52	74.00	-29.48	100	332 Peak
2	4604.000	49.35	-1.85	47.50	74.00	-26.50	100	157 Peak
3	10480.000	59.26	5.43	64.69	68.00	-3.31	100	42 Peak
4	10480.000	48.68	5.43	54.11	68.00	-13.89	100	42 Average

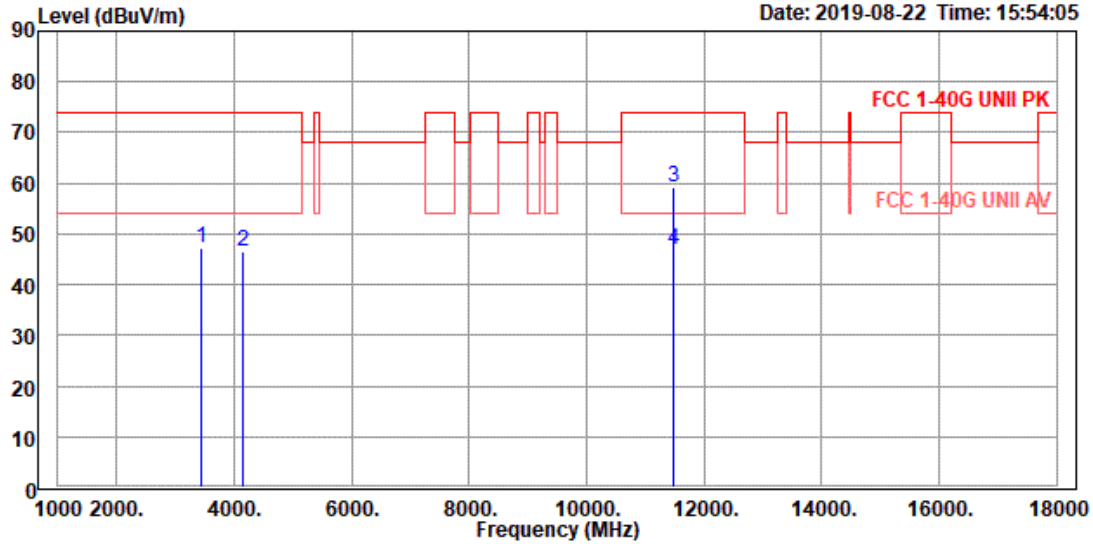


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5745
 Memo : Z

	Read	Limit	Over	APos	TPos	Remark	Note	
Freq	Level	Factor	Level	Line	Limit			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	3448.000	52.05	-4.90	47.15	74.00	-26.85	100	356 Peak
2	4162.000	50.01	-3.36	46.65	74.00	-27.35	100	1 Peak
3	11490.000	53.91	5.44	59.35	74.00	-14.65	100	261 Peak
4	11490.000	41.30	5.44	46.74	54.00	-7.26	100	261 Average

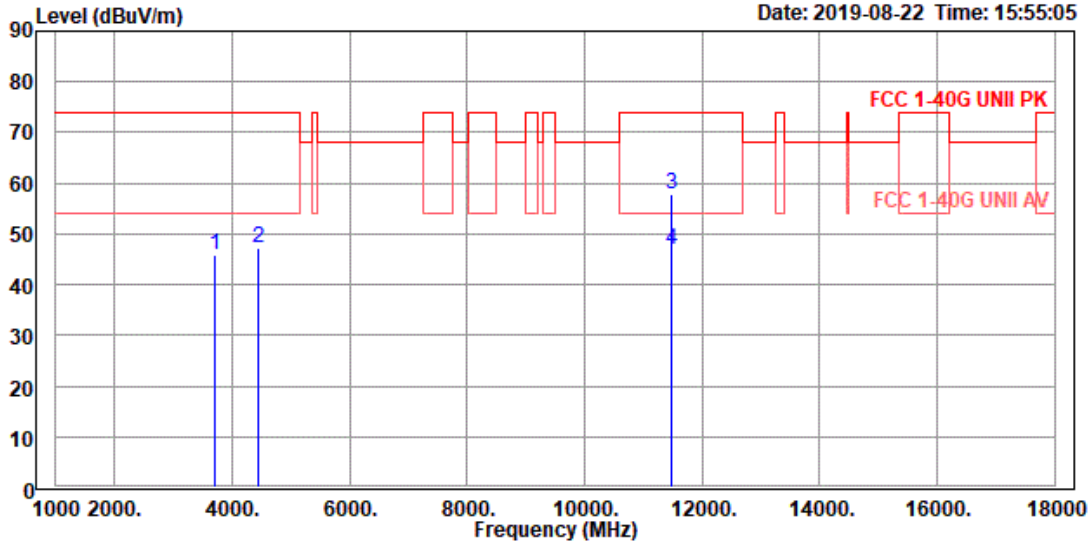


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5745
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	3720.000	50.18	-4.29	45.89	74.00	-28.11	100	149 Peak
2	4451.000	49.49	-2.36	47.13	74.00	-26.87	100	126 Peak
3	11490.000	52.51	5.44	57.95	74.00	-16.05	100	57 Peak
4	11490.000	41.54	5.44	46.98	54.00	-7.02	100	57 Average

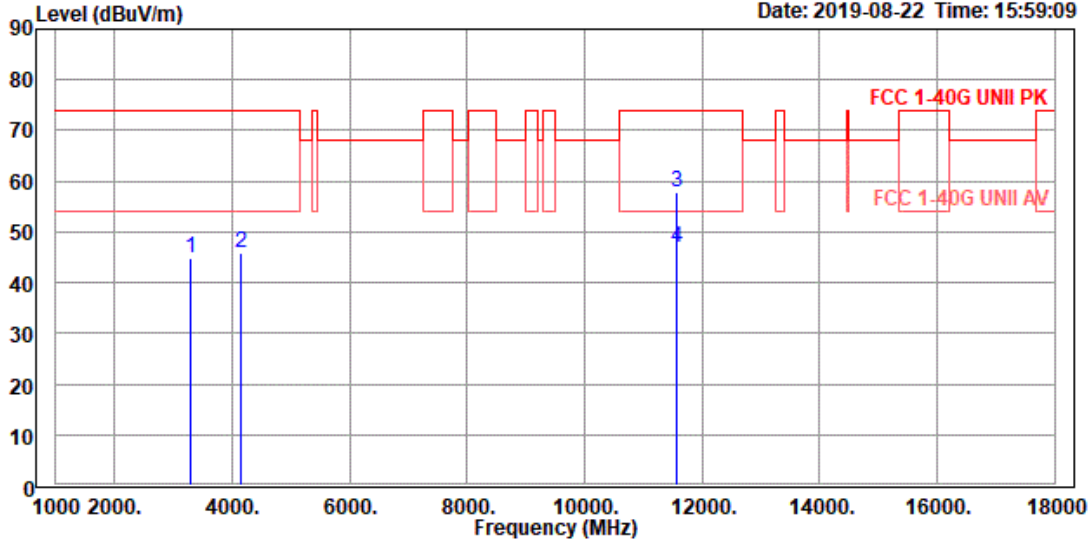


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5785
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	3278.000	49.96	-5.04	44.92	74.00	-29.08	100	337 Peak
2	4162.000	49.36	-3.36	46.00	74.00	-28.00	100	96 Peak
3	11570.000	52.32	5.68	58.00	74.00	-16.00	100	252 Peak
4	11570.000	41.30	5.68	46.98	54.00	-7.02	100	252 Average

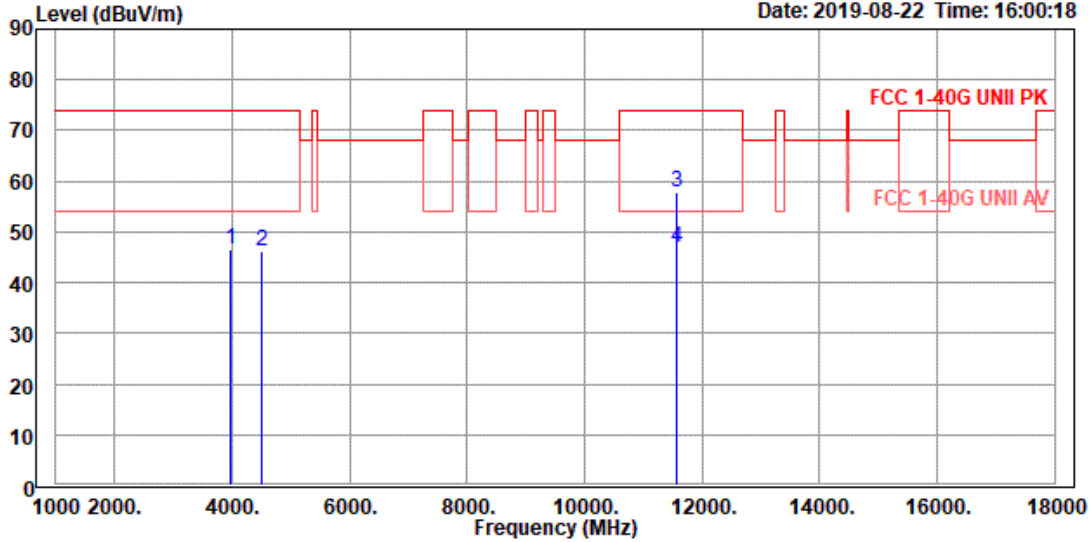


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5785
 Memo : Z

	Read Freq	Read Level	Factor	Level	Limit	Over	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3958.000	50.11	-3.73	46.38	74.00	-27.62	100	151	Peak	
2	4502.000	48.41	-2.16	46.25	74.00	-27.75	100	238	Peak	
3	11570.000	52.13	5.68	57.81	74.00	-16.19	100	57	Peak	
4	11570.000	41.34	5.68	47.02	54.00	-6.98	100	57	Average	

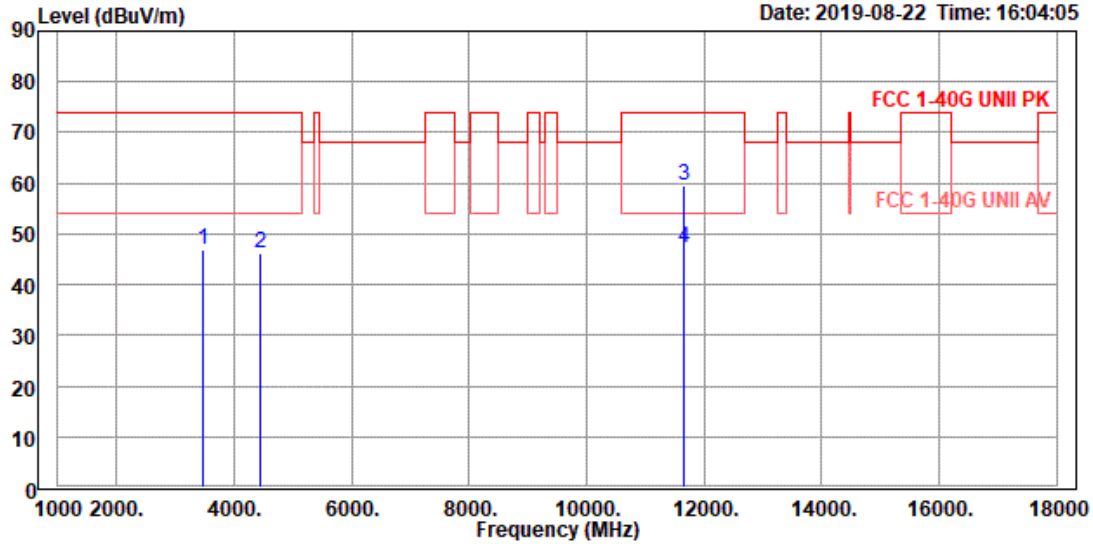


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5825
 Memo : Z

	Read Freq	Read Level	Read Factor	Limit Level	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	3482.000	51.55	-4.79	46.76	74.00	-27.24	100	3 Peak	
2	4451.000	48.64	-2.36	46.28	74.00	-27.72	100	314 Peak	
3	11650.000	53.55	5.99	59.54	74.00	-14.46	100	260 Peak	
4	11650.000	41.38	5.99	47.37	54.00	-6.63	100	260 Average	

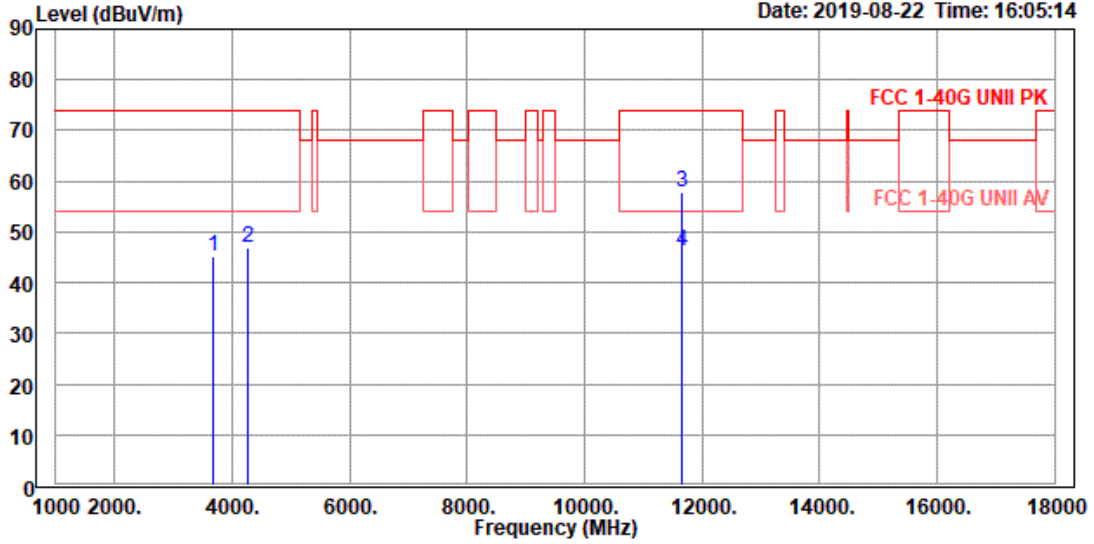


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5825
 Memo : Z

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3686.000	49.58	-4.40	45.18	74.00	-28.82	100	239	Peak	
2	4264.000	50.00	-3.15	46.85	74.00	-27.15	100	13	Peak	
3	11650.000	51.69	5.99	57.68	74.00	-16.32	100	16	Peak	
4	11650.000	40.37	5.99	46.36	54.00	-7.64	100	16	Average	

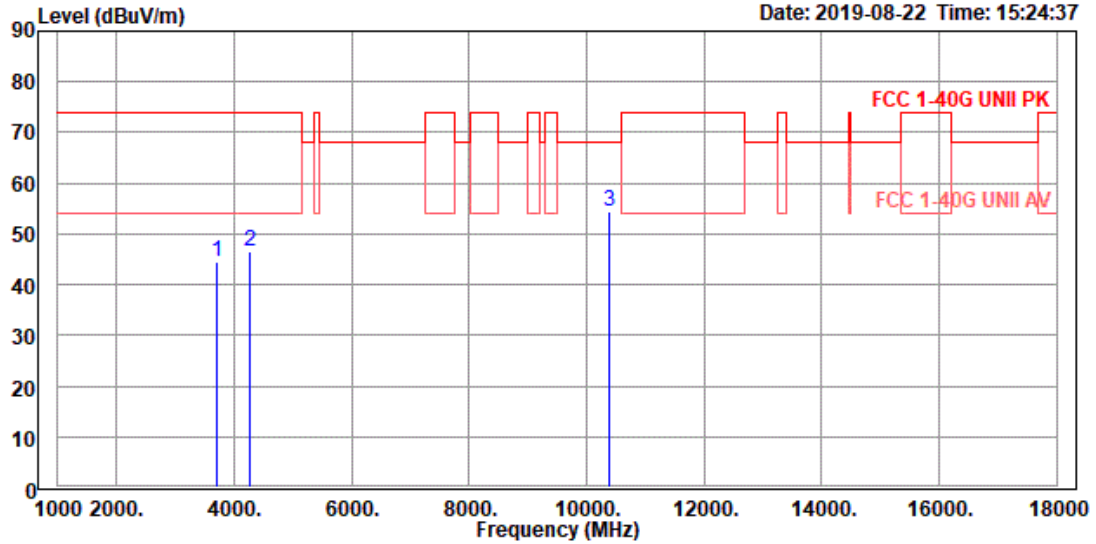


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 20
 Mode : AC40-TX-5190
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	3703.000	48.88	-4.35	44.53	74.00	-29.47	100	0 Peak
2	4264.000	49.73	-3.15	46.58	74.00	-27.42	100	324 Peak
3	10380.000	48.76	5.64	54.40	68.00	-13.60	100	276 Peak

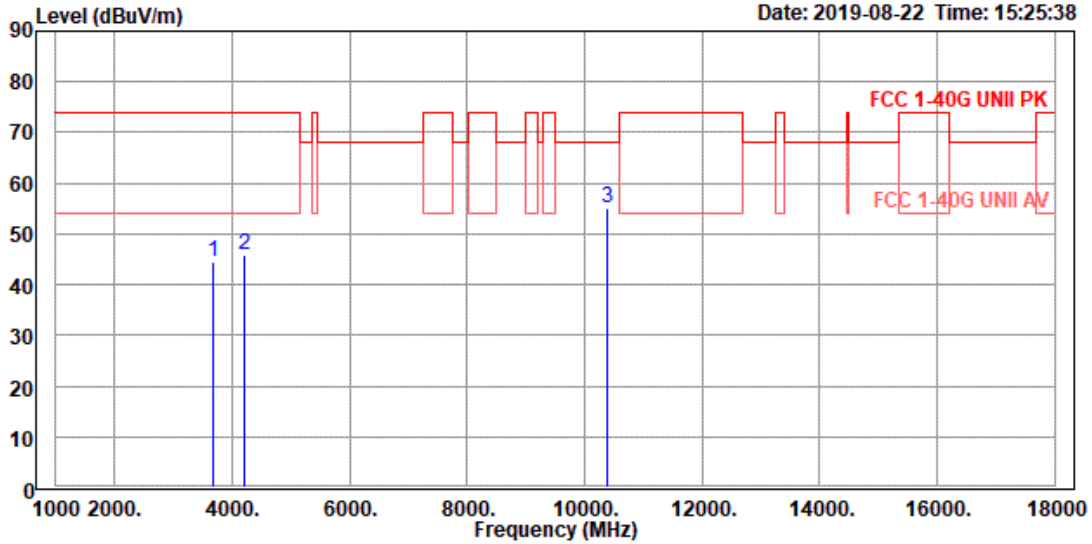


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 20
 Mode : AC40-TX-5190
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	3686.000	48.87	-4.40	44.47	74.00	-29.53	100	260 Peak
2	4213.000	49.21	-3.25	45.96	74.00	-28.04	100	22 Peak
3	10380.000	49.61	5.64	55.25	68.00	-12.75	100	326 Peak

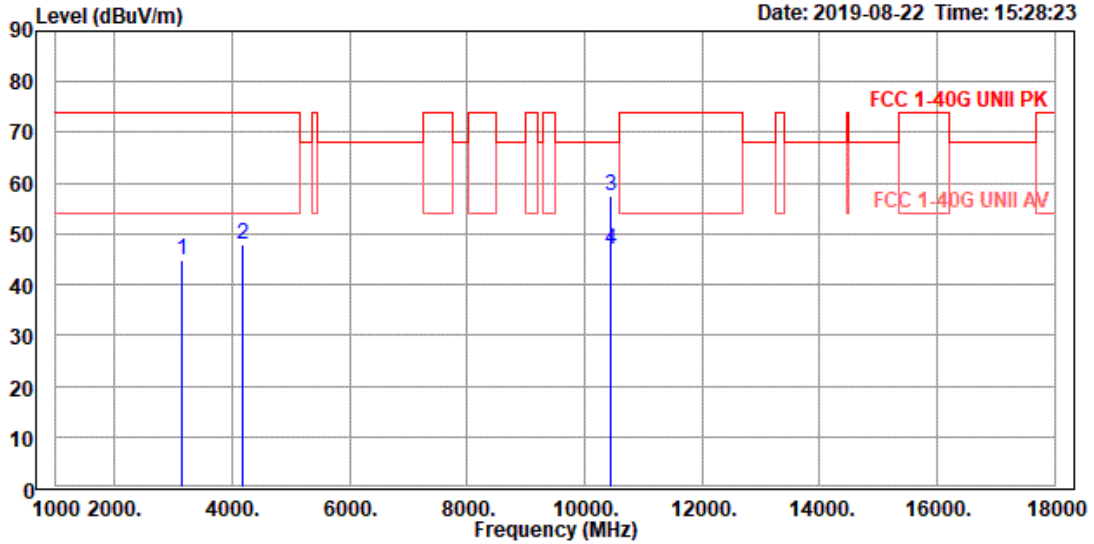


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC40-TX-5230
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	3142.000	49.98	-5.17	44.81	74.00	-29.19	100	97 Peak
2	4179.000	51.24	-3.33	47.91	74.00	-26.09	100	35 Peak
3	10460.000	51.99	5.47	57.46	68.00	-10.54	100	276 Peak
4	10460.000	41.54	5.47	47.01	68.00	-20.99	100	276 Average

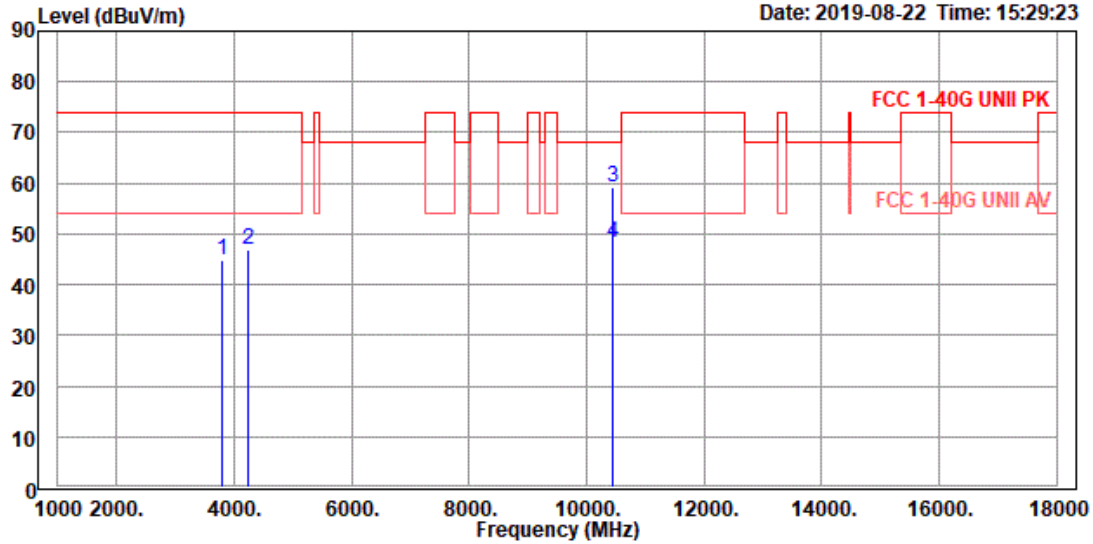


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC40-TX-5230
 Memo : Z

	Freq	Read Level	Factor	Level	Limit	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3805.000	48.78	-4.05	44.73	74.00	-29.27	100	250	Peak	
2	4247.000	50.04	-3.18	46.86	74.00	-27.14	100	146	Peak	
3	10460.000	53.80	5.47	59.27	68.00	-8.73	100	36	Peak	
4	10460.000	42.80	5.47	48.27	68.00	-19.73	100	36	Average	

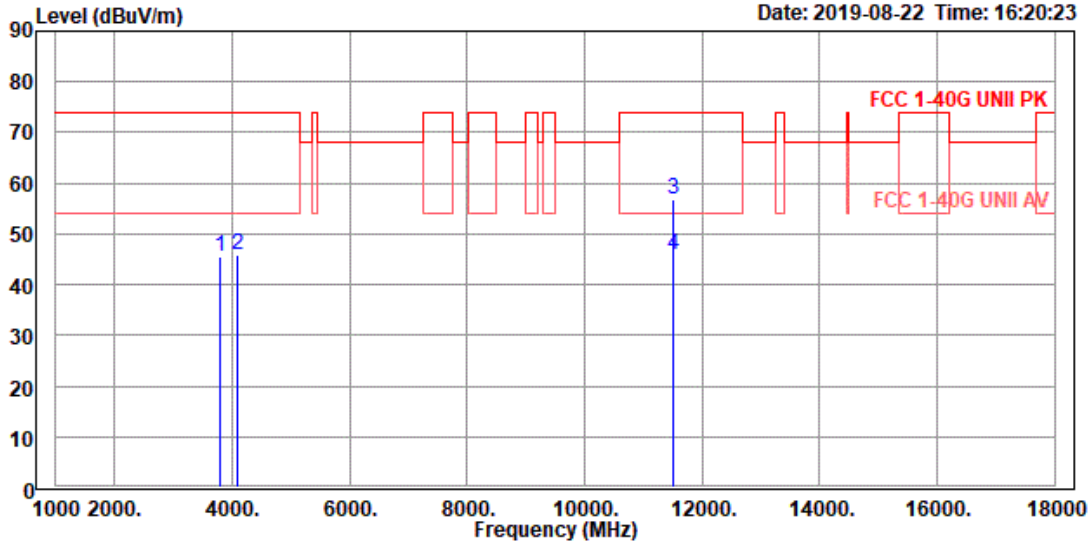


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 29
 Mode : AC40-TX-5755
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	3805.000	49.73	-4.05	45.68	74.00	-28.32	100	255 Peak
2	4094.000	49.40	-3.50	45.90	74.00	-28.10	100	0 Peak
3	11510.000	51.34	5.49	56.83	74.00	-17.17	100	267 Peak
4	11510.000	40.29	5.49	45.78	54.00	-8.22	100	267 Average

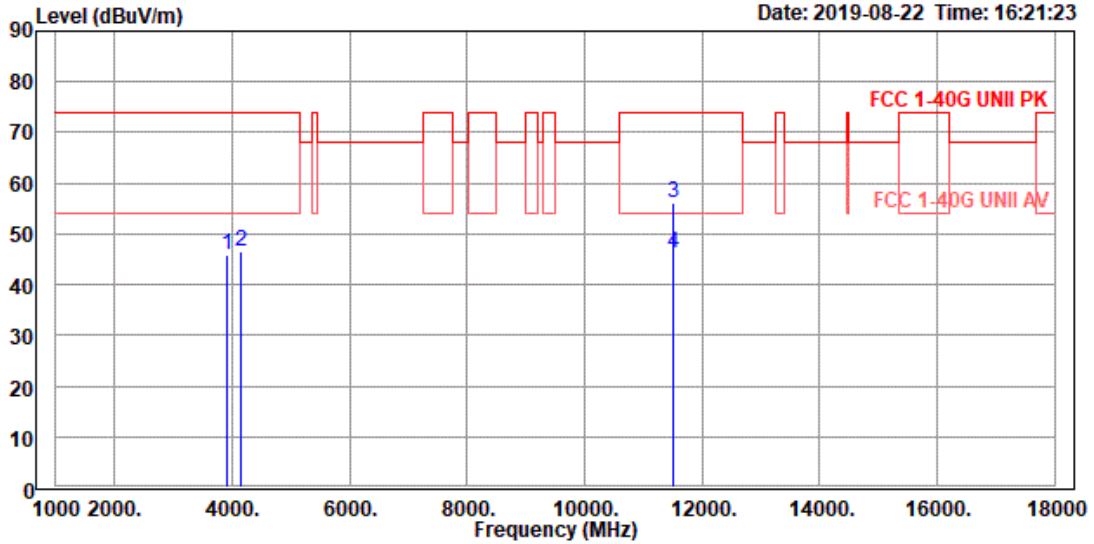


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 29
 Mode : AC40-TX-5755
 Memo : Z

	Read Freq	Read Level	Factor	Level	Limit	Over	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3924.000	49.53	-3.76	45.77	74.00	-28.23	100	354	Peak	
2	4162.000	49.93	-3.36	46.57	74.00	-27.43	100	67	Peak	
3	11510.000	50.54	5.49	56.03	74.00	-17.97	100	360	Peak	
4	11510.000	40.54	5.49	46.03	54.00	-7.97	100	360	Average	

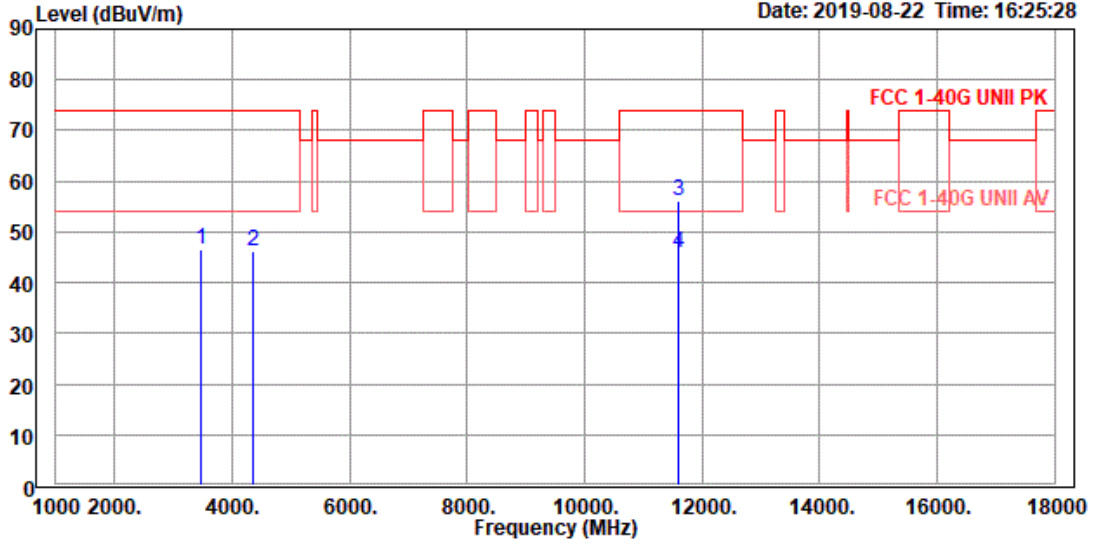


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 29
 Mode : AC40-TX-5795
 Memo : Z

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3482.000	51.18	-4.79	46.39	74.00	-27.61	100	334	Peak	
2	4349.000	48.90	-2.87	46.03	74.00	-27.97	100	295	Peak	
3	11590.000	50.45	5.75	56.20	74.00	-17.80	100	268	Peak	
4	11590.000	40.21	5.75	45.96	54.00	-8.04	100	268	Average	

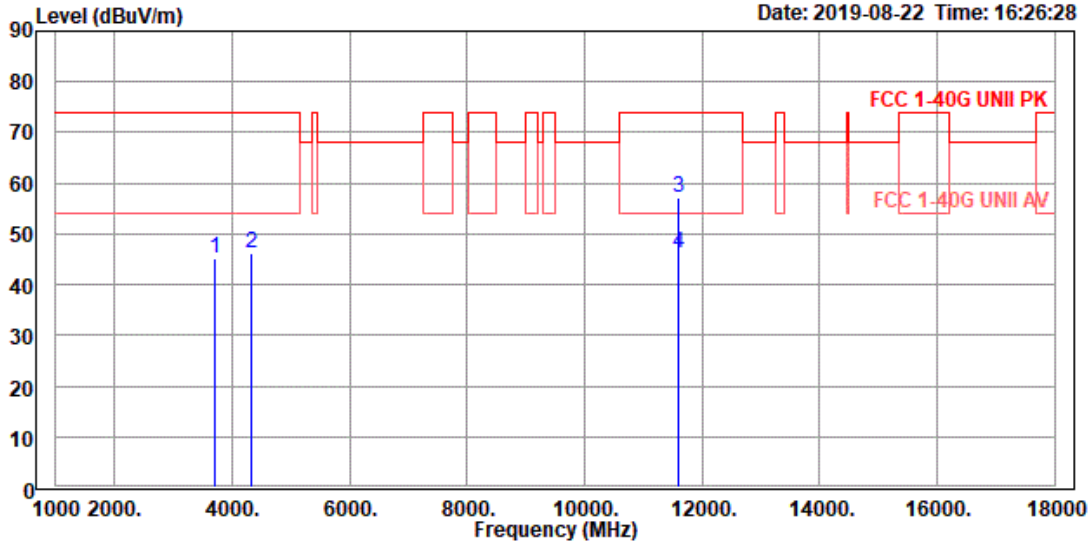


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 29
 Mode : AC40-TX-5795
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	3720.000	49.45	-4.29	45.16	74.00	-28.84	100	193 Peak
2	4332.000	49.18	-2.95	46.23	74.00	-27.77	100	157 Peak
3	11590.000	51.23	5.75	56.98	74.00	-17.02	100	359 Peak
4	11590.000	40.39	5.75	46.14	54.00	-7.86	100	359 Average

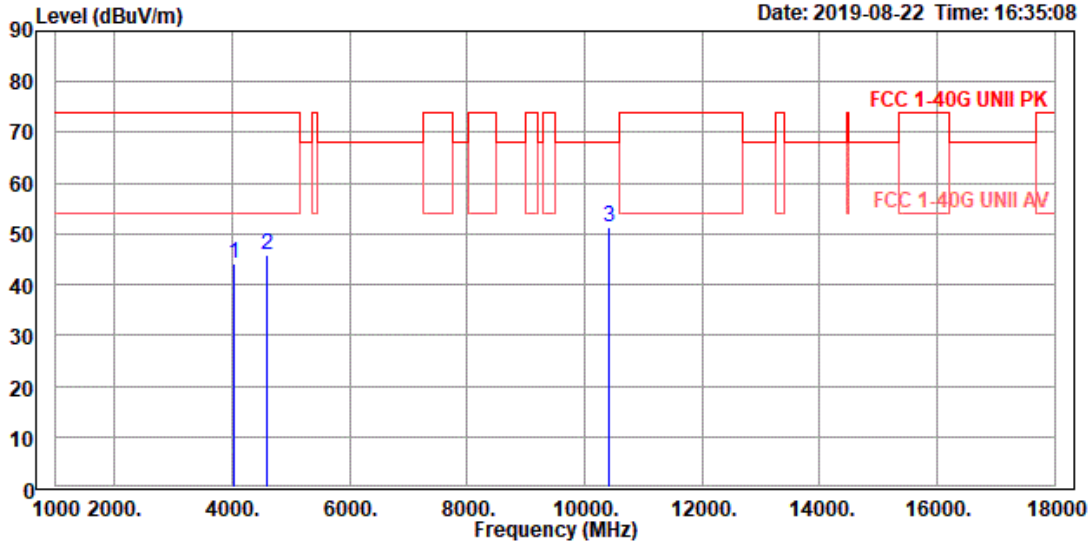


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 19
 Mode : AC80-TX-5210
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	4026.000	47.93	-3.63	44.30	74.00	-29.70	100	151 Peak
2	4587.000	47.67	-1.90	45.77	74.00	-28.23	100	359 Peak
3	10420.000	45.87	5.56	51.43	68.00	-16.57	100	30 Peak

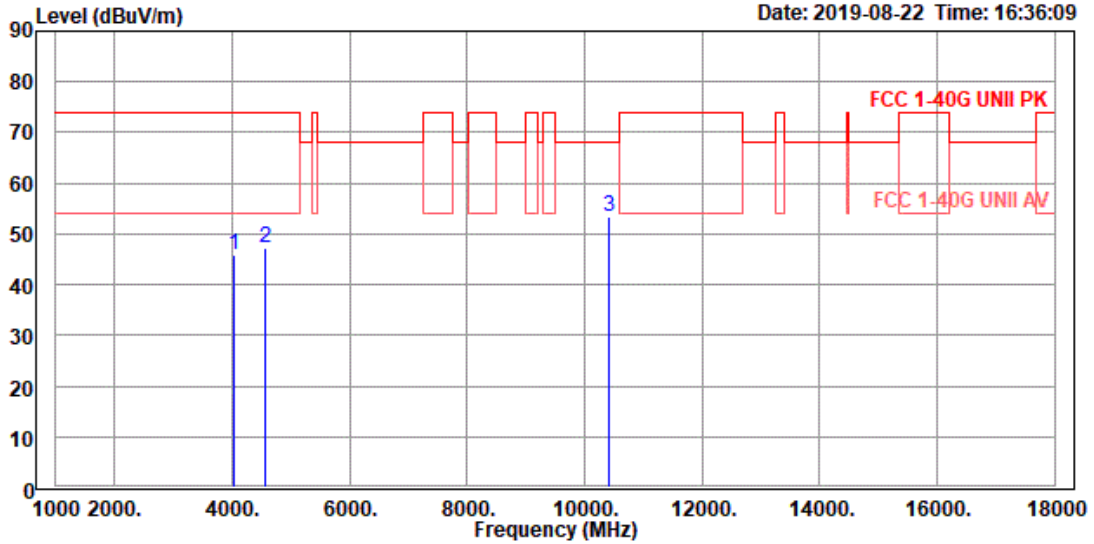


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 19
 Mode : AC80-TX-5210
 Memo : Z

	Read Freq	Read Level	Factor	Level	Limit	Over	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	4043.000	49.61	-3.60	46.01	74.00	-27.99	100	162	Peak	
2	4553.000	49.09	-2.00	47.09	74.00	-26.91	100	146	Peak	
3	10420.000	47.73	5.56	53.29	68.00	-14.71	100	43	Peak	

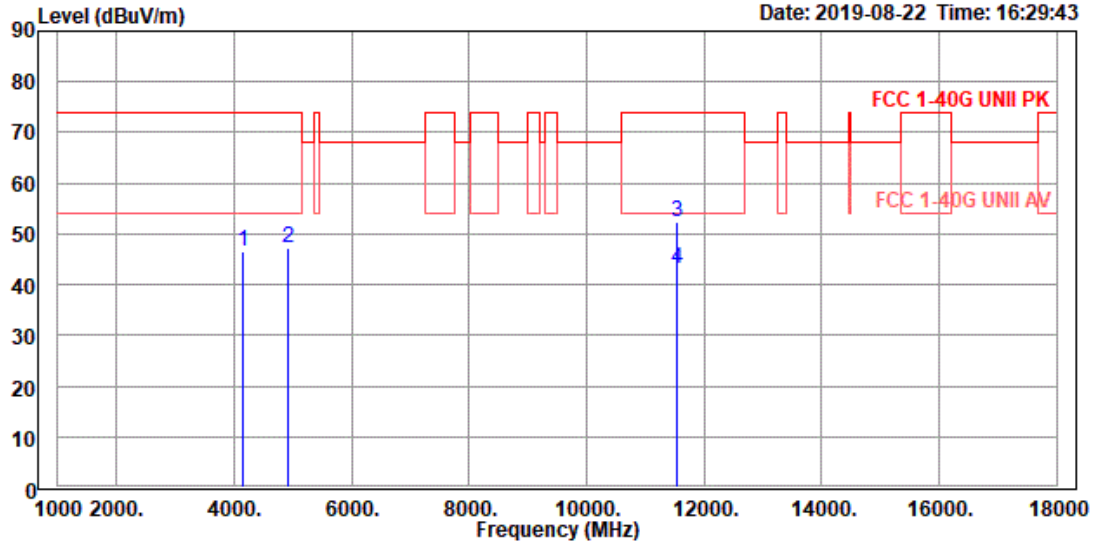

Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 10
 Mode : AC80-TX-5775
 Memo : Z

	Read Freq	Read Level	Factor	Level	Limit	Over	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	4162.000	49.93	-3.36	46.57	74.00	-27.43	100	176	Peak	
2	4910.000	48.53	-1.33	47.20	74.00	-26.80	100	273	Peak	
3	11550.000	46.73	5.62	52.35	74.00	-21.65	100	234	Peak	
4	11550.000	37.45	5.62	43.07	54.00	-10.93	100	234	Average	

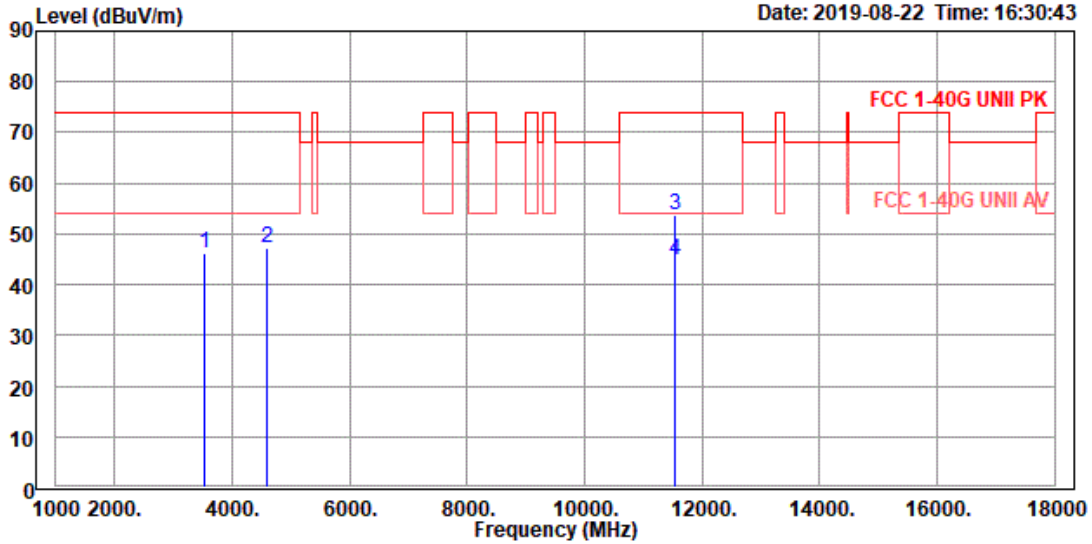


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 10
 Mode : AC80-TX-5775
 Memo : Z

	Read Freq	Read Level	Factor	Level	Limit	Over	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	3533.000	51.01	-4.70	46.31	74.00	-27.69	100	273	Peak	
2	4604.000	49.00	-1.85	47.15	74.00	-26.85	100	7	Peak	
3	11550.000	48.09	5.62	53.71	74.00	-20.29	100	263	Peak	
4	11550.000	39.29	5.62	44.91	54.00	-9.09	100	263	Average	

Spurious Emissions, TX Mode, 18G-40G




TUV Rheinland Taiwan Ltd.
 11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 Fax:+886-2528-0018

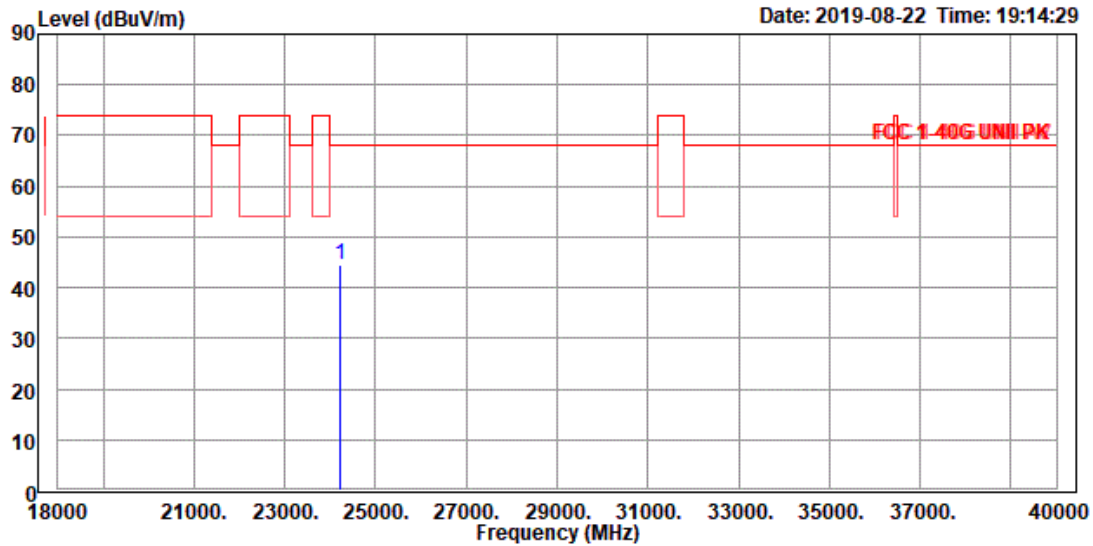


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : A-TX-5180
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 24226.000	43.18	1.36	44.54	68.00	-23.46	100	222	Peak

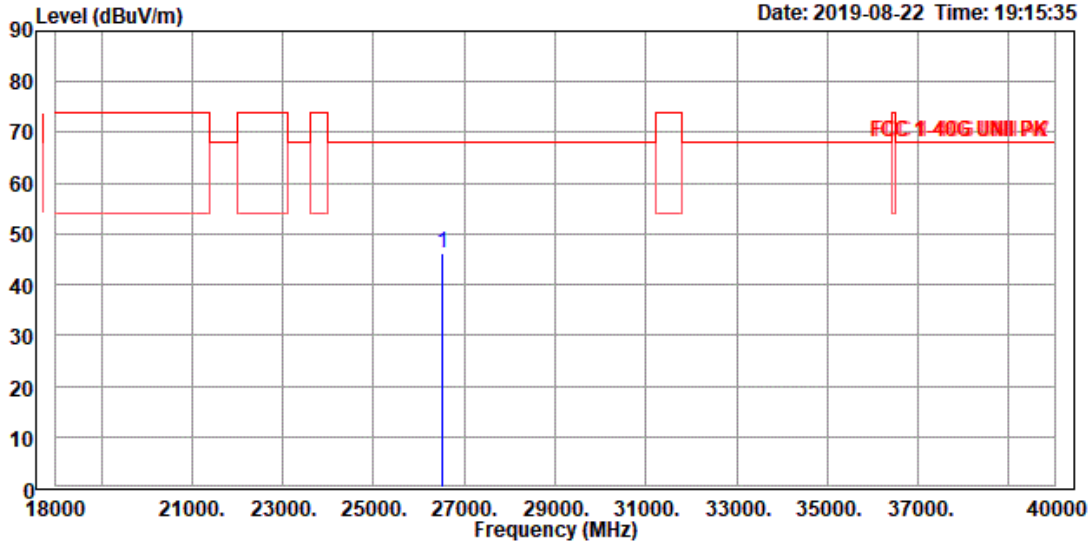


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : A-TX-5180
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 26514.000	43.68	2.35	46.03	68.00	-21.97	100	104	Peak

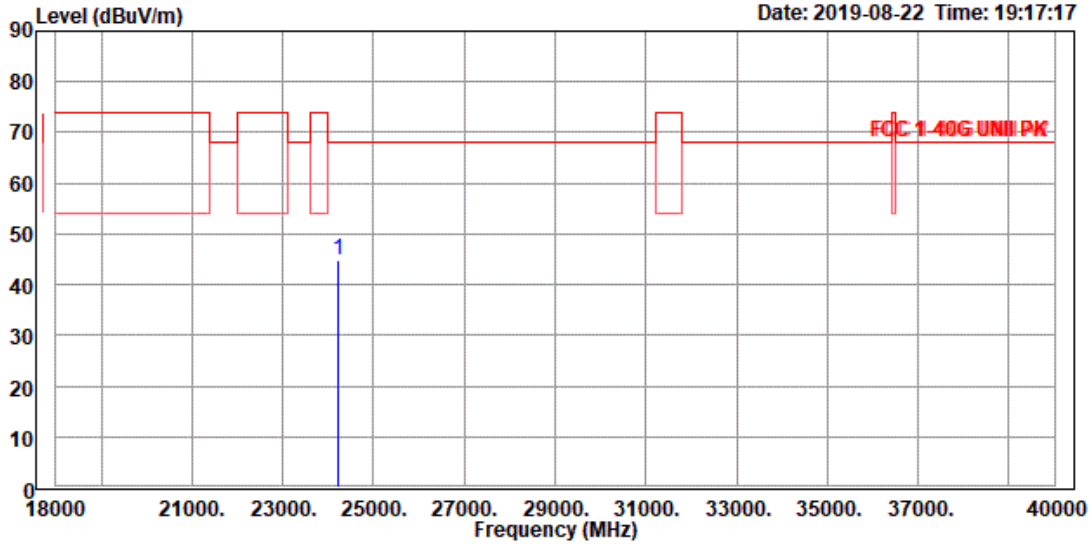


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5200
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 24226.000	43.37	1.36	44.73	68.00	-23.27	100	109 Peak	

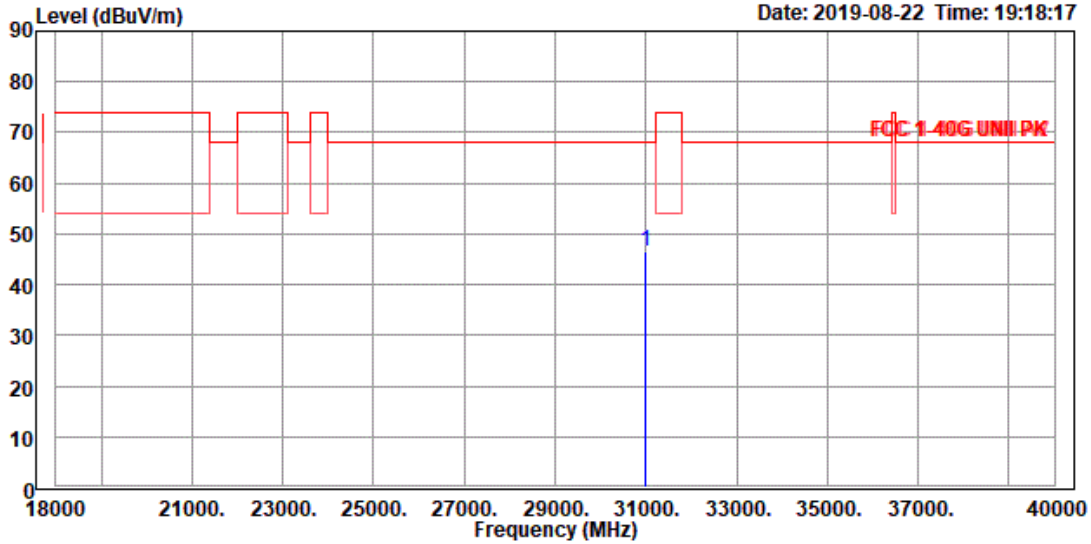


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5200
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 30980.000	44.16	2.40	46.56	68.00	-21.44	100	66 Peak	

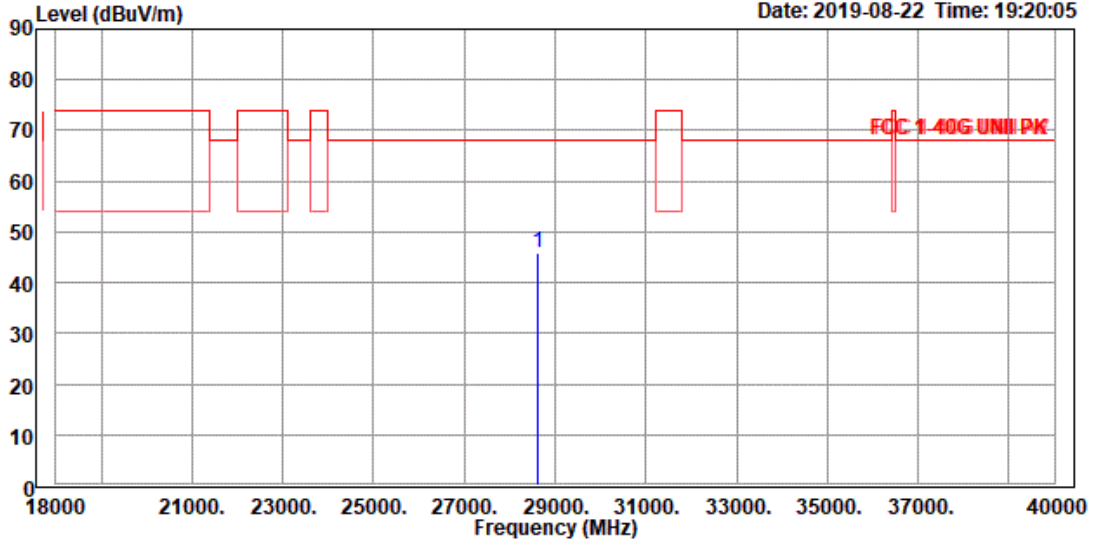


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5240
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 28604.000	43.68	2.08	45.76	68.00	-22.24	100	139 Peak	

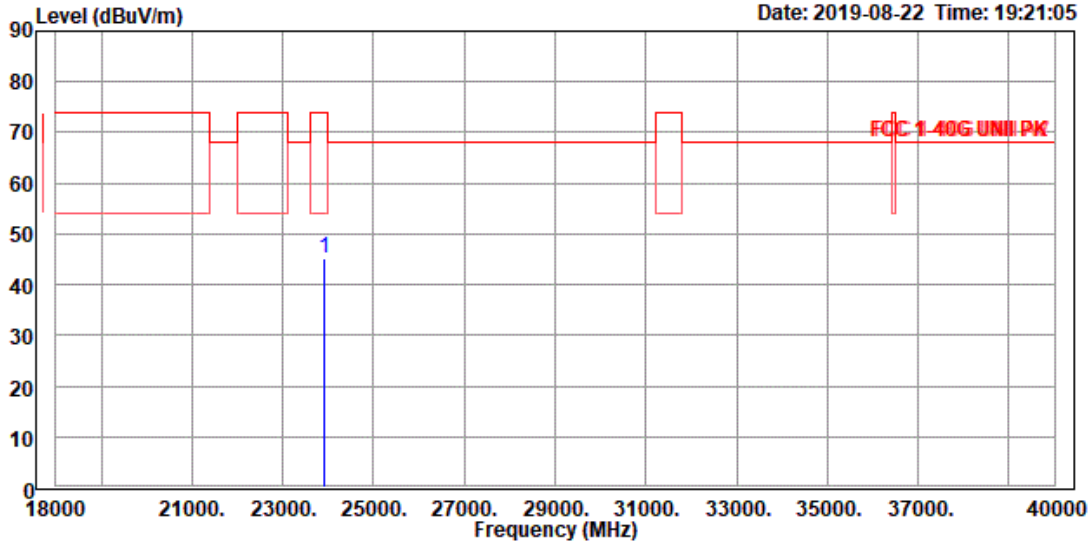


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5240
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 23918.000	43.75	1.37	45.12	74.00	-28.88	100	170	Peak

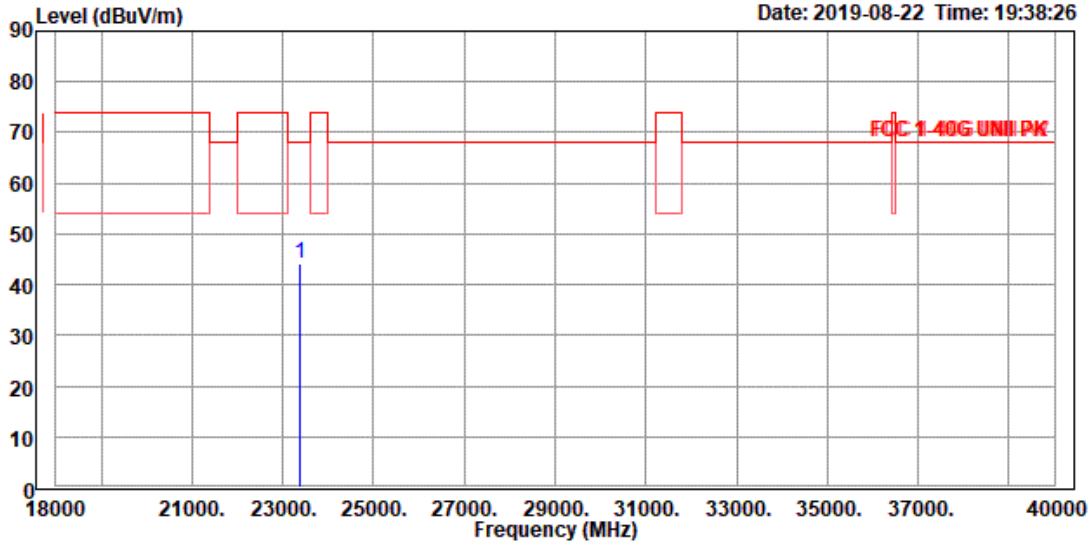


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5745
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 23368.000	43.02	0.99	44.01	68.00	-23.99	100	63 Peak	

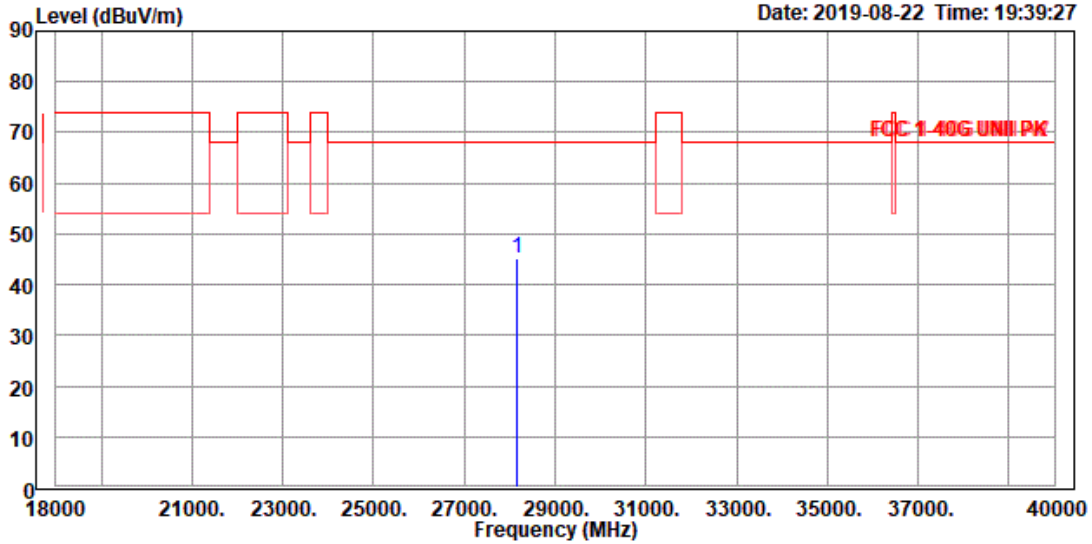


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5745
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 28164.000	43.08	2.06	45.14	68.00	-22.86	100	153	Peak

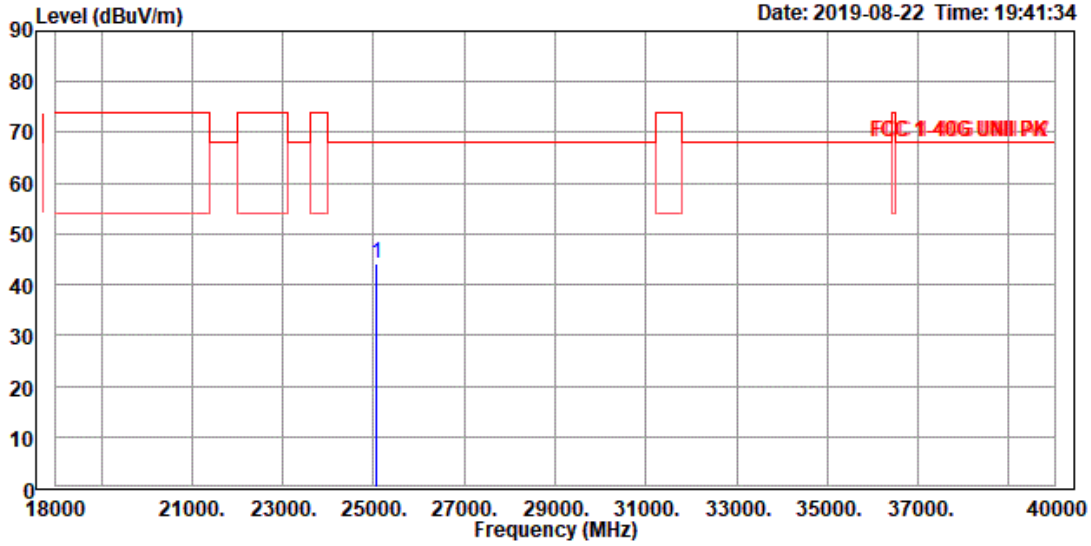


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5785
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 25062.000	42.37	1.77	44.14	68.00	-23.86	100	177 Peak	

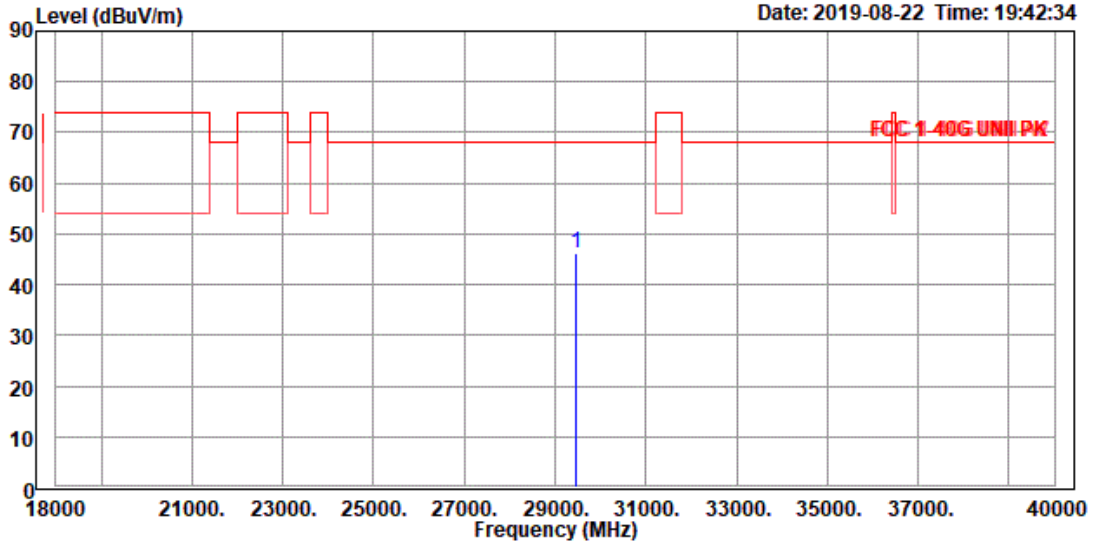


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5785
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 29462.000	44.06	2.22	46.28	68.00	-21.72	100	153 Peak	

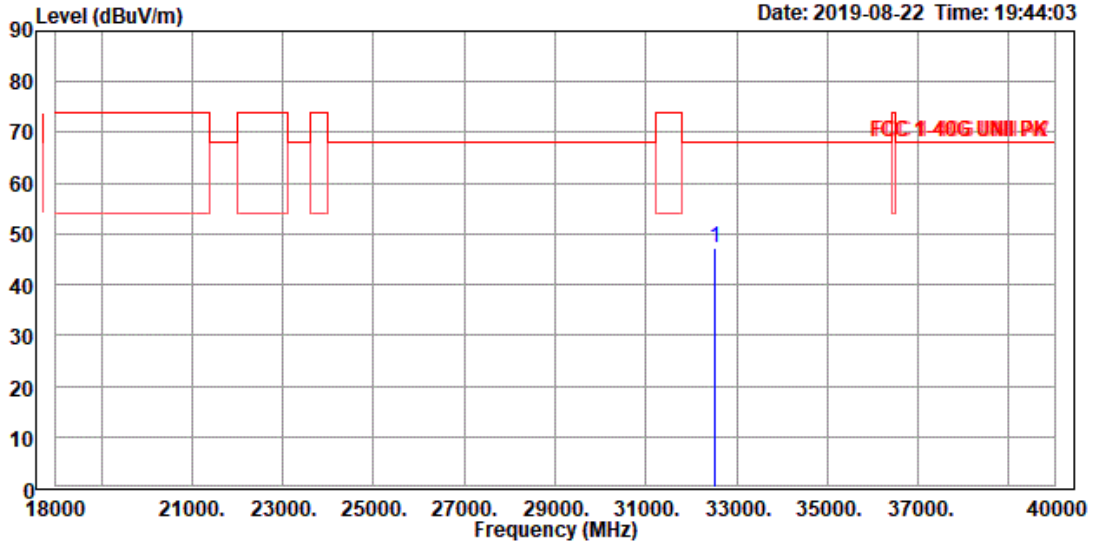


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5825
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 32520.000	43.05	4.18	47.23	68.00	-20.77	100	324 Peak	

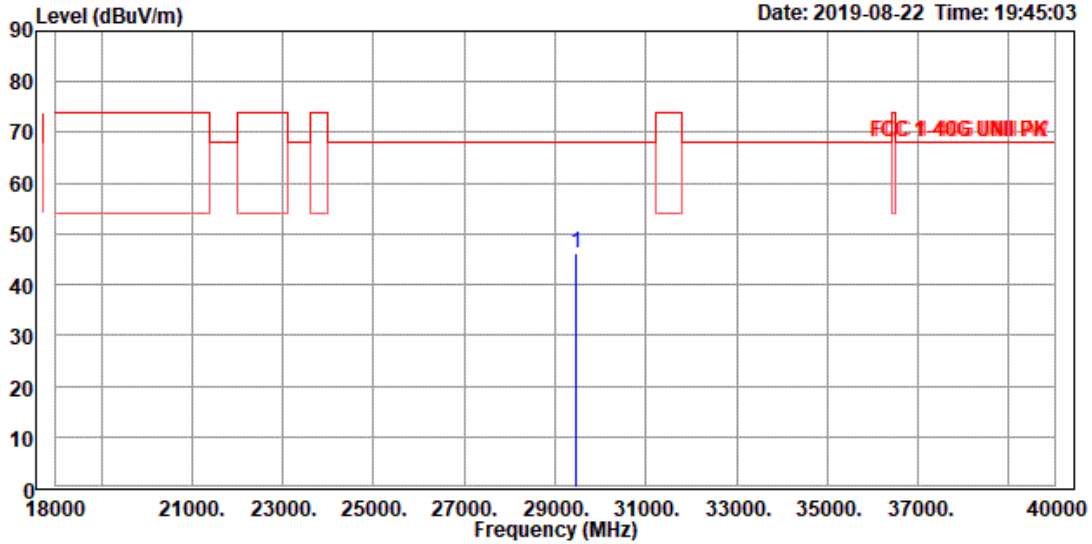


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : A-TX-5825
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 29462.000	44.13	2.22	46.35	68.00	-21.65	100	304 Peak	

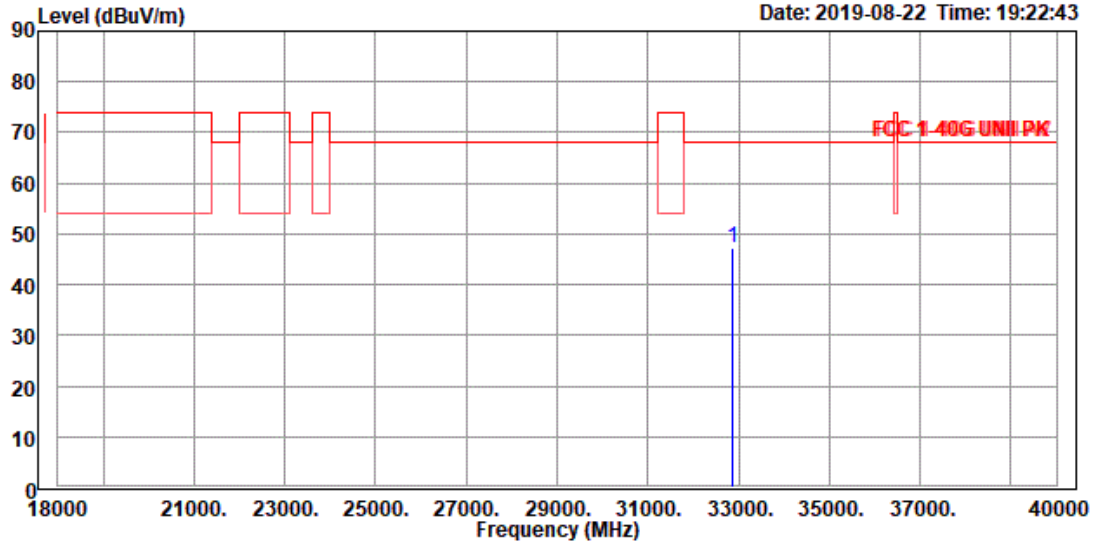


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : AC20-TX-5180
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 32872.000	43.07	4.19	47.26	68.00	-20.74	100	1 Peak	

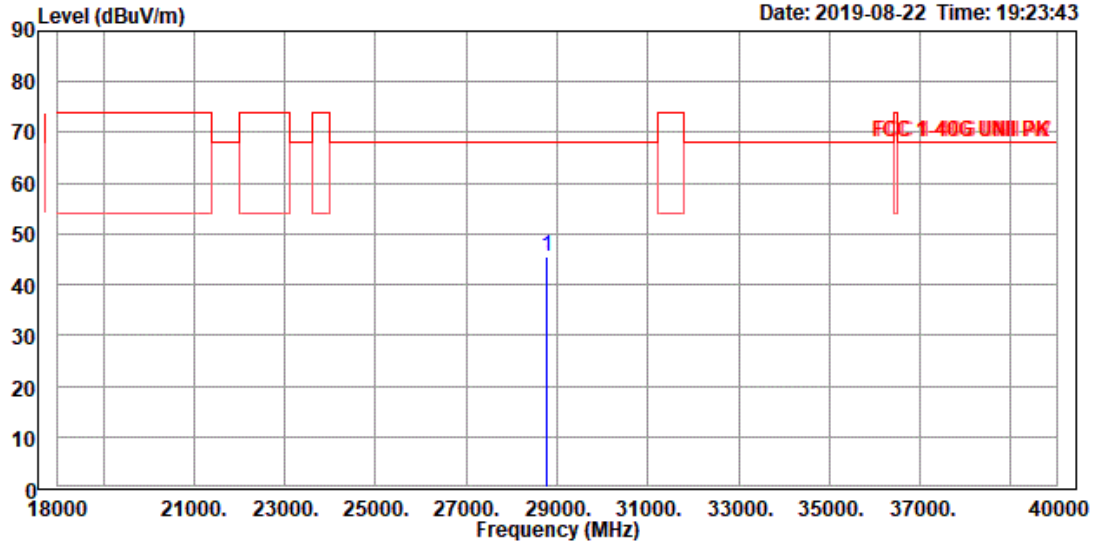


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : AC20-TX-5180
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 28758.000	43.75	1.93	45.68	68.00	-22.32	100	147 Peak	

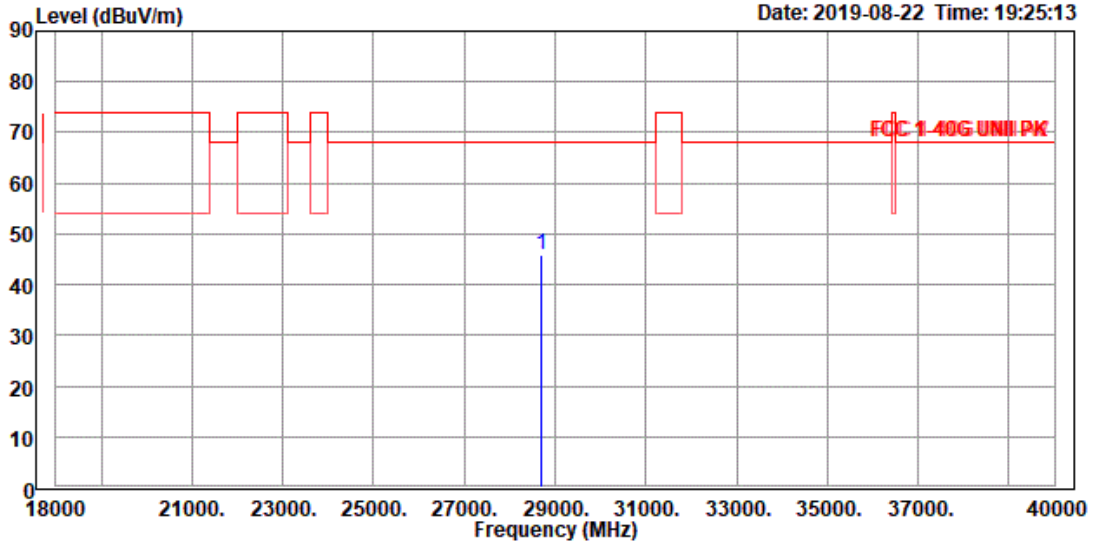


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5200
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 28692.000	43.72	1.99	45.71	68.00	-22.29	100	359	Peak

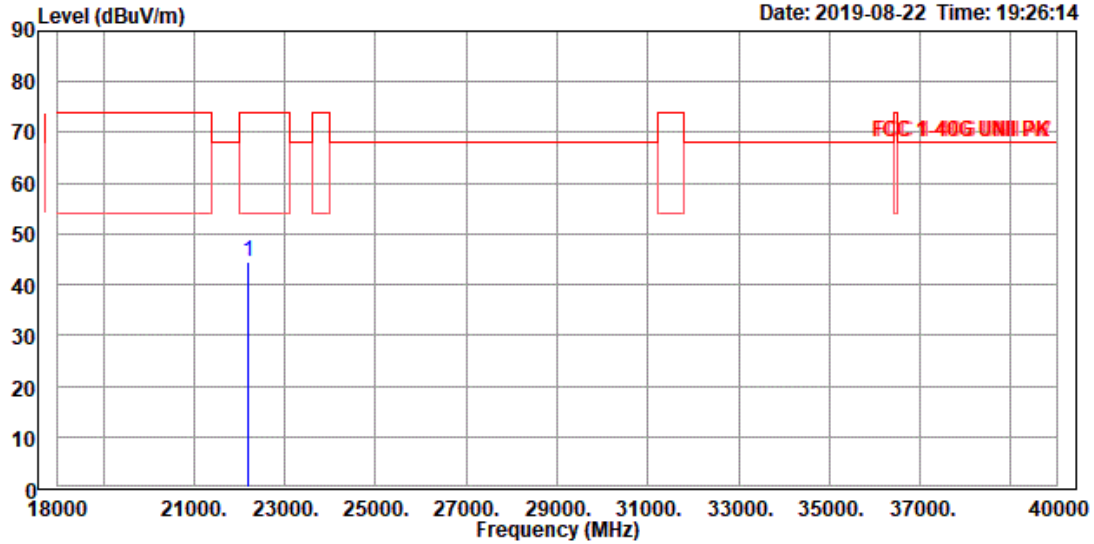


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5200
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 22180.000	44.40	-0.07	44.33	74.00	-29.67	100	170	Peak

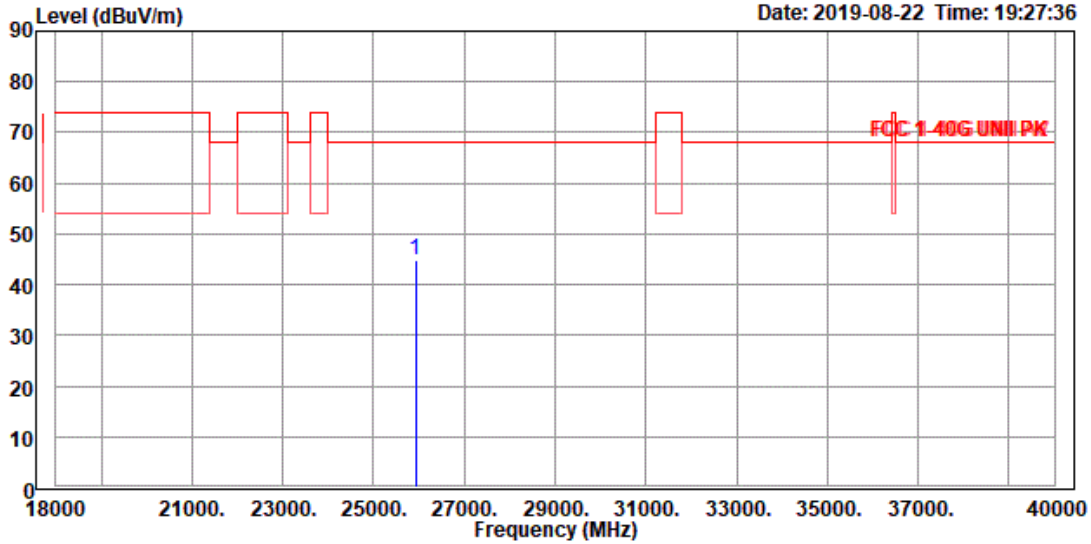


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5240
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 25920.000	42.57	2.25	44.82	68.00	-23.18	100	225	Peak

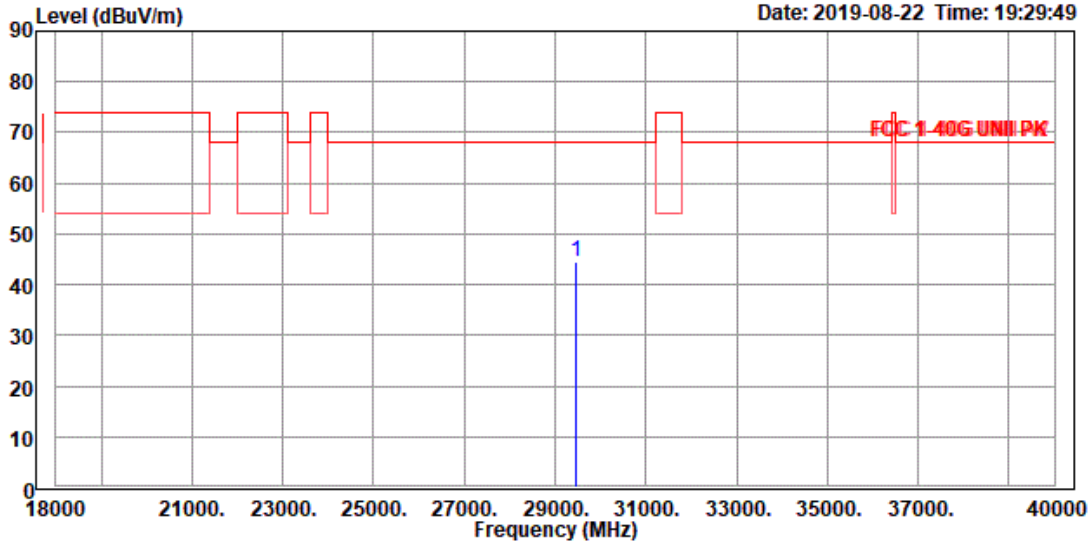


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5240
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 29462.000	42.21	2.22	44.43	68.00	-23.57	100	352	Peak

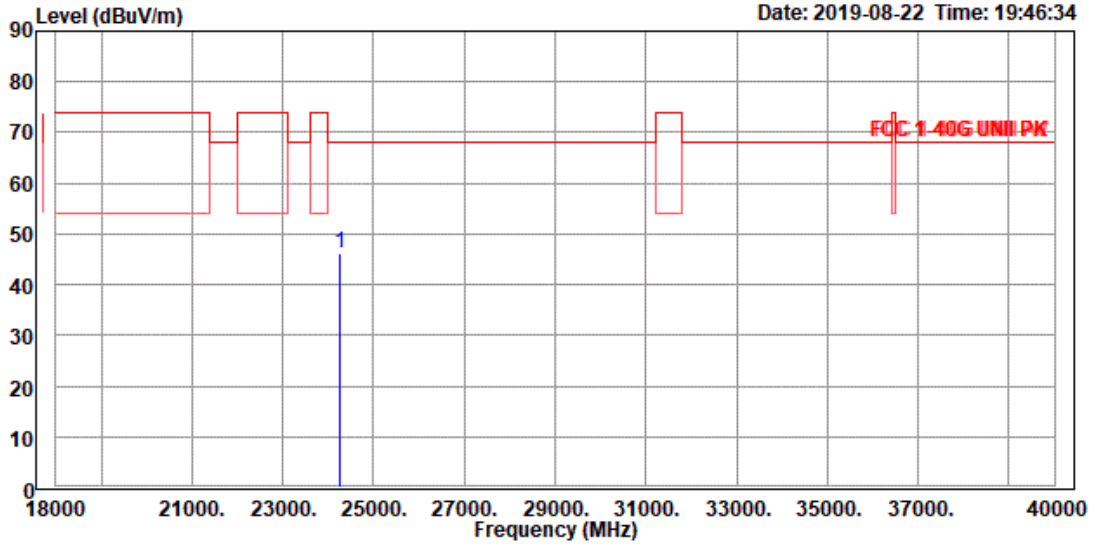


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5745
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 24270.000	44.90	1.35	46.25	68.00	-21.75	100	93 Peak	

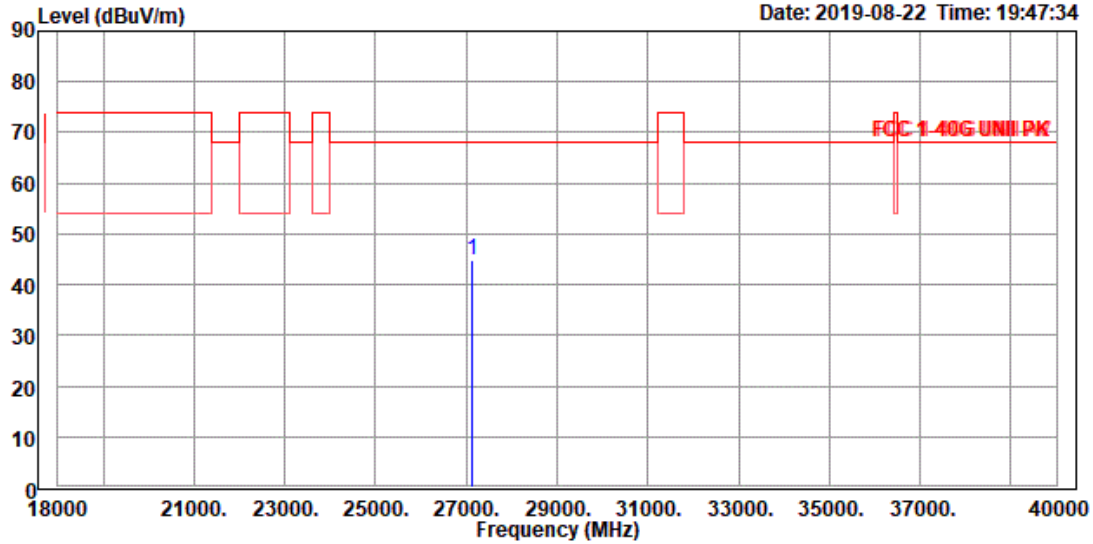


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5745
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 27108.000	42.44	2.37	44.81	68.00	-23.19	100	276 Peak	

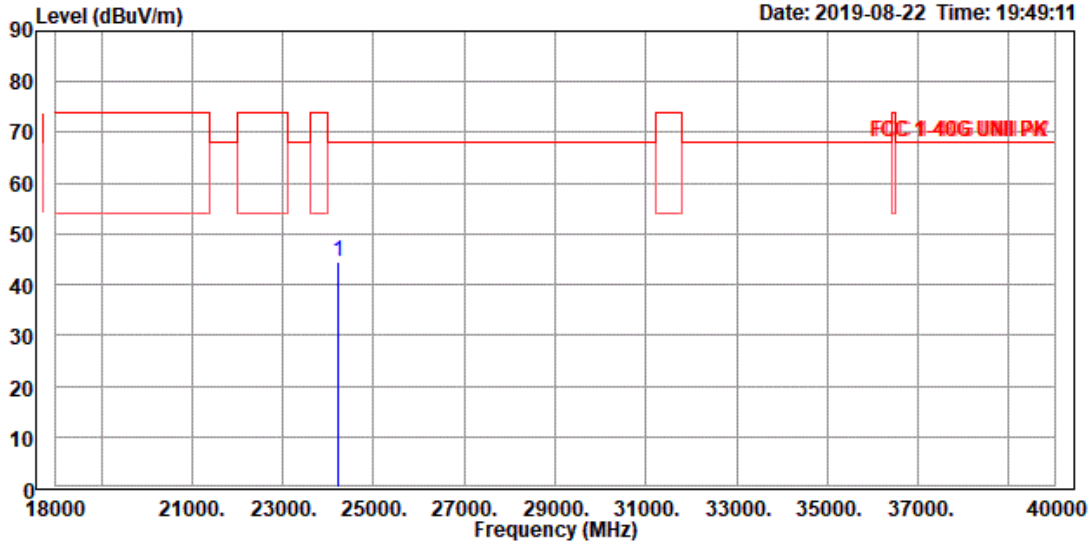


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5785
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 24226.000	42.98	1.36	44.34	68.00	-23.66	100	118	Peak

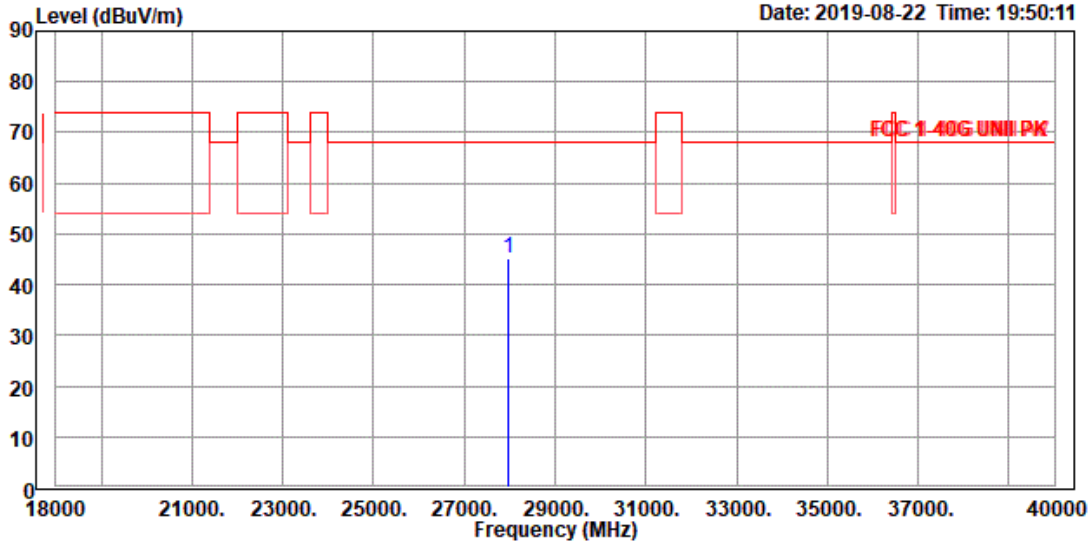


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5785
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 27966.000	42.91	2.27	45.18	68.00	-22.82	100	84	Peak

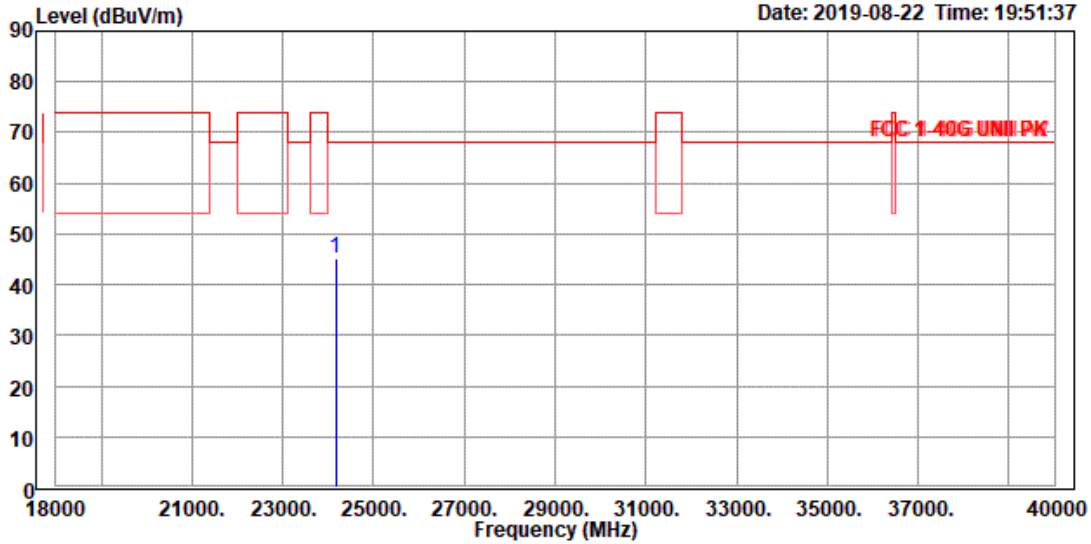


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5825
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 24160.000	43.76	1.39	45.15	68.00	-22.85	100	0 Peak	

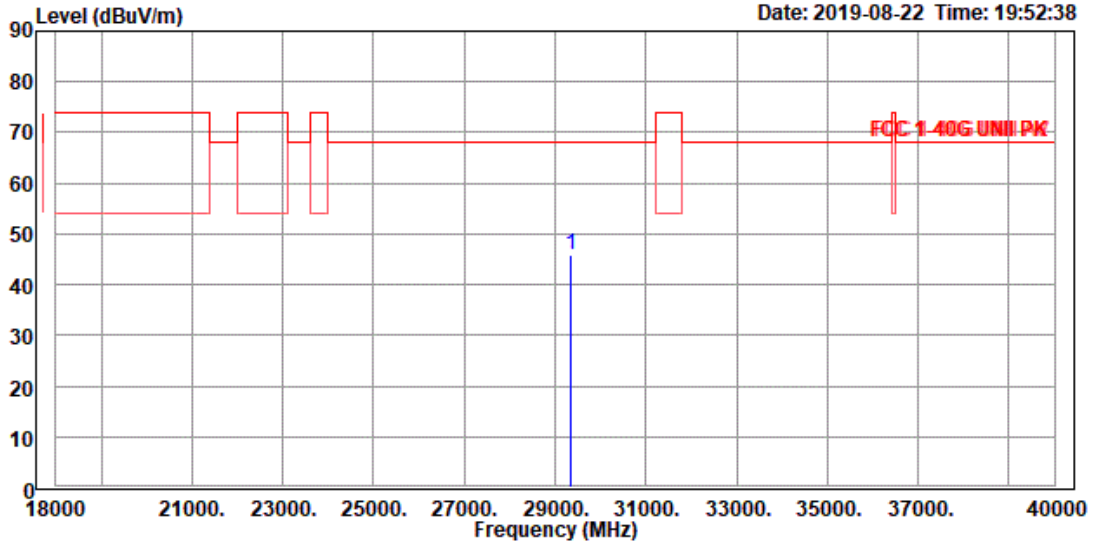


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC20-TX-5825
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 29352.000	43.96	2.01	45.97	68.00	-22.03	100	142 Peak	

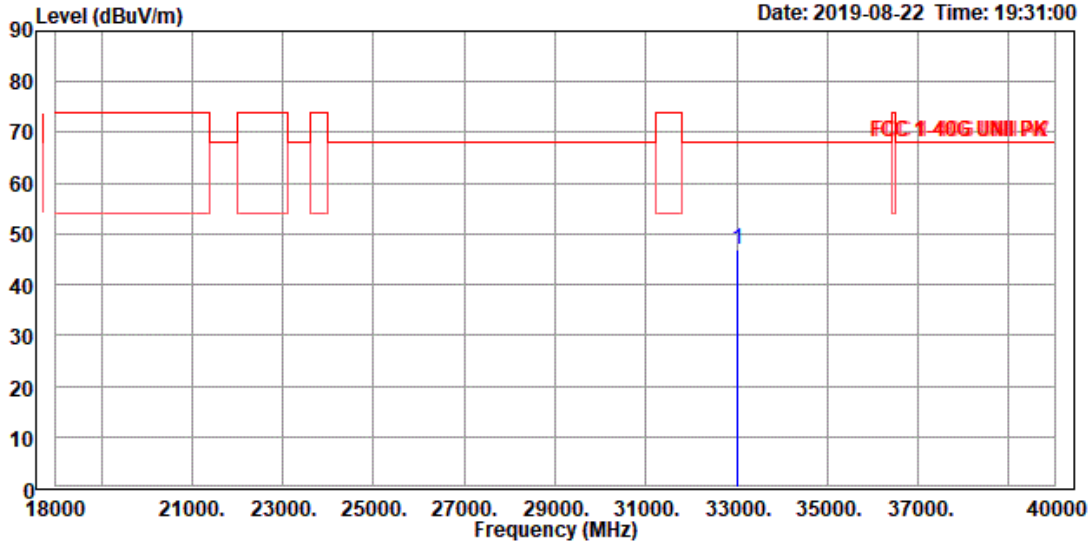


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 20
 Mode : AC40-TX-5190
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 33026.000	42.84	4.14	46.98	68.00	-21.02	100	353 Peak	

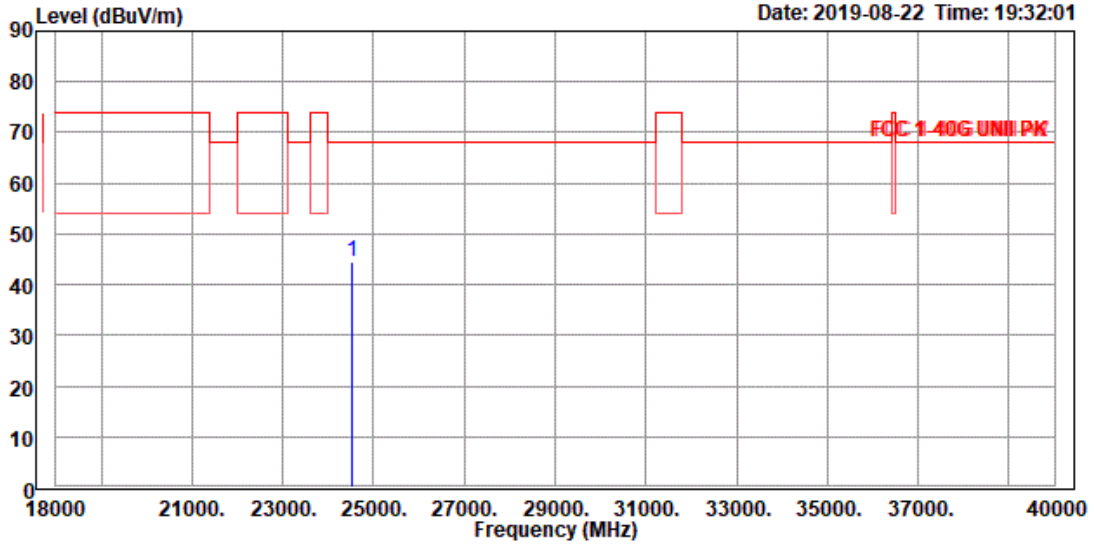


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 20
 Mode : AC40-TX-5190
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 24512.000	43.03	1.35	44.38	68.00	-23.62	100	104	Peak

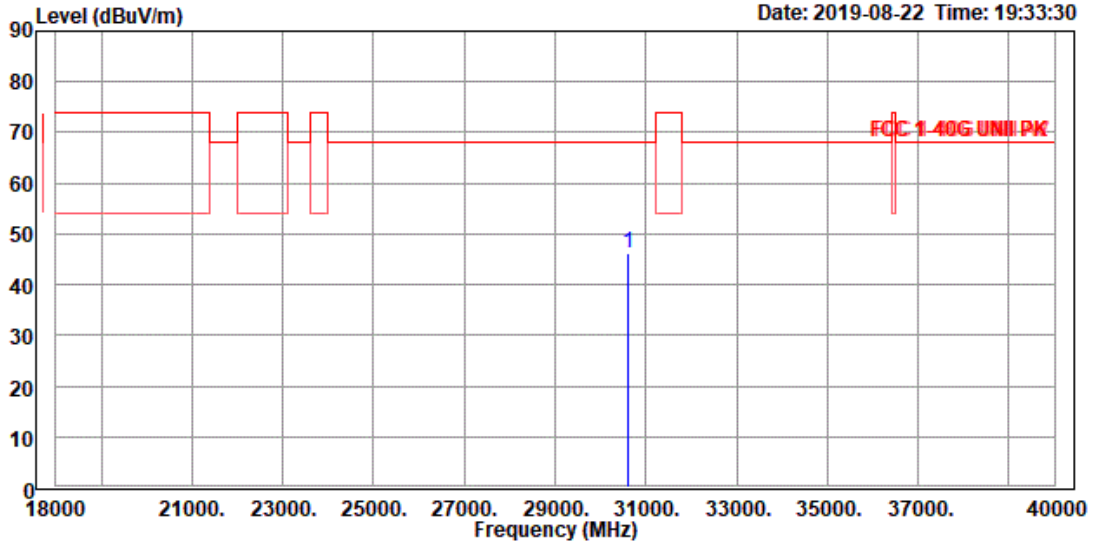


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC40-TX-5230
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 30606.000	43.50	2.53	46.03	68.00	-21.97	100	142 Peak	

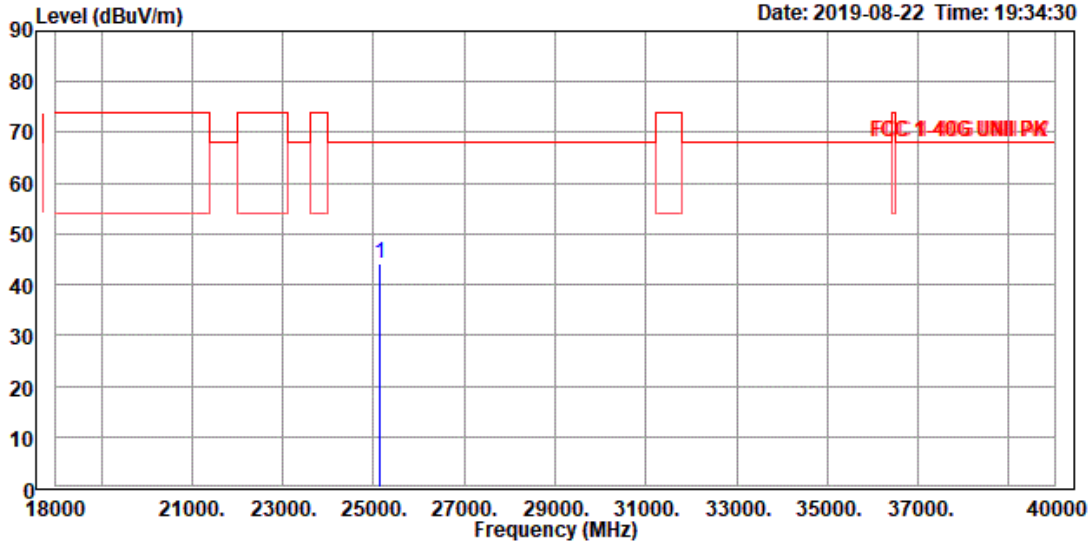


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 27
 Mode : AC40-TX-5230
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 25150.000	42.44	1.80	44.24	68.00	-23.76	100	141 Peak	

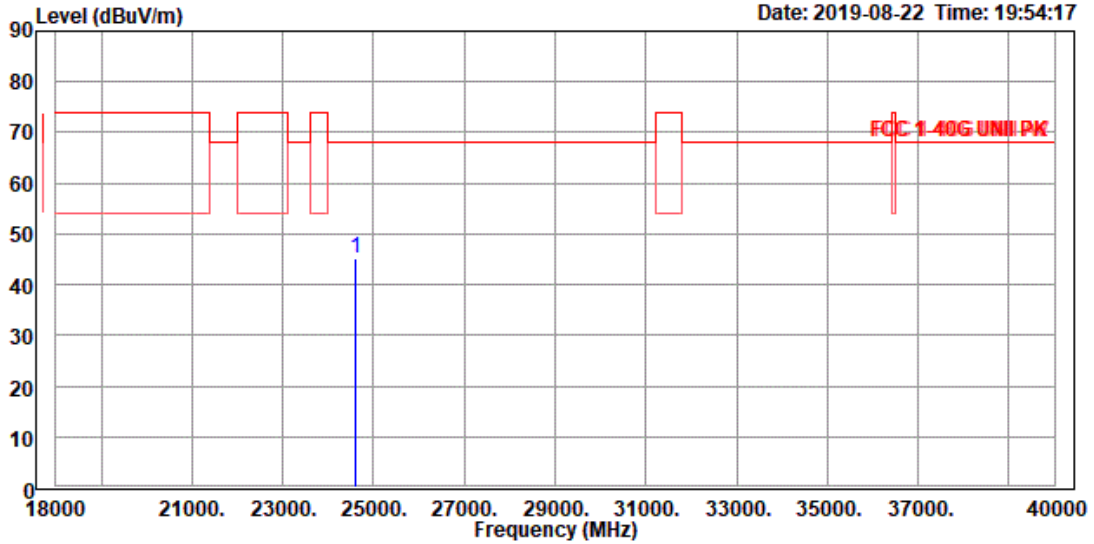


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 29
 Mode : AC40-TX-5755
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 24600.000	43.65	1.37	45.02	68.00	-22.98	100	126 Peak	

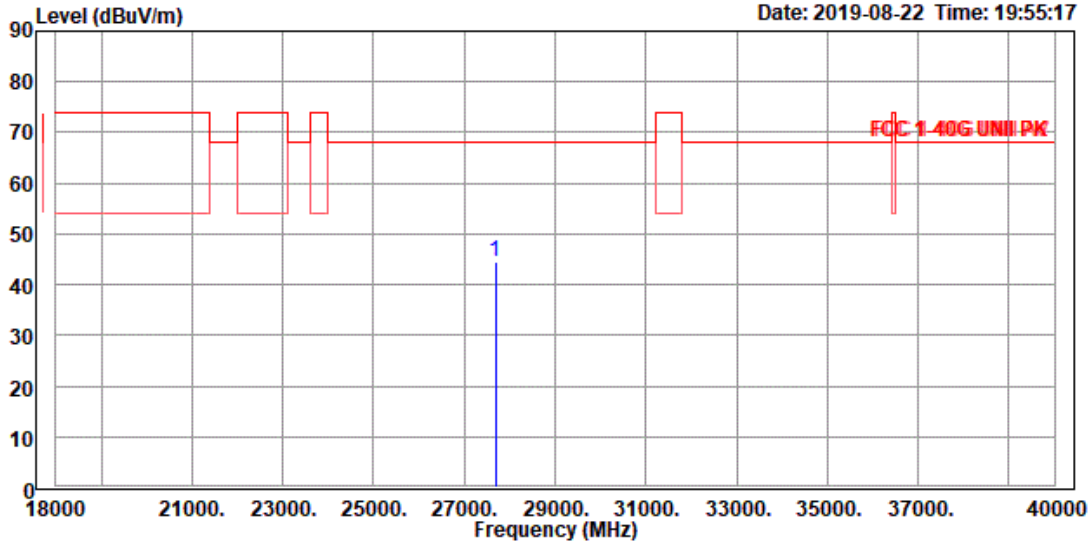


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 29
 Mode : AC40-TX-5755
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 27680.000	42.34	2.28	44.62	68.00	-23.38	100	2 Peak	

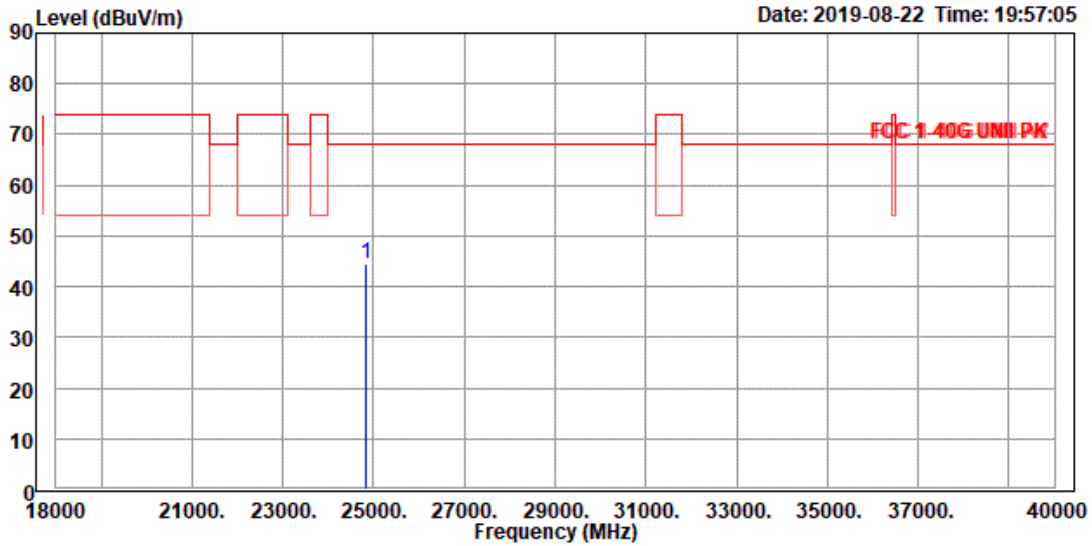


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 29
 Mode : AC40-TX-5795
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 24820.000	42.84	1.49	44.33	68.00	-23.67	100	129 Peak	

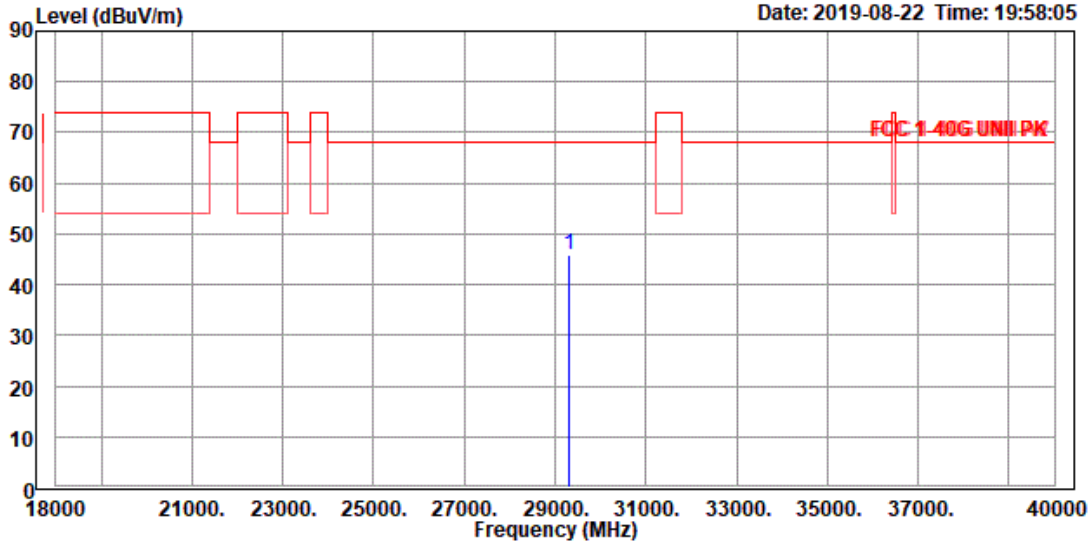


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 29
 Mode : AC40-TX-5795
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 29308.000	43.78	1.93	45.71	68.00	-22.29	100	130	Peak

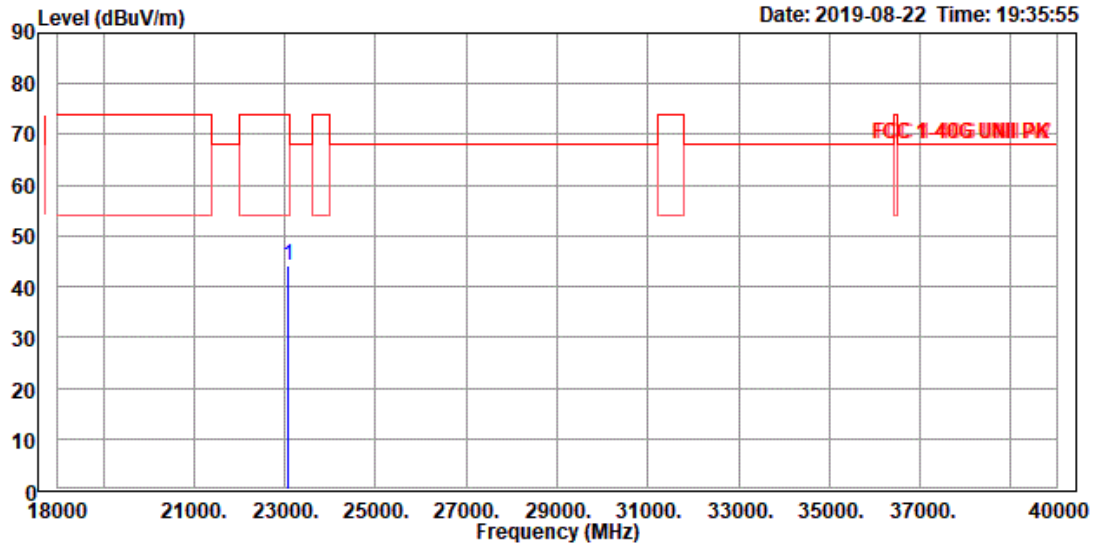


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 19
 Mode : AC80-TX-5210
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 23082.000	43.53	0.77	44.30	74.00	-29.70	100	103 Peak	

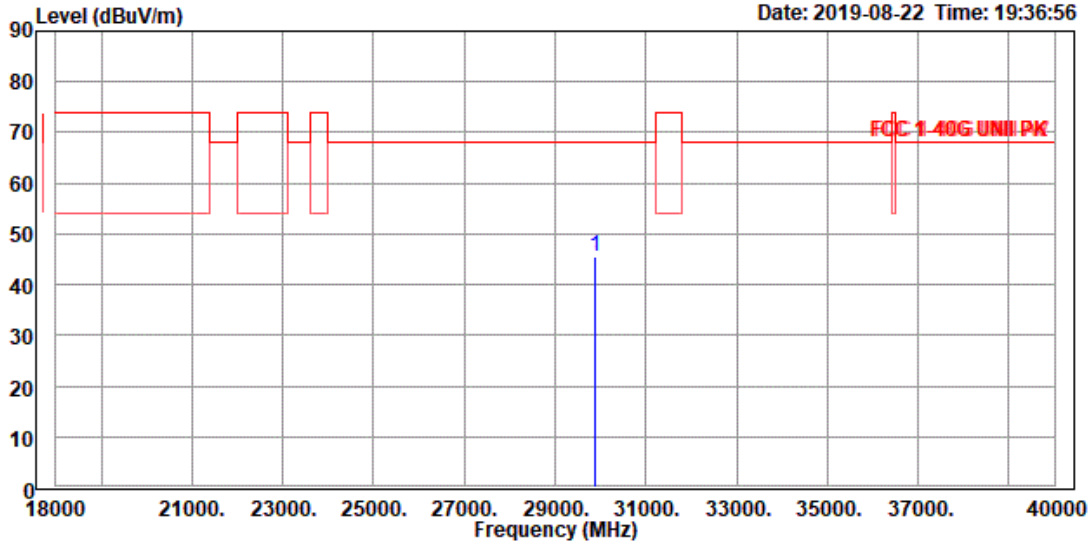


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 19
 Mode : AC80-TX-5210
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 29880.000	43.23	2.14	45.37	68.00	-22.63	100	94 Peak	

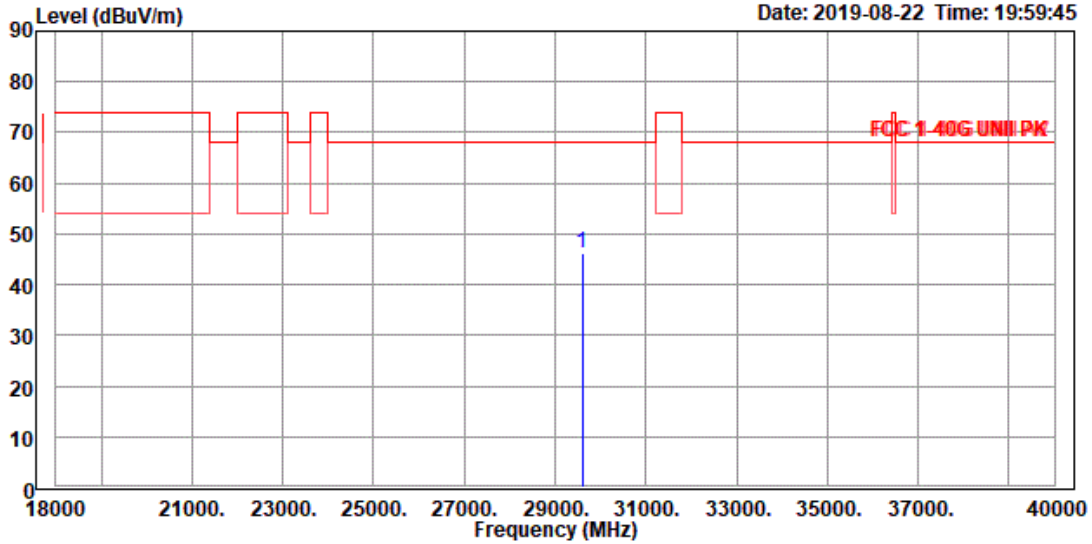

Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 10
 Mode : AC80-TX-5775
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 29594.000	43.83	2.21	46.04	68.00	-21.96	100	0 Peak	

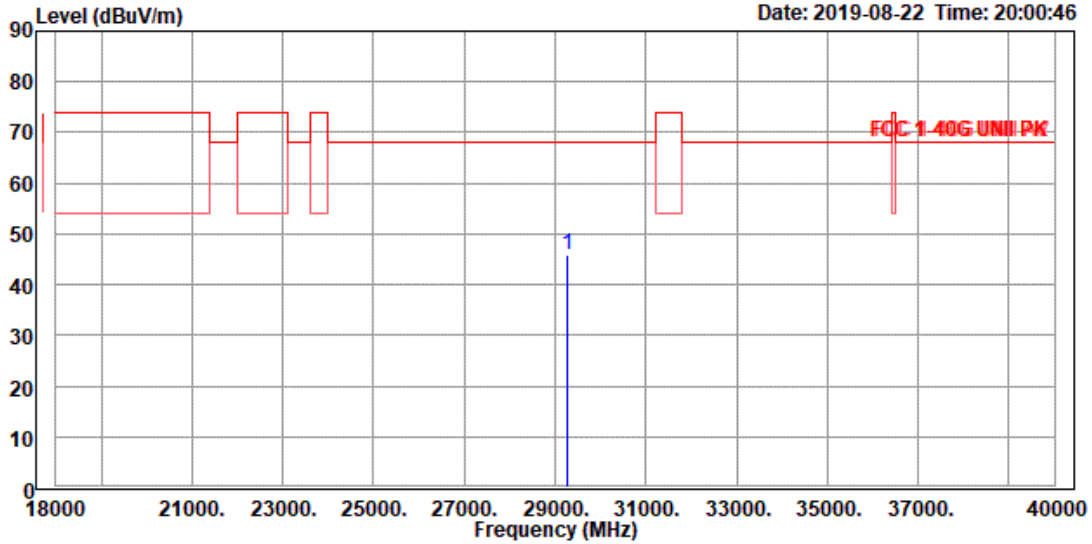


Site : 966A Chamber A
 Condition : FCC 1-40G UNII PK 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 10
 Mode : AC80-TX-5775
 Memo : Z

	Read		Limit	Over	APos	TPos		
Freq	Level	Factor	Level	Line	Limit		Remark	Note
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 29264.000	44.17	1.85	46.02	68.00	-21.98	100	270	Peak

Spurious Emissions, TX Mode, 30M-1G




TUV Rheinland Taiwan Ltd.
 11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 Fax:+886-2528-0018

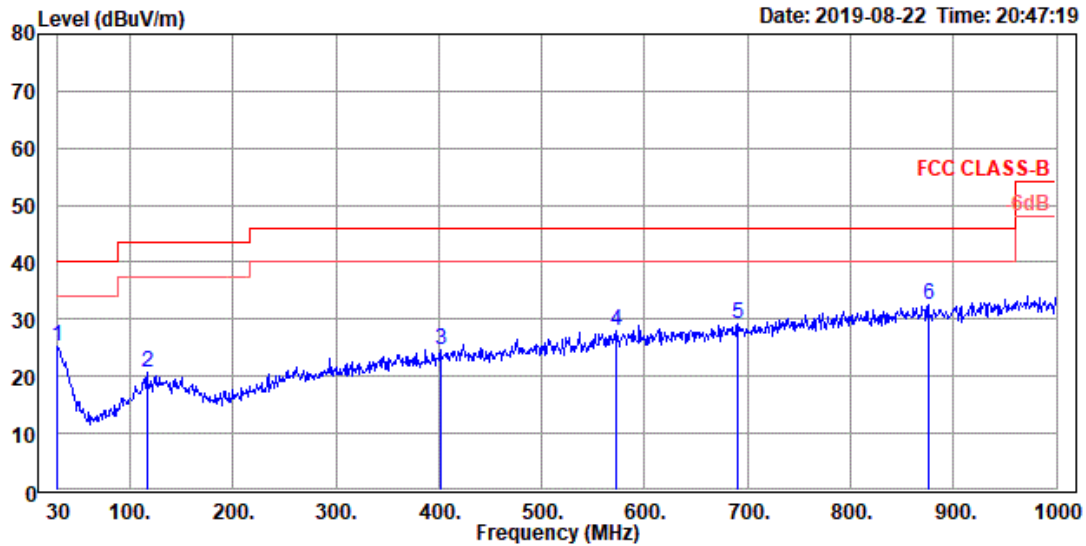

Site : 966A Chamber A
 Condition : FCC CLASS-B 3m horizontal
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : A-TX-5180
 Memo : Z

	Read		Limit	Over	APos	TPos	Remark	Note
Freq	Level	Factor	Level	Line	Limit			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	30.000	25.25	0.02	25.27	40.00	-14.73	100	174 QP
2	116.330	28.26	-7.60	20.66	43.50	-22.84	100	233 QP
3	401.510	26.82	-2.31	24.51	46.00	-21.49	100	265 QP
4	572.230	27.96	-0.02	27.94	46.00	-18.06	100	327 QP
5	690.570	27.96	1.16	29.12	46.00	-16.88	100	304 QP
6	875.840	28.58	3.93	32.51	46.00	-13.49	100	352 QP

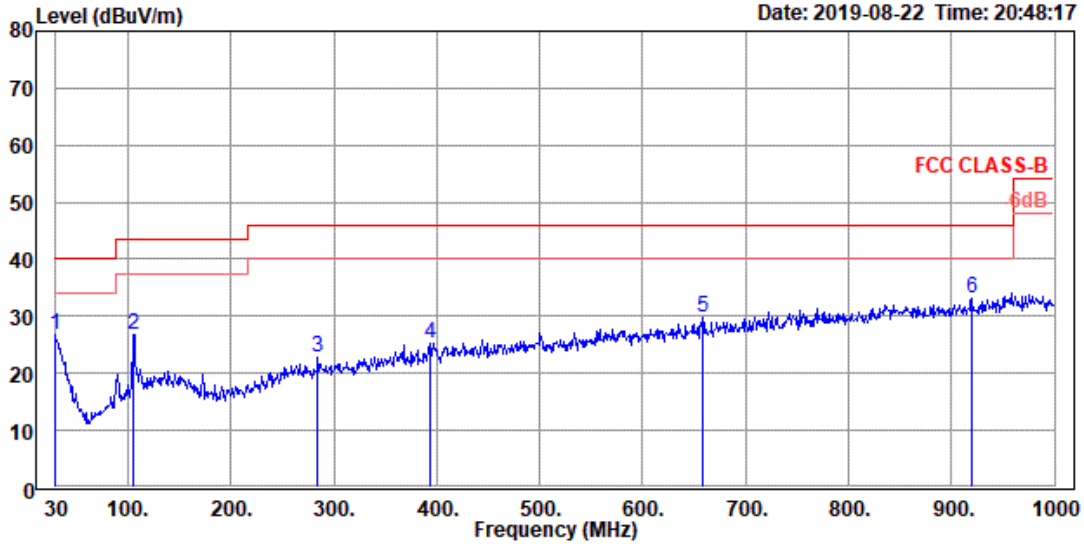


Site : 966A Chamber A
 Condition : FCC CLASS-B 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : A-TX-5180
 Memo : Z

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	30.000	26.80	0.02	26.82	40.00	-13.18	100	238	QP	
2	105.660	35.42	-8.57	26.85	43.50	-16.65	100	303	QP	
3	284.140	27.71	-4.97	22.74	46.00	-23.26	100	75	QP	
4	392.780	27.83	-2.70	25.13	46.00	-20.87	100	310	QP	
5	658.560	29.07	0.62	29.69	46.00	-16.31	100	43	QP	
6	919.490	28.58	4.48	33.06	46.00	-12.94	100	355	QP	

Spurious Emissions, TX Mode, 9K-30M




TUV Rheinland Taiwan Ltd.
 11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 Fax:+886-2528-0018

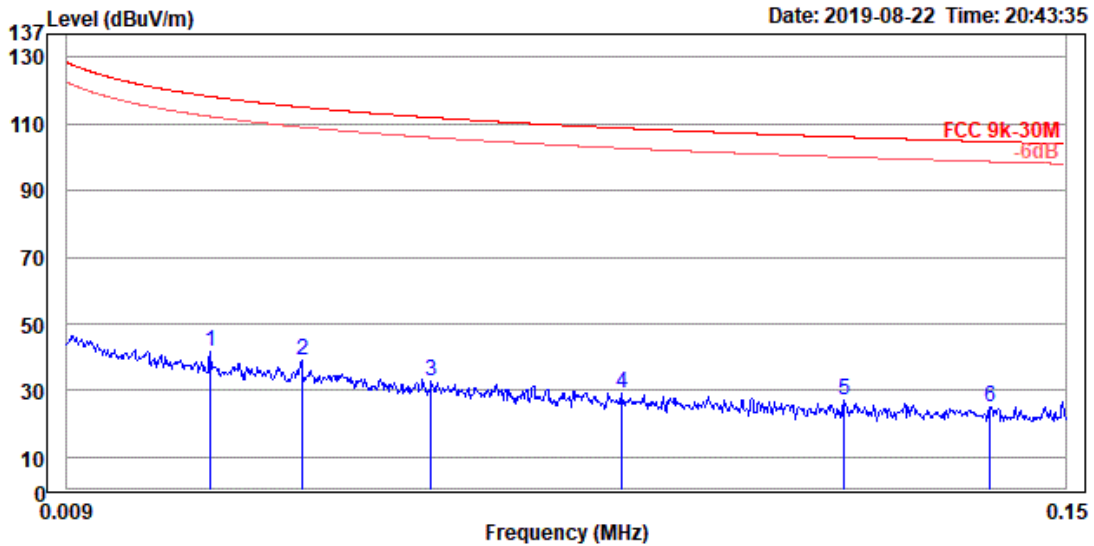

Site : 966A Chamber A
 Condition : FCC 9k-30M 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : A-TX-5180
 Memo : Z

	Read		Limit	Over	APos	TPos	Remark	Note
Freq	Level	Factor	Level	Line	Limit			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	0.029	22.48	18.94	41.42	118.29	-76.87	100	38 QP
2	0.042	19.96	18.92	38.88	115.10	-76.22	100	217 QP
3	0.060	14.28	18.63	32.91	111.96	-79.05	100	302 QP
4	0.087	10.93	18.00	28.93	108.78	-79.85	100	46 QP
5	0.119	9.34	17.78	27.12	106.10	-78.98	100	241 QP
6	0.139	7.12	17.87	24.99	104.72	-79.73	100	142 QP

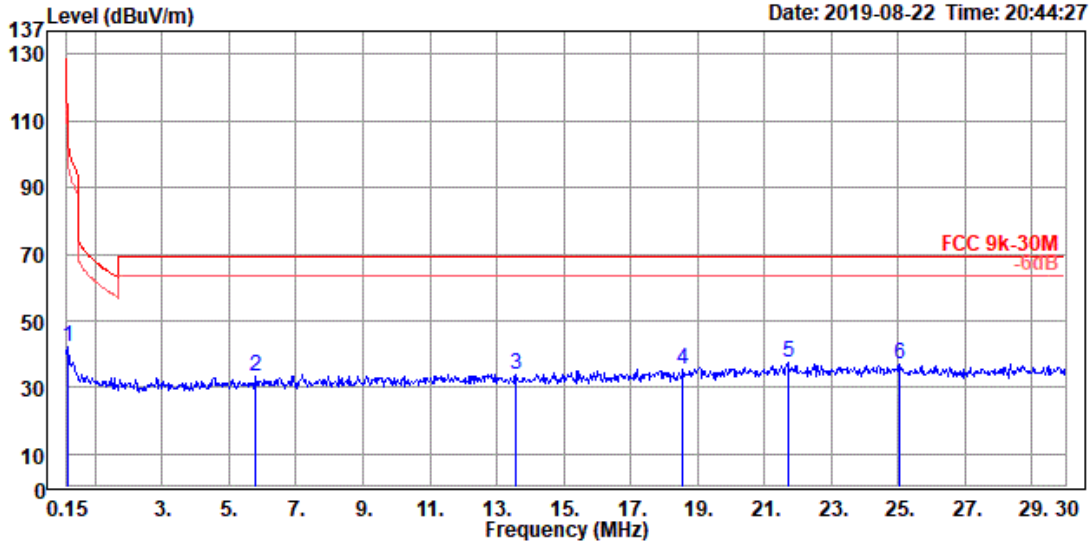

Site : 966A Chamber A
 Condition : FCC 9k-30M 3m vertical
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 5Vdc
 Tmp/Hum : 22°C / 61%
 Power Setting: 22
 Mode : A-TX-5180
 Memo : Z


	Freq	Read Level	Factor	Level	Limit	Over Limit	APos	TPos	Remark	Note
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg		
1	0.180	24.02	18.04	42.06	102.50	-60.44	100	73	QP	
2	5.762	13.70	19.50	33.20	69.50	-36.30	100	210	QP	
3	13.553	13.36	20.76	34.12	69.50	-35.38	100	62	QP	
4	18.567	14.34	21.26	35.60	69.50	-33.90	100	177	QP	
5	21.702	15.92	21.48	37.40	69.50	-32.10	100	208	QP	
6	25.045	15.21	21.63	36.84	69.50	-32.66	100	348	QP	

Spurious Emissions, AC Mains



TUV Rheinland Taiwan Ltd.
 11F., No. 758, Sec. 4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 Fax:+886-2528-0018

File: C:\EMC\Report\2019\Hong Kong A Mobile Intelligent Corp.Limited\238108123(PD470SH-B)\238108123(PT

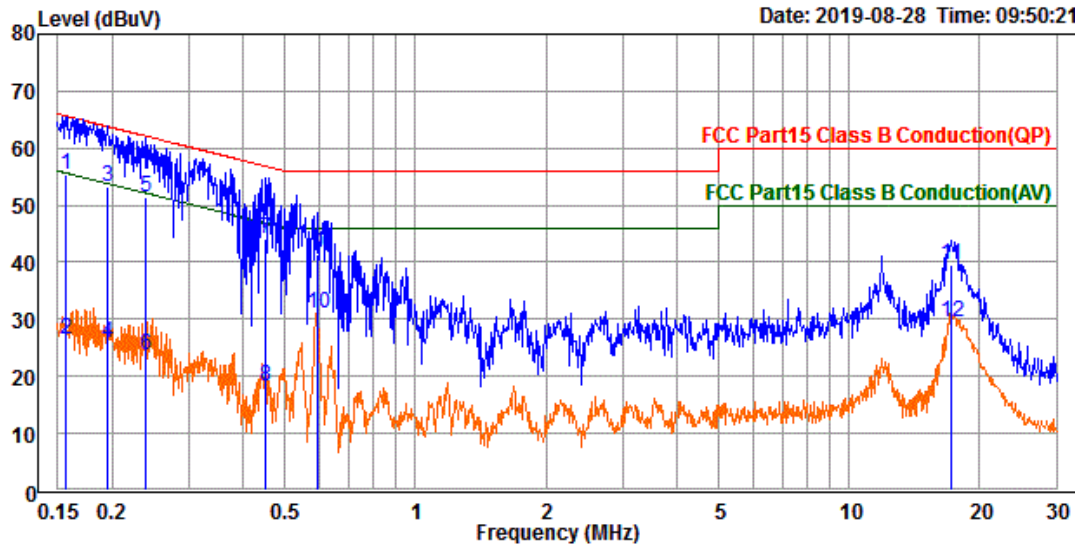


Trace: 1

Site : Conduction room
 Condition : FCC Part15 Class B Conduction(QP) line1
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 120Vac, 60Hz
 Tmp/Hum : 26.8°C / 34%
 Power Setting: default
 Mode : WiFi 5G
 Memo : Z

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.156	45.71	9.61	55.32	65.67	-10.35	QP
2	0.156	16.98	9.61	26.59	55.67	-29.08	Average
3	0.194	43.75	9.61	53.36	63.85	-10.49	QP
4	0.194	16.19	9.61	25.80	53.85	-28.05	Average
5	0.240	41.84	9.61	51.45	62.11	-10.66	QP
6	0.240	14.22	9.61	23.83	52.11	-28.28	Average
7	0.451	34.56	9.62	44.18	56.85	-12.67	QP
8	0.451	8.56	9.62	18.18	46.85	-28.67	Average
9	0.594	31.66	9.62	41.28	56.00	-14.72	QP
10	0.594	21.31	9.62	30.93	46.00	-15.07	Average
11	17.166	29.75	9.77	39.52	60.00	-20.48	QP
12	17.166	19.81	9.77	29.58	50.00	-20.42	Average



File: C:\EMC\Report\2019\Hong Kong A Mobile Intelligent Corp.Limited\238108123(PD470SH-B)\238108123(PT

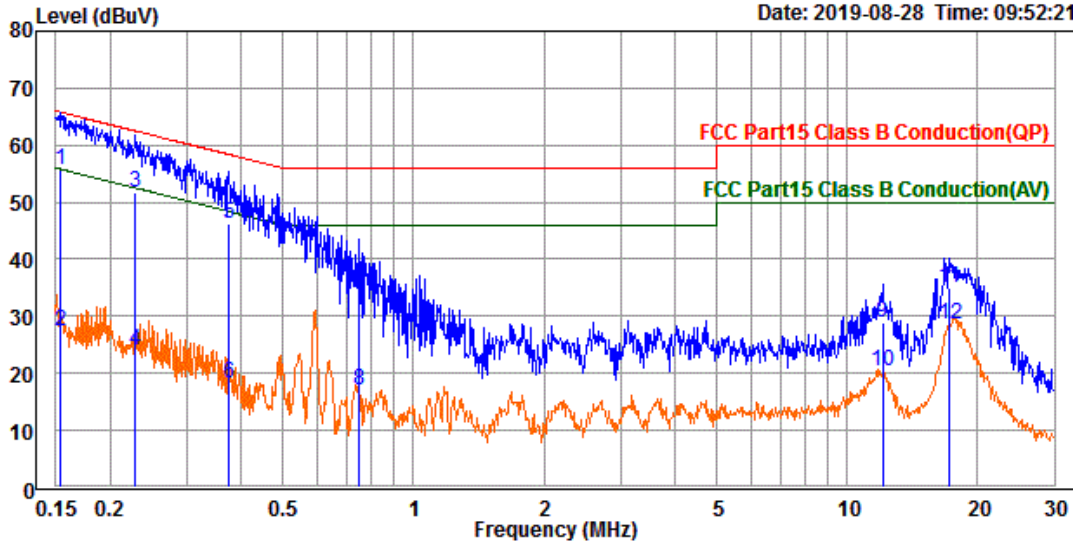

Trace: 1

Site : Conduction room
 Condition : FCC Part15 Class B Conduction(QP) neutral
 Test Engineer: Kevin Kuo
 Product : Mobile Computing Device
 Model No. : PD470SH-B
 Test Rating : 120Vac, 60Hz
 Tmp/Hum : 26.8°C / 34%
 Power Setting: default
 Mode : WiFi 5G
 Memo : Z

	Read Freq	Read Level	Read Factor	Limit Level	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dB	
1	0.153	45.94	9.62	55.56	65.83	-10.27 QP
2	0.153	17.76	9.62	27.38	55.83	-28.45 Average
3	0.229	41.97	9.62	51.59	62.48	-10.89 QP
4	0.229	14.34	9.62	23.96	52.48	-28.52 Average
5	0.375	36.75	9.63	46.38	58.38	-12.00 QP
6	0.375	8.76	9.63	18.39	48.38	-29.99 Average
7	0.747	24.26	9.63	33.89	56.00	-22.11 QP
8	0.747	7.46	9.63	17.09	46.00	-28.91 Average
9	12.050	19.03	9.77	28.80	60.00	-31.20 QP
10	12.050	10.71	9.77	20.48	50.00	-29.52 Average
11	17.166	25.04	9.81	34.85	60.00	-25.15 QP
12	17.166	18.78	9.81	28.59	50.00	-21.41 Average