



INSTALLATION, OPERATION & MAINTENANCE INSTRUCTIONS

1455 Kleppe Lane ♦ Sparks, NV 89431-6467 ♦ (775) 359-4712 ♦ Fax (775) 359-7424
E-mail: haws@hawsco.com ♦ website: www.hawsco.com

No. 0510001059 (1)

Bottle Filling Stations

MODELS 1210S AND 1210SF

NOTE TO INSTALLER: Please leave this information with the Maintenance Department.

FULL-SCALE ROUGH-IN TEMPLATE (PN 0510001160) AVAILABLE UPON REQUEST.

SAFETY PRECAUTIONS

CAUTION: Disconnect electrical power to outlet before installing or servicing.

NOTICE:

- A. The electrical receptacle must have code-approved ground-fault circuit interrupter (GFCI) protection for personnel.
- B. Care should be taken not to damage refrigeration system lines or electrical wires during installation.
- C. Installation must conform to all applicable codes and standards.
- D. Maintain 8 inches (20cm) separation from filter circuit board (antenna) at all times.

**SHOULD YOU EXPERIENCE DIFFICULTY WITH THE INSTALLATION OF THIS
MODEL PLEASE CALL:**

TECHNICAL SUPPORT: 1-800-766-5612

FOR CUSTOMER SERVICE: 1-888-640-4297

REQUIRED TOOLS (OR EQUIVALENT):

- ❑ Adjustable Wrench
- ❑ 1/4" Bit-holding screwdriver (7-3/4" max length)
- ❑ 1/4" Bit-holding screwdriver (4" max length, required for installs at Child ADA height only)
- ❑ #2 Phillips bit and a Flat-blade bit
- ❑ T20 Torx bit (supplied)
- ❑ 5/16" Nut driver bit (not necessary but will make some steps easier)
- ❑ Trimming tool for ABS pipe (necessary for some retrofits)
- ❑ Small bubble level
- ❑ Tape measure and tools for properly marking and measuring wall
- ❑ Clean cloth or paper towels
- ❑ Tubing cutter for polyethylene tubing
- ❑ Small diagonal cutting pliers
- ❑ Permanent Marker

REQUIRED PARTS (NOT SUPPLIED):

- ❑ P-trap (1-1/4" such as Keeney 200W recommended) with appropriate seal for 1-1/4" OD tailpiece
- ❑ Suitable trap adapter (if not already installed – see installation drawing for details)
- ❑ Suitable angle stop valve with 3/8" compression outlet (if not already installed – see installation drawing for details)
- ❑ 1/4" fasteners suitable for fastening the unit into structural material in wall.
- ❑ Plastic cup (for bleeding air out of system following install)

LOCATION OF UNIT: The Model 1210XX Series are suitable for indoor use only. These units are unsuitable for corrosive environments (such as enclosed chlorinated pool areas) or very dusty areas. The ambient air temperature must be maintained between 40°F and 94°F at all times. Installation into a location not meeting these limitations will void the warranty.

SUPPLY LINE: The minimum recommended size is 1/2"IPS with 30-90 psig (2-6 ATM) flowing pressure. Where sediment or mineral content is a problem, an upstream water pre-filter is recommended.

PLUMBING CONNECTIONS: Inlet is 3/8" OD polyethylene tubing. A suitable plastic ferrule and metal insert are provided to allow direct connection to a 3/8" compression water stop valve. Tailpiece is 1-1/4" OD ABS.

ELECTRICAL CONNECTION: 120VAC/60HZ GFCI-Protected electrical receptacle, min 15A service. Use standard size 4.5" X 2.75" wall plate. Dedicated circuit recommended.

INSTALLATION PROCEDURE**GENERAL NOTES:**

- For all plastic push-in type fitting connections, only connect NSF-61 soft-copper or plastic tubing. These instructions must be followed to ensure a watertight connection:
 - a. If tubing needs to be shortened, cut tubing square and clean.
 - b. Mark from end of tube the depth of insertion (See table below).
 - c. Push tube into the fitting until it bottoms out.
 - d. To remove, depress collet and pull tubing out.

Tube OD Size	OD Tolerance	Insertion Depth
1/4"	±.004"	11/16"
3/8"	±.004"	3/4"

A. INSTALLATION OF LOWER UNIT (CHILLING SYSTEM)

1. Verify that the electrical receptacle, water supply/valve, and drain locations are all in accordance with the installation drawing.
 - a. NOTE: The installation drawing addresses new installations as well as retrofits. Consult the retrofit pages of the installation drawing if uncertain whether a retrofit will be possible in your case.
2. Remove the hanger bracket from the back of the unit by removing (1) screw.
3. Mount the hanger bracket on the wall using (4) 1/4" structural screws.
 - a. NOTE: The screws must engage into structural material such as concrete, metal backing, wood blocking, etc. DO NOT use drywall anchors.
 - b. NOTE: The hanger bracket has a notch indicating the centerline of the unit, as well as a second notch off-center indicating the ideal drain line location at the wall. If the centerline of the drain does not align with the second notch, consider moving the bracket location to accommodate.
 - c. NOTE: It is recommended to mount the bottle filler bracket at this time. Refer to the applicable steps in those sections.
4. With the lower unit laying on its back, remove the (4) screws holding the skirt to the bottom of the frame. Then remove the skirt by sliding the skirt away.
5. Hang the lower unit onto the hanger bracket.
 - a. NOTE: The hanger bracket must go through the holes in the frame that are shaped like a sideways letter "P".
 - b. NOTE: The bracket allows for some lateral adjustment of the unit's location. Slide the unit laterally as needed at this time.
6. Secure both the lower right and lower left ends of the lower unit to the wall using at least (2) 1/4" or 3/8" structural screws. These screws should go through the holes which are approximately 5" from the bottom of the lower unit. Washers may be required.
 - a. NOTE: The screws must engage into structural material such as concrete, metal backing, wood blocking, etc. DO NOT use drywall anchors.
7. Connect the water inlet line (attached to either the strainer or filter, as applicable), to the water stop by following the steps below.
 - a. Cut the inlet line square and clean to the appropriate length, if needed.
 - b. Install the compression nut (included with your supply valve), followed by the plastic ferrule (supplied), and the brass tube support (supplied) onto the inlet line. Note the correct orientation of the plastic ferrule, as shown in Figure 2. Do not use the brass ferrule included with your supply valve.
 - c. Insert the inlet line into the supply valve until it bottoms out. Thread the nut down onto the supply valve until finger tight. Put a line on the nut using a marker. Tighten exactly one additional full (360 degrees) turn with a wrench, using the line to count turns.
8. Install the P-trap. If necessary, trim the drain tailpiece in place so it interfaces properly with the P-trap inlet. Pliers may be required to tighten the nuts to a leak-tight condition.
9. If the unit has a filter, install the filter now. Take care not to damage the circuit board which is near the filter head.
10. Note that the thermostat is factory set at 50°F (±5°F) under normal conditions. The *minimum* thermostat set point varies with altitude. Adjust 1/16" turn counterclockwise (warmer) from cold position for every 1500 ft above sea level to prevent freezing of water.
11. CAUTION: **Make sure that the main power plug is NOT connected at this time.** Proceed to section B.




Figure 1: Lower Bracket Location

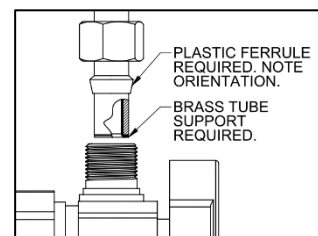


Figure 2: Supply Valve Connection

B. INSTALLATION OF BOTTLE FILLER


12. NOTE: The lower unit must NOT be powered on (plugged in) while installing the bottle filler.
13. Remove the bottle filler wall bracket from the bottle filler by removing the (1) screw. Mount the bracket on the wall using (4) 1/4" structural screws and the (4) supplied washers. See installation drawing for dimensional details.
 - a. NOTE: The screws must engage into structural material such as concrete, metal backing, wood blocking, etc. DO NOT use drywall anchors.
 - b. NOTE: The hanger bracket has a notch indicating the centerline of the bottle filler, which should align with the centerline of the lower unit.
14. Check that the bottle filler wiring harness extends through the upper rear of the lower unit. If it does not, pull it out through the upper rear of the lower unit.
15. Begin to feed the bottle filler water tubing through the slot in the back of the lower unit. With the lower brackets partially engaged into the slots, connect the wiring harness to the circuit board on the back of the bottle filler.
16. Fully install the bottle filler by sliding it down fully onto its wall bracket. Route the water tubing out the left side of the lower unit. The bottle filler should rest completely against the top of the lower unit, with no gap. It should also be flush with the wall surface.
17. Slide the supplied foam insulation tubing over the end of the bottle filler water tubing, which is now running down through the lower unit.
18. Connect the bottle filler water tubing to the 1/4" push-in elbow connector located inside of the lower unit. Tuck this tubing into the lower unit so that it does not protrude or kink.
19. Install the (2) supplied #10-24 torx drive machine screws through the sides of the lower unit and into the lower bottle filler brackets. Tightening these screws will lock the bottle filler into position, so be sure that the bottle filler is fitting tightly against the top of the lower unit.
20. If present, remove the protective plastic film from the sensor area of the bottle filler.
21. Proceed to START-UP section.

C. START-UP

22. Open the water supply valve and check the system for leaks.
23. Remove the label from the power plug, then plug the power cord into the wall receptacle (which should presently be powered off at the breaker panel). Check that all wiring is fully contained within the unit and that no wires are impeding fan blade movement.
24. Peel back the protective plastic from the back flanges and top 1" of the skirt.
25. Reinstall the skirt. Finish removing the protective plastic from the skirt.
26. Place a cup under the nozzle of the bottle filler and run the water until the air has been purged out of the water line.
27. The stainless steel panels can be cleaned with the provided cleaning wipe. Buff off excess with a clean cloth or paper towel. Do not allow the cleaning fluid to touch the plastic parts or the bottle filler.

D. OPTIONAL PROGRAMMING INSTRUCTIONS

To enter programming mode, remove the skirt, and use a nonmetallic object such as the back end of a plastic pen to hold the blue button until the up/down arrow keys and "select" appear on the bottle filler display. Programming mode enters at the top-level menu. In general, the up/down arrows and select keys work as follows;

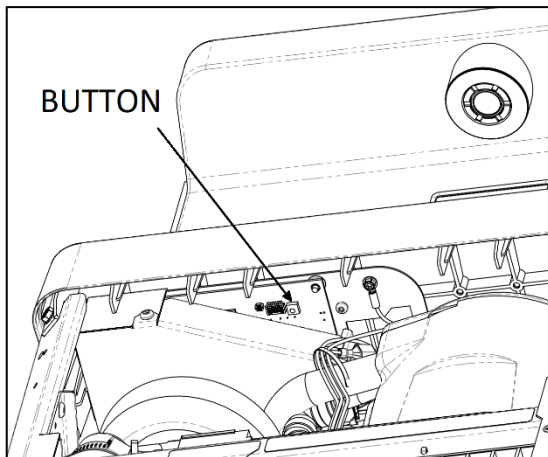

Up/Down Arrows – Cycle through the top-level menu items or values in the programmable fields

Select – enters programming of the associated top-level menu item, or sets value and advances to next programmable field, or programs value (indicated by value flashing) prior to returns to the main menu

Programming the Haws 1210 Bottle Filler through the bottle filler user interface is generally intuitive. However, the following Programming Table can be used as a guide while programming the unit. Programmed settings are retained during power outages.

Reinstall the skirt after programming the unit.

Figure 3 : Programming Mode Button

Programming Table			
Top-Level Menu	Arrows (cycle through...)	Select	Default
Backlight	100%, 75%, 50%, 25%, Cancel	Percentage Value - programs brightness Cancel – returns to main menu	100%
Sensor	Range (rng) from 1 to 10, Cancel	Range 1 to 10 - programs range Cancel – returns to main menu	Rng 5
Errors	No Errors – None or Cancel. Errors - error codes (see Error Code Table for details), Clear, and Cancel	None or Cancel – returns to main menu Error Code – shows human readable (see next Arrow) Clear – clears error codes Cancel – returns to main menu	None
Set Day	Days of week or Cancel	Day of week – programs day Cancel – returns to main menu	Sunday
Time	Hour from 1 to 12, or Cancel Minute from 00 to 59, or Cancel A, P, or Cancel	1 to 12 – programs hour of day 00 to 59 – programs minute of hour A or P – programs 12-hour clock AM or PM Cancel – returns to main menu	12:00A
Energy*	M-F, Sa-Su, and Cancel On 1 to 12, disable, or Cancel A, P, or Cancel Off 1 to 12, or Cancel A, P, or Cancel	M-F or Sa-Su - enters programmable energy saving for that portion of the week and advanced to hour to turn ON energy saving mode Cancel – returns to main menu On 1 to 12 – sets hour to turn “ON” energy saving and advance to A or P field (see Note 1) disable – turns “OFF” energy saving for that portion of the week (i.e. Mon-Fri or Sa-Su) and returns to main menu Cancel – returns to main menu without changing program Sets 12-hour clock AM or PM and advanced to programming OFF time (see Note 1) Cancel – returns to main menu with changing program Off 1 to 12 – sets hour to turn “Off” energy saving and advance to A or P field (see Note 1) Cancel – returns to main menu without changing program Sets 12-hour clock AM or PM and advanced to OFF setting (see Note 1) Cancel – returns to main menu without changing program	Mon-Fri = disable Sa-Su = disable
Review		Cycles through time, day, energy program, backlight setting, sensor setting, filter usage, and errors codes	N/A
Reset	Cancel or Yes	Cancel – returns to main menu without factor reset Yes – resets to factory defaults, but saves bottle count	See defaults above
EU	No arrow or select function. Displays firmware revision number for Main circuit board.		N/A
BF	No arrow or select function. Displays firmware revision number for Bottle Filler circuit board.		N/A
Abort		Exits programming mode	N/A
<p>Notes: * Programmable energy savings mode turns off the chiller and fan. A setting of “ON” means the mode is enabled and the unit will not chill water during that time period. Programmable energy savings mode overrides Smart Energy Save, but still allows the system to enter Smart Energy Save when outside the programmed energy saving times (see section G.1 Smart Energy Saving)</p> <p>1. Example: To turn on programmable energy saving from 6p.m. to 5a.m., Monday through Friday, use the up/down arrows and follow the flashing field prompt to select “on 6” the “P”, then “oFF 5” and “A”.</p>			

E. MAINTENANCE

E.1. CLEANING

- Metal parts can be cleaned with either of the following:
 - A clean towel, dampened by warm water with or without a small amount of mild hand dishwashing detergent.
 - Stainless steel cleaning wipes. Buff off excess with a clean cloth or paper towel. Do not allow the cleaning fluid to touch the plastic parts or the bottle filler.
- Plastic parts (including bottle filler):
 - A clean towel, dampened by warm water with or without a small amount of mild hand dishwashing detergent.
- Condenser: If dust builds up on the condenser, it can negatively impact the bottle filler's performance and longevity. Clean the condenser using a shop vacuum or an air blower gun. Take care not to damage the fins during the cleaning process.

E.2. Y-STRAINER CLEANOUT (MODELS WITHOUT A FILTER)

1. Remove the (4) screws holding the skirt to the bottom of the frame. Then remove the skirt by sliding the skirt away from the lower unit.
2. Turn the supply valve to the off position.
3. Remove the cap from the strainer using two adjustable or open-ended wrenches.
 - a. NOTE: Some water will likely drip out of the y-strainer as you open it.
4. Clean the strainer screen using clean water.
5. Re-assemble the cap to the strainer.
6. Turn the supply valve to the on position and check for leaks.
7. Reinstall the skirt.

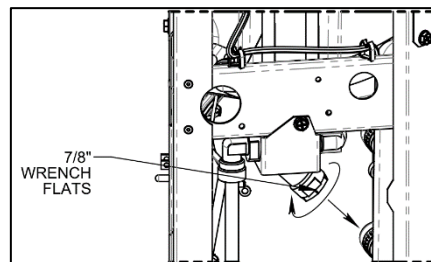


Figure 4: Strainer cleanout

E.3. FILTER REPLACEMENT (MODELS WITH A FILTER)

Caution: Take care not to damage the circuit board located near the filter head during the following steps.

1. Remove the (4) screws holding the skirt to the bottom of the frame. Then remove the skirt by sliding the skirt away from the lower unit.
2. Place a towel or bucket below the lower unit to collect the small amount of water that may drip from the filter head or filter during the next steps.
3. Optional: Turn the water supply valve to the off position, and bleed pressure from the unit by operating the bottle filler. This will improve the ease of replacing the filter.
4. Remove the old filter by turning about ¼ turn clockwise (as viewed from above) and pulling down.
 - a. NOTE: There is no need to shut off the supply valve, as the filter head has a built-in valve. If you are planning to leave the unit without a filter cartridge for a protracted period of time, shut off the supply valve.
5. Install the new filter by pushing up and turning counterclockwise (as viewed from above). Note the label orientation in Figure 5.
6. Reinstall the skirt.
7. Using a cup to block the water flow, bleed air out of the bottle filler by activating the water flow until the air is purged out.
8. Run the bottle filler for five minutes to properly flush the new filter.

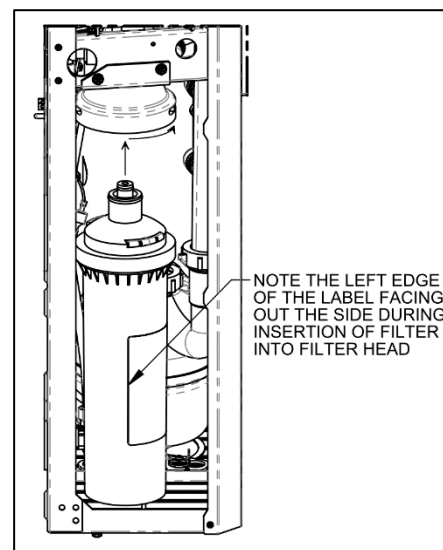


Figure 5: Filter Replacement

E.4. FUSE REPLACEMENT

1. Turn off power to unit
2. Remove the skirt.
3. Remove the (2) screws holding the lower circuit board cover to the circuit board enclosure.
4. Remove blown fuse and replace with a 5mm x 20mm, 10A, Fast Blow, 250VAC rated fuse.
 - a. NOTE: Haws PN: 0210000754
5. Reinstall lower circuit board cover and skirt.

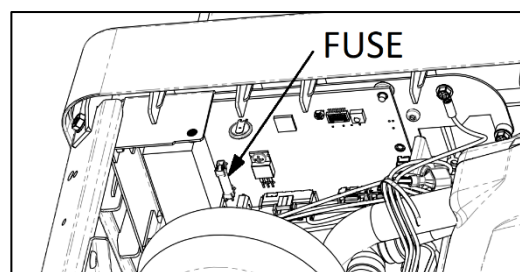


Figure 6: Fuse Location

F. GENERAL OPERATION

F.1. USING THE BOTTLE FILLER

- Insert a bottle below the nozzle to activate the water flow.
- Remove the bottle from below the nozzle to stop the water flow.

F.2. FILTER LIFE (Filtered units only)

- The filter is designed to last for a maximum of 1 year or 3,000 gallons, whichever comes first.
- In order to ensure dispensed water quality, the unit will automatically disable water flow when the filter reaches 3,000 gallons. Water flow will be re-enabled after the filter is replaced.

F.3. SMART ENERGY SAVING

- These units are set to Smart Energy Saving as the factory default. These units will automatically save energy by turning off the chiller when there has been no recent use of the unit.

G. NOTIFICATIONS

G.1. INDICATION LIGHTS (VISIBLE AFTER REMOVING THE SKIRT)

- **Power = Red LED**
 - Solid ON – when power is applied
- **Filter = Blue LED (Filtered units only)**
 - Solid ON – Filter life 100% to 11% remaining
 - Intermittent Flash (once/3 second) – Filter life 10% to 0% remaining
 - Rapid Flash (once/second) – Filter life expired
- **Energy Saving = Green LED**
 - OFF – Energy Saving Mode disabled
 - Solid ON – Energy Saving Mode enabled
 - Rapid Flash (once/second) – Actively saving energy (compressor and fan disabled)

G.2. BOTTLE FILLER INDICATION

- **Bottles Saved:** Indicates approximately 1 bottle saved for each 17oz dispensed.
- **Filtering Icon (Filtered units only):**
 - Solid ON at all times - 100%-11% filter capacity remaining
 - Pulsing when not activated - 10%-1% filter capacity remaining
 - OFF - 0% filter capacity remaining (filter expired)
- **Energy Efficiency Icon**
 - Solid ON = Basic or Programmable Energy Saving Mode enabled
 - Intermittent Flash = Unit actively saving energy (compressor and fan disabled)
 - OFF = Energy Saving Mode disabled

H. TROUBLESHOOTING

TROUBLESHOOTING	
Note: If the suggested items in the checklist fail to solve the problem, contact Haws Technical Support at 1-800-766-5612.	
PROBLEM	REPAIR CHECKLIST
1. No water flow from bottle filler	a. Check if filter has expired. b. Verify supply valve is open and there is water pressure to the unit. c. Verify power to the unit. Check and replace fuse. Clean the bottle filler sensor lens with mild detergent and water. d. Activate sensor and listen for a click or a hum to indicate whether the solenoid valve is working. e.
2. Low water flow from bottle filler	a. Replace filter. b. Verify minimum 30 psig supply pressure. c. Verify supply valve is in full open position. d. Unscrew aerator and flush with clean water. e. Replace aerator.
3. Water leaking	a. Shut off water supply and contact Haws Technical Support @ 1-800-766-5612.
4. Water from bottle filler nozzle excessively splatters when contacting drain basin	a. Unscrew aerator and flush with clean water. b. Replace aerator.
5. Water is not cold	a. Check thermostat position b. Verify that the compressor is running (The shell should be warm to the touch after running)
6. Bottle filler flows water by itself	a. Unit self-purges every 24 hours if not used. b. Clean the bottle filler sensor lens with mild detergent and water.

OPTIONAL BOTTLE FILLER – ERROR CODE TABLE TROUBLESHOOTING

Note: If the suggested items in the checklist fail to solve the problem, contact Haws Technical Support at 1-800-766-5612.

ERROR CODE		REPAIR CHECKLIST	
1.	E009 – COMPCY Compressor is cycling too frequently	a.	Clear error in programming mode and power cycle unit and check error to validate.
		b.	Power cycle unit and ensure fan runs initially for approximately 10 seconds.
		c.	Clean condenser fins of dust and debris.
		d.	Verify inlet water and ambient temperatures are below specification maximum.
2.	E012 – SENOB Bottle filler sensor is obstructed	a.	Clear error in programming mode and power cycle unit and check error to validate.
		b.	Remove obstruction from aperture Clean aperture with soft cloth that won't scratch aperture.
		c.	Check aperture for excessive scratches
3.	E014 – RFID RFID board lost communication	a.	Clear error in programming mode and power cycle unit and check error to validate.
		b.	Check cable connection to RFID board.

I. FEDERAL COMMUNICATIONS COMMISSIONS (FCC) and INDUSTRY CANADA (IC) COMPLIANCE STATEMENTS

I.1. FCC Compliance Statement

I.1.1. Part 15.19

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

I.1.2. Part 15.21

Any changes or modifications to this equipment not expressly approved by Haws Corporation may cause harmful interference and void the user's authority to operate this equipment.

I.1.3. FCC ID

FCC ID: 2AUAN-1200SM

I.2. Formal notices required by the Industry Canada ("IC")

I.2.1. Compliance Statement

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation.

I.2.2. Declaration de Conformité

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

I.2.3. IC ID

IC ID: 25359-1200SM

© 2021 Haws® Corporation – All Rights Reserved
HAWS® and other trademarks used in these materials are the exclusive property of Haws Corporation.



1455 Kleppe Lane, Sparks, Nevada 89431 – 800.766.5612 – www.hawsco.com

WATER COOLER WARRANTY AND LICENSE

EXCEPT AS EXPRESSLY STATED HEREIN, MANUFACTURER HEREBY DISCLAIMS ALL WARRANTIES, WHETHER EXPRESS OR IMPLIED, ARISING BY LAW OR OTHERWISE, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THIS WARRANTY MAY NOT BE MODIFIED OR EXTENDED WITHOUT THE WRITTEN CONSENT OF HAWS. REMEDIES AND REPLACEMENTS STATED HEREIN ARE EXCLUSIVE. IN NO EVENT SHALL HAWS BE LIABLE FOR ANY SPECIAL, PUNITIVE, CONSEQUENTIAL OR INCIDENTAL DAMAGES TO ANY PERSON INCLUDING BUT NOT LIMITED TO DAMAGES FOR LOSS OF USE OR PROFITS, SUBSTITUTE PRODUCTS OR COSTS, PROPERTY DAMAGE, OR OTHER MONETARY LOSS.

1. TIME BASED WARRANTY FOR AUTHORIZED RESELLERS AND INITIAL PURCHASERS. Haws Corporation (“Haws”) warrants that every cooler and bottle filling station will be free from material defects in materials and workmanship under normal use for one (1) year from the date of installation or if earlier, eighteen (18) months from date of shipment from Haws’ factory. Haws warrants that the compressor and hermetically sealed refrigeration system, which includes cooling coils and tank assembly, insofar as either is part of the hermetically sealed refrigeration system, will be free from material defects in materials and workmanship under normal use for an additional four (4) years from the end of the initial time period described in the first sentence of this paragraph. (This warranty for years 2 through 5 is pro-rated for the remaining replacement value based on the portion of the warranty period expired). The warranties set forth in this paragraph are collectively referred to herein as the “**Limited Warranty**”. This Limited Warranty applies only to coolers and bottle filling stations purchased by (i) authorized resellers of Haws’ products, and (ii) the initial purchaser (first owner) who purchases the product other than for resale.

2. WARRANTY VOID. The products must be installed and operated in accordance with Haws’s written instructions included with each unit, or the Limited Warranty will be null and void. The products are designed to operate on 30 - 90 psi flowing inlet pressure. Where products are found by Haws to have been subjected to negligence, recklessness, accident, alteration, abuse, carelessness, misuse, misapplications, corrosive type atmospheres, unsuitable environments, faulty installation, or abnormal use, this Limited Warranty will be null and void.

3. RESPONSIBILITIES. The owner is responsible for any repairs or maintenance not covered by this Limited Warranty, including service for issues that not warranted hereunder. The owner must deliver written notice to Haws of any imperfections at the time of installation without delay. Haws’ obligations under this Limited Warranty are limited to labor and parts to repair or replace any part which is expressly covered by this Limited Warranty at its factory repair department, when the product is in the United States or Canada. The Limited Warranty applicable to any replacement unit shall not extend beyond the warranty period of the original unit (e.g., if a replacement cooler is installed 8 months after installation of the original cooler, the replacement cooler will be warranted for 4 months from installation.). Haws’ duty also includes costs of outbound freight (but not express freight) of the part or parts from the factory repair department, but only if the part or parts, and the purported defect or defects, are covered by this Limited Warranty, in Haws’ sole discretion. When the product is located outside the United States and Canada, Haws’ obligation under this Limited Warranty includes only providing a replacement for any part expressly covered by this Limited Warranty which is found to be defective by Haws or its agent but does not include any obligation to provide labor or to pay labor costs incurred in connection with the replacement. Haws’ duties also include cost of outbound freight (but not express freight) of the part or parts from the factory repair department to (but not beyond) the port in the United States from which the part or parts are shipped to the final destination, but only if the part or parts, and the purported defect or defects, are covered by this Limited Warranty, in Haws’ sole discretion. To obtain warranty service, Owner must call the factory. For the nearest Manufacturer factory, call (800) 766-5612.



4. EXCLUSIONS. This Limited Warranty does not include the costs of any labor for normal maintenance including adjustments such as water stream quality, water temperature or energy savings mode. The water system and laminar flow inserts are not covered by this Limited Warranty if Haws determines that they have become inoperative due to liming, sand or similar residue or decomposition. This Limited Warranty is voided if repairs are made by any unauthorized party or the serial number data plate is removed or has been modified from its original state. Normal deterioration of finish caused by ordinary wear and tear, corrosion, or exposure is not covered by this Limited Warranty. Haws is not responsible for any repairs whatsoever to walls on which the coolers and bottle filling stations are installed. If inlet pressure is above 90 psi, a pressure regulator must be installed in the supply line to preserve this Limited Warranty. Any damage caused by connecting the water cooler and bottle filling stations to supply line pressures lower than 30 psi or higher than 90 psi is not covered by this Limited Warranty. If the coolers or water filling stations, as applicable, are altered, modified, or combined with any other machine or devise this Limited Warranty is null and void. **Caution: alteration or modification of the coolers and/or water filling stations may cause serious flooding and/or hazardous electrical shock or fire.**


5. LICENSE. If the water cooler or bottle filling station includes embedded software, the owner and those using the product are granted a limited, restricted, non-exclusive, non-transferable, non-sublicensable license to use such embedded software solely for the operation of the product in owner’s business and not for any commercial purpose. Haws retains title to the embedded software and all intellectual property rights therein and in any derivatives thereof. The owner and those using the product shall not remove or alter notices, legends or trademarks contained in the embedded software, nor shall they translate, reverse engineer, decompile or disassemble the embedded software except to the extent applicable law specifically prohibits this restriction. Any use of such embedded software not contemplated herein will void this Limited Warranty. The embedded software is provided “as is” and no warranty is provided by Haws. Haws will provide further information concerning this license upon request sent to the address set forth herein.

Product Details:

- ✓ Model Number: _____
- ✓ Serial Number: _____
- ✓ Date of Installation: _____
- ✓ Location: _____
- ✓ Building: _____
- ✓ State: _____
- ✓ Installed By: _____

ITEM	DESCRIPTION	1210S	1210SF
1	FILTER		6428
2	Y-STRAINER	6437	
7	LOWER UNIT MOUNTING BRACKET	0410000264	0410000264
12	SOLENOID VALVE	5876	5876
13	FAN BLADE	HC111	HC111
14	FAN MOTOR	HC117	HC117
15	THERMOSTAT	5810	5810
16	COMPRESSOR THERMAL PROTECT	HC115	HC115
17	COMPRESSOR START RELAY	HC116	HC116
19	BOTTLE FILLER ASSEMBLY	1930	1930
20	BOTTLE FILLER NOZZLE	VRKNOZ1	VRKNOZ1
21	BOTTLE FILLER MOUNTING BRACKET	0410000265	0410000265
24	SKIRT	0410000500	0410000500
25	DRAIN BASIN	0410000746	0410000746
26	DRAIN GRATE	0410000748	0410000748
27	PLATFORM SUPPORT	0410000747	0410000747
28	PLATFORM	0410000749	0410000749

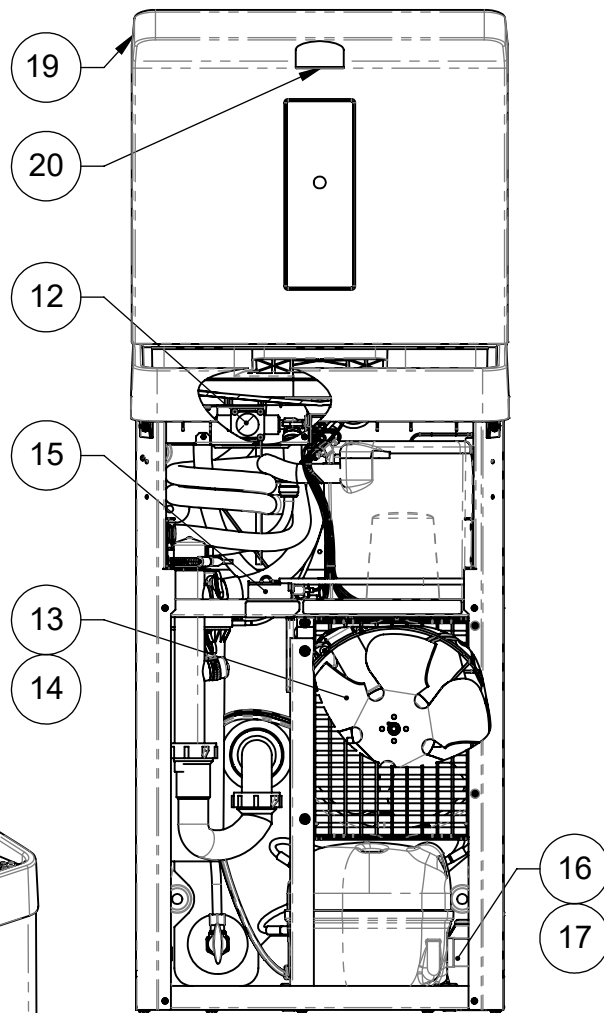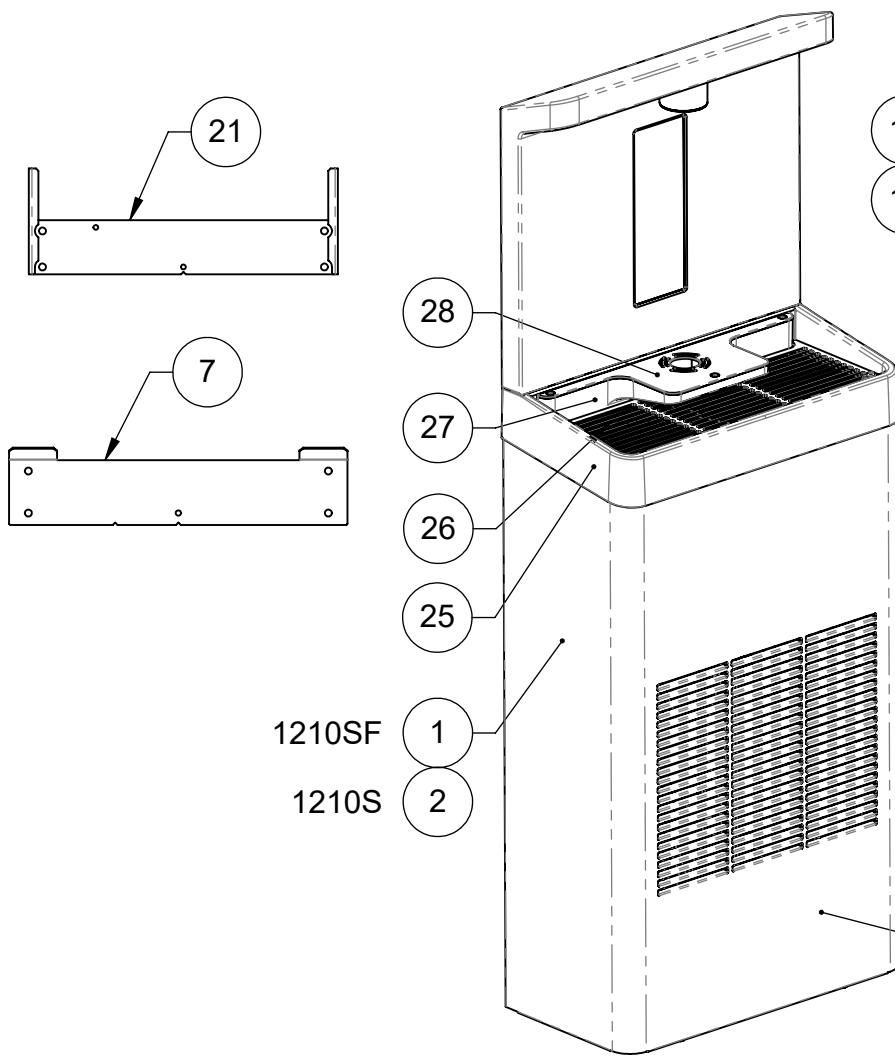


 Haws®		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWSO.COM WEBSITE: WWW.HAWSO.COM	
		PART NUMBER 0510001159 REVISION 0A.0	
ECN: 5647	REV. ECN: 5647	BY:	MODEL(S)
DRAWN:	DATE:	CHK'D:	
APPROVED:	DATE:	SCALE: 1:8	DRAWING TYPE: PARTS BREAKDOWN
		SIZE: A	SHEET 1 OF 1

WHEN ORDERING PARTS, PLEASE
SPECIFY PART NUMBER

NOTES:

1. HOLD PLUMBING & ELECTRICAL DIMENSIONS $\pm 1/4"$ (6.4mm). HOLD MOUNTING DIMENSIONS $\pm 1/8"$ [± 3.2 MM].
2. ADHERING TO PROVIDED INSTALLATION HEIGHT DIMENSIONS WILL ALLOW THE BOTTLE FILLER TO BE INSTALLED AT ADULT ADA HEIGHT. IN MOST CASES, DIMENSIONS MARKED * CAN BE INCREASED BY UP TO 4" IN EQUIVALENT AMOUNTS. WHEN INSTALLING THIS UNIT, LOCAL, STATE, OR FEDERAL CODES SHOULD BE ADHERED TO.

TYPICAL INSTALLATION (SOME COMPONENTS HIDDEN FOR CLARITY)

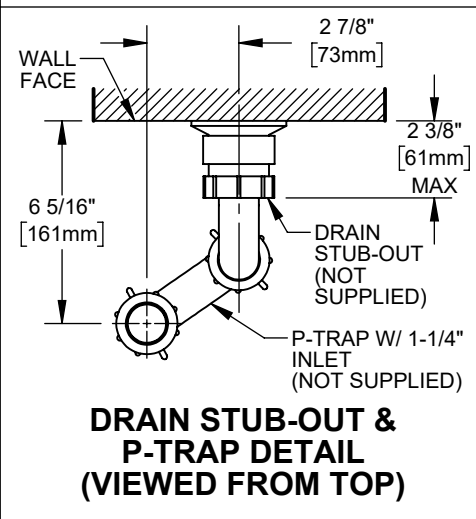



120VAC GFCI-PROTECTED ELECTRICAL RECEPTACLE, MIN. 15A SERVICE (USE STANDARD SIZE 4.5X2.75" WALLPLATE). DEDICATED CIRCUIT RECOMMENDED

P-TRAP W/1-1/4" INLET (NOT SUPPLIED)

SUPPLY VALVE (NOT SUPPLIED; REC. 90° VALVE W/ 1/2" IPS SUPPLY & 3/8" COMPRESSION OR QUICK CONNECT TUBING OUTLET)

MOUNTING BRACKET

* 43 3/4" [1111mm] SENSOR

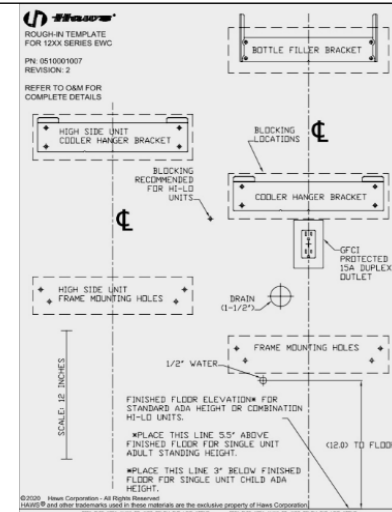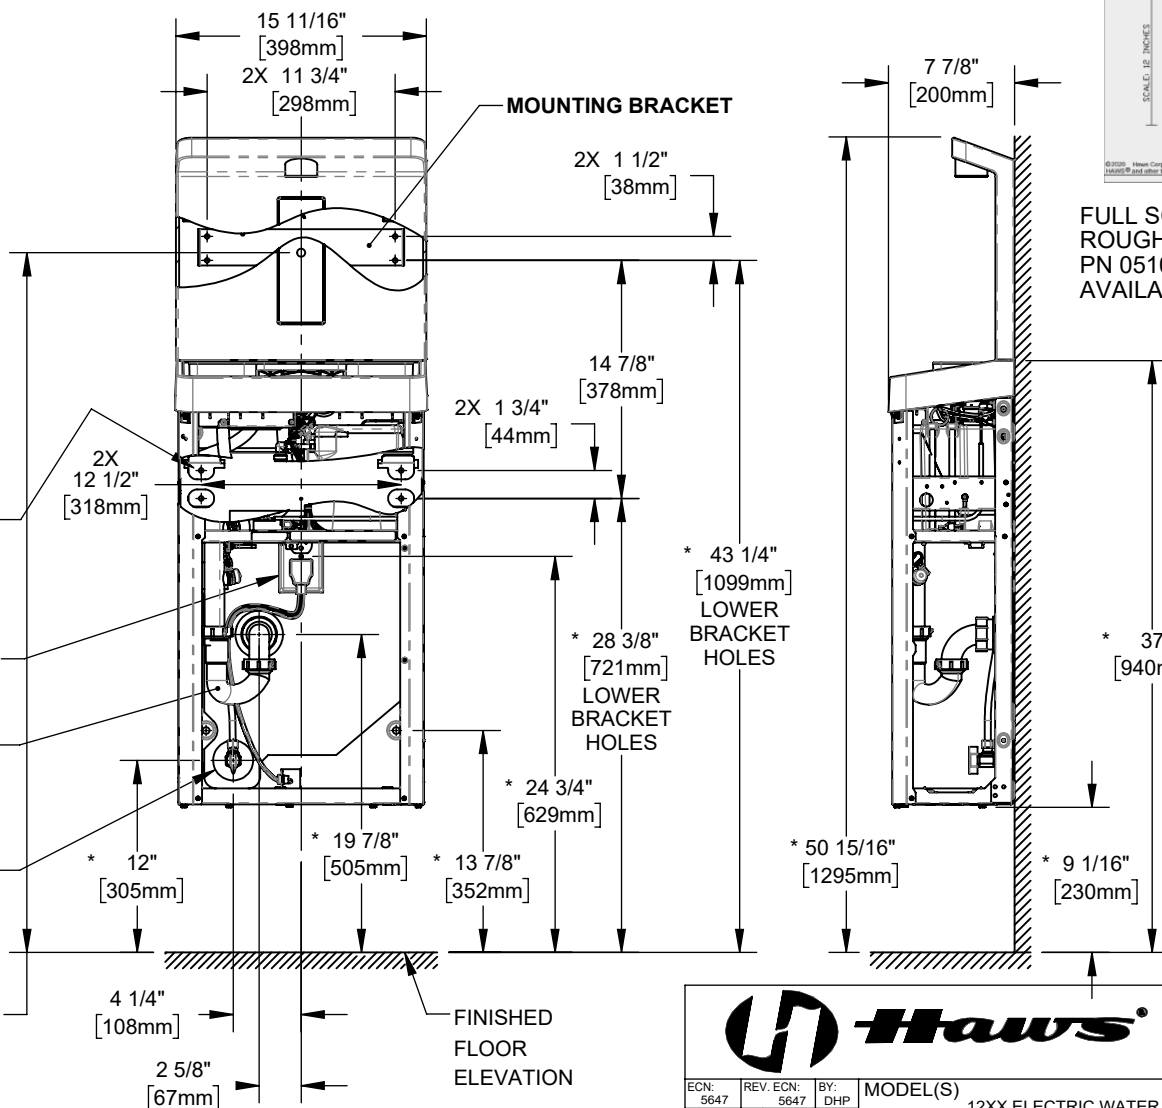


FULL SCALE
ROUGH-IN TEMPLATE
PN 0510001160
AVAILABLE UPON REQUEST




1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN: 5647	REV. ECN: 5647	BY: DHP	MODEL(S)	PART NUMBER
DRAWN: JL	DATE: 07/25/18	CHKD:	12XX ELECTRIC WATER COOLERS	0510001159.D
APPROVED:	DATE:			REVISION
				0A.0
SCALE: 1:12	DRAWING TYPE:	INSTALLATION	SIZE: A	SHEET 1 OF 5

BOTTLE FILLER INSTALLATION DETAILS

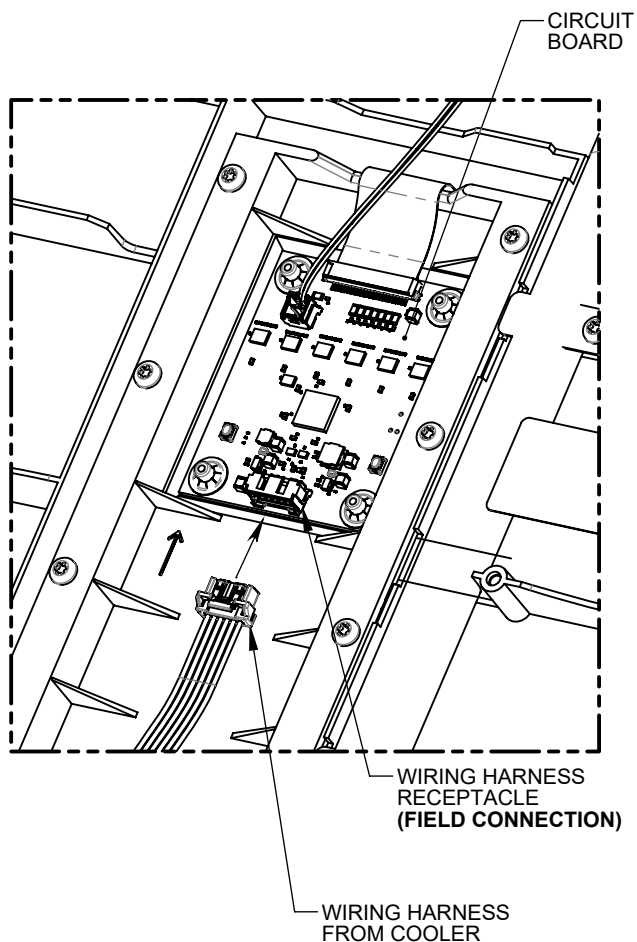

**WIRING HARNESS CONNECTION
(REAR OF BOTTLE FILLER)**

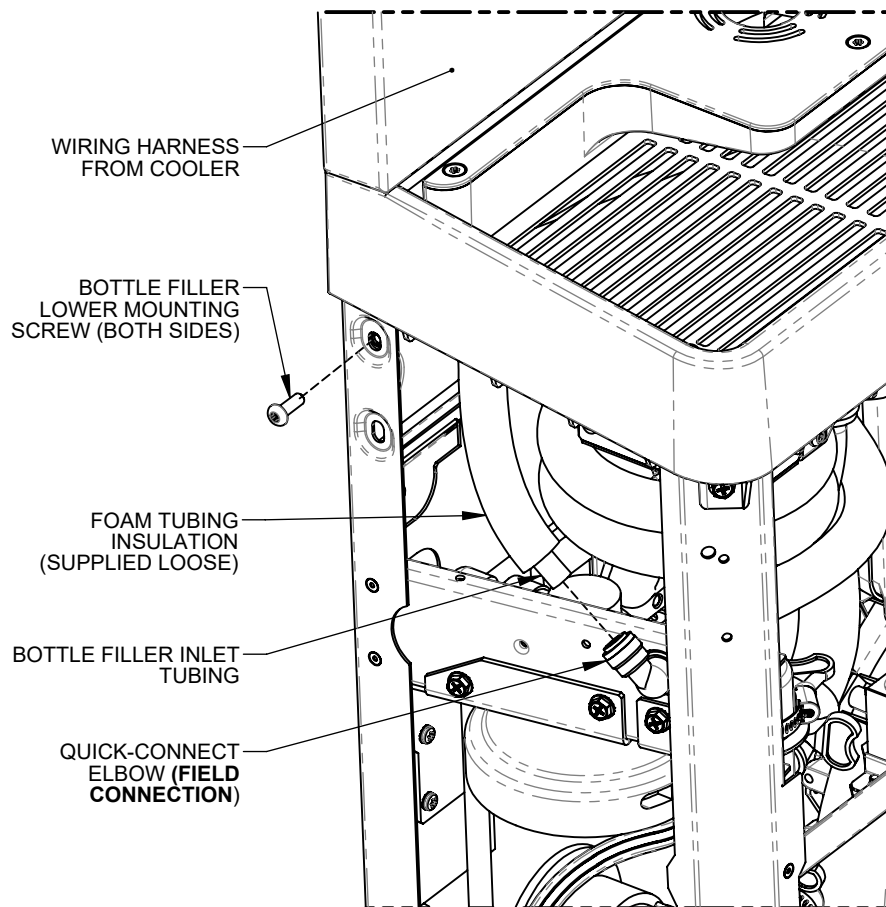

**BOTTLE FILLER MOUNTING &
TUBING CONNECTION**




1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN: 5647	REV. ECN: 5647	BY: DHP	MODEL(S)	PART NUMBER
DRAWN: JL	DATE: 07/25/18	CHKD:	12XX ELECTRIC WATER COOLERS	0510001159.D
APPROVED:	DATE:			REVISION
				0A.0
SCALE: 1:12		DRAWING TYPE:	INSTALLATION	SIZE: A
				SHEET 2 OF 5

RETROFIT INSTALLATION DETAILS

BRACKET HEIGHT

ADULT ADA MAX	ADULT ADA MIN	CHILD ADA
32 3/8"	28 3/8"	25 3/8"

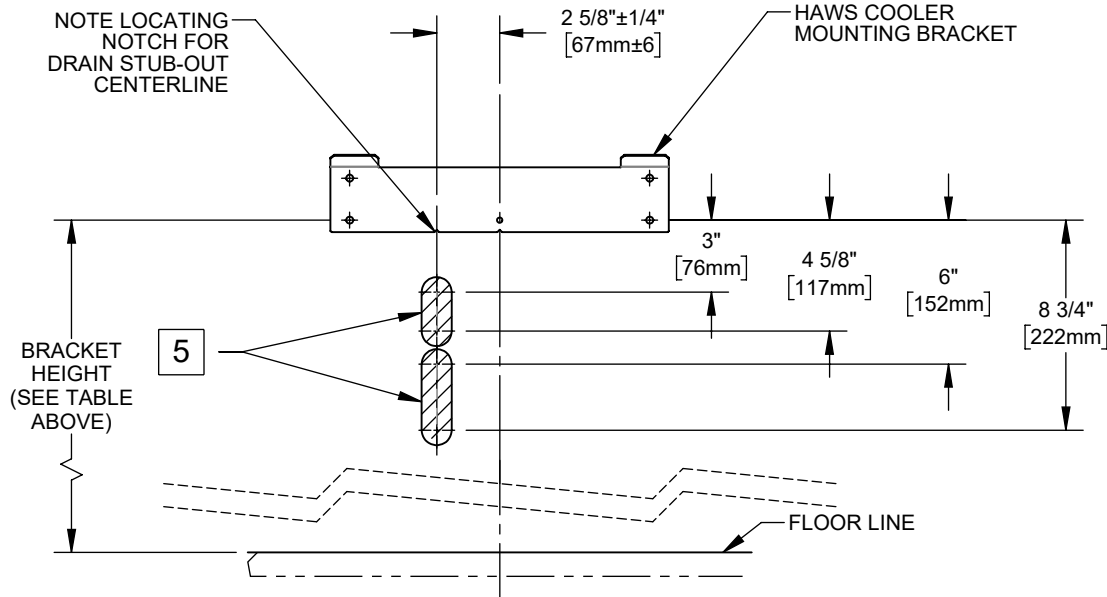


PERMISSIBLE LOCATIONS FOR DRAIN STUB-OUT

NOTES:


- THE 12XX COOLER SERIES IS ABLE TO RETROFIT IN PLACE OF A NUMBER OF COMPETITOR MODELS. SEE RETROFIT TABLE ABOVE FOR PARTIAL LIST OF COOLERS ABLE TO BE REPLACED BY THIS ONE.
THE FOLLOWING DISCLAIMERS APPLY:
 - THE 12XX COOLER CENTERLINE MAY NOT MATCH THE OLD COOLER'S CENTERLINE, SINCE THE 12XX COOLER DRAIN MUST BE 2 5/8" OFF OF CENTER. THIS MAY AFFECT ADA COMPLIANCE.
 - THERE MUST BE WALL BLOCKING OR OTHER STRUCTURAL MATERIAL BEHIND HAWS MOUNTING HOLES.
 - VERIFY THAT DRAIN, ELECTRIC, & WATER SERVICES ARE LOCATED WITHIN BOUNDARIES SPECIFIED ON THIS SHEET AND THE NEXT. SOME RETROFITS MAY REQUIRE THE ELECTRIC OUTLET TO BE MOVED.
- THE P-TRAP IS NOT SUPPLIED. THE VERTICAL DIMENSIONS GIVEN ARE BASED UPON INSTALLATION USING OF A KEENEY 200W P-TRAP, AND SHOULD THEREFORE BE REGARDED AS REFERENCE-ONLY.
- THE CENTERLINE OF THE DRAIN STUB-OUT MUST BE BETWEEN 3" [76mm] & 4-5/8" [118mm] OR BETWEEN 6" [152mm] & 8-3/4" [229mm] BELOW THE LOWERMOST EWC MOUNTING BRACKET HOLES IN ORDER FOR THE P-TRAP TO AFFIX PROPERLY TO THE DRAIN TAILPIECE.
- DEPENDING ON STUB-OUT HEIGHT, SOME TRIMMING OF THE TAILPIECE WILL BE REQUIRED.
- WHATEVER P-TRAP AND STUB-OUT PLUMBING ARE USED, CARE SHOULD BE TAKEN TO ENSURE THAT THE P-TRAP CAN SEAL TO THE STUB-OUT PROPERLY AND STILL ALIGN TO THE DRAIN TAILPIECE (LOCATED AT THE GIVEN DIMENSIONS).

3 RETROFIT TABLE

MANUFACTURER	MODEL
HAWS	ALL MODELS STARTING WITH HWUACP
ELKAY/HALSEY TAYLOR	- ALL MODELS STARTING WITH EB, EI, EMA, EN, EZ, HAC HVR, LI, LMA, LZ, TB, & TI - SINGLE COOLER MODELS STARTING WITH VRC & LVR
OASIS	ALL VERSACOOLER II MODELS
SUNROC	ALL MODELS STARTING WITH ADA A171, A171.8, & A172.8UBL MODELS
MURDOCK	NOTE: THE WATER STOP VALVE MUST BE RELOCATED TO RETROFIT A FILTERED 12XX COOLER

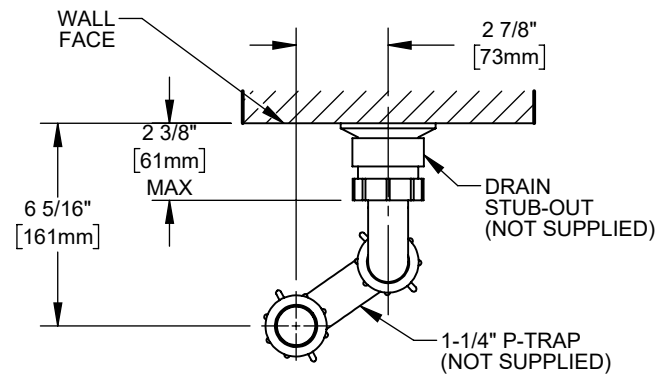

6 DRAIN STUB-OUT/P-TRAP DETAIL (VIEWED FROM TOP)

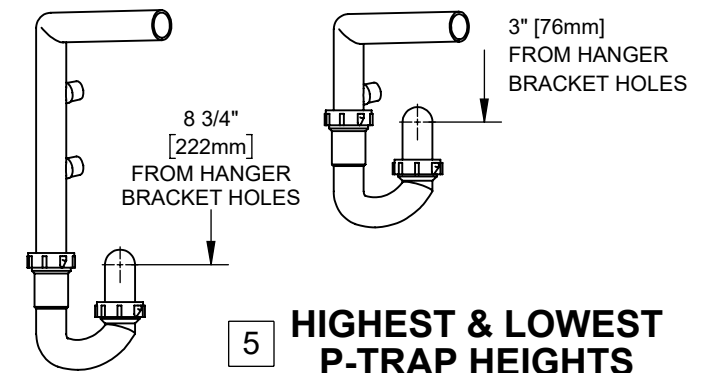


5 HIGHEST & LOWEST P-TRAP HEIGHTS




1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN: 5647	REV. ECN: 5647	BY: DHP	MODEL(S)	PART NUMBER
DRAWN: JL	DATE: 07/25/18	CHKD:	12XX ELECTRIC WATER COOLERS	0510001159.D
APPROVED:	DATE:			REVISION
				0A.0
		SCALE: 1/8	DRAWING TYPE: INSTALLATION	SHEET 3 OF 5

RETROFIT INSTALLATION DETAILS

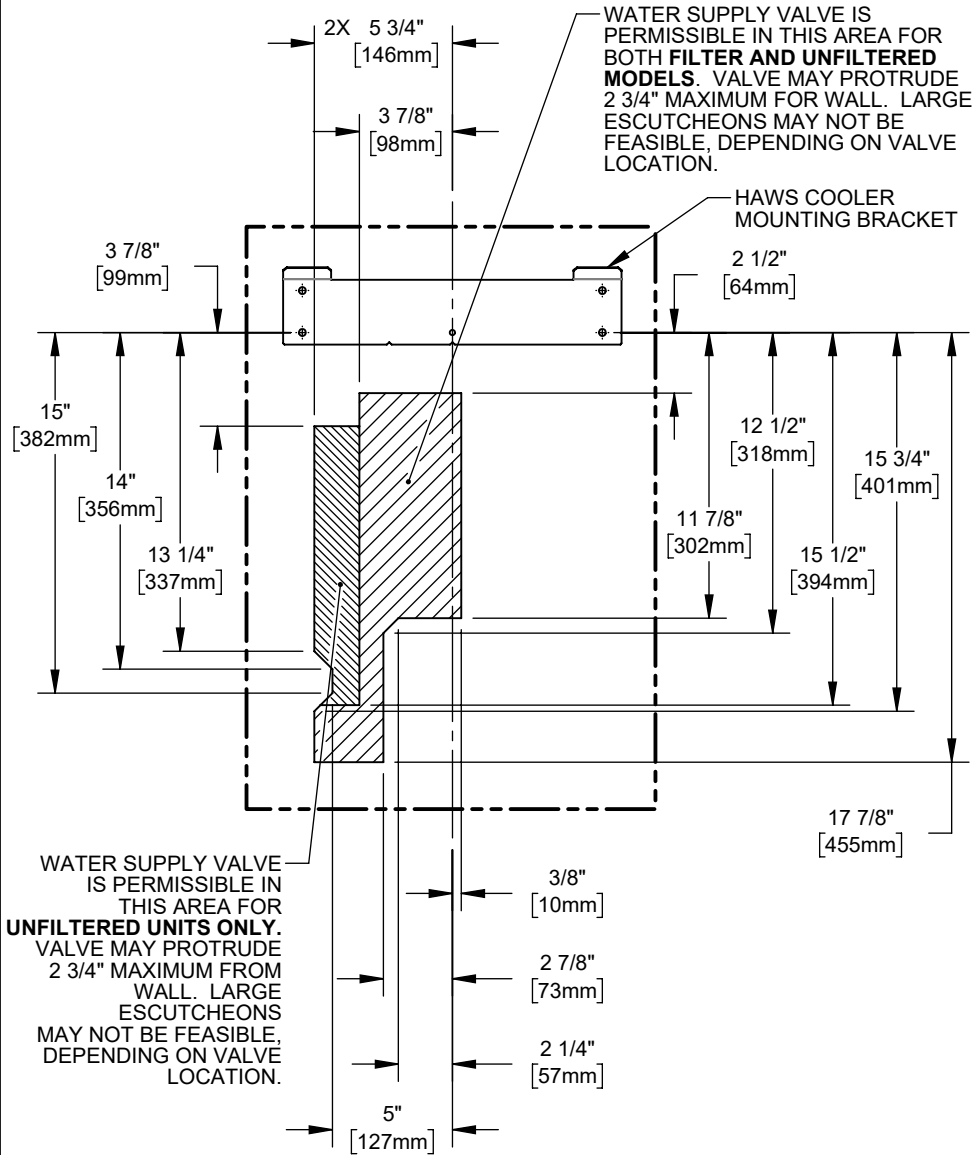


**PERMISSIBLE WATER
SUPPLY LOCATIONS**

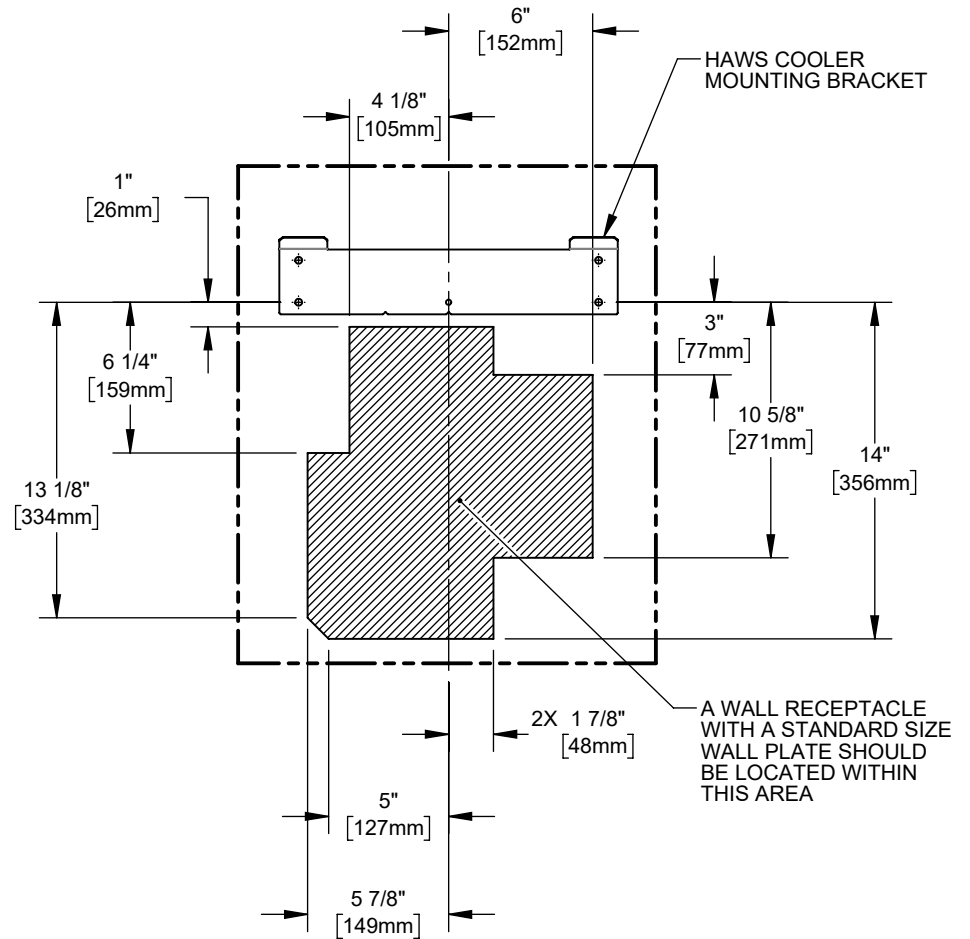

**PERMISSIBLE ELECTRICAL
RECEPTACLE LOCATIONS**


ECN: 5647		REV. ECN: 5647		BY: DHP		MODEL(S)		PART NUMBER	
DRAWN: JL		DATE: 07/25/18		CHKD:		12XX ELECTRIC WATER COOLERS		0510001159.D	
APPROVED:		DATE:						REVISION	
								0A.0	
						SCALE: 1/8"		SHEET 4 OF 5	
						DRAWING TYPE: INSTALLATION		SIZE: A	

MAINTENANCE

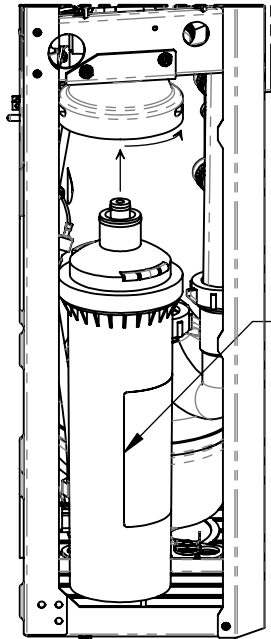


NOTE THE LEFT EDGE OF THE LABEL FACING OUT THE SIDE DURING INSERTION OF FILTER INTO FILTER HEAD

FILTER REPLACEMENT

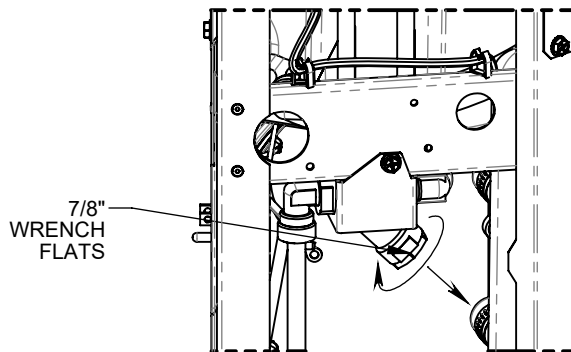

7/8" WRENCH FLATS

Y-STRAINER CLEANING

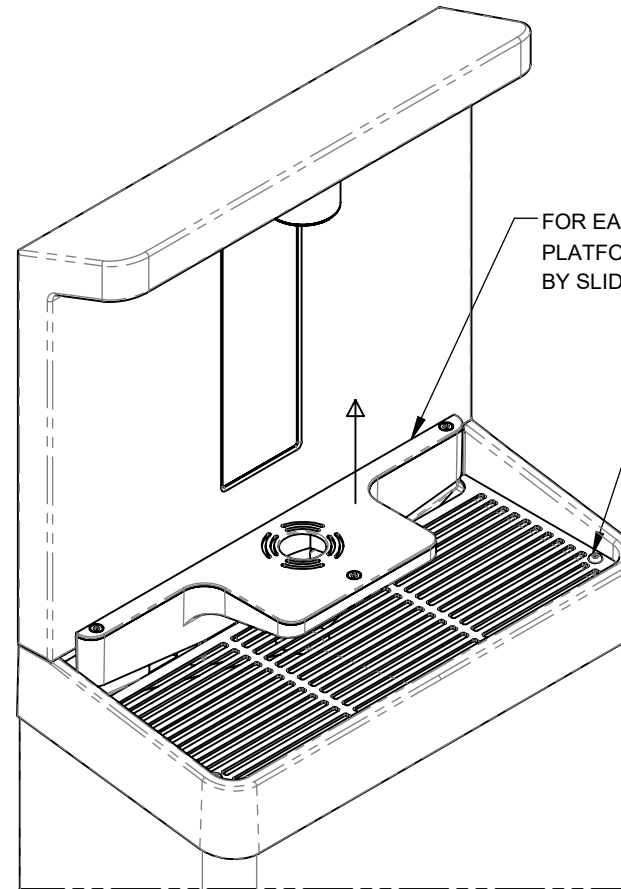

FOR EASIER CLEANING, PLATFORM CAN BE RAISED 3/4" BY SLIDING UP.

2X SCREWS CAN BE REMOVED TO ALLOW REMOVAL OF GRATE.

CLEANING DRAIN BASIN AREA



1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN: 5647	REV. ECN: 5647	BY: DHP	MODEL(S)	PART NUMBER
DRAWN: JL	DATE: 07/25/18	CHKD:	12XX ELECTRIC WATER COOLERS	0510001159.D
APPROVED:	DATE:			REVISION
				0A.0
SCALE: 1:8	DRAWING TYPE:	INSTALLATION	SIZE: A	SHEET 5 OF 5