



## 11B\_Ant1\_2462\_0~Reference

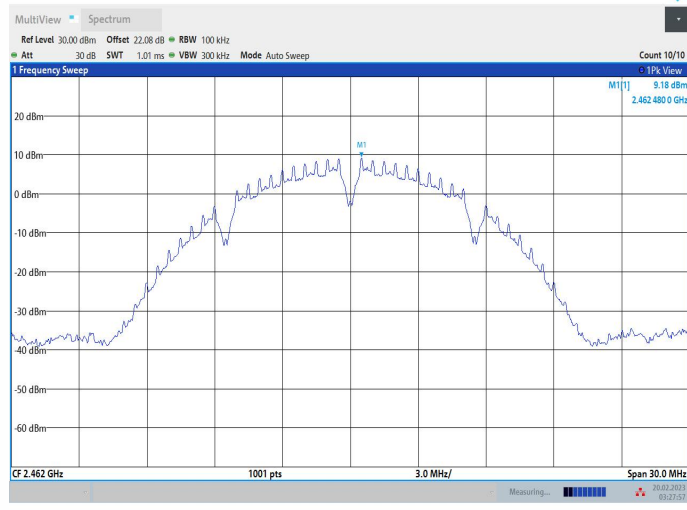


03:27:57 20.02.2023

## 11B\_Ant1\_2462\_30~1000

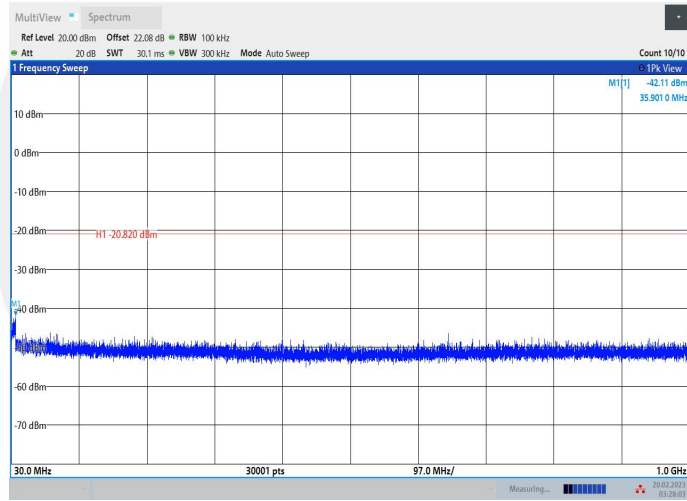


03:28:04 20.02.2023

## 11B\_Ant1\_2462\_1000~26500

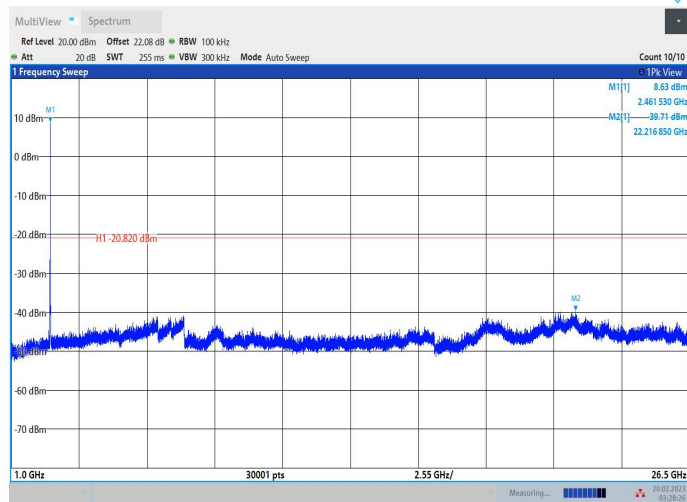


03:28:26 20.02.2023


## 11G\_Ant1\_2412\_0~Reference

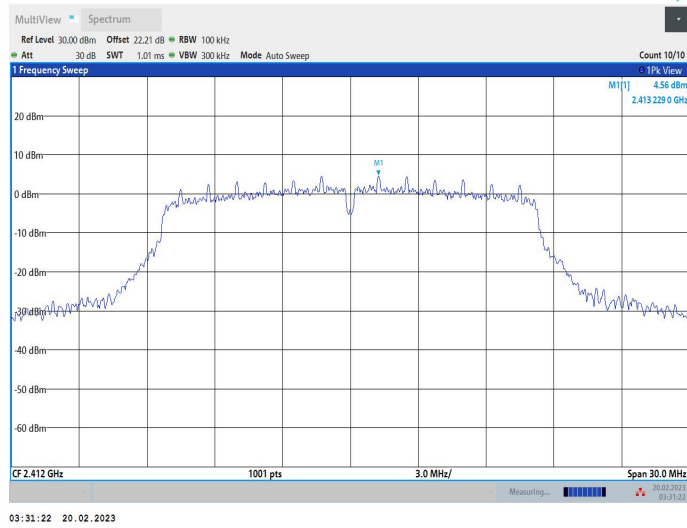


## 11G\_Ant1\_2412\_30~1000

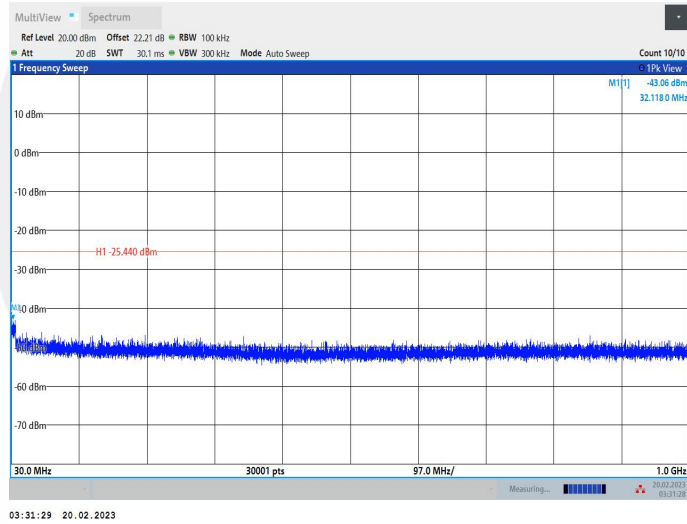


## 11G\_Ant1\_2412\_1000~26500

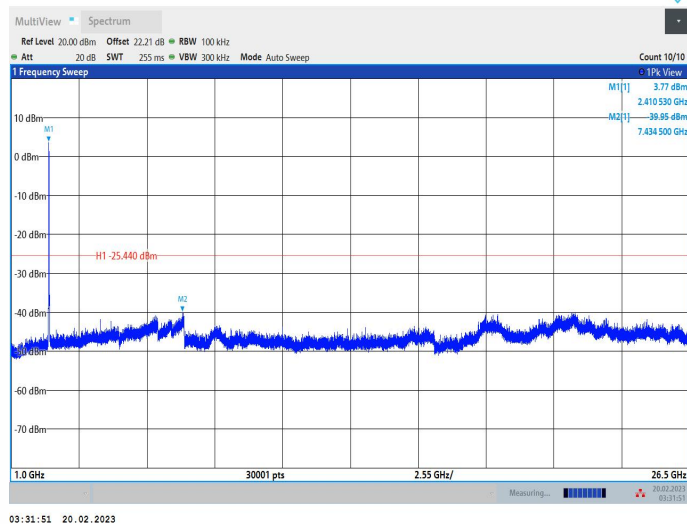


## 11G\_Ant1\_2437\_0~Reference

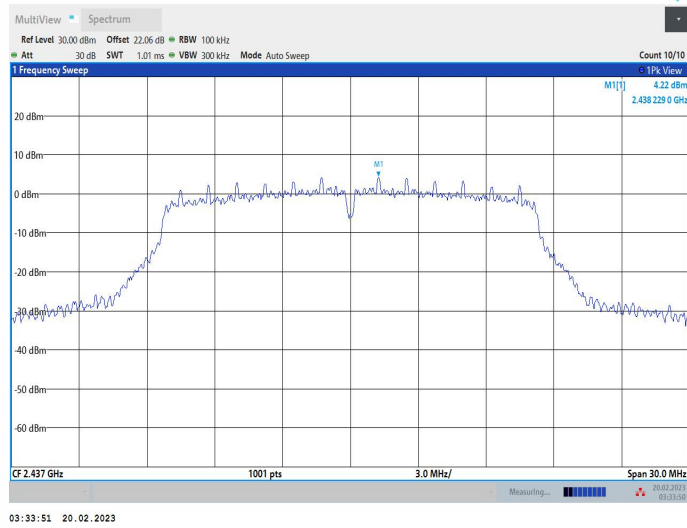


## 11G\_Ant1\_2437\_30~1000

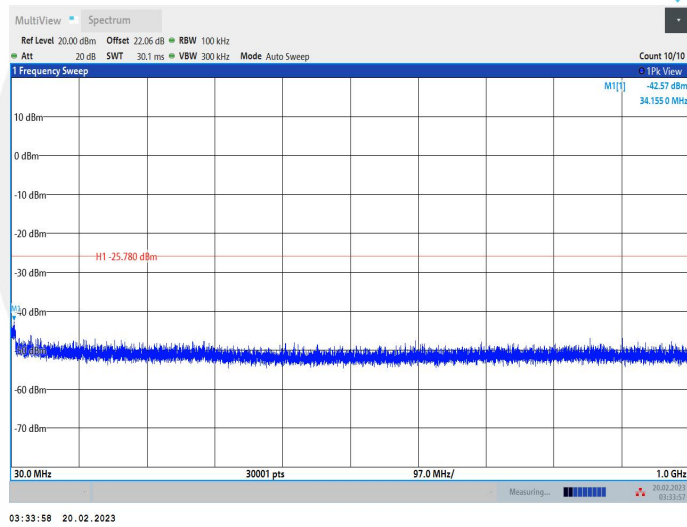


## 11G\_Ant1\_2437\_1000~26500

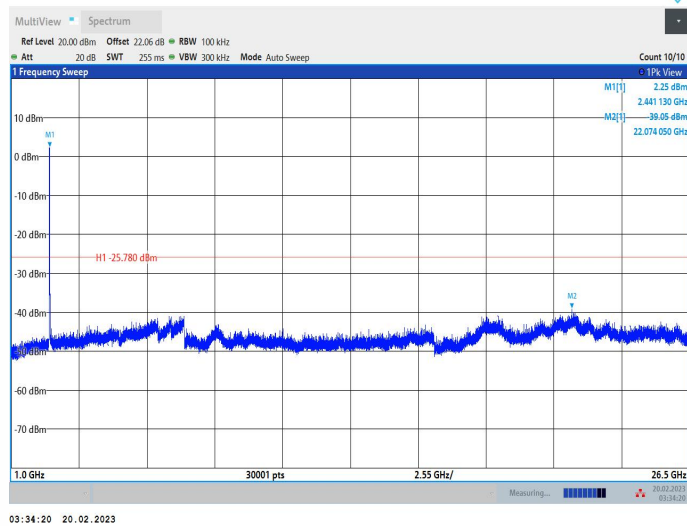


## 11G\_Ant1\_2462\_0~Reference

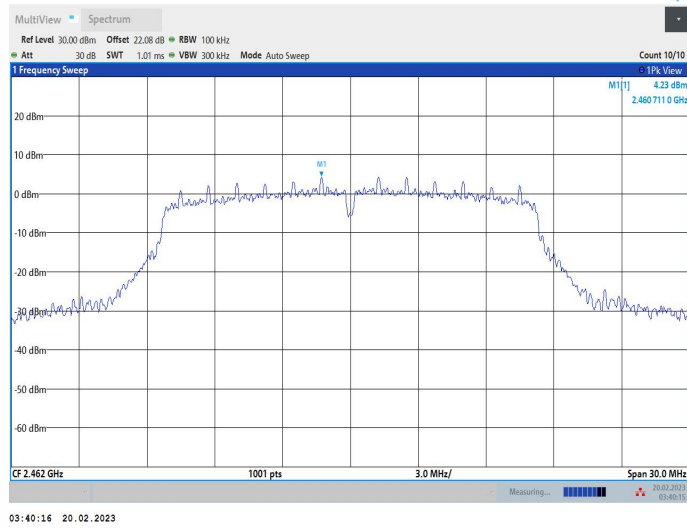


## 11G\_Ant1\_2462\_30~1000

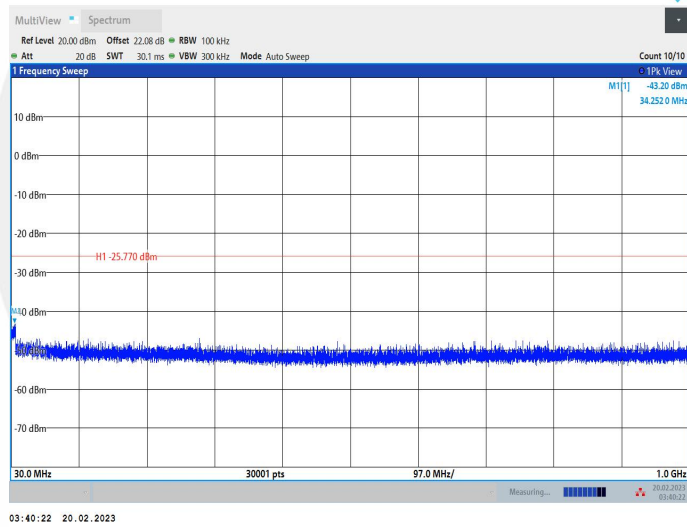


## 11G\_Ant1\_2462\_1000~26500

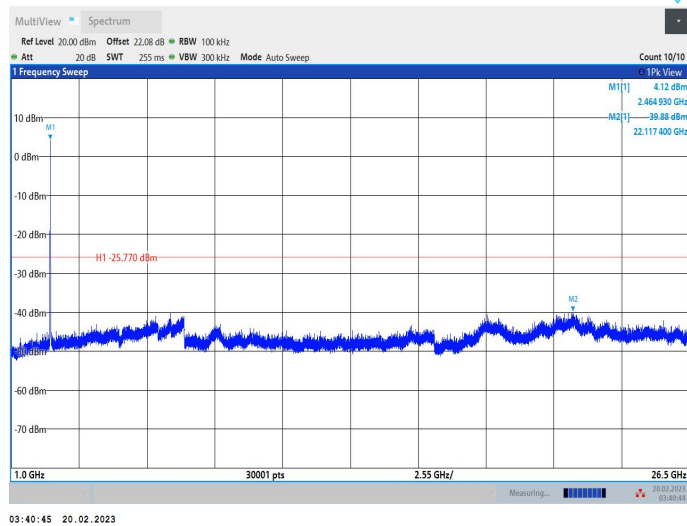


## 11N20SISO\_Ant1\_2412\_0~Reference

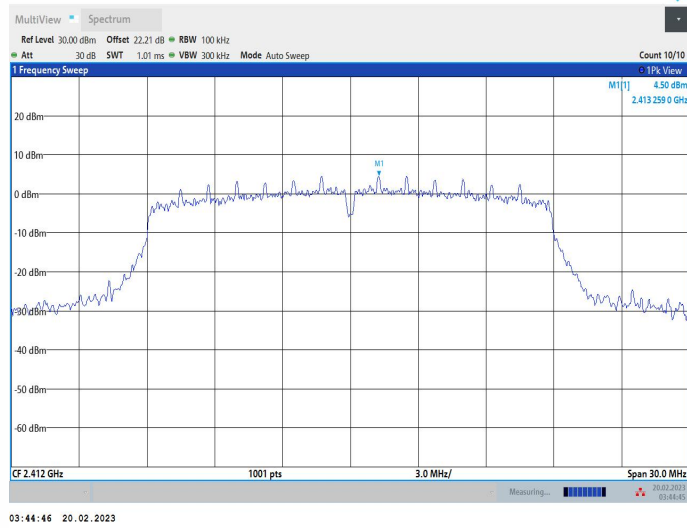


## 11N20SISO\_Ant1\_2412\_30~1000

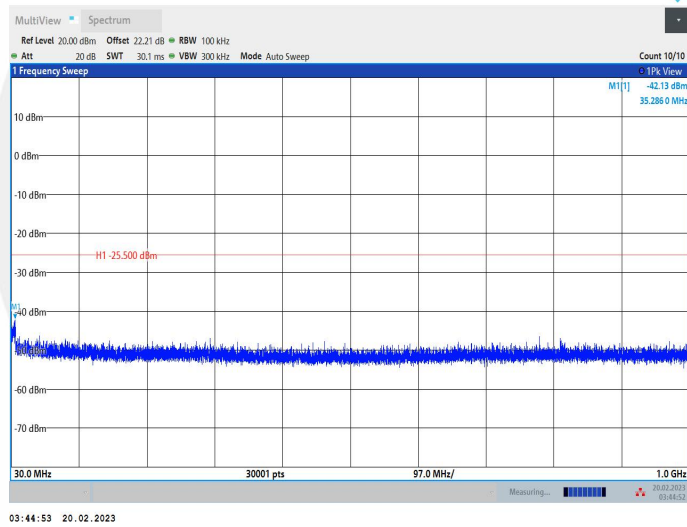


## 11N20SISO\_Ant1\_2412\_1000~26500

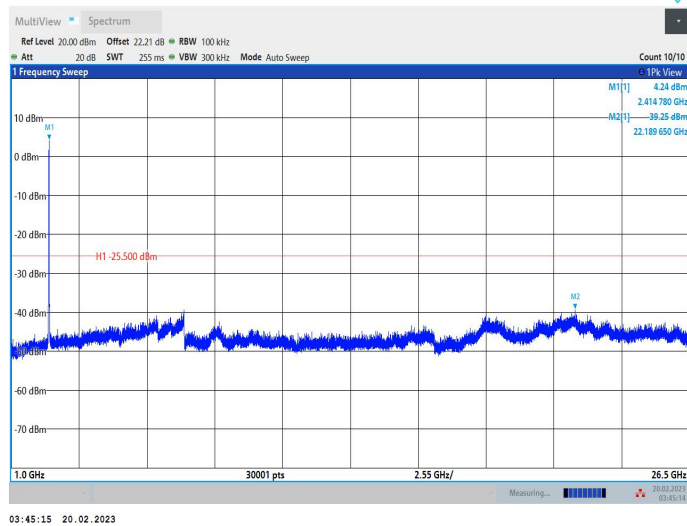


## 11N20SISO\_Ant1\_2437\_0~Reference

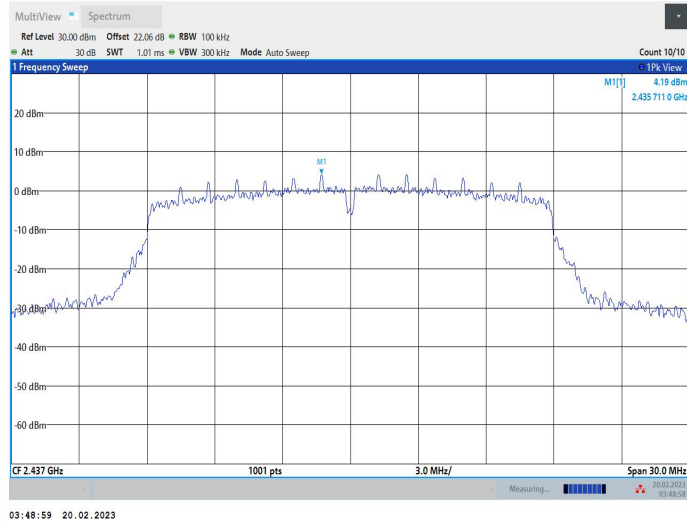


## 11N20SISO\_Ant1\_2437\_30~1000

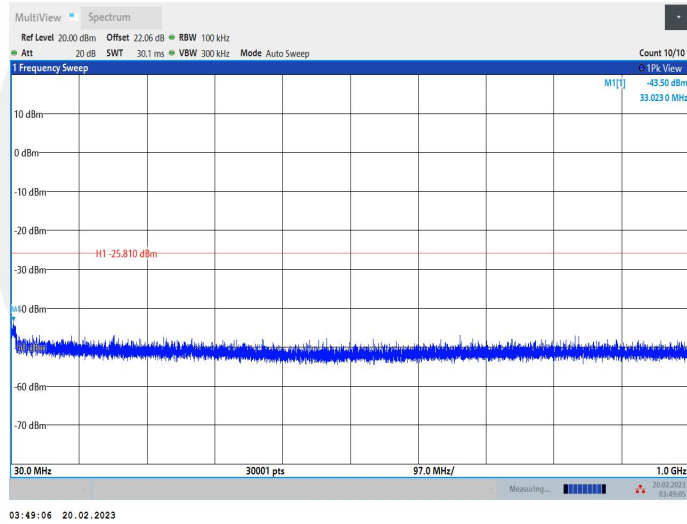


## 11N20SISO\_Ant1\_2437\_1000~26500

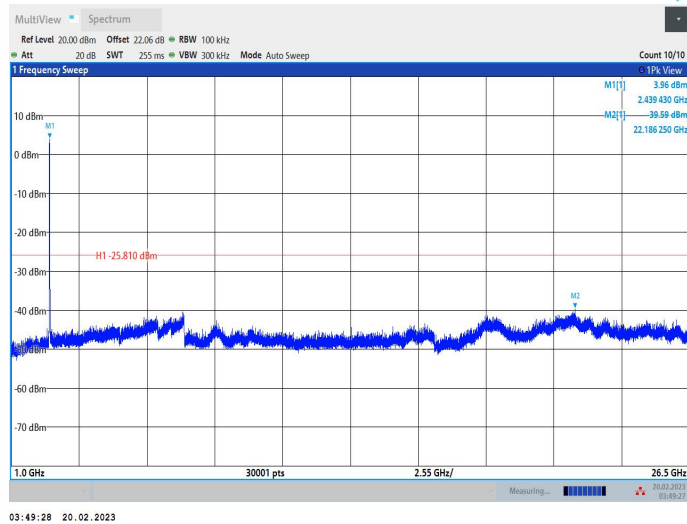


## 11N20SISO\_Ant1\_2462\_0~Reference

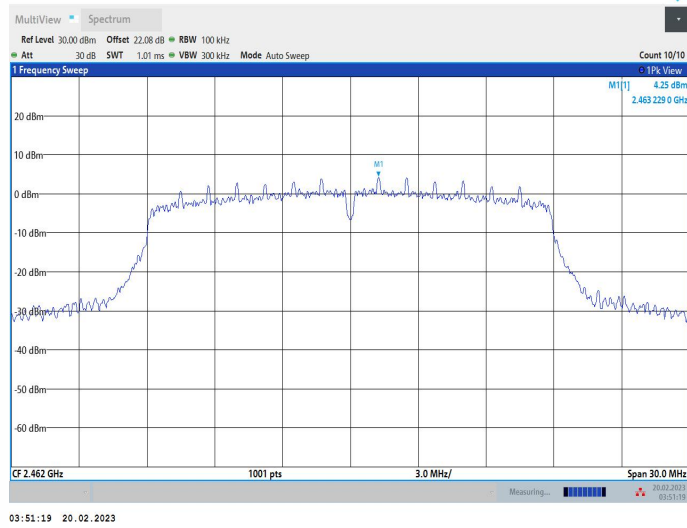


## 11N20SISO\_Ant1\_2462\_30~1000

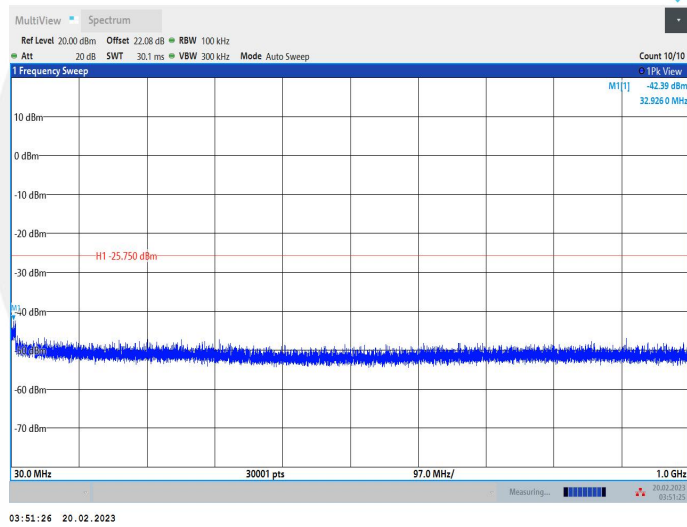


## 11N20SISO\_Ant1\_2462\_1000~26500

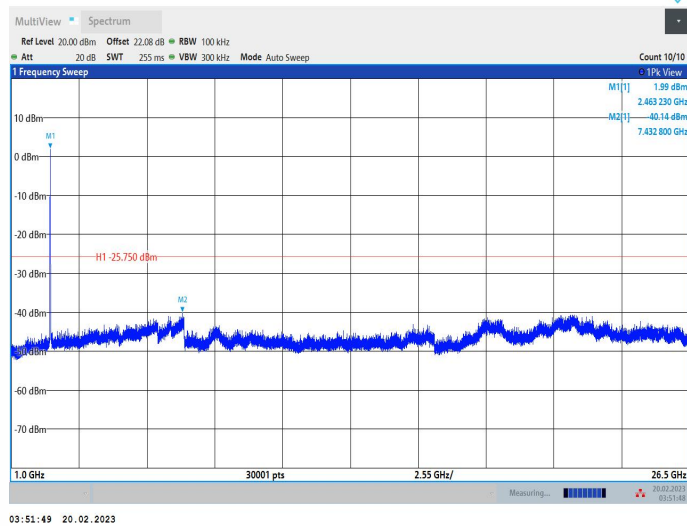


## 11N40SISO\_Ant1\_2422\_0~Reference

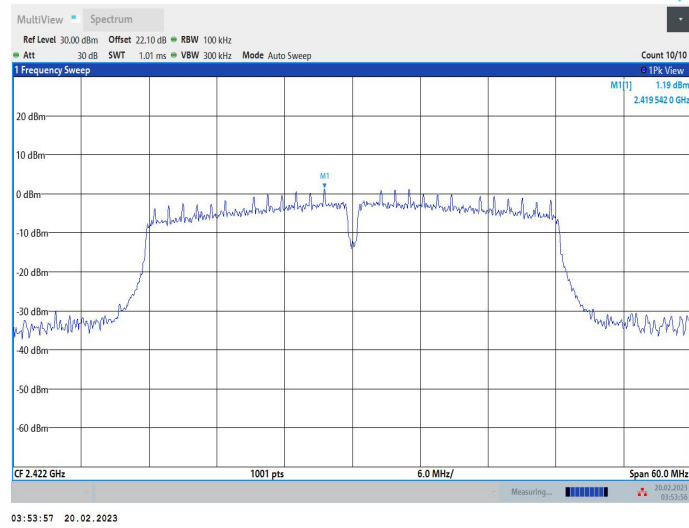

## 11N40SISO\_Ant1\_2422\_30~1000

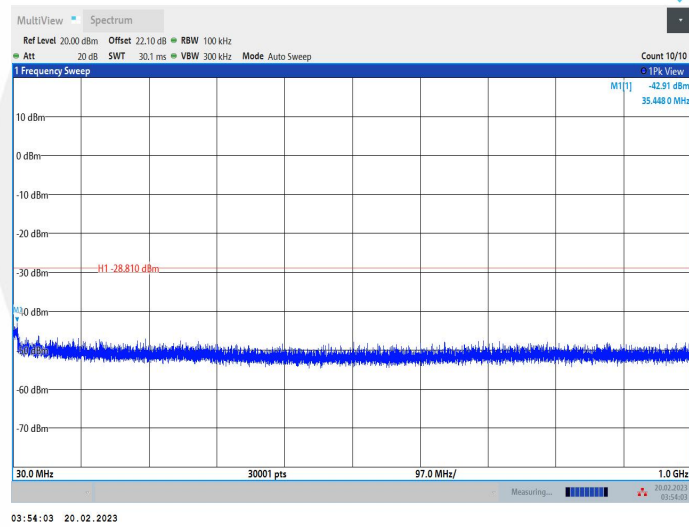


## 11N40SISO\_Ant1\_2422\_1000~26500

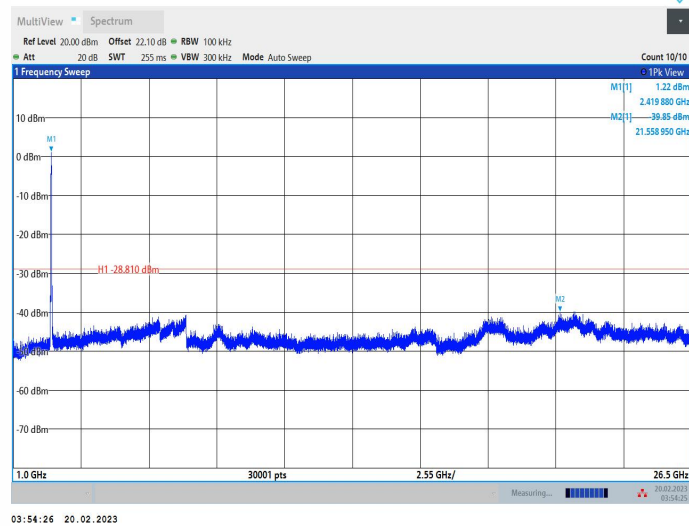





## 11N40SISO\_Ant1\_2437\_0~Reference

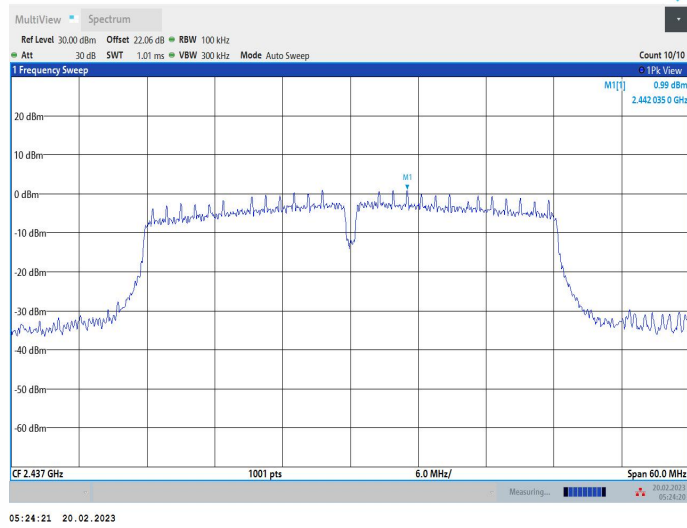


## 11N40SISO\_Ant1\_2437\_30~1000

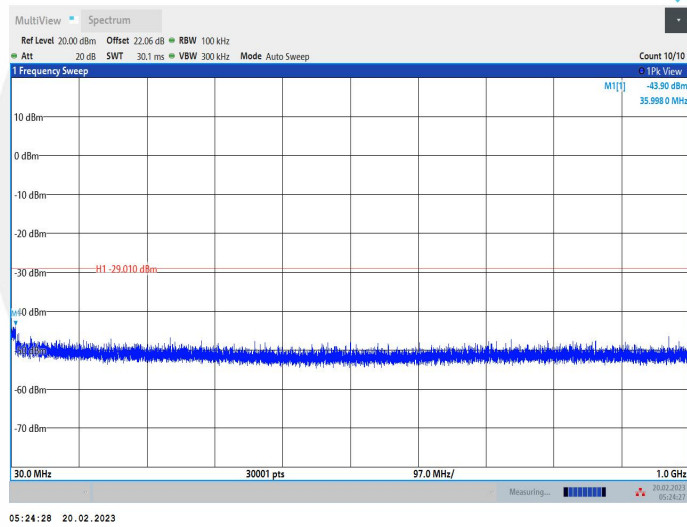


## 11N40SISO\_Ant1\_2437\_1000~26500

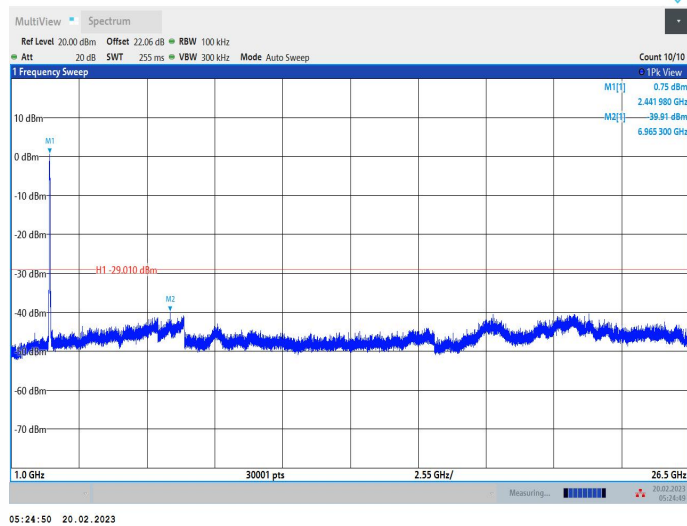


## 11N40SISO\_Ant1\_2452\_0~Reference

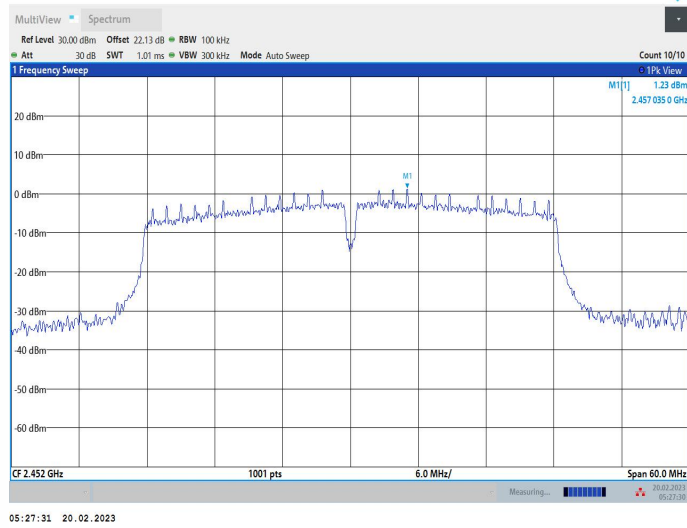

## 11N40SISO\_Ant1\_2452\_30~1000

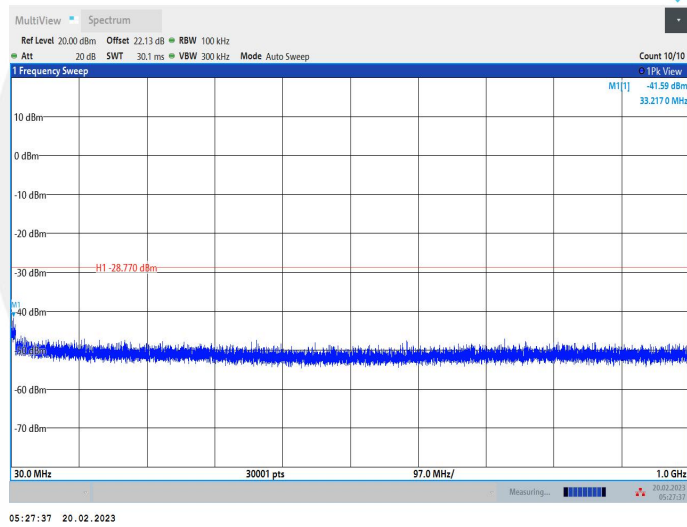

## 11N40SISO\_Ant1\_2452\_1000~26500

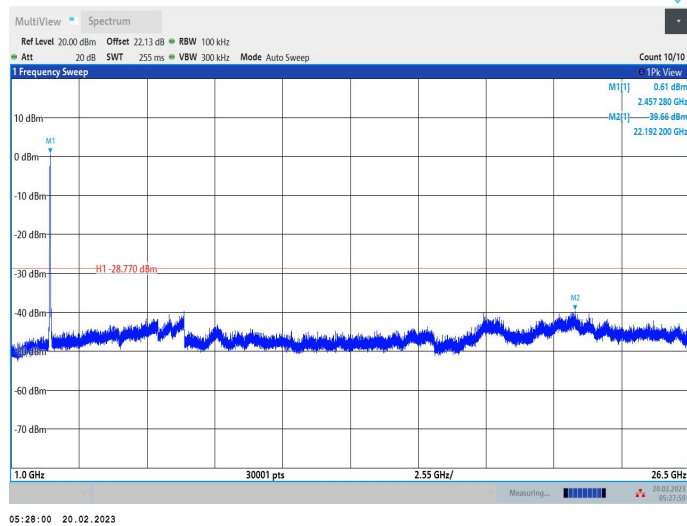

## 8.5 RADIATED SPURIOUS EMISSION

### 8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 Meas Guidance v05r02

### 8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).  
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ )	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ( $\mu\text{V}/\text{m}$ )	300
0.490-1.705	24000/F(KHz)	20 log ( $\mu\text{V}/\text{m}$ )	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

### 8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

### 8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz (1GHz to 25GHz), 100 kHz for  $f < 1$  GHz (30MHz to 1GHz), 200Hz for  $f < 150$  KHz (9KHz to 150KHz), 9KHz for  $f < 30$  MHz (150KHz to 30KHz)

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

### 8.5.5 Test Results

Temperature:	25° C
Relative Humidity:	60%
ATM Pressure:	1011 mbar

#### ■ Spurious Emission below 30MHz(9KHz to 30MHz)

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $40\log(\text{Specific distance}/ \text{test distance})$ ( dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor

- Spurious Emission Above 1GHz(1GHz to 25GHz)
- All antenna modes 2.4G 802.11b/g/n have been tested, and the worst result recorded was report as below:

Test mode: 802.11 b Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4822.5	V	48.96	42.04	74	54	25.04	11.96
14745	V	64.15	48.36	74	54	9.85	5.64
17956.8	V	68.89	47.56	74	54	5.11	6.44
4824.37	H	48.05	42.22	74	54	25.95	11.78
14658.7	H	63.94	50.06	74	54	10.06	3.94
17611.8	H	68.54	50.23	74	54	5.46	3.77

Test mode: 802.11 b Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4873.12	V	47.19	42.09	74	54	26.81	11.91
14748.7	V	64.24	50.80	74	54	9.76	3.20
17955	V	68.73	47.84	74	54	5.27	6.16
11493.7	H	60.36	50.43	74	54	13.64	3.57
14683.1	H	64.24	49.67	74	54	9.76	4.33
17966.2	H	68.95	47.98	74	54	5.05	6.02

Test mode: 802.11 b Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4923.75	V	51.46	42.80	74	54	22.54	11.20
14647.5	V	63.87	50.42	74	54	10.13	3.58
17608.1	V	69.70	50.45	74	54	4.30	3.55
4923.75	H	49.64	42.90	74	54	24.36	11.10
14728.1	H	64.03	50.91	74	54	9.97	3.09
17643.7	H	68.90	50.28	74	54	5.10	3.72

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All antenna modes 2.4G 802.11b/g/n have been tested, and the worst result recorded was report as below:

Test mode: 802.11 b Frequency: Channel 1: 2412MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2326.22	V	44.72	74	43.00	54
2328.41	H	45.29	74	42.78	54

Test mode: 802.11 b Frequency: Channel 11: 2462MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2485.99	V	47.08	74	42.30	54
2487.25	H	48.96	74	42.09	54

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).


(2) Emission Level= Reading Level+Correct Factor +Cable Loss.

(3) Correct Factor= Ant\_F + Cab\_L - Preamp

(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


**Spurious Emission in Restricted Band 2310-2390MHz**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 1: 2412MHz     Channel 3: 2422MHz    Polarity: H  
 VBW=3MHz

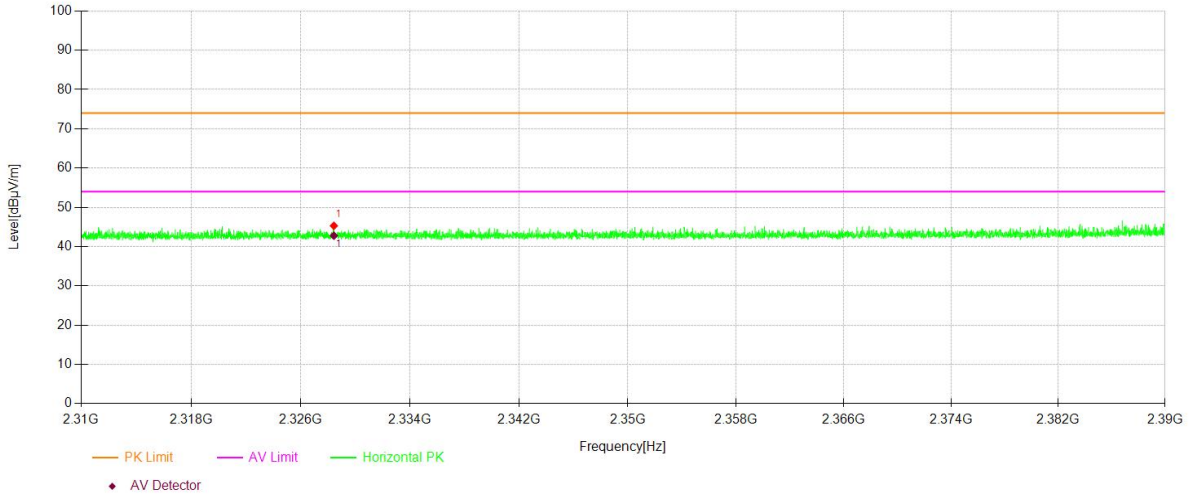

**Spurious Emission in Restricted Band 2310-2390MHz**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)  
 Channel 1: 2412MHz     Channel 3: 2422MHz    Polarity: V  
 VBW=3MHz

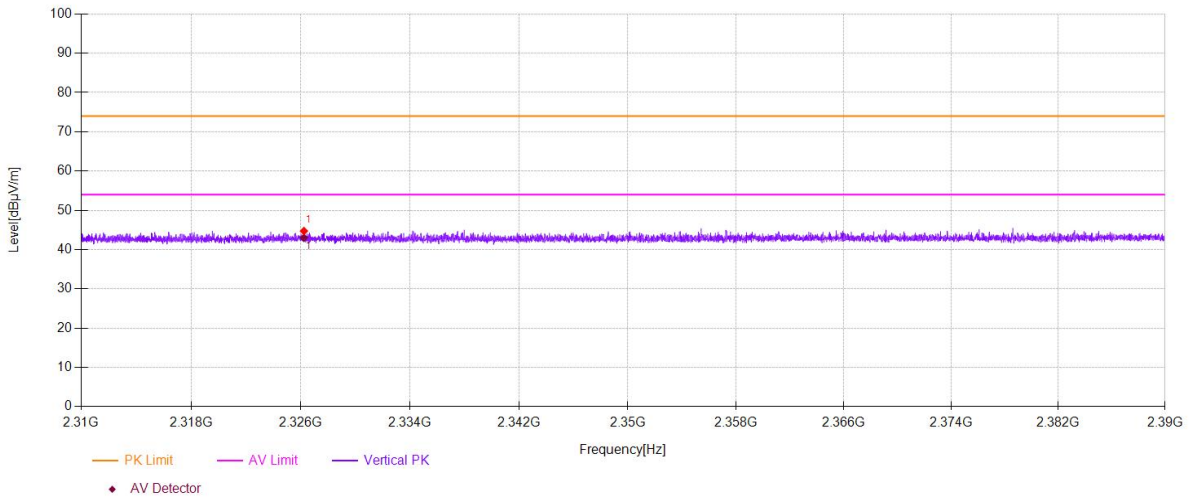


**Spurious Emission in Restricted Band 2483.5-2500MHz**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)

Channel 11: 2462MHz     Channel 9: 2452MHz    Polarity: H

                  VBW=3MHz

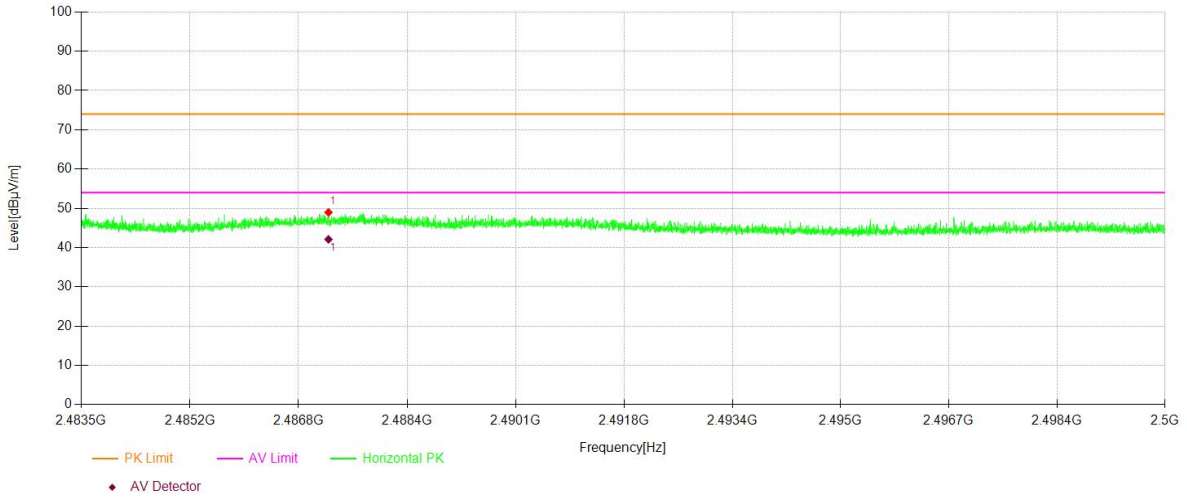


**Spurious Emission in Restricted Band 2483.5-2500MHz**

Test Model     802.11b     802.11g     802.11n(HT20)     802.11n(HT40)

Channel 11: 2462MHz     Channel 9: 2452MHz    Polarity: V


                  VBW=3MHz

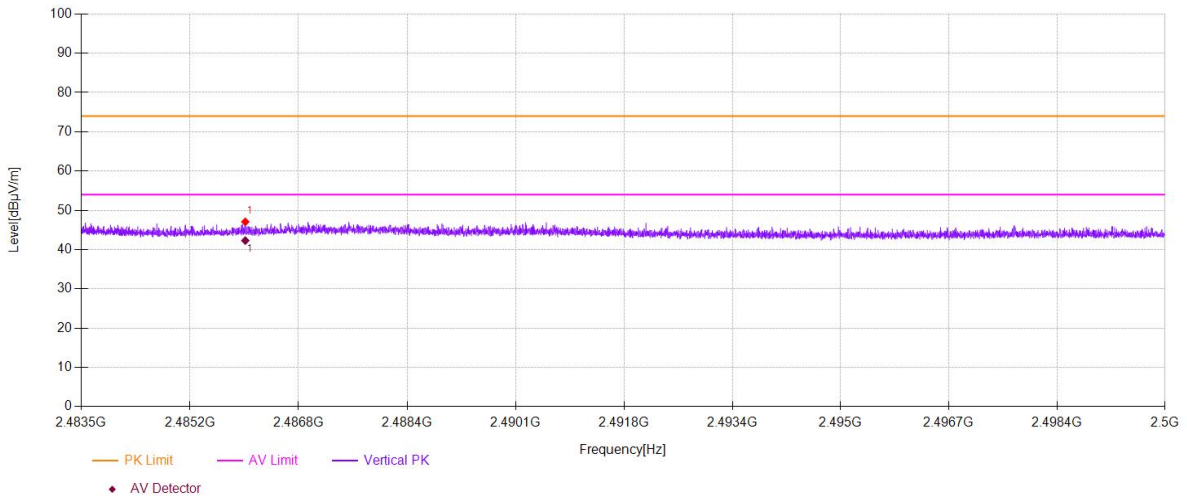




- Spurious Emission below 1GHz (30MHz to 1GHz)
- All antenna modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

2412

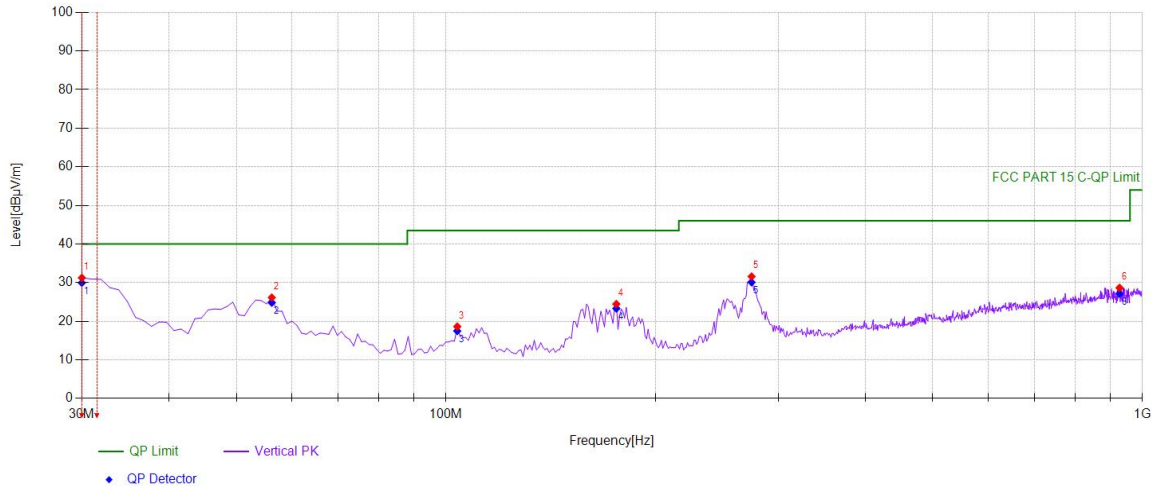


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Detector	Limit [dBµV/m]	Margin [dB]	Polarity
1	30	49.78	-18.53	31.25	PK	40.00	8.75	Vertical
2	56.2162	44.17	-18.04	26.13	PK	40.00	13.87	Vertical
3	103.793	35.62	-17.00	18.62	PK	43.50	24.88	Vertical
4	175.645	43.09	-18.64	24.45	PK	43.50	19.05	Vertical
5	274.684	46.06	-14.48	31.58	PK	46.00	14.42	Vertical
6	927.177	31.34	-2.69	28.65	PK	46.00	17.35	Vertical

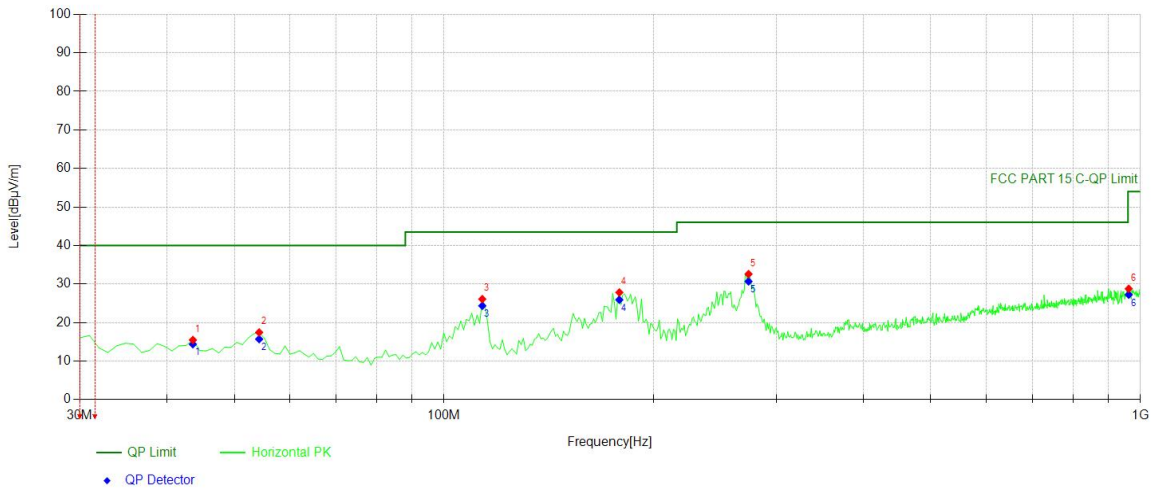


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Detector	Limit [dBµV/m]	Margin [dB]	Polarity
1	43.5936	33.14	-17.66	15.48	PK	40.00	24.52	Horizontal
2	54.2743	35.23	-17.78	17.45	PK	40.00	22.55	Horizontal
3	113.503	43.62	-17.53	26.09	PK	43.50	17.41	Horizontal
4	178.558	46.29	-18.47	27.82	PK	43.50	15.68	Horizontal
5	273.713	47.13	-14.54	32.59	PK	46.00	13.41	Horizontal
6	962.132	31.01	-2.23	28.78	PK	54.00	25.22	Horizontal

2437

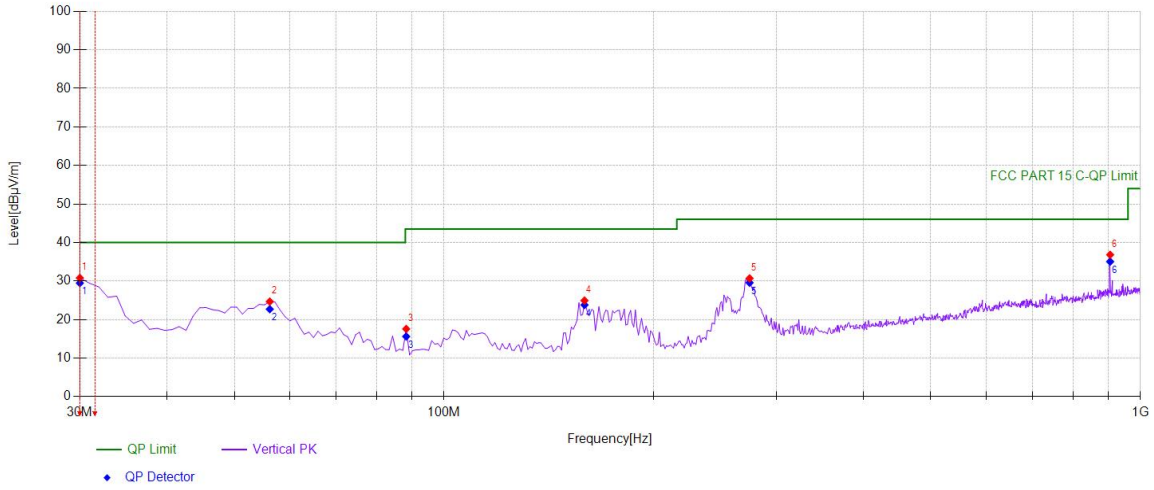


### Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Detector	Limit [dBµV/m]	Margin [dB]	Polarity
1	30	49.33	-18.53	30.80	PK	40.00	9.20	Vertical
2	56.2162	42.71	-18.04	24.67	PK	40.00	15.33	Vertical
3	88.2583	37.14	-19.56	17.58	PK	43.50	25.92	Vertical
4	159.139	44.55	-19.62	24.93	PK	43.50	18.57	Vertical
5	274.684	45.18	-14.48	30.70	PK	46.00	15.30	Vertical
6	904.844	39.64	-2.82	36.82	PK	46.00	9.18	Vertical

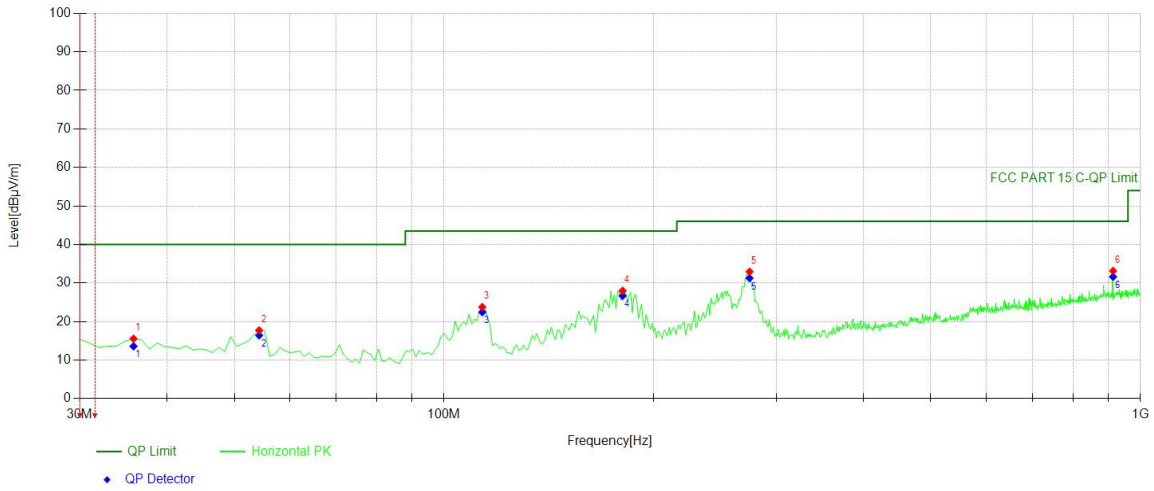


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Detector	Limit [dBµV/m]	Margin [dB]	Polarity
1	35.8258	33.72	-18.17	15.55	PK	40.00	24.45	Horizontal
2	54.2743	35.50	-17.78	17.72	PK	40.00	22.28	Horizontal
3	113.503	41.30	-17.53	23.77	PK	43.50	19.73	Horizontal
4	180.500	46.35	-18.36	27.99	PK	43.50	15.51	Horizontal
5	274.684	47.42	-14.48	32.94	PK	46.00	13.06	Horizontal
6	913.583	36.00	-2.85	33.15	PK	46.00	12.85	Horizontal

2462

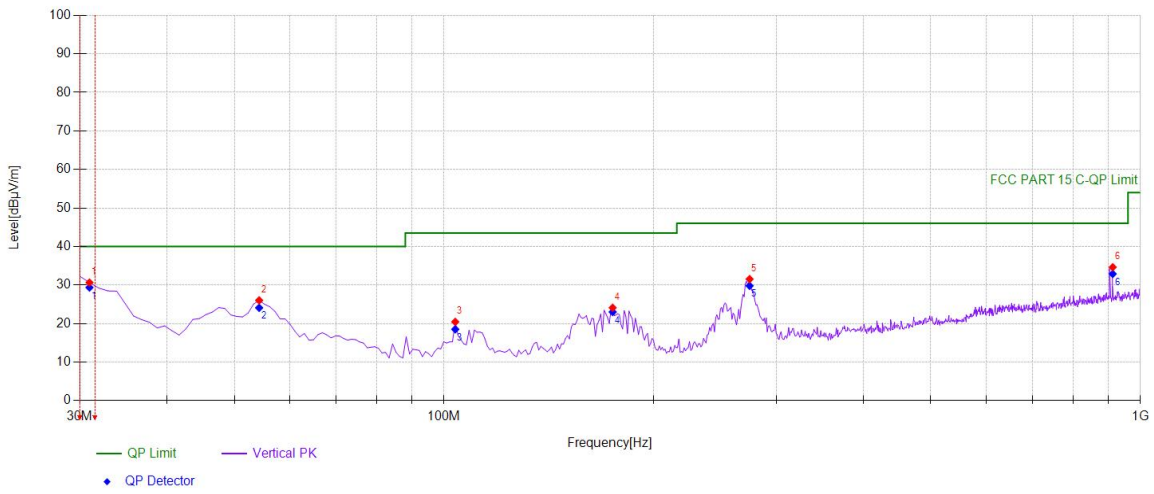

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	30.971	49.12	-18.47	30.65	PK	40.00	9.35	Vertical
2	54.2743	43.81	-17.78	26.03	PK	40.00	13.97	Vertical
3	103.793	37.45	-17.00	20.45	PK	43.50	23.05	Vertical
4	174.674	42.80	-18.69	24.11	PK	43.50	19.39	Vertical
5	274.684	46.02	-14.48	31.54	PK	46.00	14.46	Vertical
6	912.612	37.48	-2.85	34.63	PK	46.00	11.37	Vertical

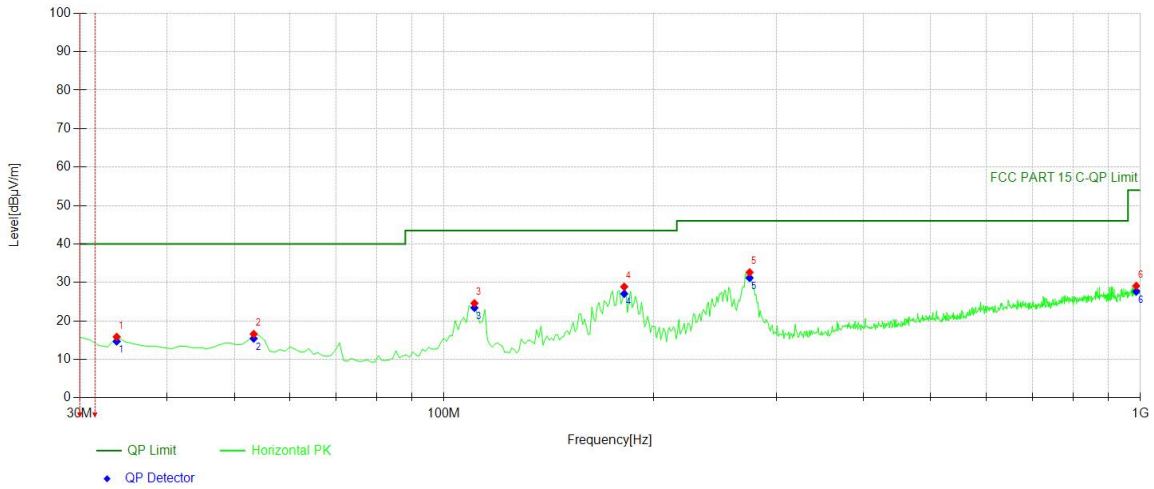

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Detector	Limit [dBµV/m]	Margin [dB]	Polarity
1	33.8839	34.14	-18.29	15.85	PK	40.00	24.15	Horizontal
2	53.3033	34.24	-17.65	16.59	PK	40.00	23.41	Horizontal
3	110.590	41.94	-17.35	24.59	PK	43.50	18.91	Horizontal
4	181.471	47.18	-18.30	28.88	PK	43.50	14.62	Horizontal
5	274.684	47.11	-14.48	32.63	PK	46.00	13.37	Horizontal
6	986.406	30.84	-1.73	29.11	PK	54.00	24.89	Horizontal

## 8.6 CONDUCTED EMISSIONS TEST

### 8.6.1 Applicable Standard

According to FCC Part 15.207(a)

### 8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 8.6.3 Test Configuration

Test according to clause 7.3conducted emission test setup


### 8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.  
Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
Repeat above procedures until all frequency measured were complete.

### 8.6.5 Test Results

Pass

The AC120V voltage has been tested, and the worst result recorded was report as below:

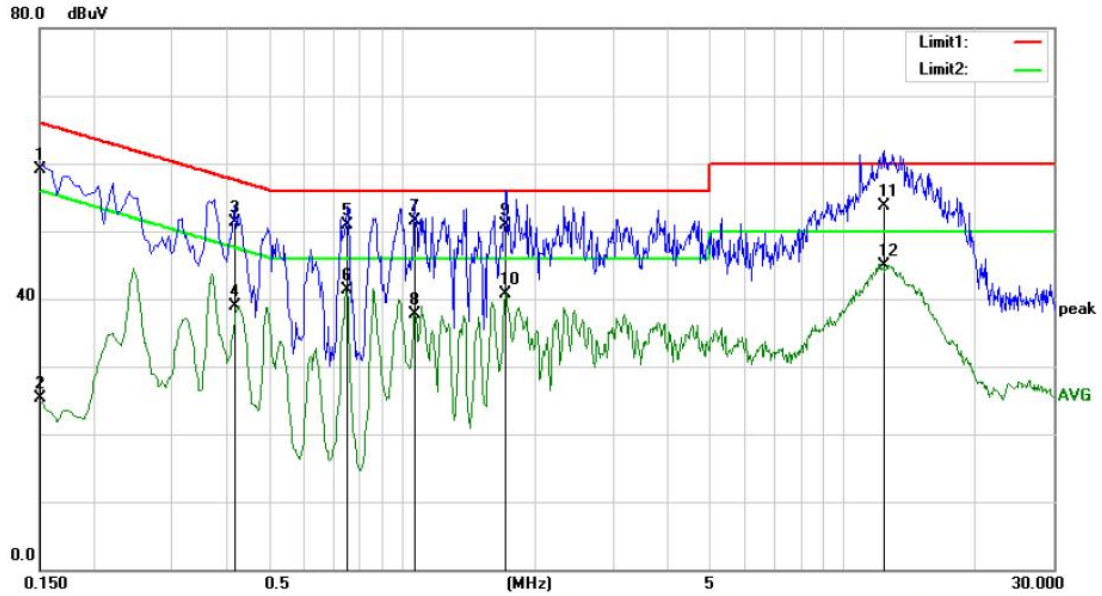

Site Conduction #1

Phase: **L1**

Temperature: 24.9

Limit: (CE)EN55032 class B\_QP

Power: AC 230V/50Hz


Humidity: 54 %

Mode: WIFI

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	49.67	9.53	59.20	66.00	-6.80	QP	
2		0.1500	15.69	9.53	25.22	56.00	-30.78	AVG	
3		0.4150	41.86	9.54	51.40	57.55	-6.15	QP	
4		0.4150	29.38	9.54	38.92	47.55	-8.63	AVG	
5		0.7500	41.36	9.54	50.90	56.00	-5.10	QP	
6		0.7500	31.75	9.54	41.29	46.00	-4.71	AVG	
7	*	1.0700	42.05	9.55	51.60	56.00	-4.40	QP	
8		1.0700	28.17	9.55	37.72	46.00	-8.28	AVG	
9		1.7100	41.45	9.55	51.00	56.00	-5.00	QP	
10		1.7100	31.18	9.55	40.73	46.00	-5.27	AVG	
11		12.3550	44.04	9.76	53.80	60.00	-6.20	QP	
12		12.3550	35.14	9.76	44.90	50.00	-5.10	AVG	



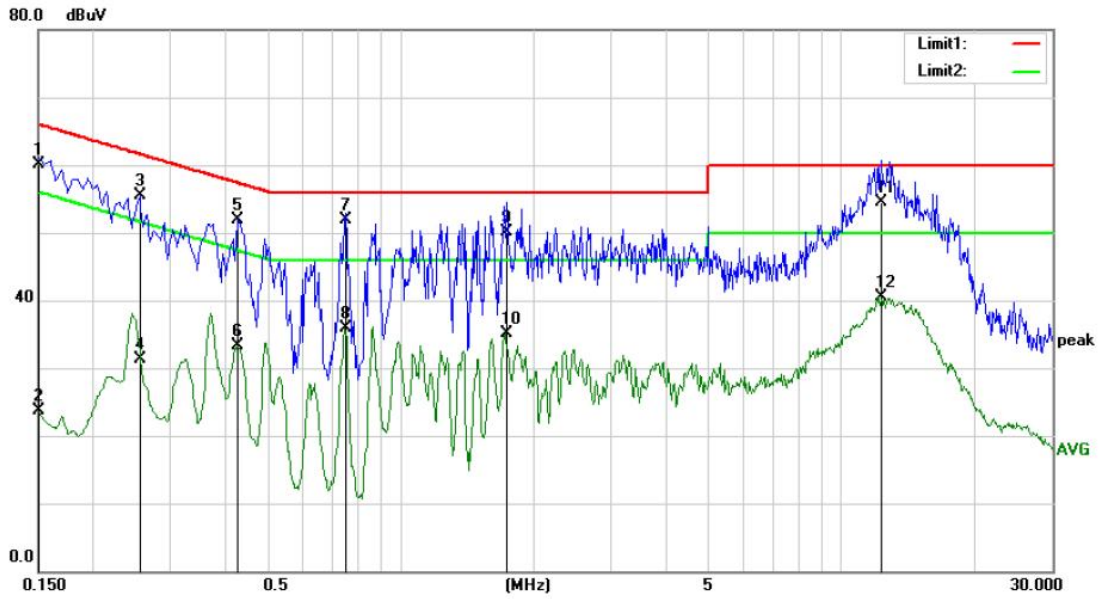

Site Conduction #1

Phase: **N**

Temperature: 24.9

Limit: (CE)EN55032 class B\_QP

Power: AC 230V/50Hz

Humidity: 54 %

Mode: WIFI

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	50.57	9.53	60.10	66.00	-5.90	QP	
2		0.1500	14.15	9.53	23.68	56.00	-32.32	AVG	
3		0.2550	45.92	9.53	55.45	61.59	-6.14	QP	
4		0.2550	21.70	9.53	31.23	51.59	-20.36	AVG	
5		0.4250	42.27	9.54	51.81	57.35	-5.54	QP	
6		0.4250	23.69	9.54	33.23	47.35	-14.12	AVG	
7	*	0.7500	42.36	9.54	51.90	56.00	-4.10	QP	
8		0.7500	26.28	9.54	35.82	46.00	-10.18	AVG	
9		1.7400	40.65	9.55	50.20	56.00	-5.80	QP	
10		1.7400	25.50	9.55	35.05	46.00	-10.95	AVG	
11		12.3050	44.84	9.76	54.60	60.00	-5.40	QP	
12		12.3050	30.77	9.76	40.53	50.00	-9.47	AVG	

## 8.7 ANTENNA APPLICATION

### 8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 8.7.2 Result

PASS.

The EUT is Internal Antenna, the gain is 0.92 dBi.

- Note:
- Antenna uses a permanently attached antenna which is not replaceable.
  - Not using a standard antenna jack or electrical connector for antenna replacement
  - The antenna has to be professionally installed (please provide method of installation)

Which in accordance to section 15.203, please refer to the internal photos.

Detail of factor for radiated emission

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

\*\*\* End of Report \*\*\*