


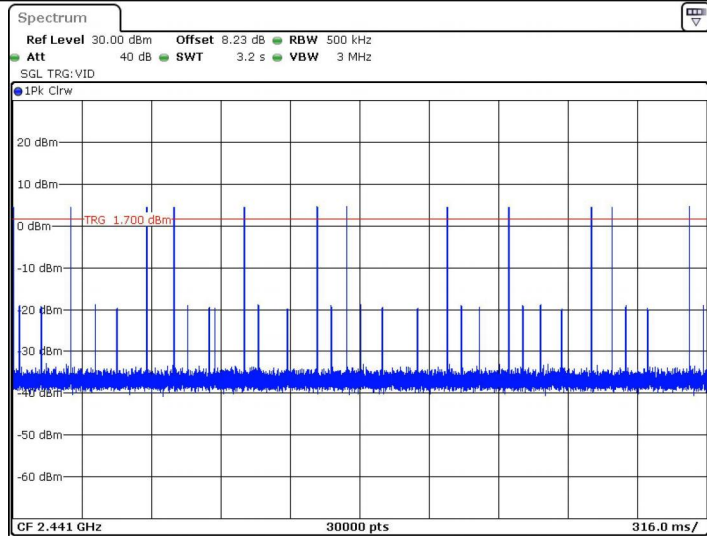



DH5_Ant1_Hop

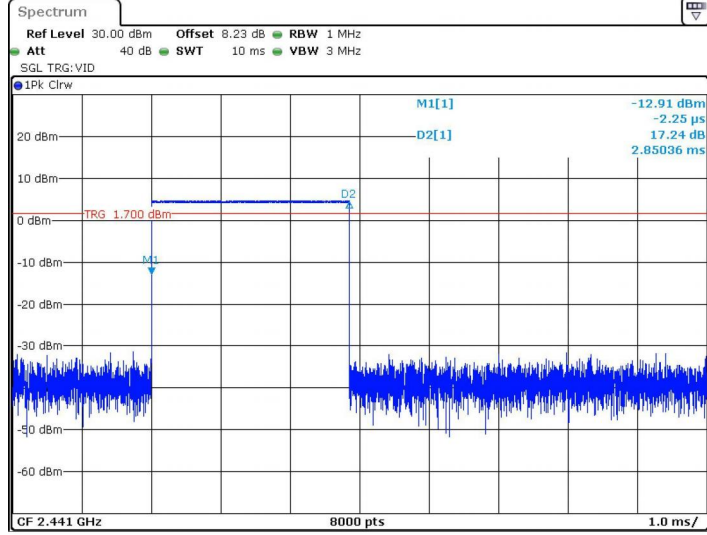

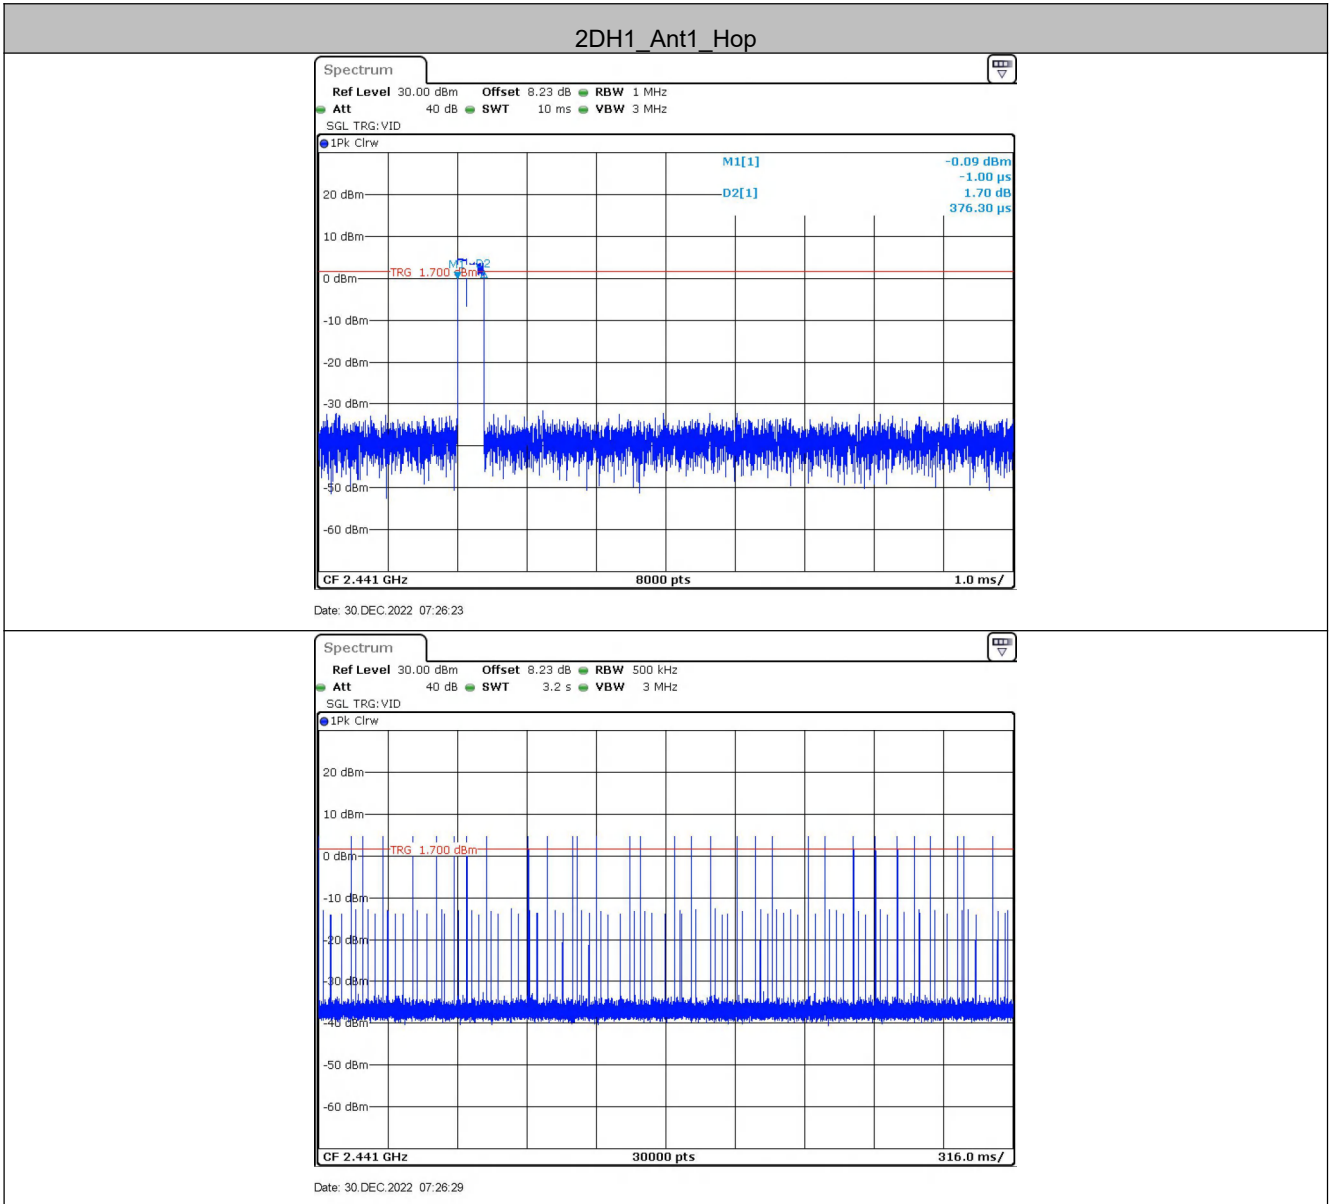


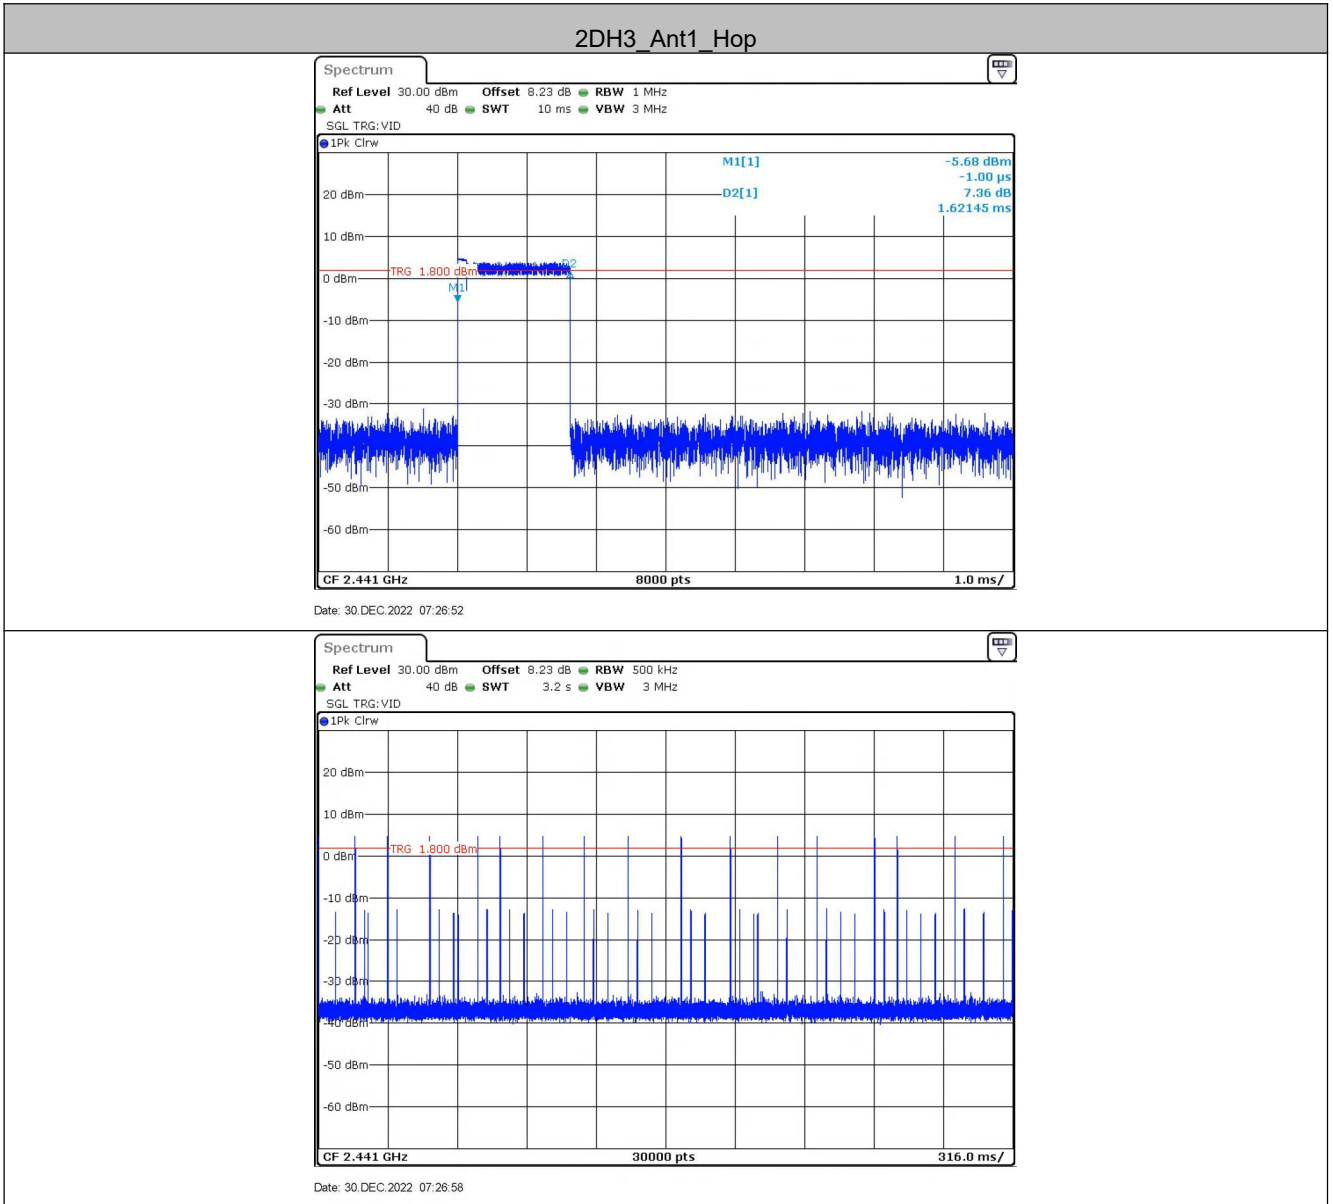


2DH5_Ant1_Hop

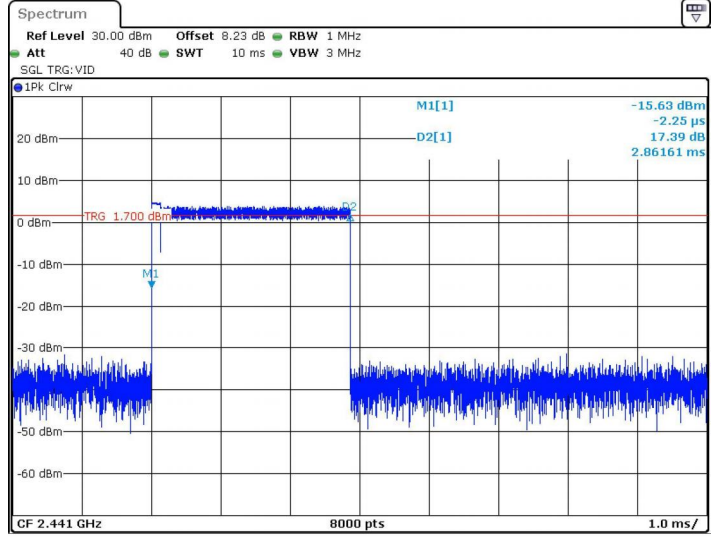



Date: 30 DEC. 2022 07:25:39

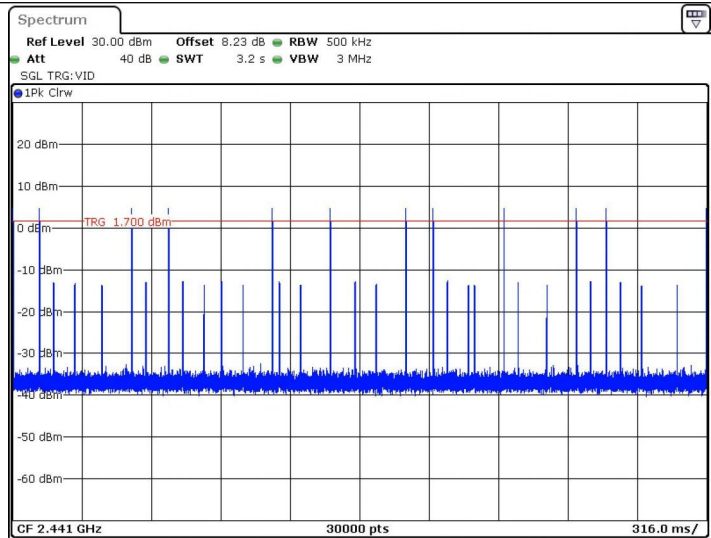


Date: 30 DEC. 2022 07:25:45

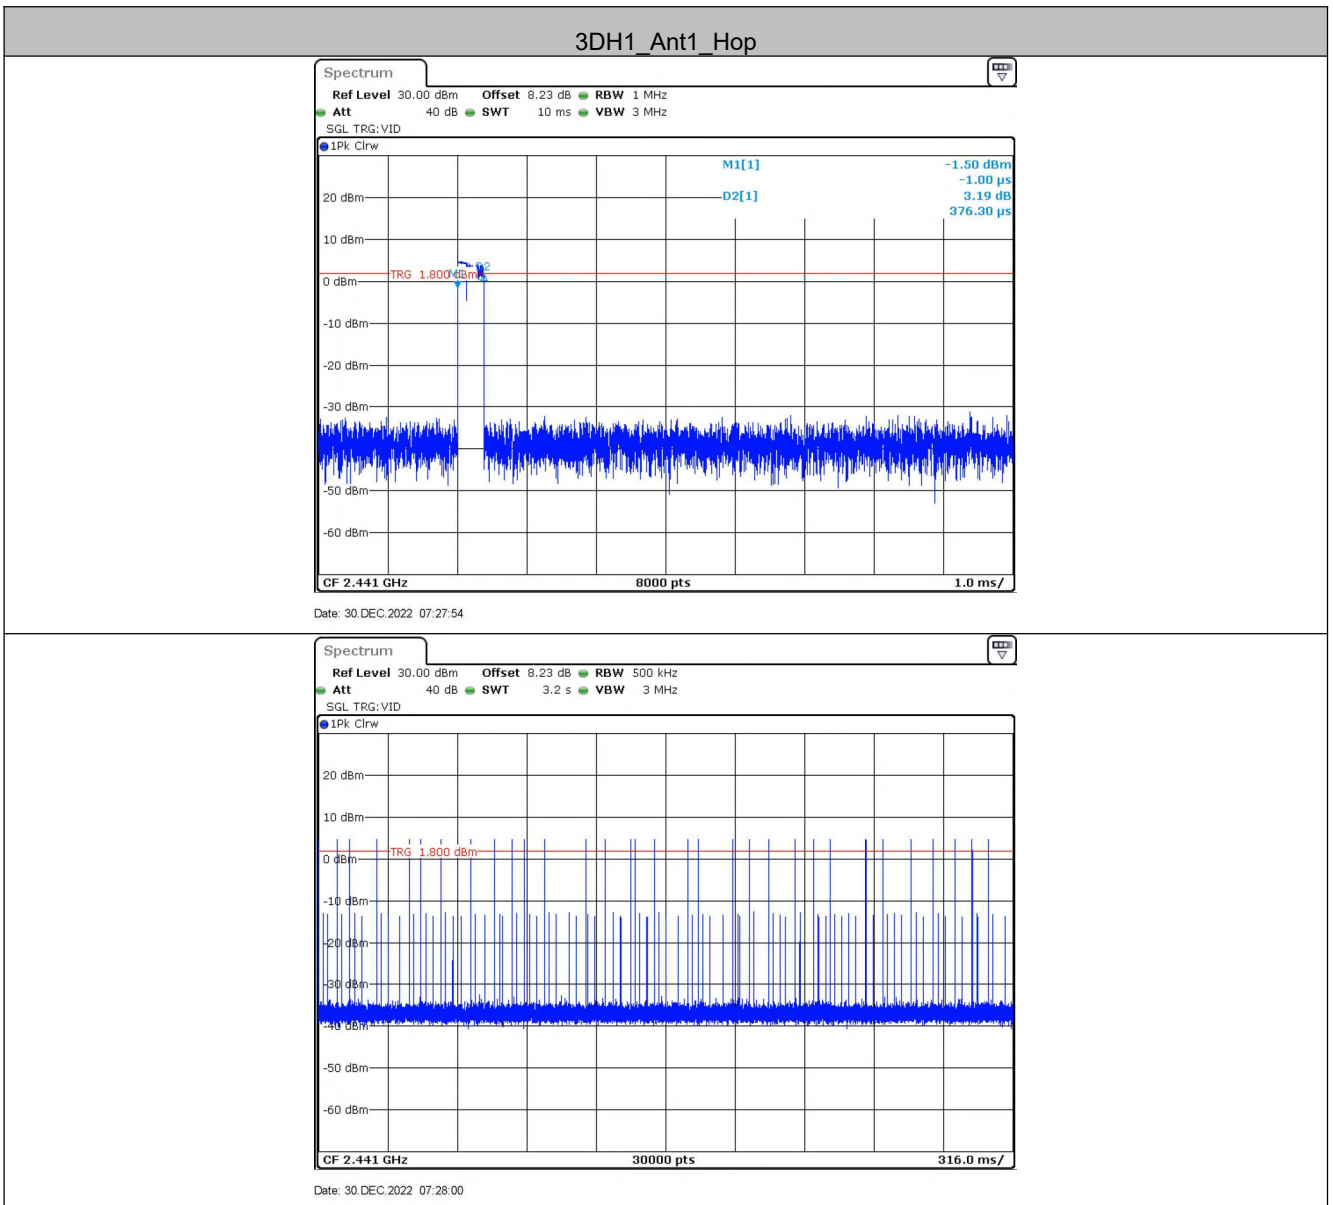

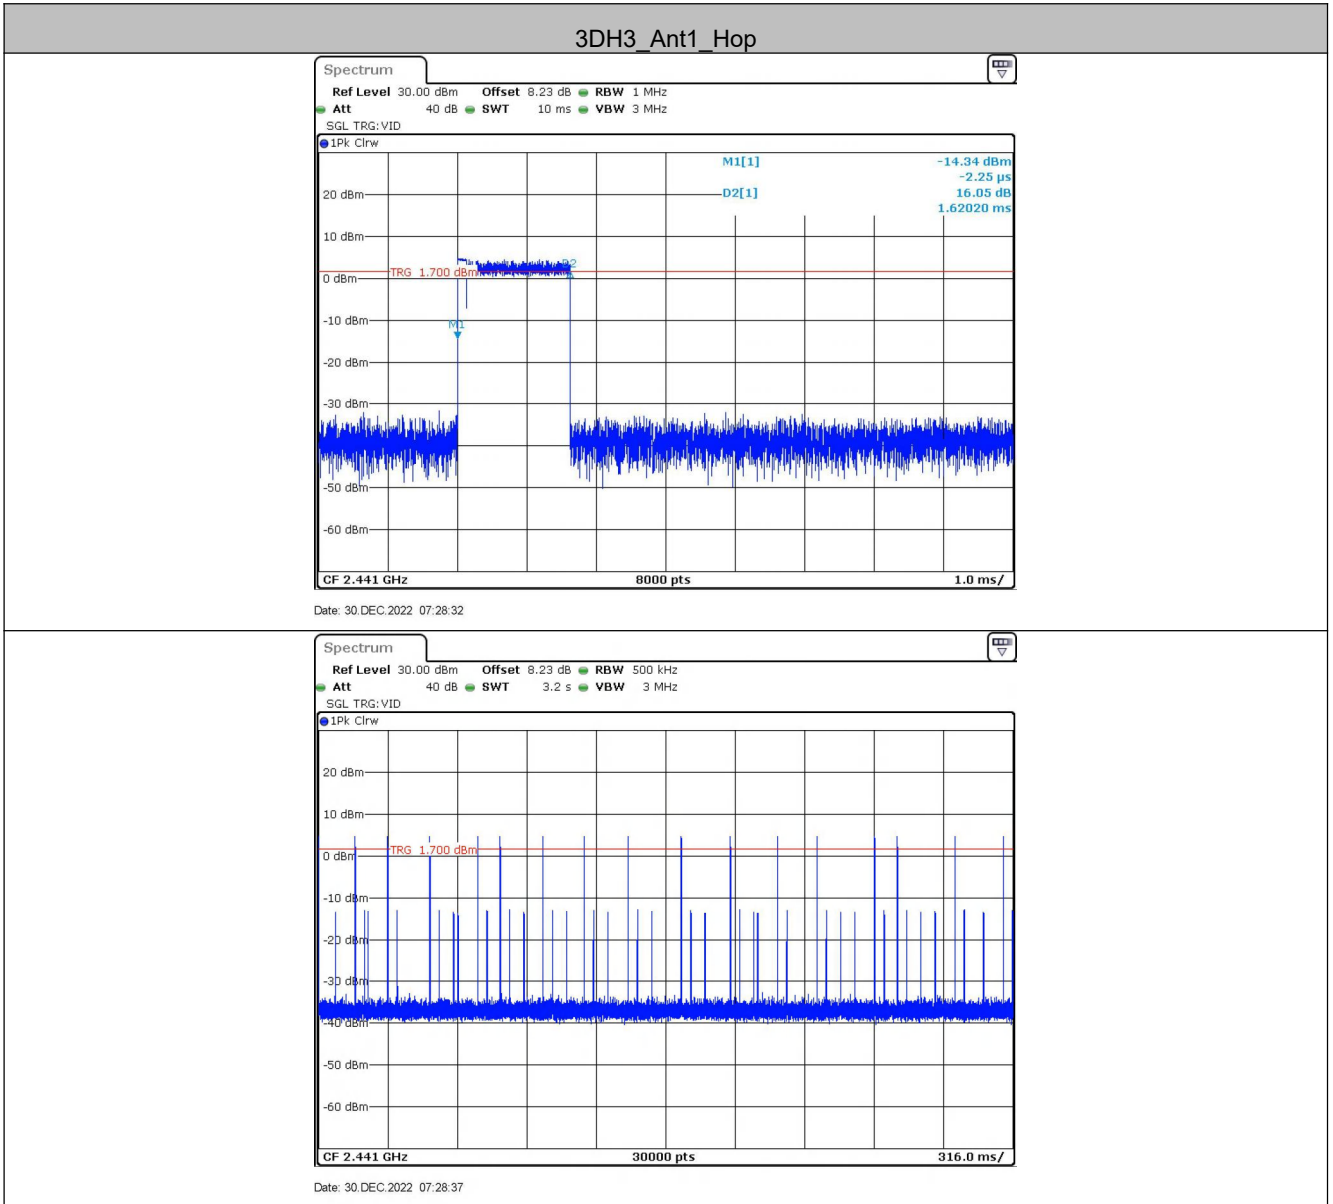

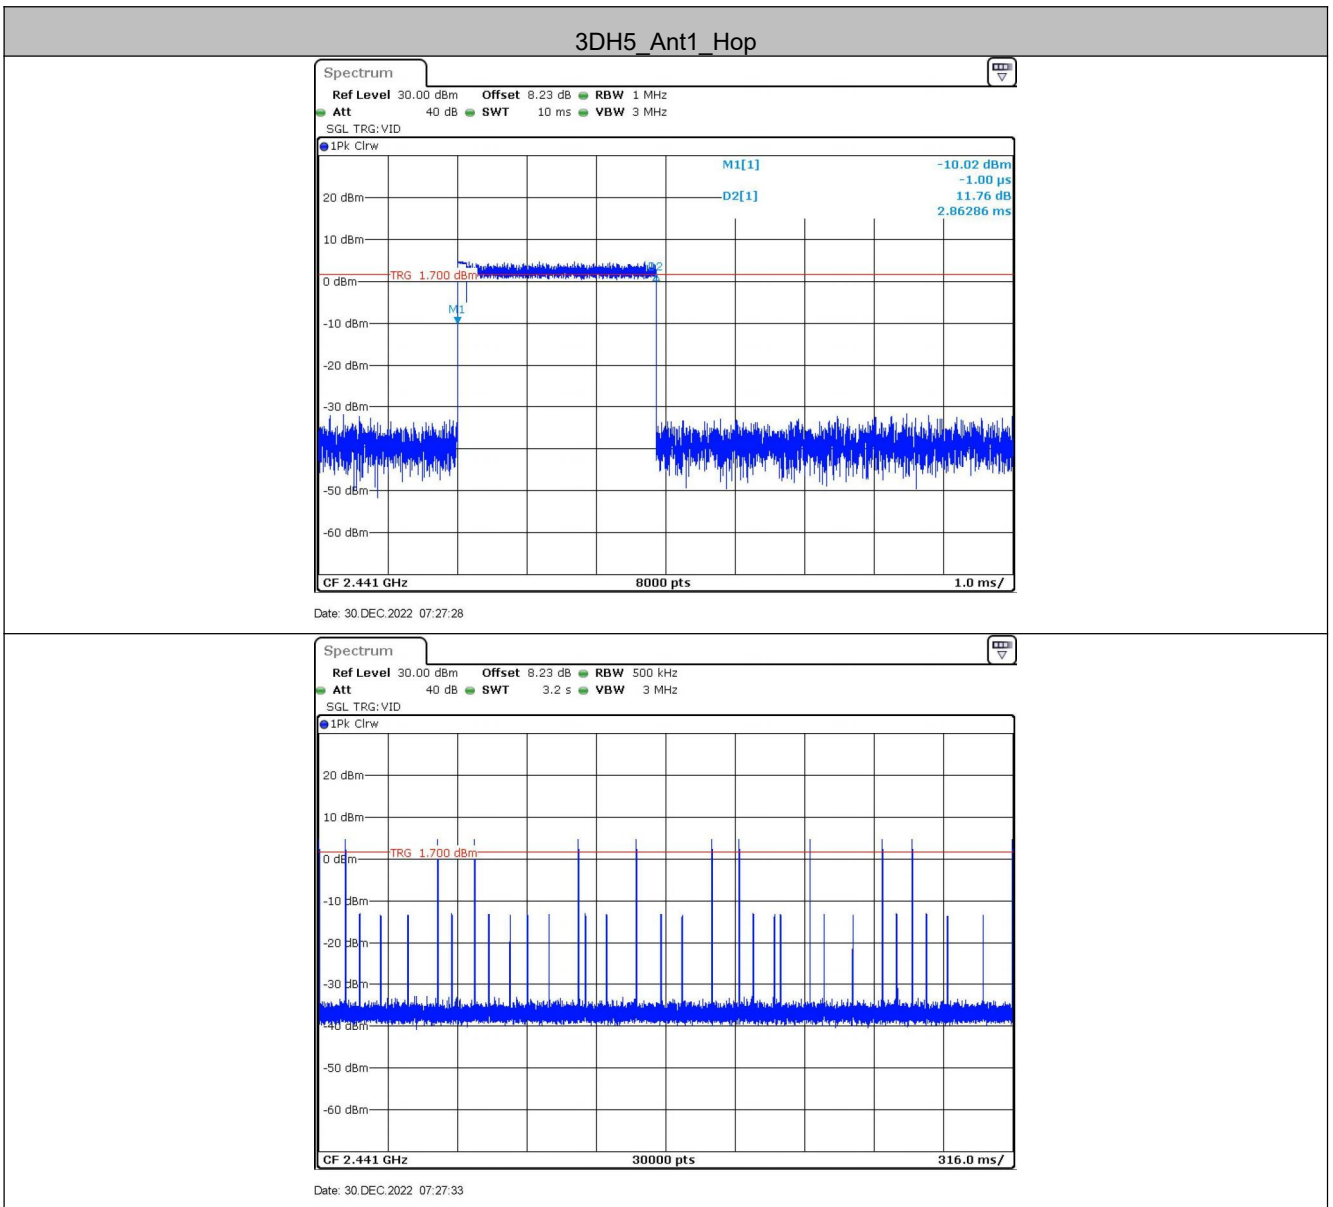


5.8 Band-edge for RF Conducted Emissions

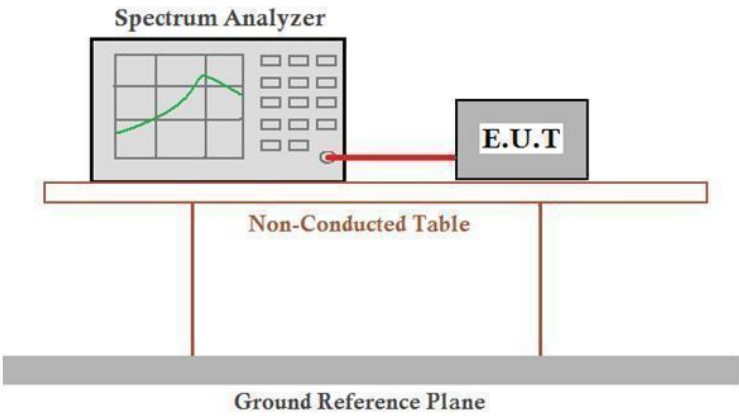Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p style="text-align: center;"><i>Remark: Offset=cable loss+ attenuation factor.</i></p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type. Only the worst case is recorded in the report.
Test Results:	Pass


Measurement Data

TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	7.58	-50.49	≤-12.42	PASS
		High	2480	8.04	-48.44	≤-11.96	PASS
		Low	Hop_2402	7.58	-48.5	≤-12.42	PASS
		High	Hop_2480	8.36	-47.9	≤-11.64	PASS
2DH5	Ant1	Low	2402	6.81	-49.34	≤-13.19	PASS
		High	2480	7.33	-49.14	≤-12.67	PASS
		Low	Hop_2402	6.10	-50	≤-13.9	PASS
		High	Hop_2480	7.09	-48.69	≤-12.91	PASS
3DH5	Ant1	Low	2402	5.64	-50.67	≤-14.36	PASS
		High	2480	6.52	-49.17	≤-13.48	PASS
		Low	Hop_2402	6.70	-49.66	≤-13.3	PASS
		High	Hop_2480	7.53	-47.84	≤-12.47	PASS

Test plot as follows:

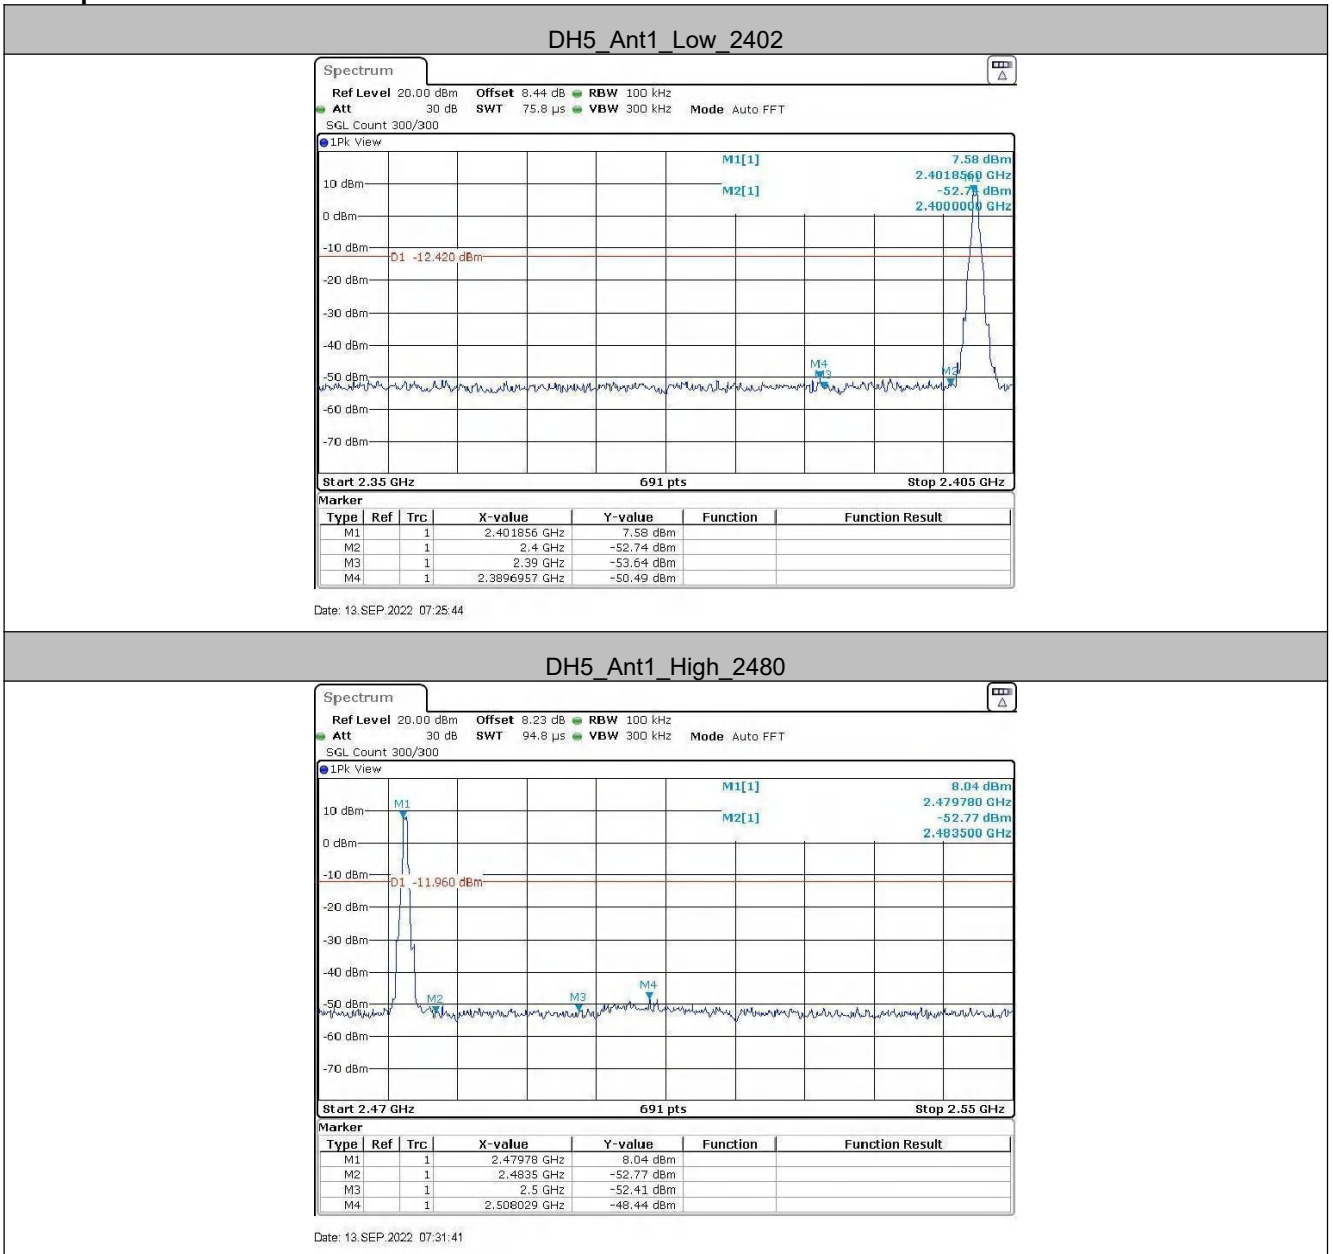

DH5_Ant1_High_2480

DH5_Ant1_Low_Hop_2402

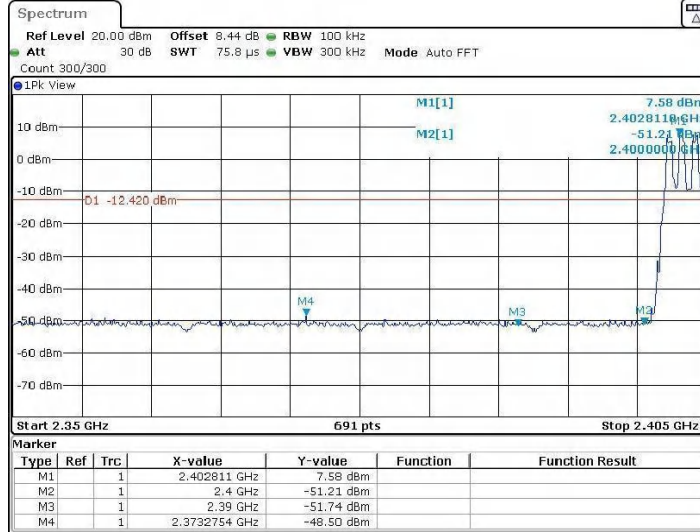


Date: 13.SEP.2022 07:55:28

DH5_Ant1_High_Hop_2480

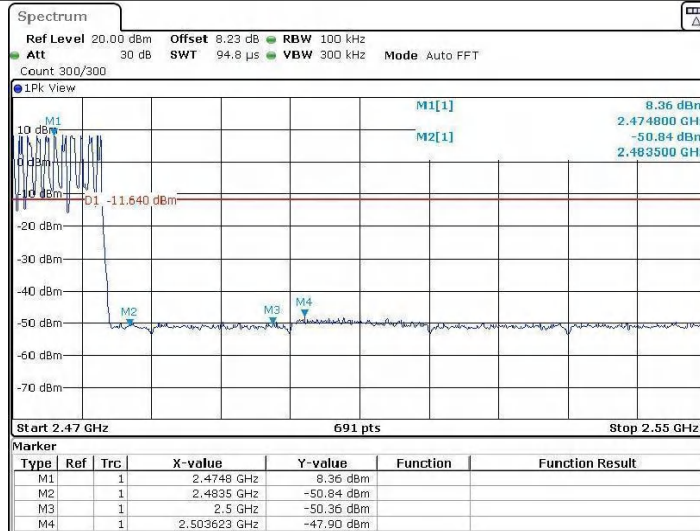


Date: 13.SEP.2022 08:07:41

2DH5_Ant1_Low_2402

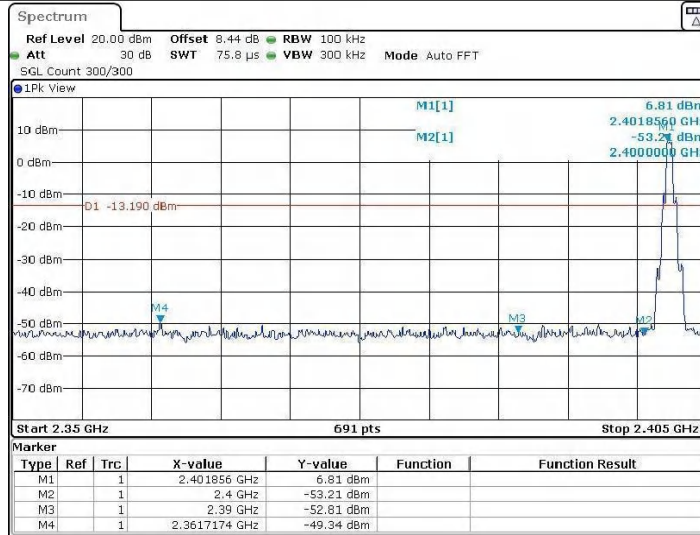


Date: 13.SEP.2022 07:34:41

2DH5_Ant1_High_2480

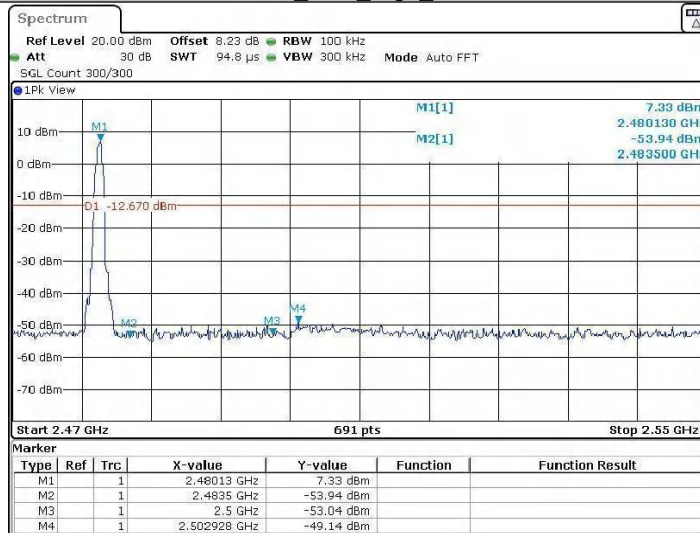


Date: 15.SEP.2022 07:22:44

2DH5_Ant1_Low_Hop_2402

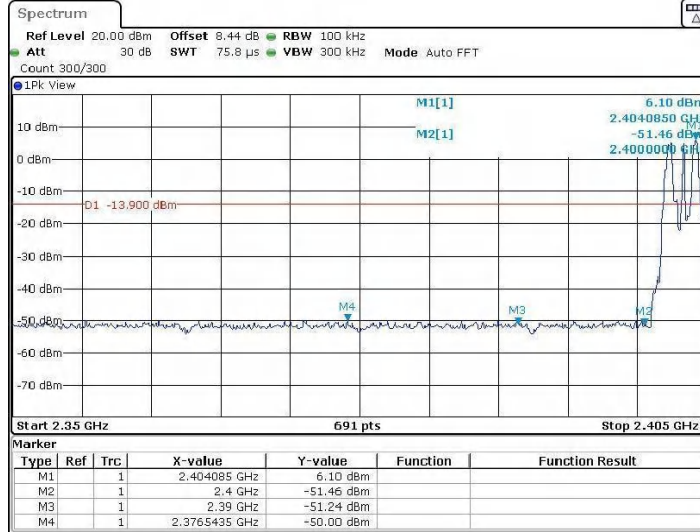


Date: 13.SEP.2022 08:10:41

2DH5_Ant1_High_Hop_2480

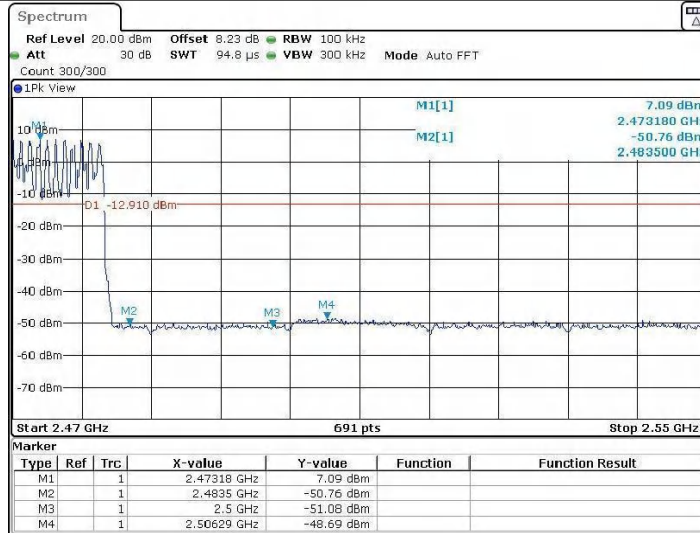


Date: 13.SEP.2022 08:27:36

3DH5_Ant1_Low_2402

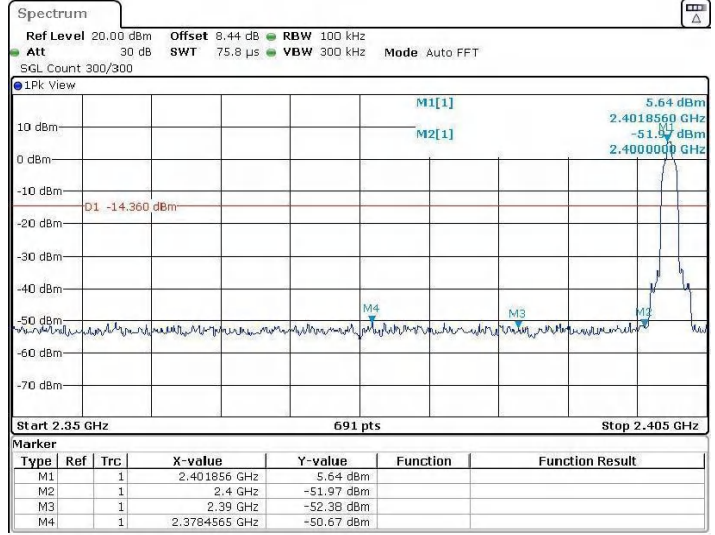


Date: 15.SEP.2022 07:26:45

3DH5_Ant1_High_2480

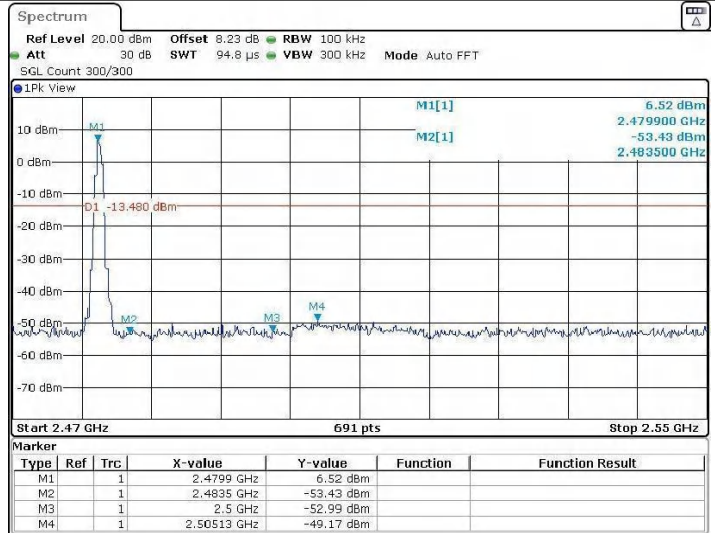


Date: 13.SEP.2022 07:49:17

3DH5_Ant1_Low_Hop_2402

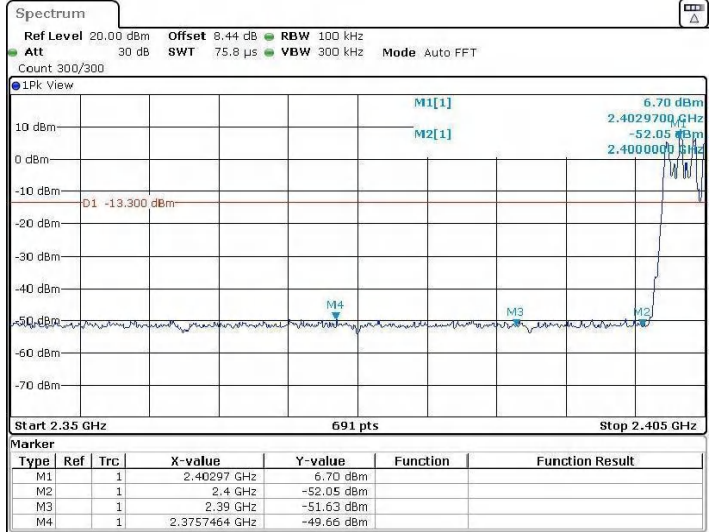


Date: 13.SEP.2022 08:30:09

3DH5_Ant1_High_Hop_2480

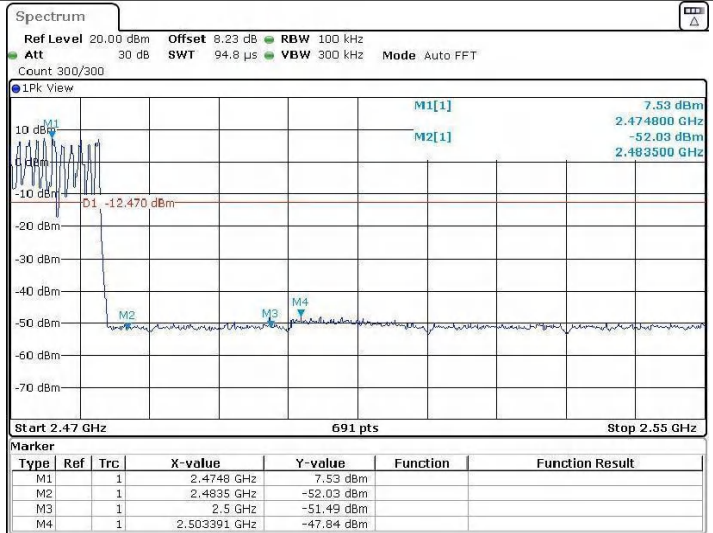


Date: 13.SEP.2022 08:43:03


5.9 Spurious RF Conducted Emissions

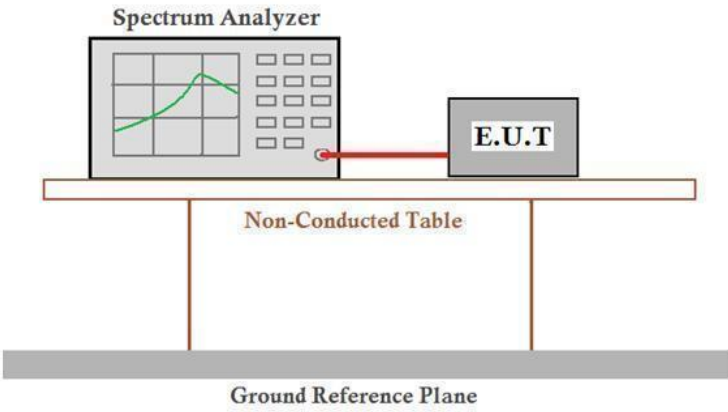Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p style="text-align: center;"><i>Remark: Offset=cable loss+ attenuation factor.</i></p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.
Test Results:	Pass


DH5_Ant1_2402_0~Reference

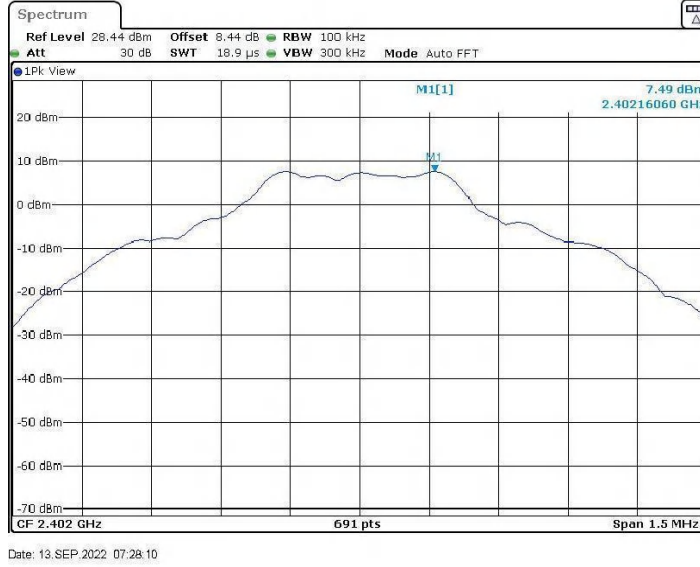

DH5_Ant1_2402_30~1000

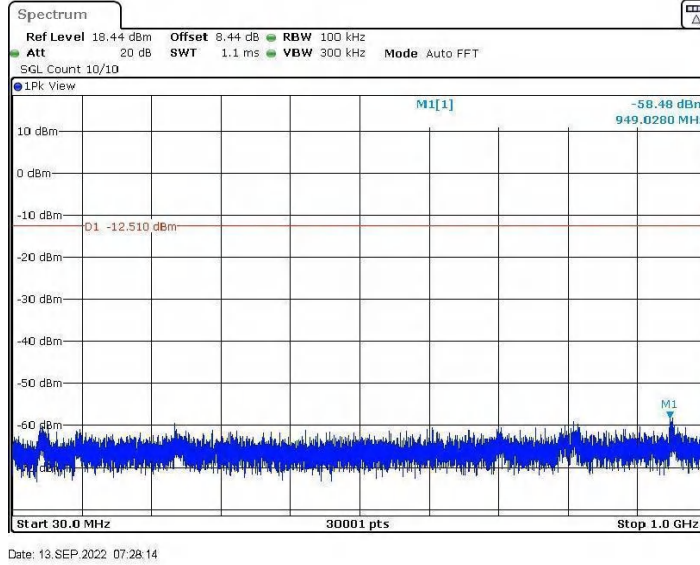


DH5_Ant1_2402_1000~26500

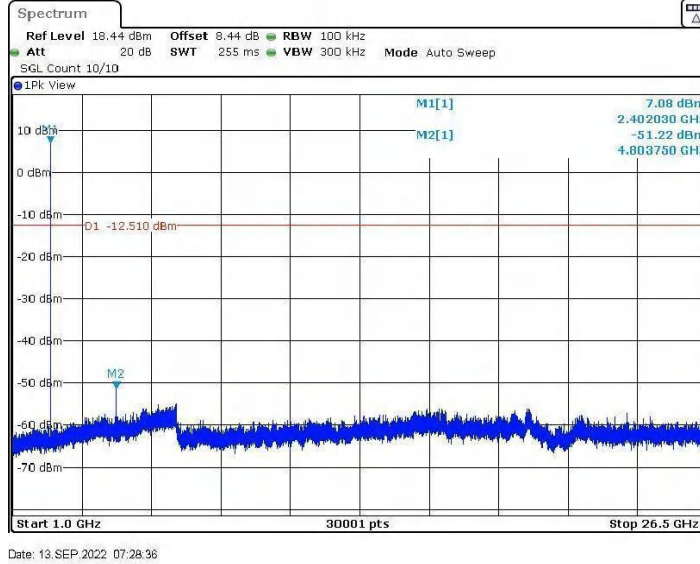


DH5_Ant1_2441_0~Reference




DH5_Ant1_2441_30~1000

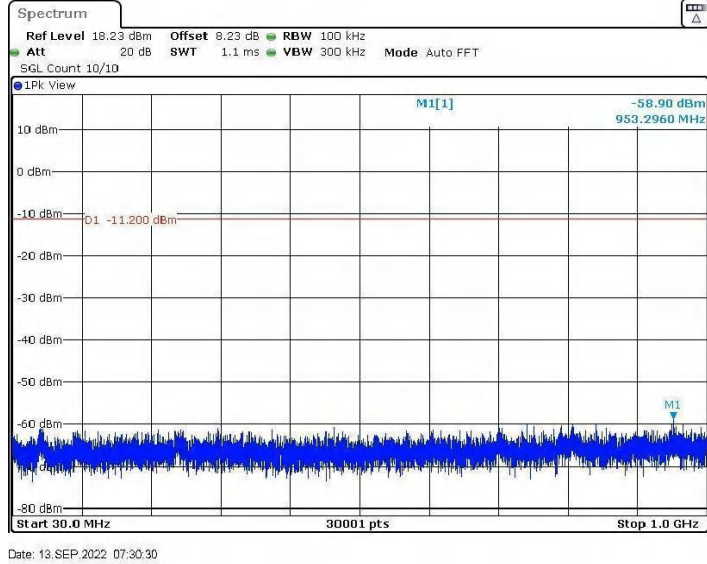


DH5_Ant1_2441_1000~26500

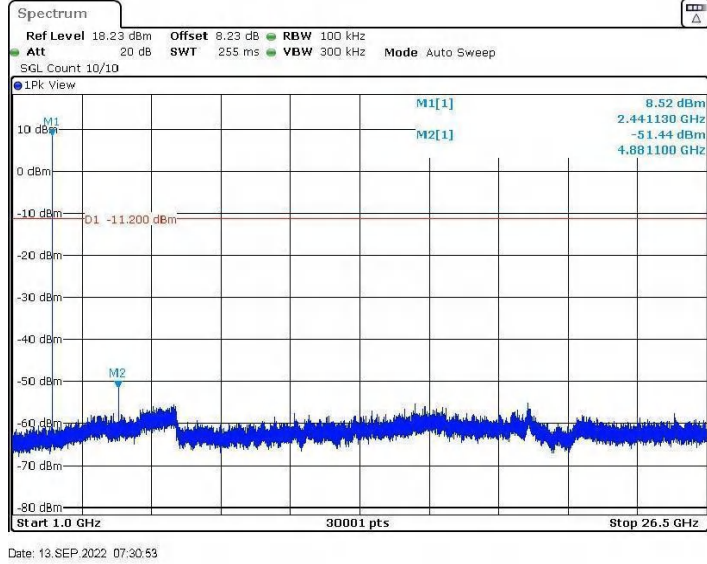


DH5_Ant1_2480_0~Reference

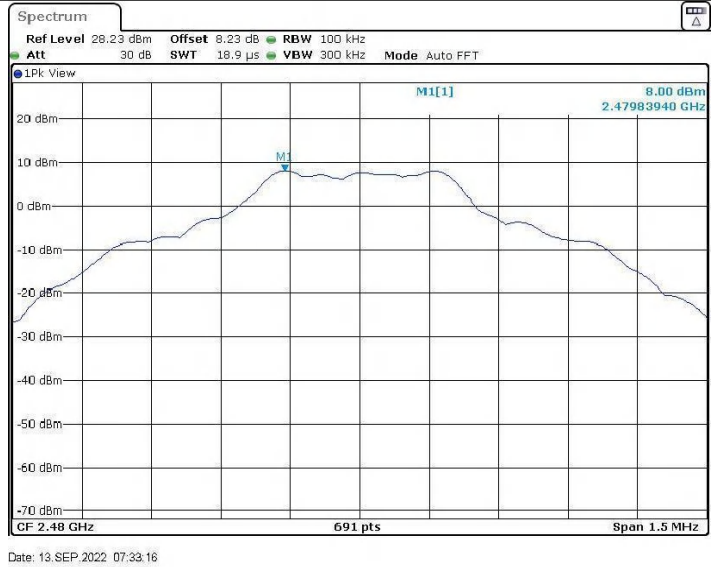


DH5_Ant1_2480_30~1000

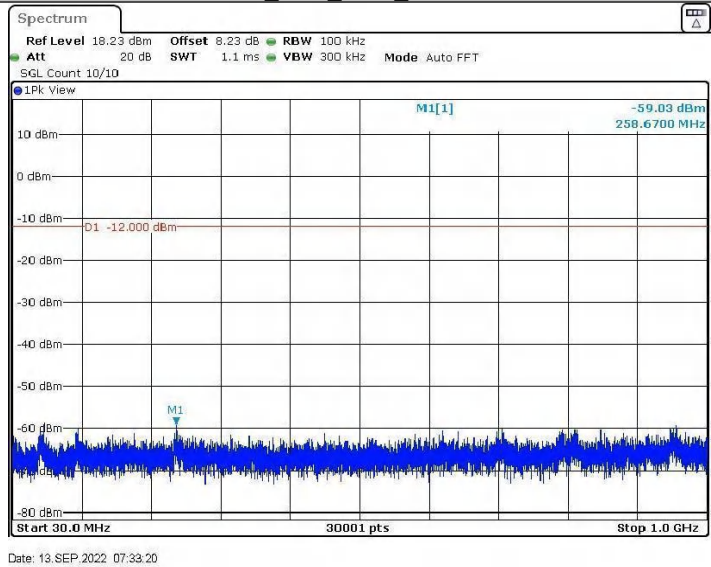


DH5_Ant1_2480_1000~26500

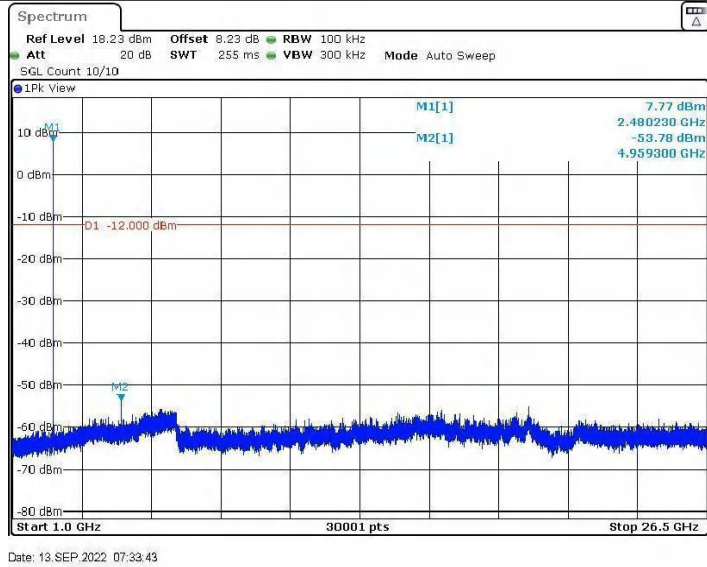


2DH5_Ant1_2402_0~Reference

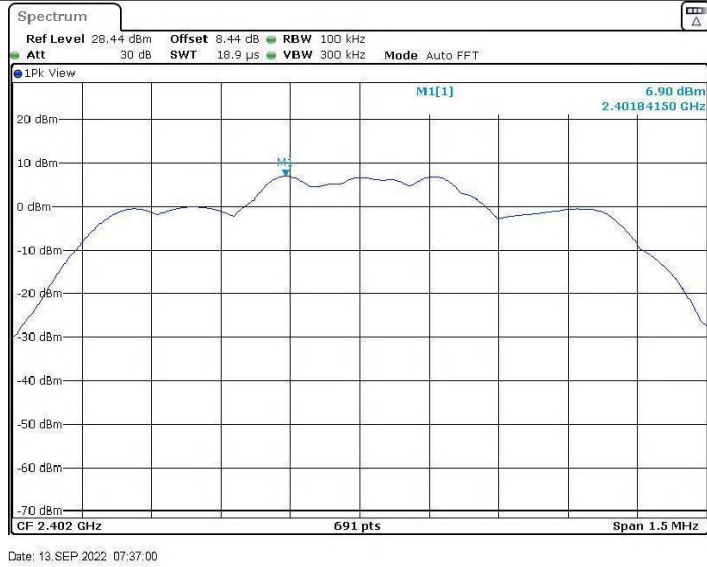


2DH5_Ant1_2402_30~1000

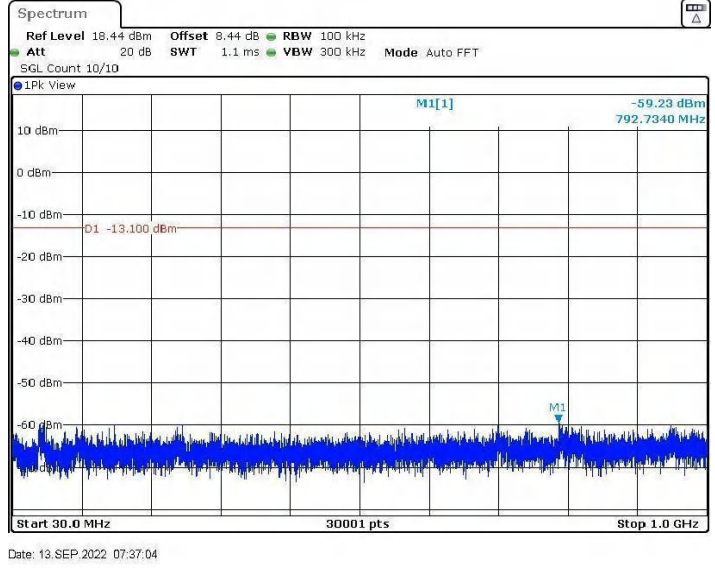


2DH5_Ant1_2402_1000~26500

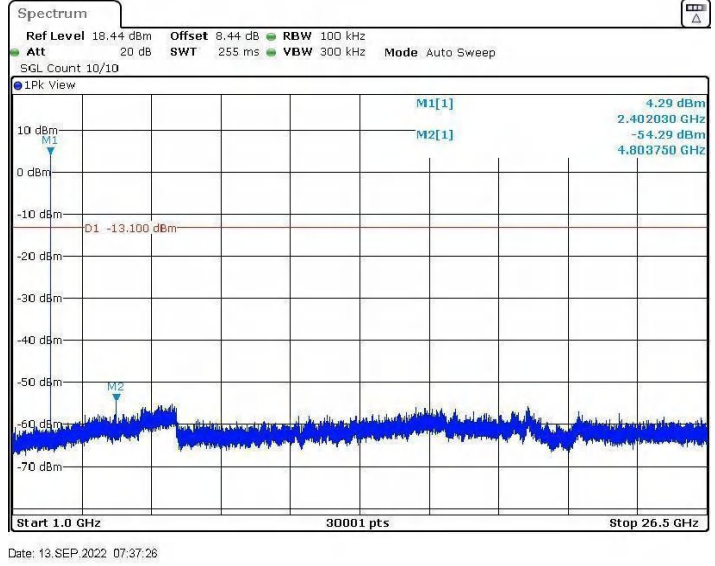


2DH5_Ant1_2441_0~Reference

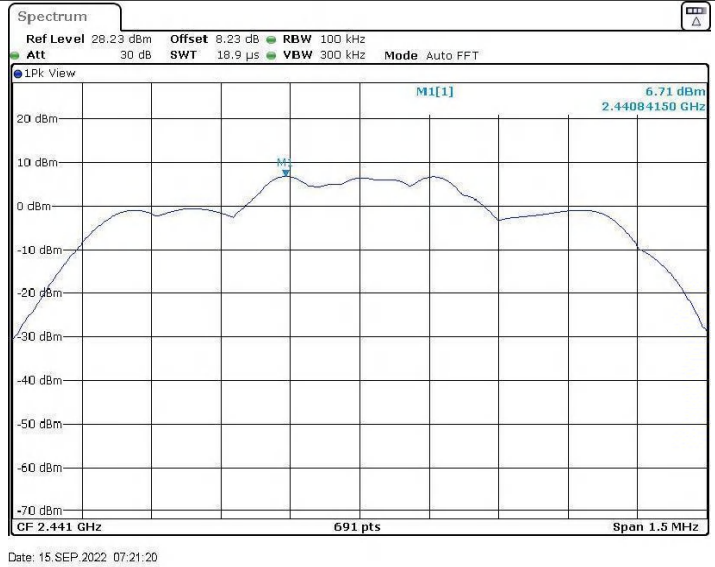


2DH5_Ant1_2441_30~1000

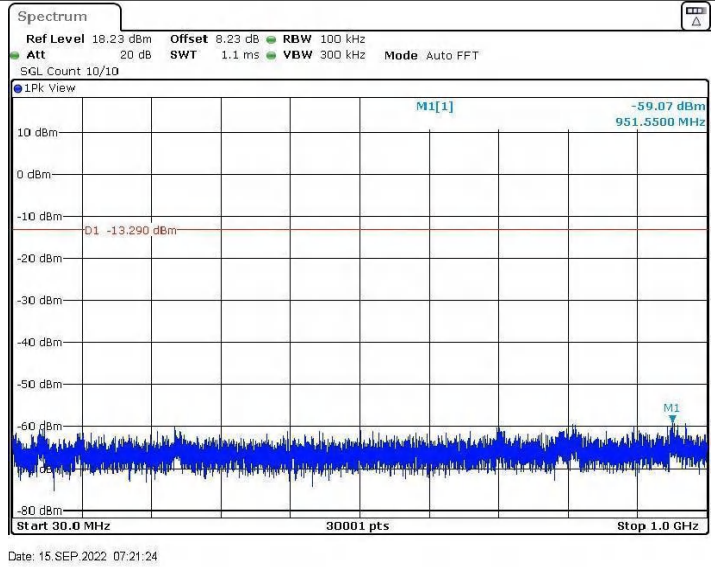


2DH5_Ant1_2441_1000~26500

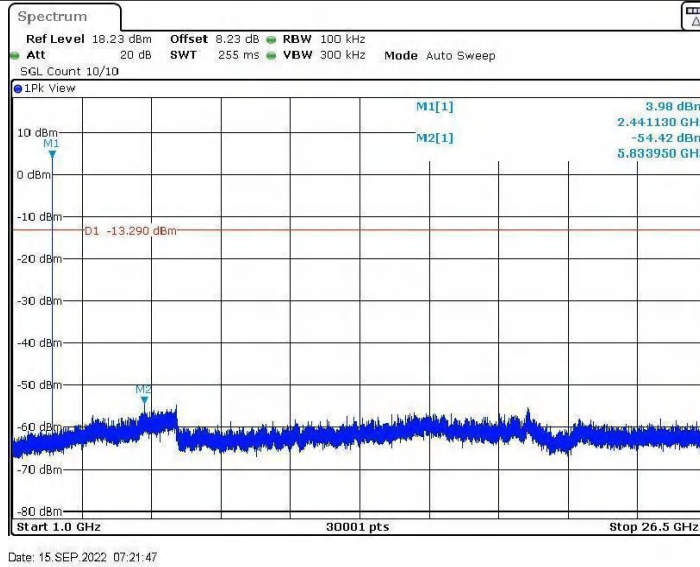


2DH5_Ant1_2480_0~Reference

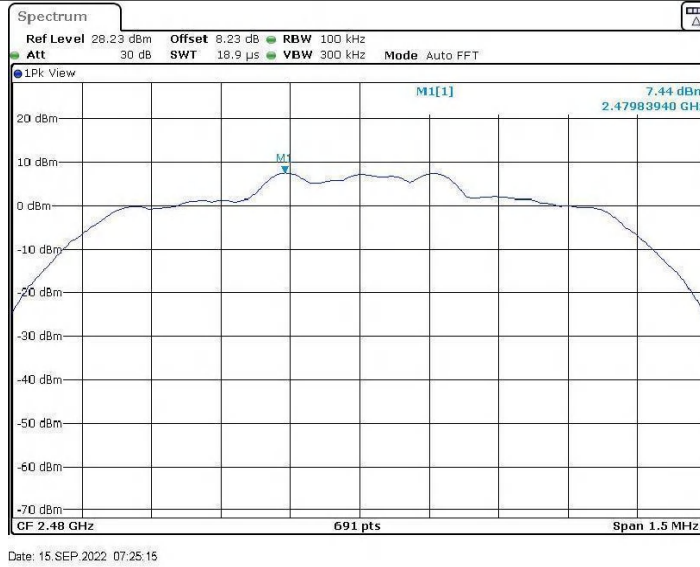


2DH5_Ant1_2480_30~1000

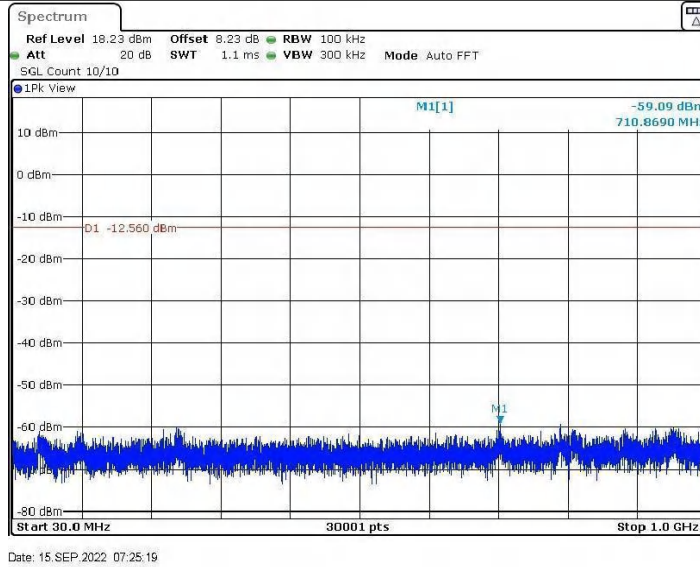


2DH5_Ant1_2480_1000~26500

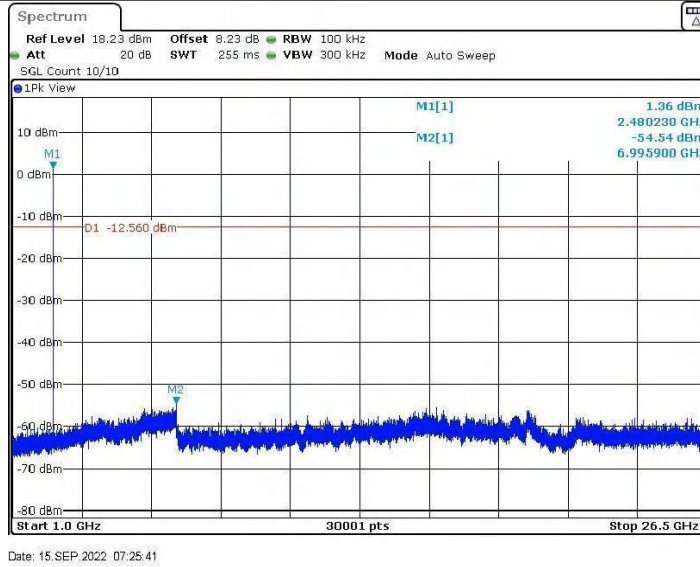


3DH5_Ant1_2402_0~Reference

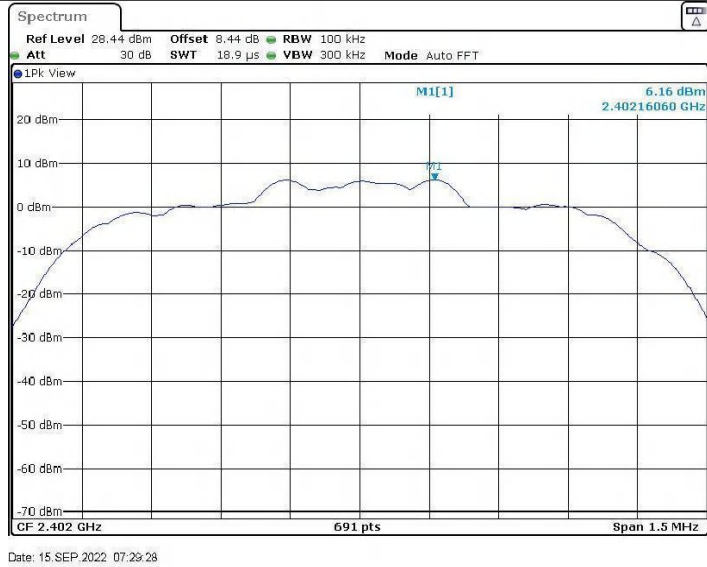


3DH5_Ant1_2402_30~1000

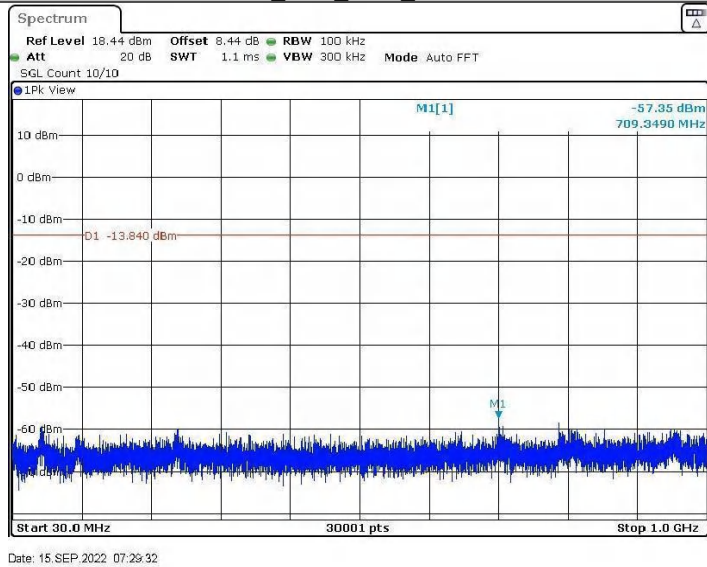


3DH5_Ant1_2402_1000~26500

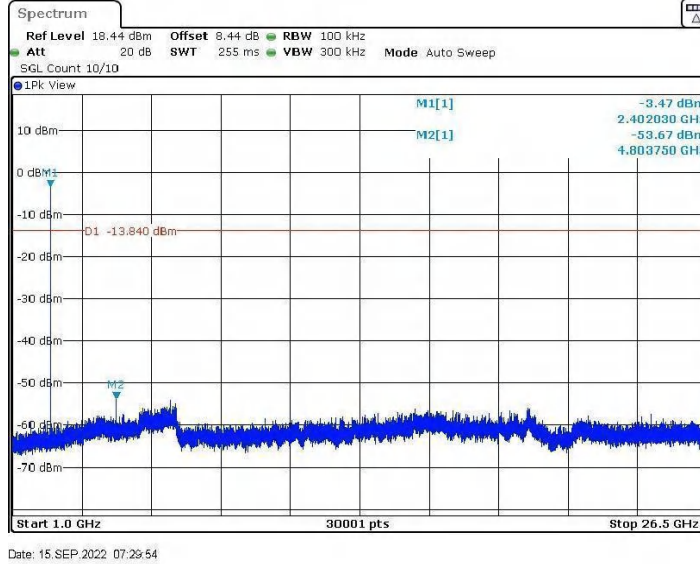


3DH5_Ant1_2441_0~Reference

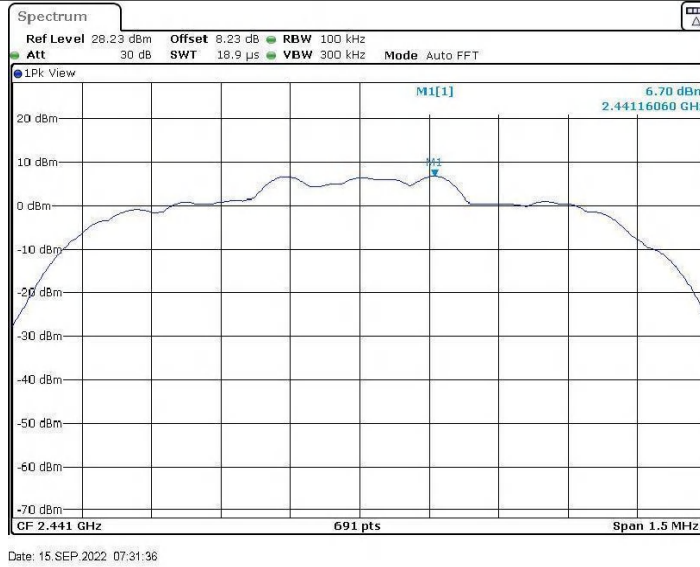

3DH5_Ant1_2441_30~1000

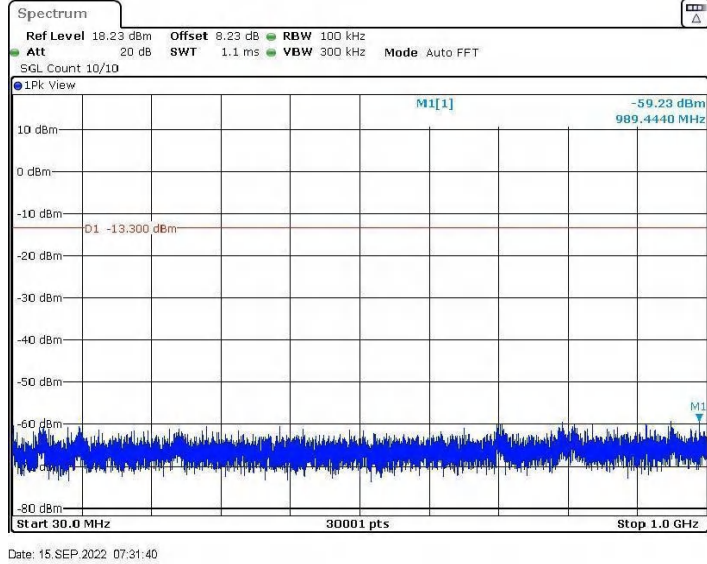


3DH5_Ant1_2441_1000~26500

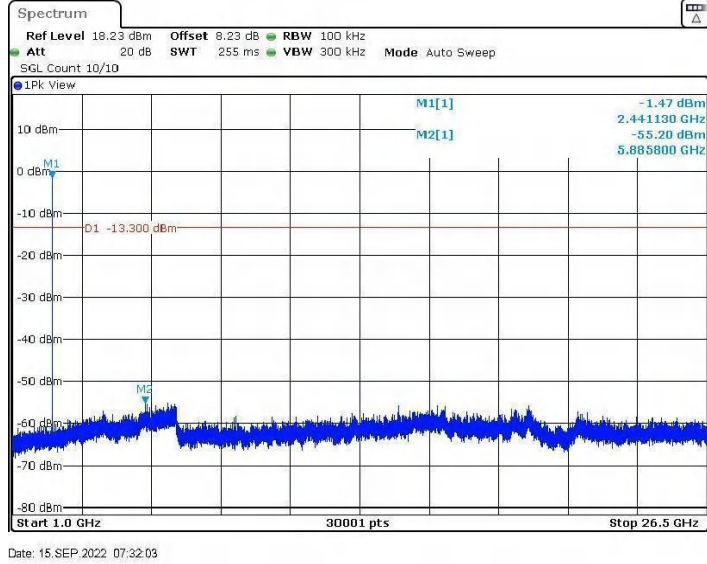


3DH5_Ant1_2480_0~Reference



3DH5_Ant1_2480_30~1000

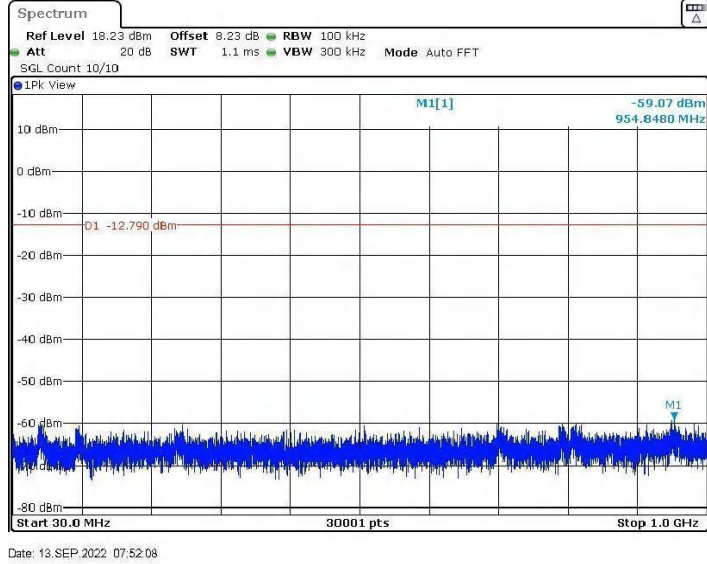

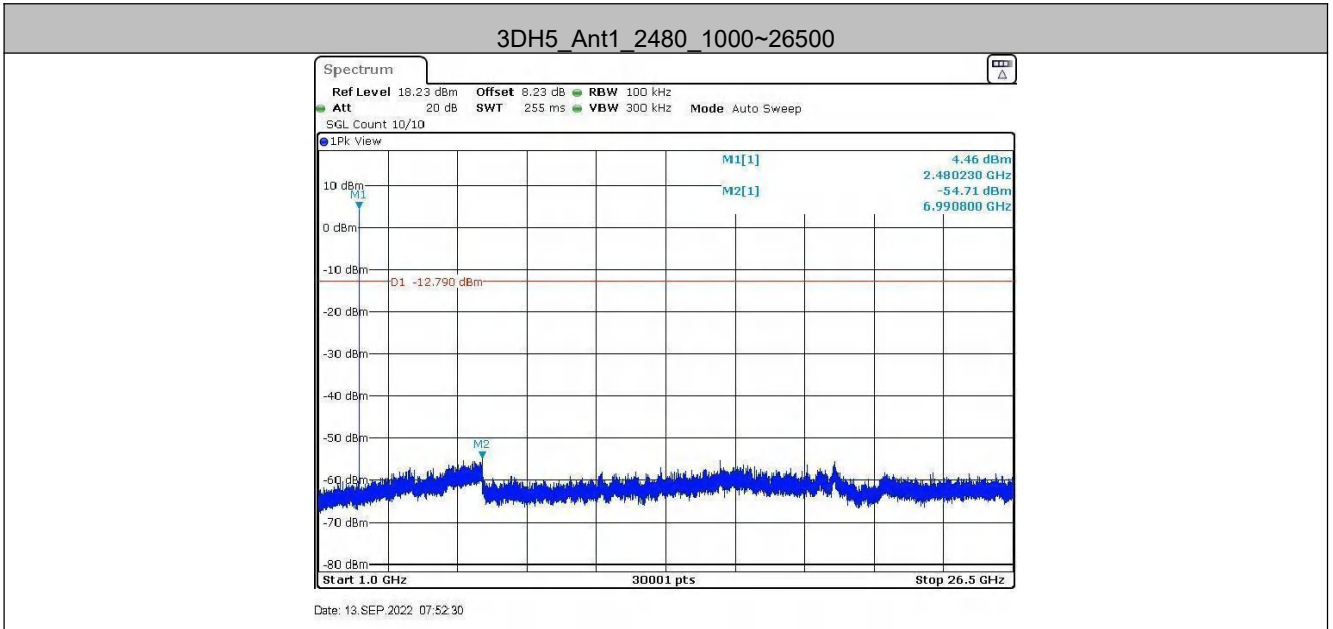

Remark:

Pre test 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o), The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.