



Test Report No.:
FCC2020-0027-1

TEST REPORT

Applicant : Schneider Electric (China) Co., Ltd.,
Shenzhen Branch

Product Name : Z-WAVE+ AUX SWITCH

Mode No. : SQR50101WHZ,SQR50101LAZ,SQ
R50101BKZ

Vkan Certification & Testing Co., Ltd.

威凯检测技术有限公司

Add.: No.3, Tiantaiyi Road, Kaitai Avenue, Science City, Guangzhou, 510663, P. R. China
Telephone: +86-20-32293888 Fax : +86-20-32293889
E-mail: emc@cvc.org.cn

Vkan Certification & Testing Co., Ltd. CVC





Test Report No. FCC2020-0027-1		Page 2 of 28	
Applicant	Name : Schneider Electric (China) Co., Ltd., Shenzhen Branch Address : Room 201, Building A, No. 1 Qianwanyi Road, Shengang Cooperation Zone, Qianhai, Shenzhen, China		
Manufacturer	Name : Schneider Electric (China) Co., Ltd., Shenzhen Branch Address : Room 201, Building A, No. 1 Qianwanyi Road, Shengang Cooperation Zone, Qianhai, Shenzhen, China		
Equipment under Test	Product Name : Z-WAVE+ AUX SWITCH Model No. : SQR50101WHZ,SQR50101LAZ,SQR50101BKZ Trade mark : Schneider Electric,Square D Serial no. : — Sampling : —		
Date of Receipt.	2020.12.01	Date of Testing	2020.12.01~2021.02.02
Test Specification		Test Result	
FCC CFR47 Part 15B (2020) Radio Frequency Devices ANSI C63.4 (2014)		PASS	
Evaluation of Test Result	The equipment under test was found to comply with the requirements of the standards applied. <div style="text-align: right; margin-top: 20px;">  <p>Issue Date: 2021.02.03</p> </div>		
Tested by:  Xu Zhenfei _____ Name Signature	Reviewed by:  Liu Yonghai _____ Name Signature	Approved by:  Zeng Bo _____ Name Signature	
Other Aspects: NONE.			
Abbreviations:OK, Pass= passed Fail = failed N/A= not applicable EUT= equipment, sample(s) under tested			
This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC .			

TABLE OF CONTENTS

1. GENERAL PRODUCT INFORMATION	4
1.1 GENERAL INFORMATION.....	4
2. TEST SITES.....	5
2.1 TEST FACILITIES.....	5
2.2 DESCRIPTION OF NON-STANDARD METHOD AND DEVIATIONS.....	5
2.3 LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
3. TEST CONFIGURATION.....	6
3.1 TEST MODE.....	6
4. SUMMARY OF MEASUREMENT RESULTS	7
5. MEASUREMENT PROCEDURE	8
5.1 CONDUCTED EMISSION.....	8
5.2 RADIATED EMISSION	12
6. TEST SETUP PHOTOGRAPH.....	21
7. EUT PHOTOGRAPH.....	23
8. APPENDIX	28

1. General Product Information

The model of this application: SQR50101WHZ,SQR50101LAZ,SQR50101BKZ.
SQR50101LAZ and SQR50101BKZ have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction with SQR50101WHZ. The difference lies only model number and color. All the tests carried out on model SQR50101WHZ.

1.1 General information

Product Name	Z-WAVE+ AUX SWITCH
Model No.	SQR50101WHZ,SQR50101LAZ,SQR50101BKZ
Power Supply	120 Vac,60Hz
FCC ID	2AUCU-50101Z
Note: 1. The information of the EUT is declared by the manufacturer.	

2. Test Sites

2.1 Test Facilities

The tests and measurements refer to this report were performed by EMC testing Lab. of Vkan Certification & Testing Co., Ltd.

Add.: No.3, Tiantaiyi Road, Kaitai Avenue, Science City, Guangzhou, 510663, P. R. China

Telephone : +86-20-32293888

Fax : +86-20-32293889

The EMC testing laboratory has been recognized by CNAS, and authorized by Nemko of Norway since 1997, and accredited by DAkkS of Germany since 2007, and assessed and found eligible to participated in the TDAP of VDE testing and certification Institute since 2004, and registered by FCC since 2001.

2.2 Description of Non-standard Method and Deviations

The testing and measurement methods used in this report are applied by all standard methods. Not any non-standard method or deviation from the used standards was used.

2.3 List of Test and Measurement Instruments

Refer to **Appendix**.

3. Test Configuration

3.1 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

4. Summary of measurement results

Summary of measurements of results	Clause in FCC rules	Class / Severity	Verdict
Conducted Emissions	FCC CFR47 Part 15B ANSI C63.4	Class B	PASS
Radiated Emissions	FCC CFR47 Part 15B ANSI C63.4	Class B	PASS

5. Measurement procedure

5.1 Conducted Emission

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement:

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

The test is in transmitting mode.


Limits:

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Test Setup:

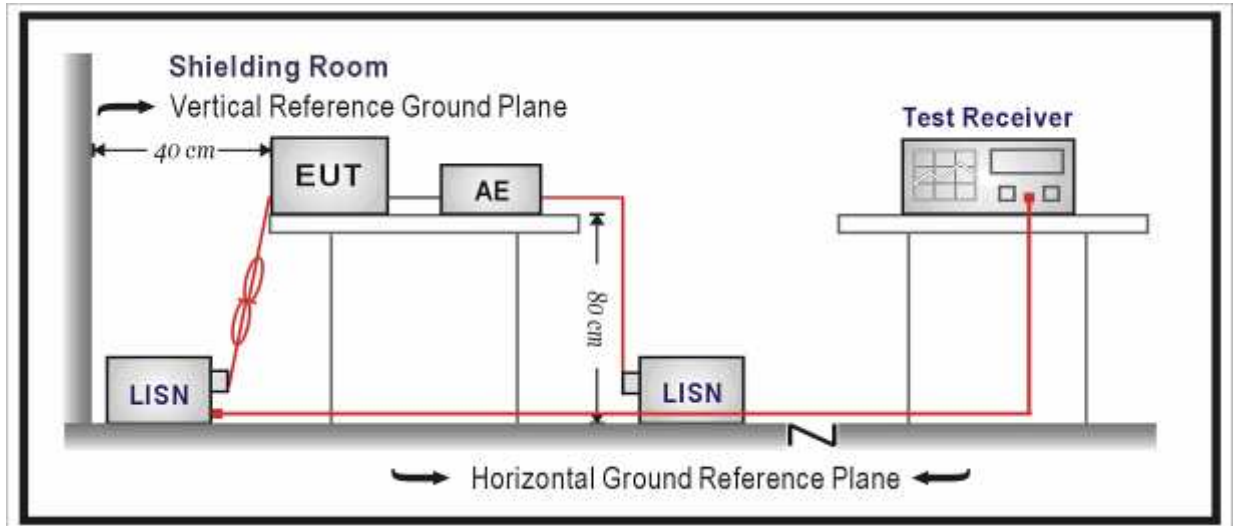

Note: AC Power source is used to change the voltage 120V/60Hz.


Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 3.12$ dB.

Test Results:

Power Line	L
Test Mode	Normal Working

Suspected List								
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Pass/Fail
1	0.1523	10.16	28.96	39.12	65.88	26.76	QP	PASS
10	10.7385	10.36	24.45	34.81	60.00	25.19	QP	PASS
11	27.9645	10.59	22.36	32.95	60.00	27.05	QP	PASS
8	3.4958	10.21	19.66	29.87	56.00	26.13	QP	PASS
6	1.0140	10.17	31.54	41.71	56.00	14.29	QP	PASS
3	0.3638	10.15	21.57	31.72	58.64	26.92	QP	PASS
9	10.7385	10.36	23.42	33.78	50.00	16.22	AV	PASS
2	0.1523	10.16	7.99	18.15	55.88	37.73	AV	PASS
4	0.3953	10.15	8.19	18.34	47.95	29.61	AV	PASS
5	1.0118	10.17	26.17	36.34	46.00	9.66	AV	PASS
7	3.4958	10.21	12.43	22.64	46.00	23.36	AV	PASS
12	27.9645	10.59	18.02	28.61	50.00	21.39	AV	PASS

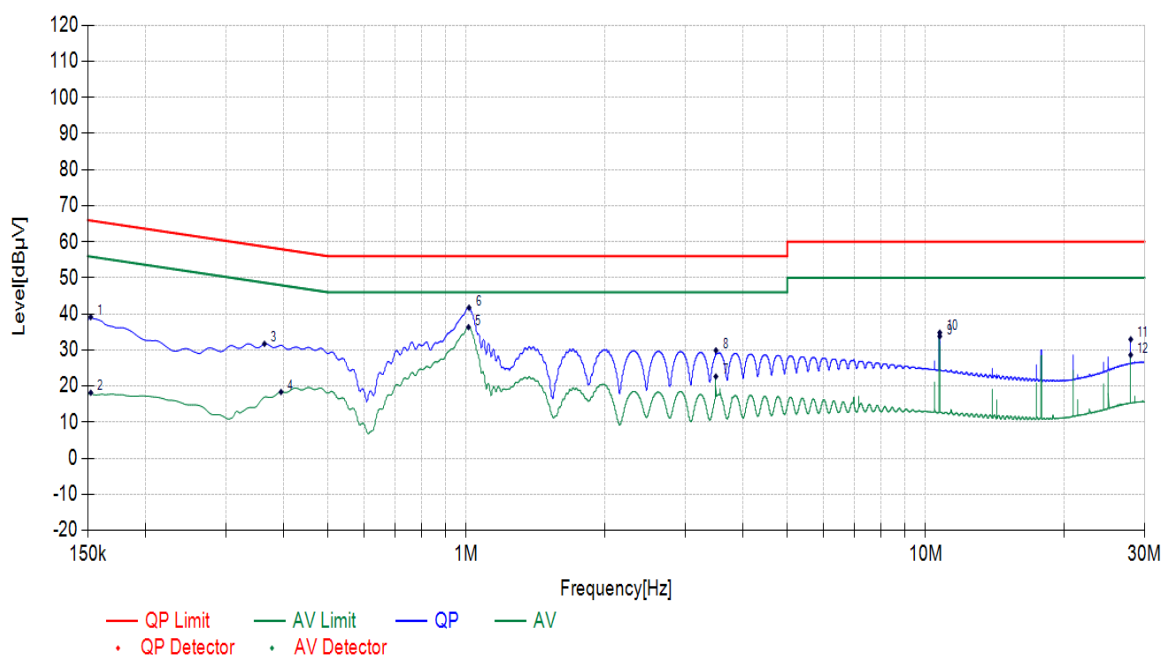


Test Report No. FCC2020-0027-1

Page 11 of 28

Power Line	N
Test Mode	Normal Working

Suspected List								
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Pass/Fail
12	27.9645	10.67	16.60	26.77	60.00	33.23	QP	PASS
3	0.3098	10.14	21.22	30.86	59.98	29.12	QP	PASS
7	1.0095	10.17	26.85	36.52	56.00	19.48	QP	PASS
2	0.1523	10.15	28.66	38.31	65.88	27.57	QP	PASS
9	10.7385	10.37	16.76	26.63	60.00	33.37	QP	PASS
5	0.4245	10.15	19.33	28.98	57.36	28.38	QP	PASS
4	0.3165	10.14	1.76	11.90	49.80	37.90	AV	PASS
6	0.4245	10.15	4.45	14.60	47.36	32.76	AV	PASS
10	10.7385	10.37	9.41	19.78	50.00	30.22	AV	PASS
11	27.9645	10.67	11.30	21.97	50.00	28.03	AV	PASS
8	1.0118	10.17	20.74	30.91	46.00	15.09	AV	PASS
1	0.1523	10.15	5.07	15.22	55.88	40.66	AV	PASS

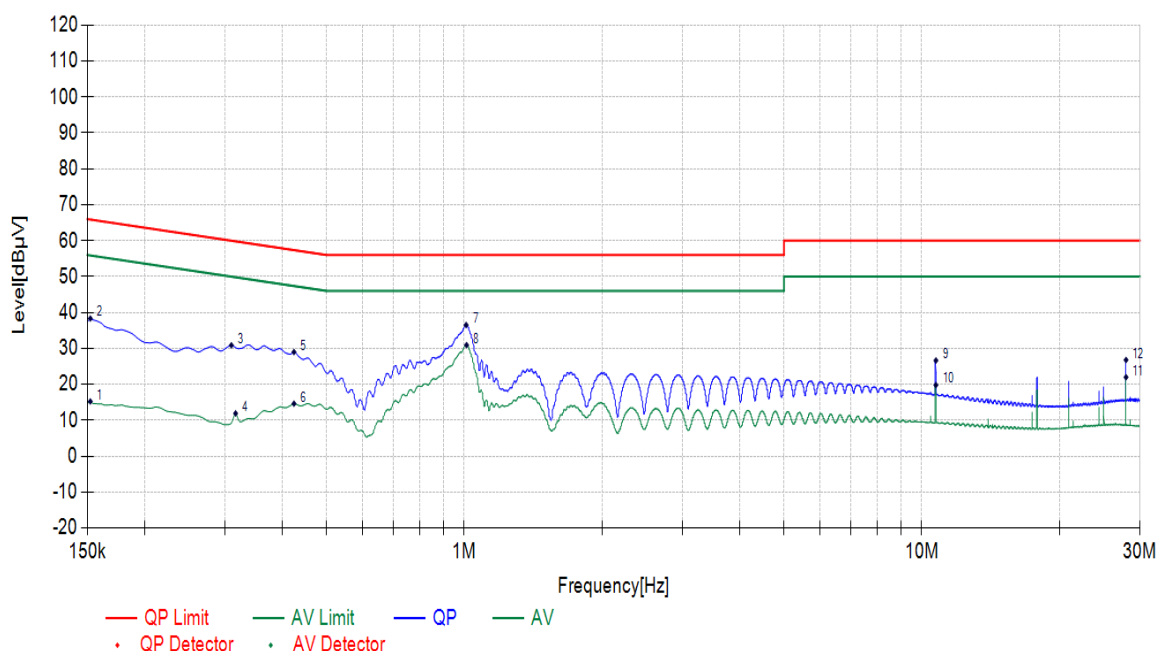

5.2 Radiated Emission

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement:

The test set-up was made in accordance to the general provisions of ANSI C63.4-2014. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz(detector: Peak):

(a)PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

(b)AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded. Then this mode was measured in the following mode: EUT with cradle and EUT without cradle. The worst emission was found in EUT with cradle mode and the worst case was recorded.

The test is in transmitting mode.

Limits:

Limit in restricted band(Part 15.109)

Frequency (MHz)	Measurement Distance (m)	Field strength(uV/m)	Level (dBuV/m)
30 - 88	3	100	40
88 - 216	3	150	43.5
216 - 960	3	200	46
Above 960-1000	3	500	54

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument Antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

Limit in radiated emission measurement (Part 15.109)


Frequency(MHz)	Field strength(dBuV/m) @3m	
Above 1000	74(peak)	54(average)

According to FCC Part 15.33(b),for an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Above 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Test Setup:

Below 1GHz Test Setup:

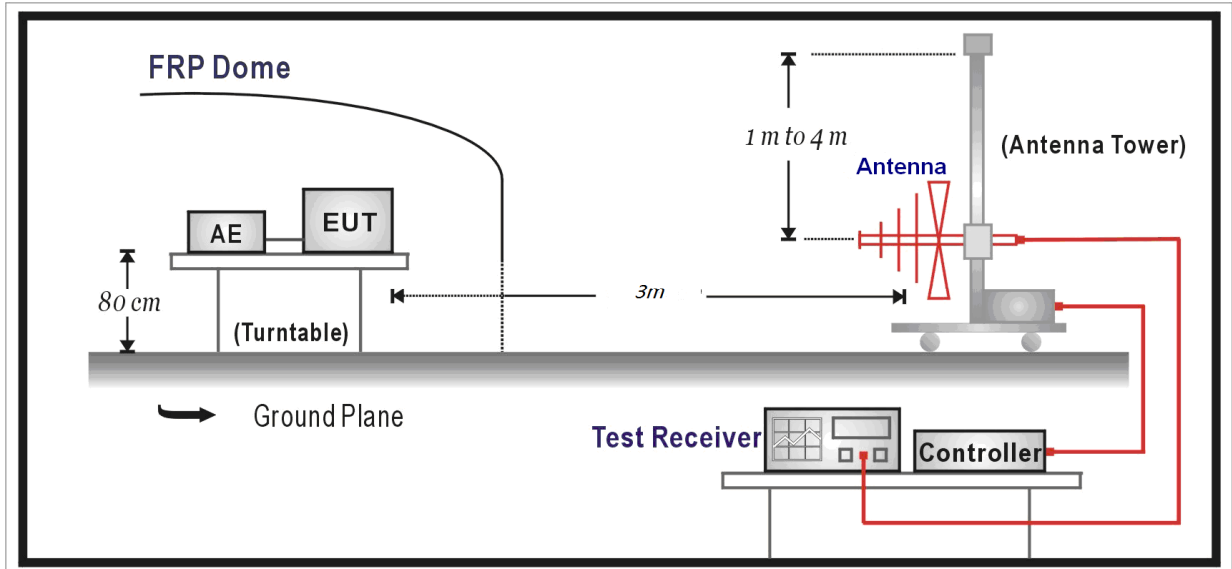

Above 1GHz Test Setup:

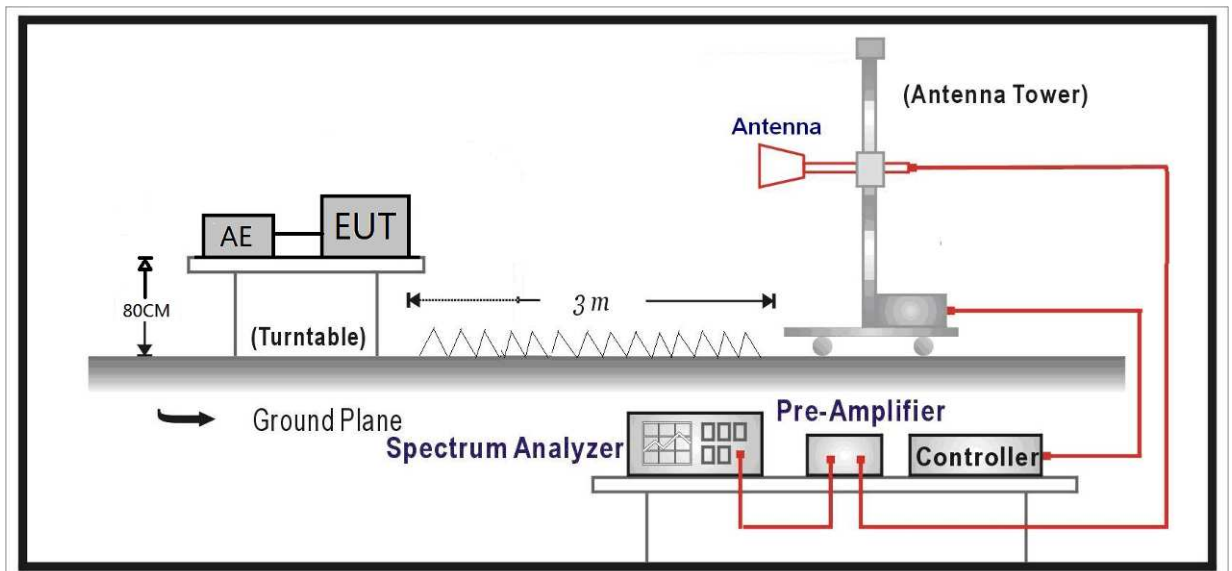

Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
above 1G	4.10 dB
below 1G	4.84 dB


Test Results:

SPURIOUS EMISSIONS 30MHz~1GHz:

Radiated Emission	30MHz-1GHz
Polarity	Horizontal
Test Mode	Normal Working

Suspected List										
Frequency [MHz]	Polarity	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Height [cm]	Angle deg	Pass/Fail
33.7834	Horizontal	20.73	-0.28	20.45	40.00	19.55	PK	100	328	PASS
41.3501	Horizontal	21.21	-1.35	19.86	40.00	20.14	PK	100	356	PASS
50.5661	Horizontal	20.44	-1.10	19.34	40.00	20.66	PK	100	352	PASS
100.8171	Horizontal	20.07	-1.24	18.83	43.52	24.69	PK	100	137	PASS
292.0232	Horizontal	21.08	2.14	23.22	46.02	22.80	PK	100	113	PASS
391.1671	Horizontal	23.51	4.12	27.63	46.02	18.39	PK	100	99	PASS


Final Data List								
Frequency [MHz]	Polarity	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pass/Fail
33.7834	Horizontal	20.73	17.63	40.00	22.37	115	328	PASS
41.3501	Horizontal	21.21	17.96	40.00	22.04	101	356	PASS
50.5661	Horizontal	20.44	16.61	40.00	23.39	100	352	PASS
100.8171	Horizontal	20.07	16.37	43.52	27.15	103	137	PASS
292.0232	Horizontal	21.08	20.49	46.02	25.53	218	113	PASS
391.1671	Horizontal	23.51	25.17	46.02	20.85	109	99	PASS

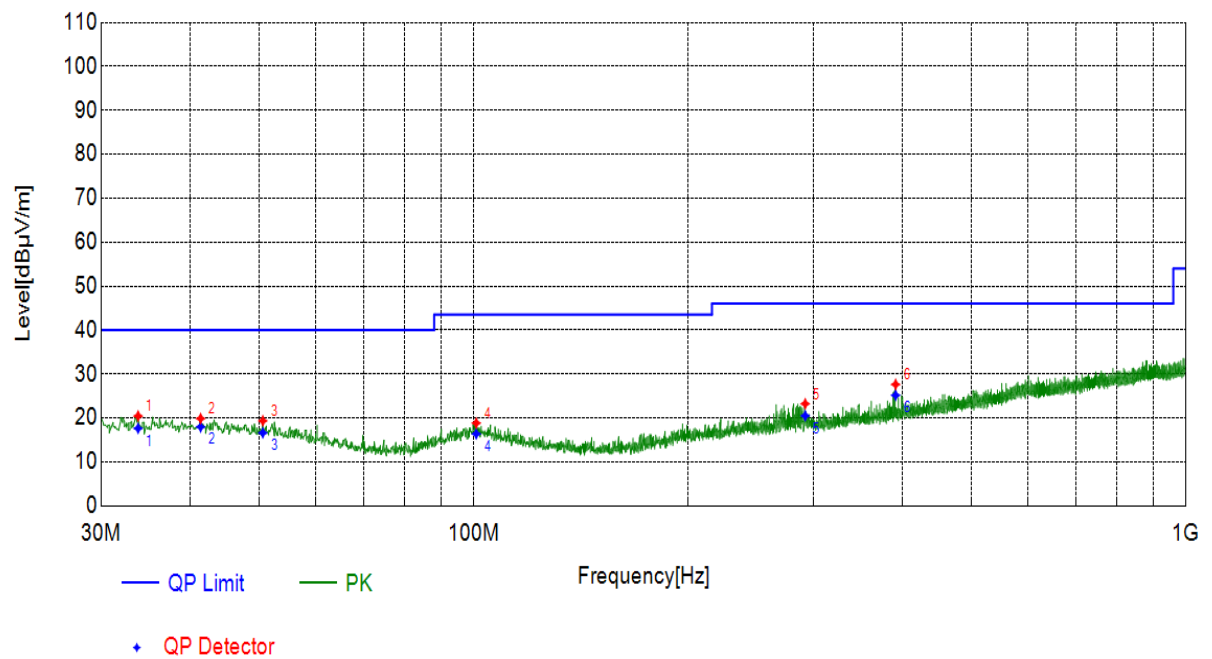

Radiated Emission	30MHz-1GHz
Polarity	Vertical
Test Mode	Normal Working

Suspected List										
Frequency [MHz]	Polarity	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Height [cm]	Angle deg	Pass/Fail
60.5581	Vertical	18.27	8.80	27.07	40.00	12.93	PK	100	160	PASS
68.1248	Vertical	16.60	12.77	29.37	40.00	10.63	PK	100	165	PASS
80.3480	Vertical	15.47	12.33	27.80	40.00	12.20	PK	100	198	PASS
144.8595	Vertical	15.79	6.68	22.47	43.52	21.05	PK	100	174	PASS
176.7757	Vertical	16.67	9.94	26.61	43.52	16.91	PK	100	51	PASS
242.6453	Vertical	20.04	5.73	25.77	46.02	20.25	PK	100	293	PASS

Final Data List								
Frequency [MHz]	Polarity	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pass/Fail
60.5581	Vertical	18.27	24.91	40.00	15.09	119	160	PASS
68.1248	Vertical	16.60	26.76	40.00	13.24	125	165	PASS
80.3480	Vertical	15.47	25.55	40.00	14.45	136	198	PASS
144.8595	Vertical	15.79	20.31	43.52	23.21	106	174	PASS
176.7757	Vertical	16.67	24.36	43.52	19.16	117	51	PASS
242.6453	Vertical	20.04	22.78	46.02	23.24	100	293	PASS

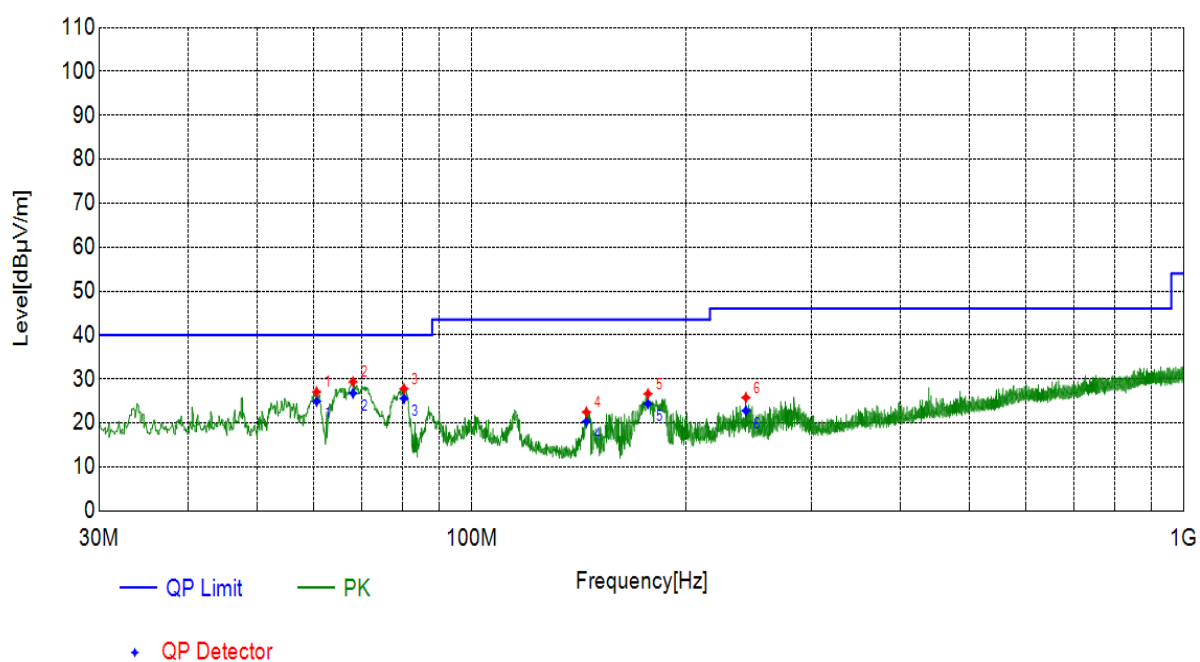


Note: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

SPURIOUS EMISSIONS 1GHz~10GHz:


Radiated Emission	1GHz~10GHz
Polarity	Horizontal
Test Mode	Normal Working

Suspected List										
Frequency [MHz]	Polarity	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Height [cm]	Angle deg	Pass/Fail
2910.89	Horizontal	-7.05	50.95	43.90	74.00	30.10	PK	100	40	PASS
2265.52	Horizontal	-9.49	51.15	41.66	74.00	32.34	PK	100	70	PASS
8569.75	Horizontal	2.49	47.78	50.27	74.00	23.73	PK	100	80	PASS
4664.26	Horizontal	-3.47	51.65	48.18	74.00	25.82	PK	100	80	PASS
5606.66	Horizontal	-1.86	51.86	50.00	74.00	24.00	PK	100	60	PASS
1662.46	Horizontal	-11.49	52.22	40.73	74.00	33.27	PK	100	70	PASS
2271.82	Horizontal	-9.47	41.71	32.24	54.00	21.76	AV	100	10	PASS
8586.85	Horizontal	2.51	37.80	40.31	54.00	13.69	AV	100	10	PASS
4655.26	Horizontal	-3.50	41.16	37.66	54.00	16.34	AV	100	10	PASS
2907.29	Horizontal	-7.07	42.48	35.41	54.00	18.59	AV	100	10	PASS
5972.99	Horizontal	-1.11	42.66	41.55	54.00	12.45	AV	100	10	PASS
1648.06	Horizontal	-11.54	40.90	29.36	54.00	24.64	AV	100	10	PASS

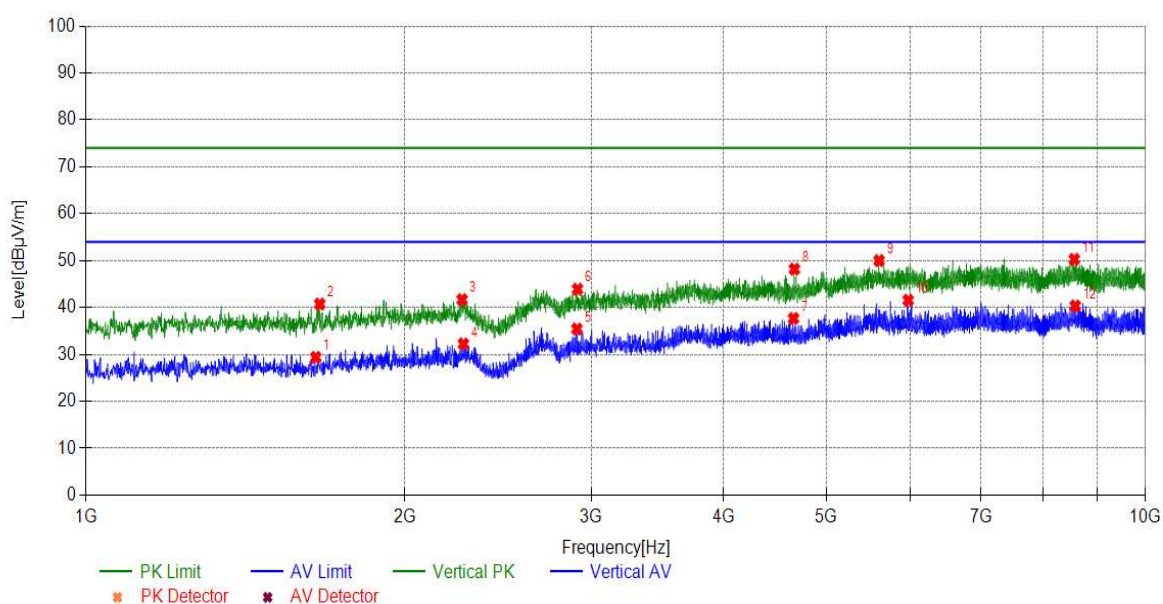

Radiated Emission	1GHz~10GHz
Polarity	Vertical
Test Mode	Normal Working

Suspected List										
Frequency [MHz]	Polarity	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Height [cm]	Angle deg	Pass/Fail
3632.76	Vertical	-4.50	51.45	46.95	74.00	27.05	PK	100	120	PASS
5602.16	Vertical	-1.87	50.67	48.80	74.00	25.20	PK	100	20	PASS
8573.35	Vertical	2.49	48.51	51.00	74.00	23.00	PK	100	20	PASS
2267.32	Vertical	-9.48	52.80	43.32	74.00	30.68	PK	100	50	PASS
7049.50	Vertical	0.97	48.94	49.91	74.00	24.09	PK	100	110	PASS
1423.94	Vertical	-12.12	51.61	39.49	74.00	34.51	PK	100	20	PASS
5572.45	Vertical	-1.93	42.11	40.18	54.00	13.82	AV	100	10	PASS
3639.06	Vertical	-4.49	41.73	37.24	54.00	16.76	AV	100	10	PASS
2252.92	Vertical	-9.53	42.19	32.66	54.00	21.34	AV	100	10	PASS
8633.66	Vertical	2.58	37.45	40.03	54.00	13.97	AV	100	10	PASS
7053.10	Vertical	0.97	39.30	40.27	54.00	13.73	AV	100	10	PASS
1412.24	Vertical	-12.13	41.61	29.48	54.00	24.52	AV	100	10	PASS

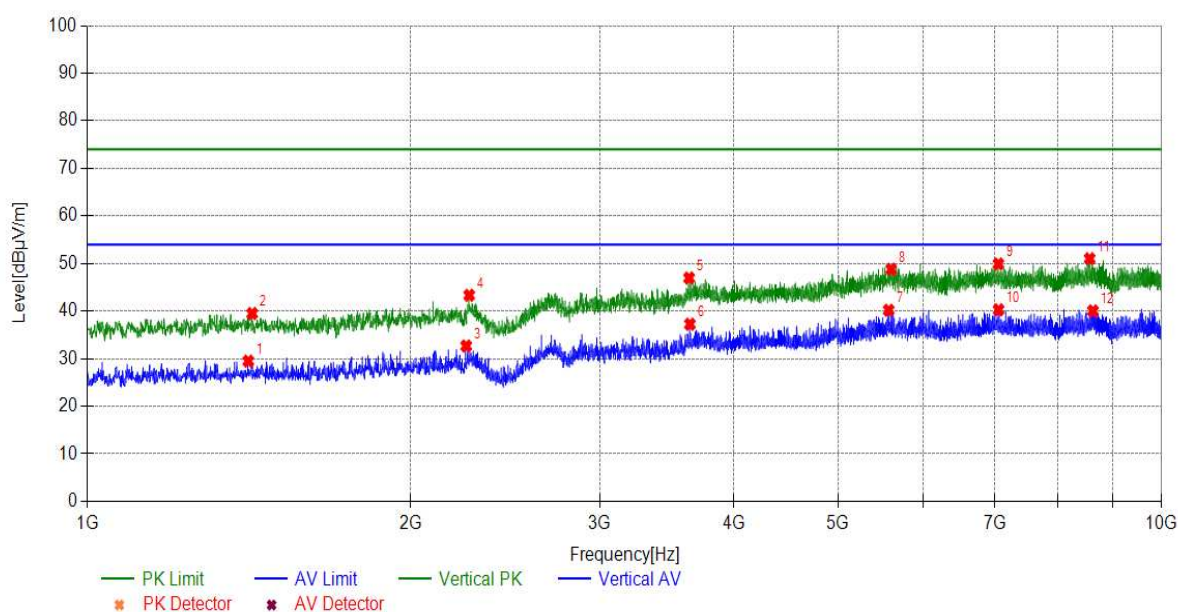

Note: 1. Quasi-Peak = Reading value + Correction factor


2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

6. Test Setup Photograph

(1) Radiated spurious emission Test Setup(Below 1GHz)



(2) Radiated spurious emission Test Setup(Above 1GHz)

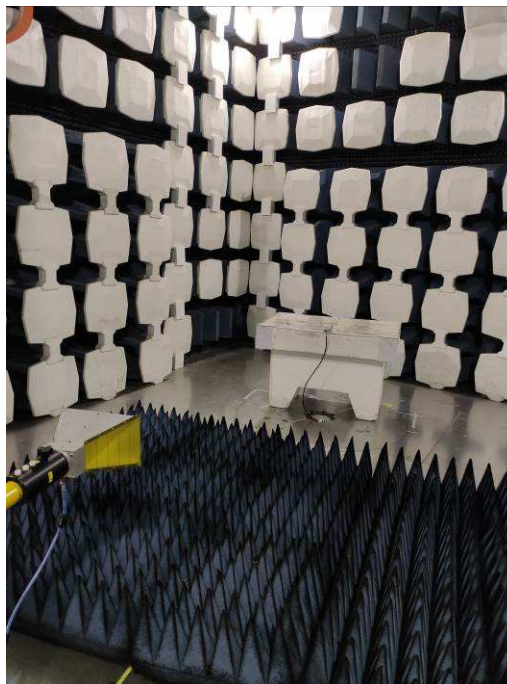


(3) Conducted Emission Test Setup



7. EUT Photograph

(1) EUT Photo

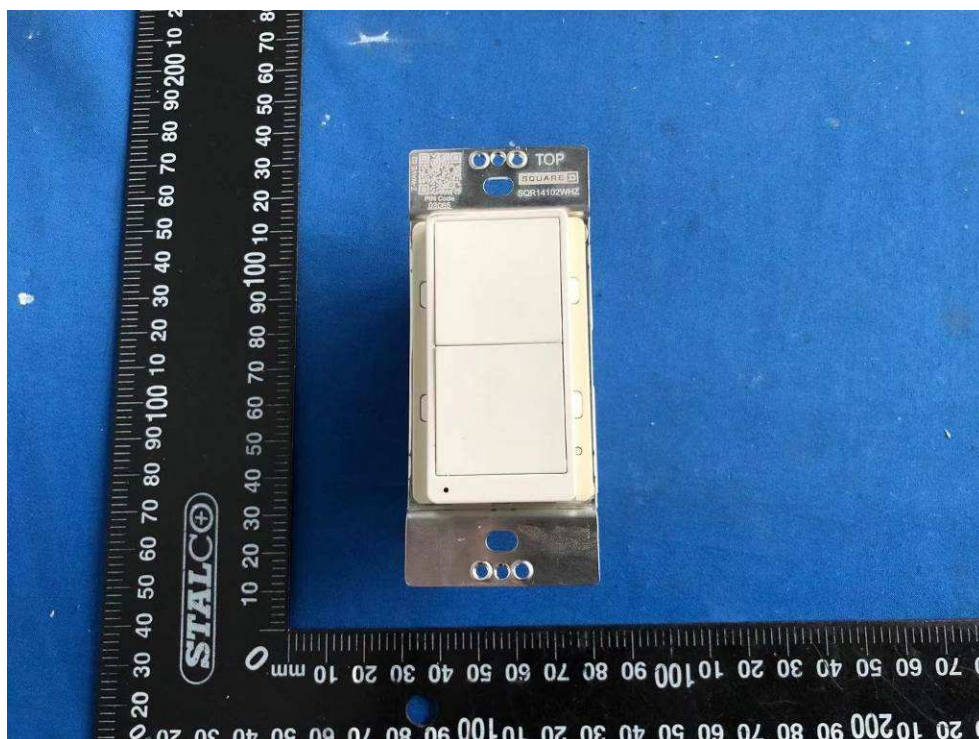


(2) EUT Photo



(3) EUT Photo




(4) EUT Photo

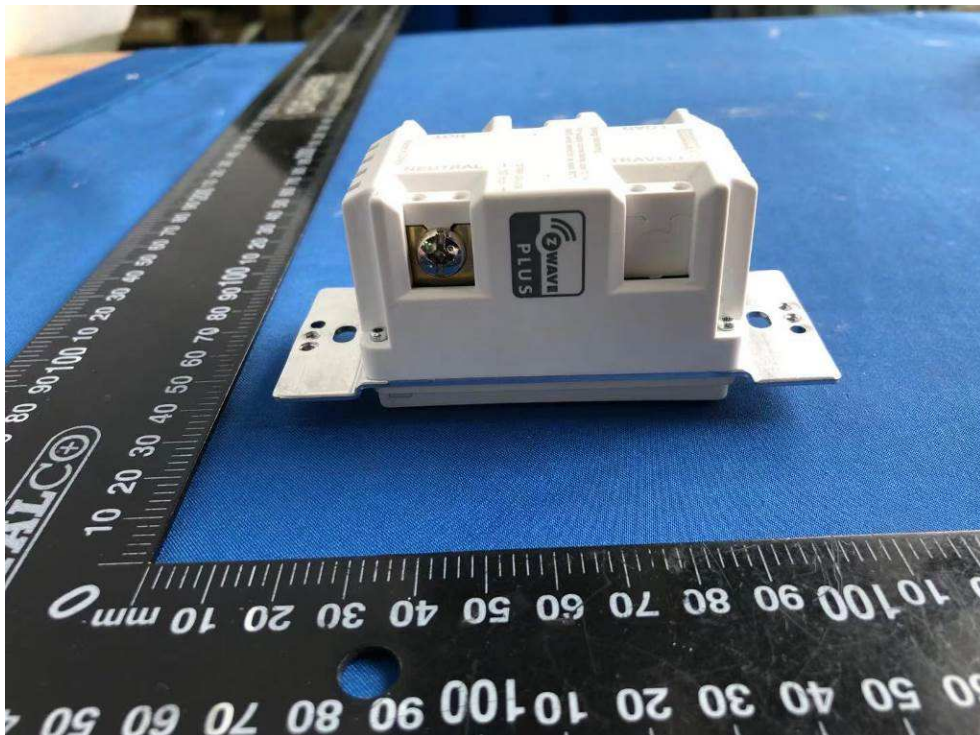


(5) EUT Photo




(6) EUT Photo

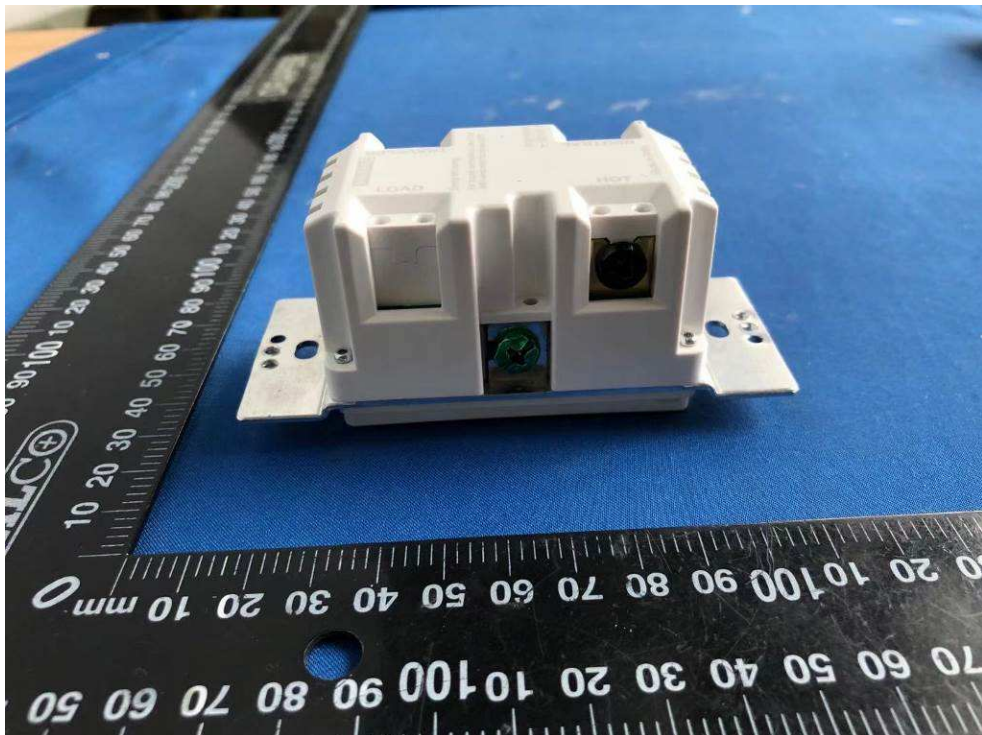


(7) EUT Photo

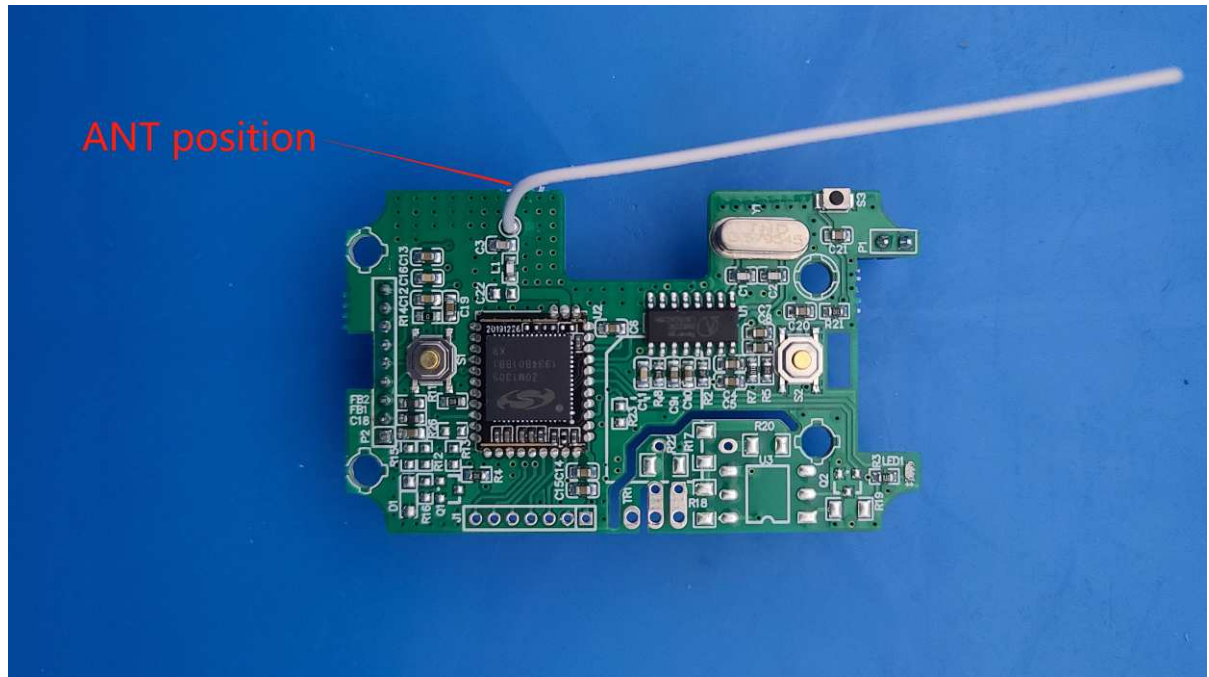


(8) EUT Photo

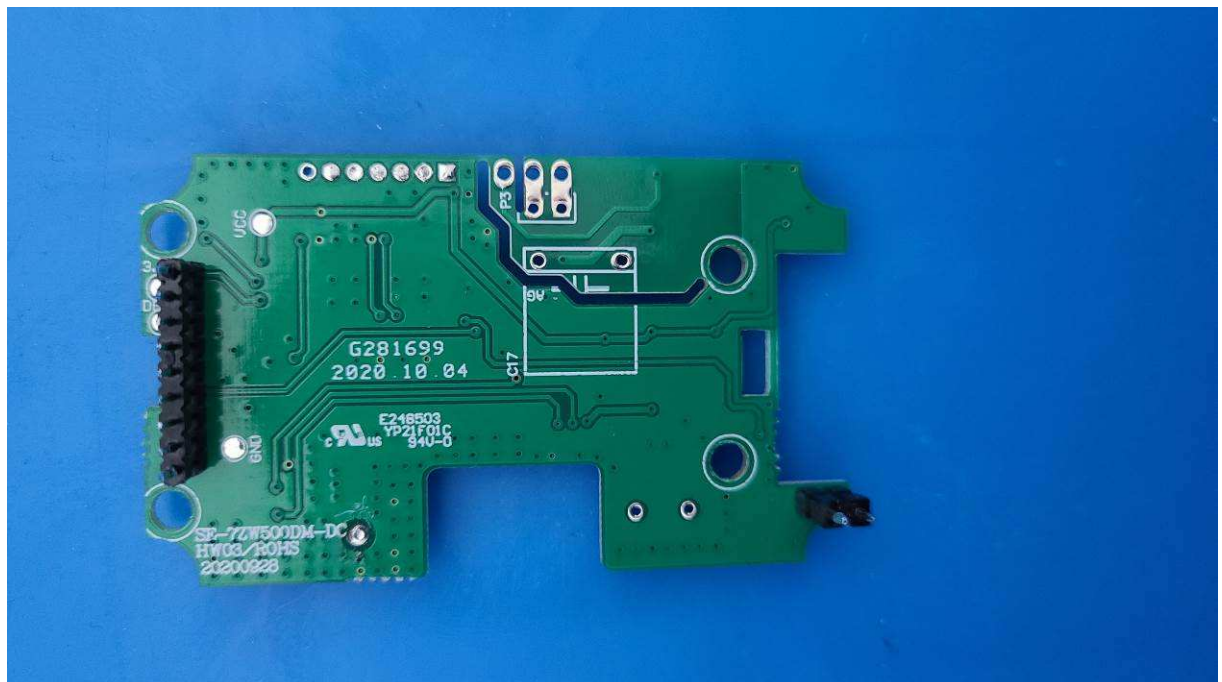

(9) EUT Photo

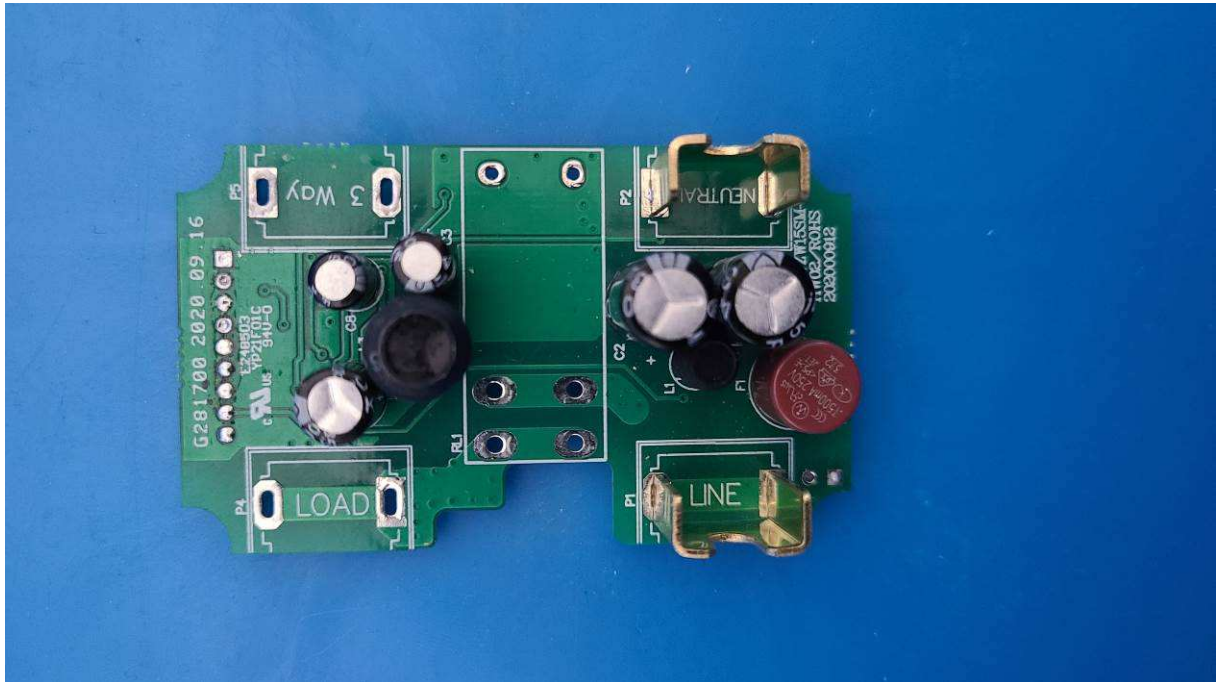

(10) EUT Photo

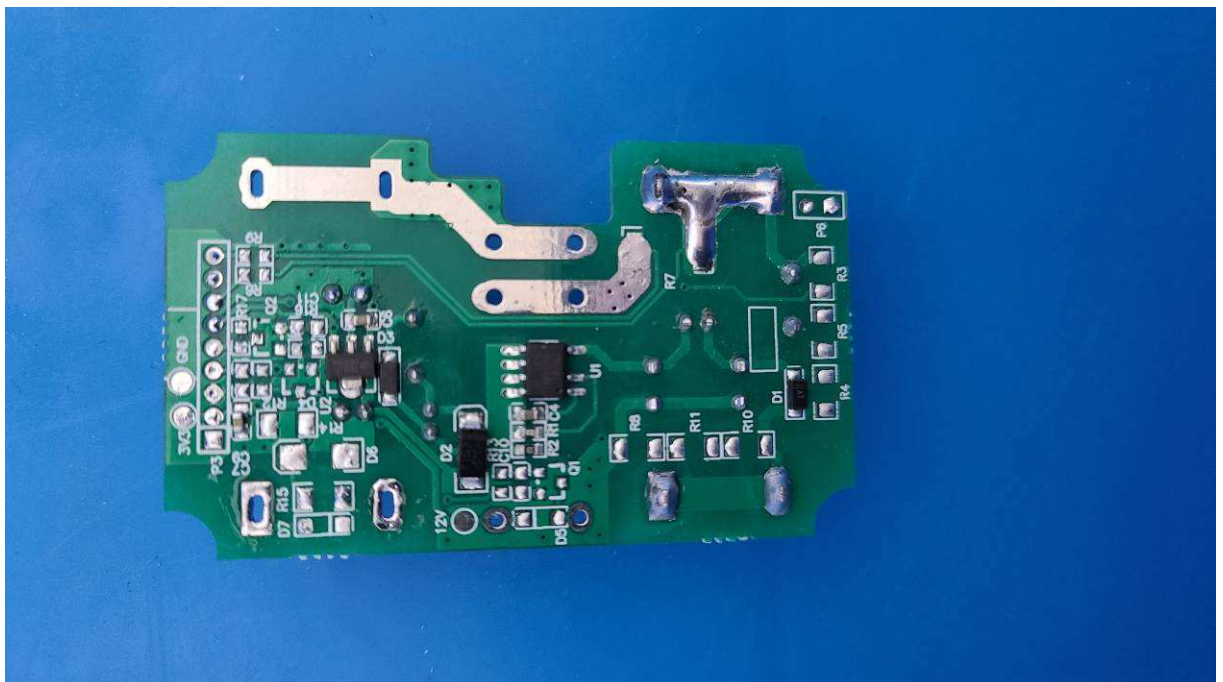

8. Appendix

Equipment list	Type/Mode	Equipment No.	Manufacturer	Cal. Due
EMI Test Receiver	ESI26	EM-0087	R&S	2021-03-15
EMI Test Receiver	ESR3	VG DY-0705	R&S	2021-03-15
LISN	NSLK 8127	VG DY-0150	SCHWARZBECK	2021-09-04
LISN	NSLK 8128	VG DY-0149	SCHWARZBECK	2021-09-04
Impedance Stabilization Network	NTFM8131	EM-000498	SCHWARZBECK	2021-06-09
Voltage Probe	TK9420	VG DY-0128	SCHWARZBECK	2021-03-11
Power Divider	4901.17.B	DB-0016	HUBER+SUHNER	2021-11-08
Shielding Room(#1)	GP1A	WKNF-0001	LEINING	2024-08-08
Shielding Room(#2)	GP1A	WKNF-0006	LEINING	2024-08-08
EMI Test Receiver	N9038A-508	EM-000397	Agilent	2021-03-15
EMI Test Receiver	ESR7	VG DY-0956	R&S	2021-03-11
Broadband Antenna(3m)	VULB 9163	EM-000342	SCHWARZBECK	2021-07-11
Broadband Antenna(5m)	VULB 9163	EM-000382	SCHWARZBECK	2021-05-10
Loop Antenna	HLA 6121	EM-000546	TESEQ	2021-06-28
Waveguide Horn Antenna	BBHA9120B	EM-000383	SCHWARZBECK	2021-03-15
Waveguide Horn Antenna	HF906	WKNA-0024-8	R&S	2021-03-15
Semi-Anechoic Chamber(3m)	FACT-4	WKNA-0024	ETS	2024-12-12
Semi-Anechoic Chamber(5m)	SAC-5	EM-000557	COMTEST	2024-11-02
Spectrum analyzer	N9030A	EM-000395	Agilent	2021-06-08

The End