

Report No.: ZR/2020/8001701 Page: 1 of 28

FCC TEST REPORT

Application No:	ZR/2020/80017
Applicant:	vivo Mobile Communication Co., Ltd.
Address of Applicant	#283,BBK Road,Wusha,Chang'An,DongGuan City,China
Manufacturer:	vivo Mobile Communication Co., Ltd.
Address of Manufacturer:	#283,BBK Road,Wusha,Chang'An,DongGuan City,China
Factory:	vivo Mobile Communication Co., Ltd.
Address of Factory:	#283,BBK Road,Wusha,Chang'An,DongGuan City,China
EUT Description:	Mobile phone
Model No.:	V2027
Trade Mark:	vivo
FCC ID:	2AUCY-V2027
Standards:	47 CFR Part 2
	47 CFR Part 22 subpart H
	47 CFR Part 24 subpart E
	47 CFR Part 27 subpart C
Test Method:	FCC KDB 971168 D01 Power Meas License Digital Systems V03r01
	C63.26 (2015)
Date of Receipt:	2020/8/7
Date of Test:	2020/8/7 to 2020/8/30
Date of Issue:	2020/8/31
Test Result:	PASS *

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derele yang

Derek Yang Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-enDocument.aspx</u>. Attention is drawn to the limitation of liability, indemnification and <u>urisdiction issues</u> defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days on). Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755)83071443, or appeir Company solution and the sample solution at the same solution and the same solutis the same solutis the same solutis the same solution and the

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国 • 深圳•科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/8001701 Page: 2 of 28

1 Version

	Revision Record			
Version	Chapter	Date	Modifier	Remark
01		2020/8/31		Original

Authorized for issue by:		
Tested By	Mike Mu	
	(Mike Hu) /Project Engineer	
Checked By	David Chen	
	(David Chen) /Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and urisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck@ess.com



Report No.: ZR/2020/8001701 Page: 3 of 28

Content

1	VEF	SION	2
2	TES	ST SUMMARY	5
	2.1	GSM850/UMTS BAND 5 & LTE BAND 5	5
	2.2	GSM 1900/UMTS BAND 2 /LTE BAND 2	-
	2.3	UMTS BAND 4 /LTE BAND 4	
	2.4	LTE Band 7/38/41	
3	GEI	NERAL INFORMATION	
	3.1	CLIENT INFORMATION	8
	3.2	Test Location	8
	3.3	Test Facility	8
	3.4	GENERAL DESCRIPTION OF EUT	9
	3.5	Test Mode	9
	3.6	TEST ENVIRONMENT	10
	3.7	TECHNICAL SPECIFICATION	10
	3.8	TEST FREQUENCIES	12
4	DES	SCRIPTION OF TESTS	16
	4.1	CONDUCTED OUTPUT POWER	16
	4.2	EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER	16
	4.3	Occupied Bandwidth	16
	4.4	BAND EDGE AT ANTENNA TERMINALS	17
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	17
	4.6	Peak-Average Ratio	18
	4.7	FIELD STRENGTH OF SPURIOUS RADIATION	18
	4.8	FREQUENCY STABILITY / TEMPERATURE VARIATION	19
	4.9	TEST SETUPS	21
	4.9.	1 Test Setup 1	21
	4.9.	2 Test Setup 2	21
	4.9.	3 Test Setup 3	22
	4.9.	4 Test Setup 4	22
	4.10	TEST CONDITIONS	23
5	MA	N TEST INSTRUMENTS	25
		Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/T	

SGS-CST Tandards Technical Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn Shenzhen Branch Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.com.cn



Report No.: ZR/2020/8001701 Page: 4 of 28

6	MEASUREMENT UNCERTAINTY	
7	APPENDIXES	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Cond



Report No.: ZR/2020/8001701 Page: 5 of 28

2 Test Summary

2.1 GSM850/UMTS Band 5 & LTE Band 5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913	FCC: ERP ≤ 7 W	Section 1 of Appendix B	Pass
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
Band Edges Compliance	§2.1051, §22.917	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055, §22.355	≤ ±2.5ppm.	Section 8 of Appendix B	Pass
Remark: For the verd	lict, the "N/A" denot	es "not applicable", the "N/T" denotes "not te	sted".	

2.2 GSM 1900/UMTS Band 2 /LTE Band 2

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232	EIRP ≤ 2 W	Section 1 of Appendix B	Pass
Peak-Average Ratio	§2.1046, §24.232	Limit≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
Band Edges Compliance	§2.1051, §24.238	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238	 ≤ -13 dBm/1 MHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. 	Section 6 of Appendix B	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055, §24.235	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass
Remark: For the verc	Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-enDecument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not excore a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days on). Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ess.com

No.1Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国 · 深圳 · 科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/8001701 6 of 28 Page:

			Verdict
§2.1046, §27.50(d)	EIRP ≤ 1 W	Section 1 of Appendix B	Pass
§2.1046, §27.50(d)	Limit≤13 dB	Section 2 of Appendix B	Pass
§2.1047	Digital modulation	Section 3 of Appendix B	Pass
§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass
§2.1051, §27.53(h)	 ≤ -13 dBm/1 MHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. 	Section 6 of Appendix B	Pass
§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass
§2.1055, §27.54	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass
	\$2.1046, §27.50(d) §2.1047 §2.1047 §2.1051, §27.53(h) §2.1051, §27.53(h) §2.1053, §27.53(h) §2.1055, §27.54	\$27.50(d) Limit≤13 dB $$2.1046$, \$27.50(d) Limit≤13 dB $$2.1047$ Digital modulation $$2.1049$ OBW: No limit. EBW: No limit. $\$2.1049$ Constant of the second seco	§27.50(d)Appendix B§2.1046, §27.50(d)Limit≤13 dBSection 2 of Appendix B§2.1047Digital modulationSection 3 of Appendix B§2.1049OBW: No limit. EBW: No limit.Section 4 of Appendix B§2.1051, §27.53(h) $\leq -13 \ dBm/1\%^*EBW$, in 1 MHz bands immediately outside and adjacent to the frequency block.Section 5 of Appendix B§2.1051, §27.53(h) $\leq -13 \ dBm/1 \ MHz$, from 9 kHz to 10 th harmonics but outside authorized operating frequency ranges.Section 7 of Appendix B§2.1053, §27.53(h) $\leq -13 \ dBm/1 \ MHz$.Section 7 of Appendix B§2.1055, §2.1055, $\leq +25 \ ppm$ Section 8 of

2.3 UMTS Band 4 /LTE Band 4

Remark: For the verdict, the "N/A" denotes "not applicable", the "N/I" denotes "not tested".

2.4 LTE Band 7/38/41

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)	EIRP ≤ 2W	Section 1 of Appendix B	Pass
Peak-Average Ratio	§27.50(a)	≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.	Section 5 of Appendix B	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation on liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this ter report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: (N_Doccheck@egs.com) or email: <u>CN_Doccheck@sgs.com</u> No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86–755) 26012053 f (86–755) 26710594 sgs.com



Report No.: ZR/2020/8001701 Page: 7 of 28

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	P kHz 9 5 MHz X MHz 10 th harmonics X=Max {6MHz, EBW}	Section 6 of Appendix B	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	Channel Edge -25 dBm/ 1 MHz 9 kHz 9 kHz S 5 MHz X=Max {6MHz, EBW}	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Section 8 of Appendix B	Pass
Remark: For the verd	lict, the "N/A" denote	es "not applicable", the "N/T" denotes "not	tested".	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: ON Doccheck@ass.com



Report No.: ZR/2020/8001701 Page: 8 of 28

3 General Information

3.1 Client Information

Applicant:	vivo Mobile Communication Co., Ltd.
Address of Applicant:	#283,BBK Road,Wusha,Chang'An, DongGuan City, China
Manufacturer:	vivo Mobile Communication Co., Ltd.
Address of Manufacturer:	#283,BBK Road,Wusha,Chang'An, DongGuan City, China
Factory:	vivo Mobile Communication Co., Ltd.
Address of Factory:	#283,BBK Road,Wusha,Chang'An, DongGuan City, China

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057
Telephone:	+86 (0) 755 2601 2053
Fax:	+86 (0) 755 2671 0594
E-mail:	ee.shenzhen@sgs.com

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. ĆNAS LŽ929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

FCC – Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/enTerms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/enTerms-and-Conditions/Terms-en-Document.aspx</u> . Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a ransaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced avcept in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the esuits shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM-Doccheck@ass.com
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/8001701 Page: 9 of 28

EUT Description::	Mobile phone
Model No.:	V2027
Trade Mark:	vivo
Hardware Version:	MP_0.1
Software Version:	PD2034EF_EX_A_3.2.4
Sample Type:	Portable Device, Module
Antenna Type:	External, 🛛 Integrated
	GSM850: -5.95dBi(Down Antenna); -7.77dBi(Up Antenna);
	GSM1900:-3.22dBi(Down Antenna); -2.52dBi(Up Antenna);
	WCDMA Band II:-3.03dBi(Down Antenna); -3.69dBi(Up Antenna);
	WCDMA Band VI:-1.45dBi(Down Antenna); -3.09dBi(Up Antenna);
	WCDMA Band V:-5.92dBi(Down Antenna); -8.31dBi(Up Antenna);
Antenna Gain:	LTE Band 2:-3.03dBi(Down Antenna); -3.69dBi(Up Antenna);
	LTE Band 4: -1.61dBi(Down Antenna); -2.75dBi(Up Antenna);
	LTE Band 5: -5.89dBi(Down Antenna); -8.31dBi(Up Antenna);
	LTE Band 7: -0.96dBi(Down Antenna); -1.66dBi(Up Antenna);
	LTE Band 38: -1.01dBi(Down Antenna); -1.09dBi(Up Antenna);
	LTE Band 41: -1.06dBi(Down Antenna); -1.45dBi(Up Antenna);

3.4 General Description of EUT

3.5 Test Mode

Test Mode	Test Modes Description
GSM/TM1	GSM system, GSM/GPRS, GMSK modulation
GSM/TM2	GSM system, EGPRS, 8PSK modulation
UMTS/TM1	UMTS system, WCDMA, QPSK modulation
UMTS/TM2	UMTS system, WCDMA, 16QAM modulation
LTE/TM1	LTE system, QPSK modulation
LTE/TM2	LTE system, 16QAM modulation
LTE/TM3	LTE system, 64QAM modulation

Remark:

1) The test mode(s) are selected according to relevant radio technology specifications.

2) According to the tune up file provided by the customer, the tune up of the maximum power of the up and down antennas is the same. And the down antenna gain of the antenna in other frequency bands except GSM1900 is the largest. Therefore, In this report GSM1900 is the output power of the up antenna, and other frequency bands are the output power of the down antenna.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ggs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.ggs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document to unlawful and offenders may be prosecuted to the fulliset extent of the law of advisonty. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com or email: CN_Doccheck@sgs.com or email: CN_Doccheck@sgs.com or email: S18057 to (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn



Report No.: ZR/2020/8001701 Page: 10 of 28

3.6 Test Environment

Environment Parameter	Selected Values During Tests		
Relative Humidity	52%		
Atmospheric Pressure:	101.32 KPa		
Temperature	NT	25 ℃	
	LV	3.6V	
Voltage:	NV	3.87V	
	HV	4.45V	

Remark: LV= lower extreme test voltage; NV= nominal voltage

HV= upper extreme test voltage; NT= normal temperature

3.7 Technical Specification

Characteristics	Description			
	GSM			
Radio System Type	UMTS			
	🛛 LTE			
	Band	ТХ	RX	
	GSM850	824 to 849 MHz	869 to 894 MHz	
	GSM1900	1850 to 1910 MHz	1930 to 1990 MHz	
	UMTS Band II	1850 to 1910 MHz	1930 to 1990 MHz	
	UMTS Band IV	1710 to 1755 MHz	2110 to 2155 MHz	
Supported Frequency	UMTS Band V	824 to 849 MHz	869 to 894 MHz	
Range	LTE Band 2	1850 to 1910 MHz	1930 to 1990 MHz	
	LTE Band 4	1710 to 1755 MHz	2110 to 2155 MHz	
	LTE Band 5	824 to 849 MHz	869 to 894 MHz	
	LTE Band 7	2500 to 2570 MHz	2620 to 2690 MHz	
	LTE Band 38	2570 to 2620 MHz	2570 to 2620 MHz	
	LTE Band 41	2535 to 2655MHz	2535 to 2655MHz	
Target TX OutputGSM850:34.5dBm GSM1900: 31.5dBm UMTS Band II: 24.5dBm UMTS Band IV: 24.0dBr UMTS Band V: 24.5dBn LTE Band 2: 24.7dBm LTE Band 4: 23.7dBm LTE Band 5: 25.0dBm LTE Band 38: 24.5dBm LTE Band 38: 24.5dBm LTE Band 41: 24.5dBm				
Supported Channel	GSM system: UMTS system:	⊠0.2 MHz ⊠5 MHz		
1100万百度(110万万万万万万万万万万万万万万万万万万万万万万万万万万万万万万万万万万万	Unless otherwise agreed in writing, this document is werleaf, available on request or accessible at <u>http://ww</u>		eral Conditions of Service printed d, for electronic format documents,	



	onless otherwise agreed in writing, this document is issued by the company subject to its contrations of cervice printed
	overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents,
	subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.
	Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is
	advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of
	Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a
	transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced
	except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or
	appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the
	results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
	Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,
	or email: <u>CN.Doccheck@sgs.com</u>
td	No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn
	中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/8001701 Page: 11 of 28

Bandwidth		☐ 1.4 MHz; ☐ 3 MHz; ☐ 5 MHz; ☐ 10 MHz;
Danuwiutti	LTE Band 2	⊠15 MHz, ⊠20 MHz
	LTE Band 4	\square 1.4 MHz; \square 3 MHz; \square 5 MHz; \square 10 MHz;
		⊠15 MHz, ⊠20 MHz
	LTE Band 5	⊠1.4 MHz;⊠3 MHz; ⊠5 MHz; ⊠10 MHz
	LTE Band 7	⊠5 MHz; ⊠10 MHz; ⊠15 MHz, ⊠20 MHz
	LTE Band38	⊠5 MHz; ⊠10 MHz; ⊠15 MHz, ⊠20 MHz
	LTE Band41	│ 🖾 5 MHz; 🖾 10 MHz; 🖾 15 MHz, 🖾 20 MHz
Characteristics	Description	
	GSM850	247KGXW; 247KG7W
	GSM1900	246KGXW; 249KG7W
	UMTS Band II	4M15F9W;
	UMTS Band IV	4M14F9W;
	UMTS Band V	4M14F9W;
		1M09G7D;1M09W7D; 1M10W7D
		2M70G7D;2M69W7D; 2M69W7D
		4M48G7D;4M50W7D; 4M48W7D
	LTE Band 2	8M93G7D;8M93W7D; 8M93W7D
		13M5G7D;13M5W7D; 13M5W7D
		17M9G7D;17M9W7D; 17M9W7D
Designation of		1M09G7D;1M09W7D; 1M10W7D
Emissions		2M70G7D;2M69W7D; 2M70W7D
(Remark: the necessary		4M48G7D;4M49W7D; 4M48W7D
bandwidth of which is	LTE Band 4	8M93G7D;8M93W7D; 8M93W7D
		13M5G7D;13M5W7D; 13M5W7D
the worst value from		17M9G7D;17M9W7D; 17M9W7D
the measured occupied		1M09G7D;1M09W7D; 1M10W7D
bandwidths for each		2M70G7D;2M69W7D; 2M69W7D
type of channel	LTE Band 5	4M48G7D;4M50W7D; 4M48W7D
bandwidth		8M95G7D;8M95W7D; 8M93W7D
configuration.)		4M48G7D;4M50W7D; 4M48W7D
ooringerationity		8M95G7D;8M95W7D; 8M93W7D
	LTE Band 7	13M5G7D;13M5W7D; 13M5W7D
		17M9G7D;17M9W7D; 17M9W7D
		4M48G7D;4M50W7D; 4M49W7D
		8M91G7D;8M91W7D; 8M93W7D
	LTE Band 38	13M5G7D;13M5W7D; 13M5W7D
		17M9G7D;17M9W7D; 17M9W7D
		4M48G7D;4M50W7D; 4M47W7D
		8M91G7D;8M91W7D; 8M91W7D
	LIE Band 41	13M5G7D;13M5W7D; 13M5W7D
		17M9G7D;17M9W7D; 17M9W7D
	1	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: ON Doccheck@ess.com



Report No.: ZR/2020/8001701 Page: 12 of 28

3.8 Test Frequencies

Test Mode	TX / RX	RF Channel		
Test Mode		Low (L)	Middle (M)	High (H)
	TX RX	Channel 128	Channel 190	Channel 251
GSM850		824.2MHz	836.6 MHz	848.8 MHz
GSIVIOSU		Channel 128	Channel 190	Channel 251
		869.2 MHz	881.6 MHz	893.8 MHz

Test Made	TX / RX	RF Channel		
Test Mode		Low (L)	Middle (M)	High (H)
	TV	Channel 512	Channel 661	Channel 810
00141000	ТХ	1850.2MHz	1880.0 MHz	1909.8 MHz
GSM1900	DV	Channel 512	Channel 661	Channel 810
	RX	1930.2 MHz	1960.0 MHz	1989.8 MHz

Toot Modo	Test Mode TX / RX		RF Channel	
Test Mode		Low (L)	Middle (M)	High (H)
	ту	Channel 9262	Channel 9400	Channel 9538
WCDMA	ТХ	1852.4 MHz	1880.0 MHz	1907.6 MHz
Band II	DV	Channel 9662	Channel 9800	Channel 9938
	RX	1932.4 MHz	1960.0 MHz	1987.6 MHz

Test Mode	de TX / BX RF Channel			
Test Mode		Low (L)	Middle (M)	High (H)
	ТХ	Channel 1312	Channel 1413	Channel 1513
WCDMA		1712.4MHz	1732.6 MHz	1752.6 MHz
Band IV	BX	Channel 1537	Channel 1638	Channel 1738
		2112.4 MHz	2132.6 MHz	2152.6 MHz

Test Mode	TX / BX	RF Channel		
Test Mode		Low (L)	Middle (M)	High (H)
	Band V	Channel 4132	Channel 4182	Channel 4233
WCDMA		826.4MHz	836.4 MHz	846.6 MHz
Band V		Channel 4357	Channel 4407	Channel 4458
	RX	871.4 MHz	881.4 MHz	891.6 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and urisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck@ess.com



Report No.: ZR/2020/8001701 Page: 13 of 28

Test Mada	Dandwidth	TX / BX		RF Channel	
Test Mode	Bandwidth		Low (L)	Middle (M)	High (H)
		ТΧ	Channel 18607	Channel 18900	Channel 19193
	1.4MHz		1850.7 MHz	1880 MHz	1909.3 MHz
	1.4IVITZ	RX	Channel 607	Channel 900	Channel 1193
			1930.7 MHz	1960 MHz	1989.3 MHz
		ТХ	Channel 18615	Channel 18900	Channel 19185
	3MHz		1851.5 MHz	1880 MHz	1908.5 MHz
	SIVITIZ	RX	Channel 615	Channel 900	Channel 1185
			1931.5 MHz	1960 MHz	1988.5 MHz
		ТΧ	Channel 18625	Channel 18900	Channel 19175
	5MHz		1852.5 MHz	1880 MHz	1907.5 MHz
		RX	Channel 625	Channel 900	Channel1175
LTE Band 2			1932.5 MHz	1960 MHz	1987.5 MHz
LTE Dariu Z		тх	Channel 18650	Channel 18900	Channel 19150
	10MHz		1855 MHz	1880 MHz	1905 MHz
	TOMITZ	RX	Channel 650	Channel 900	Channel 1150
			1935 MHz	1960 MHz	1985 MHz
		ТΧ	Channel 18675	Channel 18900	Channel 19125
	15MHz		1857.5 MHz	1880 MHz	1902.5 MHz
	TOIVINZ	RX	Channel 675	Channel 900	Channel 1125
			1937.5 MHz	1960 MHz	1982.5 MHz
		ТΧ	Channel 18700	Channel 18900	Channel 19100
	20MHz		1860 MHz	1880 MHz	1900 MHz
		RX	Channel 700	Channel 900	Channel 1100
		ΠΛ	1940 MHz	1960 MHz	1980 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and urisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck@ess.com



Report No.: ZR/2020/8001701 Page: 14 of 28

Test Made	Bandwidth	TX / BX		RF Channel	
Test Mode	Danuwiutri		Low (L)	Middle (M)	High (H)
		ТХ	Channel 19957	Channel 20175	Channel 20393
			1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4MHz	RX	Channel 1975	Channel 2175	Channel 2375
		ΠΛ	2112.5 MHz	2132.5MHz	2152.5 MHz
		ТХ	Channel 19965	Channel 20175	Channel 20385
			1711.5 MHz	1732.5 MHz	1753.5 MHz
	3MHz	RX	Channel 2000	Channel 2175	Channel 2350
		ΠΛ	2115 MHz	2132.5MHz	2150 MHz
		ТΧ	Channel 19975	Channel 20175	Channel 20375
	5MHz		1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
LTE Band 4			2112.5 MHz	2132.5MHz	2152.5 MHz
LIE Danu 4		тх	Channel 20000	Channel 20175	Channel 20350
	10MHz		1715 MHz	1732.5 MHz	1750 MHz
		RX	Channel 2000	Channel 2175	Channel 2350
			2115 MHz	2132.5MHz	2150 MHz
		ТΧ	Channel 20025	Channel 20175	Channel 20325
	15MHz		1717.5 MHz	1732.5 MHz	1747.5 MHz
		RX	Channel 2025	Channel 2175	Channel 2325
		ΠΛ	2117.5 MHz	2132.5MHz	2147.5 MHz
		ТХ	Channel 20050	Channel 20175	Channel 20300
	20MHz	IA	1720 MHz	1732.5 MHz	1745 MHz
		RX	Channel 2050	Channel 2175	Channel 2300
		ΠΛ	2120 MHz	2132.5MHz	2145 MHz

Test Mede	Dandwidth	TX / RX		RF Channel	
Test Mode	Test Mode Bandwidth		Low (L)	Middle (M)	High (H)
		ТΧ	Channel 20407	Channel 20525	Channel 20643
	1.4MHz		824.7 MHz	836.5 MHz	848.3 MHz
	1.411112	RX	Channel 2407	Channel 2525	Channel 2643
		ПЛ	869.7 MHz	881.5 MHz	893.3 MHz
		ТХ	Channel 20415	Channel 20525	Channel 20635
	3MHz		825.5 MHz	836.5 MHz	847.5 MHz
		RX	Channel 2415	Channel 2525	Channel 2635
LTE Band 5			870.5 MHz	881.5 MHz	892.5 MHz
LTE Danu 5		ТХ	Channel 20425	Channel 20525	Channel 20625
	5MHz		826.5 MHz	836.5 MHz	846.5 MHz
		RX	Channel 2425	Channel 2525	Channel 2625
			871.5 MHz	881.5 MHz	891.5 MHz
		ТХ	Channel 20450	Channel 20525	Channel 20600
	10MHz		829 MHz	836.5 MHz	844 MHz
		PV	Channel 2450	Channel 2525	Channel 2600
	RX	ΠΛ	874 MHz	881.5 MHz	889 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test and sub aspmele(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: ON Doccheck@ess.com



Report No.: ZR/2020/8001701 Page: 15 of 28

Test Mada	Dandwidth	TX / RX		RF Channel			
Test Mode	Bandwidth		Low (L)	Middle (M)	High (H)		
		ТХ	Channel 20775	Channel 21100	Channel 21425		
	5MHz		2502.5 MHz	2535 MHz	2567.5 MHz		
		RX	Channel 2775	Channel 3100	Channel 5825		
			2622.5 MHz	2655 MHz	2687.5 MHz		
		тх	Channel 20800	Channel 21100	Channel 21400		
	10MHz	IX	2505 MHz	2535 MHz	2565 MHz		
		RX	Channel 2800	Channel 3100	Channel 3400		
LTE Band 7			2625 MHz	2655 MHz	2685 MHz		
LIE Dallu /		тх	Channel 20825	Channel 21100	Channel 21375		
	15MHz		2507.5 MHz	2535 MHz	2562.5 MHz		
	TOIVITZ	RX	Channel 2825	Channel 3100	Channel 3375		
			2627.5 MHz	2655 MHz	2682.5 MHz		
		ТХ	Channel 20850	Channel 21100	Channel 21350		
	20MHz		2510 MHz	2535 MHz	2560 MHz		
		RX	Channel 2850	Channel 3100	Channel 3350		
			2630 MHz	2655 MHz	2680 MHz		

Test Mode	Bandwidth	TX / RX	RF Channel			
Test Mode	Danuwiuth		Low (L)	Middle (M)	High (H)	
	5MHz	TX/RX	Channel 37775	Channel38000	Channel 38225	
			2572.5 MHz	2595 MHz	2617.5 MHz	
	10MHz	TX/RX	Channel 37800	Channel38000	Channel 38200	
LTE Band 38			2575 MHz	2595 MHz	2615 MHz	
LIE Dallu So	15MHz	TX/RX	Channel 37825	Channel38000	Channel 38175	
			2577.5 MHz	2595 MHz	2612.5 MHz	
	20MHz	TX/RX	Channel 37850	Channel38000	Channel 38150	
	∠∪iviHZ		2580 MHz	2595 MHz	2610 MHz	

Test Mode	Bandwidth	TX / RX	RF Channel			
Test Wode	Danuwiuth		Low (L)	Middle (M)	High (H)	
	5MHz		Channel 40065	Channel40640	Channel 41215	
		TX/RX	2537.5 MHz	2595 MHz	2652.5 MHz	
	10MHz	TX/RX	Channel 40090	Channel40640	Channel 41190	
LTE David 41			2540 MHz	2595 MHz	2650 MHz	
LTE Band 41	15MHz	TX/RX	Channel 40115	Channel40640	Channel 41165	
			2542.5 MHz	2595 MHz	2647.5 MHz	
	001411-		Channel 40140	Channel40640	Channel 41140	
	20MHz	TX/RX	2545 MHz	2595 MHz	2645 MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this ter report refer only to the sample(s) tested and such sample(s) are relation of 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck@ess.com



Report No.: ZR/2020/8001701 Page: 16 of 28

4 Description of Tests

4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

Remark: Reference test setup 1

4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 ; C63.26 (2015) Calculate power in dBm by the following formula: ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd) EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi) EIRP=ERP+2.15dB

4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2

中国・深圳・科技园中区M-10栋一号厂房

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this terport refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Not mostly a contact the stated for 30 days only. Not mostly a contact to at telephone: (86-755) 8307 1443, or email: Ch_Doccheck@ags.com

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

Member of the SGS Group (SGS SA)

sgs.china@sgs.com



Report No.: ZR/2020/8001701 Page: 17 of 28

Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within

1 - 5% of the 99% occupied bandwidth observed in Step 7

4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to



	Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Terms-end-Term
d.	No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn
	中国•深圳•科技园中区M_10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sqs.cbina@sqs.com



Report No.: ZR/2020/8001701 Page: 18 of 28

force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Remark: Reference test setup 1

Test Settings

- 1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency
- (separated into at least two plots per channel)
- 2. Detector = RMS
- Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 4. Sweep time = auto couple
- The trace was allowed to stabilize
 Please see test potes below for PBW and VB
- 6. Please see test notes below for RBW and VBW settings

4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.1

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Remark: Reference test setup 1

Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

4.7 Field Strength of Spurious Radiation



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions/Terms-enDocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is used to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. **Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: Ch_Doccheck@sgs.com

No.1Workshop,Mi-Di.Middle Section, Science & Technology Park, Shenzhen, China 518057
t (86-755) 26012053 f (86-755) 26710594

www.sgsgroup.com.on

ngl arguiter approxing all the standard such as the standard such as the standard such as the standard and such as the standard as the standard astandard such as the standard ast**



Report No.: ZR/2020/8001701 Page: 19 of 28

Measurement Procedure: FCC KDB 971168 D01 V03r01

Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8) Calculate power in dBm by the following formula:

ERP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBd)

Where:

Pd is the dipole equivalent power, Pg is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to Pg [dBm] – cable loss [dB]. The calculated Pd levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of 43 + 10log10(Power [Watts]).

Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:

EIRP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBi)

EIRP=ERP+2.15dB

Where:

Pg is the generator output power into the substitution antenna.

- 3. Test the EUT in the lowest channel, the middle channel the Highest channel
- 4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5. Repeat above procedures until all frequencies measured was complete

Remark: Reference test setup 3

4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; ANSI/C63.26 (2015)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unavful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@ags.com

No.1Workhon,Mit0.Midde Section,Science & Technology Park, Shenzhen, China 518057
t (86-755) 26012053 f (86-755) 26710594

www.sgsgroup.com.cn
mags.china@egs.com



Report No.: ZR/2020/8001701 Page: 20 of 28

. The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from $-30 \,^{\circ}$ C to $+50 \,^{\circ}$ C in $10 \,^{\circ}$ C increments using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Remark: Reference test setup 4



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days on). Attention. To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755)83071443,


No.1Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳•科技园中区M-10栋一号厂房 邮编: 518057 t (86–755) 26012053 f (86–755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/8001701 Page: 21 of 28

4.9 Test Setups

4.9.1 Test Setup 1

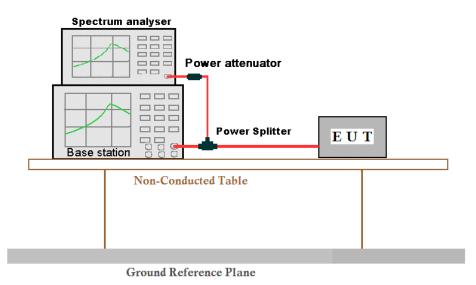

4.9.2 Test Setup 2

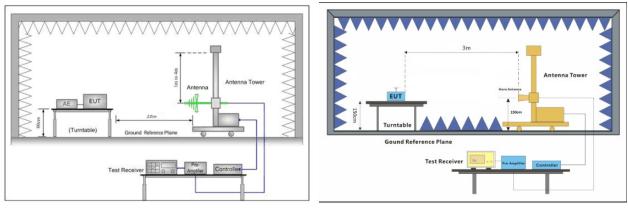


Figure 1. 30MHz to 1GHz

Figure 2. above 1GHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification on the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) iscer retained for 30 days on). Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Docchek@ass.com

100.1 Workshop, M-10, Miole Section, Science & recimiology Park, Sherizhen, Chilla 518057 t (66-755) 26012053 f (66-755) 26710594 www.sgsgroup.com. 中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.chila@sgs.com



Report No.: ZR/2020/8001701 Page: 22 of 28

4.9.3 Test Setup 3




Figure 1. Below 30MHz


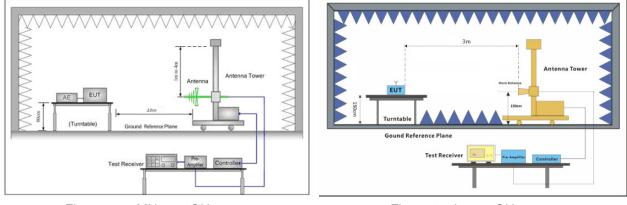


Figure 2. 30MHz to 1GHz

Figure 3. above 1GHz

4.9.4 Test Setup 4

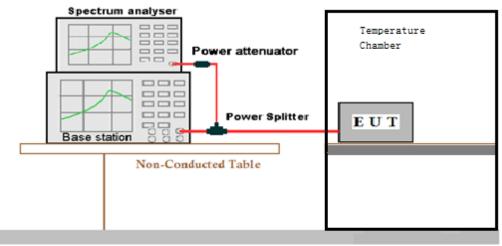

Ground Reference Plane



No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳•科技园中区M-10栋一号厂房 邮编: 518057 t (86–755) 26012053 f (86–755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/8001701 Page: 23 of 28

4.10 Test Conditions

Test Case		Test Conditions			
		Test Environment	Ambient Climate & Rated Voltage		
	Average	Test Setup	Test Setup 1		
	Power, Total	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
Transmit Output		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2; LTE/TM1;LTE/TM2; LTE/TM3;		
Power Data	Average	Test Environment	Ambient Climate & Rated Voltage		
	Power,	Test Setup	Test Setup 1		
	Spectral Density (if	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
	required)	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;		
			UMTS/TM2; LTE/TM1;LTE/TM2; LTE/TM3;		
		Test Environment	Ambient Climate & Rated Voltage		
Peak-to-Ave	erage Batio	Test Setup	Test Setup 1		
(if required)		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;		
			UMTS/TM2; LTE/TM1;LTE/TM2; LTE/TM3;		
		Test Environment	Ambient Climate & Rated Voltage		
Modulation		Test Setup	Test Setup 1		
Characteris	tics	RF Channels (TX)	M (M= middle channel)		
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2; LTE/TM1;LTE/TM2; LTE/TM3;		
		Test Environment	Ambient Climate & Rated Voltage		
Bandwidth	Opposite	Test Setup	Test Setup 1		
	Occupied Bandwidth	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1; UMTS/TM2; LTE/TM1;LTE/TM2; LTE/TM3;		
	Emission	Test	Ambient Climate & Rated Voltage		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a gapearance of this document is unavful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. **Attention : For Check Resign.on** 10.1 Workshow. 91.0 Middle Section. Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sagsroup.com.on



Report No.: ZR/2020/8001701 Page: 24 of 28

	Bandwidth	Environment			
	(if	Test Setup	Test Setup 1		
	required)	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;		
		Test Mode	UMTS/TM2; LTE/TM1;LTE/TM2; LTE/TM3;		
		Test Environment	Ambient Climate & Rated Voltage		
Dond Edgo	_	Test Setup	Test Setup 1		
Band Edges Compliance		RF Channels (TX)	L, H (L= low channel, H= high channel)		
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;		
		Test Mode	UMTS/TM2; LTE/TM1;LTE/TM2; LTE/TM3;		
		Test Environment	Ambient Climate & Rated Voltage		
Spurious Er	nission at	Test Setup	Test Setup 1		
Antenna Te	rminals	RF Channels	L,M, H		
		(TX)	(L= low channel, M= middle channel, H= high channel)		
		Test Mode	GSM/TM1;UMTS/TM1; LTE/TM1		
		Test Environment	Ambient Climate & Rated Voltage		
		Test Setup	Test Setup 2		
Field Streng Spurious Ra	-	Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;UMTS/TM2; LTE/TM1;LTE/TM2;LTE/TM3;		
		Test Mode	Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.		
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
		Test	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage;		
Frequency Stability		Environment	(2) VL, VN and VH of Rated Voltage at Ambient Climate.		
		Test Setup	Test Setup 4		
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)		
		Test Mode	GSM/TM1;GSM/TM2;UMTS/TM1;		
			UMTS/TM2; LTE/TM1;LTE/TM2; LTE/TM3;		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconcrate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) isted and such sample(s) are relatined for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@ags.com

Member of the SGS Group (SGS SA)



Report No.: ZR/2020/8001701 Page: 25 of 28

5 Main Test Instruments

RE in Chamber							
Test Equipment	Manufacturer	Model No.	Inventory	Cal. date	Cal.Due date		
Test Equipment	Manufacturer	Model No.	No.	(yyyy-mm- dd)	(yyyy-mm- dd)		
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018/3/13	2021/3/12		
Spectrum Analyzer (20Hz-43GHz)	Rohde & Schwarz	FSU43	SEM004-08	2020/4/16	2021/4/15		
BiConiLog Antenna (26- 3000MHz)	ETS-Lindgren	3142C	SEM003-01	2020/6/27	2023/6/26		
Horn Antenna (800MHz- 18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018/413	2021/412		
Horn Antenna (15-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017/10/17	2020/10/16		
Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2020/7/14	2021/7/14		
Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA- 0118- 352810	SEM005-05	2020/7/14	2021/7/14		
Pre-Amplifier (0.1- 26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	EMC2063	2019/9/20	2020/9/19		
Pre-amplifier (26-40GHz)	Compliance Directions Systems Inc.	PAP-2640- 50	SEM005-08	2020/4/16	2021/4/15		
Band filter	N/A	N/A	N/A	N/A	N/A		
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A		
Coaxial Cable	SGS	N/A	SEM026-01	2020/6/12	2021/6/11		
Wideband Radio CommunicationTeste	Anristu	MT8821C	6201462742	2020/4/16	2021/4/15		
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2020/1/13	2021/1/2		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days on). Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck@ass.com



Report No.: ZR/2020/8001701 Page: 26 of 28

RF conducted test								
Test Equipment	Manufacturer	Model No.	Inventory	Cal. date	Cal.Due date			
•••			No.	(yyyy-mm- dd)	(yyyy-mm- dd)			
Dual Output Mobile Communication DC Source	Agilent Technologies Inc	66311B	W009-09	2019/10/22	2020/10/21			
Signal Analyzer	Rohde & Schwarz	FSV	W005-02	2020/4/16	2021/4/15			
Coaxial Cable	SGS	N/A	SEM031-01	2020/6/12	2021/6/11			
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A			
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2019/10/22	2020/10/21			
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	W006-17	2019/10/22	2020/10/21			
Temperature Chamber	GIANT FORCE	ICT-150- 40-CP-AR	W027-03	2019/10/22	2020/10/21			
Wideband Radio CommunicationTeste	Anristu	MT8821C	6201462742	2020/4/16	2021/4/15			
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2019/10/22	2020/10/21			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Cond



Report No.: ZR/2020/8001701 Page: 27 of 28

Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm- dd)	Cal. Due date (yyyy- mm-dd)
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018/3/13	2021/3/12
Wideband Radio CommunicationTeste	Anristu	MT8821C	6201462742	2020/4/16	2021/4/15
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2020/1/3	2021/1/2
EXA Signal Analyzer (10Hz- 26.5GHz)	Agilent Technologies Inc	N9010A	SEM004-09	2020/3/13	2021/3/12
Spectrum Analyzer (20Hz- 43GHz)	Rohde & Schwarz	FSU43	SEM004-08	2020/4/16	2021/4/15
BiConiLog Antenna (26- 3000MHz)	ETS-Lindgren	3142C	SEM003-01	2020/6/27	2023/6/26
Horn Antenna (800MHz-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018/4/13	2021/4/12
Horn Antenna (15-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017/10/17	2020/10/16
Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2020/7/25	2021/7/24
Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP- 0126	SEM004-11	2020/7/25	2021/7/24
Pre-amplifier (26-40GHz)	Compliance Directions Systems Inc.	PAP- 2640-50	SEM005-08	2020/4/16	2021/4/15
Band filter	N/A	N/A	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2020/6/12	2021/6/11
Tunable Notch Filter WRCD1700/2000-0.2/40-10EEK	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
Tunable Notch Filter WRCD800/960-0.2/40-10EEK	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
HighPass Filter WHK1.2/15G-10SS	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
HighPass Filter WHKX10-2700-3000-18000-40SS	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
HighPass Filter WHKX7.0/26.5G-6SS	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
Band Reject Filter WRCG 824/849-814/859-40/8SS	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
Band Reject Filter WRCG 1850/1910-1835/1925- 40/8SS	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
Measurement Software	AUDIX	e3 V8.2014- 6-27	N/A	N/A	N/A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation or liability, indemnification and urisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: (N.Doccheck@ess.com)



Report No.: ZR/2020/8001701 Page: 28 of 28

6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item	Extended Uncertainty	Data	
Transmit Output Power Data	Power [dBm]	U =±0.37 dB	
Bandwidth	Magnitude [%]	U =± 0.2%	
Band Edge Compliance	Disturbance Power [dBm]	U = ±2.0 dB	
Spurious Emissions, Conducted	Disturbance Power [dBm]	$U = \pm 2.0 \text{ dB}$	
	ERP[dBm]/EIRP [dBm]	For 3 m Chamber:	
Field Strength of Spurious Radiation		U = ±4.5 dB (30 MHz to 1GHz)	
		$U = \pm 3.3 \text{ dB}$ (above 1 GHz)	
		For 10 m Chamber:	
		U = ±4.5 dB (30 MHz to 1GHz)	
		$U = \pm 3.2 \text{ dB}$ (above 1 GHz)	
Frequency Stability	Frequency Accuracy [ppm]	U = ±0.24 ppm	

7 Appendixes

Appendix A	Photographs of Set-Up for ZR/2020/80017	
Appendix B.1	GSM 850 & 1900	
Appendix B.2	WCDMA Band II & IV & V	
Appendix B.3	LTE Band 2	
Appendix B.4	LTE Band 4	
Appendix B.5	LTE Band 5	
Appendix B.6	LTE Band 7	
Appendix B.7	LTE Band 38	
Appendix B.8	LTE Band 41	

The End



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification on the sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, recommit.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国 •深圳 • 科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com