



TEST REPORT

No. I21Z62218-WMD02

for

vivo Mobile Communication Co., Ltd.

Mobile Phone

Model Name: V2127

FCC ID: 2AUCY-V2127V

with

Hardware Version: MP_0.1

Software Version: PD2166EF_EX_A_3.6.0

Issued Date: 2022-02-18

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I21Z62218-WMD02	Rev.0	1 st edition	2022-02-18

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY.....	4
1.1. INTRODUCTION & ACCREDITATION.....	4
1.2. TESTING LOCATION.....	4
1.3. TESTING ENVIRONMENT.....	5
1.4. PROJECT DATA.....	5
1.5. SIGNATURE.....	5
2. CLIENT INFORMATION.....	6
2.1. APPLICANT INFORMATION.....	6
2.2. MANUFACTURER INFORMATION.....	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	7
3.1. ABOUT EUT.....	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
4. REFERENCE DOCUMENTS.....	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT.....	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULT.....	10
7. TEST EQUIPMENT UTILIZED.....	12
ANNEX A: MEASUREMENT RESULTS.....	13
A.1 OUTPUT POWER.....	13
A.2 EMISSION LIMIT.....	20
A.3 FREQUENCY STABILITY.....	28
A.4 OCCUPIED BANDWIDTH.....	31
A.5 EMISSION BANDWIDTH.....	44
A.6 BAND EDGE COMPLIANCE.....	57
A.7 CONDUCTED SPURIOUS EMISSION.....	61
A.8 PEAK-TO-AVERAGE POWER RATIO.....	68
ANNEX B: ACCREDITATION CERTIFICATE.....	69



1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0 and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Location 1: CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P.R. China 100191

Location 2: CTTL (BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology Development
Area, Beijing, P. R. China 100176

1.3. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.4. Project Data

Testing Start Date: 2021-11-15
Testing End Date: 2022-02-10

1.5. Signature



Dong Yuan
(Prepared this test report)



Zhou Yu
(Reviewed this test report)



Zhao Hui Lin
Deputy Director of the laboratory
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: vivo Mobile Communication Co., Ltd.
Address /Post: No.1, vivo Road, Chang'an, Dongguan, Guangdong, China
Contact: xiangjianfeng
Email: xiangjianfeng@vivo.com
Telephone: 18823710059

2.2. Manufacturer Information

Company Name: vivo Mobile Communication Co., Ltd.
Address /Post: No.1, vivo Road, Chang'an, Dongguan, Guangdong, China
Contact: xiangjianfeng
Email: xiangjianfeng@vivo.com
Telephone: 18823710059

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Mobile Phone
Model Name	V2127
FCC ID	2AUCY-V2127V
Antenna	Embedded
Output power	21.31Bm maximum EIRP measured for WCDMA Band II
Extreme vol. Limits	3.6VDC to 4.45VDC (nominal: 3.87VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Date of receipt
UT02a	861904059966409/ 861904059966417	MP_0.1	PD2166EF_EX_A_3.6.0	2021-12-07

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery

AE1

Model	B-T6
Manufacturer	Dongguan NVT Technology Co.,Ltd
Capacitance	5000mAh

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Documents supplied by applicant

EUT parameters are supplied by the client or manufacturer, which are the bases of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-20 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-20 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-20 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01

5. Laboratory Environment

Fully-anechoic chamber FAC-3 (9 meters × 6.5 meters × 4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 M
Ground system resistance	< 1
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

6. Summary Of Test Result

WCDMA Band II

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	24.232	BR
2	Emission Limit	2.1051/24.238	P
3	Frequency Stability	2.1055	BR
4	Occupied Bandwidth	2.1049	BR
5	Emission Bandwidth	24.238	BR
6	Band Edge Compliance	24.238	BR
7	Conducted Spurious Emission	24.238	BR
8	Peak-to-Average Power Ratio	24.232	BR

WCDMA Band V

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	22.913	BR
2	Emission Limit	2.1051/22.917	BR
3	Frequency Stability	2.1055	BR
4	Occupied Bandwidth	2.1049	BR
5	Emission Bandwidth	22.917	BR
6	Band Edge Compliance	22.917	BR
7	Conducted Spurious Emission	22.917	BR

WCDMA Band IV

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	BR
2	Emission Limit	2.1051/27.53	BR
3	Frequency Stability	2.1055	BR
4	Occupied Bandwidth	2.1049	BR
5	Emission Bandwidth	27.53	BR
6	Band Edge Compliance	27.53	BR
7	Conducted Spurious Emission	27.53	BR
8	Peak-to-Average Power Ratio	27.50	BR

Terms used in Verdict column

P	Pass. The EUT complies with the essential requirements in the standard.
NP	Not Performed. The test was not performed by CTTL.
NA	Not Applicable. The test was not applicable.
BR	Re-use test data from basic model report.
F	Fail. The EUT does not comply with the essential requirements in the standard.

All the test results are based on normal power.

ANT13 supports Band II, Band IV, Band V.

ANT31 supports Band II, Band IV.

ANT41 supports Band V.

The product supports two antennas, but only one antenna is working when operating. Two antennas transmit separately.

Explanation of worst-case configuration

The worst-case scenario for all measurements is based on the conducted output power measurement investigation results. Output power is tested for each antenna. The other test cases only test the antenna with the worst value on output power, which are Band II-ANT13, Band IV-ANT13, Band V-ANT41. Output power was measured on QPSK and 16QAM modulations. It was found that QPSK was the worst case. All testing was performed using QPSK modulations to represent the worst case unless otherwise stated. The test results shown in the following sections represent the worst case emission.

The Equipment Under Test (EUT) model V2127 (FCC ID: 2AUCY-V2127V) is a variant product of V2127 (FCC ID: 2AUCY-V2127), according to the declaration of changes provided by the applicant and FCC KDB publication 484596 D01, spot check measurements were performed on this device, other test results are derived from test report No. I21Z62219-WMD02. Please refer Annex A for detail spot check verification data and reference data. The spot check test results are consistent with basic model.

For detail differences between two models please refer the Declaration of Changes document.

7. Test Equipment Utilized

Description	Type	Series Number	Manufacture	Cal Due Date	Calibration Interval
Universal Radio Communication Tester	CMU200	108646	R&S	2023-01-17	25 months
Spectrum Analyzer	FSU	200030	R&S	2022-06-02	1 year
Climate chamber	SH-242	93008556	ESPEC	2023-12-23	3 years
Wireless Communication Test Set	E5515E	MY53211012	Agilent	2022-08-01	1 year
Test Receiver	E4440A	MY48250642	Agilent	2022-03-04	1 year
Universal Radio Communication Tester	CMW500	143008	R&S	2022-12-01	1 year
EMI Antenna	VULB9163	9163-235	Schwarzbeck	2022-04-07	1 year
Signal Generator	N5183A	MY49060052	Agilent	2022-07-11	1 year
EMI Antenna	3117	00058889	ETS-Lindgren	2022-11-07	1 year
EMI Antenna	LB-7180-NF	2030013000041	A-INFO	2022-02-28	1 year

Note: The Universal Radio Communication Tester CMW500 (SN:143008) was used from 2021.12.25 to 2021.12.31.

Annex A: Measurement Results

A.1 Output Power

A.1.1 Summary

During the process of testing, the EUT was controlled via communication tester to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The testing follows ANSI C63.26 Section 5.2

The transmitter output port was connected to the system simulator. Set EUT at maximum power through the system simulator. These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth and different modulation. Measure and record the power level from the system simulator.

A.1.2.2 Measurement Result

WCDMA Band II-ANT13

QPSK

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band II)	9262	1852.4	22.02
	9400	1880.0	22.30
	9538	1907.6	22.08

16QAM

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band II)	9262	1852.4	20.51
	9400	1880.0	20.73
	9538	1907.6	20.55

WCDMA Band II-ANT31

QPSK

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band II)	9262	1852.4	21.74
	9400	1880.0	21.95
	9538	1907.6	21.71

16QAM

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band II)	9262	1852.4	19.72
	9400	1880.0	19.88
	9538	1907.6	19.58

WCDMA Band V-ANT13
QPSK

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band V)	4132	826.4	23.55
	4183	836.6	23.49
	4233	846.6	23.37

16QAM

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band V)	4132	826.4	21.96
	4183	836.6	21.86
	4233	846.6	21.68

WCDMA Band V-ANT41
QPSK

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band V)	4132	826.4	23.66
	4183	836.6	23.56
	4233	846.6	23.45

16QAM

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band V)	4132	826.4	21.78
	4183	836.6	21.70
	4233	846.6	21.62

WCDMA Band IV-ANT13
QPSK

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band IV)	1312	1712.4	22.98
	1412	1732.4	22.85
	1513	1752.6	22.88

16QAM

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band IV)	1312	1712.4	21.19
	1412	1732.4	21.20
	1513	1752.6	21.07

WCDMA Band IV-ANT31
QPSK

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band IV)	1312	1712.4	20.89
	1412	1732.4	20.79
	1513	1752.6	20.90

16QAM

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band IV)	1312	1712.4	18.91
	1412	1732.4	18.96
	1513	1752.6	18.94

A.1.3 Radiated

A.1.3.1 Description

This is the test for the maximum radiated power from the EUT.

Band V: Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts".

Band II: Part 24.232(c) specifies "Mobile and portable stations are limited to 2 watts EIRP".

Band IV: Part 27.50(d) specifies "Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band and mobile and portable stations operating in the 1695–1710 MHz and 1755–1780 MHz bands are limited to 1 watt EIRP".

A.1.3.2 Method of Measurement

ANSI C63.26 chapter 5.2.5.5: when working in decibels (i.e., logarithmic scale), the ERP and EIRP represent the sum of the transmit antenna gain (in dBd or dBi, respectively) and the conducted RF output power (expressed in dB relative to watts or milliwatts).

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation (1) as follows:

$$\text{ERP or EIRP} = P_{\text{Mea}} + G_{\text{T}}$$

Where

ERP or EIRP	effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Mea} , e.g., dBm or dBW)
P_{Mea}	measured transmitter output power or PSD, in dBm or dBW
G_{T}	gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

WCDMA Band II-ANT13
QPSK

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) $G_T = -1.83\text{dBi}$
1852.4	22.02	20.19
1880.0	22.30	20.47
1907.6	22.08	20.25

16QAM

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) $G_T = -1.83\text{dBi}$
1852.4	20.51	18.68
1880.0	20.73	18.90
1907.6	20.55	18.72

WCDMA Band II-ANT31
QPSK

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) $G_T = -0.64\text{dBi}$
1852.4	21.74	21.10
1880.0	21.95	21.31
1907.6	21.71	21.07

16QAM

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) $G_T = -0.64\text{dBi}$
1852.4	19.72	19.08
1880.0	19.88	19.24
1907.6	19.58	18.94

WCDMA Band V-ANT13
QPSK

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) $G_T = -4.49\text{dBi}$
826.4	23.55	16.91
836.6	23.49	16.85
846.6	23.37	16.73

16QAM

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) $G_T = -4.49\text{dBi}$
826.4	21.96	15.32
836.6	21.86	15.22
846.6	21.68	15.04

WCDMA Band V-ANT41
QPSK

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) $G_T = -4.92\text{dBi}$
826.4	23.66	16.59
836.6	23.56	16.49
846.6	23.45	16.38

16QAM

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) $G_T = -4.92\text{dBi}$
826.4	21.78	14.71
836.6	21.70	14.63
846.6	21.62	14.55

WCDMA Band IV-ANT13
QPSK

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) $G_T = -3.06\text{dBi}$
1712.4	22.98	19.92
1732.4	22.85	19.79
1752.6	22.88	19.82

16QAM

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) $G_T = -3.06\text{dBi}$
1712.4	21.19	18.13
1732.4	21.20	18.14
1752.6	21.07	18.01

WCDMA Band IV-ANT31
QPSK

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) $G_T = -0.06\text{dBi}$
1712.4	20.89	20.83
1732.4	20.79	20.73
1752.6	20.90	20.84

16QAM

Frequency (MHz)	Conducted output power (dBm)	Radiated output power (dBm) $G_T = -0.06\text{dBi}$
1712.4	18.91	18.85
1732.4	18.96	18.90
1752.6	18.94	18.88

A.2 Emission Limit


A.2.1 Measurement Method


The measurements procedures in C63.26 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238, Part 22.917, Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II, WCDMA Band V and WCDMA Band IV.

The procedure of radiated spurious emissions is as follows:

Using the test configuration as follow, measure the radiated emissions directly from the EUT and convert the measured field strength or received power to ERP or EIRP, as required, for comparison to the applicable limits.

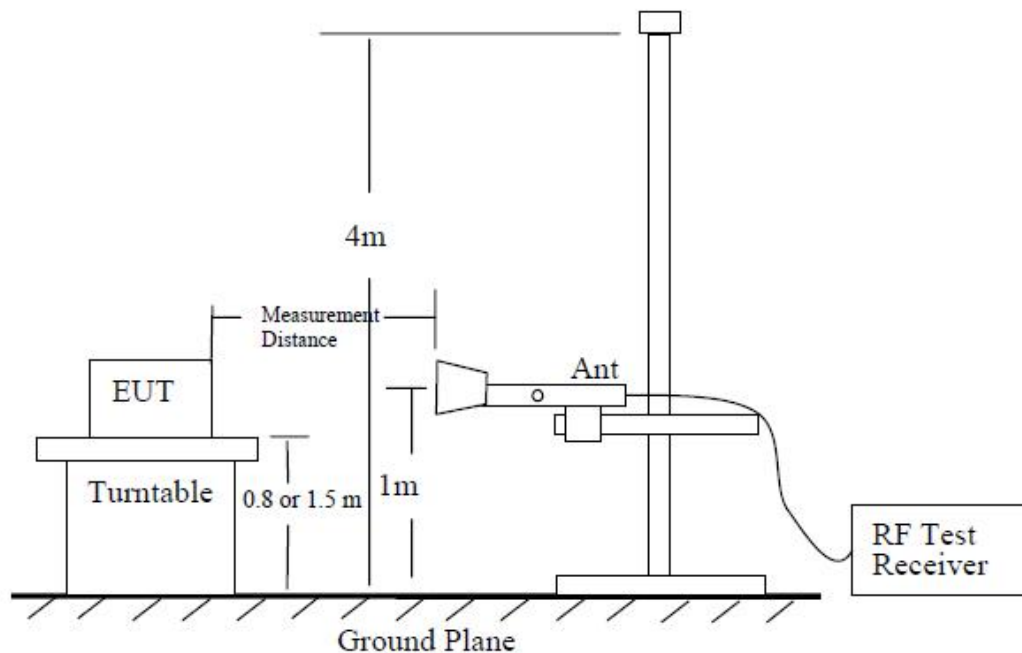

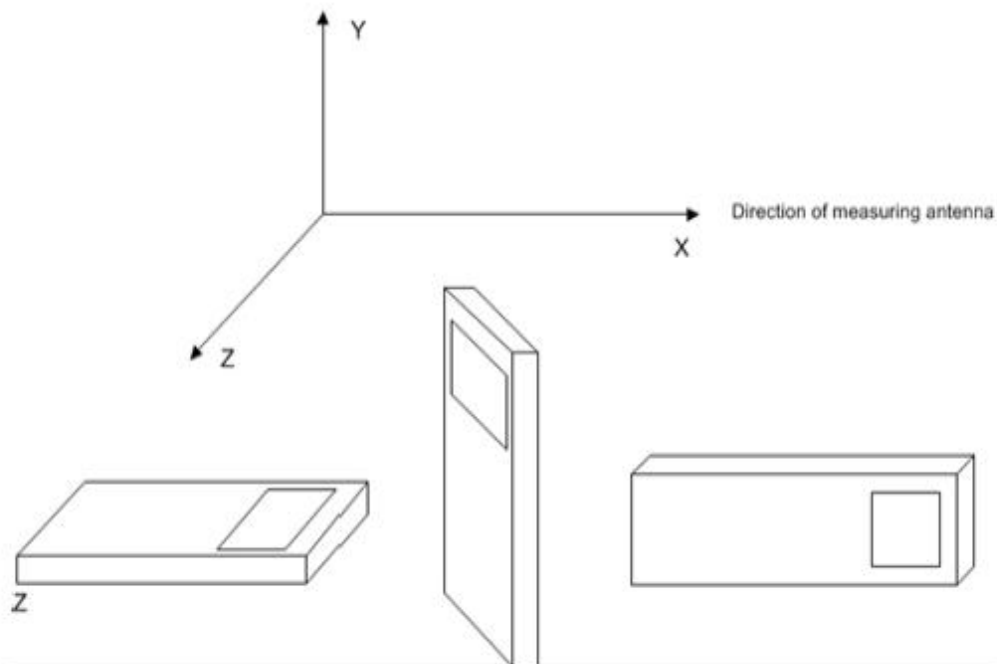

The emission characteristics of the EUT can be identified from the pre-scan measurement information.

Exploratory radiated measurements (pre-scans) may be performed to determine the general EUT radiated emissions characteristics and, when necessary, the EUT-to-measurement antenna orientation that produces the maximum emission amplitude. Pre-scans shall only be used to determine the emission frequencies (i.e., not amplitude levels). The information garnered from a pre-scan can then be used to perform final compliance measurements using either the substitution or direct field strength method.

For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table or support at a nominal height of 80 cm above the reference ground plane. Radiated measurements shall be made with the measurement antenna positioned in both horizontal and vertical polarization. The measurement antenna shall be varied from 1 m to 4 m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level (i.e., field strength or received power). When orienting the measurement antenna in vertical polarization, the minimum height of the lowest element of the antenna shall clear the site reference ground plane by at least 25 cm.

The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table or support at a nominal height of 1.5 m above the ground plane. When maximizing the emissions from the EUT for measurement, the EUT and its transmitting antenna(s) shall be rotated through 360°. For each mode of operation to be tested, the frequency spectrum (based on findings from exploratory measurements) shall be monitored. Final measurements shall be performed for the worst case combination(s) of variable technical parameters that result in the maximum measured emission amplitude, record the frequency and amplitude of the highest fundamental emission (if applicable), and the frequency and amplitude data for the six highest-amplitude spurious emissions.

A.2.2 Measurement Limit

Band V: Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

Band II: 24.238 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

Band IV: 27.53(m) specify that “For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.”

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz), WCDMA Band V (826.4MHz, 836.6MHz and 846.6MHz) and WCDMA Band IV (1712.4MHz, 1732.4MHz and 1752.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II, WCDMA Band V and WCDMA Band IV into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band V	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
WCDMA Band II	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass
WCDMA Band IV	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
WCDMA Band V	0.03~1	100kHz	300kHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
WCDMA Band II	0.03~1	100kHz	300kHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
18~20	1 MHz	3 MHz	2	
WCDMA Band IV	0.03~1	100kHz	300kHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

Measurement Results:
Spot Check Measurement Results:
WCDMA BAND II Mode Channel 9262/1852.4MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3729.02	-60.69	-6.36	8.52	-58.53	-13.00	45.53	H
5560.02	-57.13	-7.19	10.59	-53.73	-13.00	40.73	V
7426.01	-54.41	-8.19	12.11	-50.49	-13.00	37.49	H
9254.01	-52.89	-9.05	13.25	-48.69	-13.00	35.69	H
11099.01	-50.67	-9.84	13.18	-47.33	-13.00	34.33	H
12956.01	-47.82	-10.48	13.47	-44.83	-13.00	31.83	H

WCDMA BAND II Mode Channel 9400/1880MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3750.02	-59.47	-6.29	8.55	-57.21	-13.00	44.21	H
5645.02	-58.57	-7.27	10.57	-55.27	-13.00	42.27	V
7519.01	-54.91	-8.31	12.22	-51.00	-13.00	38.00	H
9396.01	-53.94	-9.04	13.34	-49.64	-13.00	36.64	V
11269.01	-51.30	-9.81	13.15	-47.96	-13.00	34.96	H
13166.01	-45.68	-10.65	13.73	-42.60	-13.00	29.60	V

WCDMA BAND II Mode Channel 9538/1907.6MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3801.02	-60.94	-6.14	8.62	-58.46	-13.00	45.46	H
5753.02	-59.03	-7.26	10.55	-55.74	-13.00	42.74	V
7621.01	-55.27	-8.07	12.30	-51.04	-13.00	38.04	H
9532.01	-53.50	-9.43	13.37	-49.56	-13.00	36.56	V
11452.01	-50.93	-9.93	13.11	-47.75	-13.00	34.75	V
13387.01	-44.16	-10.57	14.04	-40.69	-13.00	27.69	V

Reference Measurement Results from basic model:
WCDMA BAND II Mode Channel 9262/1852.4MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3714.02	-60.86	-6.39	8.50	-58.75	-13.00	45.75	V
5567.02	-59.03	-7.20	10.59	-55.64	-13.00	42.64	H
7420.01	-55.01	-8.17	12.10	-51.08	-13.00	38.08	H
9276.01	-53.83	-9.10	13.27	-49.66	-13.00	36.66	H
11120.01	-50.89	-9.75	13.18	-47.46	-13.00	34.46	H
12971.01	-47.22	-10.48	13.48	-44.22	-13.00	31.22	H

WCDMA BAND II Mode Channel 9400/1880MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3750.02	-59.52	-6.29	8.55	-57.26	-13.00	44.26	H
5636.02	-58.06	-7.27	10.57	-54.76	-13.00	41.76	V
7530.01	-53.66	-8.27	12.22	-49.71	-13.00	36.71	H
9386.01	-53.96	-9.05	13.33	-49.68	-13.00	36.68	V
11288.01	-49.57	-9.92	13.14	-46.35	-13.00	33.35	V
13156.01	-45.66	-10.69	13.72	-42.63	-13.00	29.63	H

WCDMA BAND II Mode Channel 9538/1907.6MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3802.02	-60.49	-6.13	8.62	-58.00	-13.00	45.00	H
5721.02	-59.04	-7.30	10.56	-55.78	-13.00	42.78	H
7640.01	-55.25	-8.15	12.31	-51.09	-13.00	38.09	H
9551.01	-53.13	-9.36	13.35	-49.14	-13.00	36.14	V
11482.01	-50.70	-9.86	13.10	-47.46	-13.00	34.46	H
13370.01	-45.39	-10.57	14.02	-41.94	-13.00	28.94	H

WCDMA BAND V Mode Channel 4132/826.4MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1630.01	-55.88	-3.55	5.27	2.15	-56.31	-13.00	43.31	V
2457.00	-39.76	-4.58	5.97	2.15	-40.52	-13.00	27.52	V
3312.02	-59.99	-5.29	7.75	2.15	-59.68	-13.00	46.68	V
4125.02	-56.99	-6.04	9.03	2.15	-56.15	-13.00	43.15	V
4951.01	-56.79	-6.69	9.85	2.15	-55.78	-13.00	42.78	H
5762.01	-56.35	-7.25	10.55	2.15	-55.20	-13.00	42.20	H

WCDMA BAND V Mode Channel 4183/836.6MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1680.01	-55.20	-3.59	5.18	2.15	-55.76	-13.00	42.76	V
2517.00	-47.66	-4.64	6.13	2.15	-48.32	-13.00	35.32	V
3346.02	-60.41	-5.31	7.83	2.15	-60.04	-13.00	47.04	V
4167.02	-57.65	-6.13	9.07	2.15	-56.86	-13.00	43.86	H
5016.01	-56.44	-6.58	9.92	2.15	-55.25	-13.00	42.25	H
5850.01	-57.00	-7.23	10.53	2.15	-55.85	-13.00	42.85	H

WCDMA BAND V Mode Channel 4233/846.6MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1716.01	-53.66	-3.61	5.11	2.15	-54.31	-13.00	41.31	H
2558.00	-46.50	-4.67	6.20	2.15	-47.12	-13.00	34.12	H
3408.02	-60.03	-5.37	7.98	2.15	-59.57	-13.00	46.57	V
4237.02	-57.97	-6.25	9.14	2.15	-57.23	-13.00	44.23	V
5098.01	-55.58	-6.77	10.04	2.15	-54.46	-13.00	41.46	H
5945.01	-56.00	-7.47	10.51	2.15	-55.11	-13.00	42.11	H

WCDMA BAND IV Mode Channel 1312/1712.4MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3427.02	-72.26	-5.39	8.02	-69.63	-13.00	56.63	V
5138.02	-69.03	-6.86	10.09	-65.80	-13.00	52.80	H
6867.01	-65.04	-7.80	11.44	-61.40	-13.00	48.40	H
8576.01	-65.08	-8.54	13.02	-60.60	-13.00	47.60	H
10273.01	-62.93	-9.55	13.01	-59.47	-13.00	46.47	V
11970.01	-60.04	-10.19	13.01	-57.22	-13.00	44.22	H

WCDMA BAND IV Mode Channel 1412/1732.4MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3463.02	-71.42	-5.45	8.11	-68.76	-13.00	55.76	V
5200.02	-69.46	-6.96	10.18	-66.24	-13.00	53.24	V
6979.01	-66.01	-8.14	11.57	-62.58	-13.00	49.58	V
8717.01	-65.20	-8.41	13.04	-60.57	-13.00	47.57	V
10457.01	-62.84	-9.72	13.08	-59.48	-13.00	46.48	H
12174.01	-60.02	-10.13	13.07	-57.08	-13.00	44.08	H

WCDMA BAND IV Mode Channel 1513/1752.6MHz

Frequency (MHz)	P _{Mea} (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3504.02	-71.81	-5.53	8.21	-69.13	-13.00	56.13	V
5260.02	-69.56	-7.00	10.26	-66.30	-13.00	53.30	V
7003.01	-65.64	-8.29	11.60	-62.33	-13.00	49.33	V
8757.01	-64.62	-8.53	13.05	-60.10	-13.00	47.10	V
10508.01	-62.55	-9.62	13.10	-59.07	-13.00	46.07	V
12288.01	-60.16	-10.00	13.12	-57.04	-13.00	44.04	H

Sample: 3504.02 MHz

$$\text{Power (EIRP)} = P_{\text{Mea}} + P_{\text{pl}} + G_{\text{a}}$$

$$\text{Power (-68.54dBm)} = P_{\text{Mea}} (-71.81 \text{ dBm}) + P_{\text{pl}} (-5.53\text{dB}) + G_{\text{a}}(8.21\text{dBi})$$

Note: Expanded measurement uncertainty is $U = 5.16 \text{ dB}$, $k = 2$.

Note: The measurement results showed here are worst cases

A.3 Frequency Stability

A.3.1 Method of Measurement

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage. Two reference points are established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channel of operation shall be identified as F_L and F_H respectively.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of CMU200.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of each band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of the lower, higher and nominal voltage. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

A.3.2 Measurement results

WCDMA Band II QPSK

Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F _L (MHz)	F _H (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.87	1850.128	1909.848		
50				13.49	0.0072
40				9.93	0.0053
30				9.75	0.0052
10				13.03	0.0069
0				13.63	0.0073
-10				14.07	0.0075
-20				15.12	0.0080
-30				13.63	0.0073

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F _L (MHz)	F _H (MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	1850.128	1909.848	10.64	0.0057
4.45				14.18	0.0075

WCDMA Band V QPSK

Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F _L (MHz)	F _H (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.87	824.136	848.864		
50				5.45	0.0065
40				0.47	0.0006
30				0.15	0.0002
10				-0.69	0.0008
0				6.93	0.0083
-10				0.29	0.0003
-20				5.91	0.0071
-30				9.19	0.0110

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F _L (MHz)	F _H (MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	824.136	848.864	0.43	0.0005
4.45				7.49	0.0090

WCDMA Band IV QPSK
Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F _L (MHz)	F _H (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.87	1710.144	1754.856		
50				11.03	0.0064
40				11.40	0.0066
30				10.10	0.0058
10				10.28	0.0059
0				11.18	0.0065
-10				13.14	0.0076
-20				1.89	0.0011
-30				8.38	0.0048

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F _L (MHz)	F _H (MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	1710.144	1754.856	10.51	0.0061
4.45				11.06	0.0064

A.4 Occupied Bandwidth

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequency. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from ANSI C63.26:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts.
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) Set the detection mode to peak, and the trace mode to max-hold.

WCDMA Band II (99%)-QPSK

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
1852.4	4150.64
1880.0	4166.67
1907.6	4166.67


WCDMA Band II (99%)

Channel 9262-Occupied Bandwidth (99% BW)

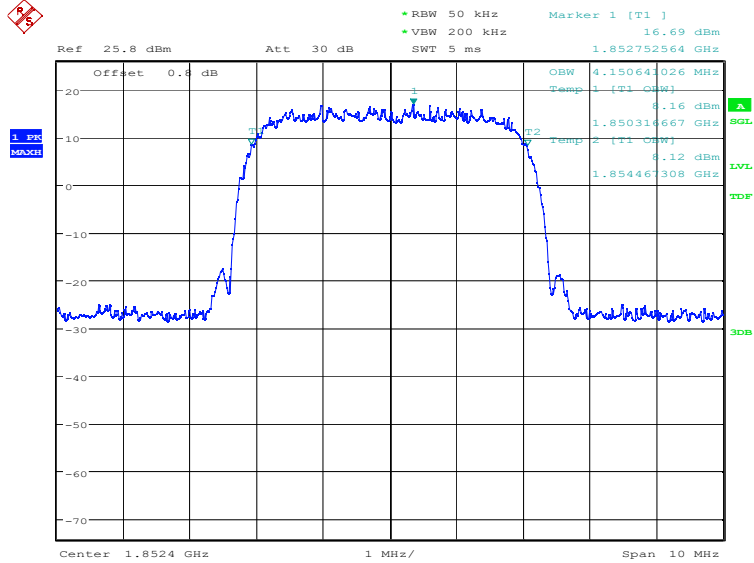


Date: 8.DEC.2021 20:41:46

Channel 9400-Occupied Bandwidth (99% BW)

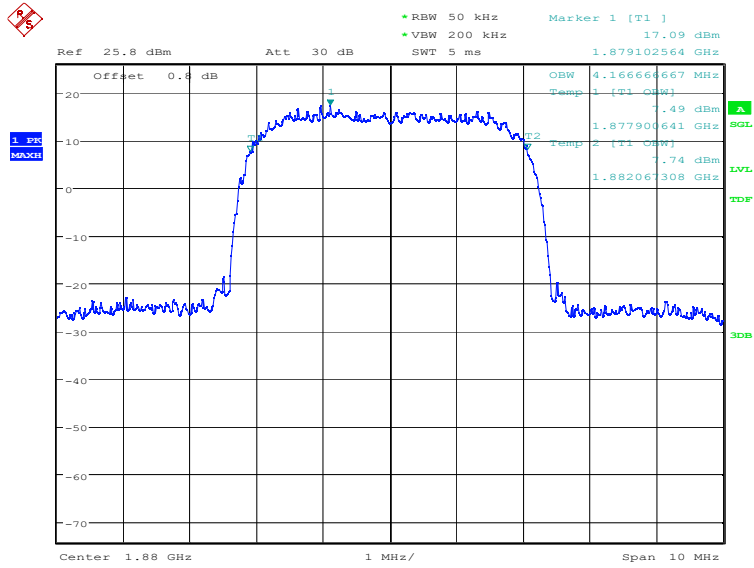

Date: 8.DEC.2021 20:42:13

Channel 9538-Occupied Bandwidth (99% BW)

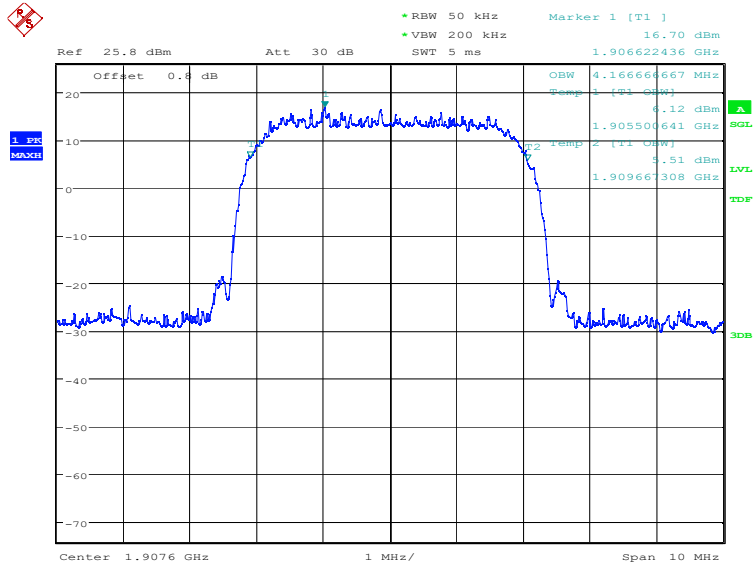


Date: 8.DEC.2021 20:42:40

WCDMA Band II (99%)-16QAM

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
1852.4	4150.64
1880.0	4134.62
1907.6	4166.67


WCDMA Band II (99%)

Channel 9262-Occupied Bandwidth (99% BW)

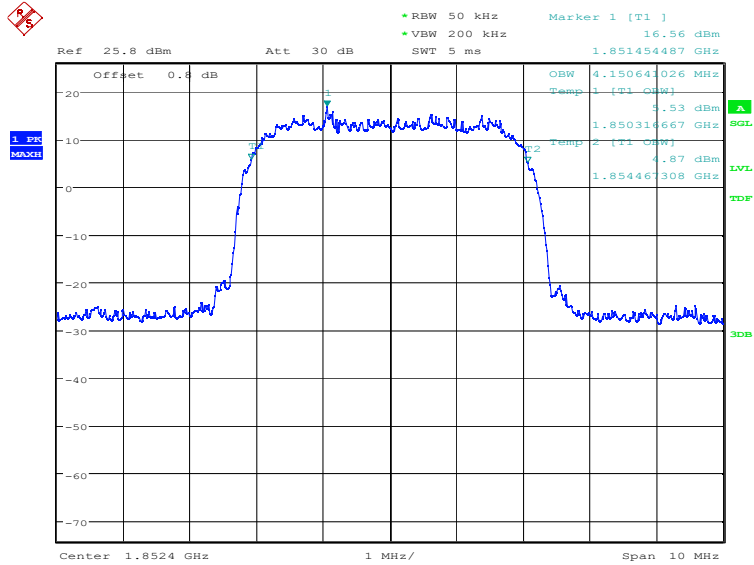


Date: 8.DEC.2021 21:13:21

Channel 9400-Occupied Bandwidth (99% BW)

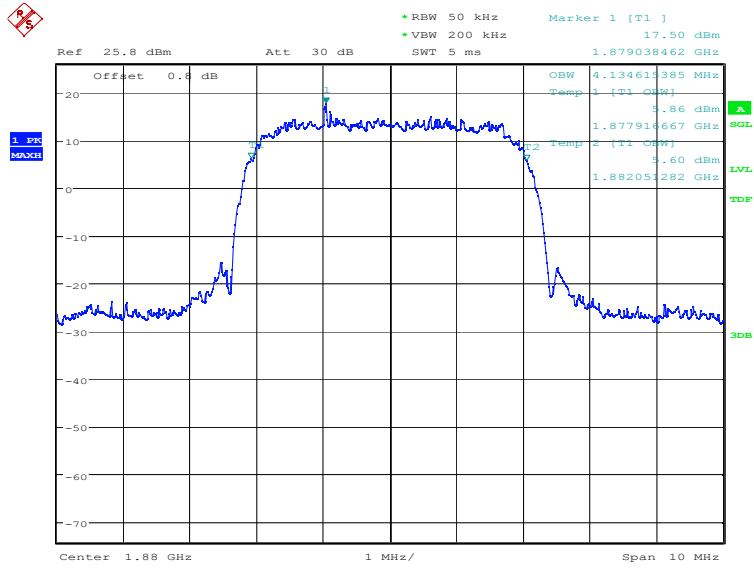

Date: 8.DEC.2021 21:13:48

Channel 9538-Occupied Bandwidth (99% BW)

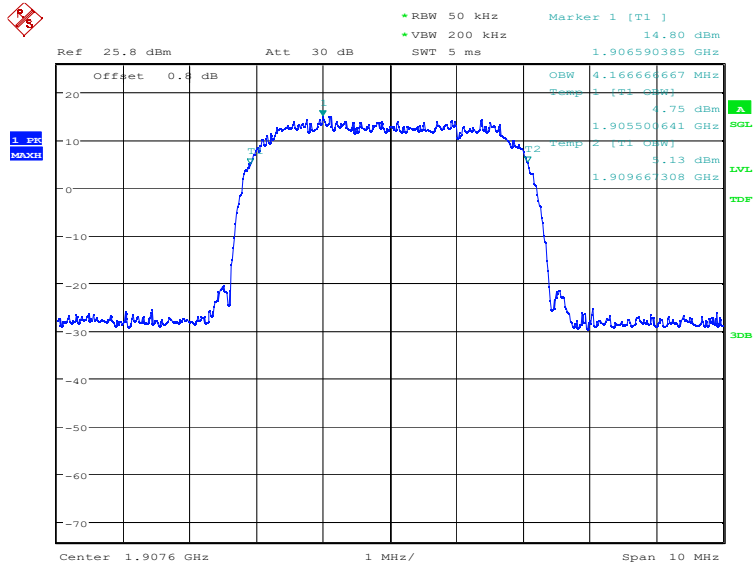


Date: 8.DEC.2021 21:14:15

WCDMA Band V (99%)-QPSK

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
826.4	4134.62
836.6	4134.62
846.6	4166.67


WCDMA Band V (99%)

Channel 4132-Occupied Bandwidth (99% BW)

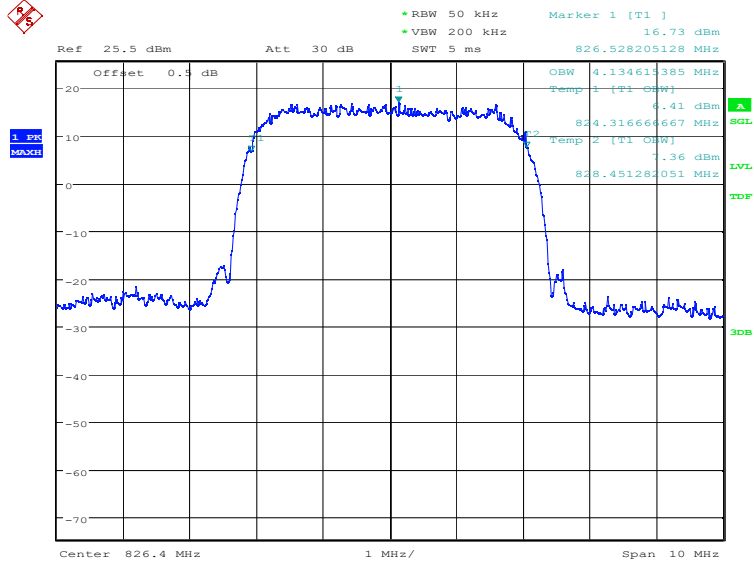


Date: 8.DEC.2021 20:45:51

Channel 4183-Occupied Bandwidth (99% BW)

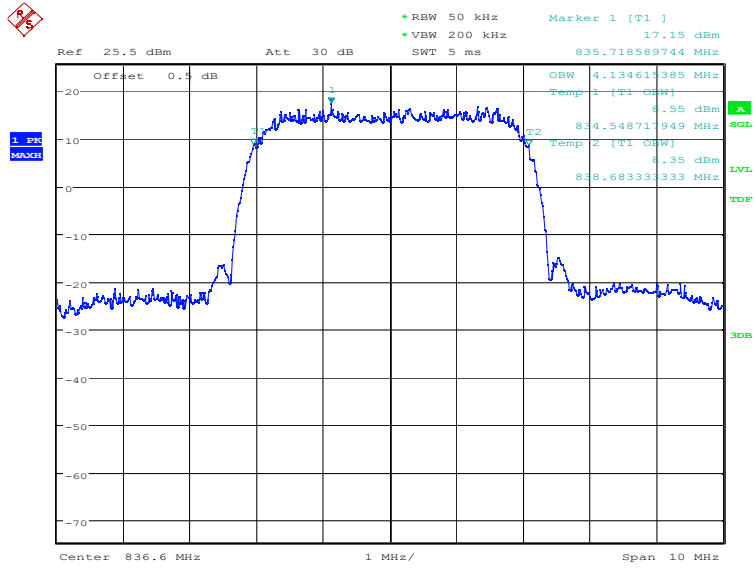

Date: 8.DEC.2021 20:46:18

Channel 4233-Occupied Bandwidth (99% BW)

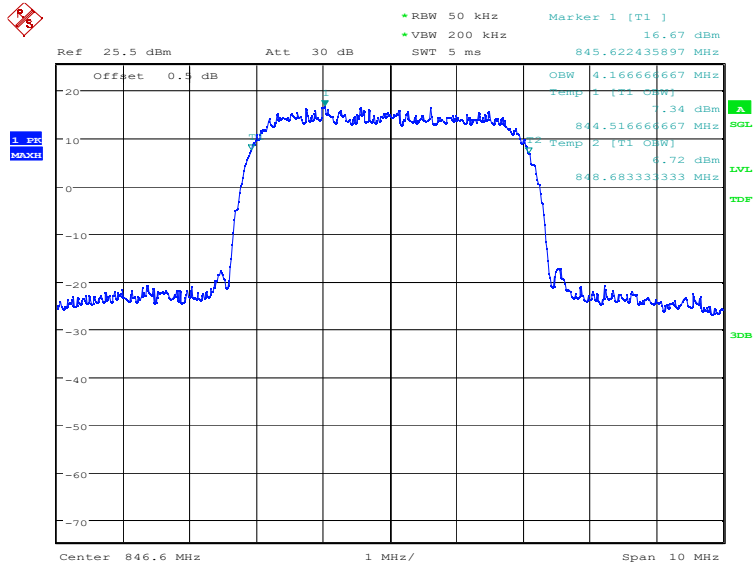


Date: 8.DEC.2021 20:46:45

WCDMA Band V (99%)-16QAM

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
826.4	4134.62
836.6	4166.67
846.6	4182.69


WCDMA Band V (99%)

Channel 4132-Occupied Bandwidth (99% BW)

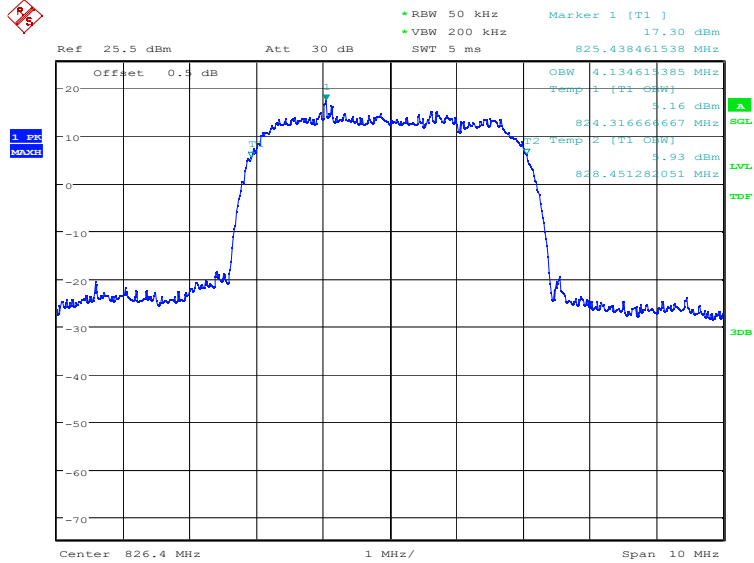


Date: 8.DEC.2021 21:17:50

Channel 4183-Occupied Bandwidth (99% BW)

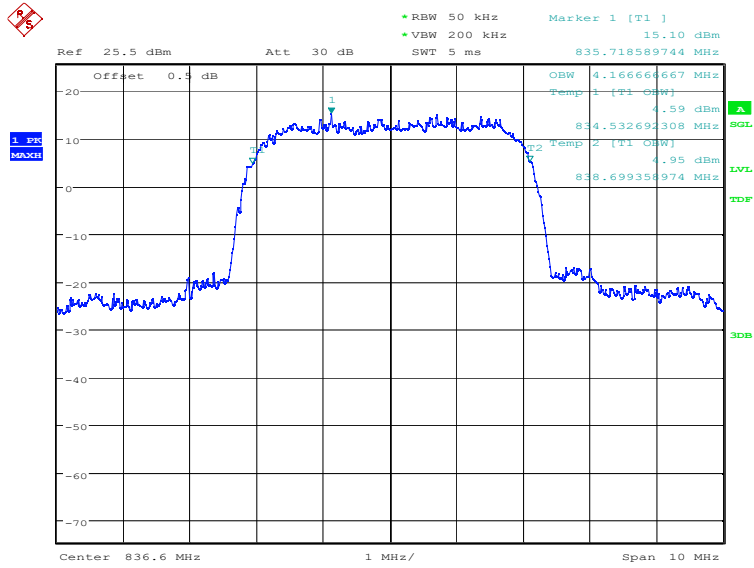

Date: 8.DEC.2021 21:18:17

Channel 4233-Occupied Bandwidth (99% BW)

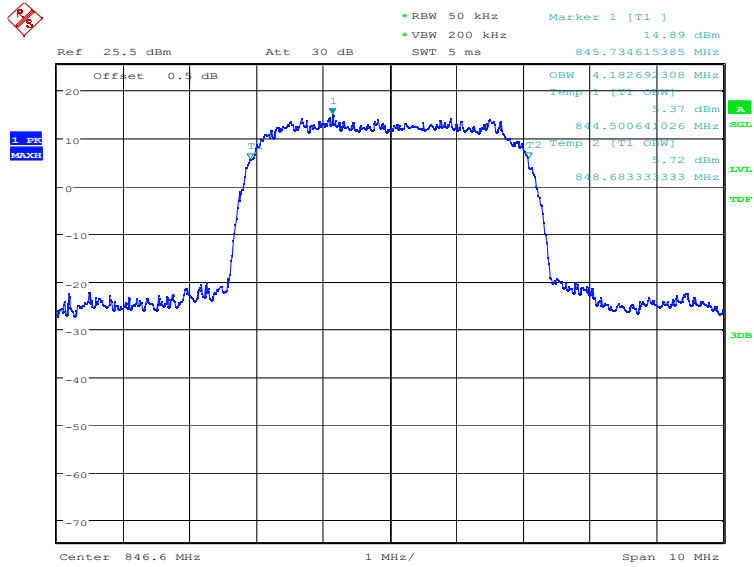


Date: 8.DEC.2021 21:18:44

WCDMA Band IV (99%)-QPSK

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
1712.4	4150.64
1732.4	4166.67
1752.6	4166.67


WCDMA Band IV (99%)

Channel 1312-Occupied Bandwidth (99% BW)

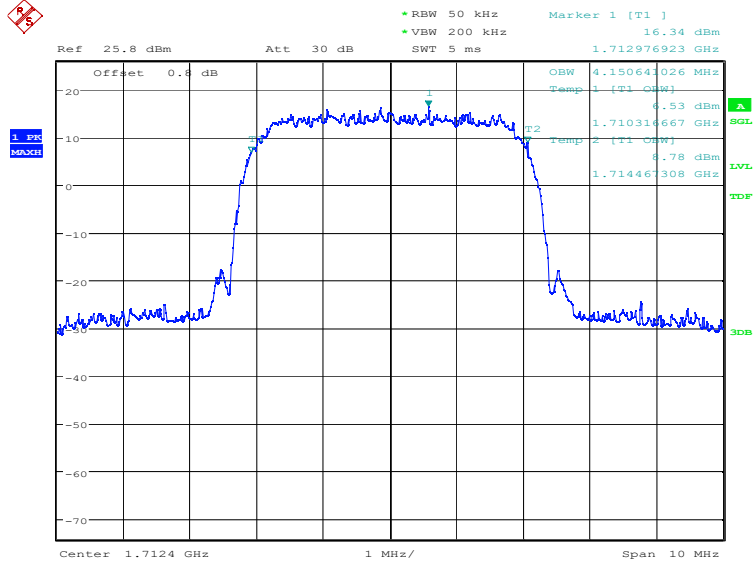


Date: 8.DEC.2021 20:43:47

Channel 1412-Occupied Bandwidth (99% BW)

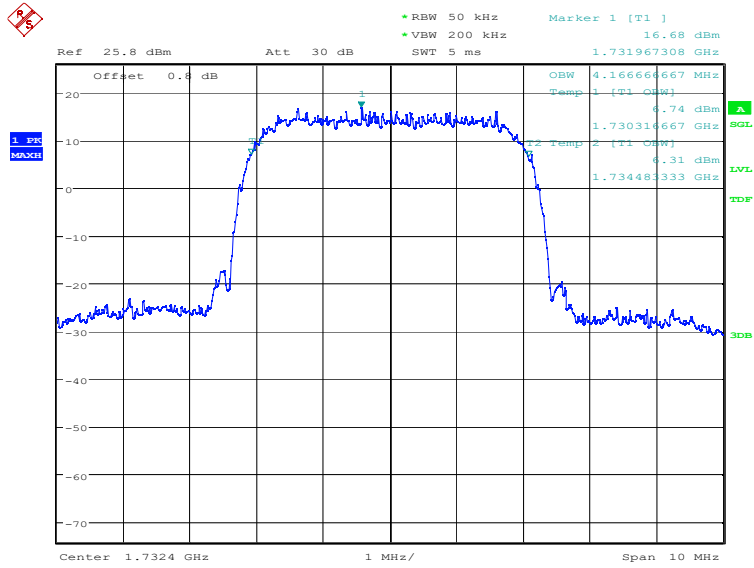

Date: 8.DEC.2021 20:44:14

Channel 1513-Occupied Bandwidth (99% BW)

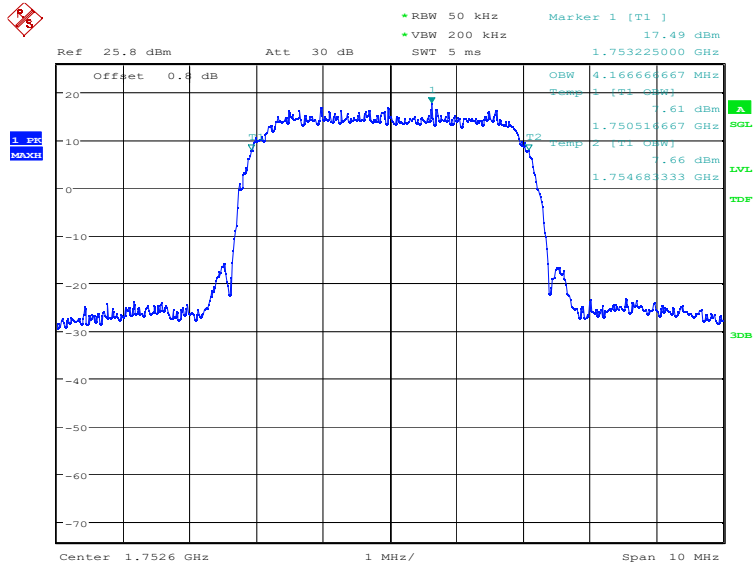


Date: 8.DEC.2021 20:44:42

WCDMA Band IV (99%)-16QAM

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
1712.4	4166.67
1732.4	4166.67
1752.6	4166.67


WCDMA Band IV (99%)

Channel 1312-Occupied Bandwidth (99% BW)

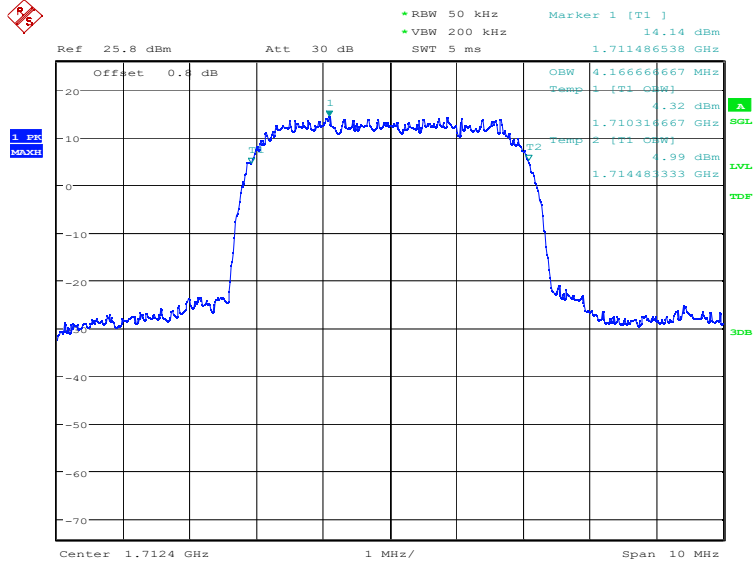


Date: 8.DEC.2021 21:15:36

Channel 1412-Occupied Bandwidth (99% BW)

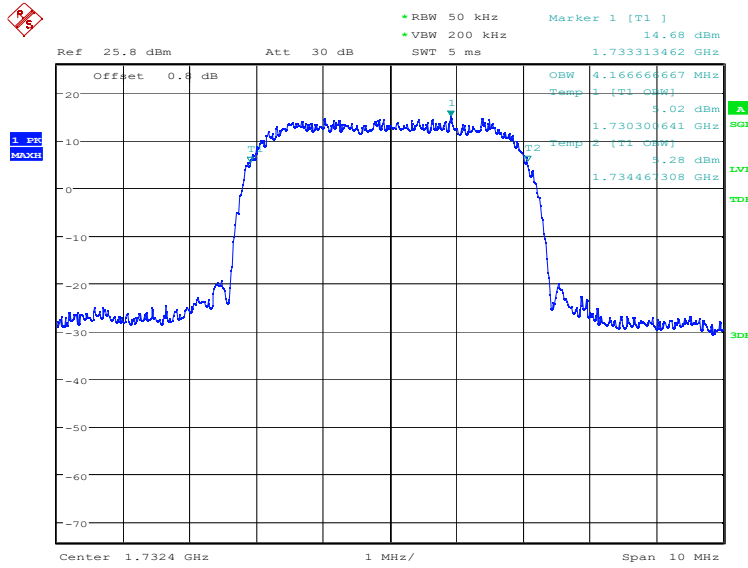

Date: 8.DEC.2021 21:16:02

Channel 1513-Occupied Bandwidth (99% BW)

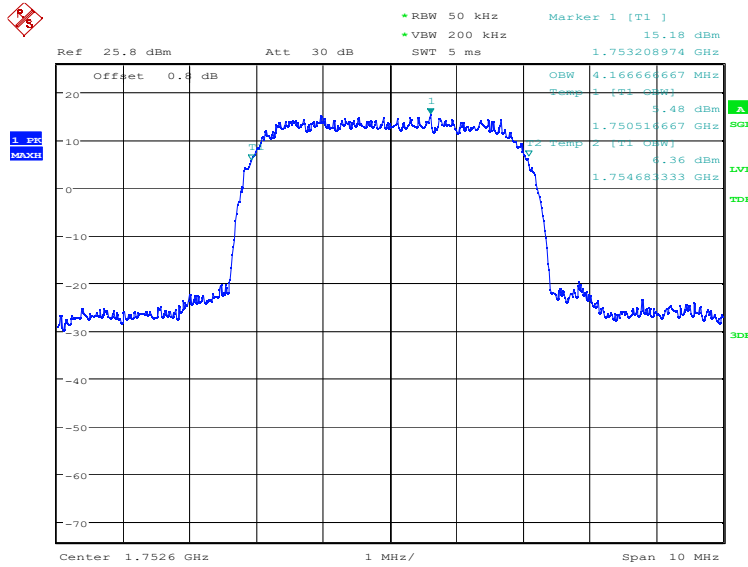

Date: 8.DEC.2021 21:16:29

A.5 Emission Bandwidth

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The measurement method is from ANSI C63.26:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.

WCDMA Band II-QPSK (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
1852.4	4679.49
1880.0	4695.51
1907.6	4663.46


WCDMA Band II (-26dBc)

Channel 9262-Emission Bandwidth (-26dBc BW)

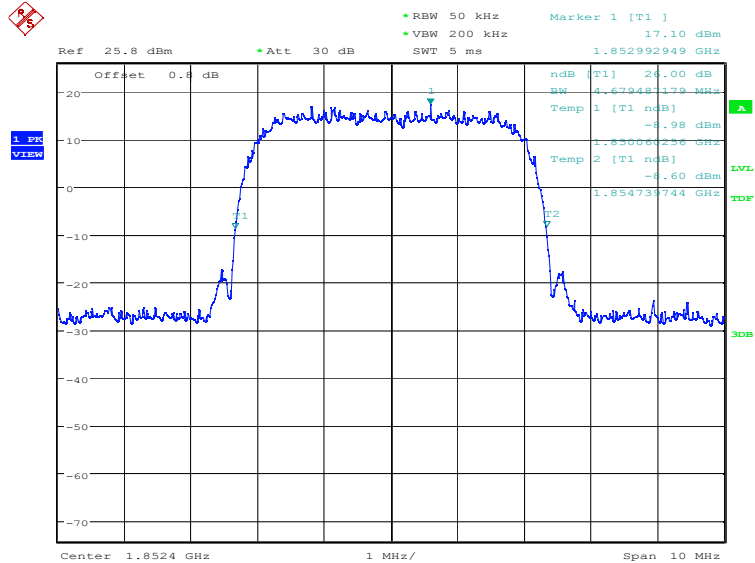


Date: 8.DEC.2021 20:48:02

Channel 9400-Emission Bandwidth (-26dBc BW)

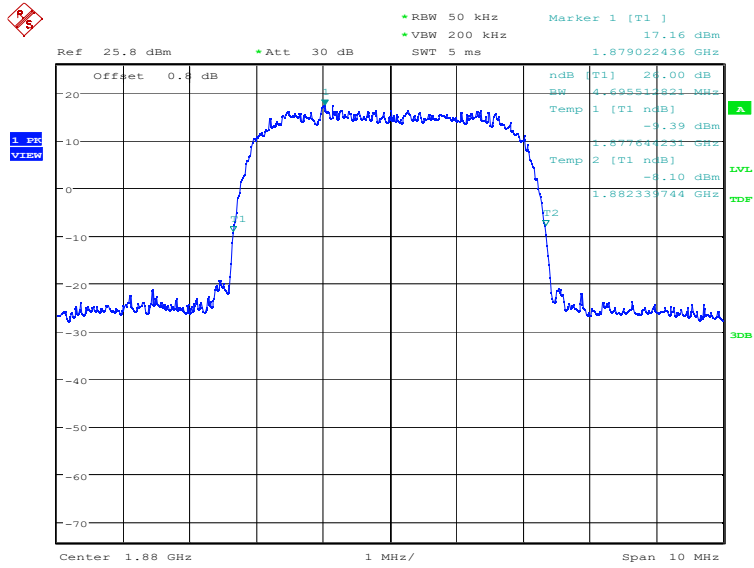

Date: 8.DEC.2021 20:48:29

Channel 9538-Emission Bandwidth (-26dBc BW)

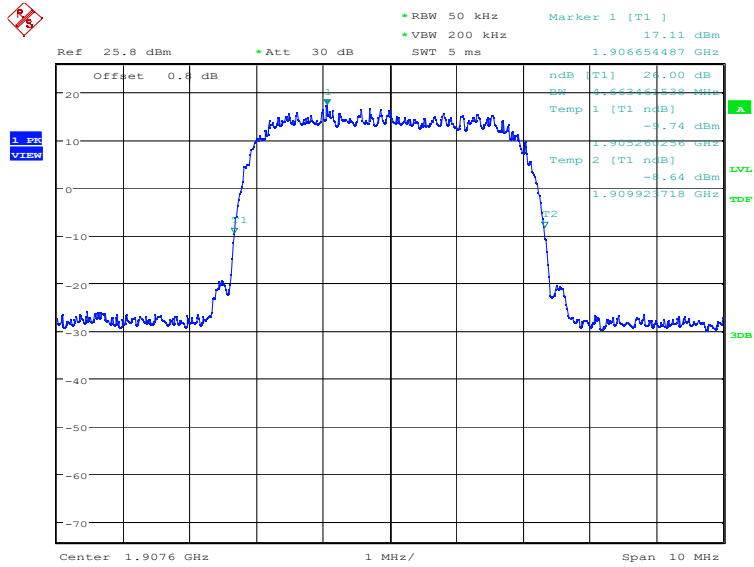


Date: 8.DEC.2021 20:48:56

WCDMA Band II -16QAM (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
1852.4	4647.44
1880.0	4647.44
1907.6	4647.44


WCDMA Band II (-26dBc)

Channel 9262-Emission Bandwidth (-26dBc BW)

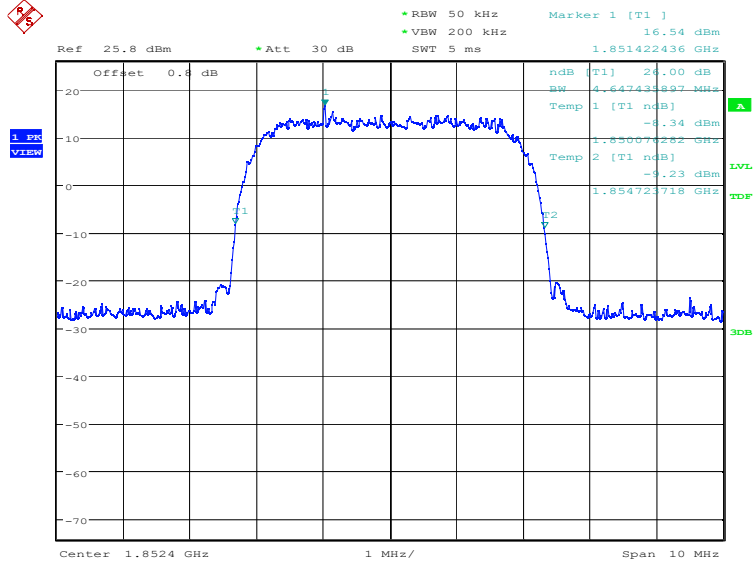


Date: 8.DEC.2021 21:20:12

Channel 9400-Emission Bandwidth (-26dBc BW)

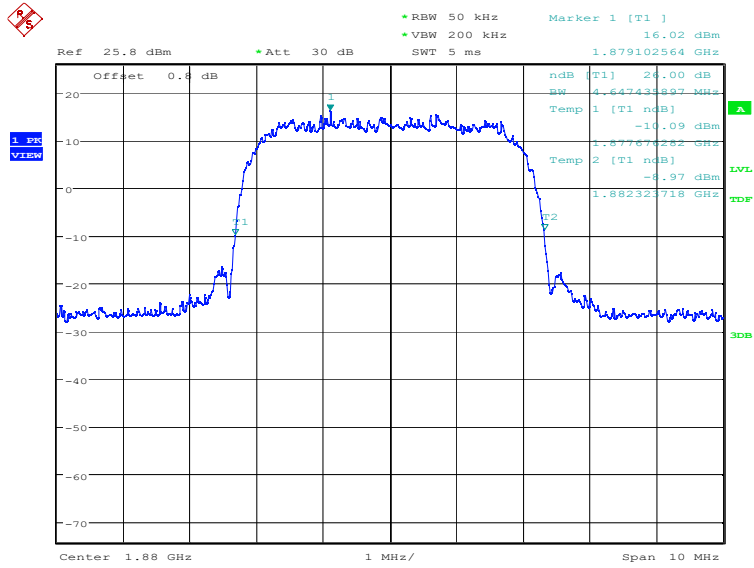

Date: 8.DEC.2021 21:20:39

Channel 9538-Emission Bandwidth (-26dBc BW)

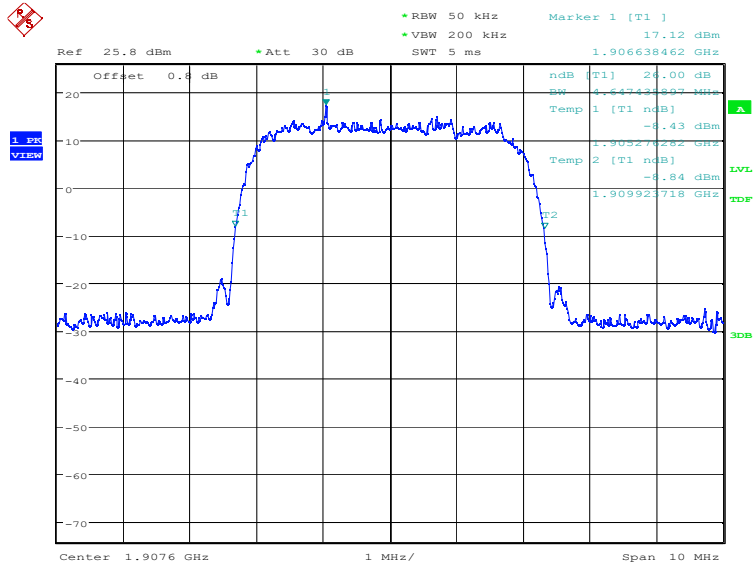


Date: 8.DEC.2021 21:21:06

WCDMA Band V-QPSK (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
826.40	4679.49
836.60	4663.46
846.60	4679.49


WCDMA Band V (-26dBc)

Channel 4132-Emission Bandwidth (-26dBc BW)

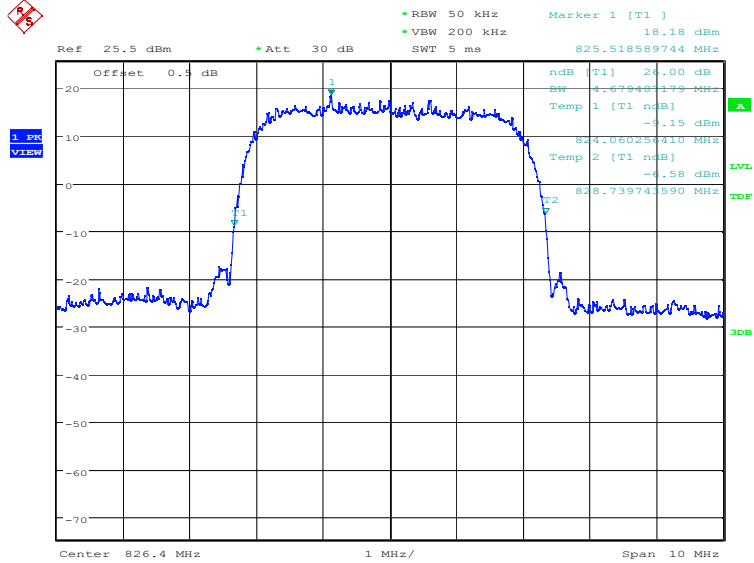


Date: 8.DEC.2021 20:52:00

Channel 4183-Emission Bandwidth (-26dBc BW)

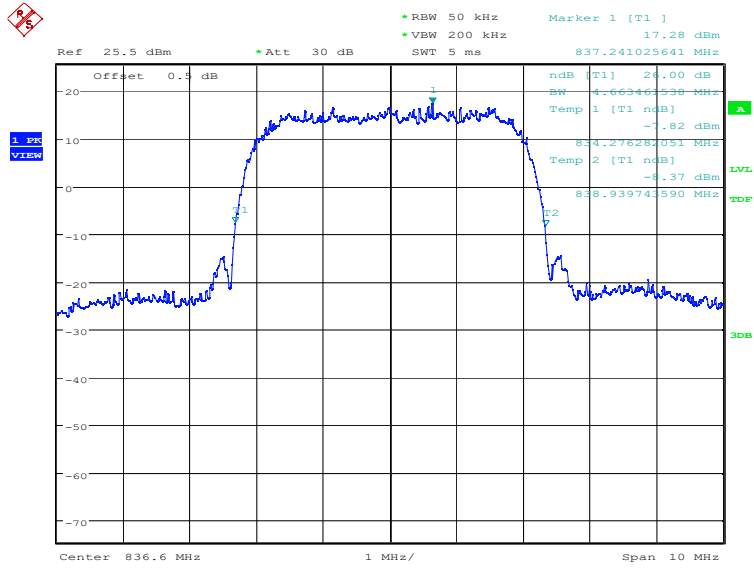

Date: 8.DEC.2021 20:52:27

Channel 4233-Emission Bandwidth (-26dBc BW)

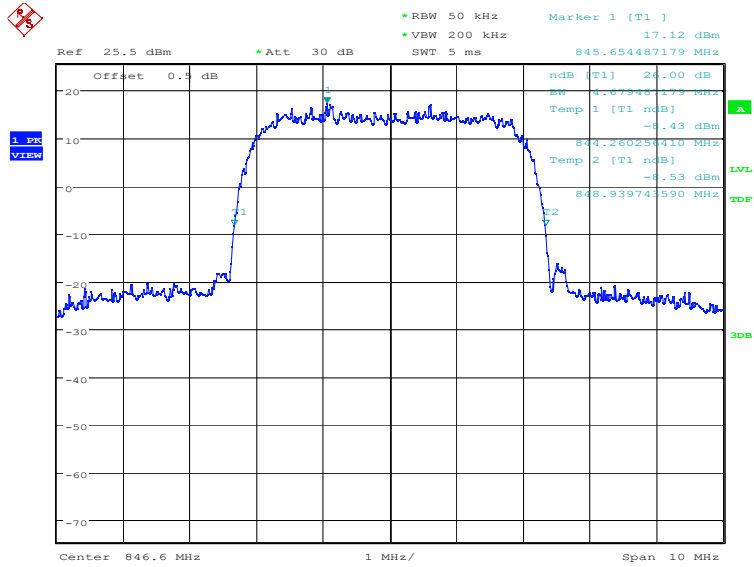


Date: 8.DEC.2021 20:52:55

WCDMA Band V-16QAM (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
826.40	4647.44
836.60	4695.51
846.60	4695.51


WCDMA Band V (-26dBc)

Channel 4132-Emission Bandwidth (-26dBc BW)

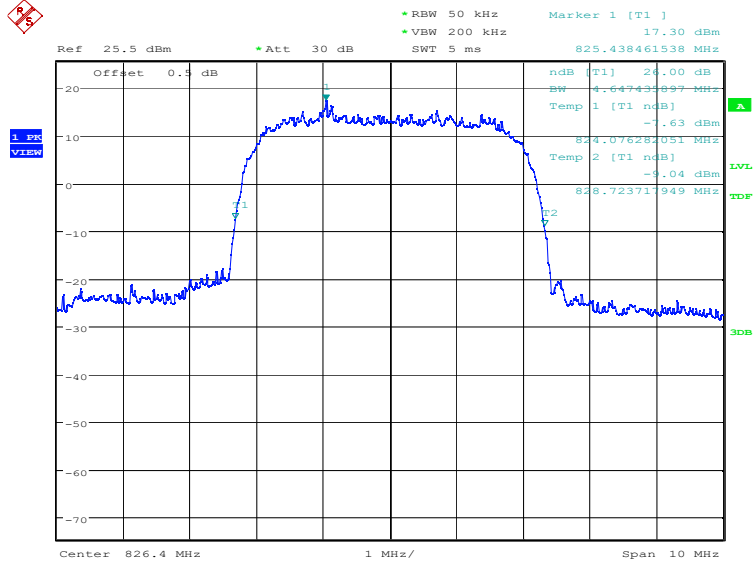


Date: 8.DEC.2021 21:24:45

Channel 4183-Emission Bandwidth (-26dBc BW)

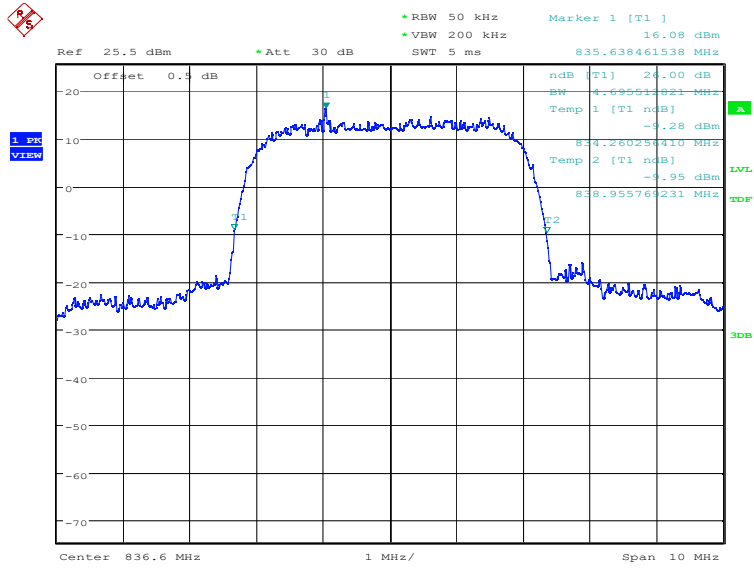

Date: 8.DEC.2021 21:25:12

Channel 4233-Emission Bandwidth (-26dBc BW)

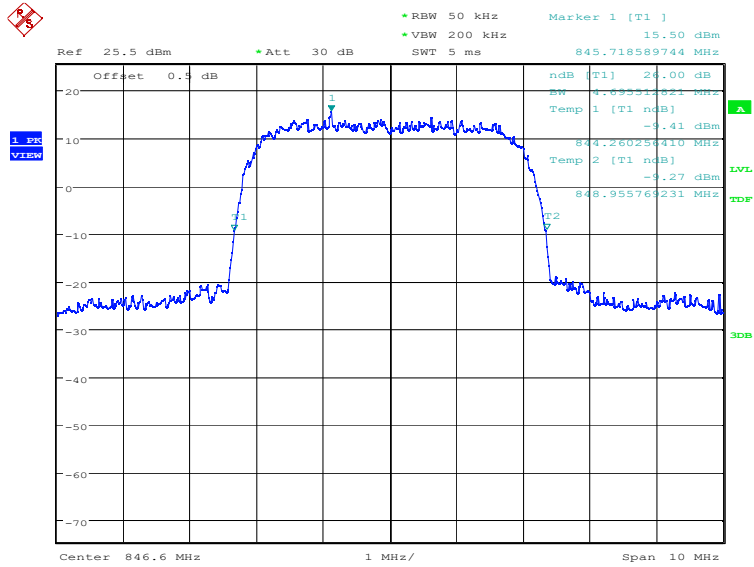


Date: 8.DEC.2021 21:25:39

WCDMA Band IV-QPSK (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
1712.4	4679.49
1732.4	4679.49
1752.6	4679.49


WCDMA Band IV (-26dBc)

Channel 1312-Emission Bandwidth (-26dBc BW)

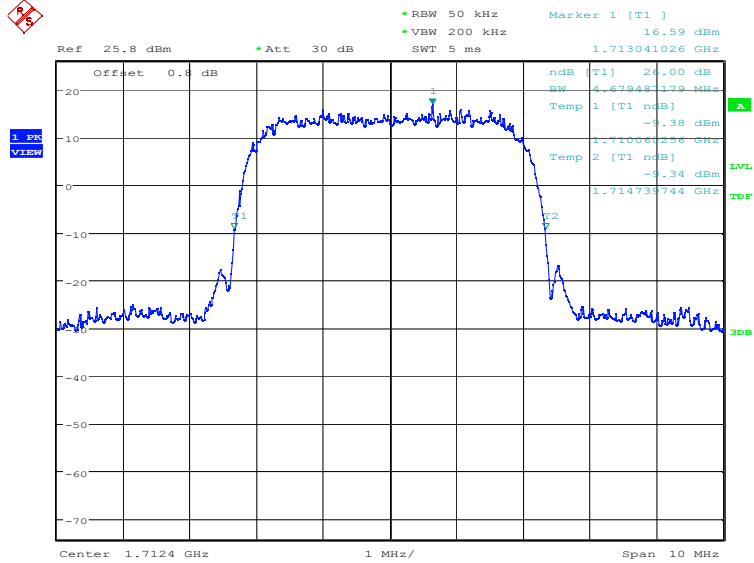


Date: 8.DEC.2021 20:50:01

Channel 1412-Emission Bandwidth (-26dBc BW)

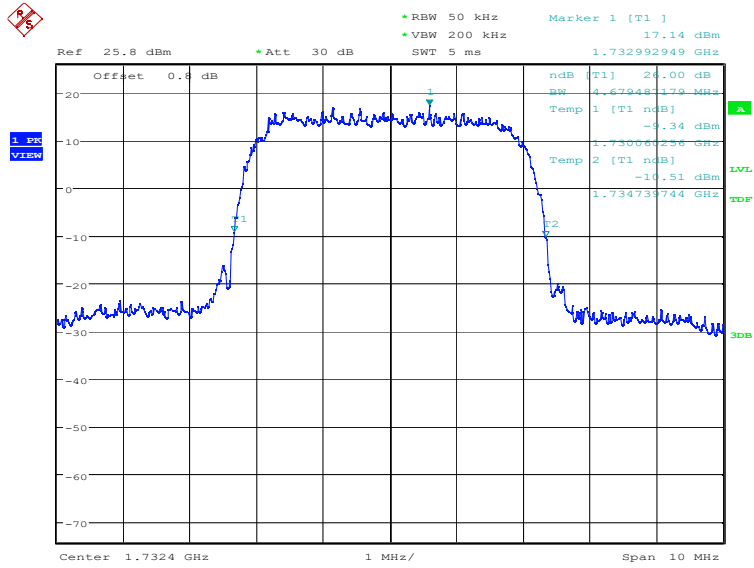

Date: 8.DEC.2021 20:50:28

Channel 1513-Emission Bandwidth (-26dBc BW)

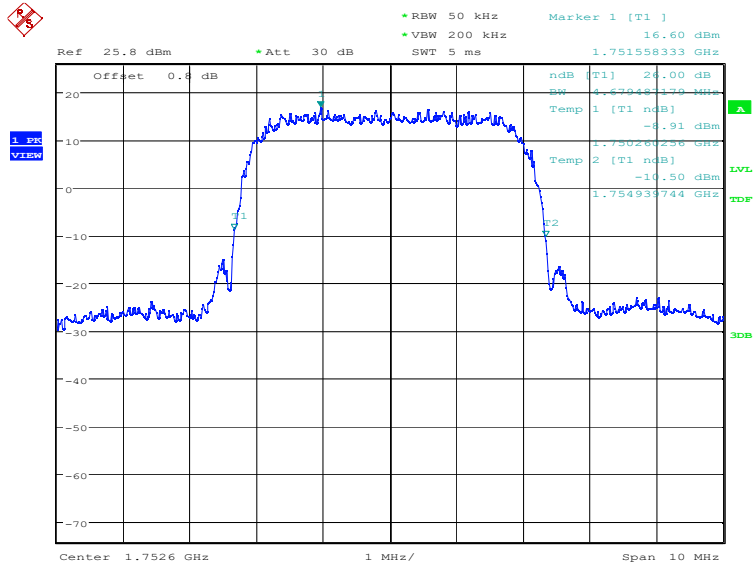


Date: 8.DEC.2021 20:50:56

WCDMA Band IV-16QAM (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
1712.4	4679.49
1732.4	4695.51
1752.6	4647.44


WCDMA Band IV (-26dBc)

Channel 1312-Emission Bandwidth (-26dBc BW)

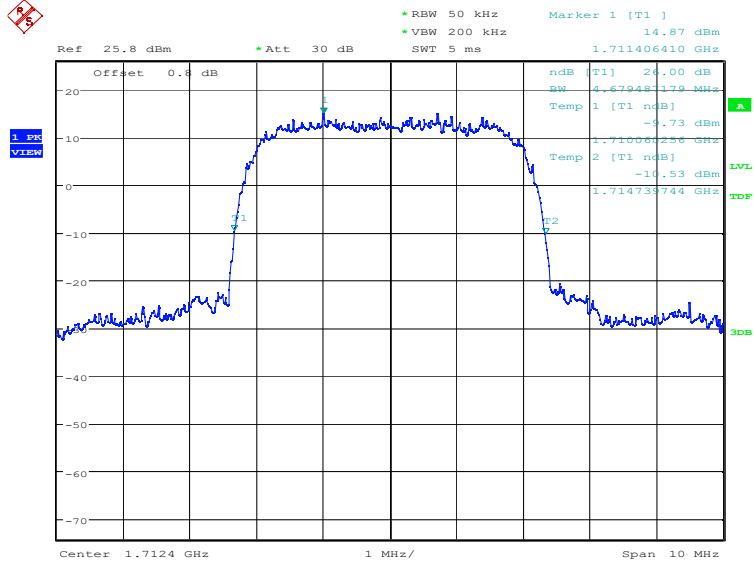


Date: 8.DEC.2021 21:22:28

Channel 1412-Emission Bandwidth (-26dBc BW)

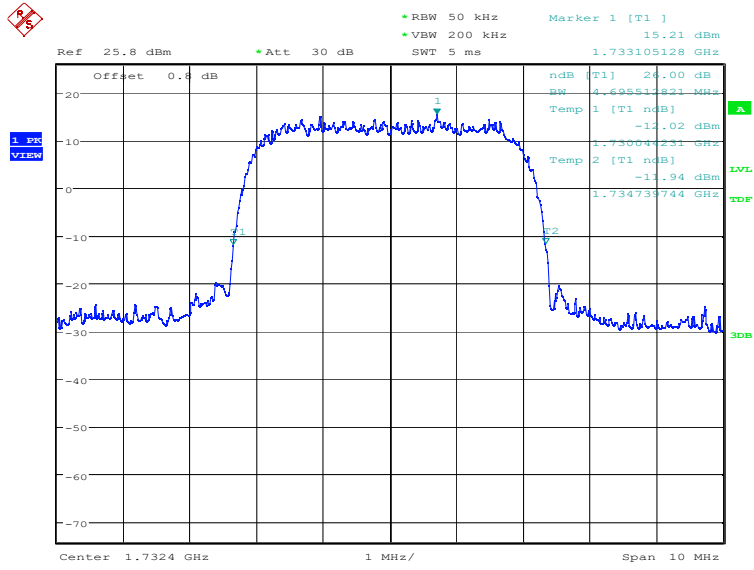

Date: 8.DEC.2021 21:22:56

Channel 1513-Emission Bandwidth (-26dBc BW)

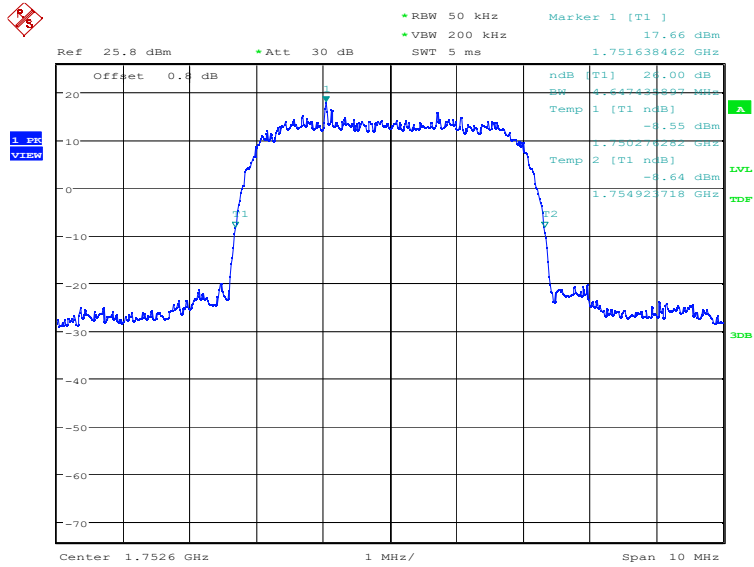

Date: 8.DEC.2021 21:23:23

A.6 Band Edge Compliance

A.6.1 Measurement limit


Part 22.917 , Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to KDB 971168, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

A.6.2 Measurement result


WCDMA Band II-QPSK

Channel 9262

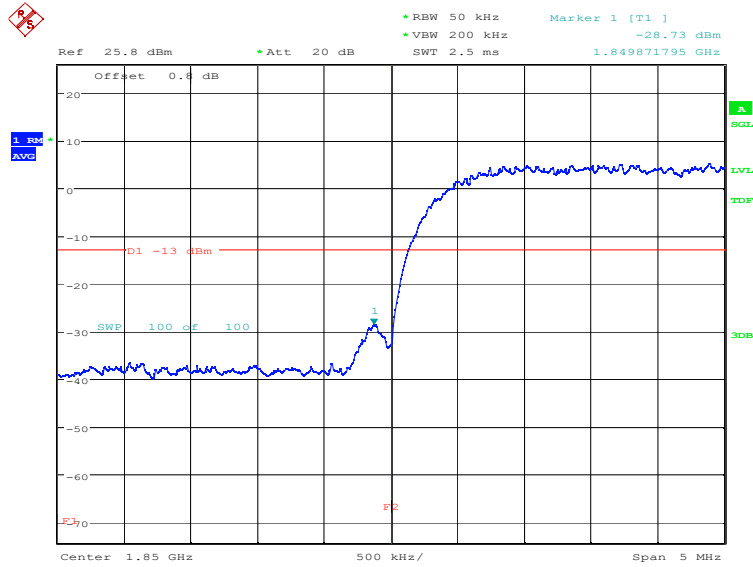


Date: 8.DEC.2021 20:54:02

Channel 9538

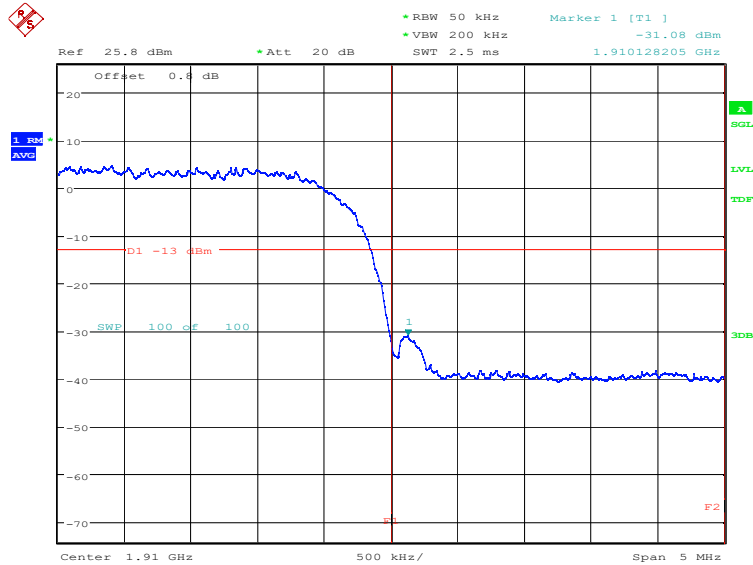


Date: 8.DEC.2021 20:55:17

WCDMA Band V-QPSK
Channel 4132

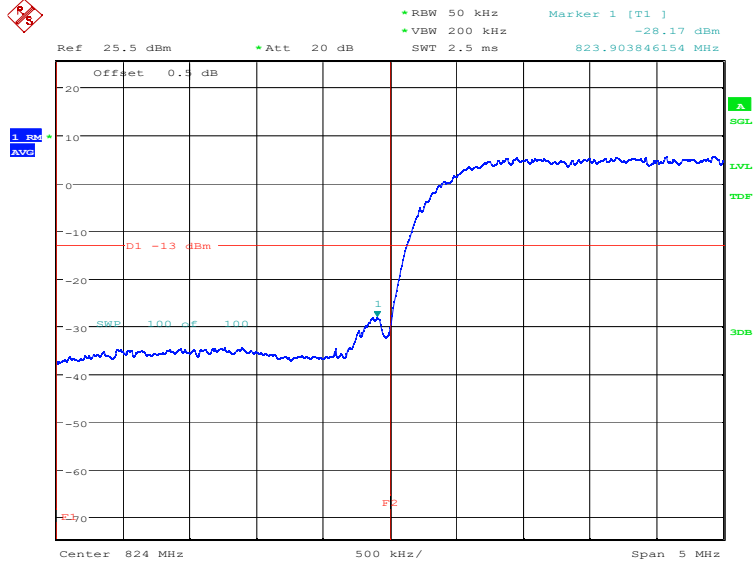


Date: 8.DEC.2021 21:00:18

Channel 4233

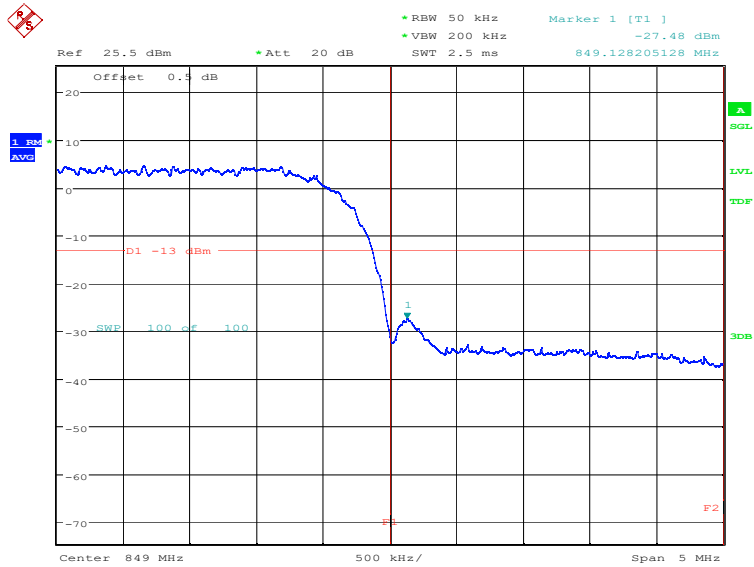


Date: 8.DEC.2021 21:01:33

WCDMA Band IV-QPSK
Channel 1312

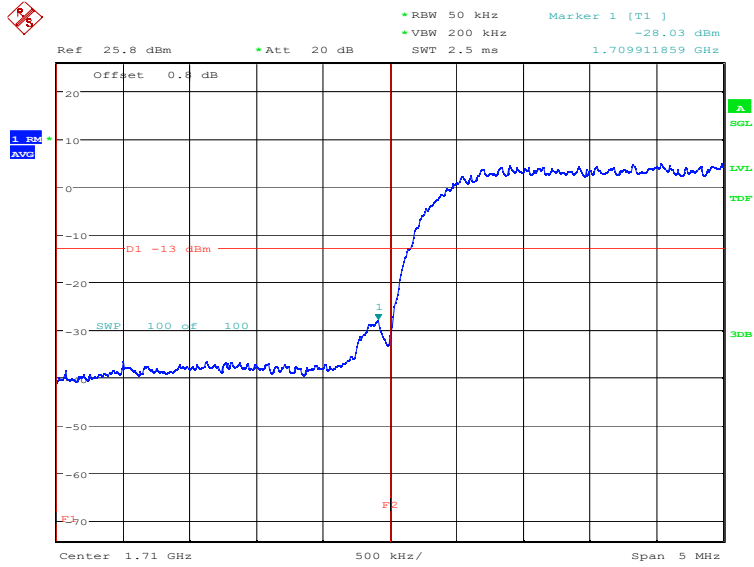

Date: 8.DEC.2021 20:57:10

Channel 1513

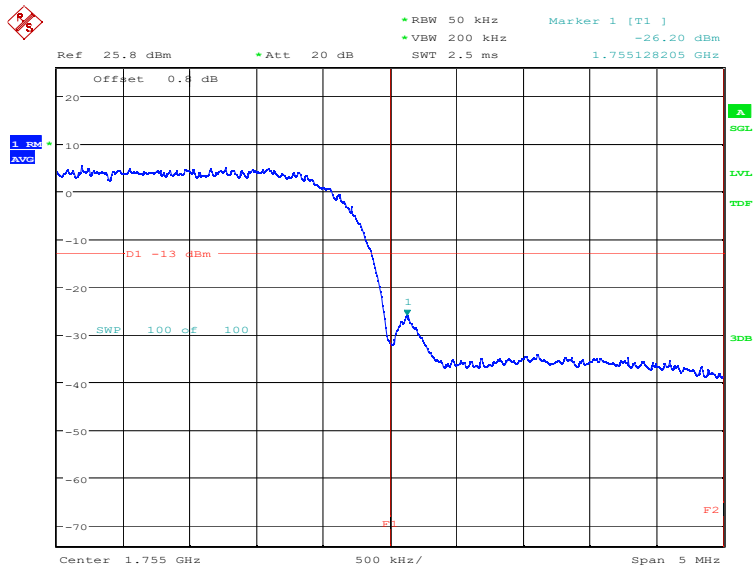

Date: 8.DEC.2021 20:58:25

A.7 Conducted Spurious Emission

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:
 - (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
 - (b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is greater than $2 \times \text{span}/\text{RBW}$.

A. 7.2 Measurement Limit


Part 22.917 , Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

A.7.3 Measurement result

WCDMA Band II

Channel 9262: 30MHz – 19.10GHz


NOTE: peak above the limit line is the carrier frequency.

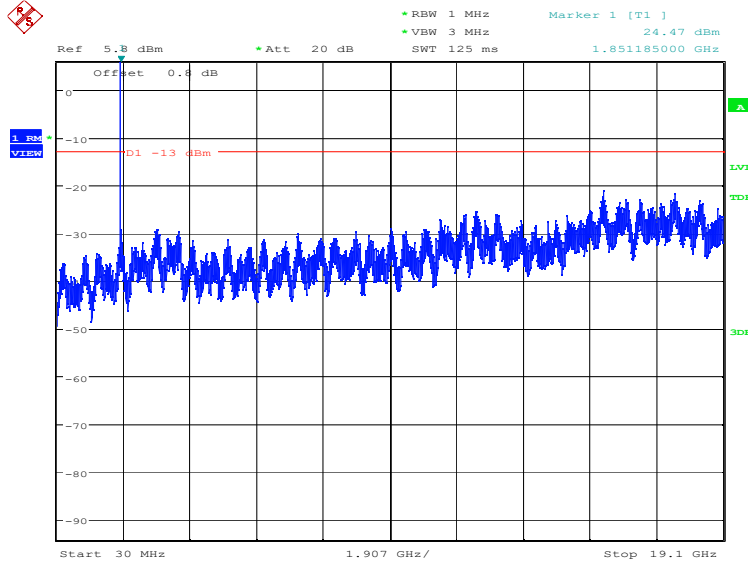

Date: 8.DEC.2021 21:03:50

Channel 9400: 30MHz – 19.10GHz


NOTE: peak above the limit line is the carrier frequency.

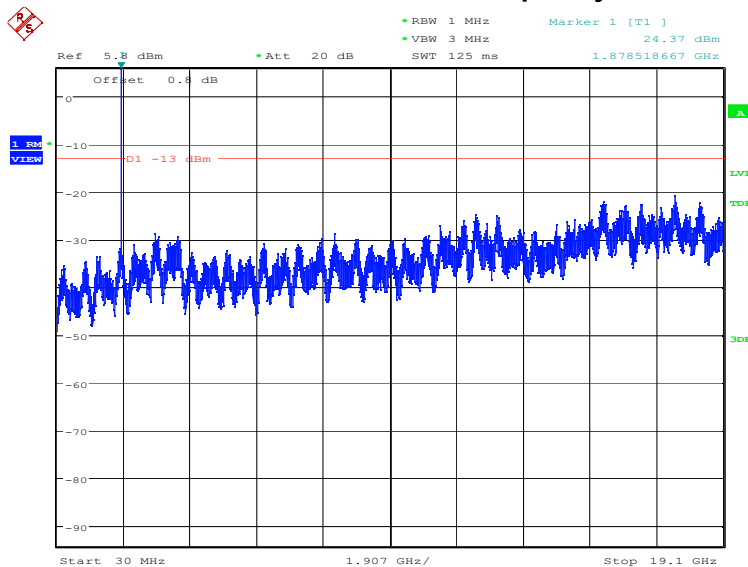

Date: 8.DEC.2021 21:04:20

Channel 9538: 30MHz –19.10GHz

NOTE: peak above the limit line is the carrier frequency.

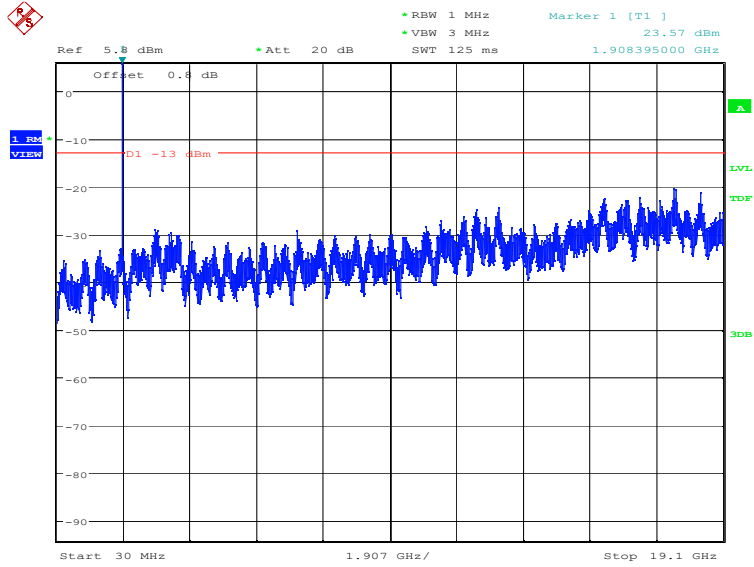


Date: 8.DEC.2021 21:04:51

WCDMA Band V

Channel 4132: 30MHz –8.49GHz


NOTE: peak above the limit line is the carrier frequency.

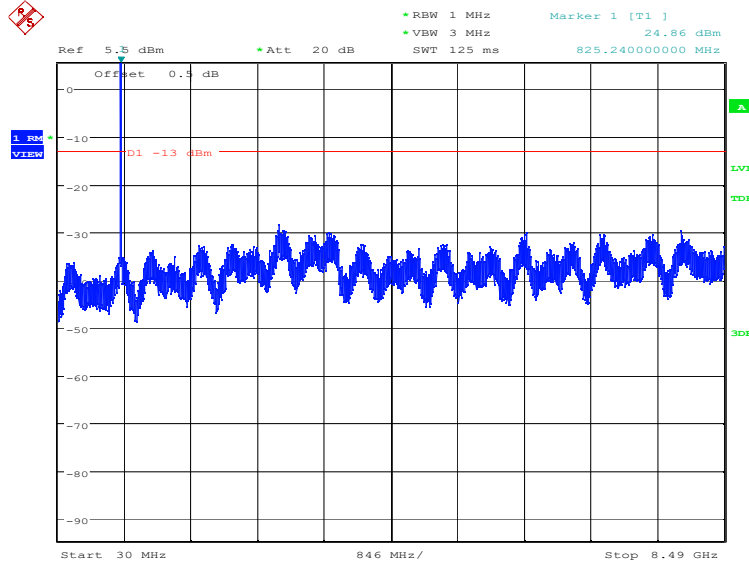

Date: 8.DEC.2021 21:08:08

Channel 4183: 30MHz –8.49GHz


NOTE: peak above the limit line is the carrier frequency.

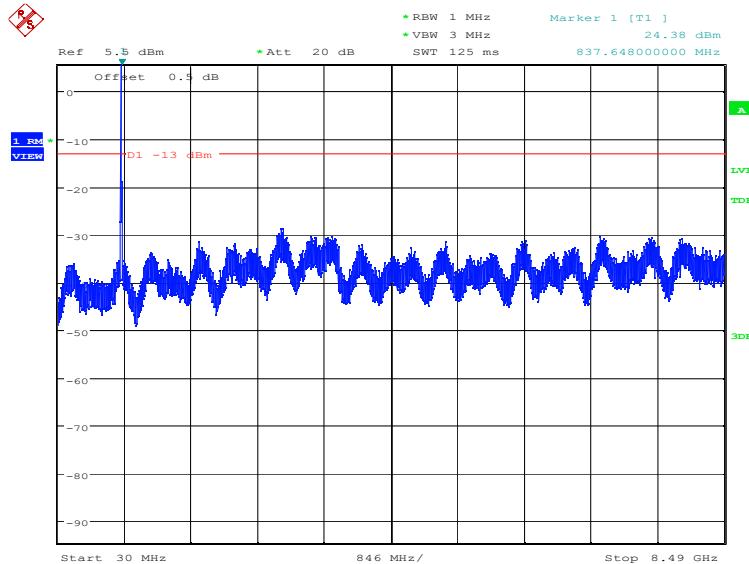

Date: 8.DEC.2021 21:08:38

Channel 4233: 30MHz –8.49GHz

NOTE: peak above the limit line is the carrier frequency.

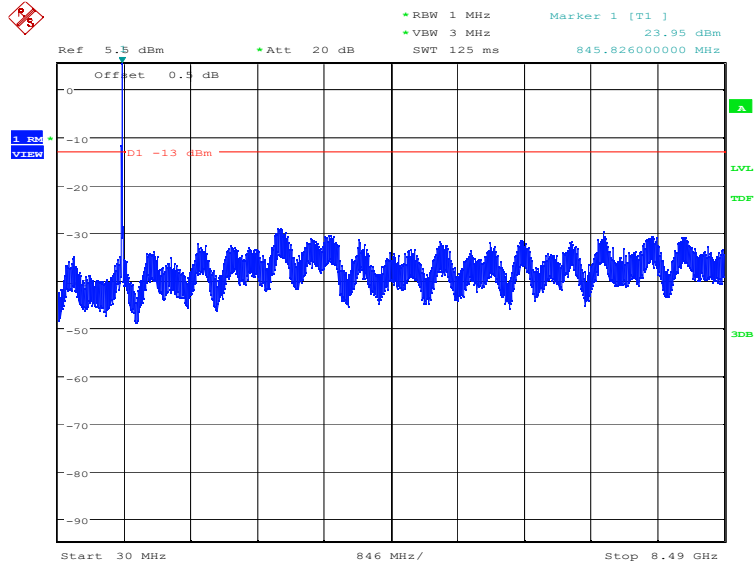


Date: 8.DEC.2021 21:09:09

WCDMA Band IV

Channel 1312: 30MHz –17.55GHz

NOTE: peak above the limit line is the carrier frequency.

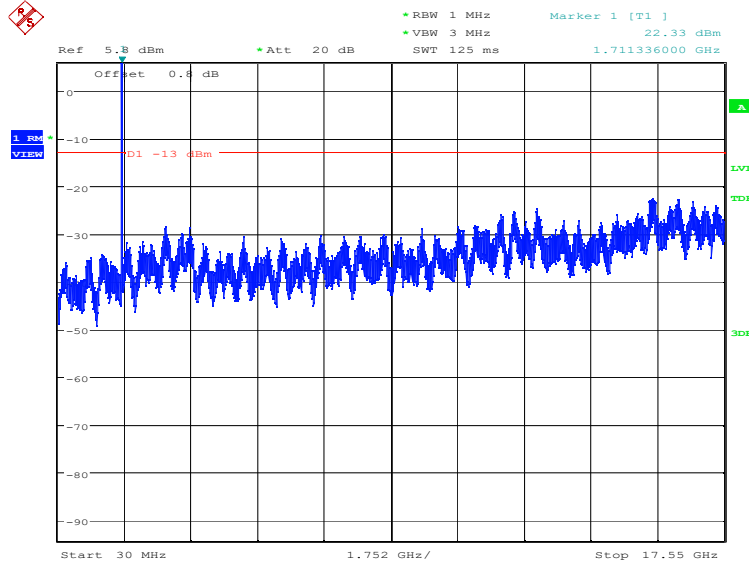


Date: 8.DEC.2021 21:05:59

WCDMA Band IV

Channel 1412: 30MHz –17.55GHz

NOTE: peak above the limit line is the carrier frequency.

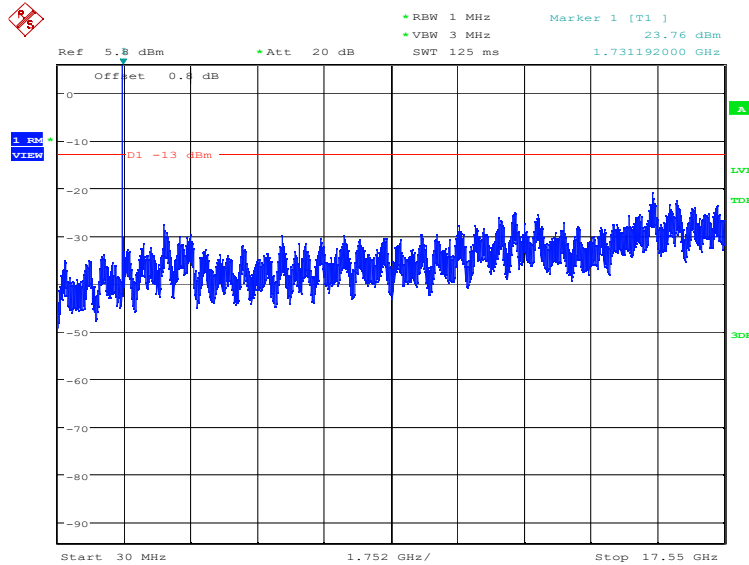


Date: 8.DEC.2021 21:06:29

WCDMA Band IV

Channel 1513: 30MHz –17.55GHz

NOTE: peak above the limit line is the carrier frequency.

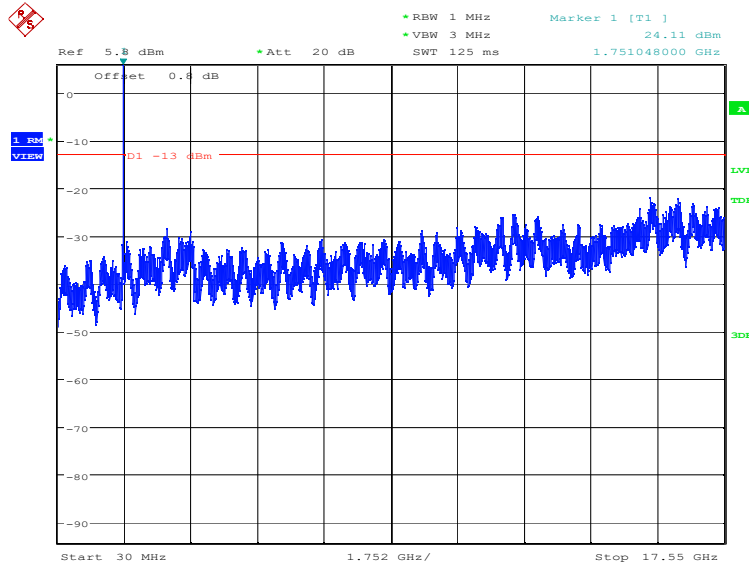

Date: 8.DEC.2021 21:07:00

A.8 Peak-to-Average Power Ratio

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Record the maximum PAPR level associated with a probability of 0.1%.

WCDMA Band II-QPSK

Measurement result

CH	Frequency (MHz)	PAPR (dB)
9400	1880.0	3.62

WCDMA Band II-16QAM

Measurement result

CH	Frequency (MHz)	PAPR (dB)
9400	1880.0	4.84

WCDMA Band IV-QPSK

Measurement result

CH	Frequency (MHz)	PAPR (dB)
1412	1732.4	3.30

WCDMA Band IV-16QAM

Measurement result

CH	Frequency (MHz)	PAPR (dB)
1412	1732.4	4.42

Annex B: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p> <p>NVLAP® </p> <hr/> <p>Certificate of Accreditation to ISO/IEC 17025:2017</p> <hr/>	
<p>NVLAP LAB CODE: 600118-0</p>	
<p>Telecommunication Technology Labs, CAICT Beijing China</p>	
<p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p>	
<p>Electromagnetic Compatibility & Telecommunications</p>	
<p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p>	
<hr/> <p>2021-09-29 through 2022-09-30 <i>Effective Dates</i></p>	 <hr/> <p><i>[Signature]</i> For the National Voluntary Laboratory Accreditation Program</p>

END OF REPORT