





No. I21Z62218-SEM01

For

vivo Mobile Communication Co., Ltd.

Mobile Phone

Model Name: V2127

with

Hardware Version: MP 0.1

Software Version: PD2166EF_EX_A_3.6.0

FCC ID: 2AUCY-V2127V

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Xueyuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn,




Picture 1: Constituents of the sample




Picture 2: Left Head Touch Cheek Position

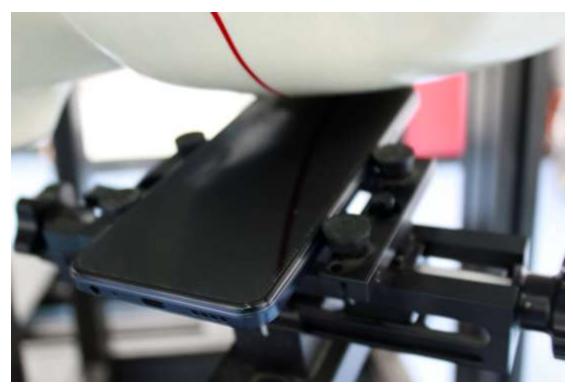

Picture 3: Left Head Tilt 15° Position

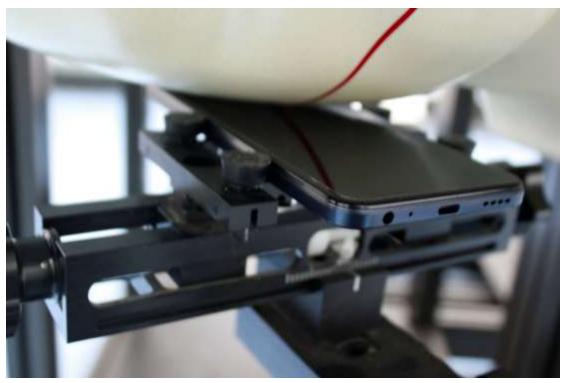

Picture 4: Right Head Touch Cheek Position

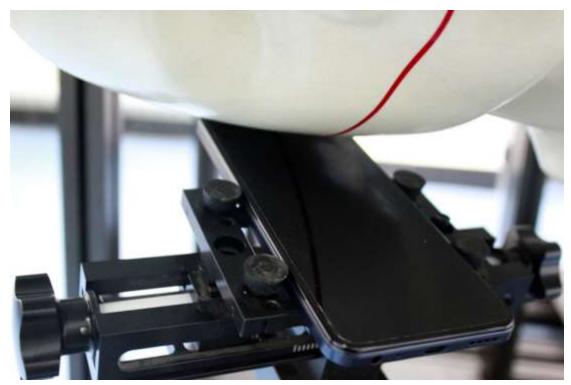

Picture 5: Right Head Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 8 test positions all with the distance =10/15mm between the EUT and the phantom bottom:



Picture 6: Front 10mm



Picture 7: Rear 10mm



Picture 8: Left 10mm



Picture 9: Right 10mm



Picture 10: Top 10mm



Picture 11: Bottom 10mm




Picture 12: Front 15mm



Picture 13: Rear 15mm

Transmit Antenna Separation Distances

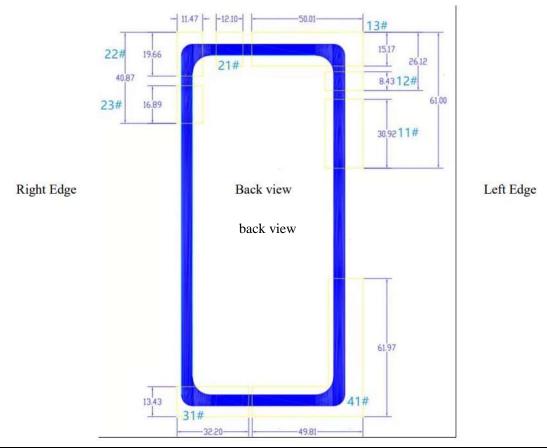

Ant 11#	NR n7/38/41/78
Ant 12#	NR n78
Ant 13#	CDMA BC0
	GSM850/1900
	WCDMA B2/B4/B5
	LTE 4G B2/4/5/7/12/17/38/41
	NR n1/3/7/38/40/41
	NR n5/7/38/41
Ant 22#	GPS/wifi/BT
Ant 31#	GSM 1900
	WCDMA B2/4
	LTE B2/4/7/38/41
Ant 41#	CDMA BC0
	GSM 850
	WCDMA B5
	LTE B5/12/17
	NR n5