



# FCC RF Test Report

**APPLICANT** : vivo Mobile Communication Co., Ltd.  
**EQUIPMENT** : Mobile Phone  
**BRAND NAME** : vivo  
**MODEL NAME** : V2203,V2204  
**FCC ID** : 2AUCY-V2203  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System  
**TEST DATE(S)** : Jun. 30, 2022 ~ Jul. 15, 2022

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 5

    1.5 Modification of EUT ..... 5

    1.6 Testing Location ..... 6

    1.7 Test Software ..... 6

    1.8 Applicable Standards..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7**

    2.1 Carrier Frequency Channel ..... 7

    2.2 Test Mode ..... 8

    2.3 Connection Diagram of Test System ..... 9

    2.4 Support Unit used in test configuration and system ..... 9

    2.5 EUT Operation Test Setup ..... 10

    2.6 Measurement Results Explanation Example..... 10

**3 TEST RESULT ..... 11**

    3.1 6dB and 99% Bandwidth Measurement ..... 11

    3.2 Output Power Measurement..... 18

    3.3 Power Spectral Density Measurement ..... 19

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 26

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 35

    3.6 AC Conducted Emission Measurement..... 39

    3.7 Antenna Requirements ..... 41

**4 LIST OF MEASURING EQUIPMENT ..... 42**

**5 UNCERTAINTY OF EVALUATION..... 43**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**





## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.31 dB at 2483.52 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.03 dB at 0.16 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

vivo Mobile Communication Co., Ltd.  
No.1, vivo Road, Chang'an, Dongguan,Guangdong,China

## 1.2 Manufacturer

vivo Mobile Communication Co., Ltd.  
No.1, vivo Road, Chang'an, Dongguan,Guangdong,China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	vivo
Model Name	V2203,V2204
IMEI Code	Conducted : 867315060002148 Conduction: 867315060002247/867315060002254 Radiation: 867315060002221/867315060002237
FCC ID	2AUCY-V2203
HW Version	MP_0.1
SW Version	PD2216CF_EX_A_12.0.1.38.W30.V00L1
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth v4.2 LE: 6.20 dBm (0.0042 W) Bluetooth v5.0 LE: 6.30 dBm (0.0043 W)
99% Occupied Bandwidth	Bluetooth v4.2 LE: 0.935 MHz Bluetooth v5.0 LE: 1.898 MHz
Antenna Type / Gain	PIFA Antenna with gain -2.95 dBi
Type of Modulation	Bluetooth LE : GFSK

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (Shenzhen)		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-SZ TH01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International Inc. (Shenzhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH03-SZ	CN1256	421272

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



## 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
<b>Conducted TCs</b>	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
<b>Radiated TCs</b>	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz RSE Co-location: Bluetooth_2M_Tx CH39 + LTE Band 41 Link
<b>AC Conducted Emission</b>	Mode 1: GSM 850 Idle + Bluetooth Link + USB Cable (Charging from Adapter)+Earphone
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>1. Radiated tests were performance with Adapter, Earphone and USB Cable.</li> <li>2. RSE Co-location mode is assessed from the worst case of WWAN RSE and BLE TX mode.</li> </ol>	



## 2.3 Connection Diagram of Test System

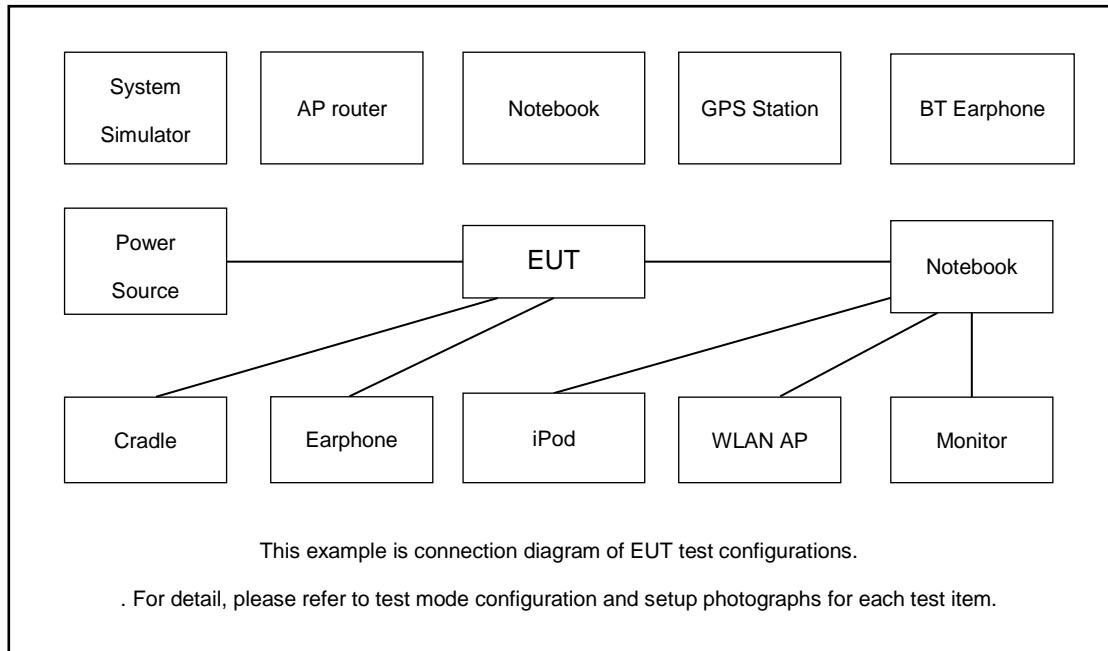

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	BT Base Station	R&S	CBT	N/A	N/A	Unshielded,1.8m



## 2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 1.50dB and 10dB attenuator.

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB). \\ &= 1.50 + 10 = 11.50dB \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup






### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


#### Bluetooth LE 1Mbps

6 dB Bandwidth Plot on Channel 00

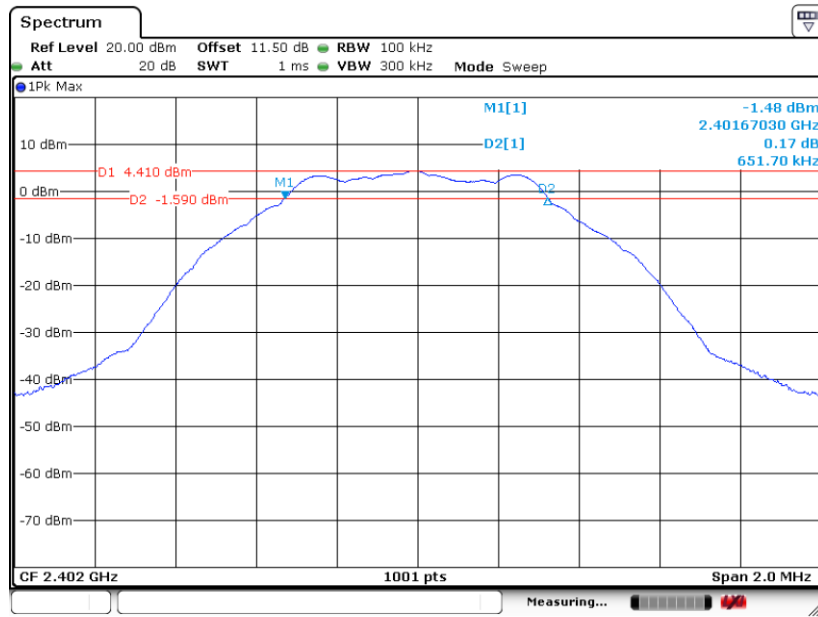

Date: 5.JUL.2022 19:04:35


6 dB Bandwidth Plot on Channel 19

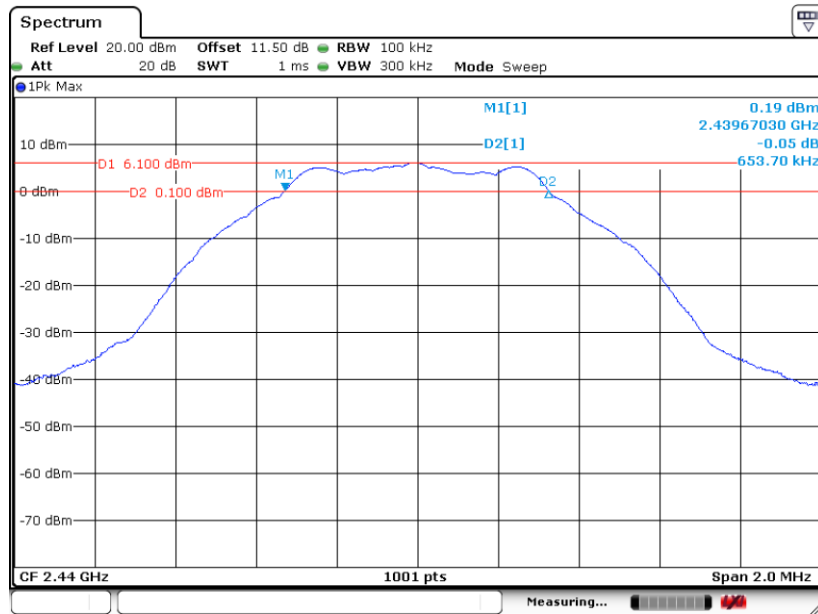

Date: 5.JUL.2022 19:08:58




### 6 dB Bandwidth Plot on Channel 39

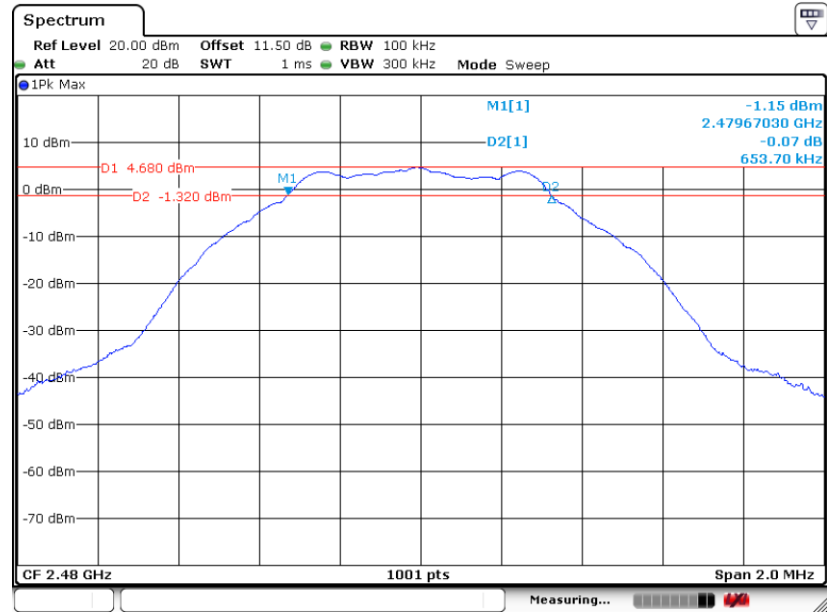

Date: 5.JUL.2022 19:11:32

### Bluetooth LE 2Mbps


### 6 dB Bandwidth Plot on Channel 00

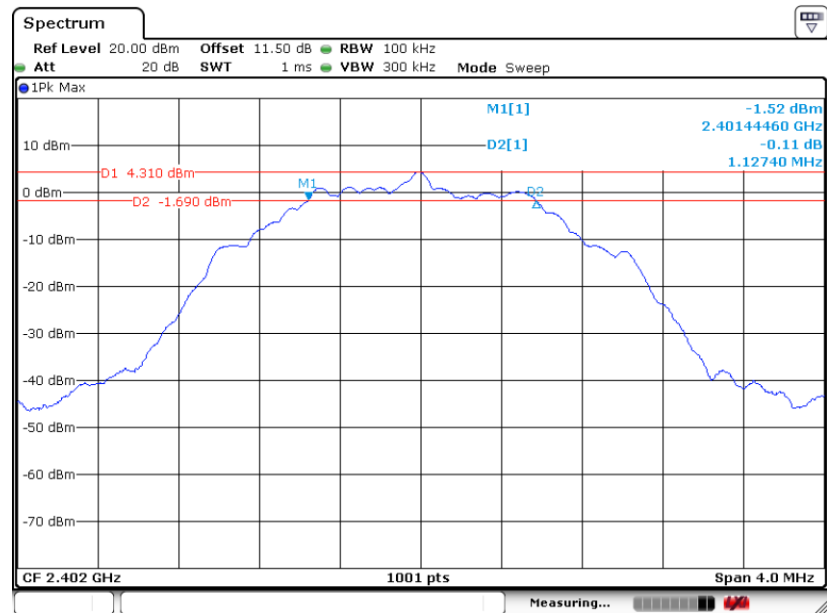


Date: 5.JUL.2022 19:15:28



6 dB Bandwidth Plot on Channel 19

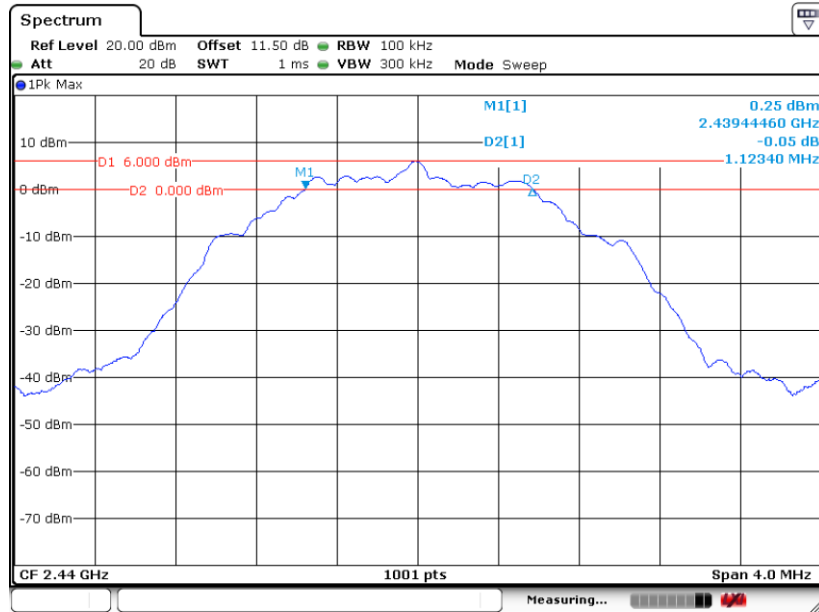

6 dB Bandwidth Plot on Channel 39

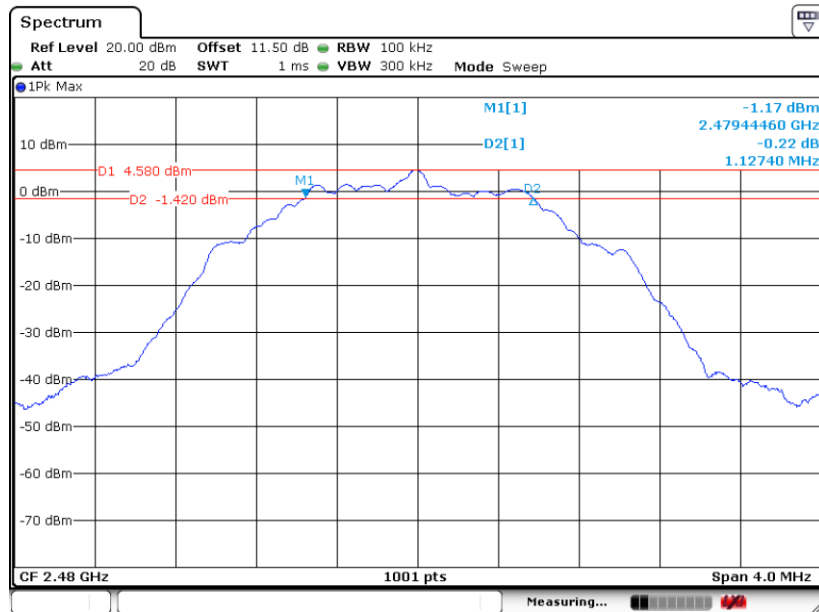




### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


#### Bluetooth LE 1Mbps

#### 99% Occupied Bandwidth Plot on Channel 00

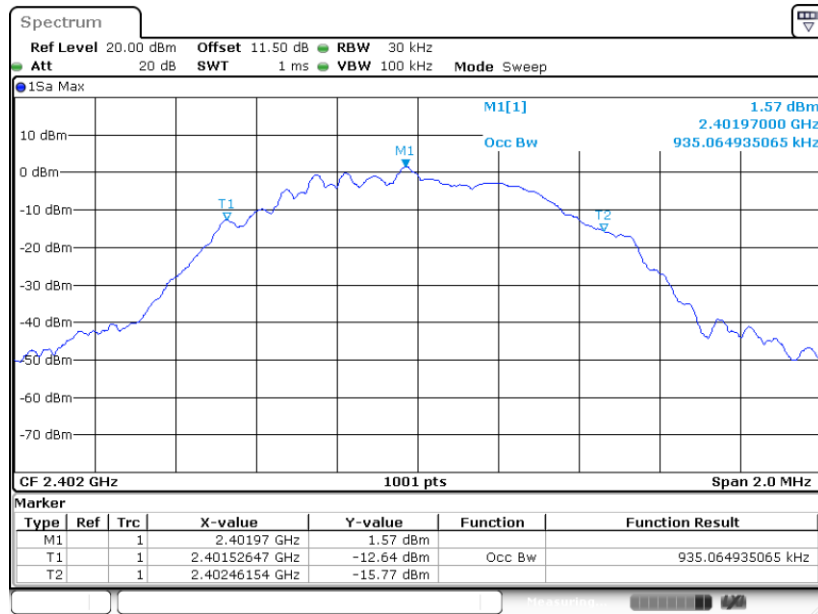

Date: 5.JUL.2022 19:07:00


#### 99% Occupied Bandwidth Plot on Channel 19

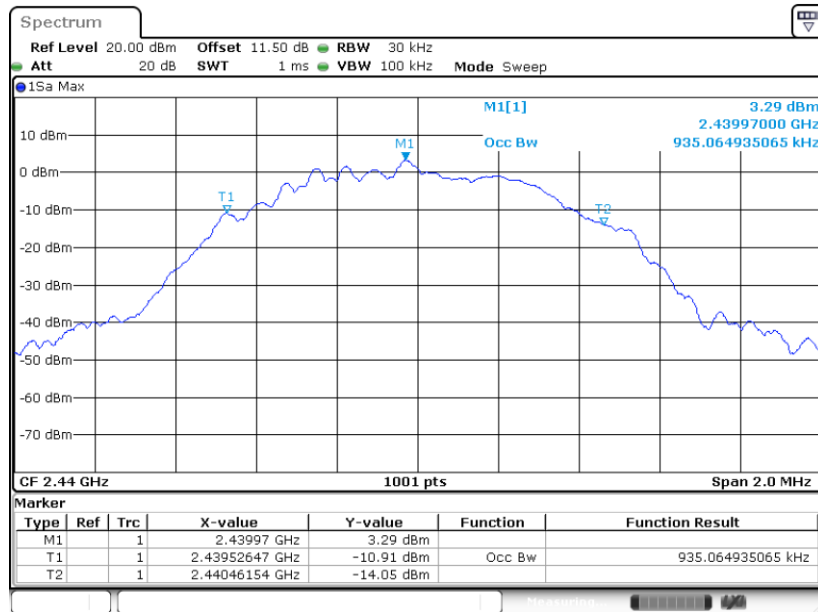

Date: 5.JUL.2022 19:10:03




99% Occupied Bandwidth Plot on Channel 39

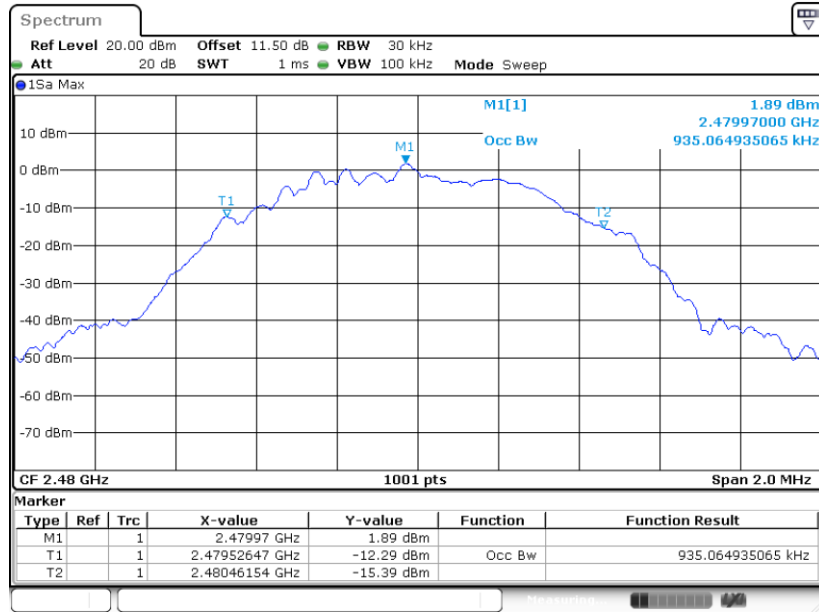

Date: 5.JUL.2022 19:13:02

Bluetooth LE 2Mbps

99% Occupied Bandwidth Plot on Channel 00

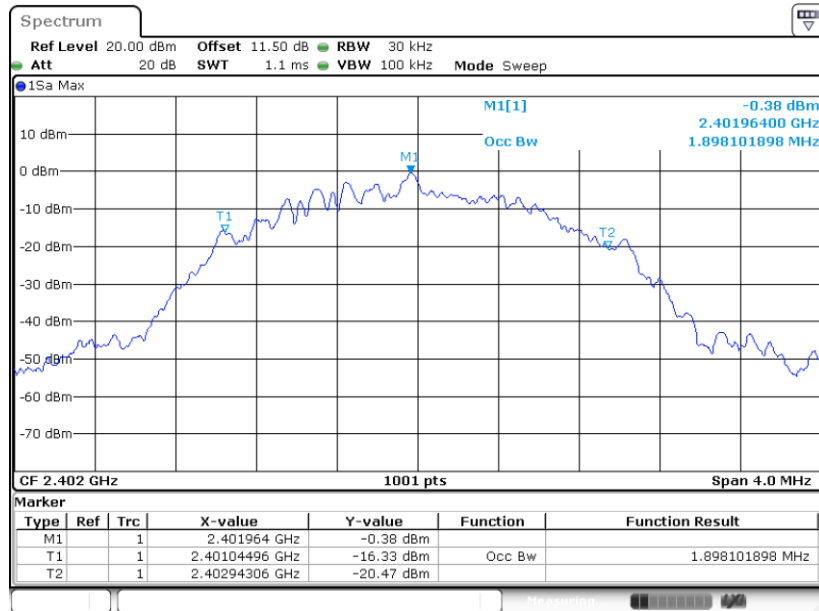


Date: 5.JUL.2022 19:20:28






99% Occupied Bandwidth Plot on Channel 19

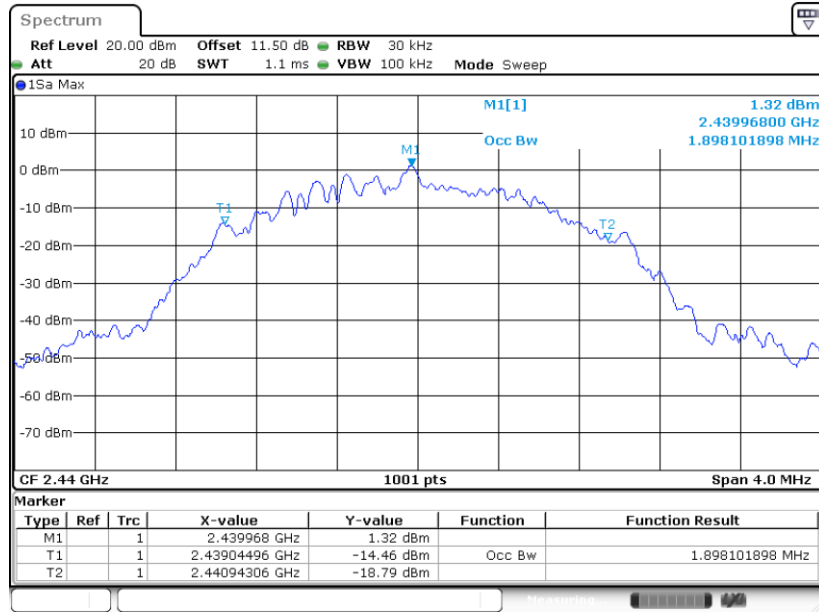

Date: 5.JUL.2022 19:23:29

99% Occupied Bandwidth Plot on Channel 39

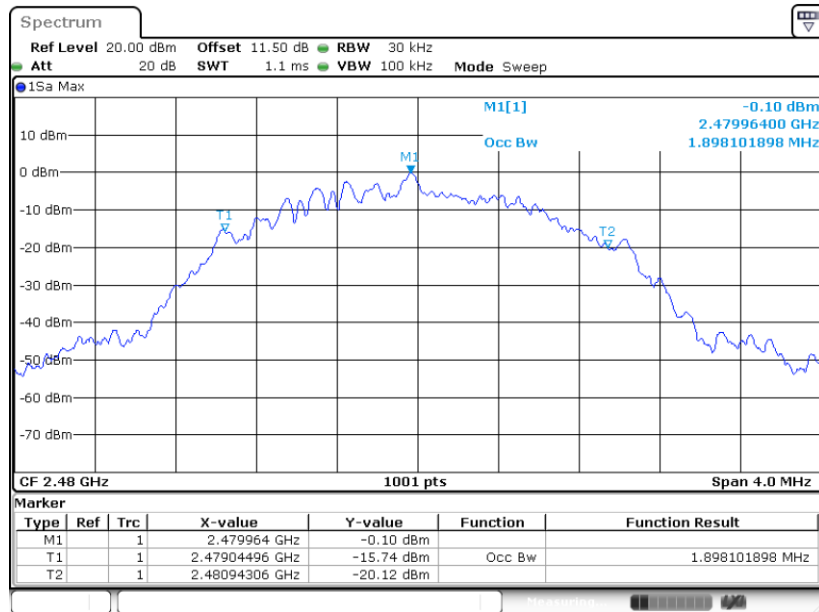

Date: 5.JUL.2022 19:26:43

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

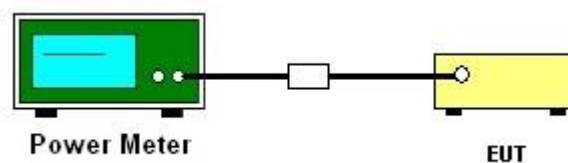

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

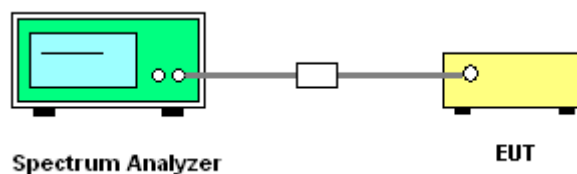

#### 3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)


#### Bluetooth LE 1Mbps

PSD 100kHz Plot on Channel 00

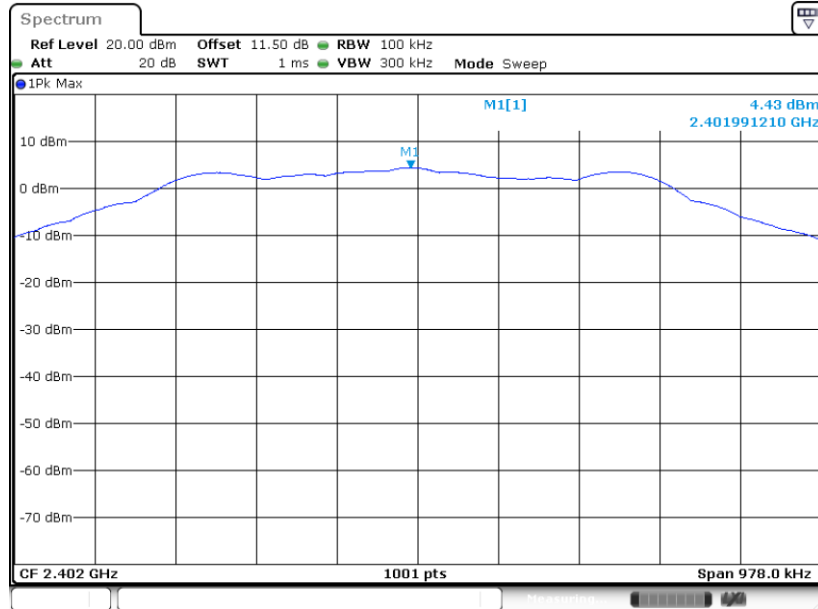

Date: 5.JUL.2022 19:05:22


PSD 100kHz Plot on Channel 19

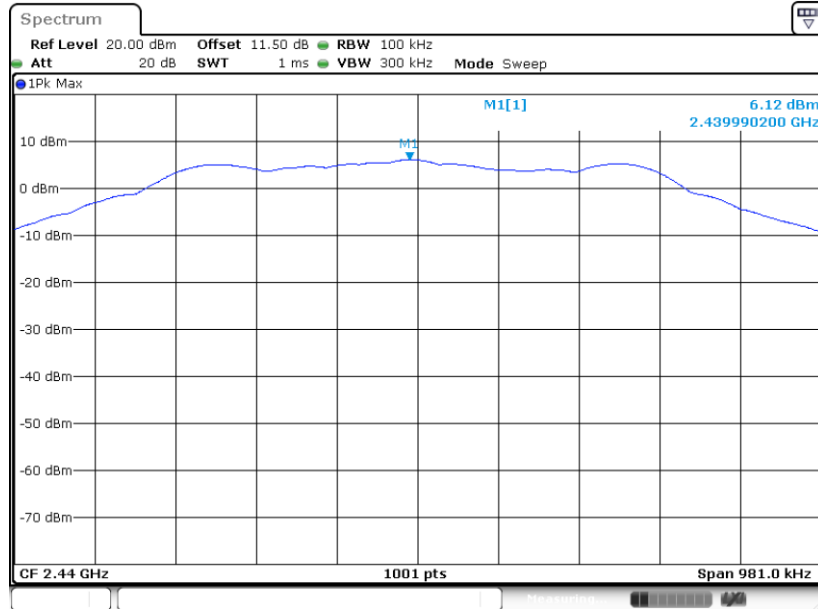

Date: 5.JUL.2022 19:09:26




PSD 100kHz Plot on Channel 39

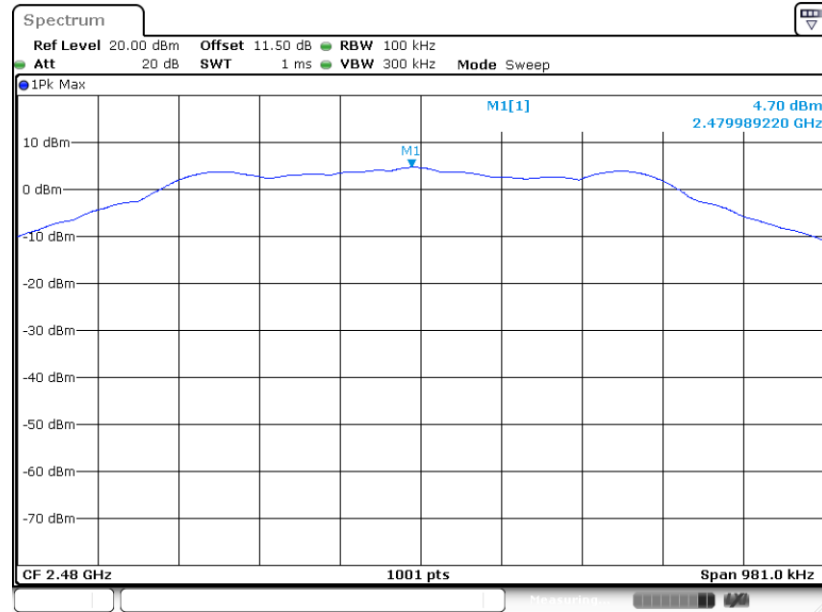

Date: 5.JUL.2022 19:12:07

Bluetooth LE 2Mbps


PSD 100kHz Plot on Channel 00

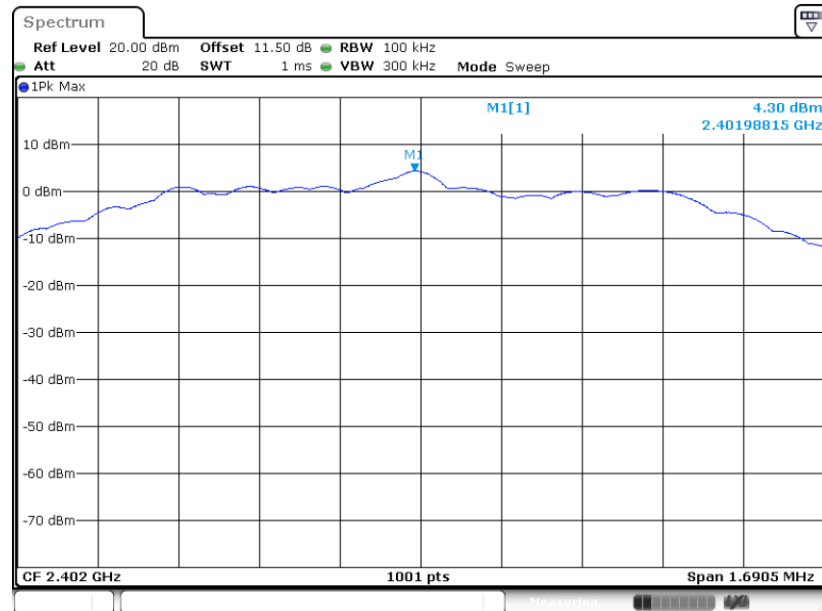

Date: 5.JUL.2022 19:16:01




PSD 100kHz Plot on Channel 19

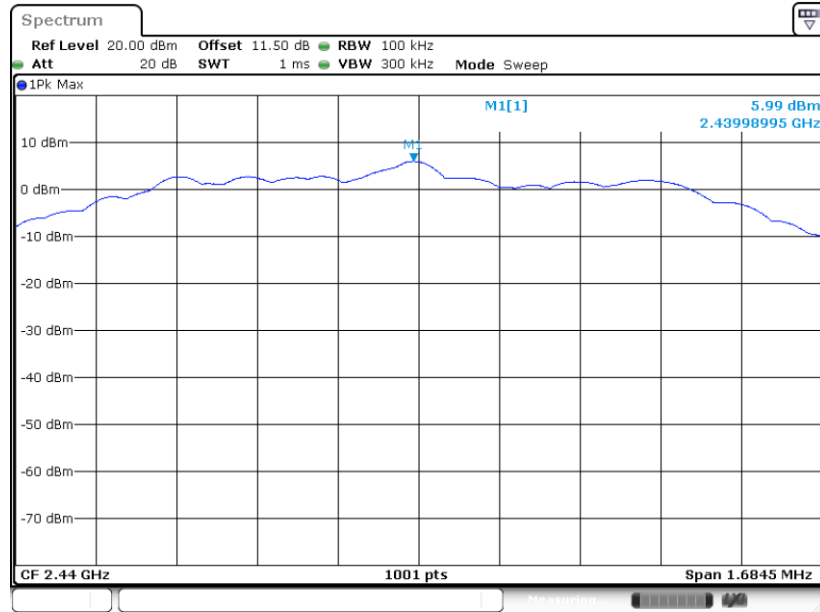

Date: 5.JUL.2022 19:22:44

PSD 100kHz Plot on Channel 39

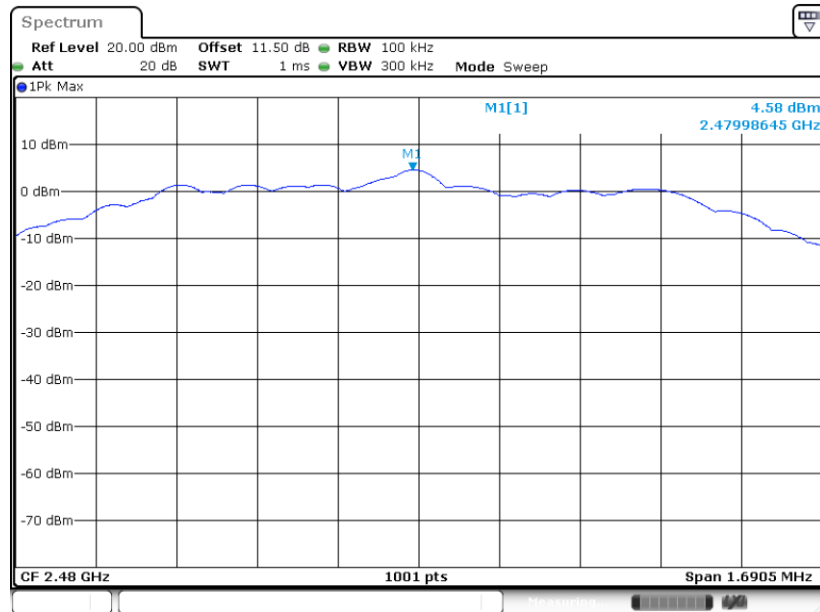


Date: 5.JUL.2022 19:25:28




### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)

#### Bluetooth LE 1Mbps

##### PSD 3kHz Plot on Channel 00

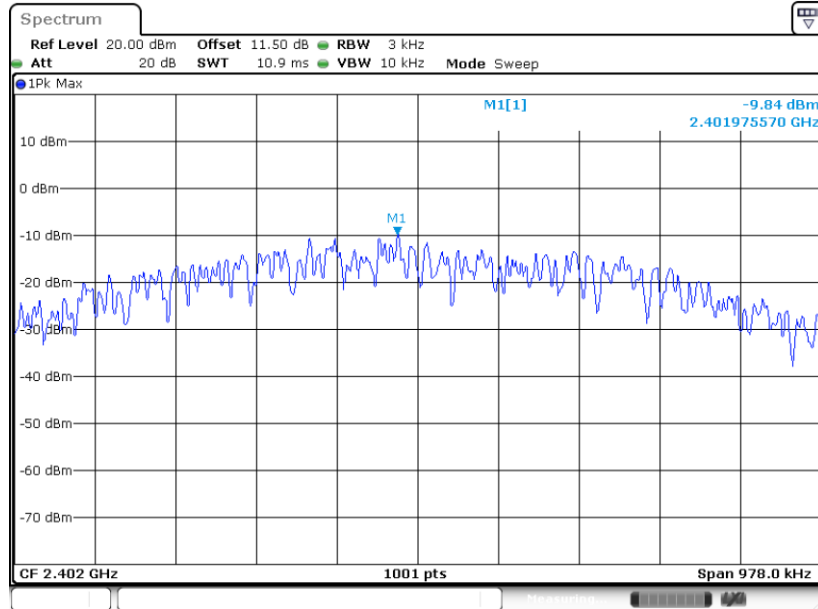


##### PSD 3kHz Plot on Channel 19

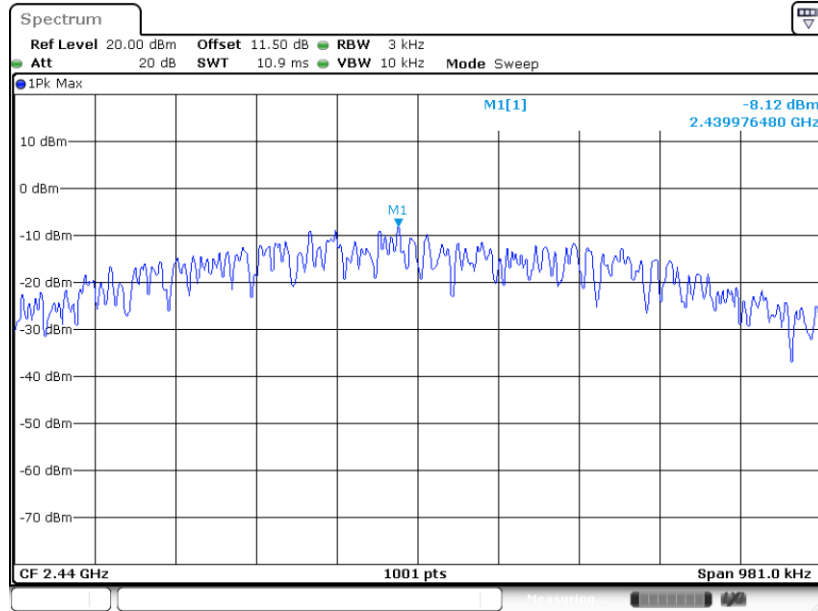




PSD 3kHz Plot on Channel 39

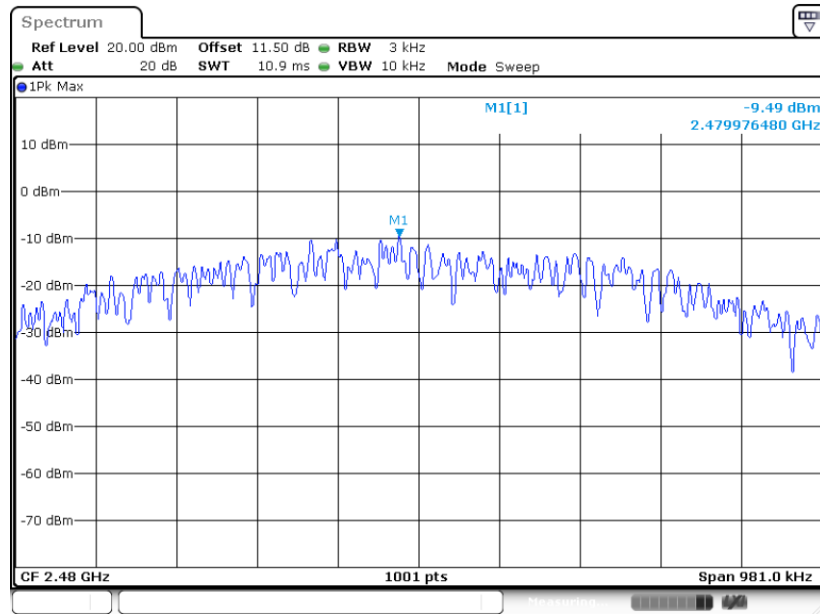

Date: 5.JUL.2022 19:11:49

Bluetooth LE 2Mbps

PSD 3kHz Plot on Channel 00

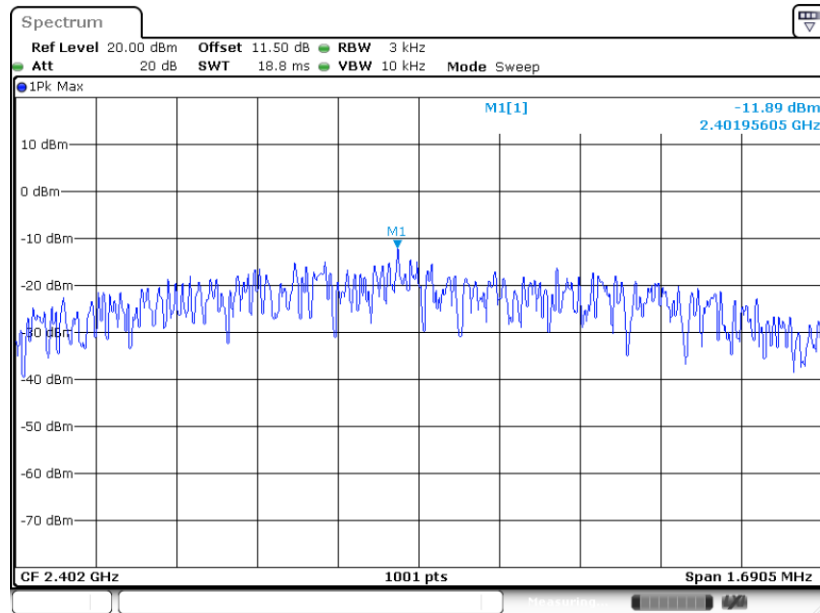


Date: 5.JUL.2022 19:15:46






PSD 3kHz Plot on Channel 19

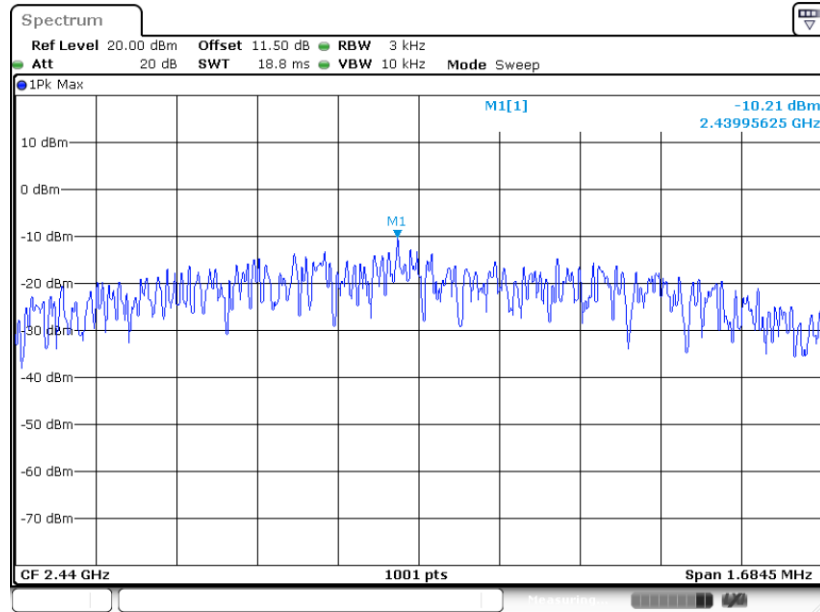

Date: 5.JUL.2022 19:22:33

PSD 3kHz Plot on Channel 39

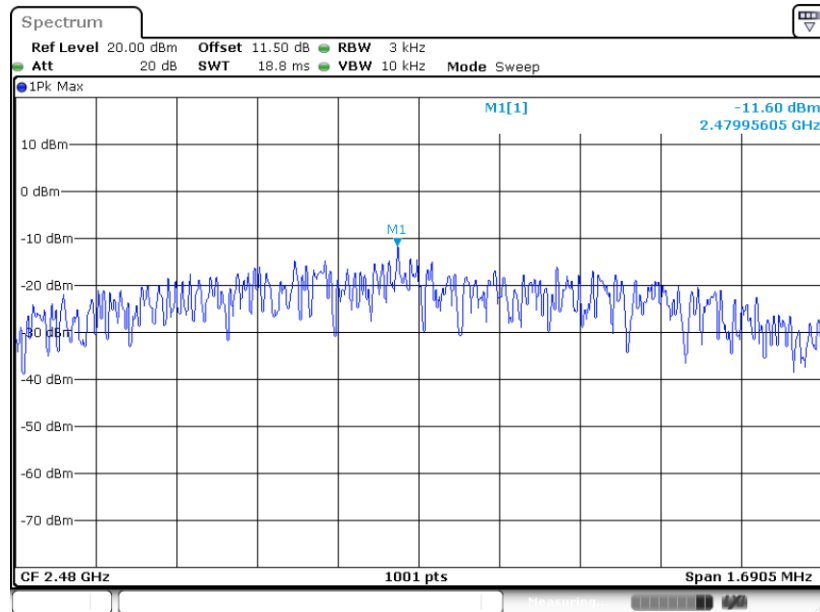

Date: 5.JUL.2022 19:25:15

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.

### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup






### 3.4.5 Test Result of Conducted Band Edges Plots


#### Bluetooth LE 1Mbps

##### Low Band Edge Plot on Channel 00

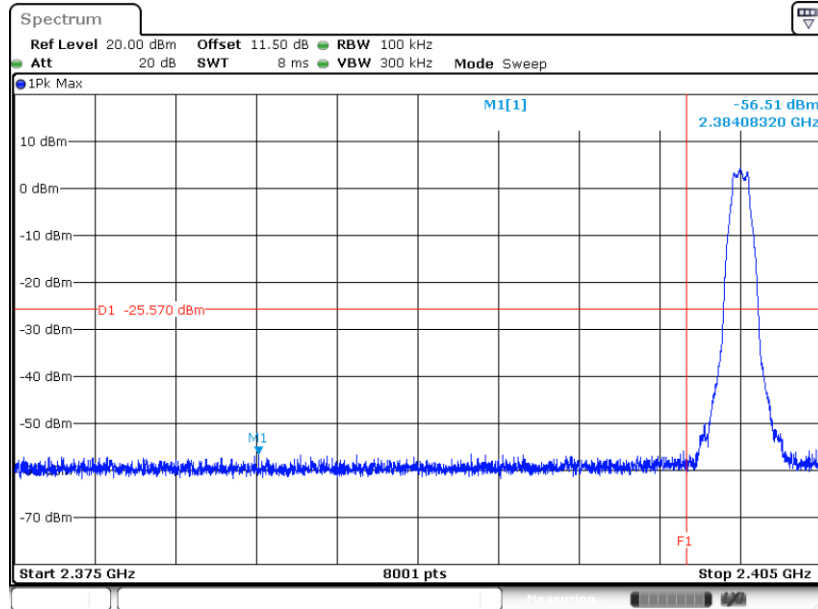

Date: 5.JUL.2022 19:05:38

##### High Band Edge Plot on Channel 39

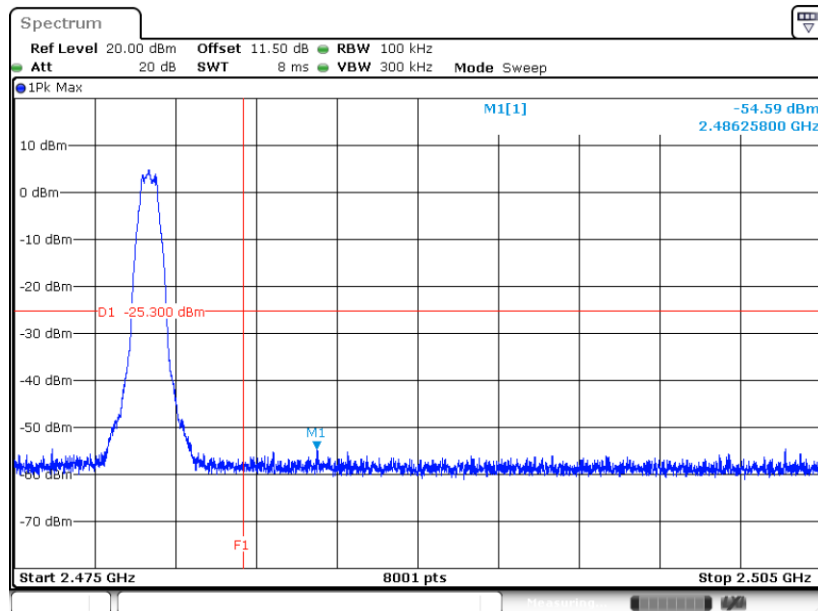


Date: 5.JUL.2022 19:12:17




Bluetooth LE 2Mbps

Low Band Edge Plot on Channel 00

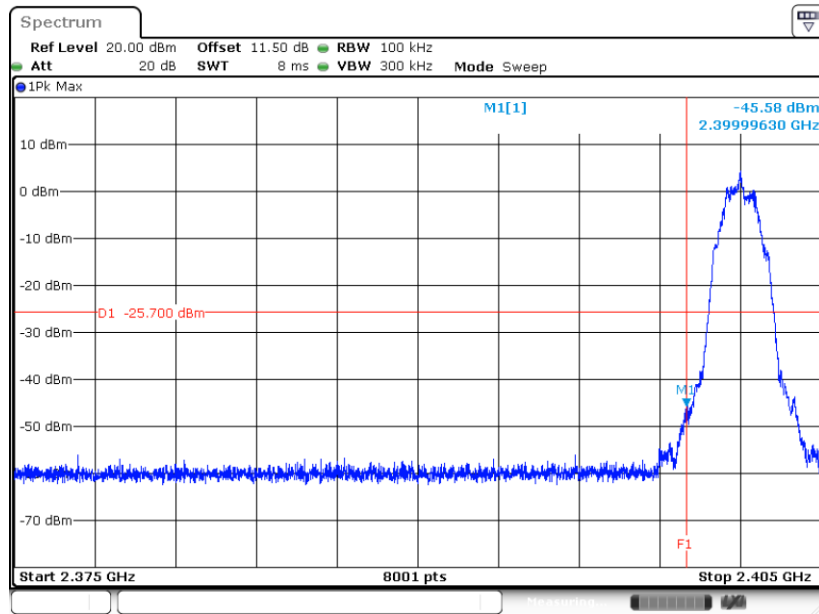

Date: 5.JUL.2022 19:19:23

High Band Edge Plot on Channel 39

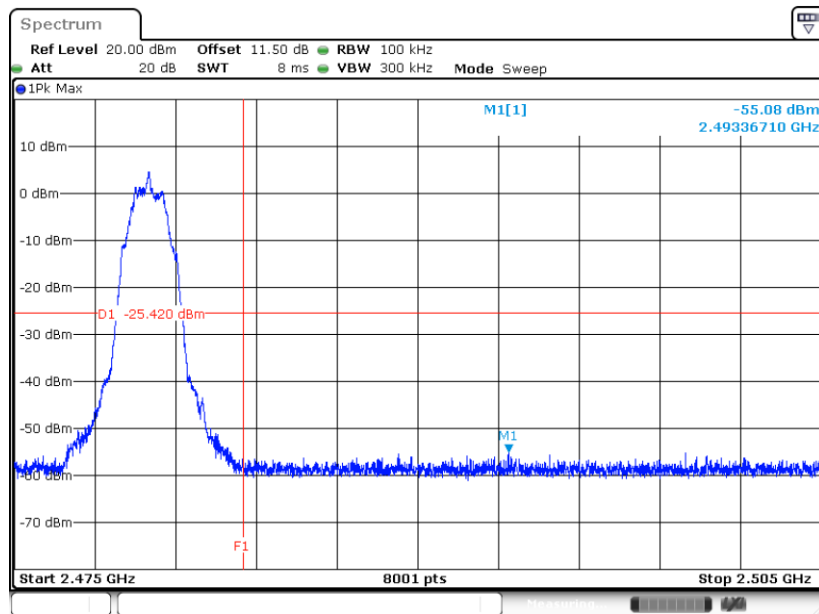

Date: 5.JUL.2022 19:25:38




### 3.4.6 Test Result of Conducted Spurious Emission Plots

#### Bluetooth LE 1Mbps

#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


#### GFSK Channel 00

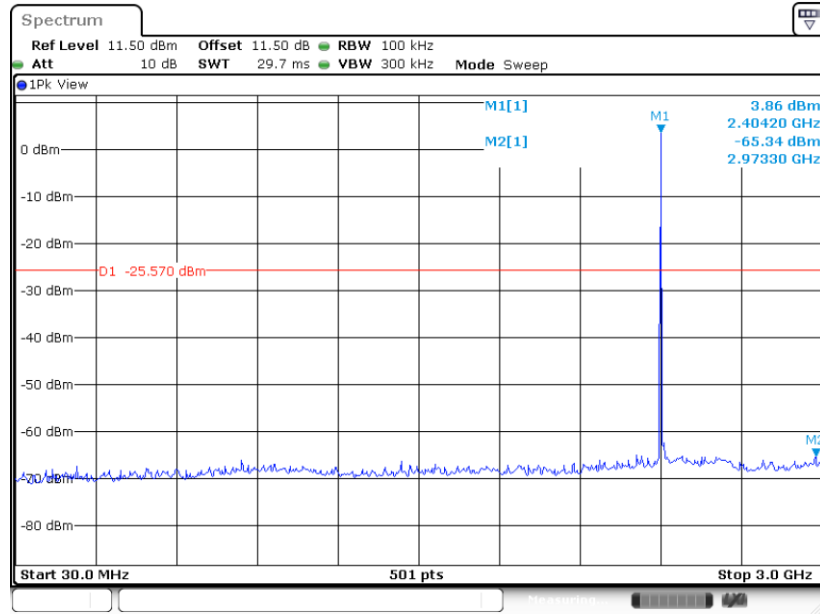

Date: 5.JUL.2022 19:06:38

#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


#### GFSK Channel 00

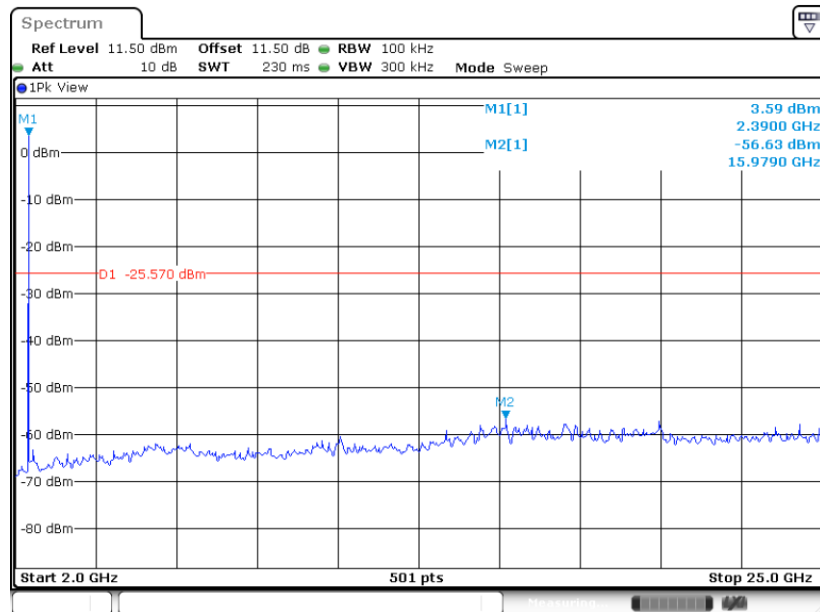

Date: 5.JUL.2022 19:06:48




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

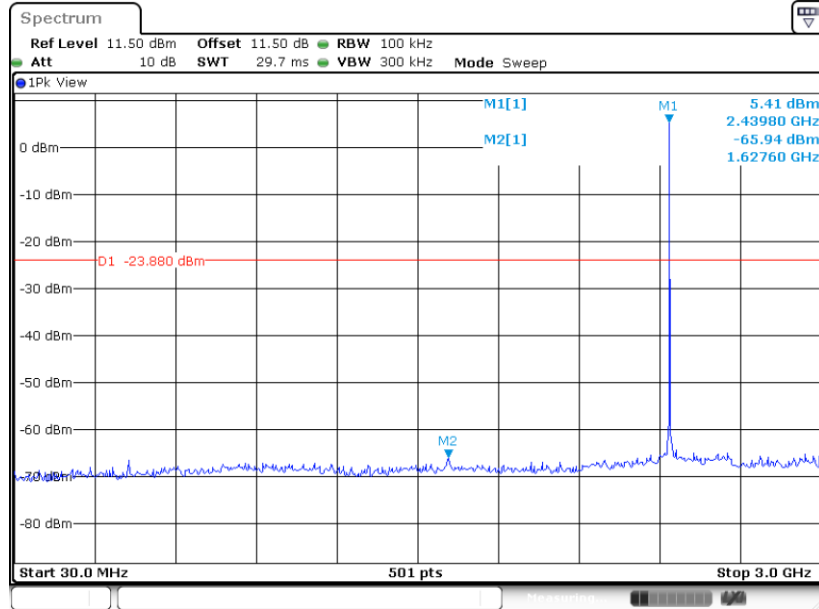

Date: 5.JUL.2022 19:09:40


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

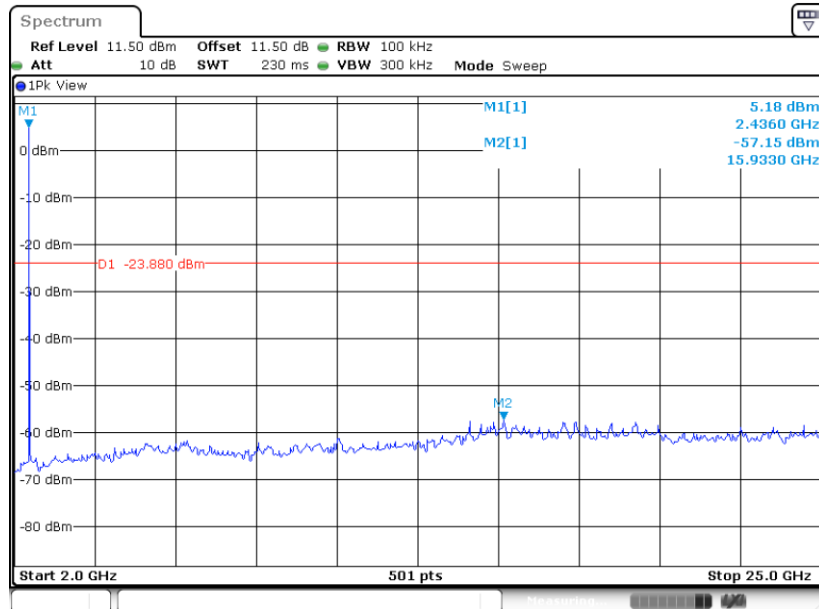

Date: 5.JUL.2022 19:09:52




### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

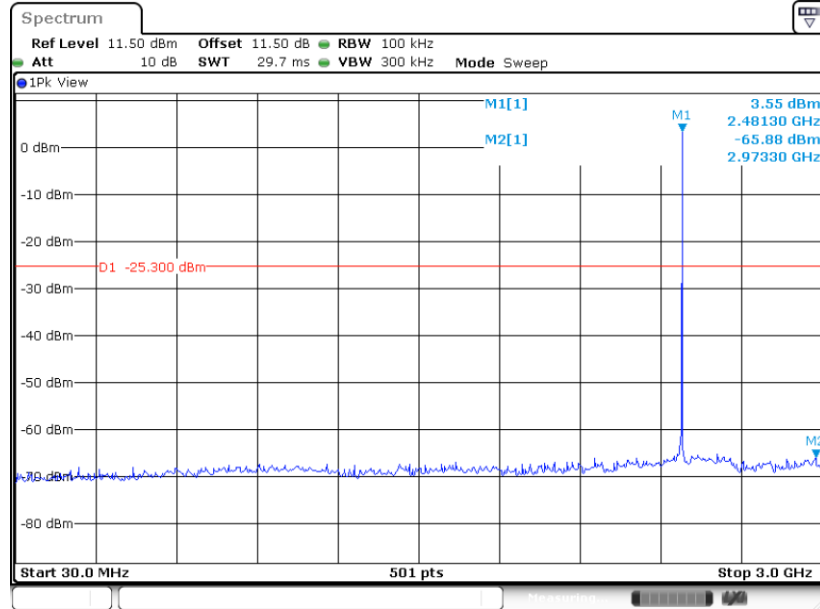

Date: 12.JUL.2022 13:39:07

### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

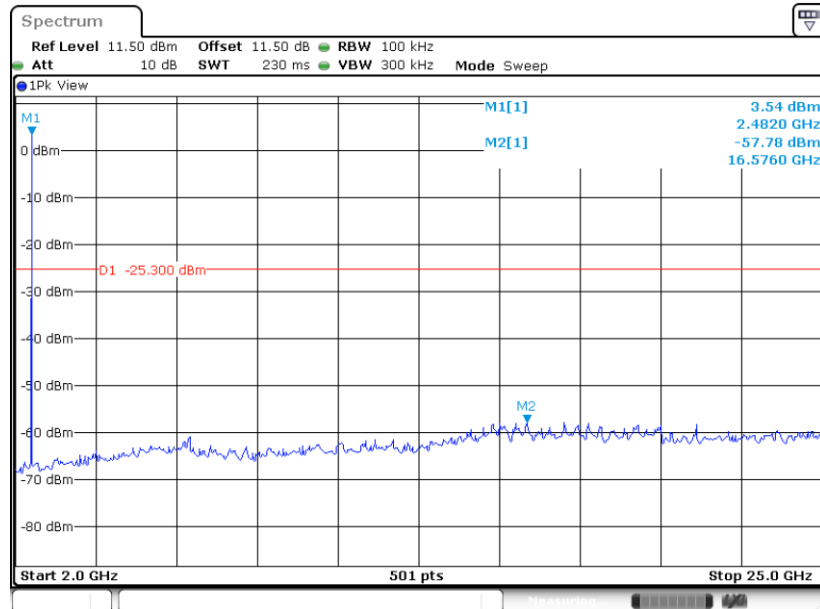


Date: 12.JUL.2022 13:39:22




Bluetooth LE 2Mbps

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 00

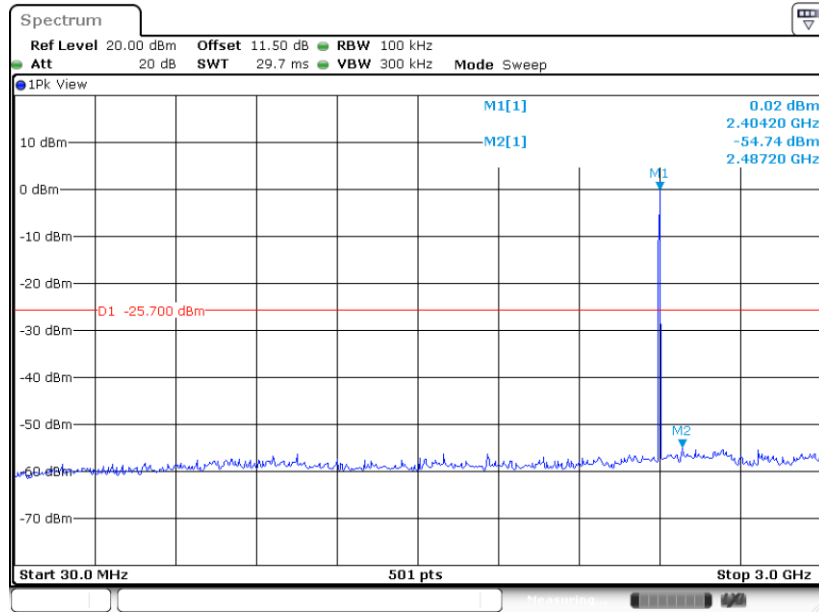

Date: 11.JUL.2022 14:37:56

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 00

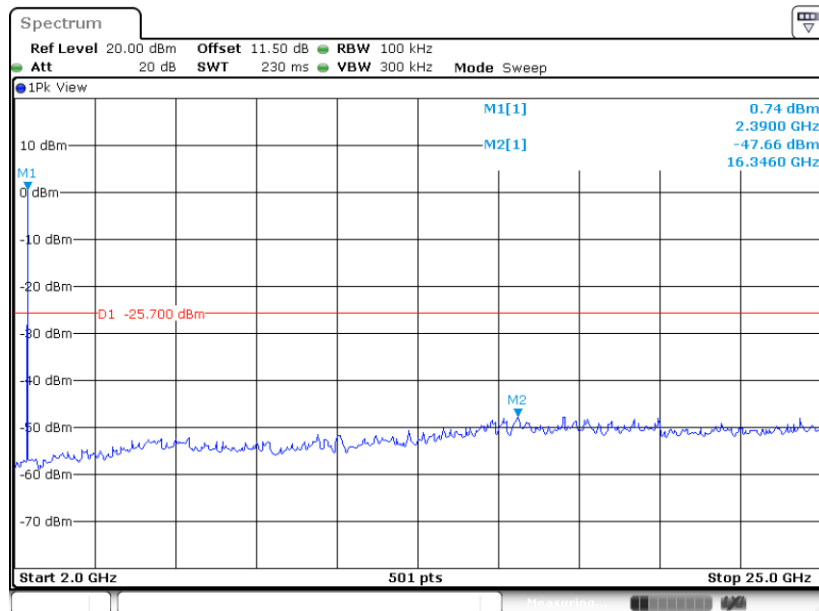


Date: 11.JUL.2022 14:38:16






Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

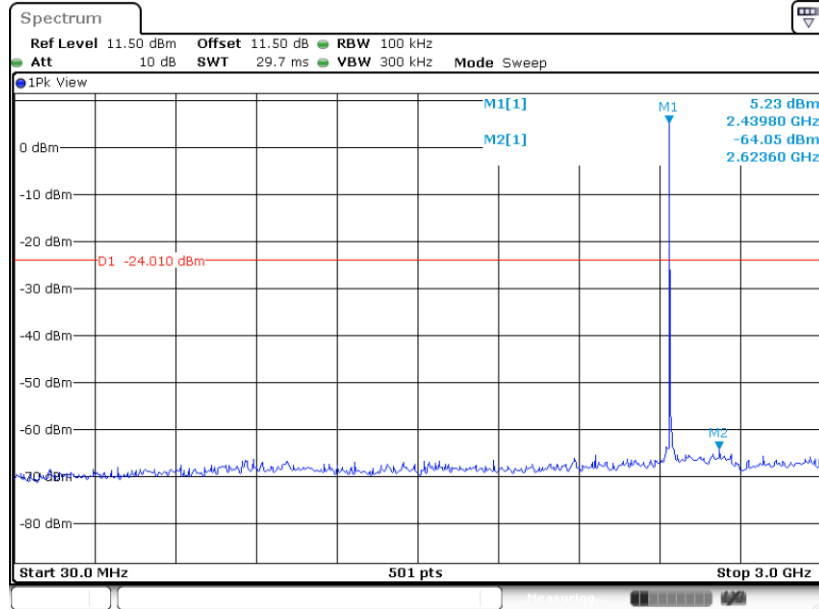

Date: 5.JUL.2022 19:23:02


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

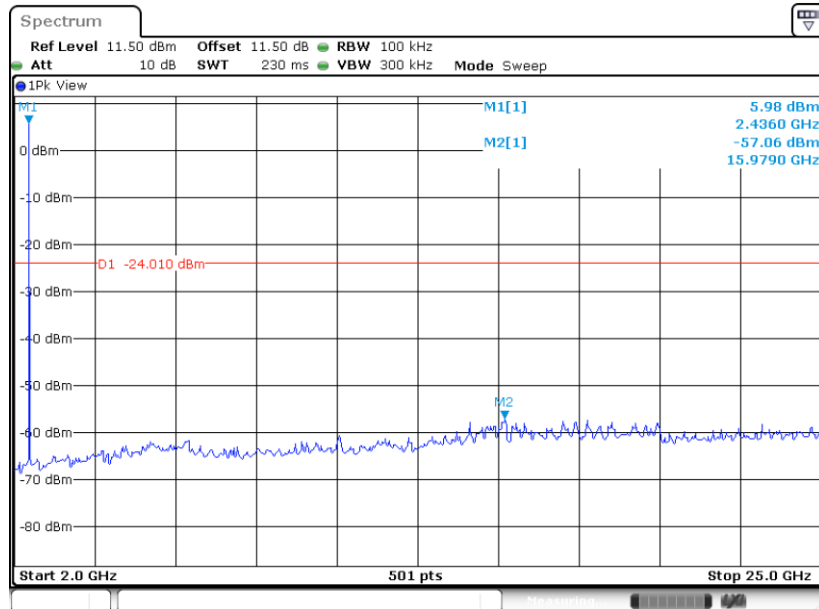

Date: 5.JUL.2022 19:23:13




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

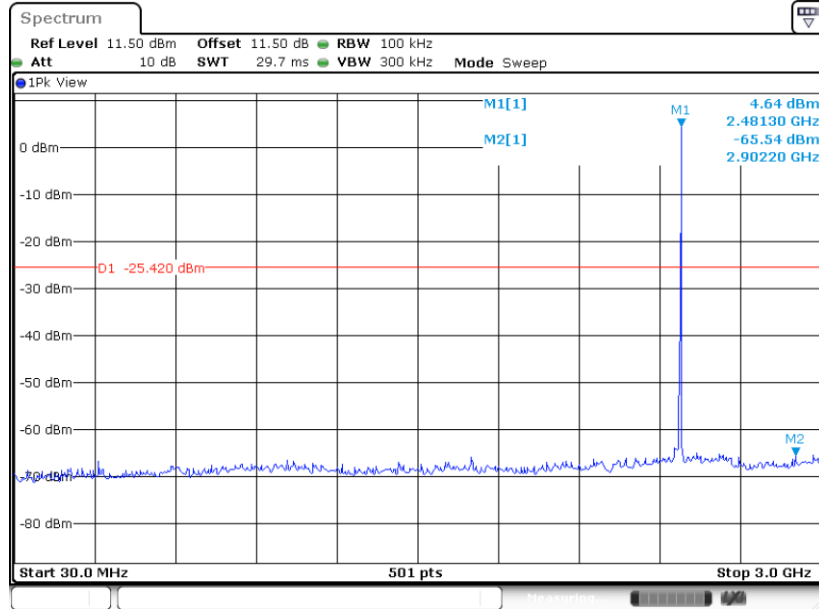

Date: 5.JUL.2022 19:26:11

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

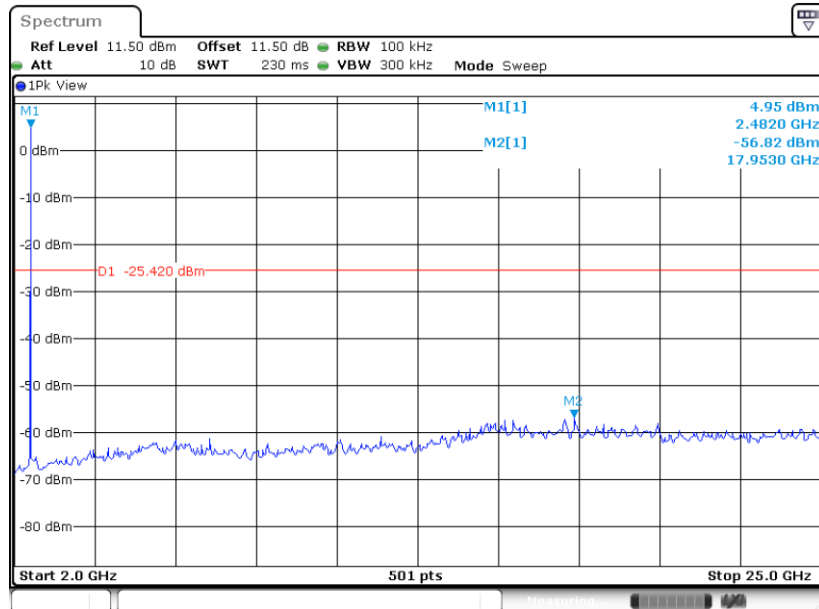

Date: 5.JUL.2022 19:26:24



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




### 3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

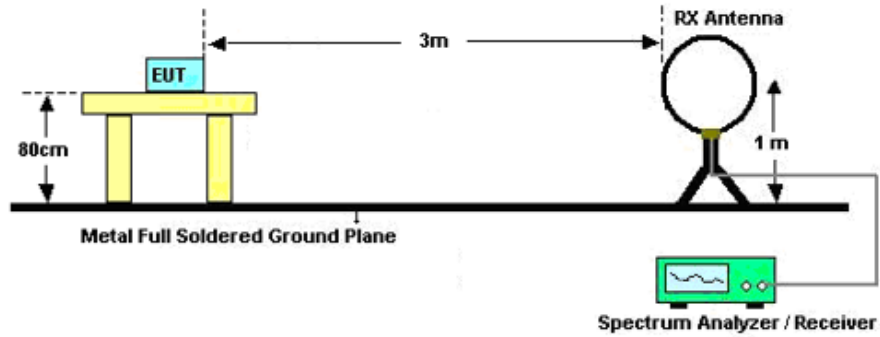

For radiated emissions from 30MHz to 1GHz

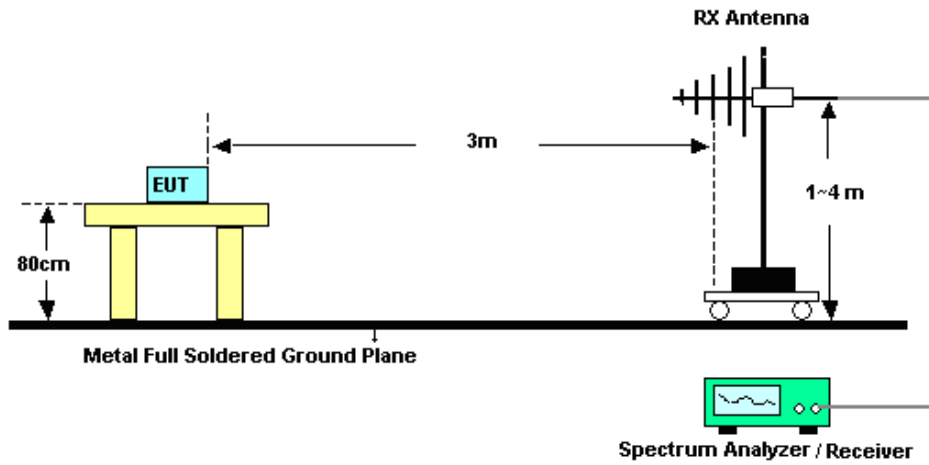

For radiated emissions above 1GHz

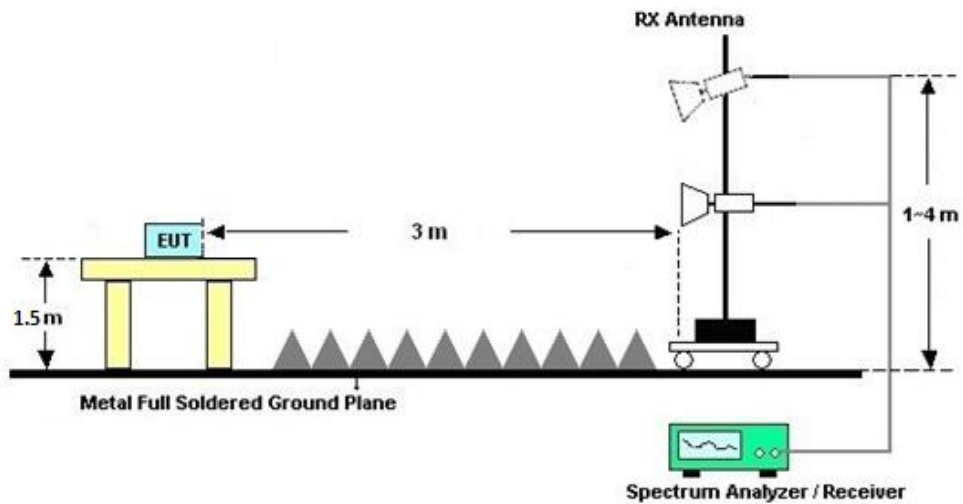



### **3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

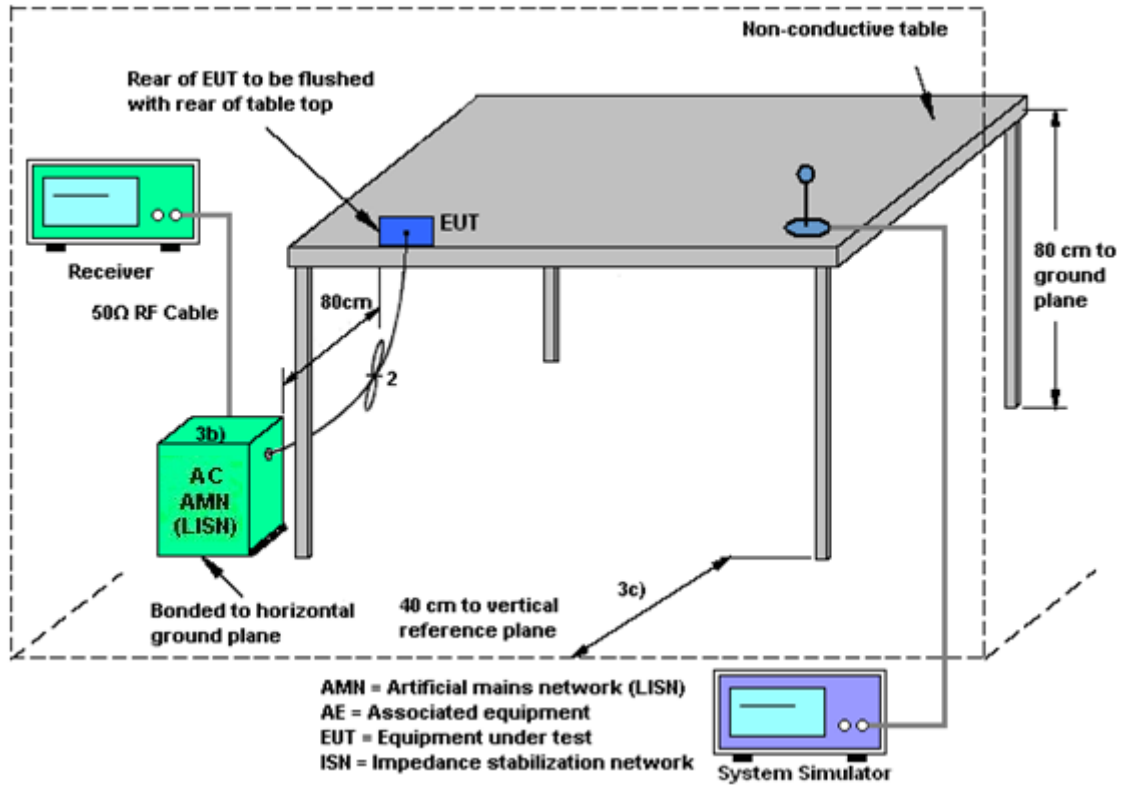

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.





## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9KHz~30GHz	Dec. 28, 2021	Jun. 30, 2022 ~Jul. 12, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 28, 2021	Jun. 30, 2022 ~Jul. 12, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 28, 2021	Jun. 30, 2022 ~Jul. 12, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 06, 2022	Jun. 30, 2022 ~Jul. 15, 2022	Apr. 05, 2023	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 06, 2022	Jun. 30, 2022 ~Jul. 15, 2022	Apr. 05, 2023	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 22, 2020	Jun. 30, 2022 ~Jul. 15, 2022	Jul. 21, 2022	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Jun. 22, 2020	Jun. 30, 2022 ~Jul. 15, 2022	Oct. 21, 2022	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 08, 2022	Jun. 30, 2022 ~Jul. 15, 2022	Apr. 07, 2023	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 10, 2022	Jun. 30, 2022 ~Jul. 15, 2022	Apr. 09, 2023	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 22, 2021	Jun. 30, 2022 ~Jul. 15, 2022	Oct. 21, 2022	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 22, 2021	Jun. 30, 2022 ~Jul. 15, 2022	Oct. 21, 2022	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Oct. 22, 2021	Jun. 30, 2022 ~Jul. 15, 2022	Oct. 21, 2022	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Jun. 30, 2022 ~Jul. 15, 2022	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 30, 2022 ~Jul. 15, 2022	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 30, 2022 ~Jul. 15, 2022	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Sep. 01, 2021	Jul. 04, 2022 ~ Jul. 05, 2022	Aug. 31, 2022	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 01, 2021	Jul. 04, 2022 ~ Jul. 05, 2022	Aug. 31, 2022	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 29, 2021	Jul. 04, 2022 ~ Jul. 05, 2022	Oct. 28, 2022	Conduction (CO01-SZ)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %
Conducted Power Spectral Density	±1.32 dB

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



## **Appendix A. Conducted Test Results**

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Chen Ran	Temperature:	21~25	°C
Test Date:	2022/6/30~2022/7/12	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	0.935	0.652	0.50	Pass
BLE	1Mbps	1	19	2440	0.935	0.654	0.50	Pass
BLE	1Mbps	1	39	2480	0.935	0.654	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	2.19	4.60	30.00	-2.95	1.65	36.00	Pass
BLE	1Mbps	1	19	2440	2.19	6.20	30.00	-2.95	3.25	36.00	Pass
BLE	1Mbps	1	39	2480	2.19	4.80	30.00	-2.95	1.85	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	4.43	-9.84	-2.95	8.00	Pass
BLE	1Mbps	1	19	2440	6.12	-8.12	-2.95	8.00	Pass
BLE	1Mbps	1	39	2480	4.70	-9.49	-2.95	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Chen Ran	Temperature:	21~25	°C
Test Date:	2022/6/30~2022/7/12	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	1.898	1.127	0.50	Pass
BLE	2Mbps	1	19	2440	1.898	1.123	0.50	Pass
BLE	2Mbps	1	39	2480	1.898	1.127	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	5.02	4.60	30.00	-2.95	1.65	36.00	Pass
BLE	2Mbps	1	19	2440	5.02	6.30	30.00	-2.95	3.35	36.00	Pass
BLE	2Mbps	1	39	2480	5.02	4.90	30.00	-2.95	1.95	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**


Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	4.30	-11.89	-2.95	8.00	Pass
BLE	2Mbps	1	19	2440	5.99	-10.21	-2.95	8.00	Pass
BLE	2Mbps	1	39	2480	4.58	-11.60	-2.95	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Lily	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

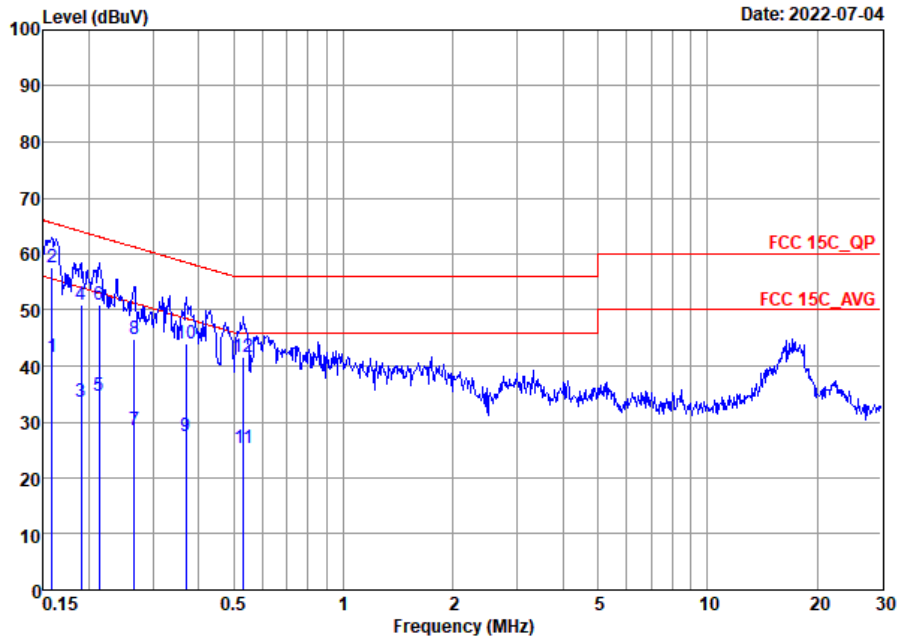


Site : CO01-SZ  
 Condition: FCC 15C QP LISN 20210901 L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	41.73	-13.83	55.56	20.80	10.20	10.73	Average
2 *	0.16	57.53	-8.03	65.56	36.60	10.20	10.73	QP
3	0.19	33.67	-20.35	54.02	13.20	10.20	10.27	Average
4	0.19	50.87	-13.15	64.02	30.40	10.20	10.27	QP
5	0.21	34.67	-18.43	53.10	14.21	10.19	10.27	Average
6	0.21	50.97	-12.13	63.10	30.51	10.19	10.27	QP
7	0.27	28.45	-22.80	51.25	7.60	10.17	10.68	Average
8	0.27	44.75	-16.50	61.25	23.90	10.17	10.68	QP
9	0.37	27.59	-20.93	48.52	6.20	10.09	11.30	Average
10	0.37	44.09	-14.43	58.52	22.70	10.09	11.30	QP
11	0.53	25.32	-20.68	46.00	3.50	10.11	11.71	Average
12	0.53	41.62	-14.38	56.00	19.80	10.11	11.71	QP



Test Engineer :	Lily	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

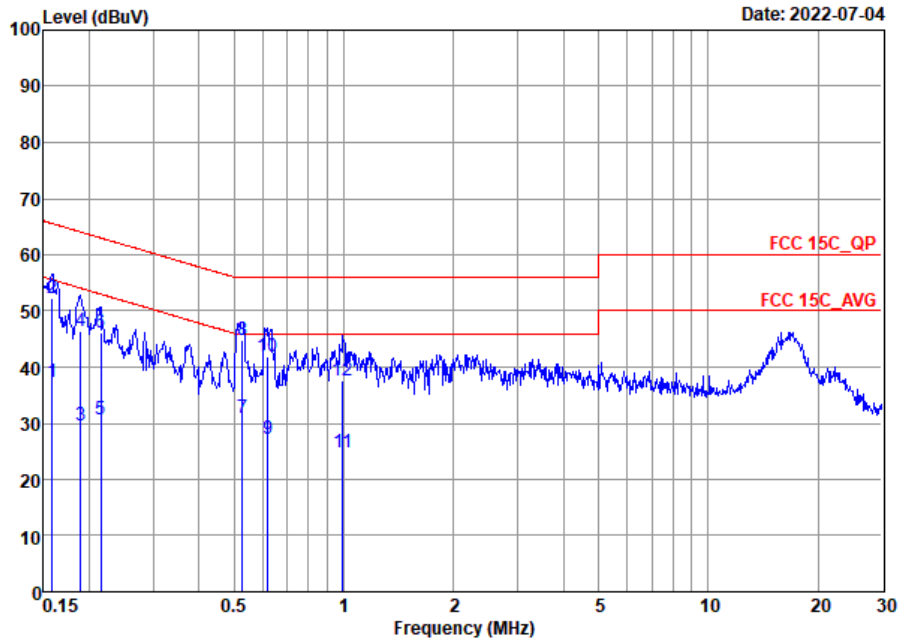

Site : CO01-SZ  
 Condition: FCC 15C\_QP LISN\_20210901\_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.16	37.23	-18.33	55.56	16.20	10.30	10.73	Average
2	0.16	52.33	-13.23	65.56	31.30	10.30	10.73	QP
3	0.19	29.66	-24.40	54.06	9.10	10.29	10.27	Average
4	0.19	46.46	-17.60	64.06	25.90	10.29	10.27	QP
5	0.22	30.76	-22.25	53.01	10.20	10.27	10.29	Average
6	0.22	46.06	-16.95	63.01	25.50	10.27	10.29	QP
7	0.53	30.93	-15.07	46.00	8.99	10.21	11.73	Average
8 *	0.53	44.83	-11.17	56.00	22.89	10.21	11.73	QP
9	0.62	27.30	-18.70	46.00	5.69	10.24	11.37	Average
10	0.62	41.80	-14.20	56.00	20.19	10.24	11.37	QP
11	0.99	24.87	-21.13	46.00	4.40	10.22	10.25	Average
12	0.99	37.57	-18.43	56.00	17.10	10.22	10.25	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)





## Appendix C. Radiated Spurious Emission

<Bluetooth LE 1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2389.905	48.34	-25.66	74	49.29	27.8	4.91	33.66	352	322	P	H
		2387.49	36.56	-17.44	54	37.51	27.8	4.91	33.66	352	322	A	H
	*	2402	100.72	-	-	101.68	27.79	4.91	33.66	352	322	P	H
	*	2402	100.41	-	-	101.37	27.79	4.91	33.66	352	322	A	H
		2364.285	48.74	-25.26	74	49.78	27.8	4.84	33.68	400	244	P	V
		2386.02	36.3	-17.7	54	37.25	27.8	4.91	33.66	400	244	A	V
	*	2402	100.47	-	-	101.42	27.8	4.91	33.66	400	244	P	V
	*	2402	100.24	-	-	101.19	27.8	4.91	33.66	400	244	A	V
BLE CH 19 2440MHz		2355.22	48.47	-25.53	74	49.52	27.8	4.84	33.69	127	202	P	H
		2383.5	36.24	-17.76	54	37.24	27.8	4.88	33.68	127	202	A	H
	*	2440	100.97	-	-	102	27.64	4.96	33.63	127	202	P	H
	*	2440	100.8	-	-	101.83	27.64	4.96	33.63	127	202	A	H
		2485.51	47.87	-26.13	74	48.97	27.53	4.99	33.62	127	202	P	H
		2485.65	36.23	-17.77	54	37.33	27.53	4.99	33.62	127	202	A	H
		2340.66	48.69	-25.31	74	49.77	27.8	4.81	33.69	370	46	P	V
		2337.16	36.22	-17.78	54	37.3	27.8	4.81	33.69	370	46	A	V
	*	2440	98.15	-	-	99.22	27.6	4.96	33.63	370	46	P	V
	*	2440	97.74	-	-	98.81	27.6	4.96	33.63	370	46	A	V
		2485.86	48.47	-25.53	74	49.57	27.53	4.99	33.62	370	46	P	V
		2487.26	36.33	-17.67	54	37.43	27.53	4.99	33.62	370	46	A	V
BLE CH 39 2480MHz	*	2480	98.19	-	-	94.68	32.14	4.99	33.62	117	297	P	H
	*	2480	96.74	-	-	93.23	32.14	4.99	33.62	117	297	A	H
		2492.16	52.65	-21.35	74	49.13	32.12	5	33.6	117	297	P	H
		2483.52	43.74	-10.26	54	40.24	32.13	4.99	33.62	117	297	A	H
	*	2480	101.93	-	-	98.42	32.14	4.99	33.62	194	257	P	V
	*	2480	101.27	-	-	97.76	32.14	4.99	33.62	194	257	A	V
		2491.68	53.01	-20.99	74	49.49	32.12	5	33.6	194	257	P	V
		2483.52	46.06	-7.94	54	42.56	32.13	4.99	33.62	194	257	A	V

**Remark** 1. No other spurious found.  
2. All results are PASS against Peak and Average limit line.



**2.4GHz 2400~2483.5MHz**  
**BLE (Harmonic @ 3m)**

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	44.79	-29.21	74	56.74	33.89	7.09	52.93	-	-	P	H
		4804	44.62	-29.38	74	56.57	33.89	7.09	52.93	-	-	P	V
BLE CH 19 2440MHz		4880	47.42	-26.58	74	59.27	33.8	7.19	52.84	-	-	P	H
		7320	43.95	-30.05	74	53.63	35.63	8.8	54.11	-	-	P	H
		4880	45.66	-28.34	74	57.51	33.8	7.19	52.84	-	-	P	V
		7320	44.17	-29.83	74	53.85	35.63	8.8	54.11	-	-	P	V
BLE CH 39 2480MHz		4960	42.95	-31.05	74	54.65	33.82	7.22	52.74	-	-	P	H
		7440	43.63	-30.37	74	53.04	35.68	8.95	54.04	-	-	P	H
		4960	42.74	-31.26	74	54.44	33.82	7.22	52.74	-	-	P	V
		7440	44.08	-29.92	74	53.49	35.68	8.95	54.04	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



<Bluetooth LE 2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		2390	52.88	-21.12	74	49.75	31.9	4.89	33.66	100	299	P	H
		2340.24	43.71	-10.29	54	40.75	31.86	4.79	33.69	100	299	A	H
	*	2402	97.55	-	-	94.39	31.91	4.91	33.66	100	299	P	H
	*	2402	96.53	-	-	93.37	31.91	4.91	33.66	100	299	A	H
		2358.405	52.52	-21.48	74	49.48	31.9	4.83	33.69	202	253	P	V
		2341.08	43.74	-10.26	54	40.78	31.86	4.79	33.69	202	253	A	V
	*	2402	101.55	-	-	98.39	31.91	4.91	33.66	202	253	P	V
	*	2402	100.41	-	-	97.25	31.91	4.91	33.66	202	253	A	V
BLE CH 19 2440MHz		2362.64	52.09	-21.91	74	49.03	31.9	4.84	33.68	125	300	P	H
		2369.36	43.54	-10.46	54	40.47	31.9	4.85	33.68	125	300	A	H
	*	2440	98.82	-	-	95.36	32.14	4.95	33.63	125	300	P	H
	*	2440	96.92	-	-	93.46	32.14	4.95	33.63	125	300	A	H
		2497.27	52.42	-21.58	74	48.9	32.11	5.01	33.6	125	300	P	H
		2488.03	44.16	-9.84	54	40.66	32.12	5	33.62	125	300	A	H
		2350.88	51.6	-22.4	74	48.58	31.9	4.81	33.69	198	259	P	V
		2384.06	43.62	-10.38	54	40.52	31.9	4.88	33.68	198	259	A	V
	*	2440	103.5	-	-	100.04	32.14	4.95	33.63	198	259	P	V
	*	2440	102.38	-	-	98.92	32.14	4.95	33.63	198	259	A	V
		2493.07	52.51	-21.49	74	49	32.11	5	33.6	198	259	P	V
		2490.2	43.96	-10.04	54	40.44	32.12	5	33.6	198	259	A	V
BLE CH 39 2480MHz	*	2480	97.34	-	-	93.83	32.14	4.99	33.62	118	305	P	H
	*	2480	95.95	-	-	92.44	32.14	4.99	33.62	118	305	A	H
		2499.68	52.11	-21.89	74	48.6	32.1	5.01	33.6	118	305	P	H
		2483.52	45.83	-8.17	54	42.33	32.13	4.99	33.62	118	305	A	H
	*	2480	101.93	-	-	98.42	32.14	4.99	33.62	192	254	P	V
	*	2480	100.81	-	-	97.3	32.14	4.99	33.62	192	254	A	V
		2485.16	52.75	-21.25	74	49.24	32.13	5	33.62	192	254	P	V
		2483.52	49.25	-4.75	54	45.75	32.13	4.99	33.62	192	254	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	44.66	-29.34	74	56.61	33.89	7.09	52.93	-	-	P	H
		4804	44.51	-29.49	74	56.46	33.89	7.09	52.93	-	-	P	V
BLE CH 19 2440MHz		4880	45.55	-28.45	74	57.4	33.8	7.19	52.84	-	-	P	H
		7320	43.63	-30.37	74	53.31	35.63	8.8	54.11	-	-	P	H
		4880	44.82	-29.18	74	56.67	33.8	7.19	52.84	-	-	P	V
		7320	42.74	-31.26	74	52.42	35.63	8.8	54.11	-	-	P	V
BLE CH 39 2480MHz		4960	43.32	-30.68	74	55.02	33.82	7.22	52.74	-	-	P	H
		7440	45.12	-28.88	74	54.53	35.68	8.95	54.04	-	-	P	H
		4960	43.2	-30.8	74	54.9	33.82	7.22	52.74	-	-	P	V
		7440	44.21	-29.79	74	53.62	35.68	8.95	54.04	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
2.4GHz BLE LF		88.2	20.05	-23.45	43.5	38.33	14.14	2.36	34.78	-	-	P	H
		172.59	21.83	-21.67	43.5	35.01	18.88	2.64	34.7	-	-	P	H
		291.9	20.89	-25.11	46	32.79	19.59	3.13	34.62	-	-	P	H
		410.24	22.23	-23.77	46	31.18	22.24	3.31	34.5	-	-	P	H
		610.06	25.22	-20.78	46	30	25.91	3.89	34.58	-	-	P	H
		742.95	27.08	-18.92	46	29.86	27.72	3.9	34.4	-	-	P	H
		72.68	30.5	-9.5	40	45.87	17.07	2.33	34.77	-	-	P	V
		174.53	31.99	-11.51	43.5	45.35	18.69	2.65	34.7	-	-	P	V
		291.9	22.22	-23.78	46	34.12	19.59	3.13	34.62	-	-	P	V
		492.69	23.06	-22.94	46	30.41	23.7	3.45	34.5	-	-	P	V
		627.52	25.41	-20.59	46	29.93	26.13	3.89	34.54	-	-	P	V
	755.56	27.57	-18.43	46	30.15	27.92	3.89	34.39	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



<Co-location>

2.4GHz 2400~2483.5MHz

BLE\_2M\_TX\_CH39 2480MHz & LTE Band41 Link (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
BLE_TX_ CH39 2480MHz & LTE Band41 Co-location	*	2480	101.26	-	-	97.75	32.14	4.99	33.62	100	305	P	H
		2480	100.16	-	-	96.65	32.14	4.99	33.62	100	305	A	H
		2485.44	53.24	-20.76	74	49.73	32.13	5	33.62	100	305	P	H
		2483.52	48.67	-5.33	54	45.17	32.13	4.99	33.62	100	305	P	H
	*	2480	102.82	-	-	99.31	32.14	4.99	33.62	192	269	A	V
		2480	101.7	-	-	98.19	32.14	4.99	33.62	192	269	P	V
		2492.84	53.02	-20.98	74	49.51	32.11	5	33.6	192	269	A	V
		2483.52	49.69	-4.31	54	46.19	32.13	4.99	33.62	192	269	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE\_TX\_CH39 2480MHz & LTE Band41 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
BLE_TX_ CH39 2480MHz & LTE Band41 Co-location		4960	43.73	-30.27	74	55.43	33.82	7.22	52.74	-	-	P	H
		5168	46.38	-27.62	74	57.31	34.24	7.51	52.68	-	-	A	H
		7440	44.74	-29.26	74	54.15	35.68	8.95	54.04	-	-	P	H
		7752	46.18	-27.82	74	55.04	35.7	9.29	53.85	-	-	P	H
		10336	48.05	-25.95	74	53.24	37.17	10.78	53.14	-	-	P	H
		4960	43.98	-30.02	74	55.68	33.82	7.22	52.74	-	-	P	V
		5168	46.33	-27.67	74	57.26	34.24	7.51	52.68	-	-	P	V
		7440	45.06	-28.94	74	54.47	35.68	8.95	54.04	-	-	P	V
		7752	44.93	-29.07	74	53.79	35.7	9.29	53.85	-	-	P	V
		10336	48.24	-25.76	74	53.43	37.17	10.78	53.14	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Note symbol

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	60.37	0.380	2.634	3KHz
Bluetooth LE 2Mbps	31.48	0.197	5.074	10KHZ


### Bluetooth LE 1Mbps

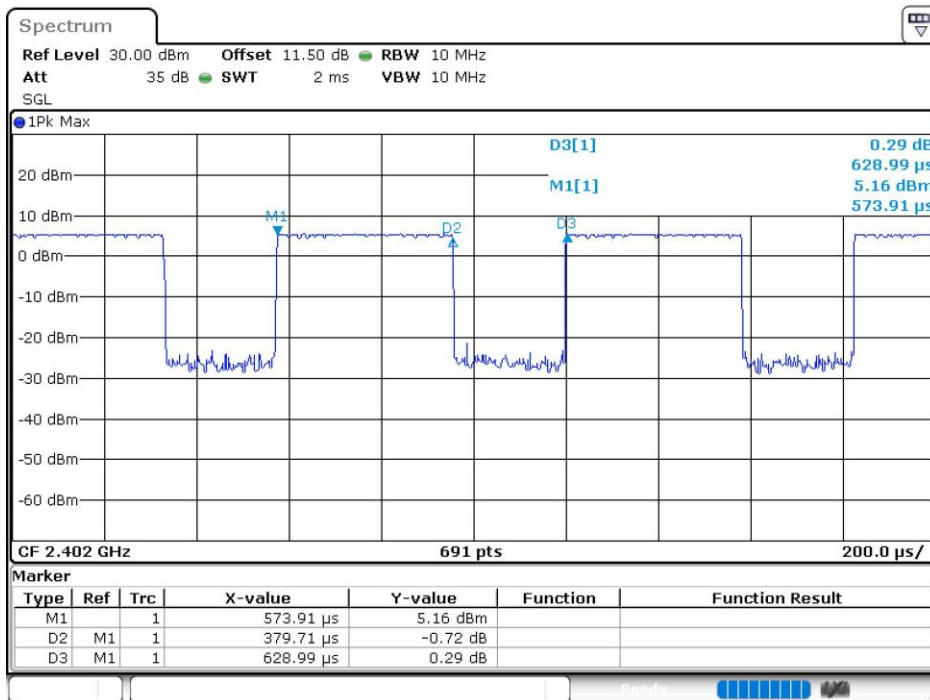

Date: 30.JUN.2022 20:15:01



Bluetooth LE 2Mbps

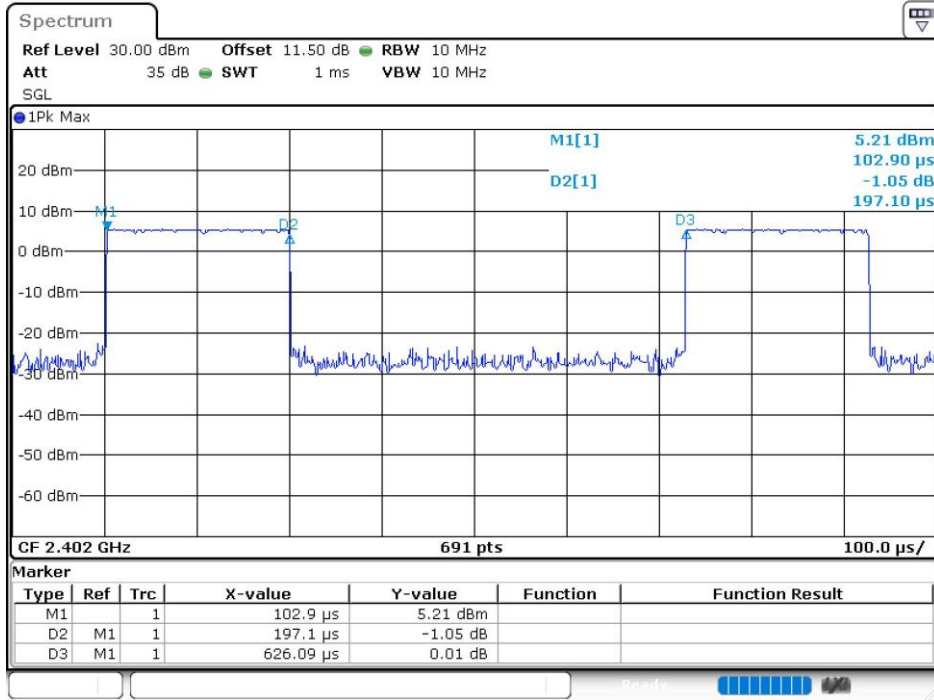

Date: 30.JUN.2022 20:17:55