

FCC TEST REPORT

For

Mobile Phone

Model Number: V2236

FCC ID: 2AUCY-V2236

Report Number : WT228002553

Test Laboratory : Shenzhen Academy of Metrology and Quality
Inspection
Site Location : NETC Building, No.4 Tongfa Rd., Xili, Nanshan,
Shenzhen, China
Tel : 0086-755-86928965
Fax : 0086-755-86009898-31396
Web : www.smq.com.cn
E-mail : emcrf@smq.com.cn

Revision History

No	Date	Remark
V1.0	2022.11.30	Initial issue

TEST REPORT DECLARATION

Applicant : vivo Mobile Communication Co., Ltd.
Address : No.1, vivo Road, Chang'an, Dongguan,Guangdong,China
Manufacturer : vivo Mobile Communication Co., Ltd.
Address : No.1, vivo Road, Chang'an, Dongguan,Guangdong,China
EUT Description : Mobile Phone
Model No. : V2236
Trade mark : vivo
Serial Number : /
FCC ID : 2AUCY-V2236

Test Standards:

FCC Part 15 Subpart B

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer:  Date: Nov.30, 2022
(Zhou Fangai 周芳媛)
Checked by:  Date: Nov.30, 2022
(Shi Changda 施昌达)
Approved by:  Date: Nov.30, 2022
(Lin Yixiang 林奕翔)

TABLE OF CONTENTS

TEST REPORT DECLARATION	3
1. TEST RESULTS SUMMARY	5
2. GENERAL INFORMATION.....	6
2.1. Report information.....	6
2.2. Laboratory Accreditation and Relationship to Customer	6
2.3. Measurement Uncertainty	6
3. PRODUCT DESCRIPTION.....	8
3.1. EUT Description.....	8
3.2. Block Diagram of EUT Configuration	9
3.3. Operating Condition of EUT	9
3.4. Support Equipment List	10
3.5. Test Conditions.....	10
3.6. Modifications	10
4. TEST EQUIPMENT USED	11
5. CONDUCTED EMISSION TEST	12
5.1. Test Standard and Limit	12
5.2. Test Procedure	12
5.3. Test Arrangement.....	12
5.4. Test Data	12
6. RADIATION EMISSION TEST.....	15
6.1. Test Standard and Limit	15
6.2. Test Procedure	15
6.3. Test Arrangement.....	16
6.4. Test Data	16

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
Conducted Emission	15.107	Pass
Radiation Emission	15.109	Pass

Remark: "N/A" means "Not applicable."

2. GENERAL INFORMATION

2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

The lab will not be liable for any loss or damage resulting for false, inaccurate, inappropriate or incomplete product information provided by the applicant/manufacturere.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

The Laboratory is registered to perform emission tests with VCCI, and the registration number are C-20048, G20076, R-20077, R-20078 and T-20047.

The Laboratory is Accredited Testing Laboratory of American Association for Laboratory Accreditation (A2LA) and certificate number is 3292.01.

2.3. Measurement Uncertainty

Conducted Emission
9 kHz~150 kHz $U=3.7\text{dB}$ $k=2$

150 kHz~30MHz $U=3.3\text{dB}$ $k=2$

Radiated Emission

30MHz~1000MHz $U=4.3\text{dB}$ $k=2$

1GHz~6GHz $U=4.6\text{ dB}$ $k=2$

6GHz~40GHz $U=5.1\text{dB}$ $k=2$

3. PRODUCT DESCRIPTION

NOTE: The extreme test conditions for temperature were declared by the manufacturer.

3.1. EUT Description

Description	: Mobile Phone
Manufacturer	: vivo Mobile Communication Co., Ltd.
Model Number	: V2236
Operating voltage	: DC3.6V (Low)/DC3.89V (Nominal)/DC4.45V (Max)
Test voltage	: AC 120V/60Hz
Software Version	: PD2236GF_EX_A_12.0.0.8.W30.V000L1
Hardware Version	: MP_0.1
Frequency	: GSM850: TX 824MHz~849MHz RX 869MHz~894MHz PCS1900: TX 1850MHz~1910MHz RX 1930MHz~1990MHz WCDMA Band V: TX 824MHz~849MHz RX 869MHz~894MHz WCDMA Band IV: TX 1710MHz~1755MHz RX 2110MHz~2155MHz WCDMA Band II: TX 1850MHz~1910MHz RX 1930MHz~1990MHz LTE Band 2: TX 1850MHz~1910MHz RX 1930MHz~1990MHz LTE Band 4: TX 1710MHz~1755MHz RX 2110MHz~2155MHz LTE Band 5: TX 824MHz~849MHz RX 869MHz~894MHz LTE Band 7: TX 2500MHz~2570MHz RX 2620MHz~2690MHz LTE Band 13: TX 777MHz~787MHz RX 746MHz~756MHz LTE Band 26: TX 814MHz~849MHz RX 859MHz~894MHz LTE Band 38: TX 2570MHz~2620MHz RX 2570MHz~2620MHz LTE Band 41: TX 2535MHz~2655MHz RX 2535MHz~2655MHz LTE Band 66: TX 1710MHz~1780MHz RX 2110MHz~2180MHz 2.4GWiFi: 2412MHz~2462MHz 5GWiFi: U-NII 1(5180~5240 MHz) U-NII 2A (5260~5320 MHz) U-NII 2C (5500~5700 MHz) U-NII 3(5745~5825 MHz)


BT:2402MHz~2480MHz

Type(s) of Modulation : GSM850/PCS1900: GMSK 8PSK
WCDMA: QPSK
LTE: QPSK, 16QAM, 64QAM
DSSS (DBPSK, DQPSK, CCK) for 802.11b
OFDM (BPSK, QPSK, 16QAM, 64QAM) for 802.11a/g/n
OFDM (BPSK, QPSK, 16QAM, 64QAM,256QAM) for 802.11ac

Antenna Type : Bluetooth: GFSK, pi/4-DQPSK, 8DPSK
GSM/WCDMA/LTE: PIFA Antenna
WLAN/Bluetooth: PIFA Antenna
GSM850:Ant0: -4.1 dBi, Ant1: -1.7 dBi
PCS1900: Ant0: -0.4 dBi, Ant1: 0.5 dBi
WCDMA Band V: Ant0: -4.1 dBi, Ant1: -1.7 dBi
WCDMA Band IV: Ant0: -1.4 dBi, Ant1: -1.1 dBi,
WCDMA Band II: Ant0: -0.4 dBi, Ant1: 0.5 dBi
LTE Band 2: Ant0: 0.4 dBi, Ant1: 0.5 dBi
LTE Band 4: Ant0: -1.4 dBi, Ant1: -1.1 dBi
LTE Band 5: Ant0: -4.1 dBi, Ant1: -1.7 dBi
LTE Band 7: Ant0: 3.3 dBi, Ant1: 2.3 dBi
LTE Band 13: Ant0: -6.4 dBi, Ant1: -3.6 dBi
LTE Band 26: Ant0: -4 dBi, Ant1: -1.6 dBi
LTE Band 38: Ant0: 3 dBi, Ant1: 2.3 dBi
LTE Band 41: Ant0: 3.3 dBi, Ant1: 2.4 dBi
LTE Band 66: Ant0: 1.1 dBi, Ant1: 1.1 dBi
2.4G WiFi: -2.95 dBi
5G WiFi: U-NII 1(5180~5240 MHz) -1.92 dBi
U-NII 2A (5260~5320 MHz) -1.92 dBi
U-NII 2C (5500~5700 MHz) -1.92 dBi
U-NII 3(5745~5825 MHz) -3.0 dBi
BT: -2.95 dBi

Remark: --

3.2. Block Diagram of EUT Configuration

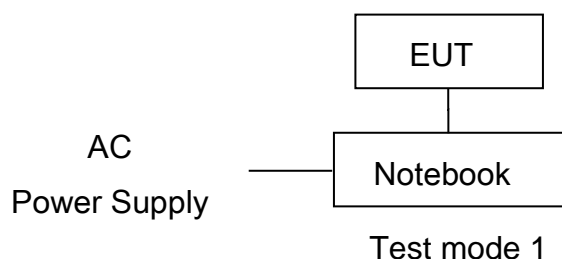

3.3. Operating Condition of EUT

- Test mode 1: Connected to a pc and data transmission.
- Test mode 2: Adapter+ GSM 850 Idle
- Test mode 3: Adapter+ WCDMA Band V Idle
- Test mode 4: Adapter+ LTE band 5 Idle
- Test mode 5: Adapter+ LTE band 13 Idle
- Test mode 6: Adapter+ LTE band 26 Idle

EUT has more than one typical operation, only the worst test mode will be recorded in this report.

The Radiated emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (X plane).

3.4. Support Equipment List

Table 2 Support Equipment List

Name	Model No.	S/N	Manufacturer
Adapter for EUT	V1020D-US	---	Dongguan Phitek Electronics Co., Ltd.
Rechargeable Li-ion Polymer Battery for EUT	B-Y1	---	Sunwoda Electronic CO.,LTD.
USB Cable for EUT	BK-C-19-B	---	---
Notebook	HP ProBook 440 G6	---	HP

3.5. Test Conditions

Date of test : Nov.11, 2022- Nov.14, 2022

Date of EUT Receive : Nov.03, 2022

Temperature: 21°C-24°C

Relative Humidity: 50%-57%

3.6. Modifications

No modification was made.

4. TEST EQUIPMENT USED

Table 3 Test Equipment List

No.	Equipment	Manufacturer	Model No.	LAST CALIB	Period
Conducted Emission					
SB3319	Test Receiver	R&S	ESCS30	Nov.03,2022	1 Year
SB8501/06	AMN	R&S	ESH2-Z5	Jan.20,2022	1 Year
SB9548	Shielded Room	Albatross	SR	Sep.06,2022	1 Year
Radiated Emission					
SB17366	Test Receiver	R&S	ESR26	Jun.22,2022	1 Year
SB3955	Broadband Antenna	Schwarzbeck	VULB9163	Dec.30,2021	1 Year
SB13958	Horn Antenna	R&S	HF907	Mar.22,2022	1 Year
SB20321/02	Spectrum Analyzer	R&S	FSW43	Dec.21,2021	1 Year
SB8501/11	Antenna	R&S	3160-09	Mar.09,2020	3 Years
SB8501/12	Antenna	R&S	3160-10	Mar.17,2020	3 Years
SB8501/16	Pre-Amplifier	R&S	SCU-26	Jan.20,2022	1 Year
SB9059	Pre-Amplifier	R&S	SCU-40	Aug.23,2022	1 Year
SB9555/01	Semi Anechoic Chamber	Albatross	9×6×6(m)	Aug.16,2022	1 Year

5. CONDUCTED EMISSION TEST

5.1. Test Standard and Limit

5.1.1. Test Standard

FCC Part 15: Section 15.107

5.1.2. Test Limit

Table 4 Conducted Emission Test Limit (Class B)

Frequency	Power Port limits (dB μ V)	
	Quasi-peak	Average
0.15MHz ~ 0.5MHz	66~56*	56~46*
0.5MHz ~ 5 MHz	56	46
5 MHz ~ 30MHz	60	50

* Decreasing linearly with logarithm of the frequency

5.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver is used to test the emissions from both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.

5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

5.4. Test Data


The emissions don't show in below are too low against the limits. Refer to the test curves.

Table 5 Conducted Emission Test Data at mains Port


Test mode: 1								
	Frequency (MHz)	Correction Factor (dB)	Quasi-Peak			Average		
			Reading (dB μ V)	Emission Level (dB μ V)	Limits (dB μ V)	Reading (dB μ V)	Emission Level (dB μ V)	Limits (dB μ V)
Line	0.166	9.7	42.4	52.1	65.2	27.7	37.4	55.2
	0.230	9.7	33.8	43.5	62.4	22.1	31.8	52.4
	0.562	9.8	19.0	28.8	56	12.8	22.6	46
	0.806	9.8	14.9	24.7	56	8.3	18.1	46
	4.272	9.9	24.2	34.1	56	16.2	26.1	46
	4.336	9.9	22.1	32.0	56	14.9	24.8	46
Neutral	0.150	9.7	41.5	51.2	66	26.5	36.2	56
	0.158	9.7	42.9	52.6	65.6	26.0	35.7	55.6
	0.214	9.7	32.1	41.8	63.0	20.7	30.4	53.0
	0.578	9.8	17.8	27.6	56	11.3	21.1	46
	0.738	9.8	17.4	27.2	56	9.4	19.2	46
	4.380	9.9	25.9	35.8	56	16.0	25.9	46

- REMARKS: 1. Emission level (dBuV) =Read Value (dBuV) + Correction Factor (dB)
 2. Correction Factor (dB) =LISN Factor (dB) + Cable Factor (dB) +Limiter Factor (dB)
 3. The other emission levels were more than 20dB below the limits.

Line

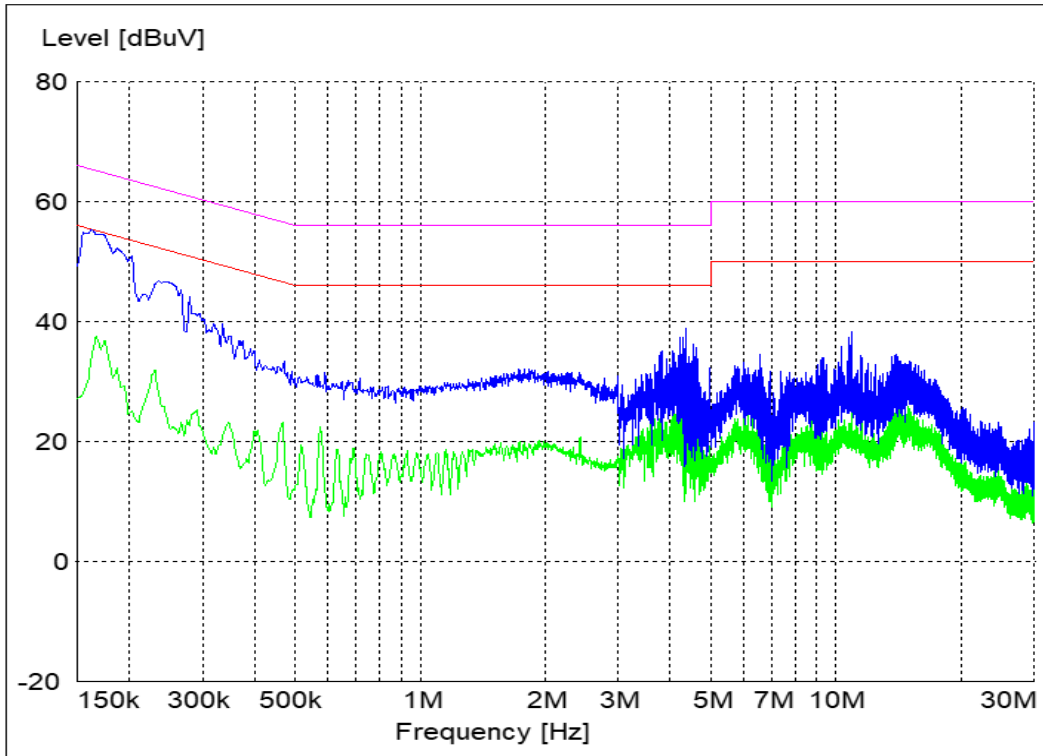

Neutral

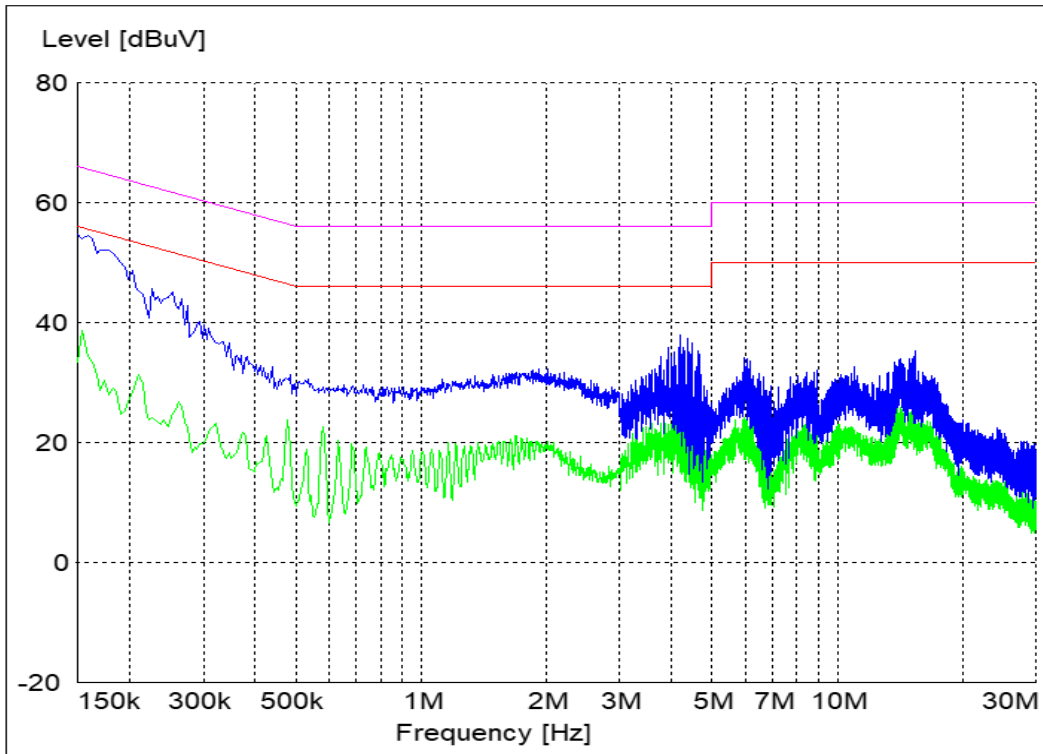

6. RADIATION EMISSION TEST

6.1. Test Standard and Limit

6.1.1. Test Standard

FCC Part 15: Section 15.109

6.1.2. Test Limit

Table 6 Radiation Emission Test Limit for FCC (Class B)

Frequency	Test distance	Limit dB(μ V/m)		
		Quasi-peak	Average	Peak
30MHz~88MHz	3m	40	/	/
88MHz~216MHz	3m	43.5		
216MHz~960MHz	3m	46		
960MHz~1000MHz	3m	54		
>1000MHz	3m		54	74
Conditional testing procedure for above 1 GHz :				
Highest frequency generated or used in the device or on which the device operates or tunes (MHz)		Upper frequency of measurement range (MHz)		
Below 1.705		30		
1.705~108		1000		
108~500		2000		
500~1000		5000		
Above 1000		5th harmonic of the highest frequency or 40 GHz, whichever is lower.		

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

6.2. Test Procedure

The EUT is placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set **3 meters** away from the receiving antenna, which is mounted on an antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

RBW = 100 kHz (less than or equal to 1 GHz); 1 MHz (above 1 GHz)

VBW \geq 3 x RBW

Detector = Peak & Quasi-Peak (frequency range 30 MHz to 1 GHz);

Peak & Average (frequency range above 1 GHz);

Changing VBW to 10 Hz for average measurement

The use of a higher-than-specified video bandwidth produces a conservative measurement result.

6.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

6.4. Test Data

The emissions don't show in below are too low against the limits. Refer to the test curves.

Table 7 Radiated Emission Test Data


Test mode: 1								
Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Reading (dBµV/m)	Level (dBµV/m)	Polarity (Horizontal/Vertical)	Limits (dBµV/m)	Margin (dB)	Note
81.507	1.0	8.5	8.7	18.2	Horizontal	40	21.8	QP
127.970	1.2	10.5	7.6	19.3	Horizontal	43.5	24.2	QP
188.595	1.5	9.7	10.6	21.8	Horizontal	43.5	21.7	QP
211.390	1.8	10.6	-7.3	5.1	Horizontal	43.5	38.4	QP
221.381	1.7	11.2	11.6	24.5	Horizontal	46	21.5	QP
264.352	1.9	12.1	15.2	29.2	Horizontal	46	16.8	QP
60.264	1.0	12.7	4.7	18.4	Vertical	40	21.6	QP
65.405	0.9	10.7	7.2	18.8	Vertical	40	21.2	QP
129.231	1.2	10.5	19.9	31.6	Vertical	43.5	11.9	QP
131.074	1.3	10.5	15.8	27.6	Vertical	43.5	15.9	QP
196.452	1.7	10.6	8.3	20.6	Vertical	43.5	22.9	QP
210.032	1.7	10.6	12.4	24.7	Vertical	43.5	18.8	QP
1329.800	-40.8	24.3	69.5	53.0	Vertical	74	21.0	PK
1991.100	-40.4	26.9	59.7	46.2	Vertical	74	27.8	PK
8983.200	-36.2	37.0	50.1	50.9	Vertical	74	23.1	PK
10135.800	-34.4	37.3	49.3	52.2	Vertical	74	21.8	PK
11749.200	-35.7	37.4	51.8	53.5	Vertical	74	20.5	PK
17751.200	-31.4	43.1	49.5	61.2	Vertical	74	12.8	PK
1438.600	-40.8	25.1	56.9	41.2	Horizontal	74	32.8	PK
8998.500	-36.1	37.0	50.6	51.5	Horizontal	74	22.5	PK
11330.900	-35.6	37.3	50.7	52.4	Horizontal	74	21.6	PK
15339.500	-34.0	40.8	50.8	57.6	Horizontal	74	16.4	PK
17430.500	-32.1	42.9	49.7	60.5	Horizontal	74	13.5	PK
16954.600	-32.3	42.2	50.5	60.4	Horizontal	74	13.6	PK
1329.800	-40.8	24.3	42.4	25.9	Vertical	54	28.1	AV
1991.100	-40.4	26.9	40.1	26.6	Vertical	54	27.4	AV
8983.200	-36.2	37.0	38.0	38.8	Vertical	54	15.2	AV
10135.800	-34.4	37.3	36.6	39.5	Vertical	54	14.5	AV
11749.200	-35.7	37.4	38.5	40.2	Vertical	54	13.8	AV

17751.200	-31.4	43.1	36.0	47.7	Vertical	54	6.3	AV
1438.600	-40.8	25.1	39.1	23.4	Horizontal	54	30.6	AV
8998.500	-36.1	37.0	37.9	38.8	Horizontal	54	15.2	AV
11330.900	-35.6	37.3	38.0	39.7	Horizontal	54	14.3	AV
15339.500	-34.0	40.8	37.4	44.2	Horizontal	54	9.8	AV
17430.500	-32.1	42.9	36.4	47.2	Horizontal	54	6.8	AV
16954.600	-32.3	42.2	37.2	47.1	Horizontal	54	6.9	AV


Emission level (dBuV)=Read Value(dBuV/m) + Antenna Factor(dB)+ Cable Loss +preamp(dB)

30MHz-1GHz

Horizontal

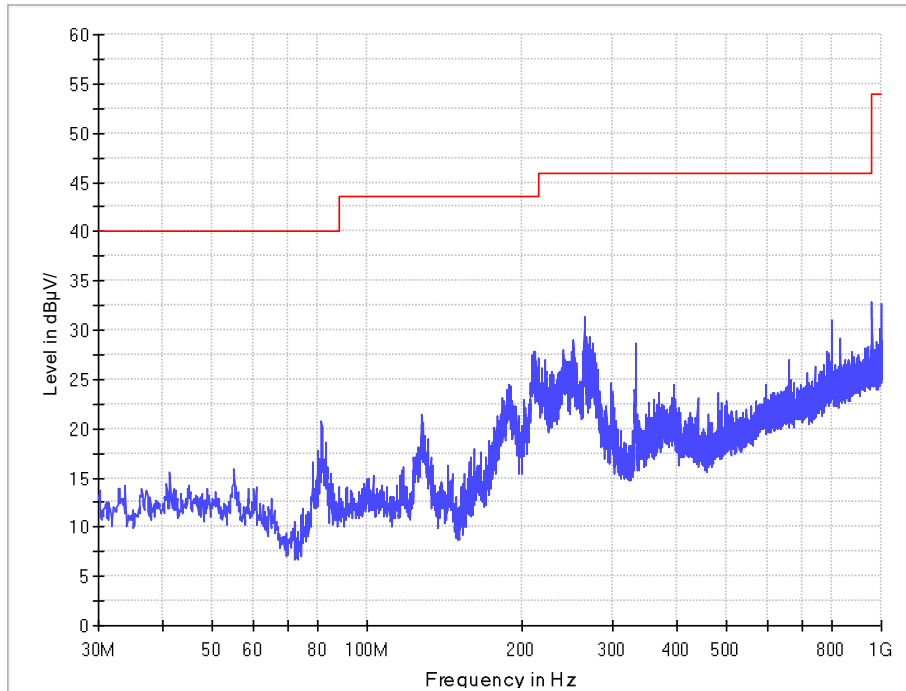


Vertical

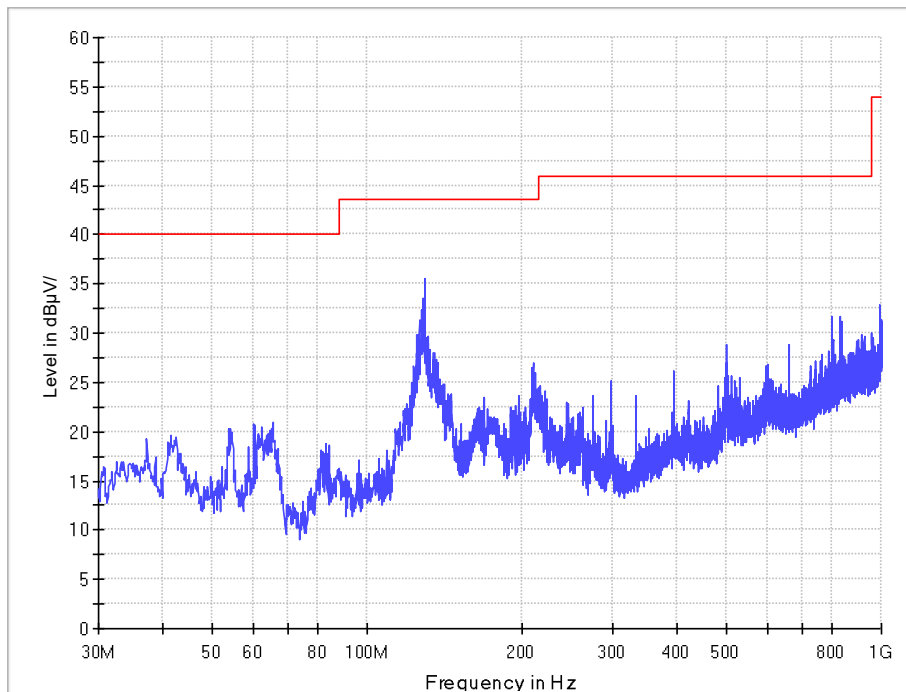


1GHz-18GHz

Horizontal

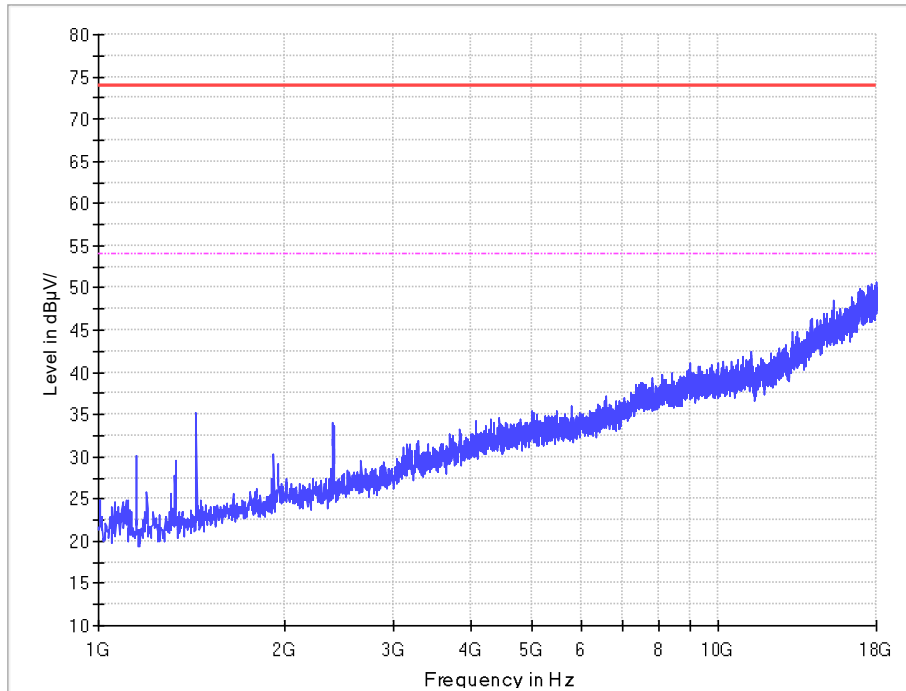


Vertical

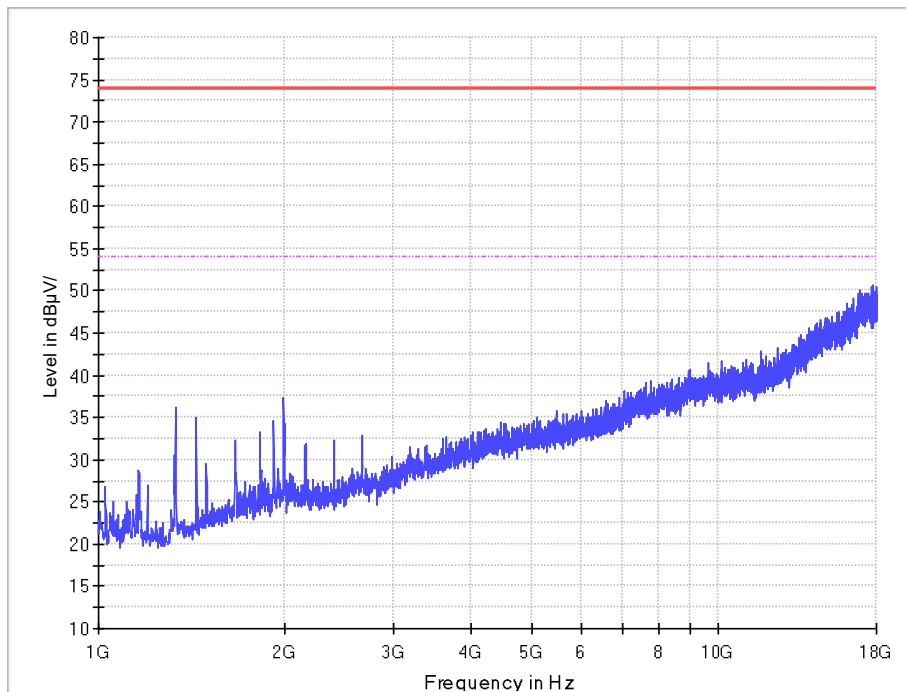


18GHz-26.5GHz

Horizontal

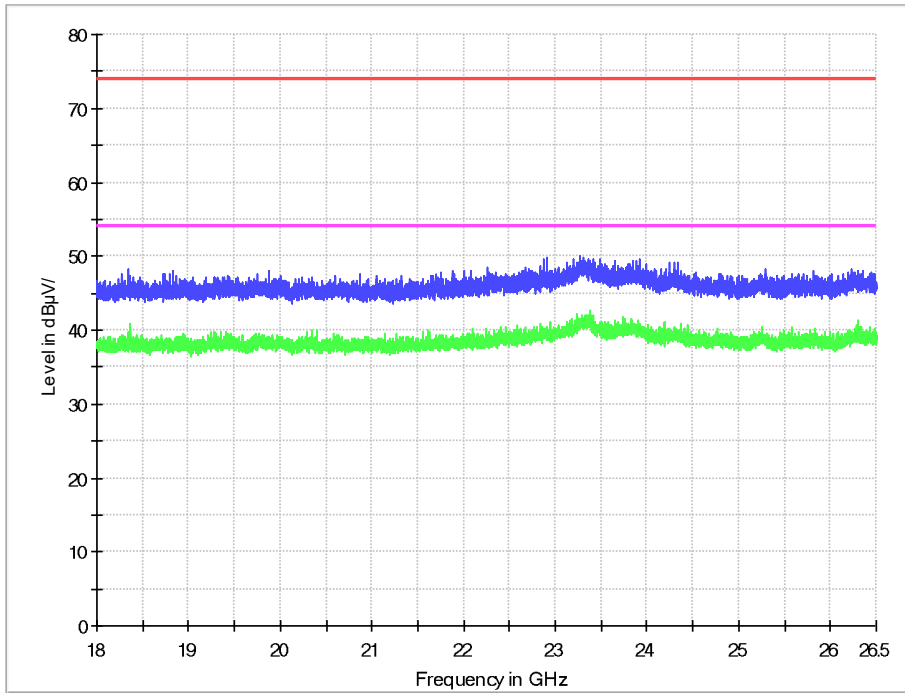


Vertical

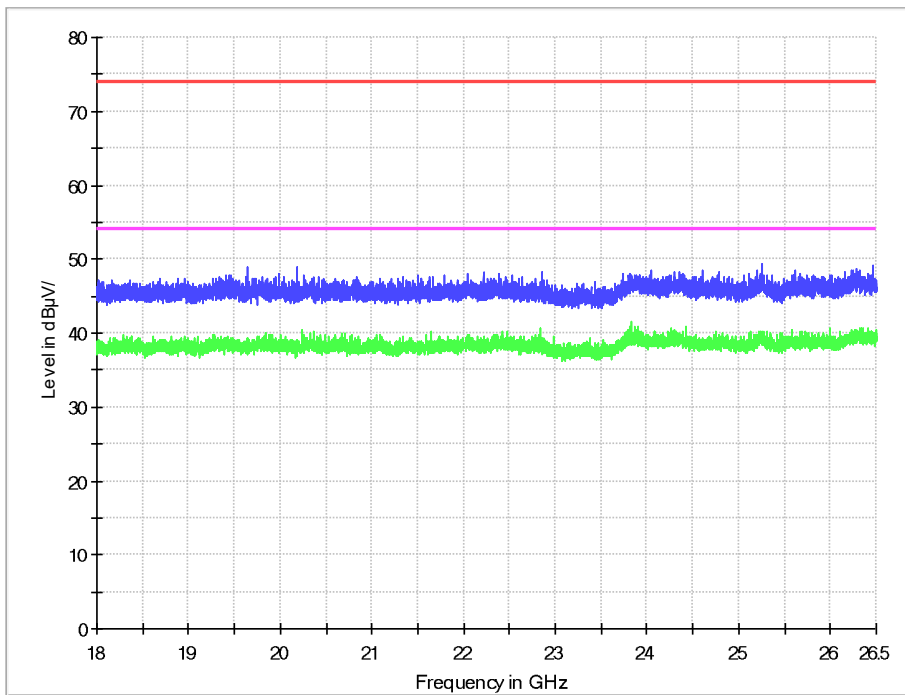


26.5GHz-40GHz

Horizontal

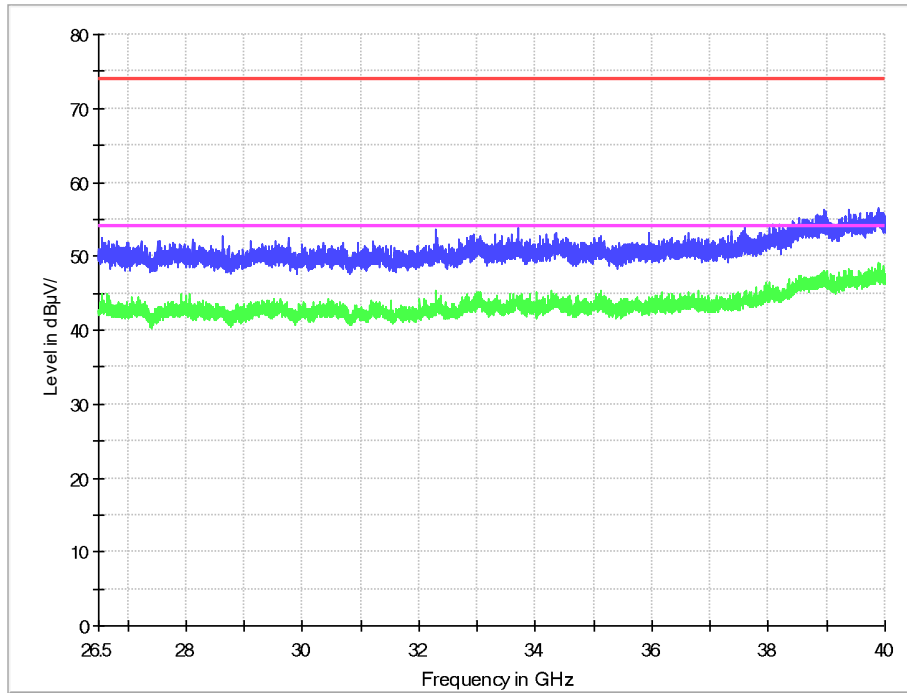

Vertical

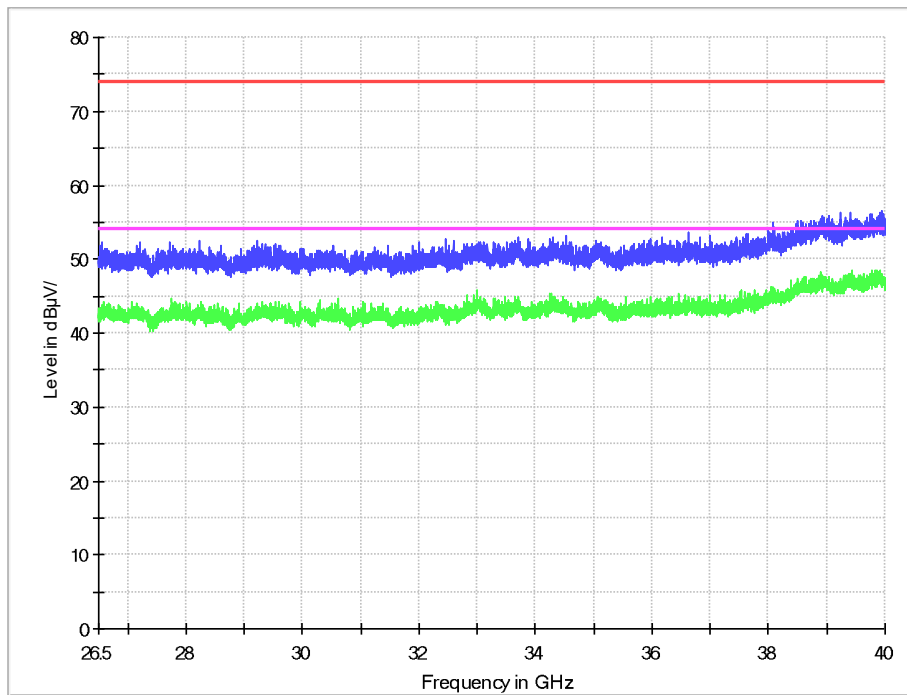

-----End of Report-----