

Appendix B

Detailed Test Results

GSM850 for Head, Body
GSM1900 for Head, Body
WCDMA Band II for Head, Body
WCDMA Band IV for Head, Body
WCDMA Band V for Head, Body
LTE Band 2 for Head, Body & Limbs
LTE Band 7 for Head, Body & Limbs
LTE Band 12 for Head, Body
LTE Band 13 for Head, Body
LTE Band 26 for Head, Body
LTE Band 41 for Head, Body
LTE Band 66 for Head, Body
n2 for Head, Body
n7 for Head, Body & Limbs
n26 for Head, Body
n38 for Head, Body & Limbs
n41 for Head, Body & Limbs
n66 for Head, Body
n77 for Head, Body & Limbs
n78 for Head, Body & Limbs
WIFI 2.4G for Head, Body
WIFI 5G for Head, Body & Limbs
BT for Head, Body

Test Laboratory: SGS-SAR Lab

V2314 GSM 850 GPRS 2TS 190CH Right cheek Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991151

Communication System: GPRS/EGPRS Mode(2up) Communication System; Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 43.039$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.712 W/kg


Configuration/Head/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.106 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.913 W/kg

SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.205 W/kg

Maximum value of SAR (measured) = 0.696 W/kg

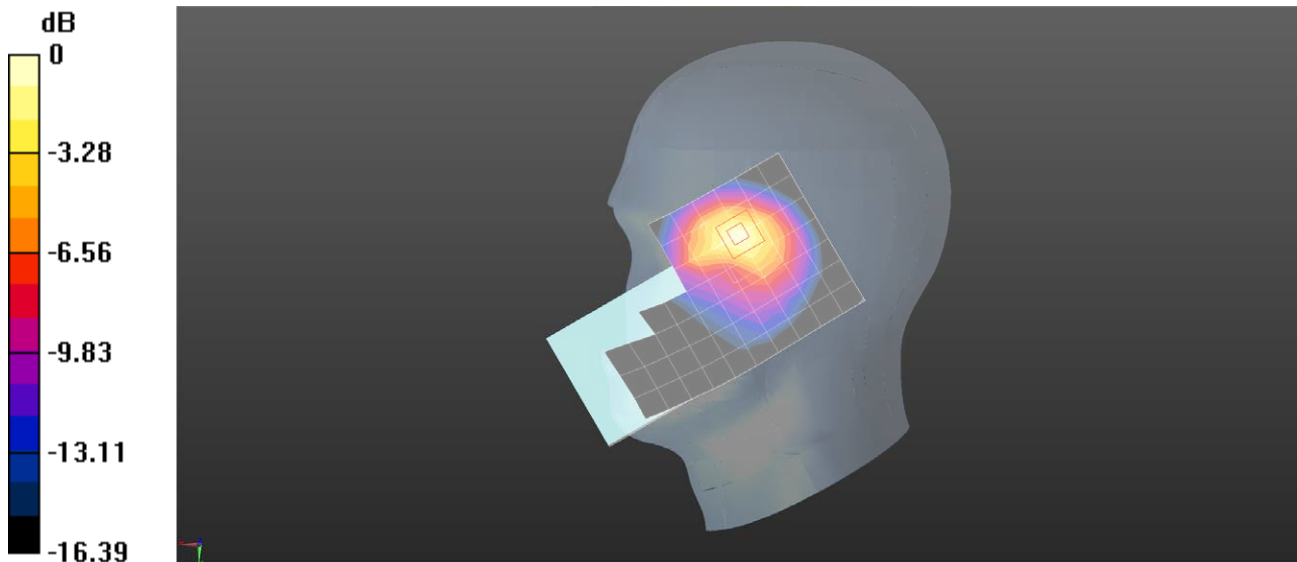

0 dB = 0.696 W/kg = -1.57 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 GSM 850 GPRS 2TS 190CH Back side 15mm Ant11**DUT: V2314; Type: Mobile Phone; Serial: 864236069991151**

Communication System: GPRS/EGPRS Mode(2up) Communication System; Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 43.039$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.278 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.838 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.288 W/kg

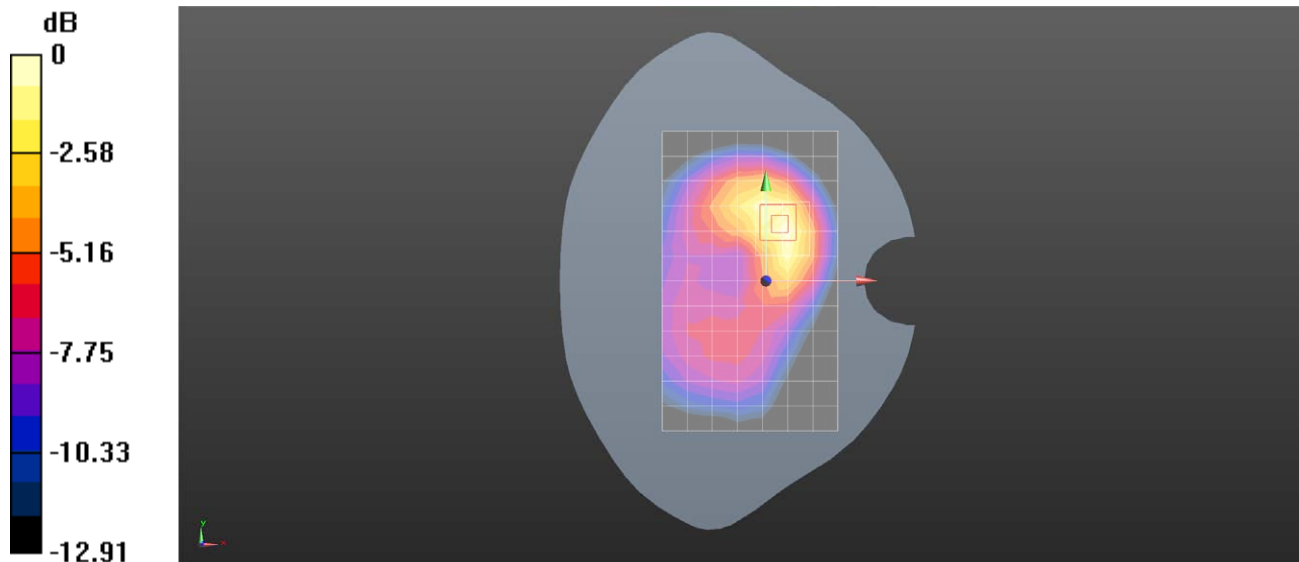

0 dB = 0.288 W/kg = -5.41 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 GSM 850 GPRS 2TS 190CH Back side 10mm Ant41**DUT: V2314; Type: Mobile Phone; Serial: 864236069991151**

Communication System: GPRS/EGPRS Mode(2up) Communication System; Frequency: 836.6 MHz; Duty Cycle: 1:4.14954

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 43.039$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.596 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.636 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.760 W/kg

SAR(1 g) = 0.428 W/kg; SAR(10 g) = 0.266 W/kg

Maximum value of SAR (measured) = 0.617 W/kg

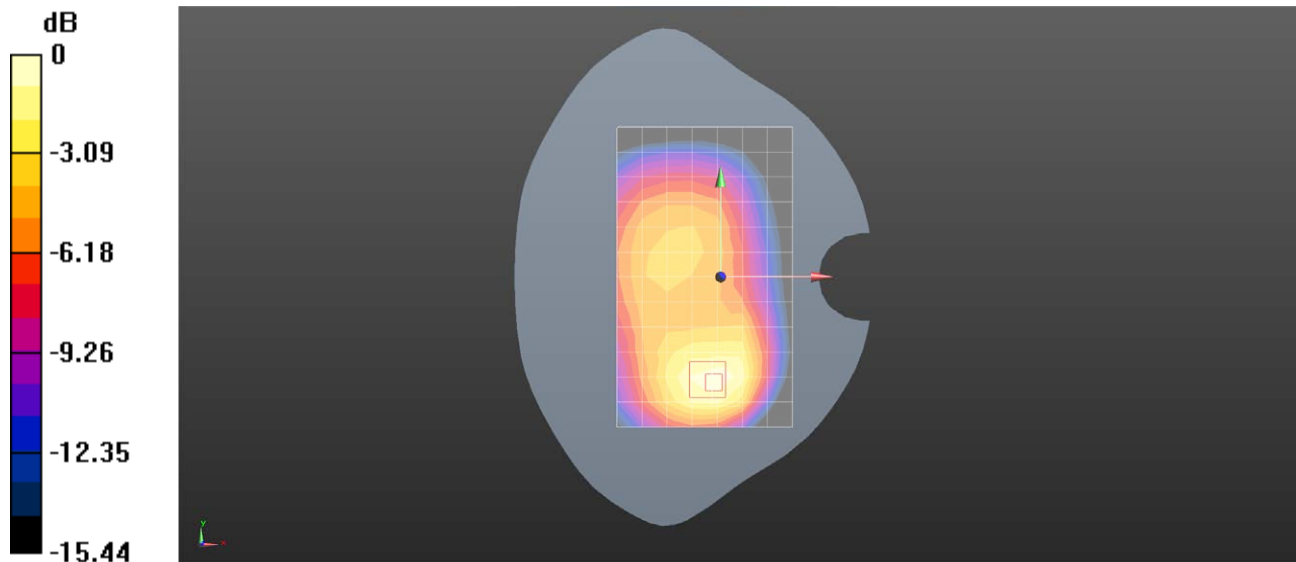

0 dB = 0.617 W/kg = -2.10 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 GSM 1900 GPRS 4TS 661CH Right cheek Ant14

DUT: V2314; Type: Mobile Phone; Serial: 864236069991151

Communication System: GPRS/EGPRS Mode(4up) Communication System; Frequency: 1880 MHz;Duty Cycle: 1:2.07491

Medium: HSL1900;Medium parameters used: $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.409$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.712 W/kg


Configuration/Head/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.264 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.977 W/kg

SAR(1 g) = 0.499 W/kg; SAR(10 g) = 0.280 W/kg

Maximum value of SAR (measured) = 0.769 W/kg

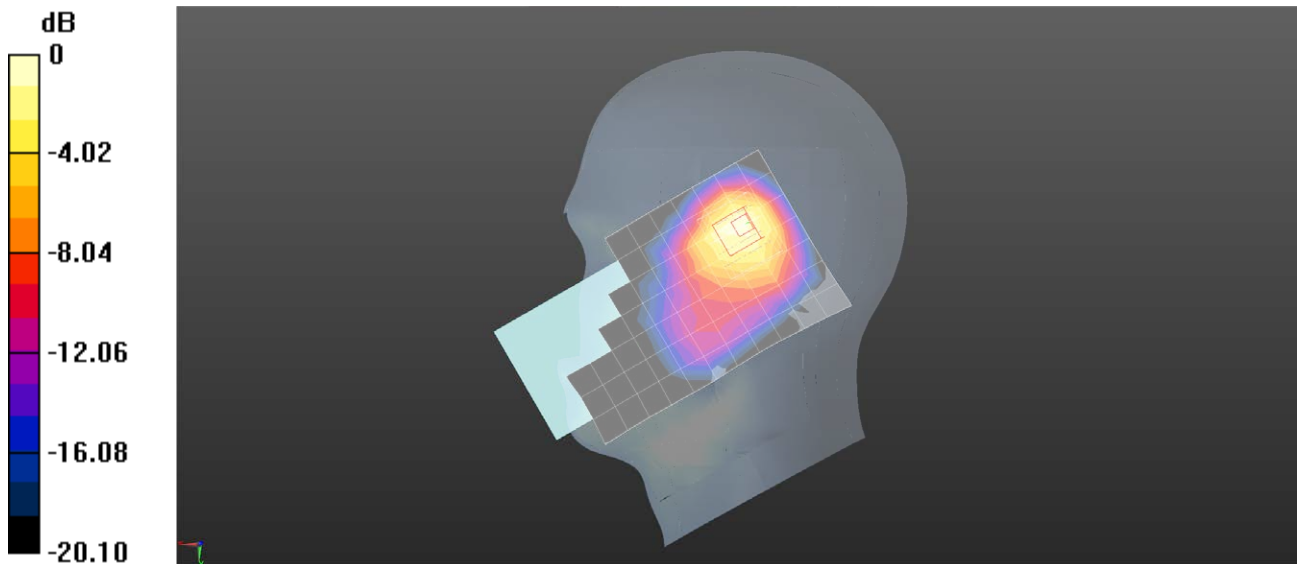

0 dB = 0.769 W/kg = -1.14 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 GSM 1900 GPRS 4TS 661CH Back side 15mm Ant31

DUT: V2314; Type: Mobile Phone; Serial: 864236069991151

Communication System: GPRS/EGPRS Mode(4up) Communication System; Frequency: 1880 MHz; Duty Cycle: 1:2.07491

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.409$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.263 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.756 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.316 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.262 W/kg

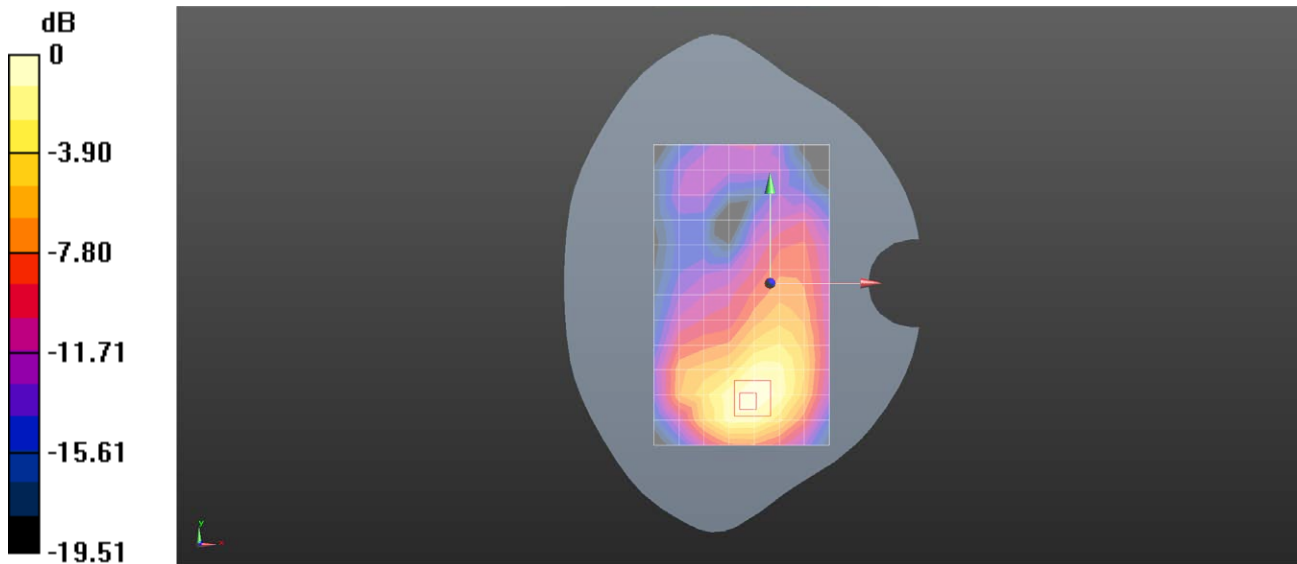

0 dB = 0.262 W/kg = -5.82 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 GSM 1900 GPRS 4TS 661CH Bottom side 10mm Ant31**DUT: V2314; Type: Mobile Phone; Serial: 864236069991151**

Communication System: GPRS/EGPRS Mode(4up) Communication System; Frequency: 1880 MHz; Duty Cycle: 1:2.07491

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.409$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.485 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.634 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.707 W/kg

SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.198 W/kg

Maximum value of SAR (measured) = 0.579 W/kg

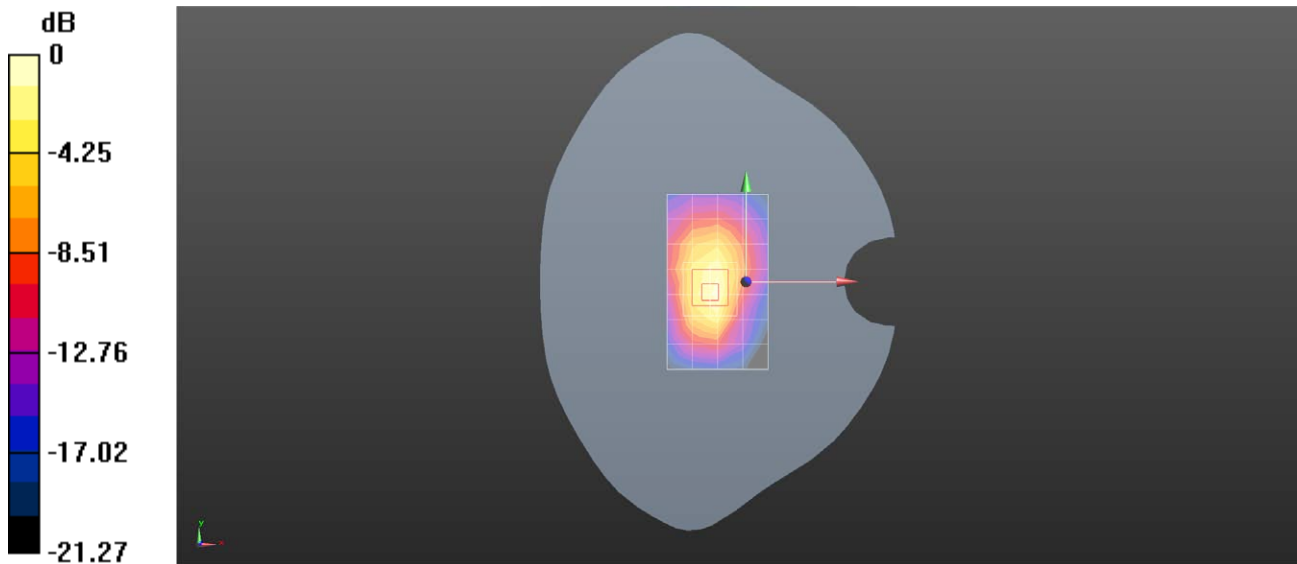

0 dB = 0.579 W/kg = -2.37 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 WCDMA Band II RMC 9400CH Left cheek Ant31

DUT: V2314; Type: Mobile Phone; Serial: 864236069991151

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.409$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0742 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.871 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0898 W/kg

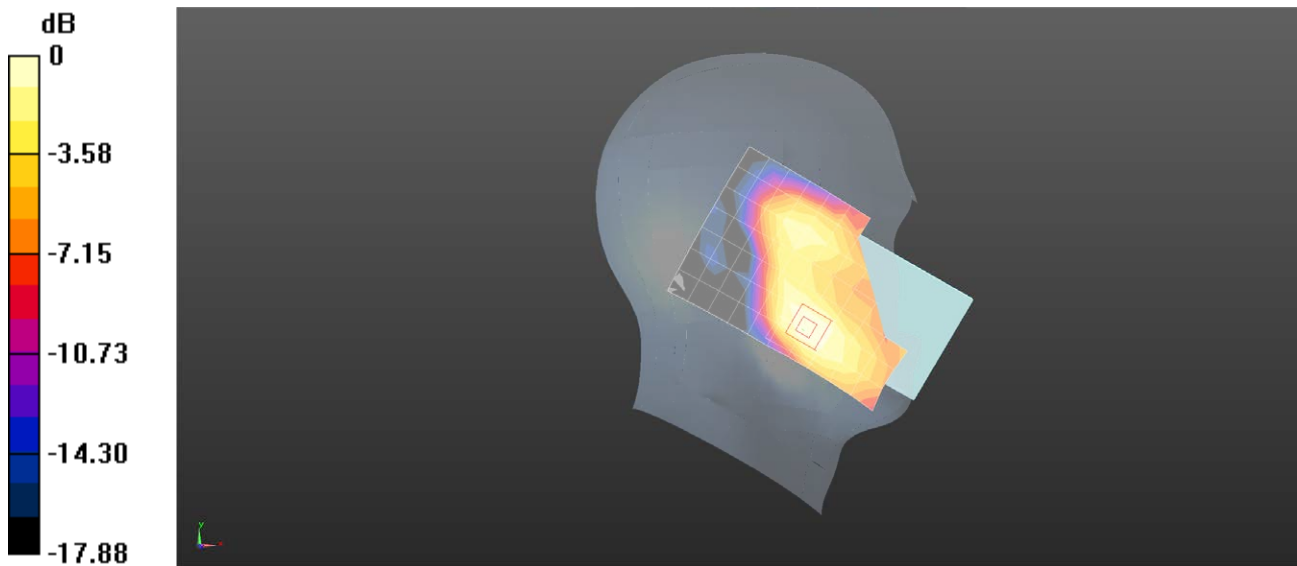

0 dB = 0.0898 W/kg = -10.47 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 WCDMA Band II RMC 9400CH Back side 15mm Ant14

DUT: V2314; Type: Mobile Phone; Serial: 864236069991151

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.409$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.355 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.432 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.454 W/kg

SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.381 W/kg

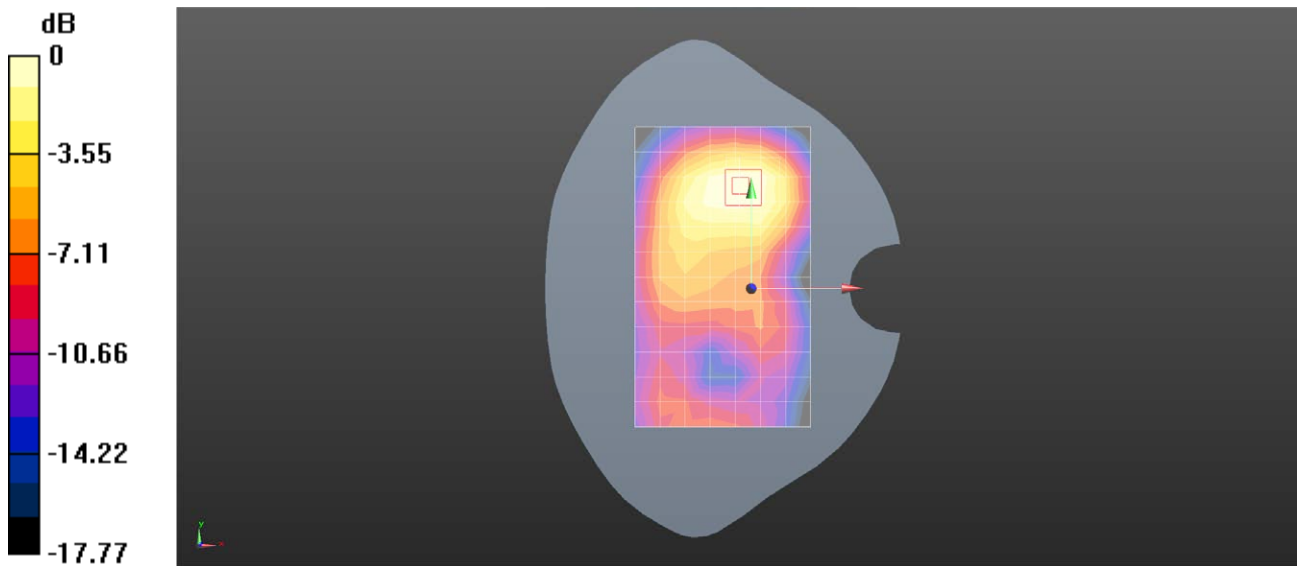

0 dB = 0.381 W/kg = -4.19 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 WCDMA Band II RMC 9400CH Bottom side 10mm Ant31

DUT: V2314; Type: Mobile Phone; Serial: 864236069991151

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.409$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.576 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.608 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.862 W/kg

SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.249 W/kg

Maximum value of SAR (measured) = 0.721 W/kg

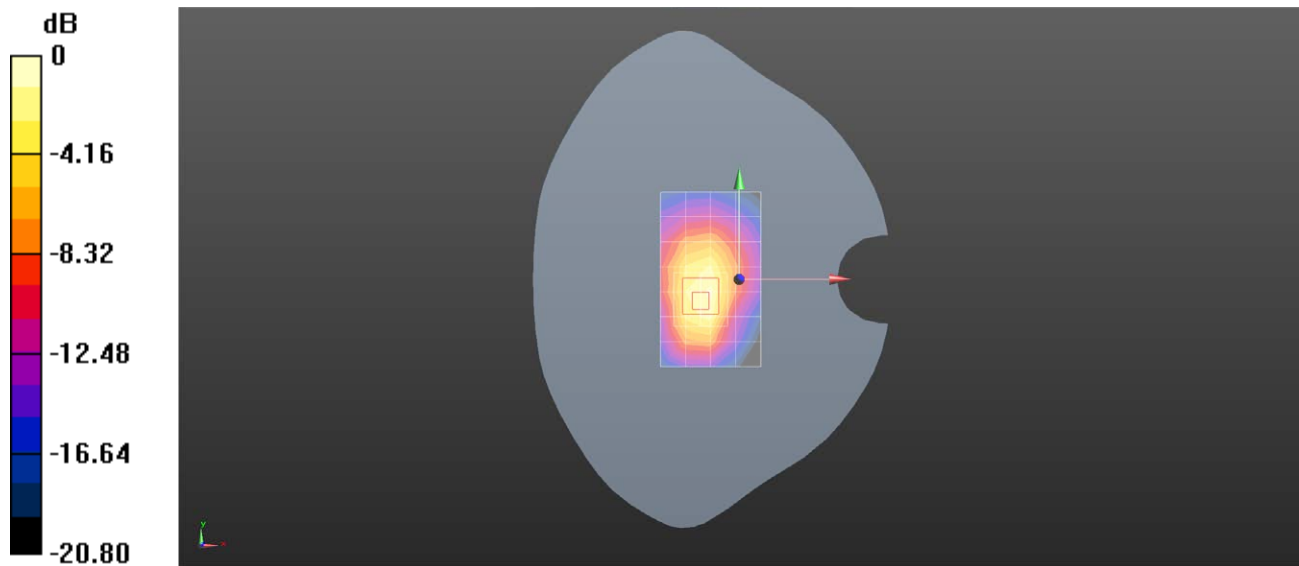

0 dB = 0.721 W/kg = -1.42 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 WCDMA Band IV RMC 1412CH Right cheek Ant31

DUT: V2314; Type: Mobile Phone; Serial: 864236069991151

Communication System: WCDMA; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 40.483$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0696 W/kg


Configuration/Head/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.082 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0776 W/kg

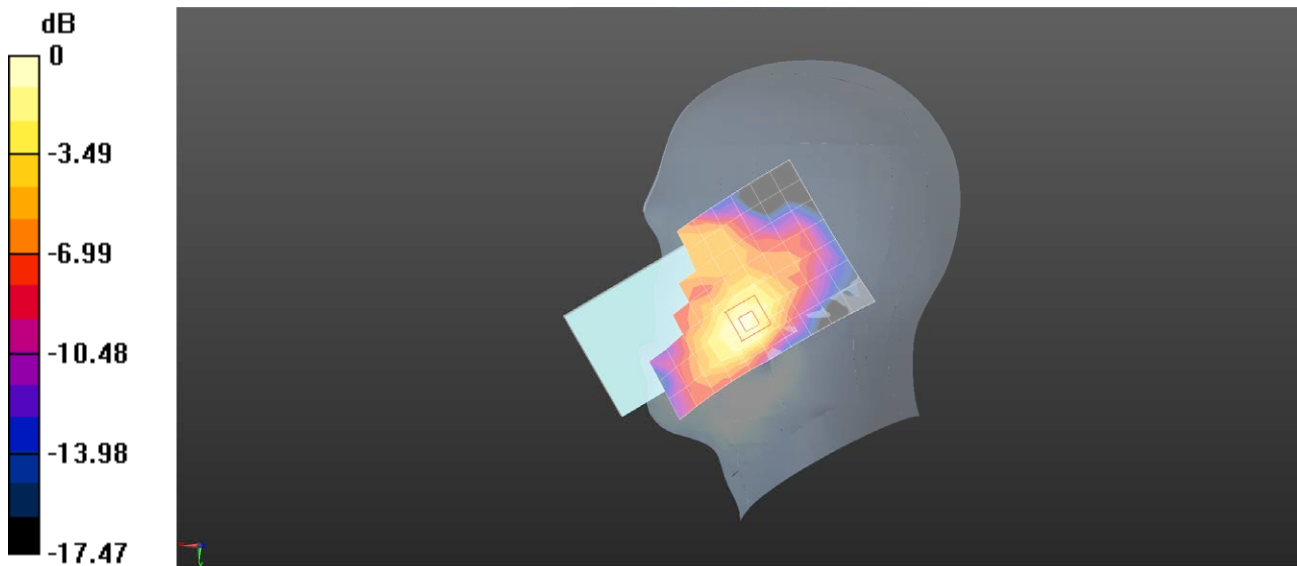

0 dB = 0.0776 W/kg = -11.10 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 WCDMA Band IV RMC 1412CH Back side 15mm Ant14

DUT: V2314; Type: Mobile Phone; Serial: 864236069991151

Communication System: WCDMA; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 40.483$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.310 W/kg


Configuration/Body/Zoom Scan (7x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.911 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.394 W/kg

SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.149 W/kg

Maximum value of SAR (measured) = 0.334 W/kg

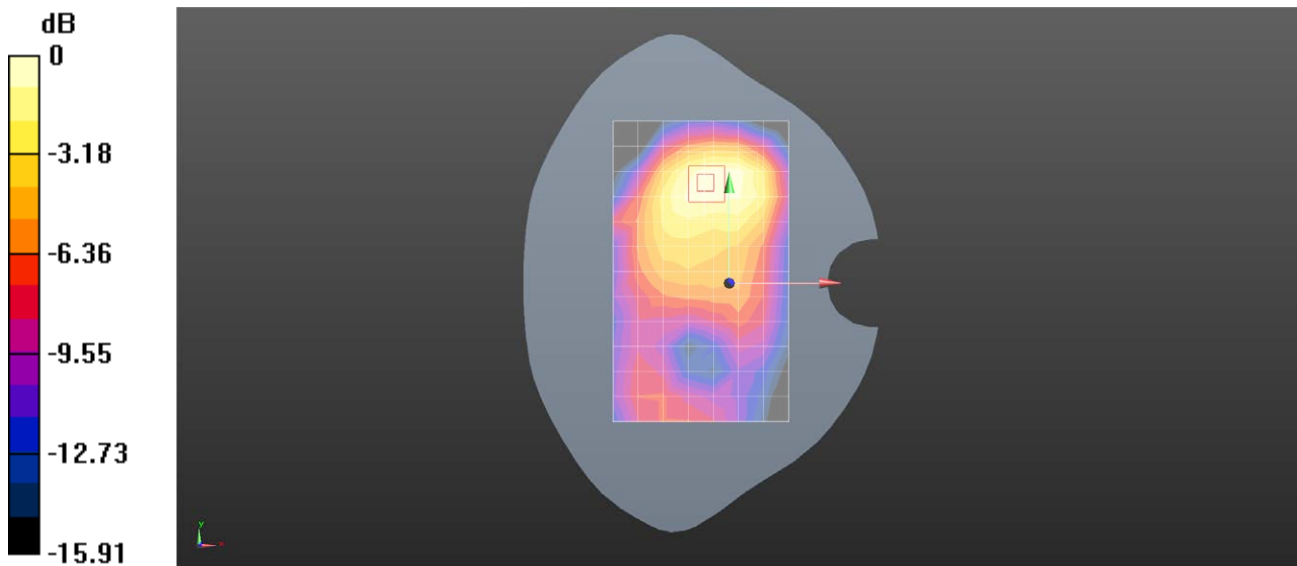

Test Laboratory: SGS-SAR Lab

V2314 WCDMA Band IV RMC 1412CH Top side 10mm Ant14

DUT: V2314; Type: Mobile Phone; Serial: 864236069991151

Communication System: WCDMA; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1732.4$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 40.483$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.598 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.601 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.762 W/kg

SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 0.636 W/kg

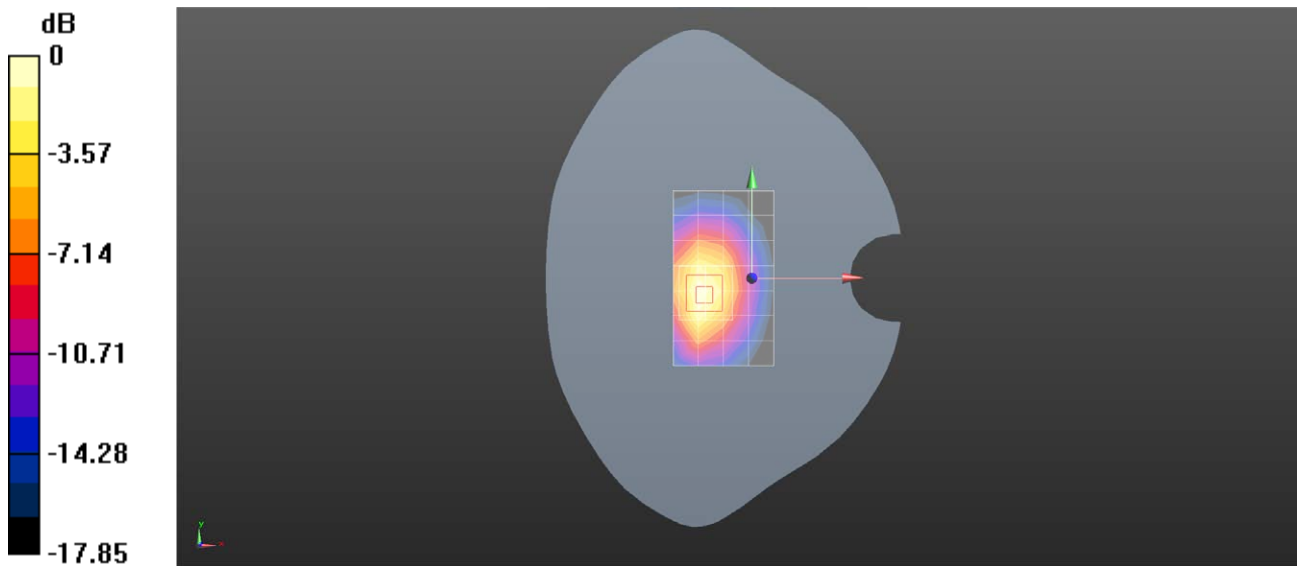

0 dB = 0.636 W/kg = -1.97 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 WCDMA Band V RMC 4182CH Right cheek Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991151

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 43.041$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.546 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.882 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.718 W/kg

SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.556 W/kg

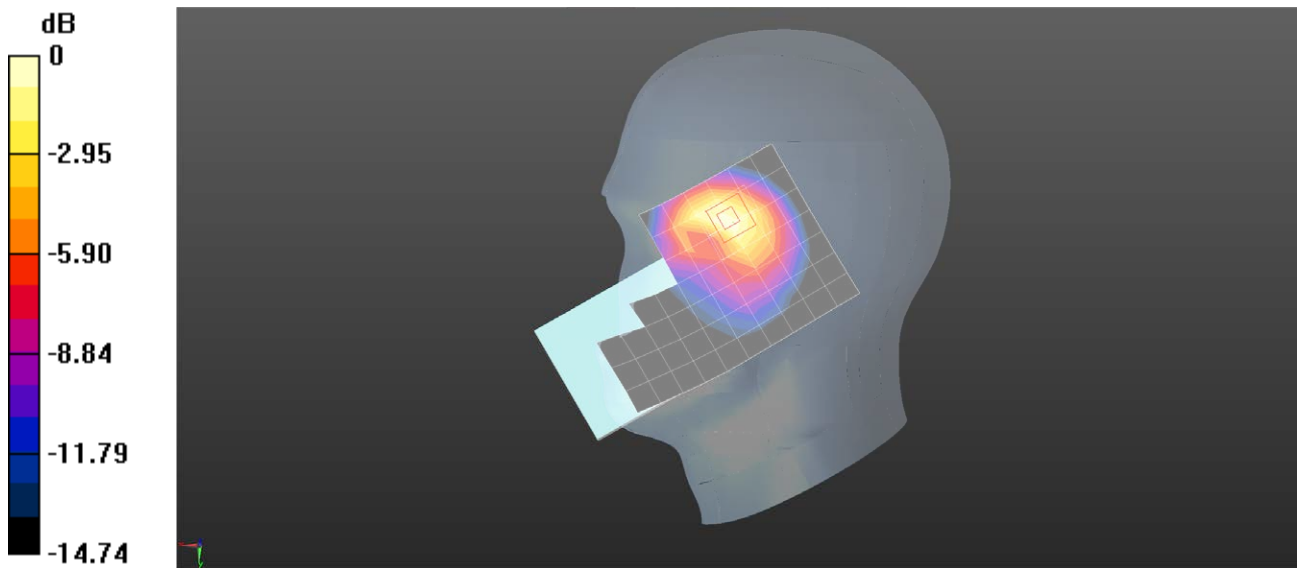

0 dB = 0.556 W/kg = -2.55 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 WCDMA Band V RMC 4182CH Back side 15mm Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991151

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 43.041$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.269 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.534 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.111 W/kg

Maximum value of SAR (measured) = 0.268 W/kg

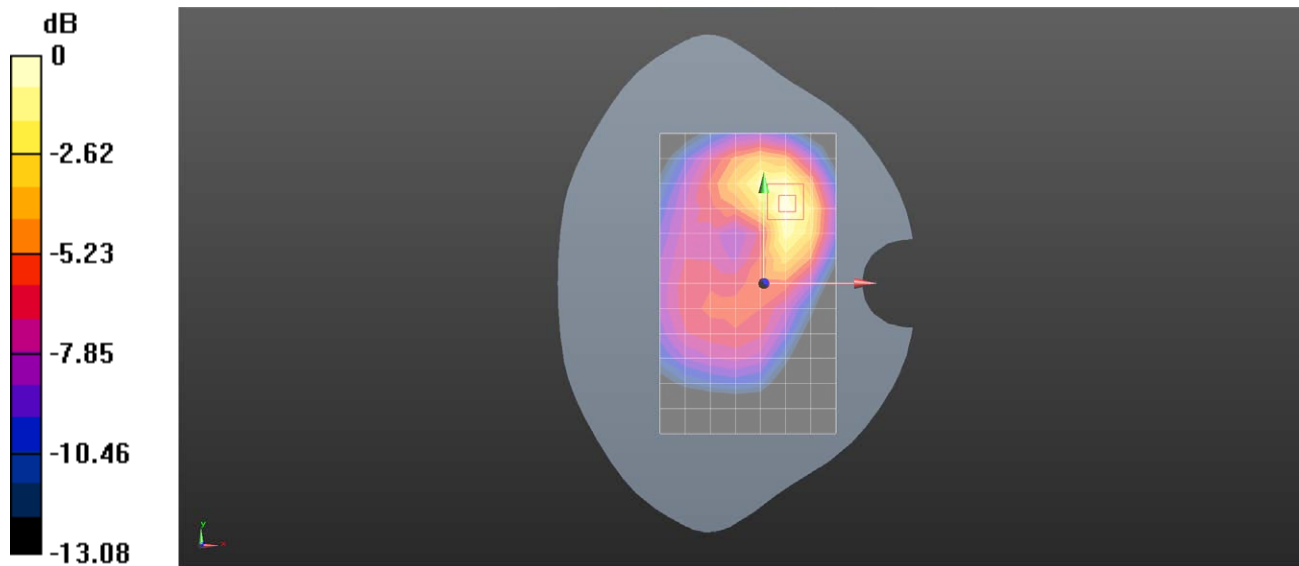

0 dB = 0.268 W/kg = -5.72 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 WCDMA Band V RMC 4182CH Back side 10mm Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991151

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.886$ S/m; $\epsilon_r = 43.041$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.529 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.910 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.546 W/kg

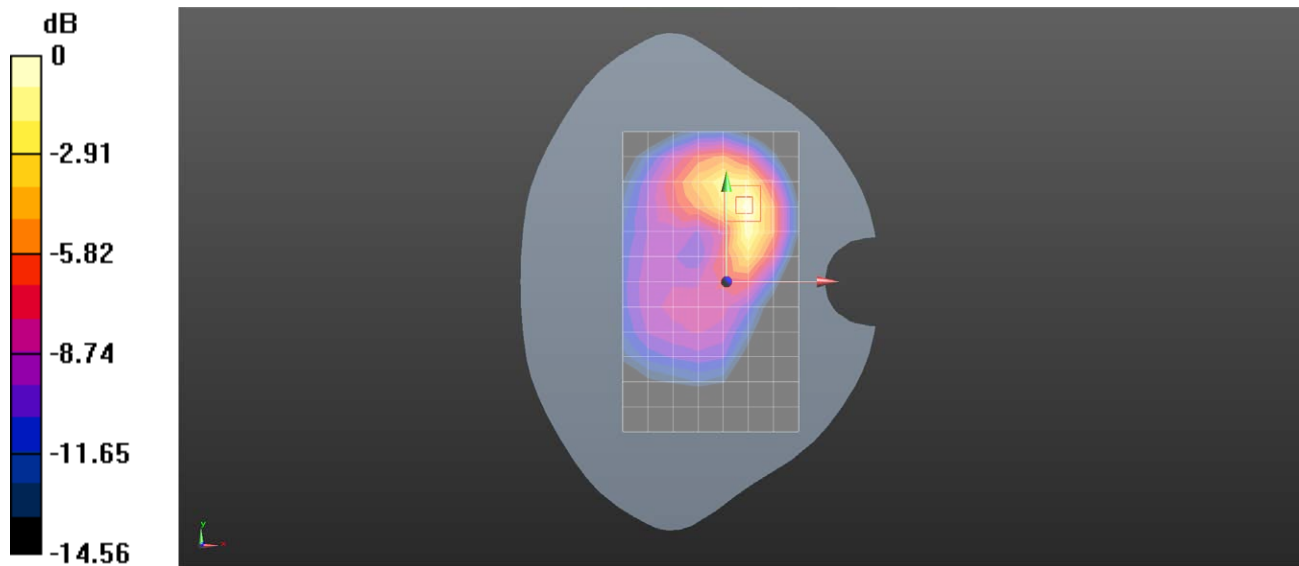

0 dB = 0.546 W/kg = -2.63 dBW/kg

Test Laboratory: Test Laboratory: SGS-SAR Lab

V2314 LTE Band 2 20M QPSK 1RB0 19100CH Right cheek Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: LTE-FDD BW 20MHz; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.362$ S/m; $\epsilon_r = 40.223$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.947 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.363 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.550 W/kg; SAR(10 g) = 0.259 W/kg

Maximum value of SAR (measured) = 0.948 W/kg

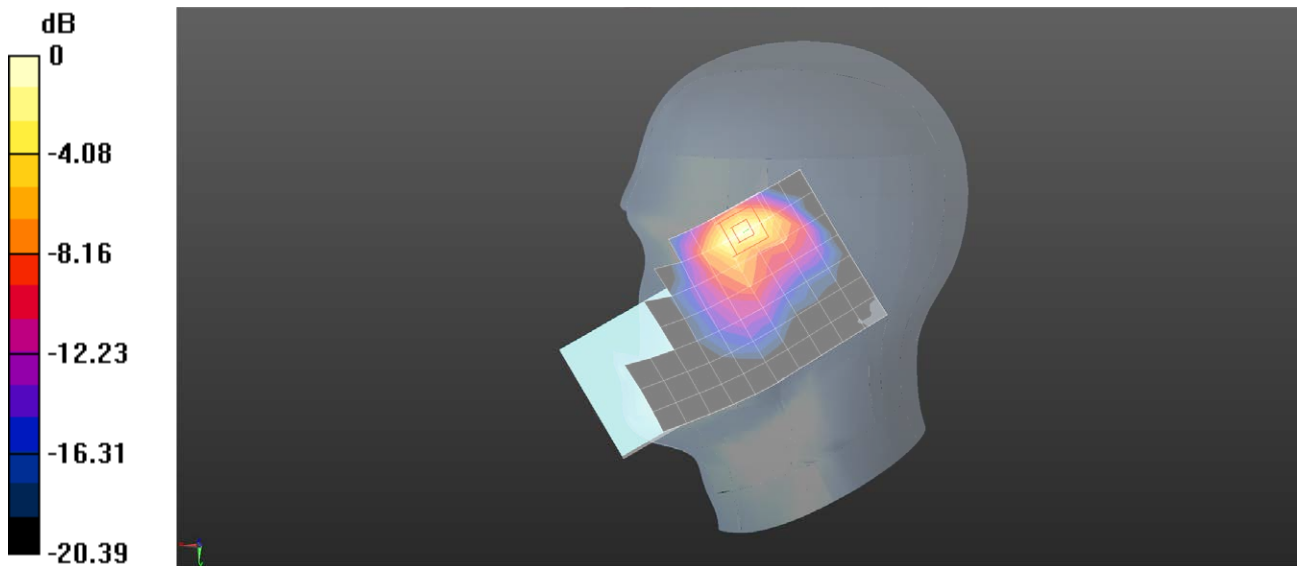

Test Laboratory: SGS-SAR Lab

V2314 LTE Band 2 20M QPSK 1RB0 19100CH Back side 15mm Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: LTE-FDD BW 20MHz; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.362$ S/m; $\epsilon_r = 40.223$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.401 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.987 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.498 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.157 W/kg

Maximum value of SAR (measured) = 0.418 W/kg

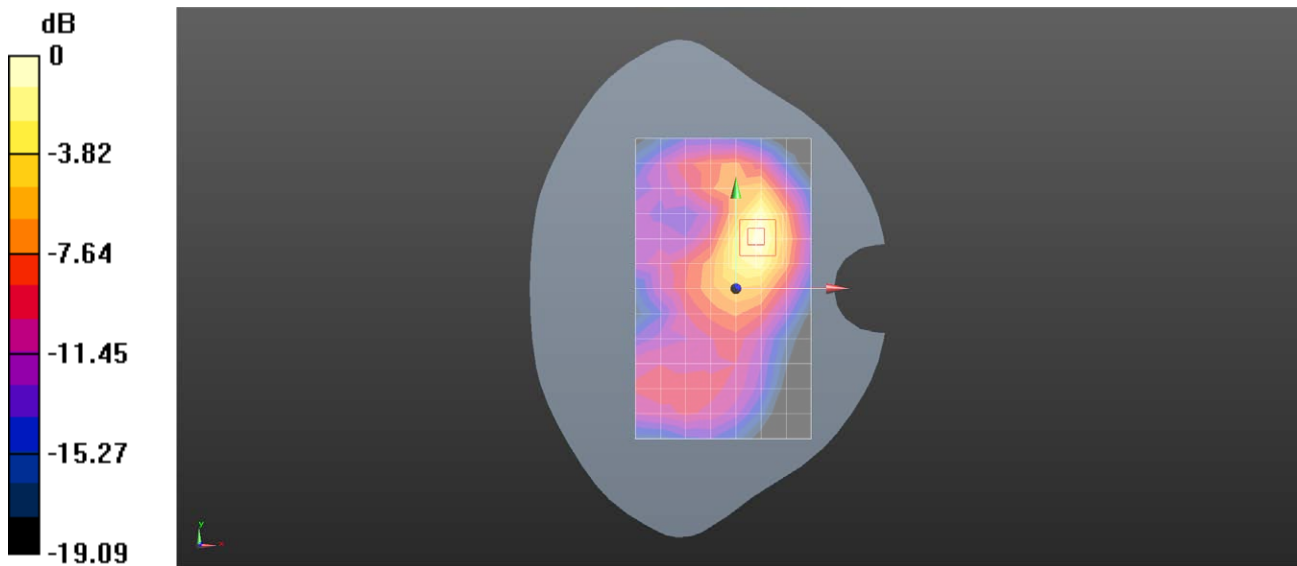

0 dB = 0.418 W/kg = -3.79 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 LTE Band 2 20M QPSK 1RB0 19100CH Left side 10mm Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: LTE-FDD BW 20MHz; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.362$ S/m; $\epsilon_r = 40.223$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.696 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.764 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.933 W/kg

SAR(1 g) = 0.490 W/kg; SAR(10 g) = 0.243 W/kg

Maximum value of SAR (measured) = 0.768 W/kg

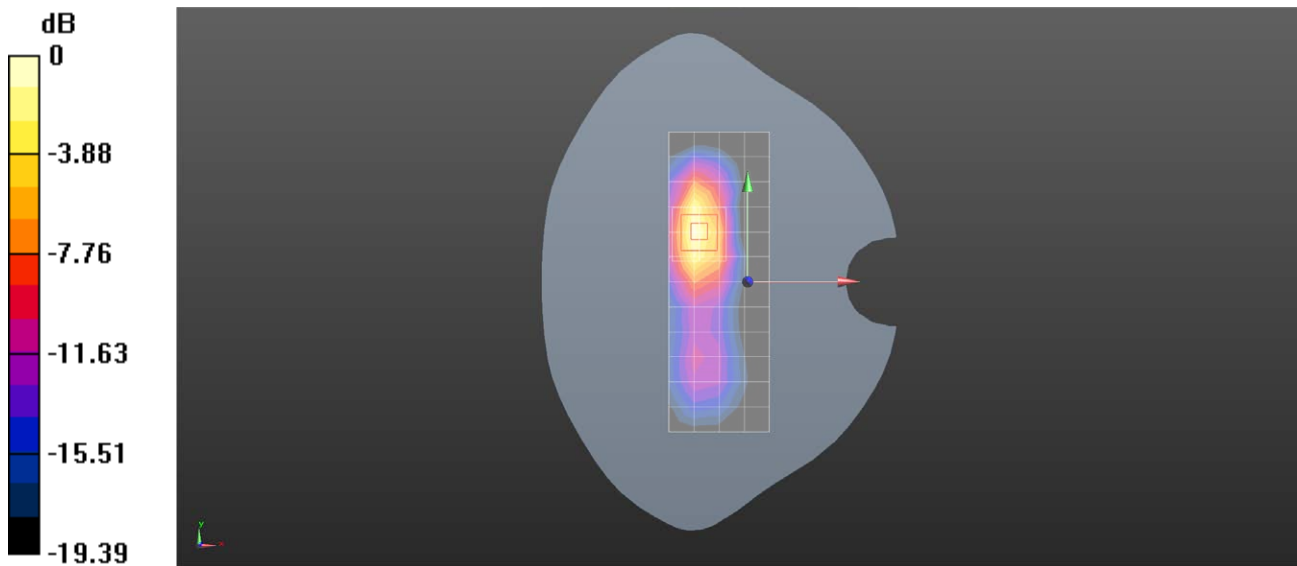

Test Laboratory: SGS-SAR Lab

V2314 LTE Band 2 20M QPSK 50RB0 19100CH Left side 0mm Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991698

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1900 MHz;Duty Cycle: 1:1

Medium: HSL1900;Medium parameters used: $f = 1900$ MHz; $\sigma = 1.362$ S/m; $\epsilon_r = 40.223$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.26 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.11 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 14.7 W/kg

SAR(1 g) = 3.93 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 11.1 W/kg

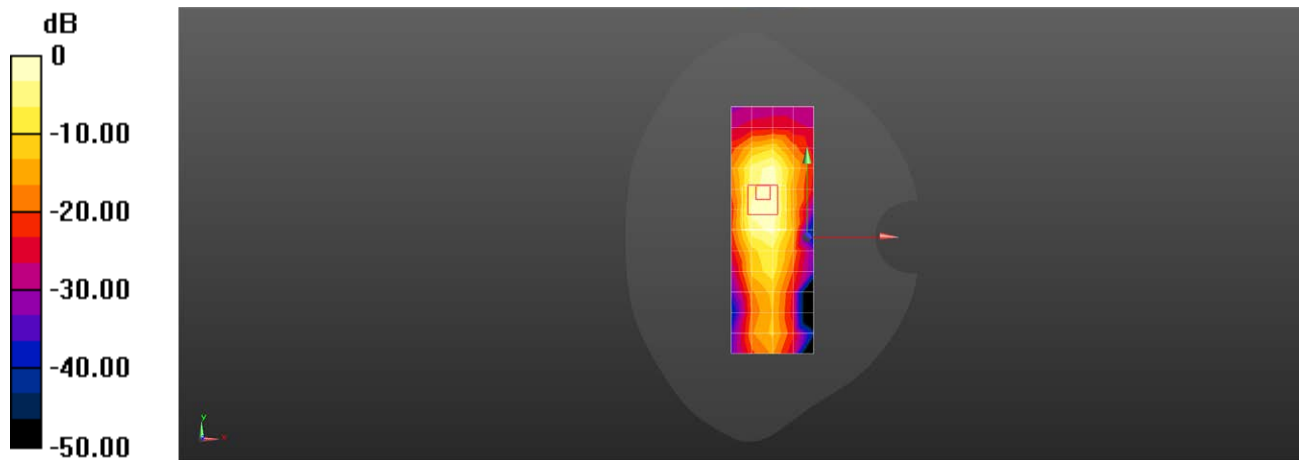

0 dB = 3.26 W/kg = 5.13 dBW/kg

V2314 LTE Band 7 20M QPSK 50RB50 21100CH Right cheek Ant11**DUT: V2314**

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f= 2535.000$ MHz; $\sigma= 1.90$ S/m; $\epsilon_r = 39.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.536 W/kg; SAR (10g) = 0.251 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.09 dB

SAR (1g) = 0.579 W/kg; SAR (10g) = 0.246 W/kg;

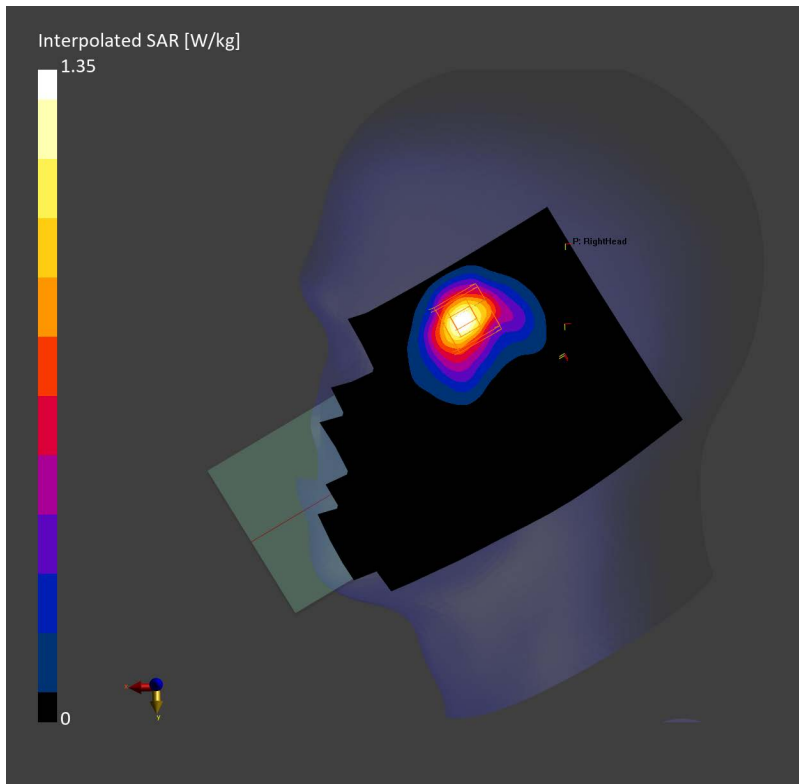

V2314 LTE Band 7 20M QPSK 1RB99 21350CH Back side 15mm Ant11**DUT: V2314**

Communication System: Band 7; Frequency: 2560.000

Medium: HSL. Medium parameters used: $f= 2560.000$ MHz; $\sigma= 1.93$ S/m; $\epsilon_r = 39.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.456 W/kg; SAR (10g) = 0.239 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.10 dB

SAR (1g) = 0.450 W/kg; SAR (10g) = 0.234 W/kg;

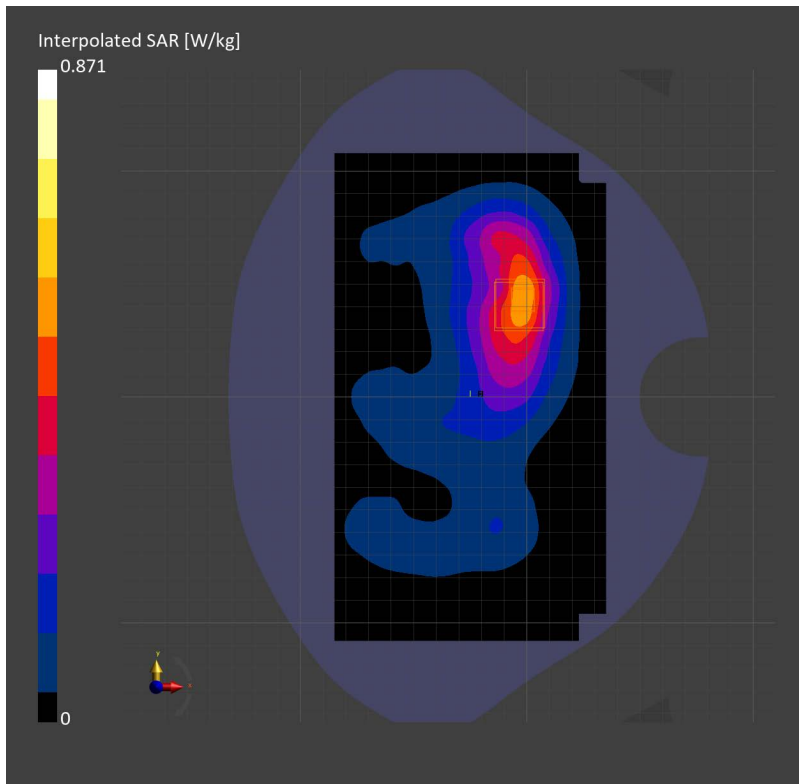

V2314 LTE Band 7 20M QPSK 50RB50 21100CH Left side 10mm Ant11**DUT: V2314**

Communication System: Band 7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f= 2535.000$ MHz; $\sigma= 1.90$ S/m; $\epsilon_r = 39.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.406 W/kg; SAR (10g) = 0.186 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.08 dB

SAR (1g) = 0.424 W/kg; SAR (10g) = 0.189 W/kg;

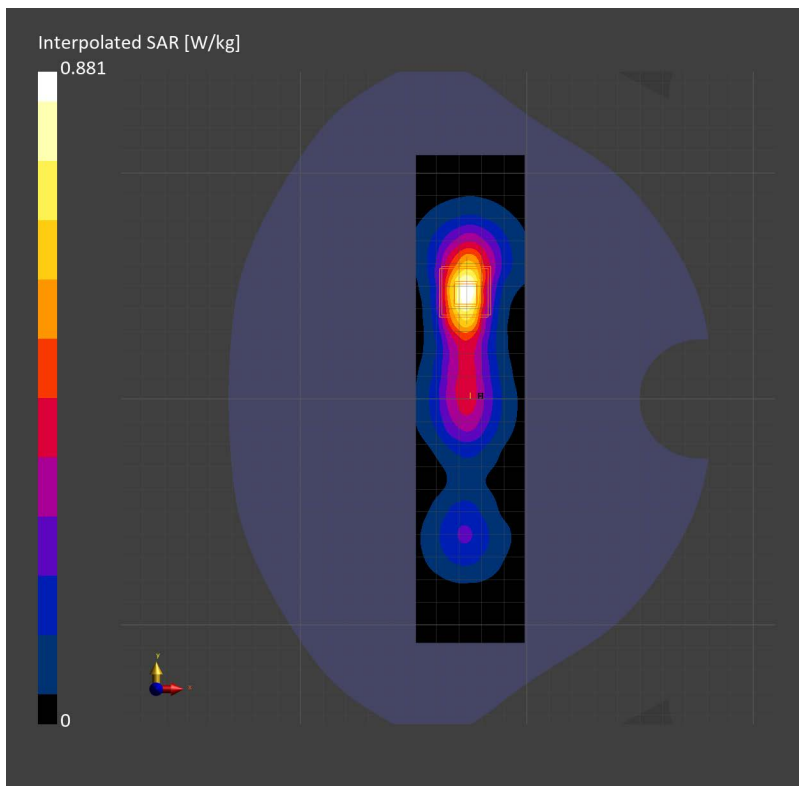

V2314 LTE Band 7 20M QPSK 50RB25 20850CH Left side 0mm Ant11**DUT: V2314**

Communication System: Band 7; Frequency: 2510.000

Medium: HSL. Medium parameters used: $f= 2510.000$ MHz; $\sigma= 1.87$ S/m; $\epsilon_r = 39.6$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 3.66 W/kg; SAR (10g) = 1.50 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 4.59 W/kg; SAR (10g) = 1.50 W/kg;

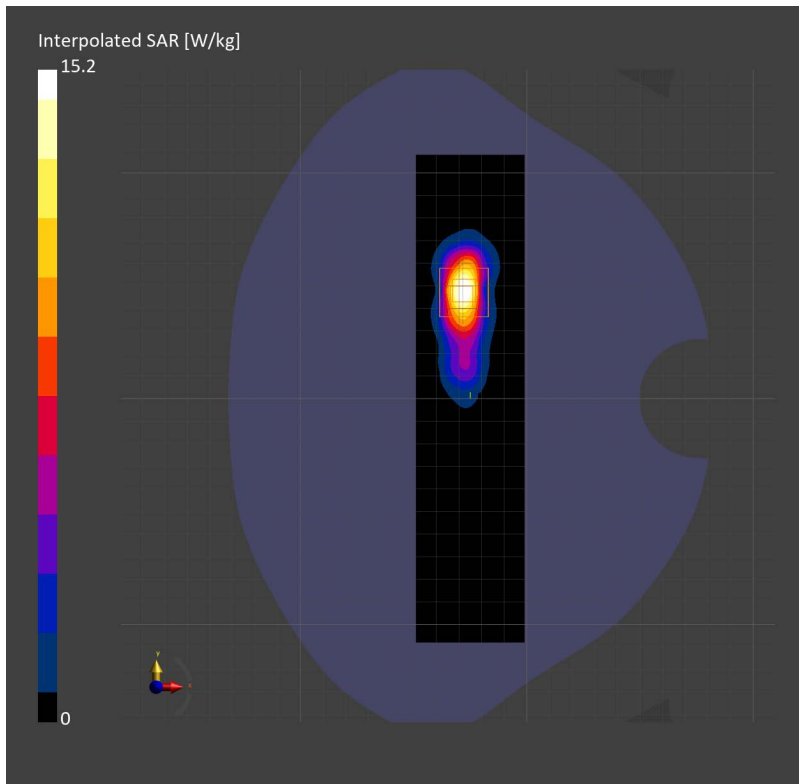

Test Laboratory: SGS-SAR Lab

V2314 LTE Band 12 10M QPSK 1RB0 23095CH Right cheek Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: LTE-FDD BW 10MHZ; Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 42.932$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.4, 9.4, 9.4); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.257 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.109 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.374 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.273 W/kg

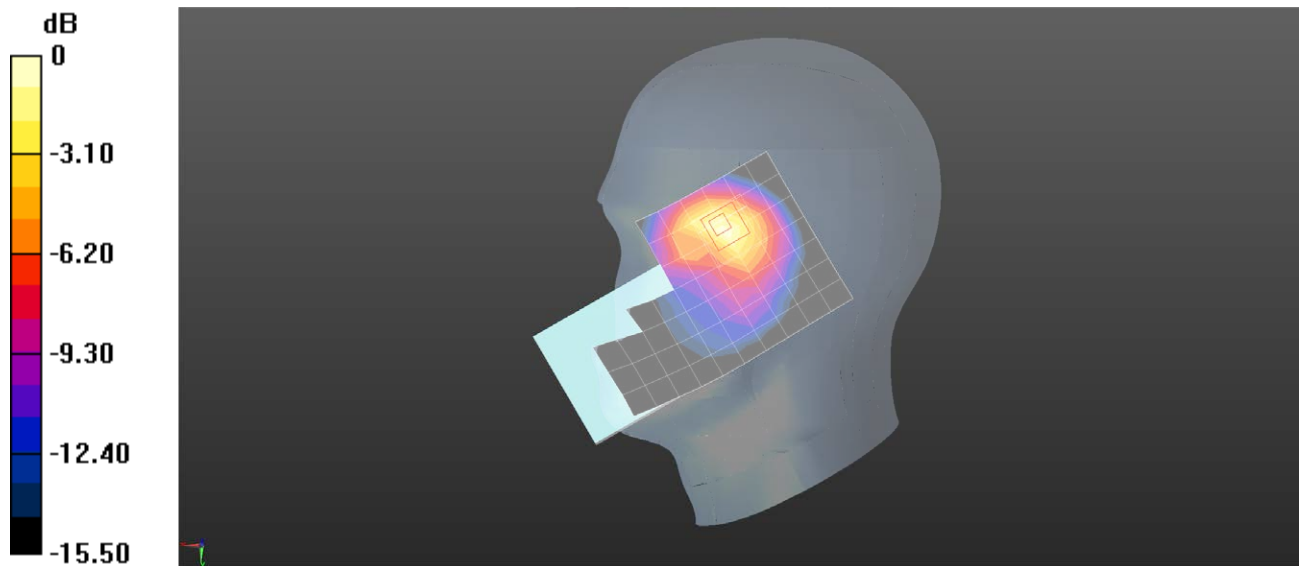

0 dB = 0.273 W/kg = -5.64 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 LTE Band 12 10M QPSK 1RB0 23095CH Back side 15mm Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: LTE-FDD BW 10MHZ; Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 42.932$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.4, 9.4, 9.4); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.115 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.037 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.114 W/kg

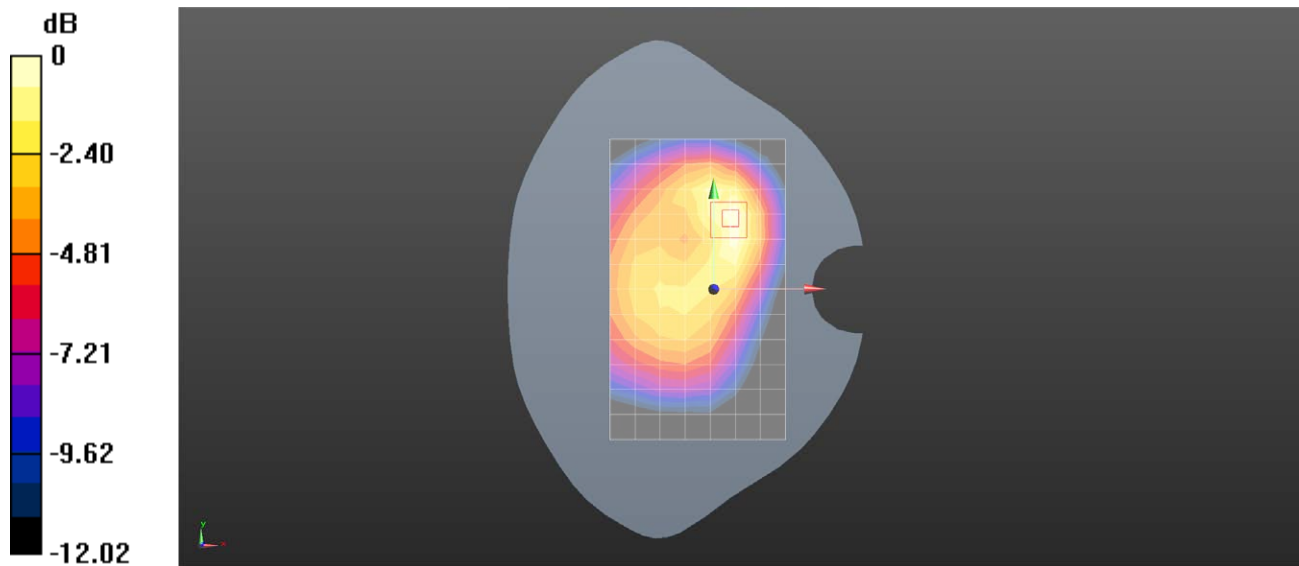

0 dB = 0.114 W/kg = -9.43 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 LTE Band 12 10M QPSK 1RB0 23095CH Left side 10mm Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: LTE-FDD BW 10MHZ; Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 42.932$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.4, 9.4, 9.4); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.253 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.161 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.398 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.321 W/kg

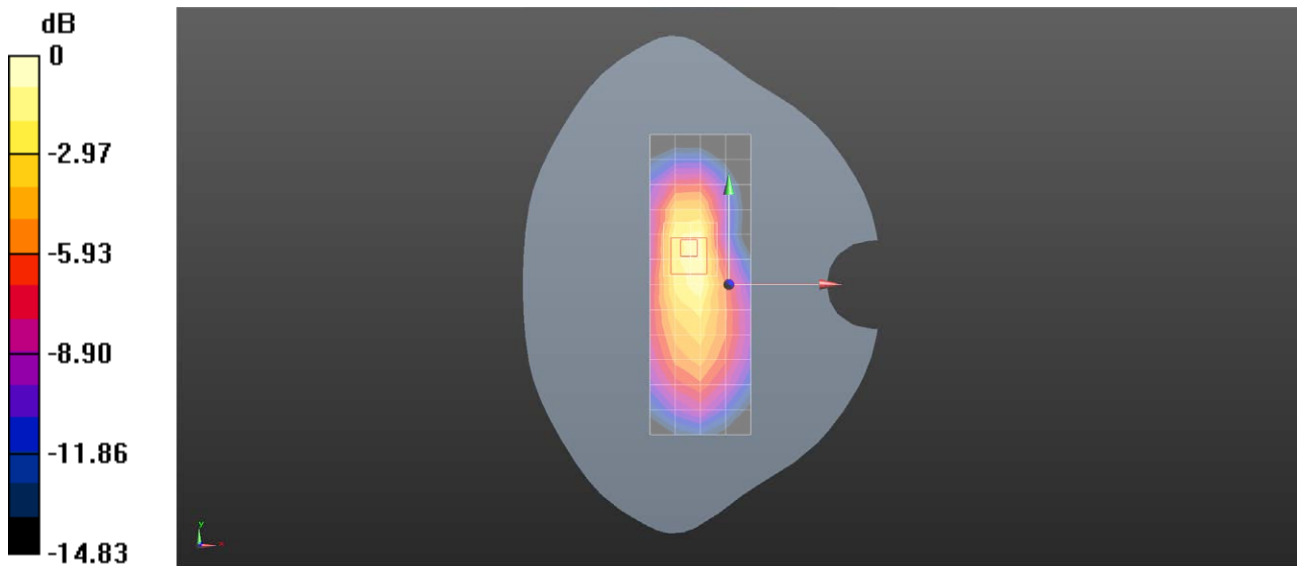

Test Laboratory: SGS-SAR Lab

V2314 LTE Band 13 10M QPSK 1RB0 23230CH Right cheek Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: LTE-FDD BW 10MHZ; Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 782$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.597$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.4, 9.4, 9.4); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.449 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.537 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.682 W/kg

SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.525 W/kg

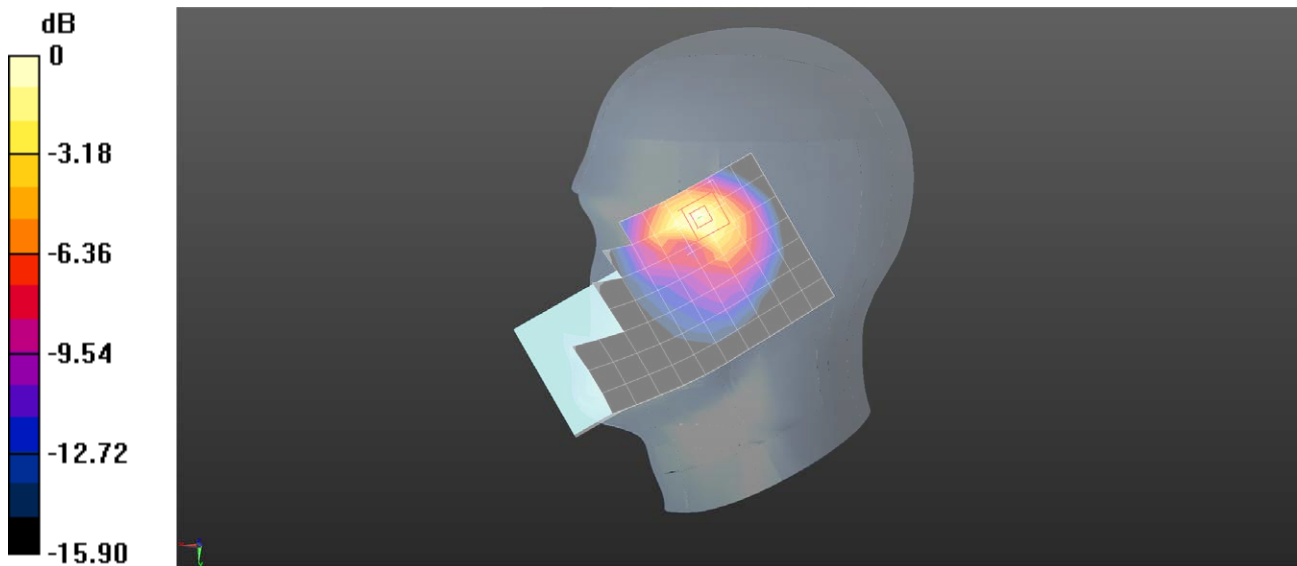

0 dB = 0.525 W/kg = -2.80 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 LTE Band 13 10M QPSK 1RB0 23230CH Back side 15mm Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: LTE-FDD BW 10MHZ; Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 782$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.597$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.4, 9.4, 9.4); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.219 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.985 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.267 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.096 W/kg

Maximum value of SAR (measured) = 0.224 W/kg

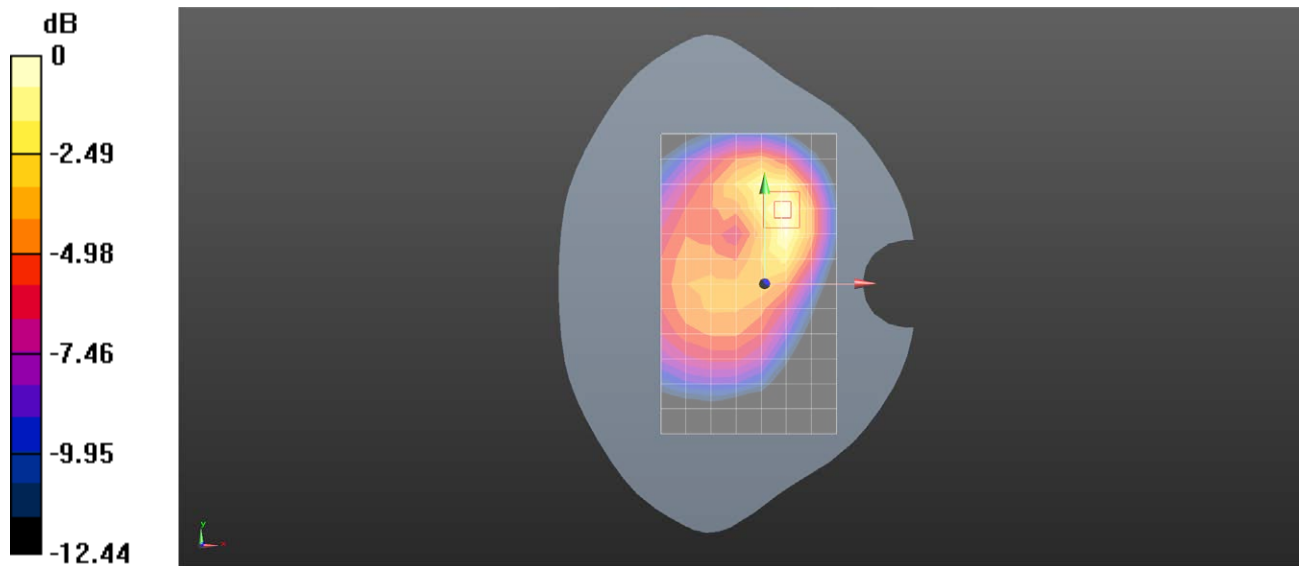

0 dB = 0.224 W/kg = -6.50 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 LTE Band 13 10M QPSK 1RB0 23230CH Left side 10mm Ant11**DUT: V2314; Type: Mobile Phone; Serial: 864236069991839**

Communication System: LTE-FDD BW 10MHZ; Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.903 \text{ S/m}$; $\epsilon_r = 42.597$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.4, 9.4, 9.4); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.365 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.509 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.648 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.181 W/kg

Maximum value of SAR (measured) = 0.518 W/kg

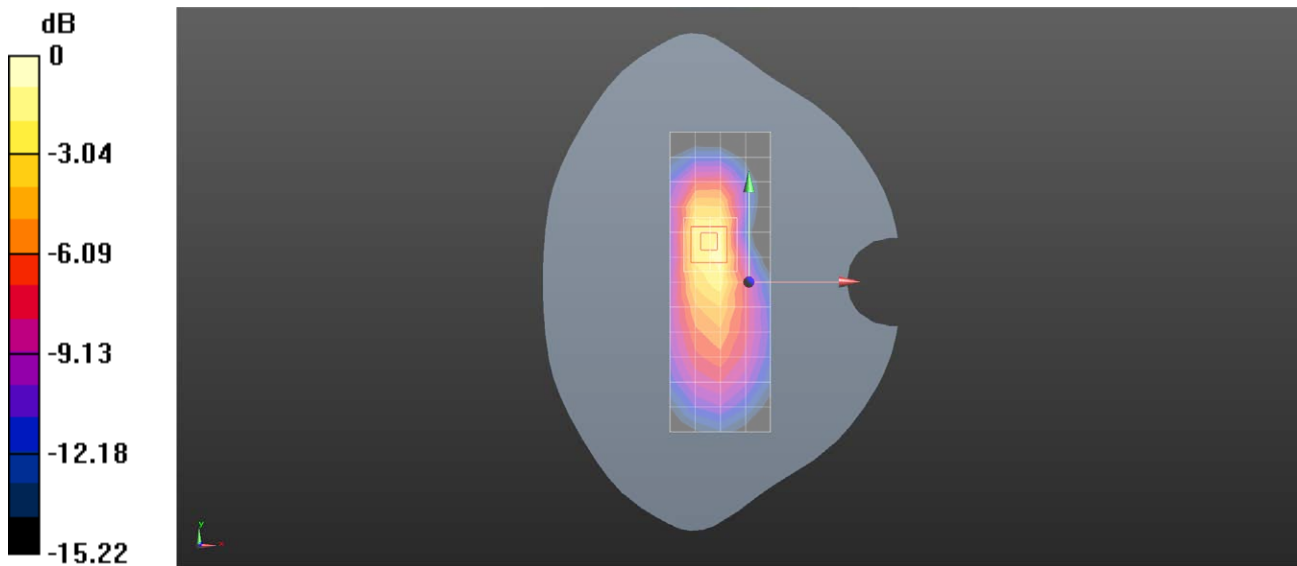

0 dB = 0.518 W/kg = -2.86 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 LTE Band 26 15M QPSK 1RB0 26965CH Right cheek Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: LTE-FDD BW 15MHz; Frequency: 841.5 MHz;Duty Cycle: 1:1

Medium: HSL835;Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 43.17$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.531 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.817 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.819 W/kg

SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.638 W/kg

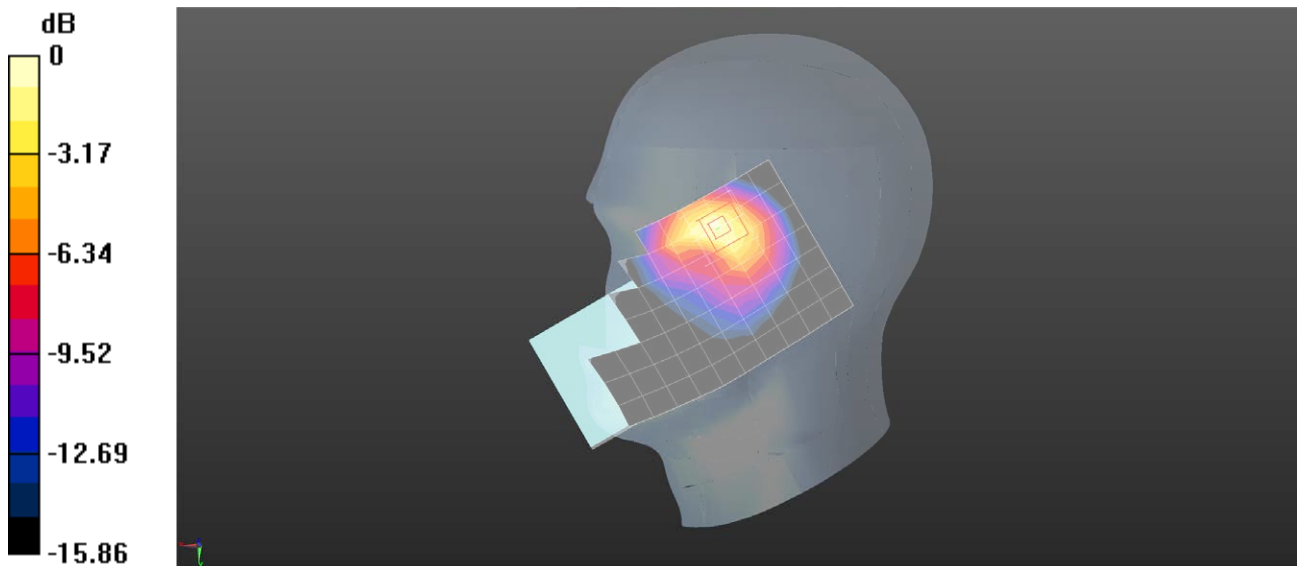

Test Laboratory: SGS-SAR Lab

V2314 LTE Band 26 15M QPSK 1RB0 26965CH Back side 15mm Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: LTE-FDD BW 15MHz; Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 43.17$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.237 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.078 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.301 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.250 W/kg

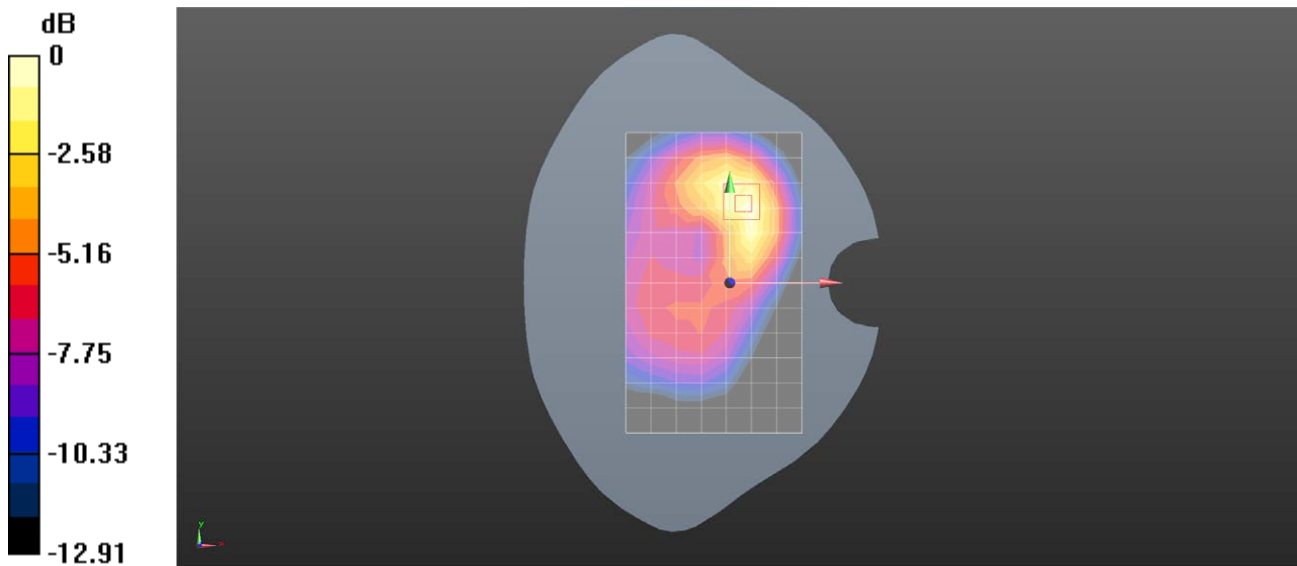

0 dB = 0.250 W/kg = -6.02 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 LTE Band 26 15M QPSK 1RB0 26965CH Back side 10mm Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: LTE-FDD BW 15MHz; Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 43.17$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.529 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.094 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.694 W/kg

SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.545 W/kg

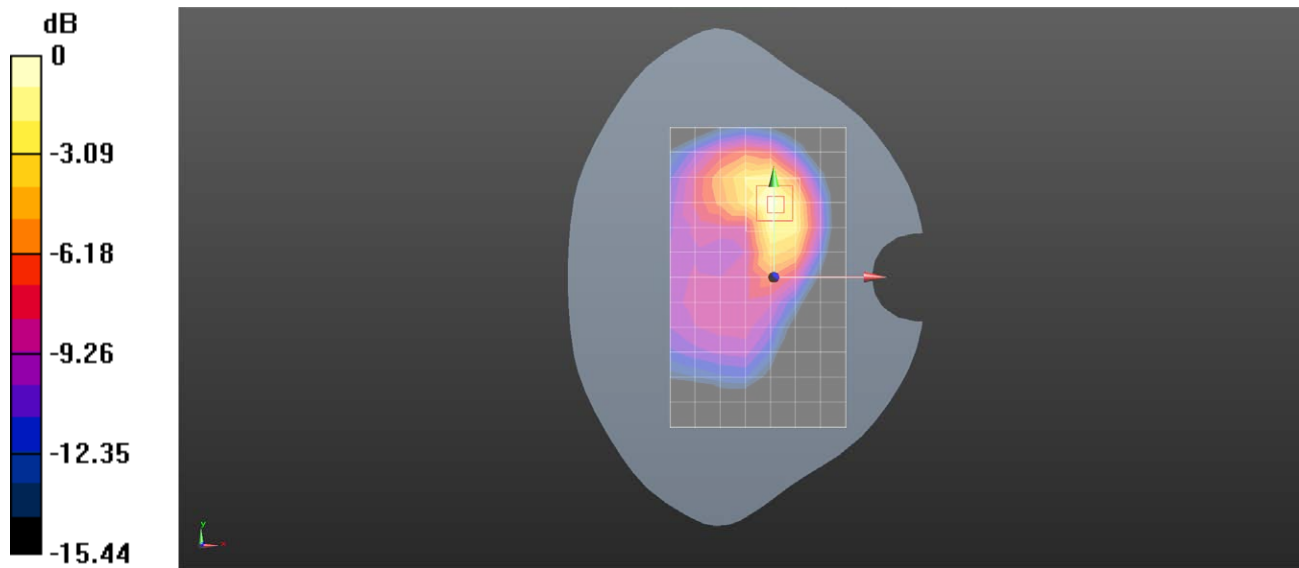

0 dB = 0.545 W/kg = -2.64 dBW/kg

V2314 LTE Band 41 20M QPSK 1RB99 40620CH Right cheek Ant31**DUT: V2314**

Communication System: Band 41; Frequency: 2593.000

Medium: HSL. Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 40.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.042 W/kg; SAR (10g) = 0.022 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.04 dB

SAR (1g) = 0.039 W/kg; SAR (10g) = 0.019 W/kg;

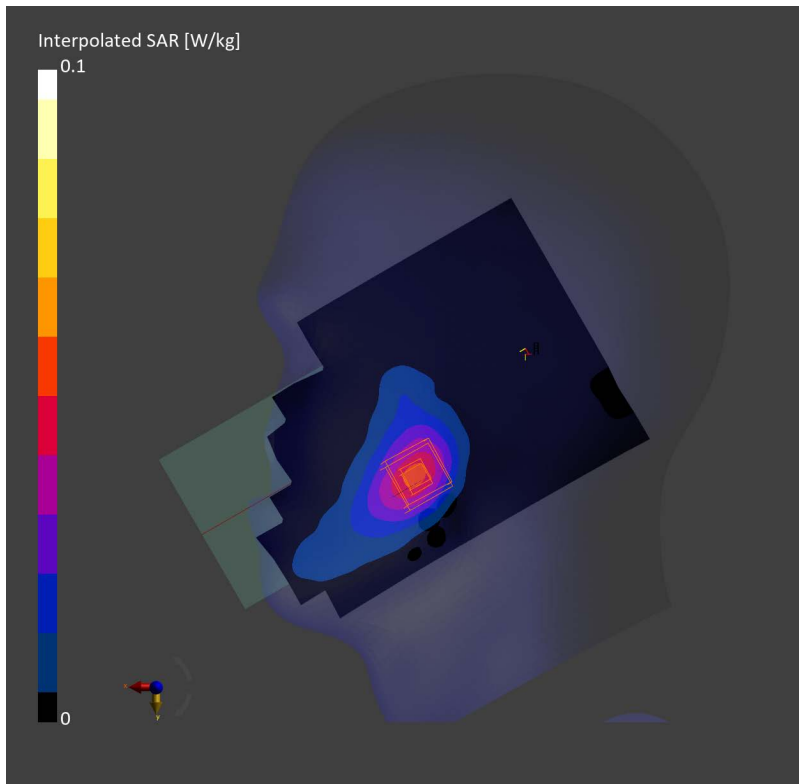

V2314 LTE Band 41 20M QPSK 1RB99 40620CH Back side 15mm Ant14**DUT: V2314**

Communication System: Band 41; Frequency: 2593.000

Medium: HSL. Medium parameters used: $f= 2593.000$ MHz; $\sigma= 1.93$ S/m; $\epsilon_r = 40.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (96.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.198 W/kg; SAR (10g) = 0.107 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.04 dB

SAR (1g) = 0.204 W/kg; SAR (10g) = 0.109 W/kg;

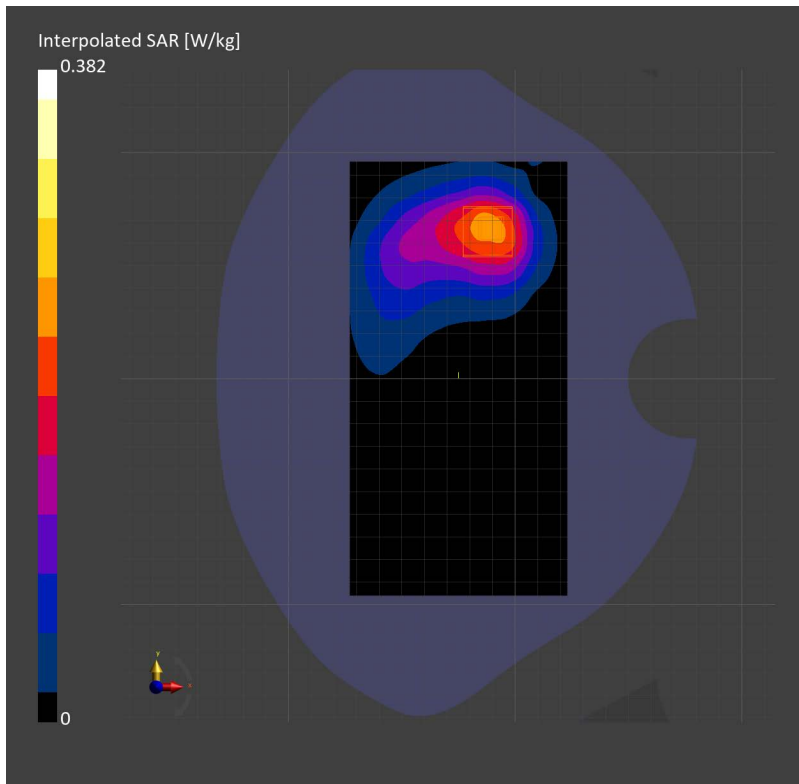

V2314 LTE Band 41 20M QPSK 50RB50 40620CH Top side 10mm Ant14**DUT: V2314**

Communication System: Band 41; Frequency: 2593.000

Medium: HSL. Medium parameters used: $f= 2593.000$ MHz; $\sigma= 1.93$ S/m; $\epsilon_r = 40.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (64.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.288 W/kg; SAR (10g) = 0.136 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.02 dB

SAR (1g) = 0.294 W/kg; SAR (10g) = 0.139 W/kg;

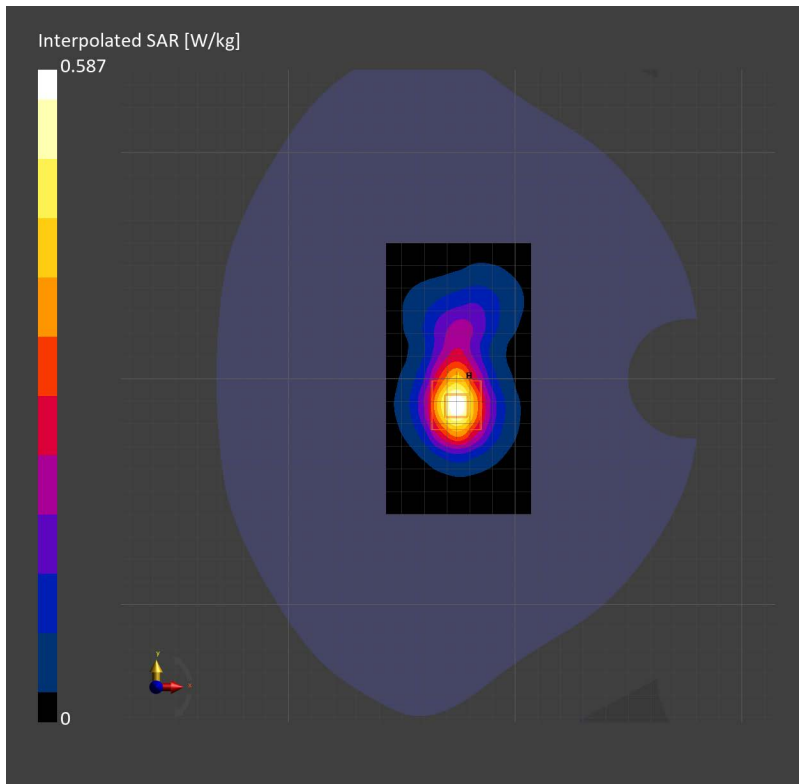

Test Laboratory: Test Laboratory: SGS-SAR Lab

V2314 LTE Band 66 20M QPSK 50RB50 132572CH Right cheek Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: LTE-FDD BW 20MHz; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1770$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.169$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.820 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.559 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.528 W/kg; SAR(10 g) = 0.242 W/kg

Maximum value of SAR (measured) = 0.852 W/kg

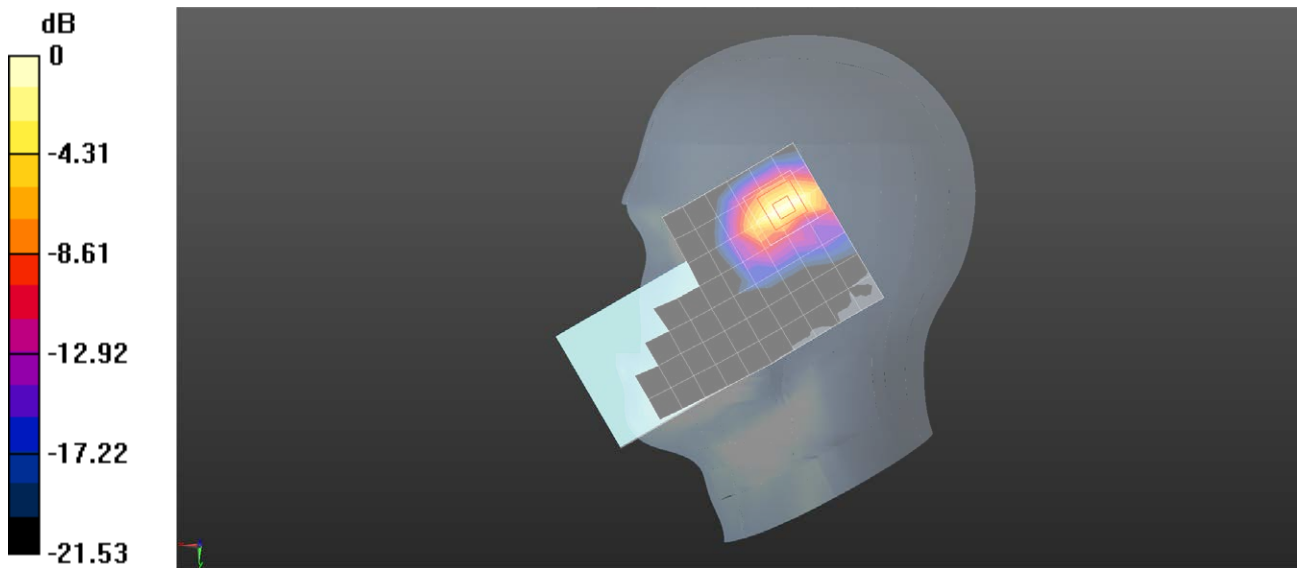

0 dB = 0.852 W/kg = -0.70 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 LTE Band 66 20M QPSK 50RB50 132572CH Back side 15mm Ant31

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: LTE-FDD BW 20MHz; Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1770$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 40.169$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.332 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.210 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.359 W/kg

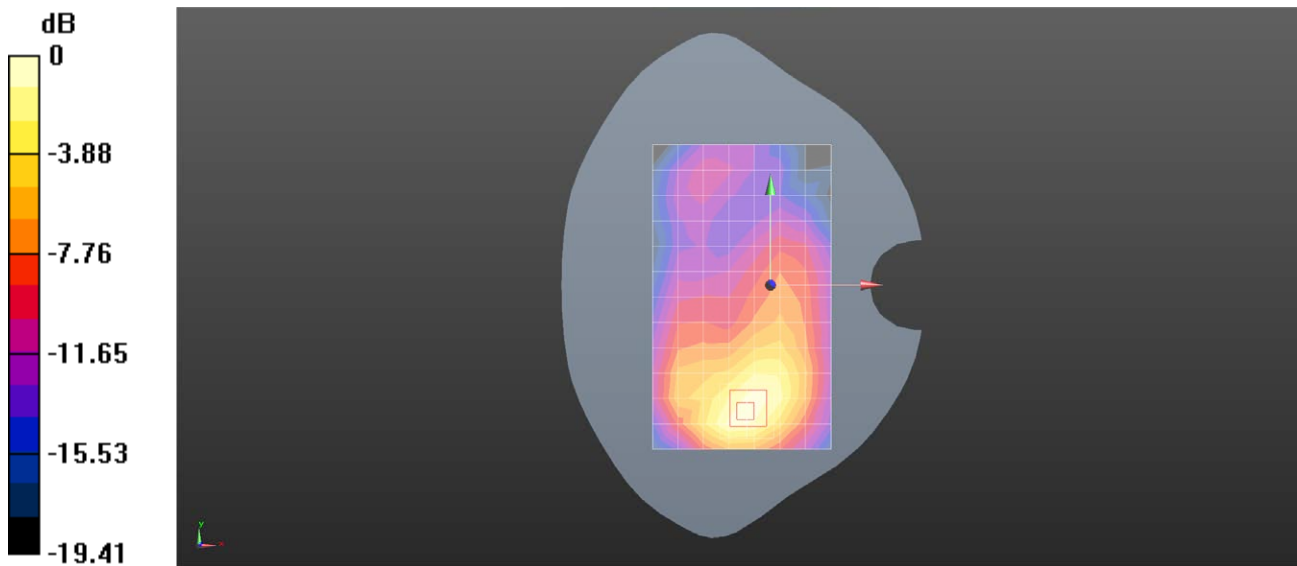

Test Laboratory: SGS-SAR Lab

V2314 LTE Band 66 20M QPSK 50RB50 132322CH Top side 10mm Ant14

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: LTE-FDD BW 20MHz; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 40.182$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.435 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.904 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.710 W/kg

SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.594 W/kg

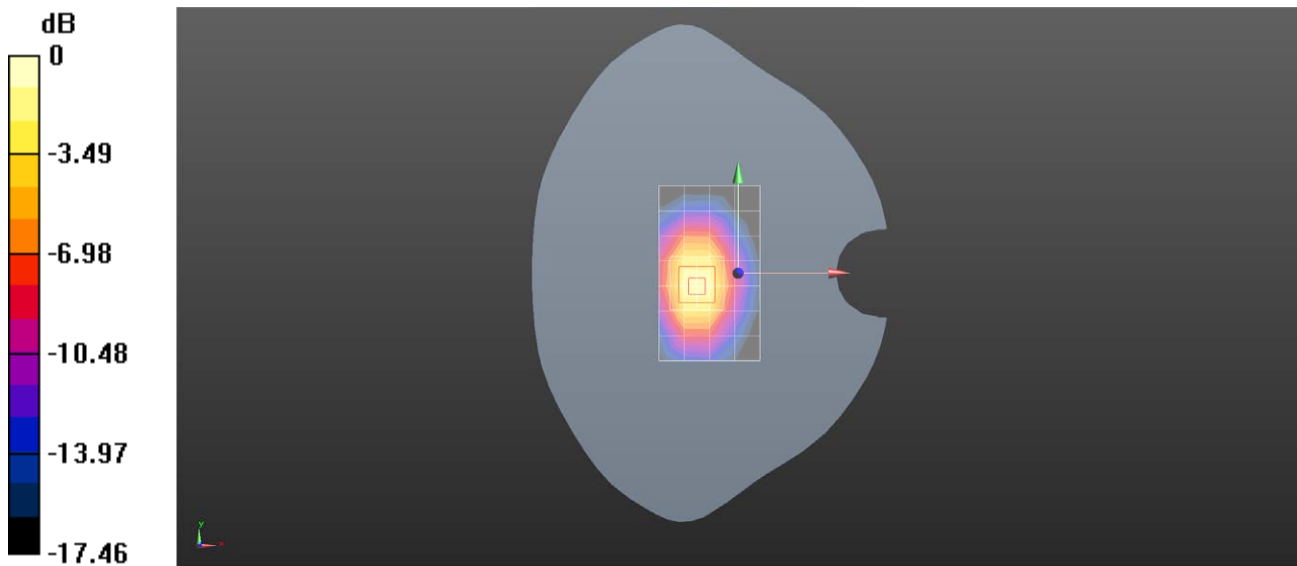

0 dB = 0.594 W/kg = -2.26 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 5G NR N2 20M QPSK 50RB28 376000CH Left cheek Ant31

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: NR; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 40.523$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.129 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.335 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.132 W/kg

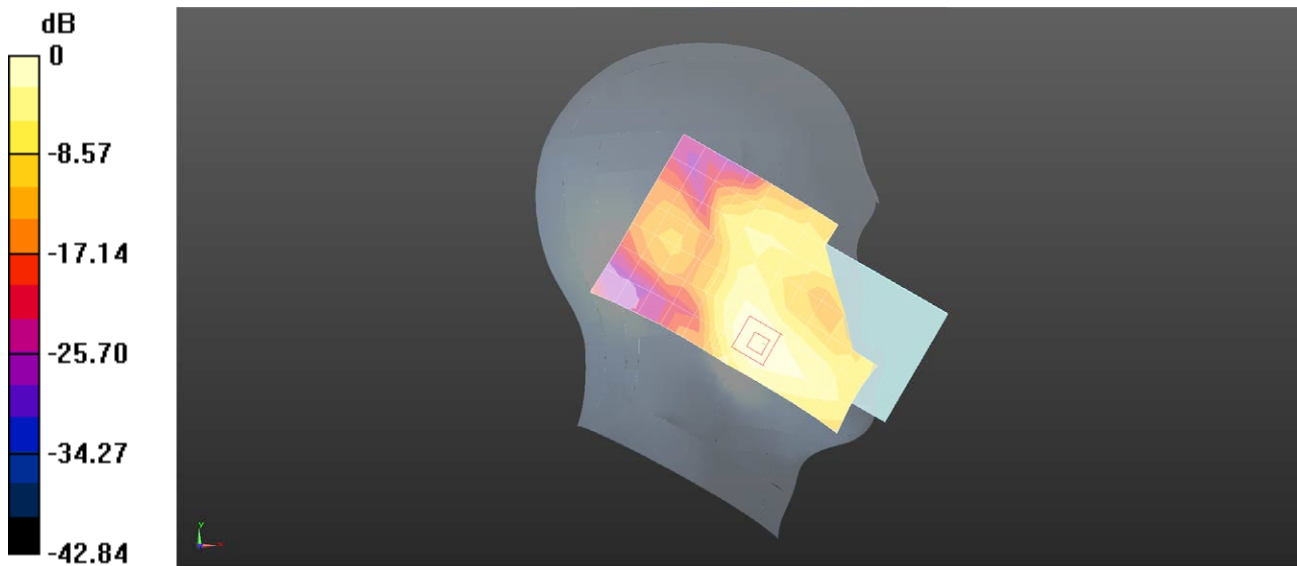

0 dB = 0.132 W/kg = -8.79 dBW/kg

Test Laboratory: Test Laboratory: SGS-SAR Lab

V2314 5G NR N2 20M QPSK 50RB28 372000CH Back side 15mm Ant14

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: NR; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 40.533$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.313 W/kg


Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.174 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.366 W/kg

SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.310 W/kg

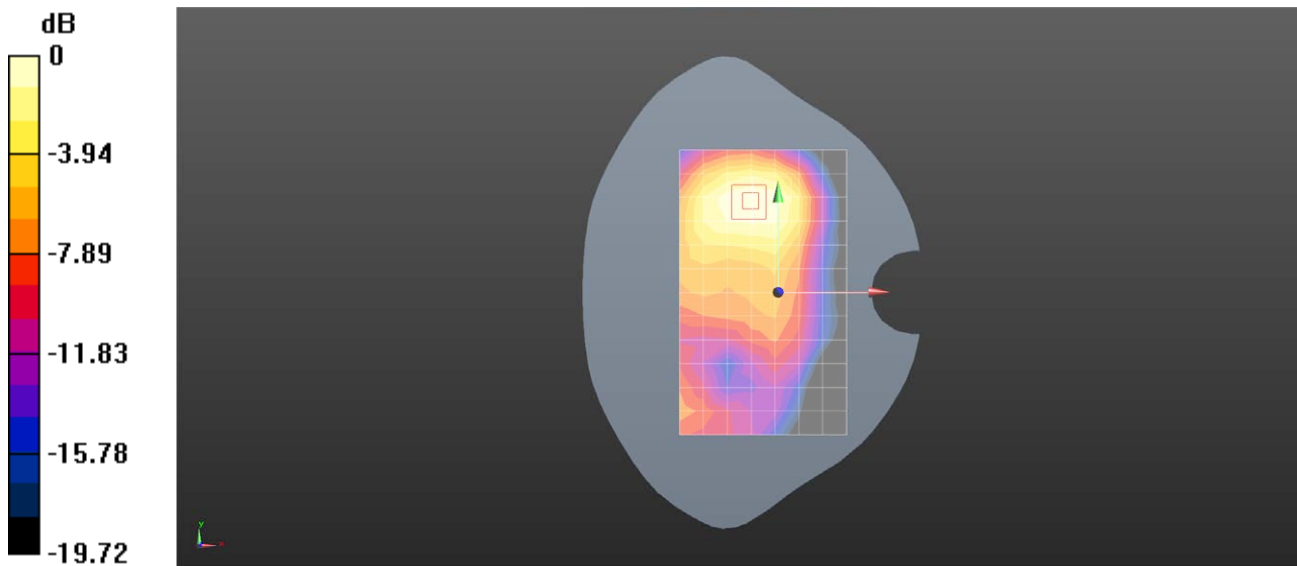

0 dB = 0.310 W/kg = -5.09 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 5G NR N2 20M QPSK 1RB1 376000CH Bottom side 10mm Ant31

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: NR; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 40.523$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(7.63, 7.63, 7.63); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.559 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.979 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.793 W/kg

SAR(1 g) = 0.431 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.657 W/kg

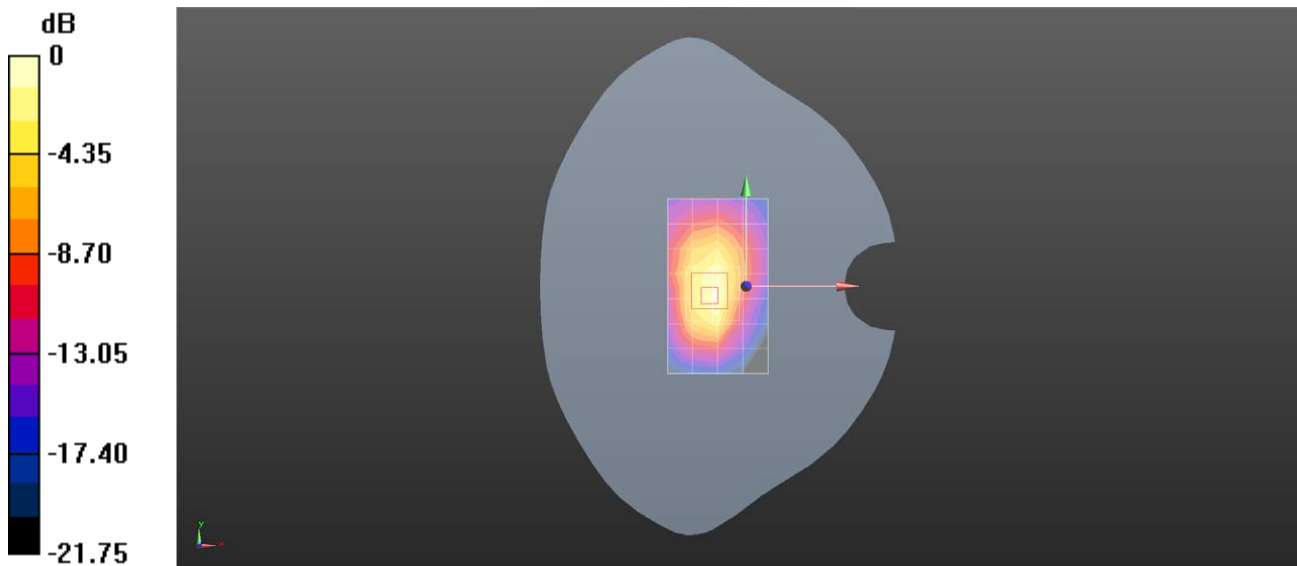

0 dB = 0.657 W/kg = -1.82 dBW/kg

V2314 5G NR N7 40M QPSK 1RB108 504000CH Right cheek Ant11**DUT: V2314**

Communication System: Band n7; Frequency: 2520.000

Medium: HSL. Medium parameters used: $f= 2520.000$ MHz; $\sigma= 1.89$ S/m; $\epsilon_r = 38.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.423 W/kg; SAR (10g) = 0.212 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.05 dB

SAR (1g) = 0.500 W/kg; SAR (10g) = 0.216 W/kg;

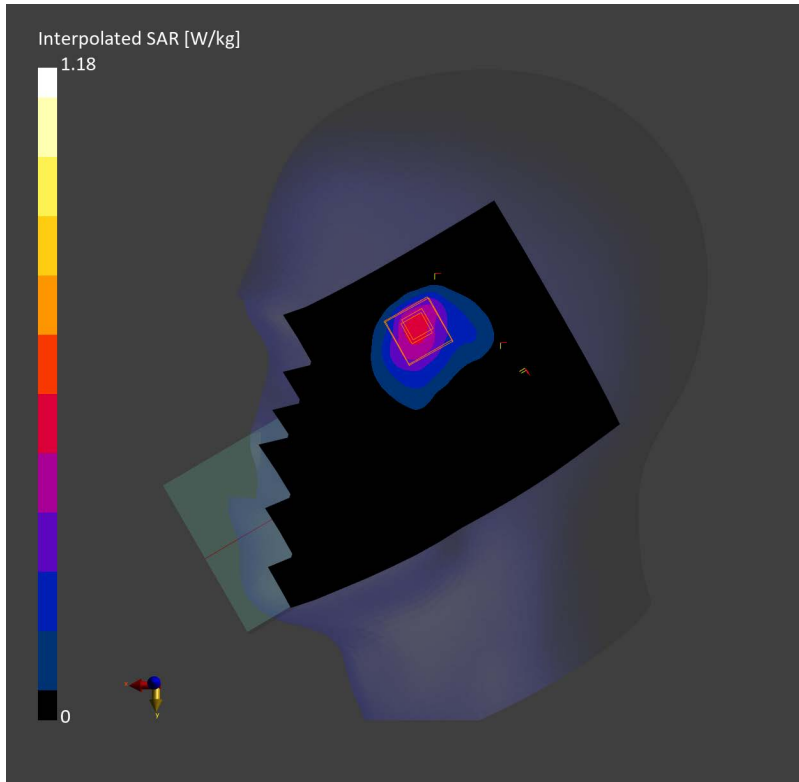

V2314 5G NR N7 40M QPSK 1RB108 504000CH Back side 15mm Ant11**DUT: V2314**

Communication System: Band n7; Frequency: 2520.000

Medium: HSL. Medium parameters used: $f= 2520.000$ MHz; $\sigma= 1.89$ S/m; $\epsilon_r = 38.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (96.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.488 W/kg; SAR (10g) = 0.258 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.570 W/kg; SAR (10g) = 0.293 W/kg;

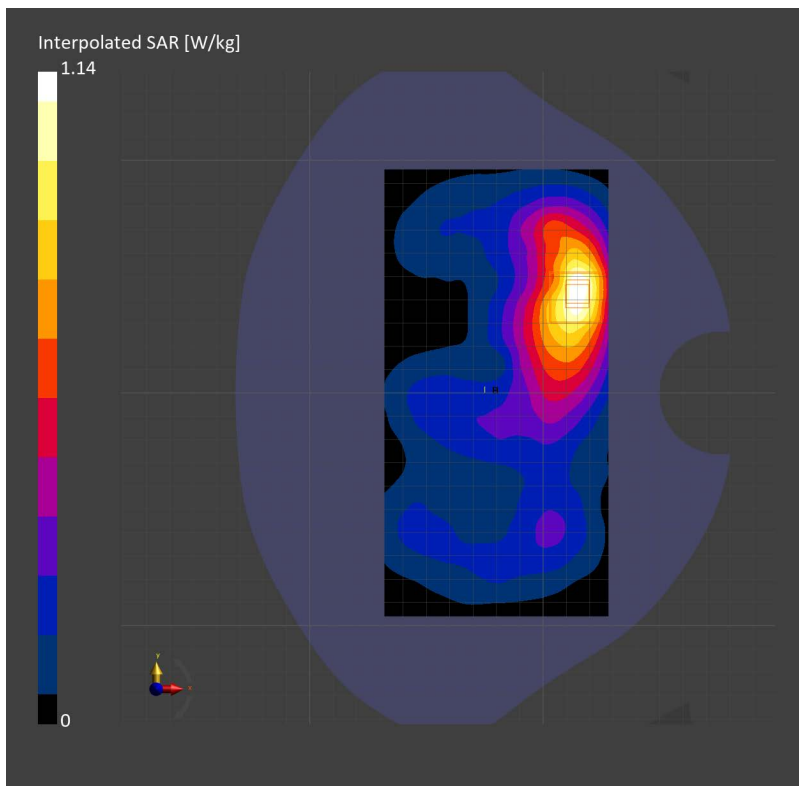

V2314 5G NR N7 40M QPSK 108RB54 507000CH Left side 10mm Ant11**DUT: V2314**

Communication System: Band n7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f= 2535.000$ MHz; $\sigma= 1.91$ S/m; $\epsilon_r = 38.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (72.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.429 W/kg; SAR (10g) = 0.194 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.10 dB

SAR (1g) = 0.428 W/kg; SAR (10g) = 0.190 W/kg;

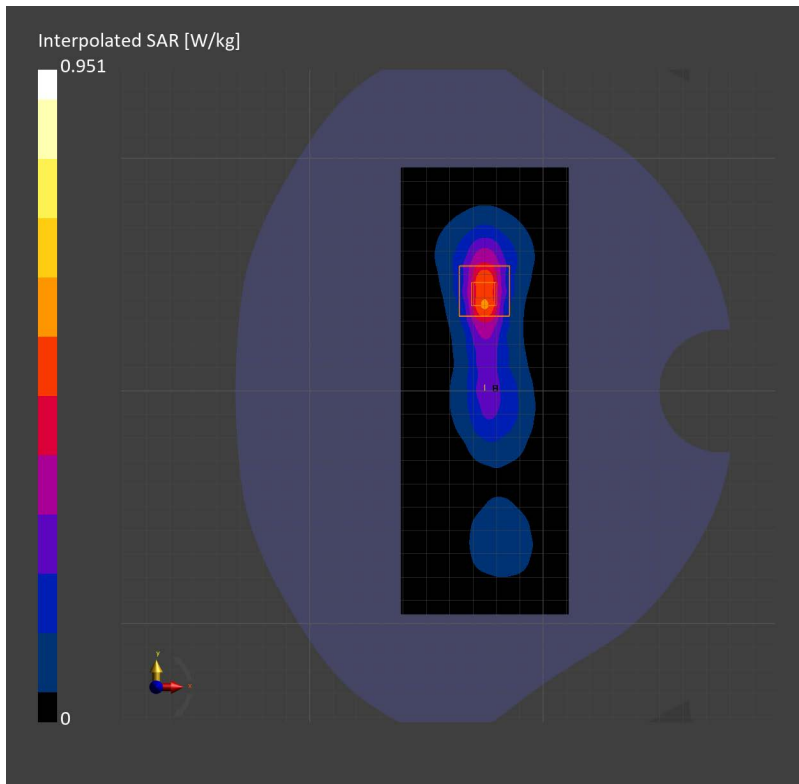

V2314 5G NR N7 40M QPSK 108RB54 507000CH Back side 0mm Ant11**DUT: V2314**

Communication System: Band n7; Frequency: 2535.000

Medium: HSL. Medium parameters used: $f= 2535.000$ MHz; $\sigma= 1.89$ S/m; $\epsilon_r = 40.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (96.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 3.55 W/kg; SAR (10g) = 1.56 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.03 dB

SAR (1g) = 3.95 W/kg; SAR (10g) = 1.39 W/kg;

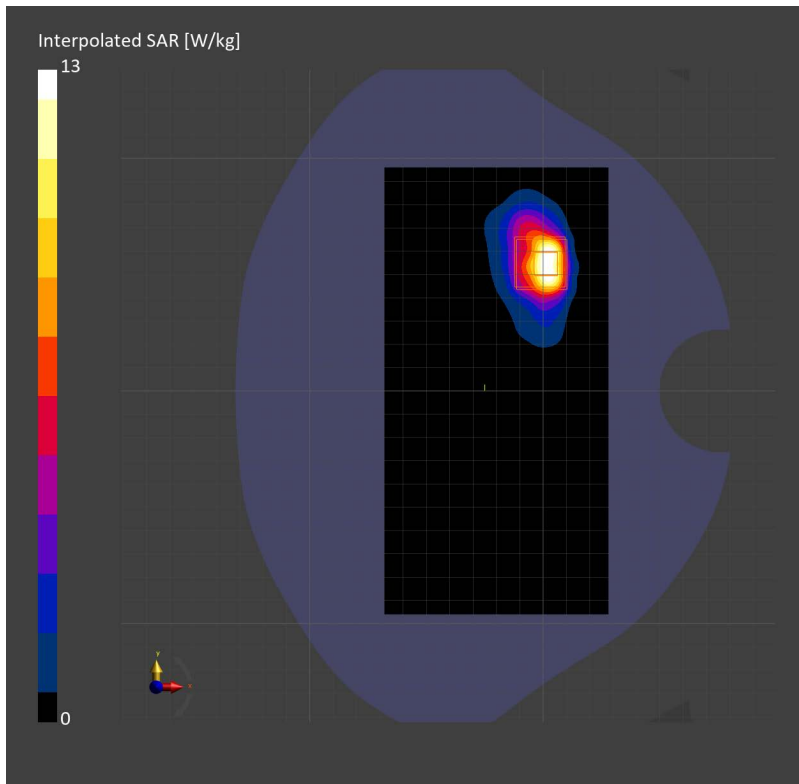

Test Laboratory: SGS-SAR Lab

V2314 5G NR N26 20M QPSK 1RB1 164800CH Right cheek Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: NR; Frequency: 824 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 824 \text{ MHz}$; $\sigma = 0.929 \text{ S/m}$; $\epsilon_r = 42.421$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.661 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.293 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.580 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

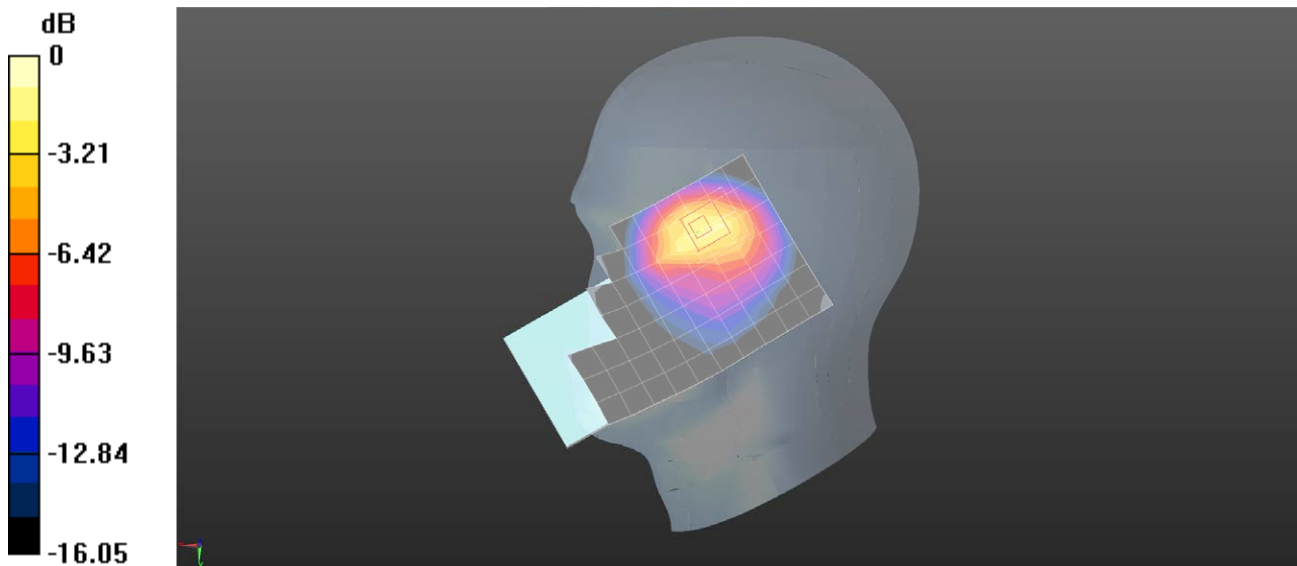

0 dB = 1.04 W/kg = 0.17 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 5G NR N26 20M QPSK 50RB28 164800CH Back side 15mm Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: NR; Frequency: 824 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 824$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 42.421$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.215 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.868 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.246 W/kg

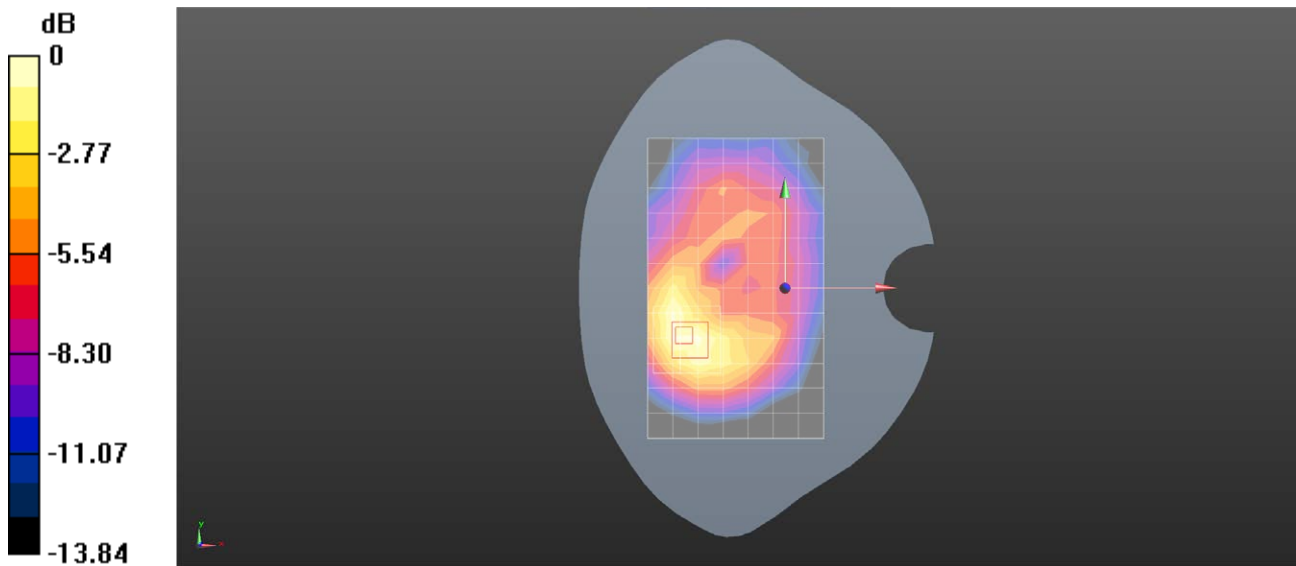

0 dB = 0.246 W/kg = -6.09 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 5G NR N26 20M QPSK 50RB28 164800CH Back side 10mm Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: NR; Frequency: 824 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 824 \text{ MHz}$; $\sigma = 0.929 \text{ S/m}$; $\epsilon_r = 42.421$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(9.02, 9.02, 9.02); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.585 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.999 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.737 W/kg

SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.600 W/kg

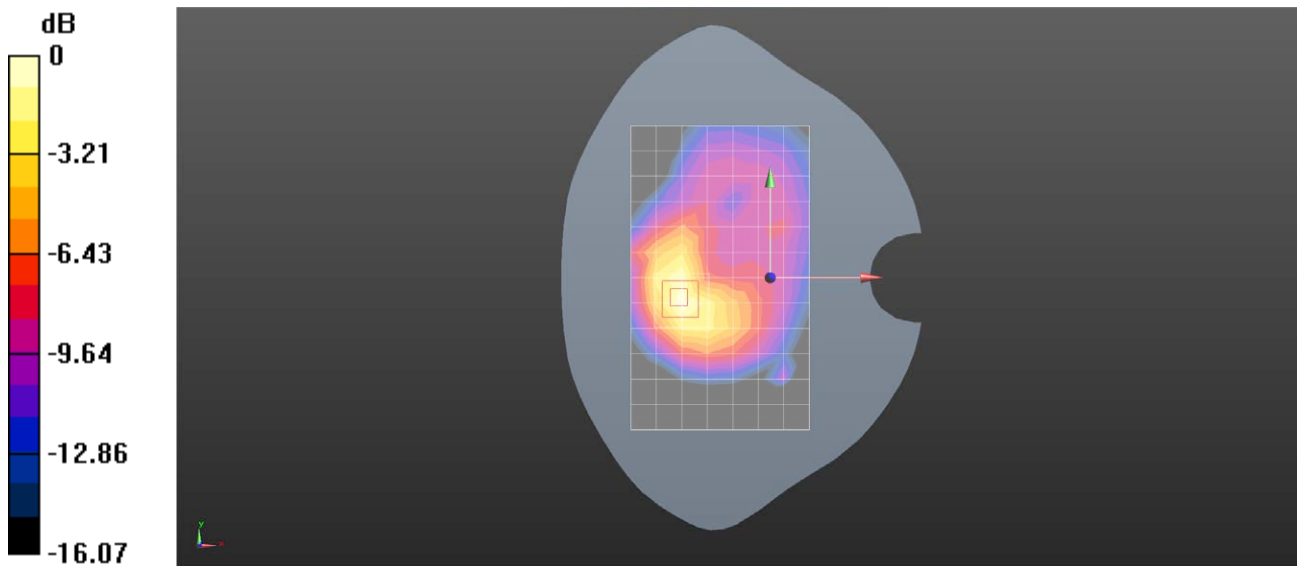

0 dB = 0.600 W/kg = -2.22 dBW/kg

V2314 5G NR N38 40M QPSK 1RB104 520000CH Right cheek Ant11**Device**

Communication System: Band n38; Frequency: 2600.000

Medium: HSL. Medium parameters used: $f= 2600.000$ MHz; $\sigma= 1.97$ S/m; $\epsilon_r = 38.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.580 W/kg; SAR (10g) = 0.256 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.16 dB

SAR (1g) = 0.548 W/kg; SAR (10g) = 0.231 W/kg;

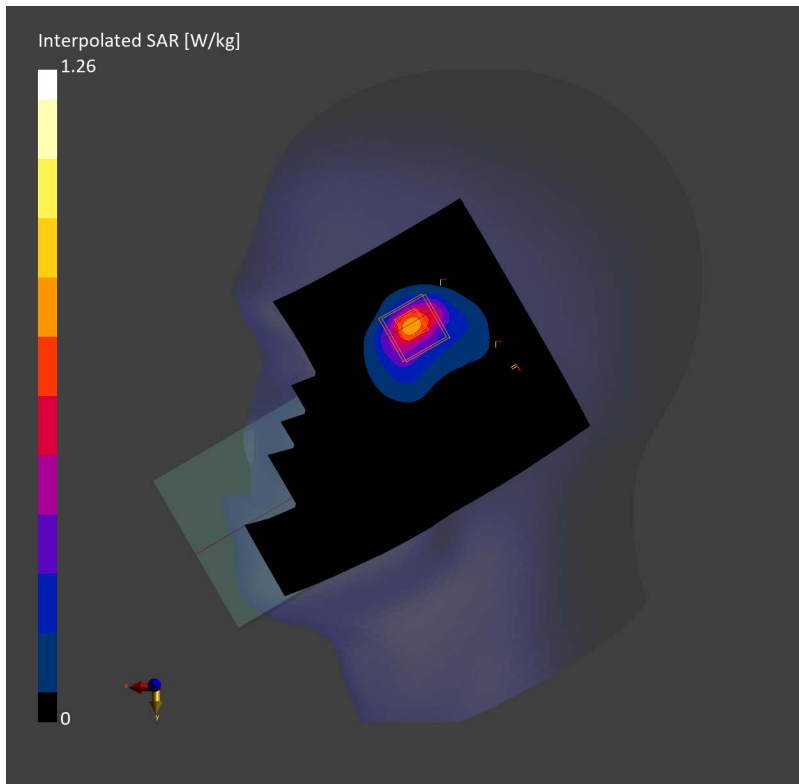

V2314 5G NR N38 40M QPSK 1RB104 520000CH Back side 15mm Ant11**DUT: V2314**

Communication System: Band n38; Frequency: 2600.000

Medium: HSL. Medium parameters used: $f=2600.000$ MHz; $\sigma=1.97$ S/m; $\epsilon_r=38.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (96.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.476 W/kg; SAR (10g) = 0.249 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.06 dB

SAR (1g) = 0.457 W/kg; SAR (10g) = 0.233 W/kg;

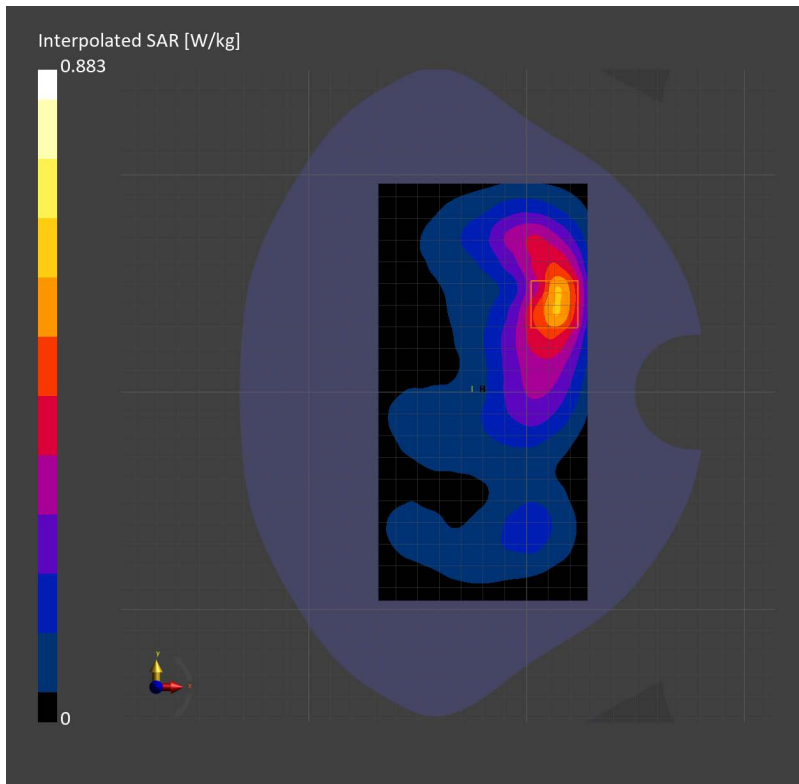

V2314 5G NR N38 40M QPSK 1RB104 520000CH Left side 10mm Ant11**DUT: V2314**

Communication System: Band n38; Frequency: 2600.000

Medium: HSL. Medium parameters used: $f=2600.000$ MHz; $\sigma=1.97$ S/m; $\epsilon_r=38.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (64.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.417 W/kg; SAR (10g) = 0.186 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.09 dB

SAR (1g) = 0.480 W/kg; SAR (10g) = 0.208 W/kg;

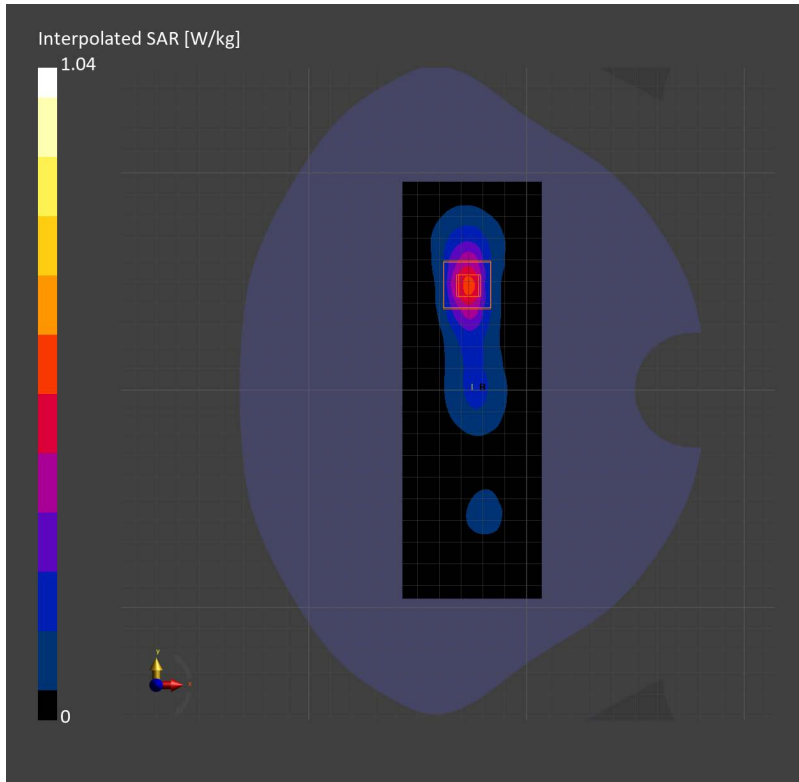

V2314 5G NR N38 40M QPSK 50RB28 520000CH Left side 0mm Ant11**DUT: V2314**

Communication System: Band n38; Frequency: 2600.000

Medium: HSL. Medium parameters used: $f= 2600.000$ MHz; $\sigma= 1.97$ S/m; $\epsilon_r = 38.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 3.26 W/kg; SAR (10g) = 1.24 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.08 dB

SAR (1g) = 3.80 W/kg; SAR (10g) = 1.21 W/kg;

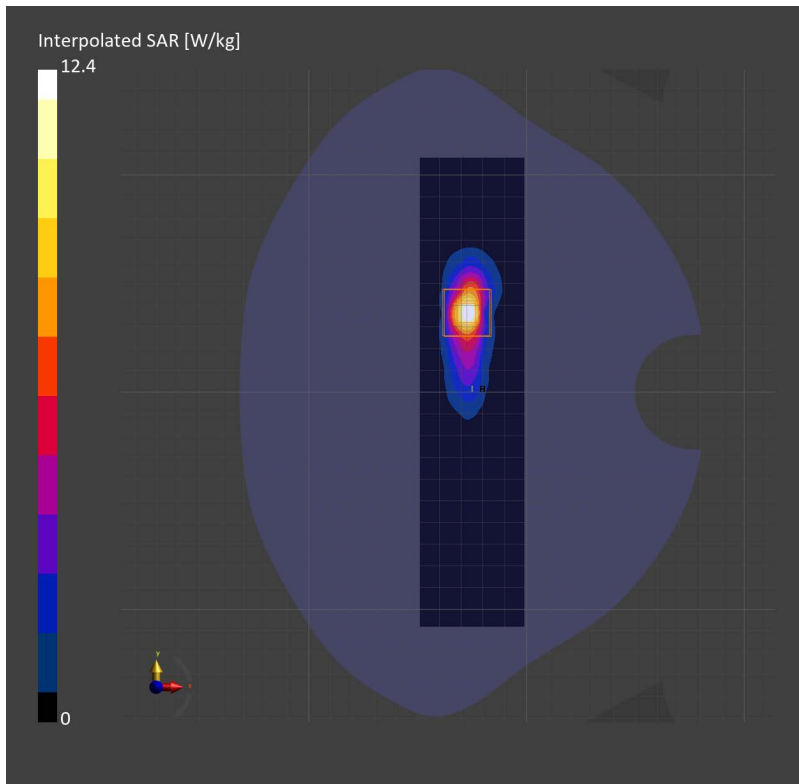

V2314 5G NR N41 100M QPSK 1RB271 518598CH Right cheek Ant11**Device**

Communication System: Band n41; Frequency: 2592.990

Medium: HSL. Medium parameters used: $f= 2592.990$ MHz; $\sigma= 1.96$ S/m; $\epsilon_r = 37.7$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.536 W/kg; SAR (10g) = 0.249 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.06 dB

SAR (1g) = 0.519 W/kg; SAR (10g) = 0.223 W/kg;

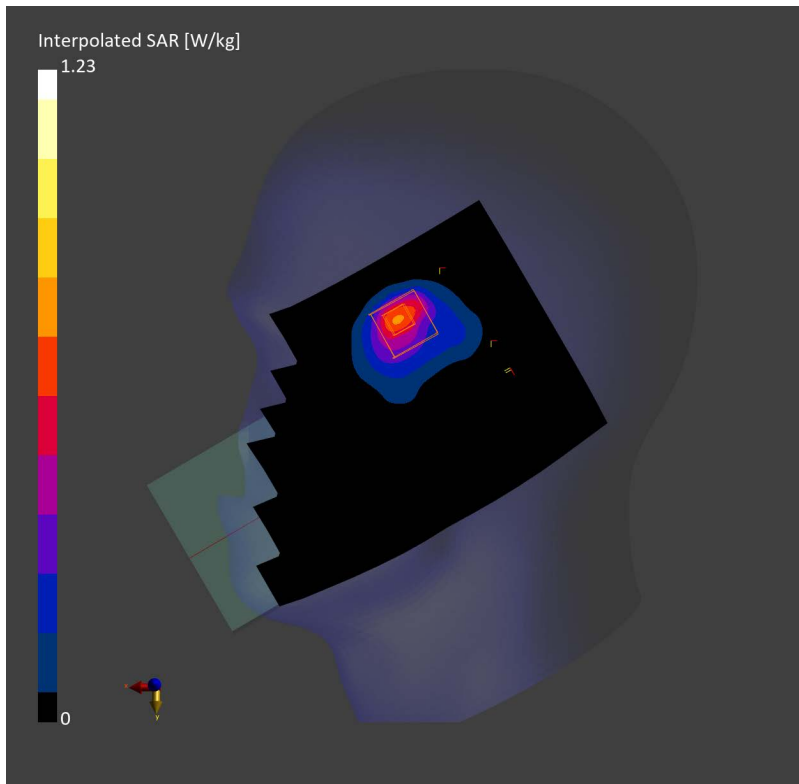

V2314 5G NR N41 100M QPSK 135RB69 528000CH Back side 15mm Ant11**DUT: V2314**

Communication System: Band n41; Frequency: 2640.000

Medium: HSL. Medium parameters used: $f= 2640.000$ MHz; $\sigma= 2.01$ S/m; $\epsilon_r = 37.5$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (96.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.592 W/kg; SAR (10g) = 0.302 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.17 dB

SAR (1g) = 0.603 W/kg; SAR (10g) = 0.298 W/kg;

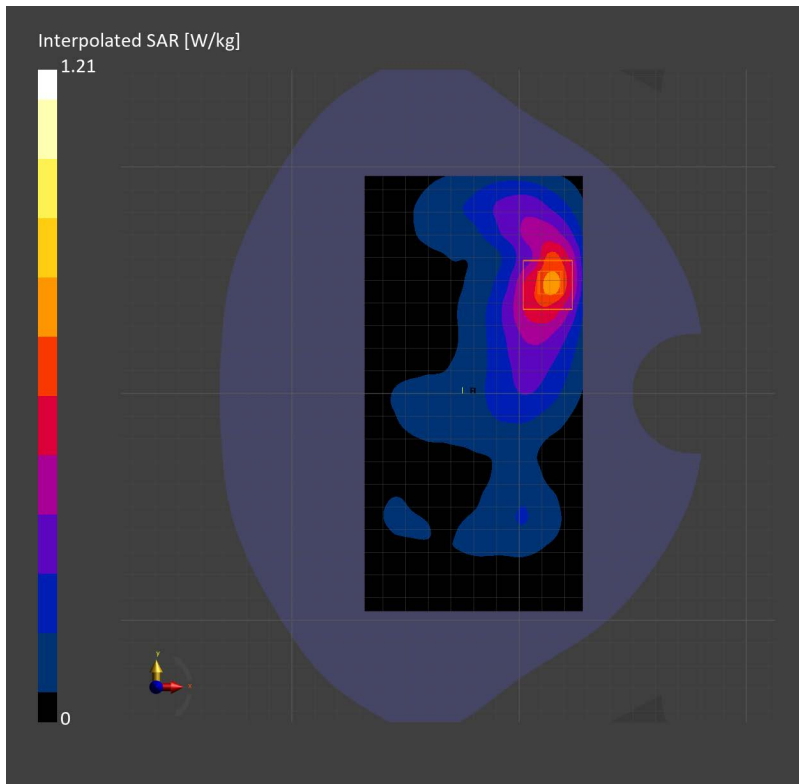

V2314 5G NR N41 100M QPSK 135RB69 523302CH Top side 10mm Ant14**DUT: V2314**

Communication System: Band n41; Frequency: 2616.510

Medium: HSL. Medium parameters used: $f= 2616.510$ MHz; $\sigma= 1.99$ S/m; $\epsilon_r = 37.6$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (64.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.405 W/kg; SAR (10g) = 0.195 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.12 dB

SAR (1g) = 0.411 W/kg; SAR (10g) = 0.196 W/kg;

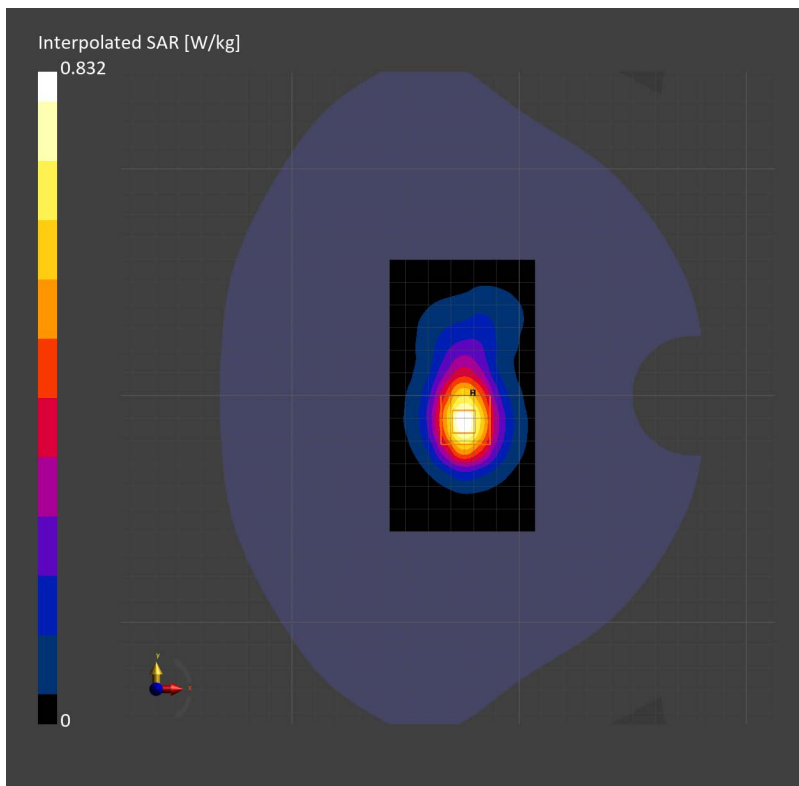

V2314 5G NR N41 100M QPSK 135RB69 518598CH Left side 0mm Ant11**DUT: V2314**

Communication System: Band n41; Frequency: 2592.990

Medium: HSL. Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 37.7$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.93, 7.18, 7.42); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 3.75 W/kg; SAR (10g) = 1.36 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 4.10 W/kg; SAR (10g) = 1.29 W/kg;

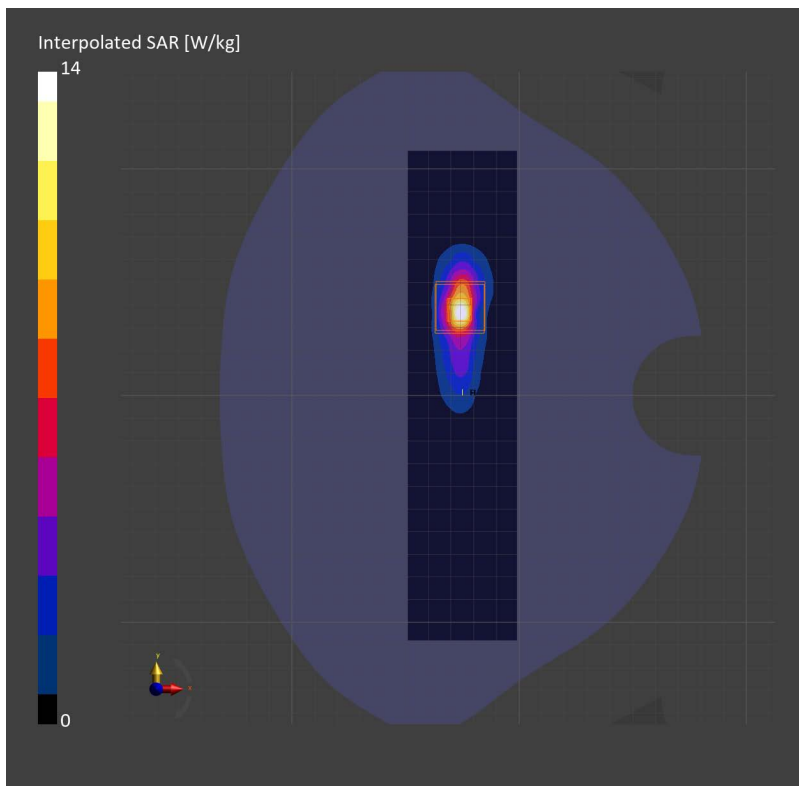

Test Laboratory: Test Laboratory: SGS-SAR Lab

V2314 5G NR N66 40M QPSK 108RB54 352000CH Right cheek Ant11

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: NR; Frequency: 1760 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1760$ MHz; $\sigma = 1.313$ S/m; $\epsilon_r = 40.174$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.819 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.815 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.548 W/kg; SAR(10 g) = 0.263 W/kg

Maximum value of SAR (measured) = 1.00 W/kg

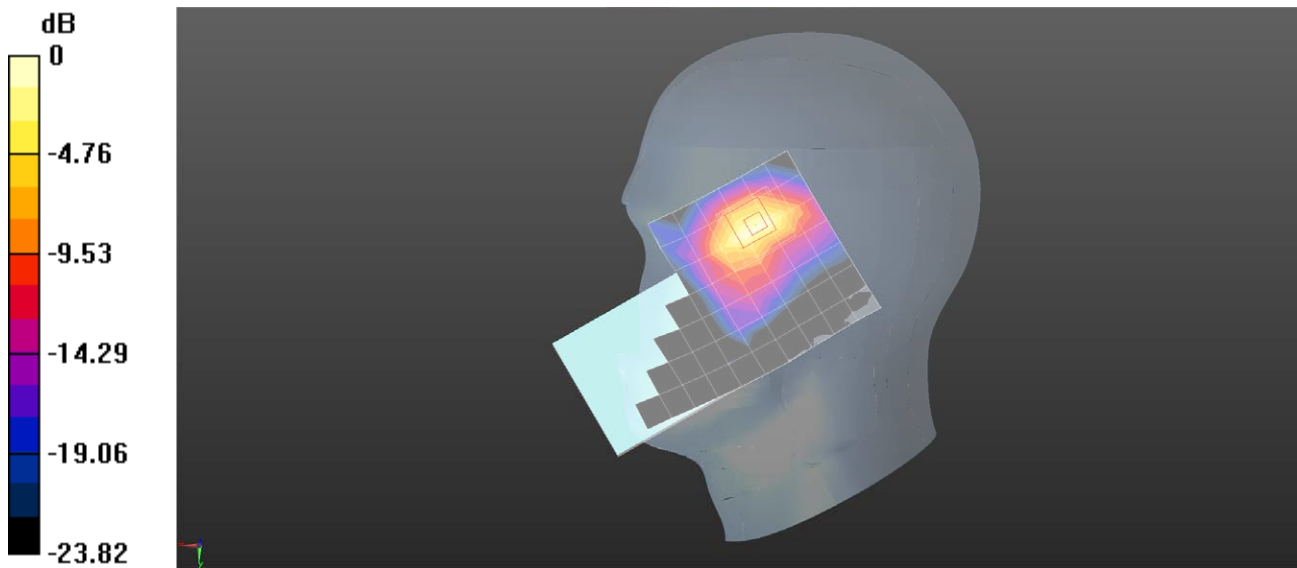

0 dB = 1.00 W/kg = 0.00 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 5G NR N66 40M QPSK 1RB214 349000CH Back side 15mm Ant14**DUT: V2314; Type: Mobile Phone; Serial: 864236069991839**

Communication System: NR; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.306$ S/m; $\epsilon_r = 40.182$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.350 W/kg


Configuration/Body/Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.970 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.422 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.343 W/kg

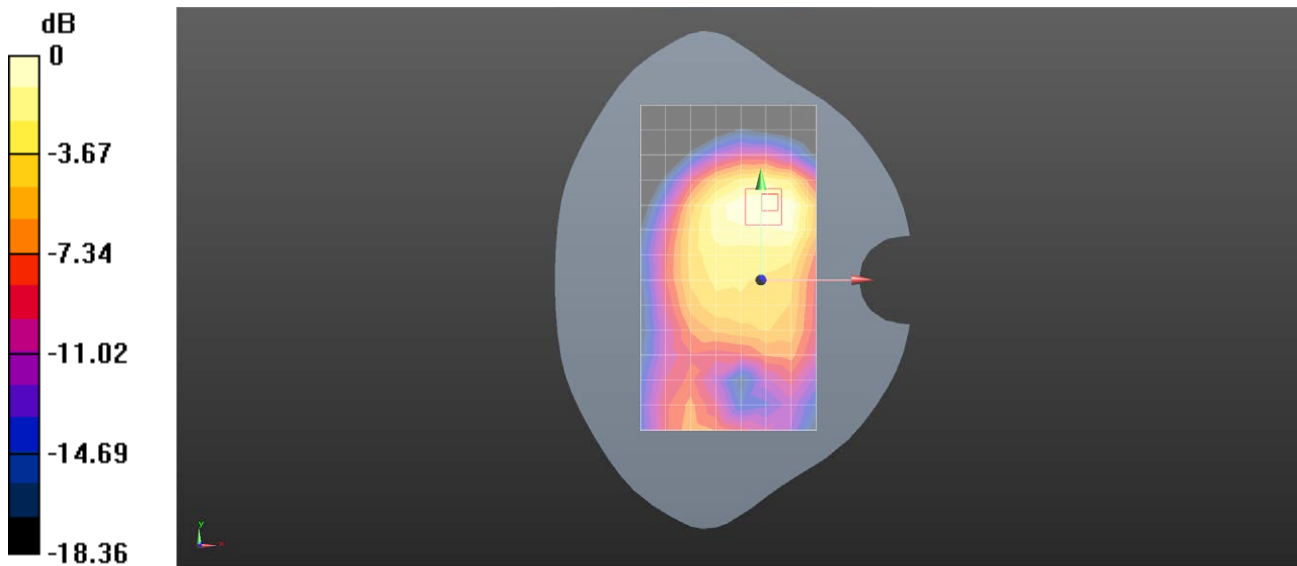

0 dB = 0.343 W/kg = -4.65 dBW/kg

Test Laboratory: SGS-SAR Lab

V2314 5G NR N66 40M QPSK 1RB214 349000CH Top side 10mm Ant14

DUT: V2314; Type: Mobile Phone; Serial: 864236069991839

Communication System: NR; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.306$ S/m; $\epsilon_r = 40.182$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(8.01, 8.01, 8.01); Calibrated: 2023/8/7;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2023/6/26
- Phantom: SAM1; Type: SAM Twin; Serial: 1673
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

Configuration/Body/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.529 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.676 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.860 W/kg

SAR(1 g) = 0.475 W/kg; SAR(10 g) = 0.259 W/kg

Maximum value of SAR (measured) = 0.716 W/kg

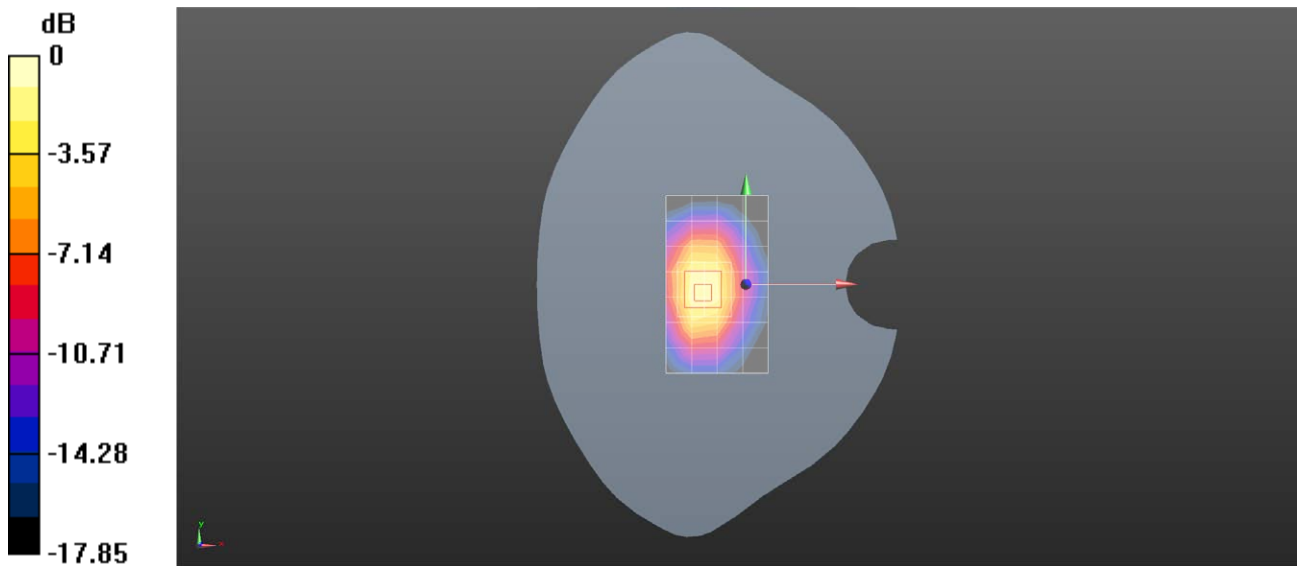

0 dB = 0.716 W/kg = -1.45 dBW/kg

V2314 5G NR N77 100M QPSK 1RB1 650000CH Left cheek Ant23**DUT: V2314**

Communication System: Band n77; Frequency: 3750.000

Medium: HSL. Medium parameters used: $f= 3750.000$ MHz; $\sigma= 3.15$ S/m; $\epsilon_r = 37.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.64, 6.87, 7.09); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.768 W/kg; SAR (10g) = 0.298 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.02 dB

SAR (1g) = 0.772 W/kg; SAR (10g) = 0.280 W/kg;

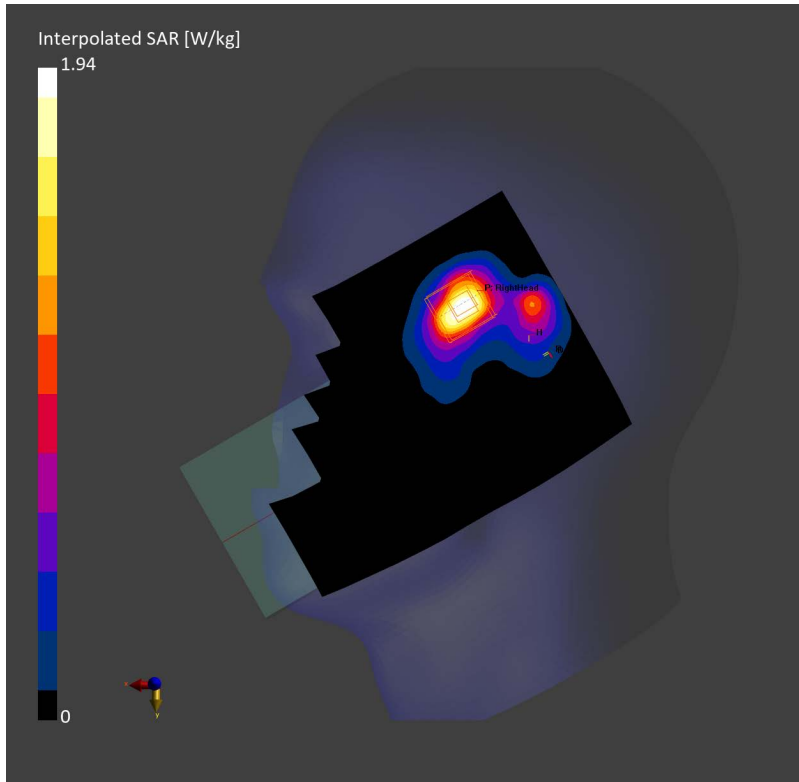

V2314 5G NR N77 100M QPSK 135RB69 662000CH Back side 15mm Ant12**DUT: V2314**

Communication System: Band n77; Frequency: 3930.000

Medium: HSL. Medium parameters used: $f= 3930.000$ MHz; $\sigma= 3.34$ S/m; $\epsilon_r = 36.6$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.6, 6.81, 7.03); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.544 W/kg; SAR (10g) = 0.242 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.07 dB

SAR (1g) = 0.577 W/kg; SAR (10g) = 0.256 W/kg;

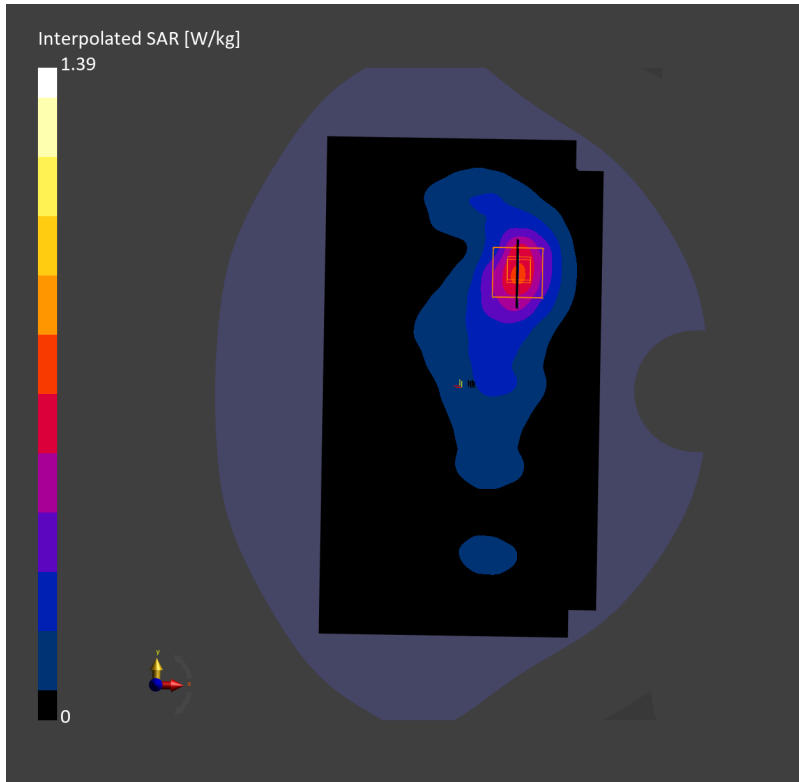

V2314 5G NR N77 100M QPSK 1RB137 650000CH Right side 10mm Ant23**DUT: V2314**

Communication System: Band n77; Frequency: 3750.000

Medium: HSL. Medium parameters used: $f = 3750.000$ MHz; $\sigma = 3.15$ S/m; $\epsilon_r = 37.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.64, 6.87, 7.09); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 8.0 mm x 12.0 mm

SAR (1g) = 0.523 W/kg; SAR (10g) = 0.218 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.18 dB

SAR (1g) = 0.554 W/kg; SAR (10g) = 0.222 W/kg;

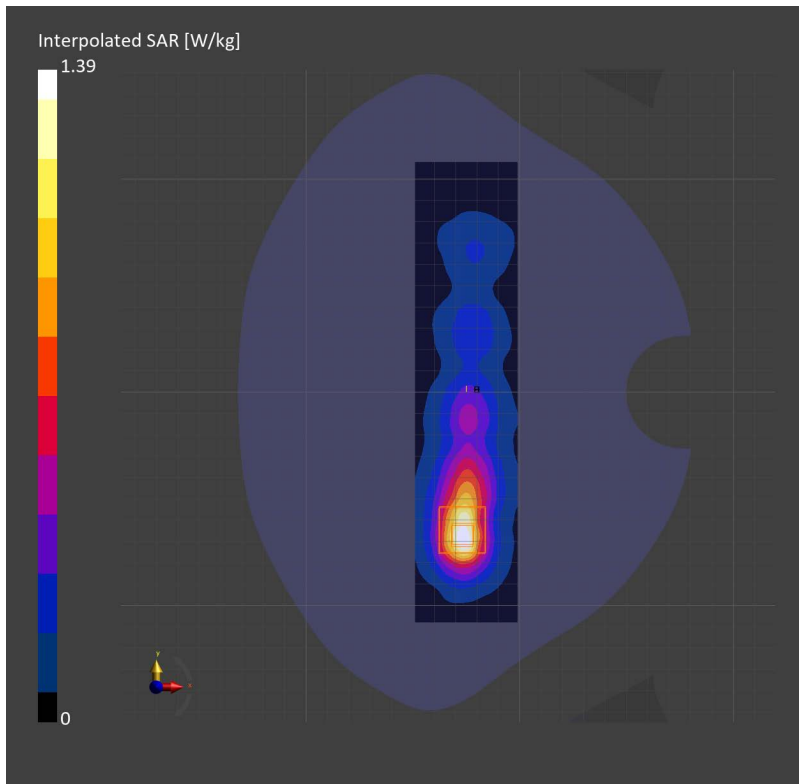

V2314 5G NR N77 100M QPSK 135RB69 662000CH Back side 0mm Ant12**DUT: V2314**

Communication System: Band n77; Frequency: 3930.000

Medium: HSL. Medium parameters used: $f= 3930.000$ MHz; $\sigma= 3.34$ S/m; $\epsilon_r = 36.6$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.6, 6.81, 7.03); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 4.88 W/kg; SAR (10g) = 1.55 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.06 dB

SAR (1g) = 4.89 W/kg; SAR (10g) = 1.47 W/kg;

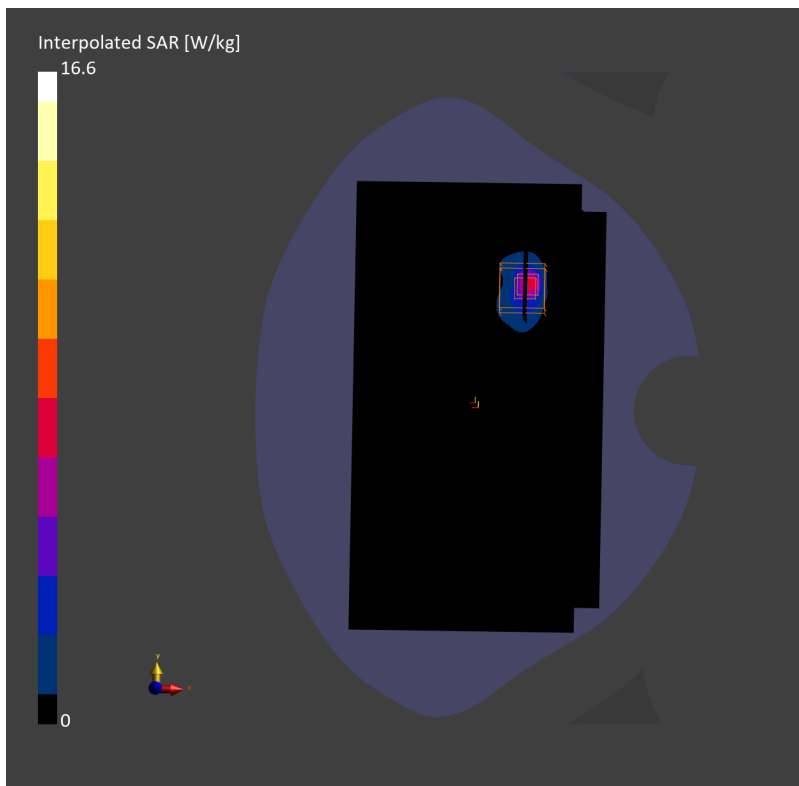

V2314 5G NR N78 100M QPSK 1RB271 650000CH Right cheek Ant12**DUT: V2314**

Communication System: Band n78; Frequency: 3750.000

Medium: HSL. Medium parameters used: $f = 3750.000$ MHz; $\sigma = 3.12$ S/m; $\epsilon_r = 37.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.64, 6.87, 7.09); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.544 W/kg; SAR (10g) = 0.223 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.15 dB

SAR (1g) = 0.643 W/kg; SAR (10g) = 0.233 W/kg;

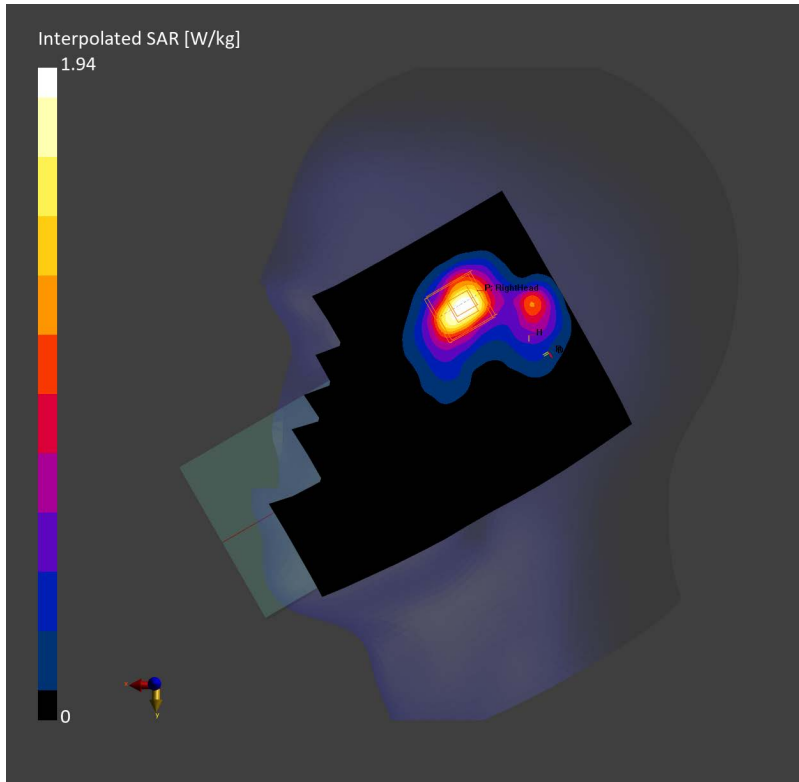

V2314 5G NR N78 100M QPSK 1RB271 650000CH Back side 15mm Ant12**DUT: V2314**

Communication System: Band n78; Frequency: 3750.000

Medium: HSL. Medium parameters used: $f= 3750.000$ MHz; $\sigma= 3.12$ S/m; $\epsilon_r = 37.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.64, 6.87, 7.09); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.666 W/kg; SAR (10g) = 0.297 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.03 dB

SAR (1g) = 0.708 W/kg; SAR (10g) = 0.310 W/kg;

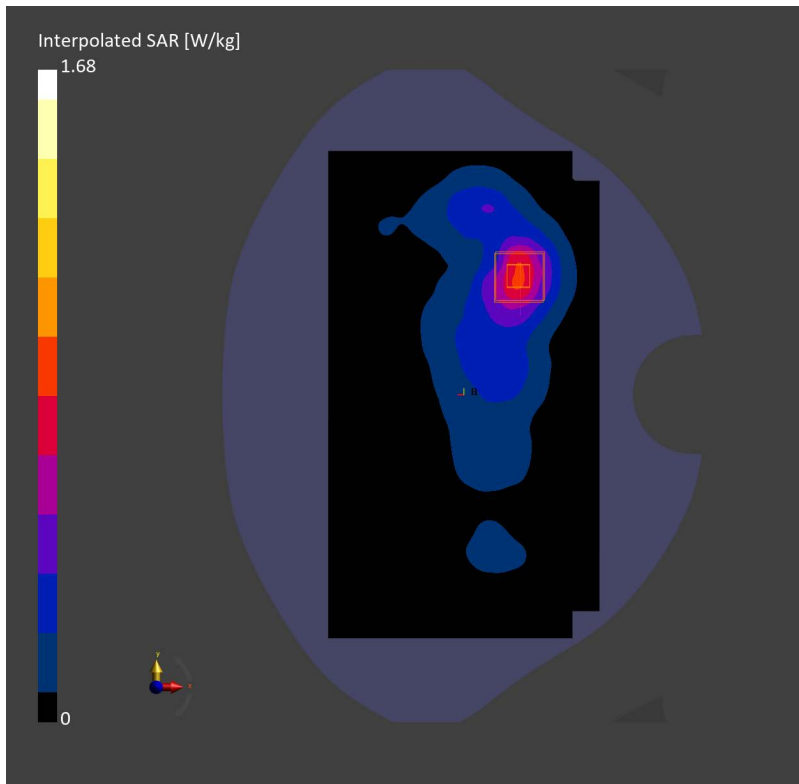

V2314 5G NR N78 100M QPSK 1RB271 650000CH Right side 10mm Ant23**Device**

Communication System: Band n78; Frequency: 3750.000

Medium: HSL. Medium parameters used: $f = 3750.000$ MHz; $\sigma = 3.12$ S/m; $\epsilon_r = 37.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.64, 6.87, 7.09); Calibrated: 2023-07-17

- Sensor-Surface: 1.4 mm

- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14

- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146

- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.411 W/kg; SAR (10g) = 0.166 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.13 dB

SAR (1g) = 0.436 W/kg; SAR (10g) = 0.168 W/kg;

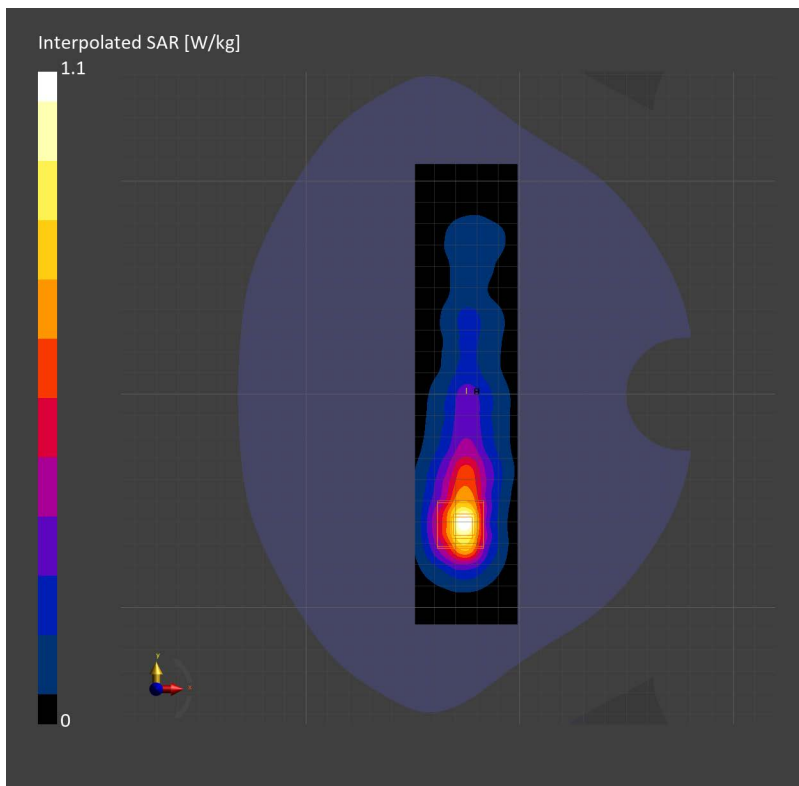

V2314 5G NR N78 100M QPSK 1RB271 650000CH Left side 0mm Ant12**DUT: V2314**

Communication System: Band n78; Frequency: 3750.000

Medium: HSL. Medium parameters used: $f = 3750.000$ MHz; $\sigma = 3.12$ S/m; $\epsilon_r = 37.0$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.64, 6.87, 7.09); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (48.0 mm x 216.0 mm): Measurement Grid: 8.0 mm x 12.0 mm

SAR (1g) = 4.84 W/kg; SAR (10g) = 1.48 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.17 dB

SAR (1g) = 6.48 W/kg; SAR (10g) = 1.58 W/kg;

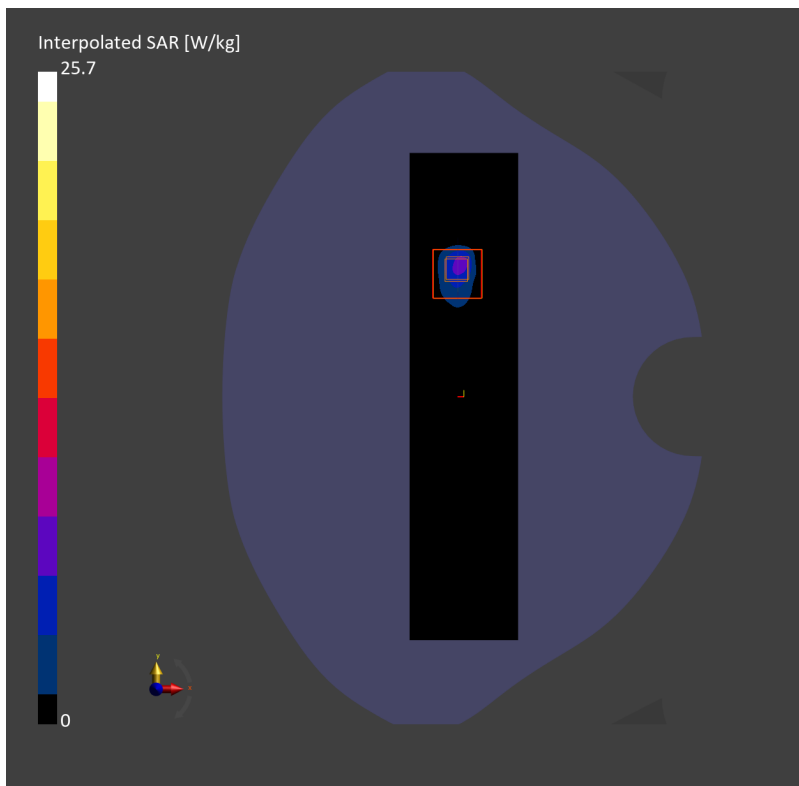

V2314 WIFI 2.4G 802.11b 11CH Left cheek Ant22**DUT: V2314**

Communication System: WLAN 2.4GHz; Frequency: 2462.000

Medium: HSL. Medium parameters used: $f= 2462.000$ MHz; $\sigma= 1.81$ S/m; $\epsilon_r = 40.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.97, 7.23, 7.47); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.298 W/kg; SAR (10g) = 0.148 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.18 dB

SAR (1g) = 0.282 W/kg; SAR (10g) = 0.137 W/kg;

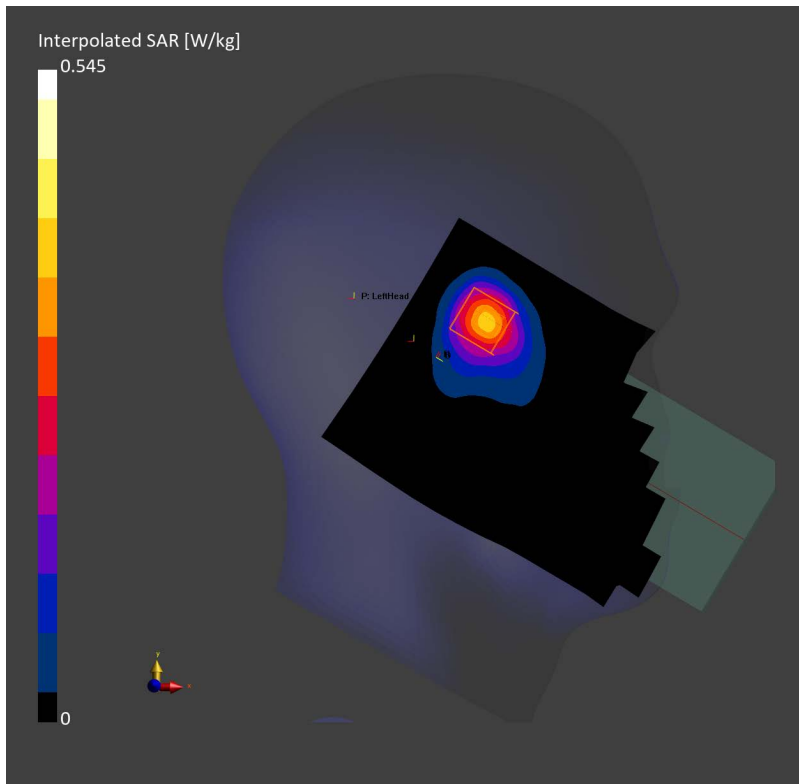

V2314 WIFI 2.4G 802.11b 11CH Back side 15mm Ant22**DUT: V2314**

Communication System: WLAN 2.4GHz; Frequency: 2462.000

Medium: HSL. Medium parameters used: $f= 2462.000$ MHz; $\sigma= 1.81$ S/m; $\epsilon_r = 40.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.97, 7.23, 7.47); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.107 W/kg; SAR (10g) = 0.060 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.08 dB

SAR (1g) = 0.110 W/kg; SAR (10g) = 0.064 W/kg;

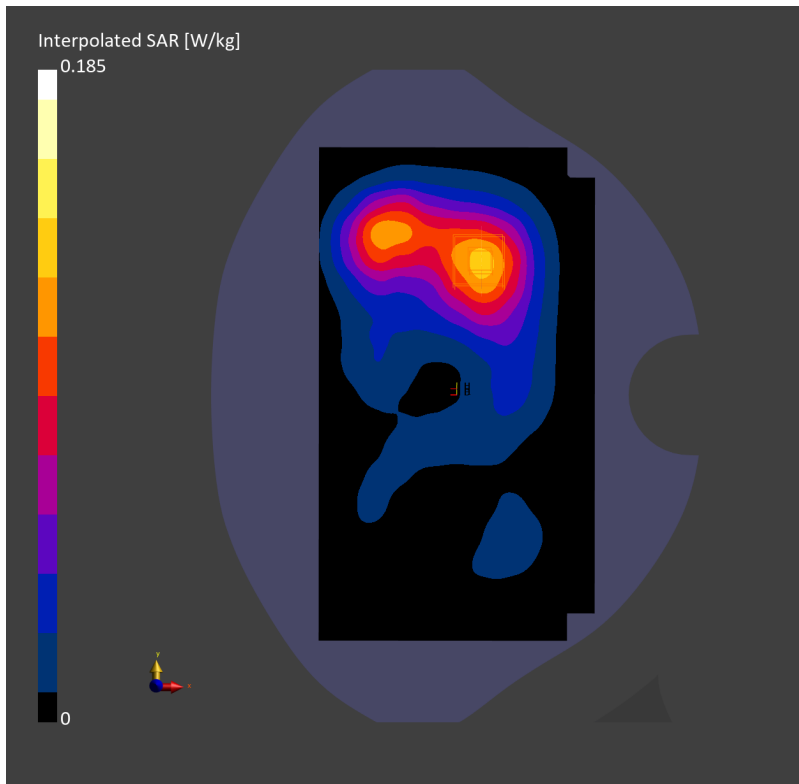

V2314 WIFI 2.4G 802.11b 11CH Back side 10mm Ant22**DUT: V2314**

Communication System: WLAN 2.4GHz; Frequency: 2462.000

Medium: HSL. Medium parameters used: $f= 2462.000$ MHz; $\sigma= 1.81$ S/m; $\epsilon_r = 40.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.97, 7.23, 7.47); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.221 W/kg; SAR (10g) = 0.119 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.07 dB

SAR (1g) = 0.217 W/kg; SAR (10g) = 0.117 W/kg;

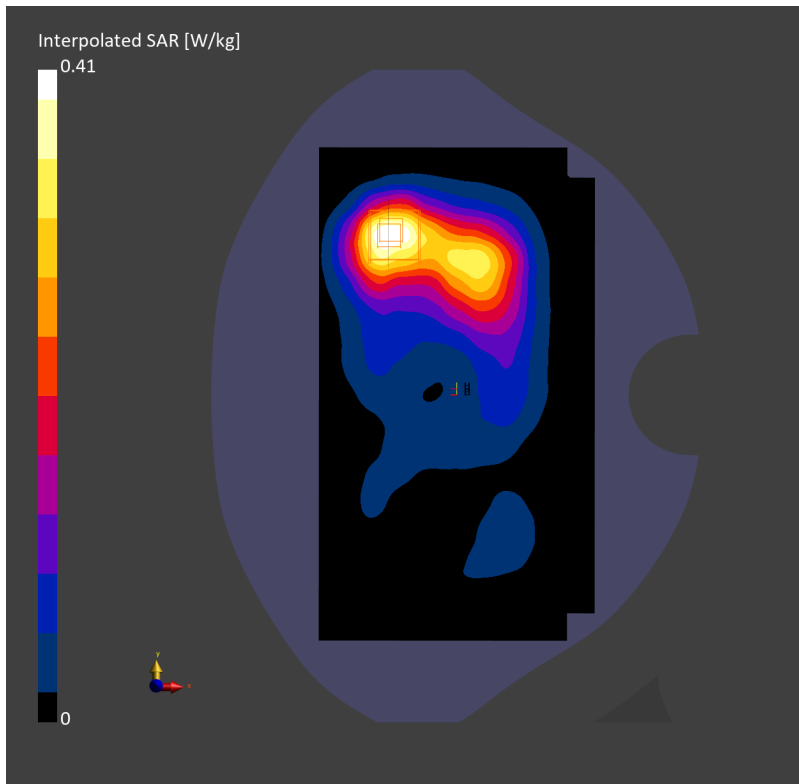

V2314 WIFI 5G 802.11ac80 155CH Left cheek Ant23**DUT: V2314**

Communication System: WLAN 5GHz; Frequency: 5775.000

Medium: HSL. Medium parameters used: $f= 5775.000$ MHz; $\sigma= 5.31$ S/m; $\epsilon_r = 36.7$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(4.6, 4.77, 4.91); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.335 W/kg; SAR (10g) = 0.101 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 2.0 mm

Power Drift = 0.08 dB

SAR (1g) = 0.320 W/kg; SAR (10g) = 0.088 W/kg;

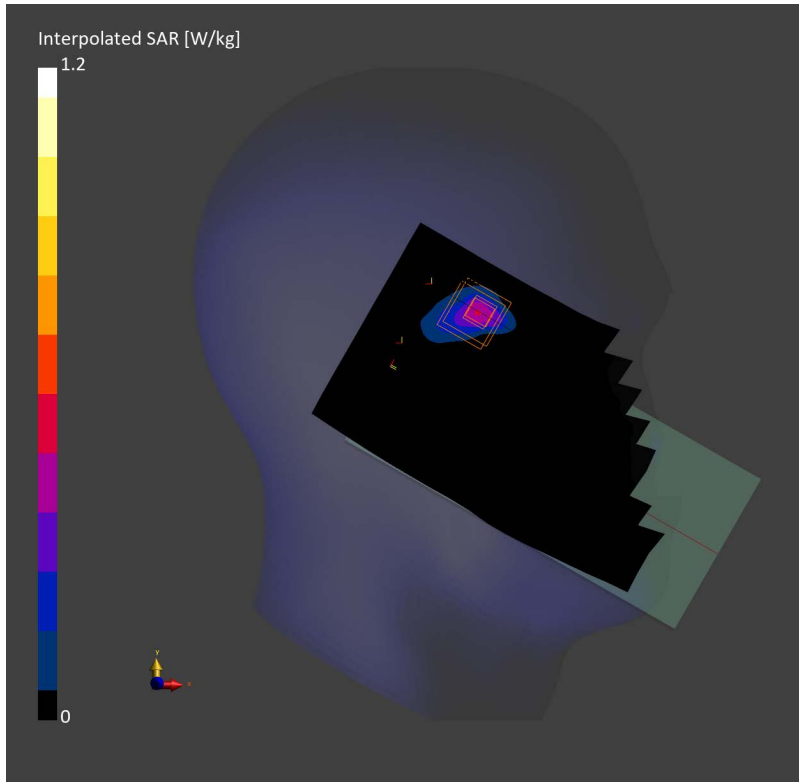

V2314 WIFI 5G 802.11n40 126CH Back side 15mm Ant23**DUT: V2314**

Communication System: WLAN 5GHz; Frequency: 5630.000

Medium: HSL. Medium parameters used: $f= 5630.000$ MHz; $\sigma= 5.06$ S/m; $\epsilon_r = 36.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(4.59, 4.76, 4.86); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (100.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.343 W/kg; SAR (10g) = 0.132 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 2.0 mm

Power Drift = 0.05 dB

SAR (1g) = 0.358 W/kg; SAR (10g) = 0.136 W/kg;

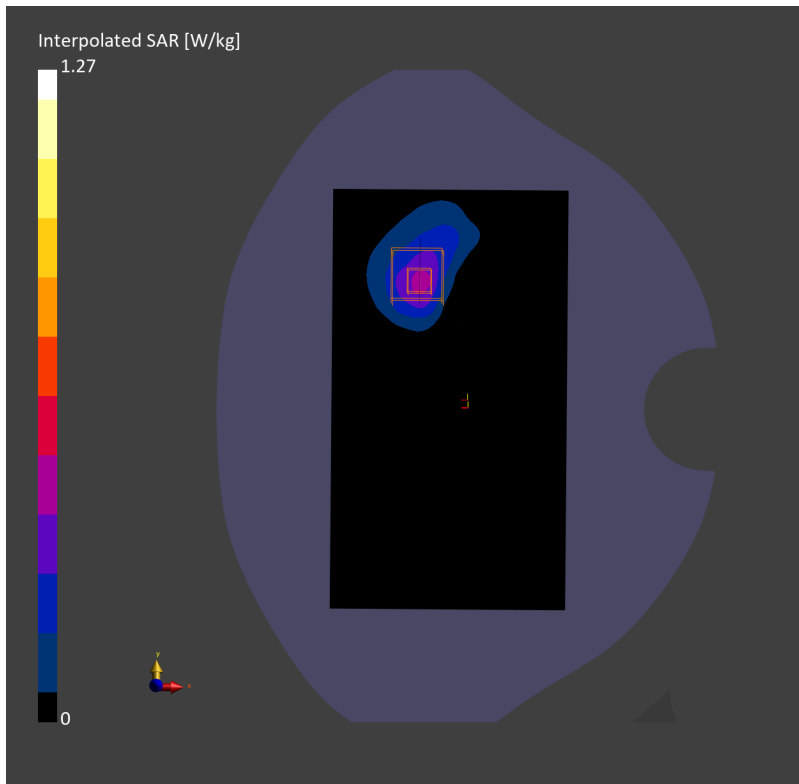

V2314 WIFI 5G 802.11n40 159CH Right side 10mm Ant23

DUT: V2314

Communication System: WLAN 5GHz; Frequency: 5795.000

Medium: HSL. Medium parameters used: $f= 5795.000$ MHz; $\sigma= 5.29$ S/m; $\epsilon_r = 36.7$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(4.6, 4.77, 4.91); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (64.0 mm x 180.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.565 W/kg; SAR (10g) = 0.196 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 2.0 mm

Power Drift = 0.13 dB

SAR (1g) = 0.590 W/kg; SAR (10g) = 0.197 W/kg;

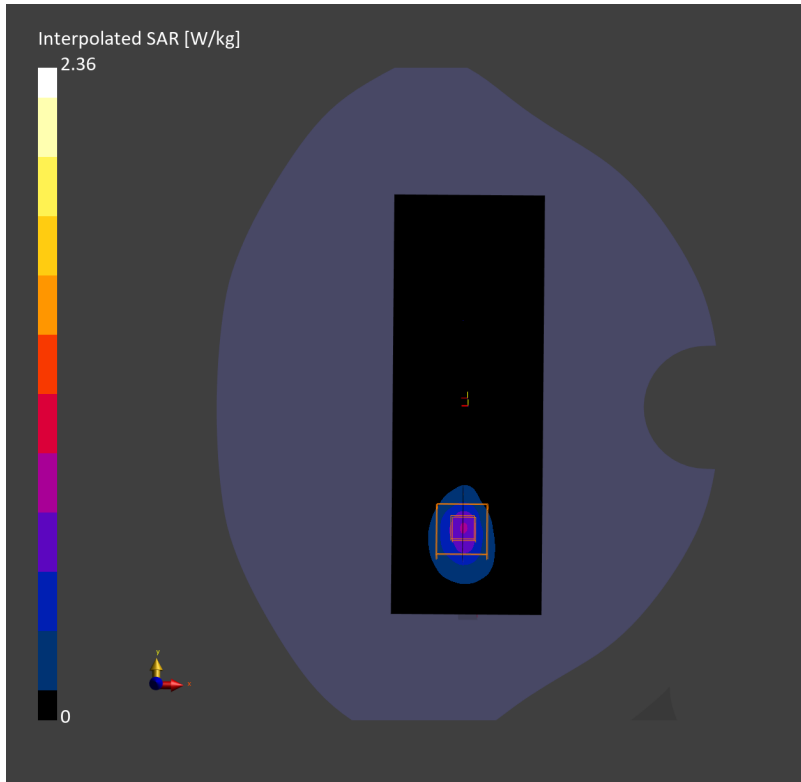

V2314 WIFI 5G 802.11n40 126CH Right side 0mm Ant23**DUT: V2314**

Communication System: WLAN 5GHz; Frequency: 5630.000

Medium: HSL. Medium parameters used: $f= 5630.000$ MHz; $\sigma= 5.06$ S/m; $\epsilon_r = 36.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(4.59, 4.76, 4.86); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (64.0 mm x 180.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 6.74 W/kg; SAR (10g) = 1.65 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 2.0 mm

Power Drift = -0.07 dB

SAR (1g) = 6.69 W/kg; SAR (10g) = 1.63 W/kg;

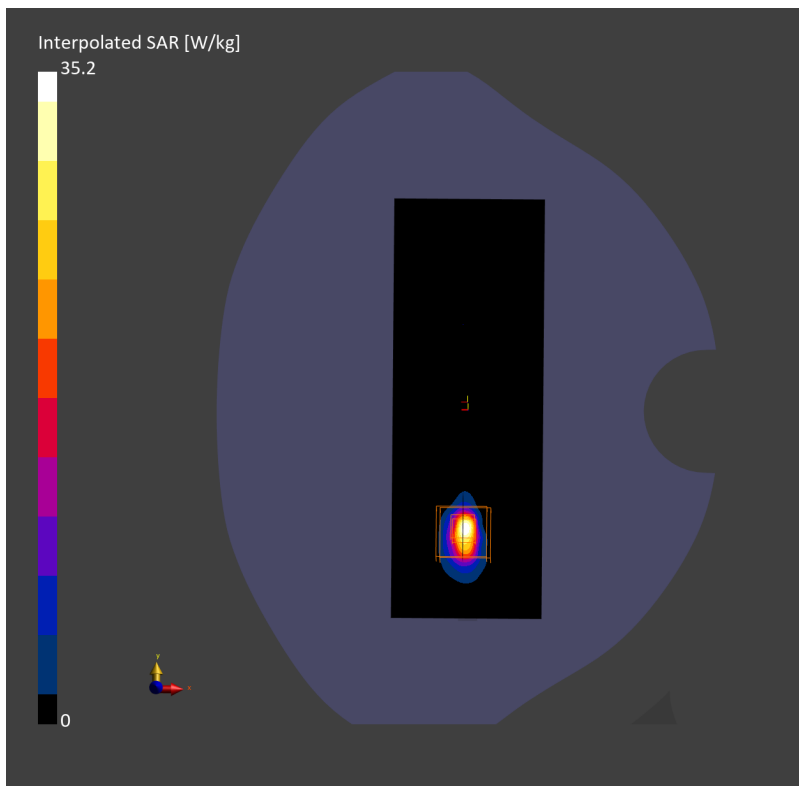

V2314 Bluetooth DH5 39CH Left cheek Ant22**DUT: V2314**

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000

Medium: HSL. Medium parameters used: $f= 2441.000$ MHz; $\sigma= 1.79$ S/m; $\epsilon_r = 40.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.97, 7.23, 7.47); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 216.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.108 W/kg; SAR (10g) = 0.055 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.19 dB

SAR (1g) = 0.105 W/kg; SAR (10g) = 0.052 W/kg;

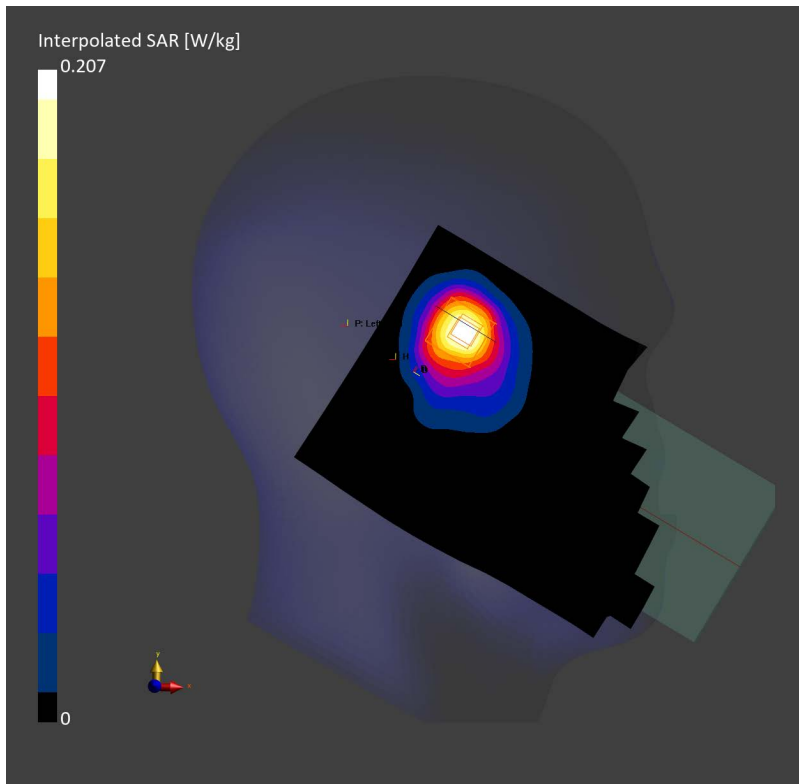

V2314 Bluetooth DH5 39CH Back side 15mm Ant22**DUT: V2314**

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000

Medium: HSL. Medium parameters used: $f=2441.000$ MHz; $\sigma=1.79$ S/m; $\epsilon_r=40.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.97, 7.23, 7.47); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.017 W/kg; SAR (10g) = 0.009 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = -0.01 dB

SAR (1g) = 0.015 W/kg; SAR (10g) = 0.008 W/kg;

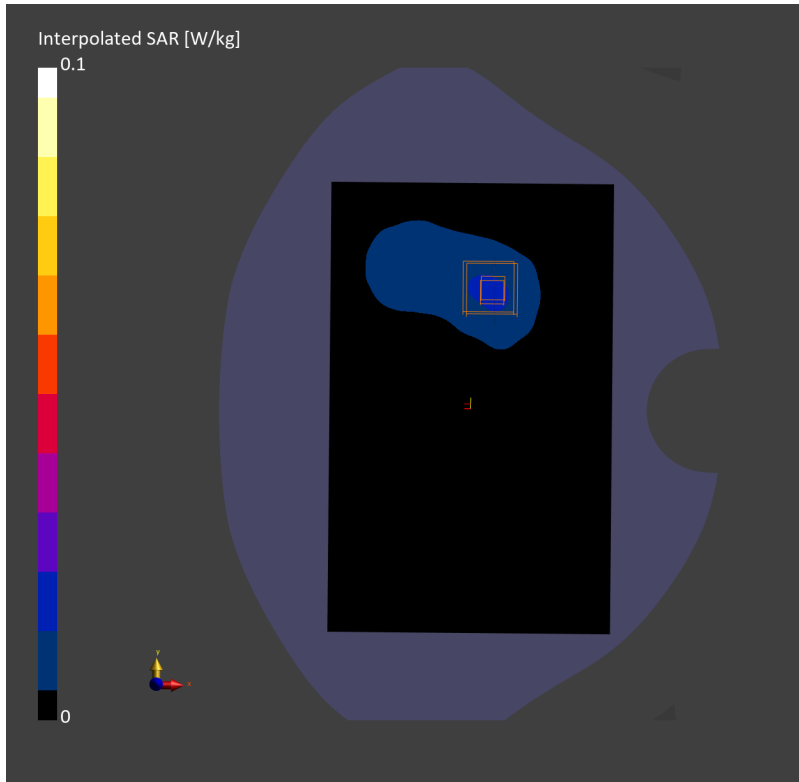

V2314 Bluetooth DH5 39CH Back side 10mm Ant22**DUT: V2314**

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000

Medium: HSL. Medium parameters used: $f= 2441.000$ MHz; $\sigma= 1.79$ S/m; $\epsilon_r = 40.4$

DASY8 Configuration:

- Probe: EX3DV4 - SN7821; ConvF(6.97, 7.23, 7.47); Calibrated: 2023-07-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1803; Calibrated: 2023-07-14
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
- Measurement Software: cDASY8 V16.2.0.1425

Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.032 W/kg; SAR (10g) = 0.018 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 5.0 mm

Power Drift = 0.07 dB

SAR (1g) = 0.031 W/kg; SAR (10g) = 0.017 W/kg;

