

## Appendix A

### RF Test Data for BT(BLE) (Conducted Measurement)

Product Name: Mobile phone

Trade Mark: SAGI

Test Model: E5501



FCC ID: 2AUES-SAGIE5501


### Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	50%
ATM Pressure:	100.0 kPa
Test Engineer:	Gary Qian
Supervised by:	Eden Hu

#### A.1. 6dB Bandwidth

Test Mode	Test Channel	Ant	EBW[MHz]	Limit	Verdict
BLE	2402	Ant1	0.662	0.5	PASS
BLE	2440	Ant1	0.682	0.5	PASS
BLE	2480	Ant1	0.668	0.5	PASS

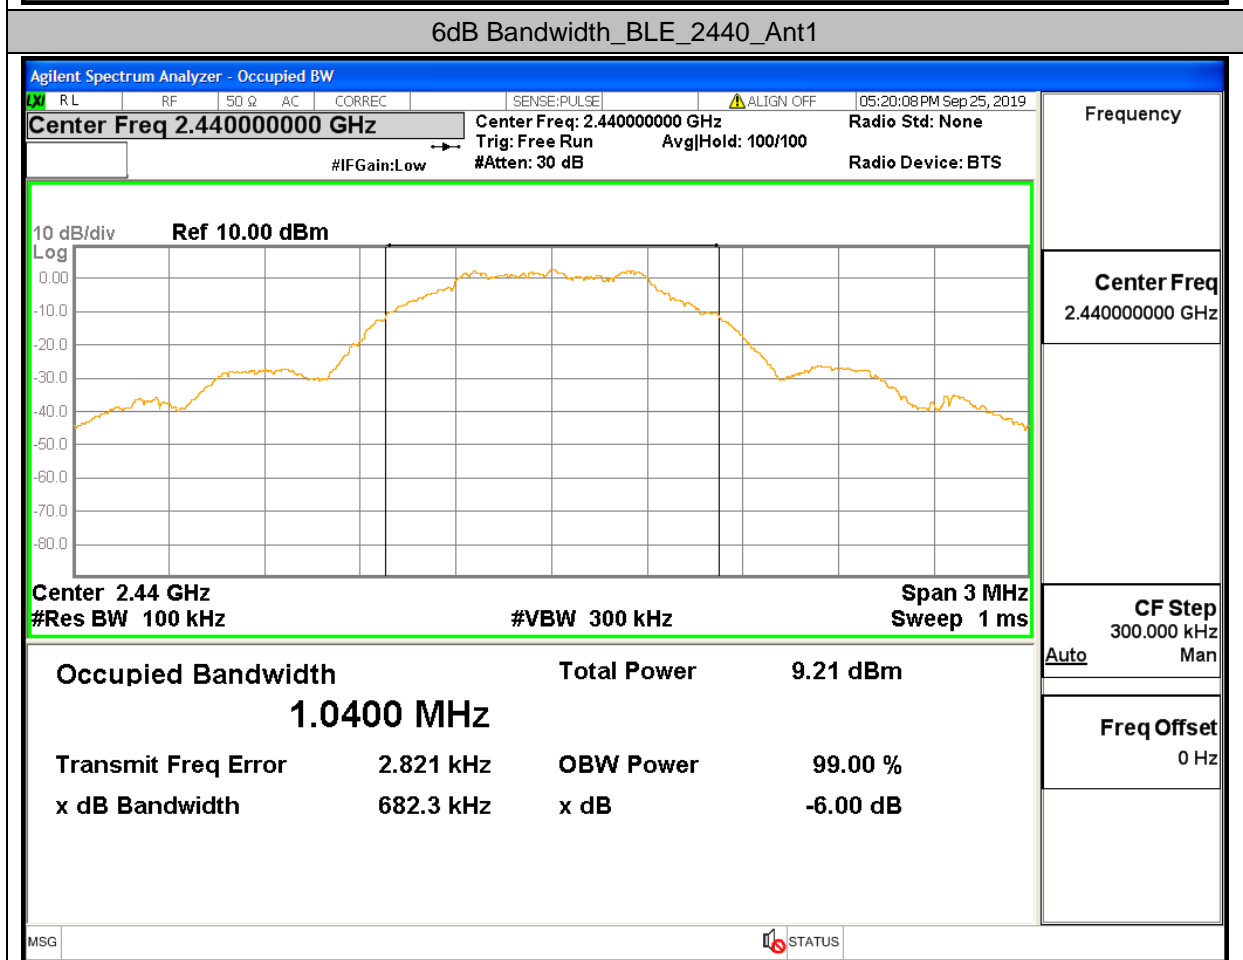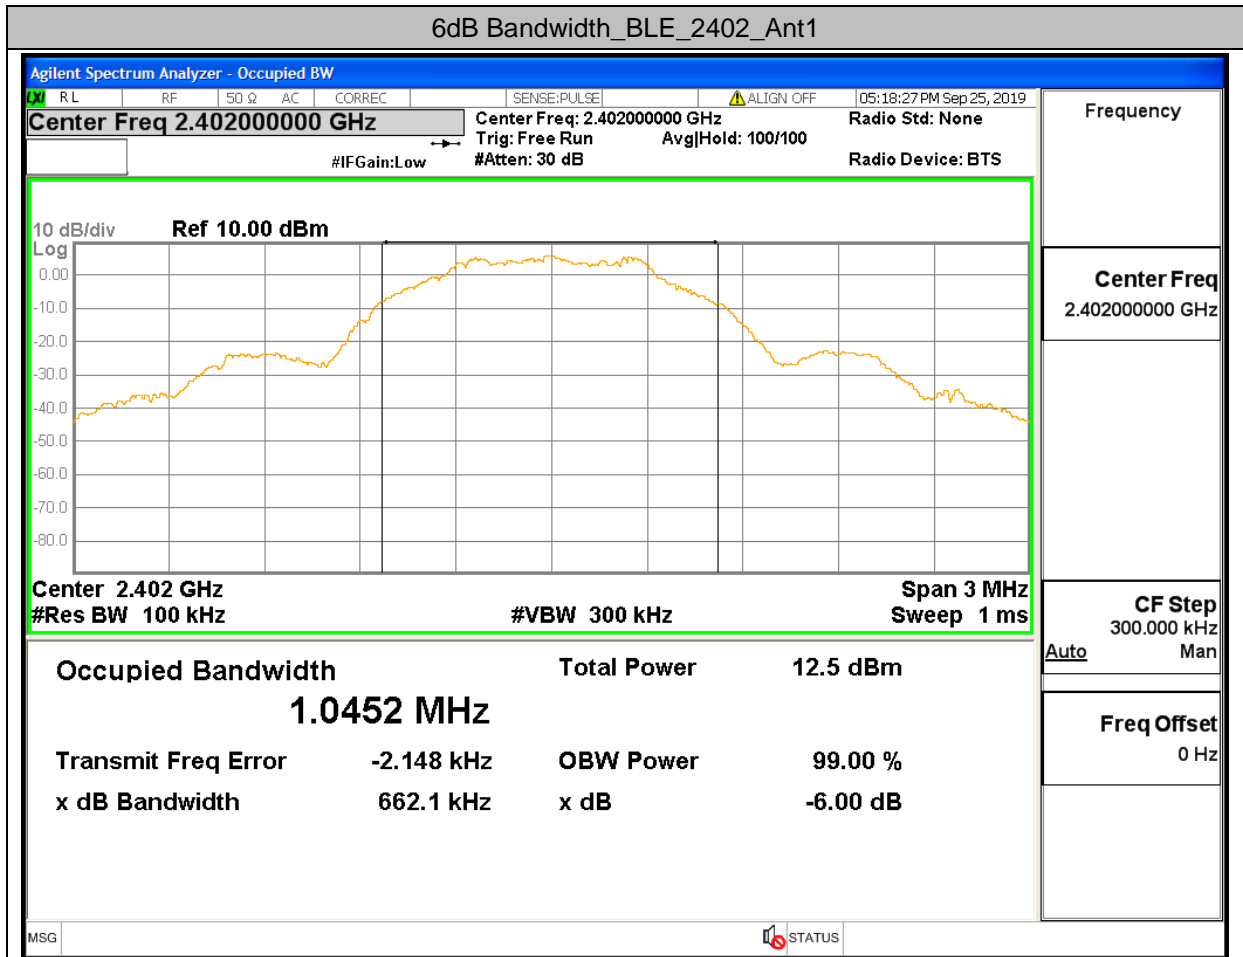

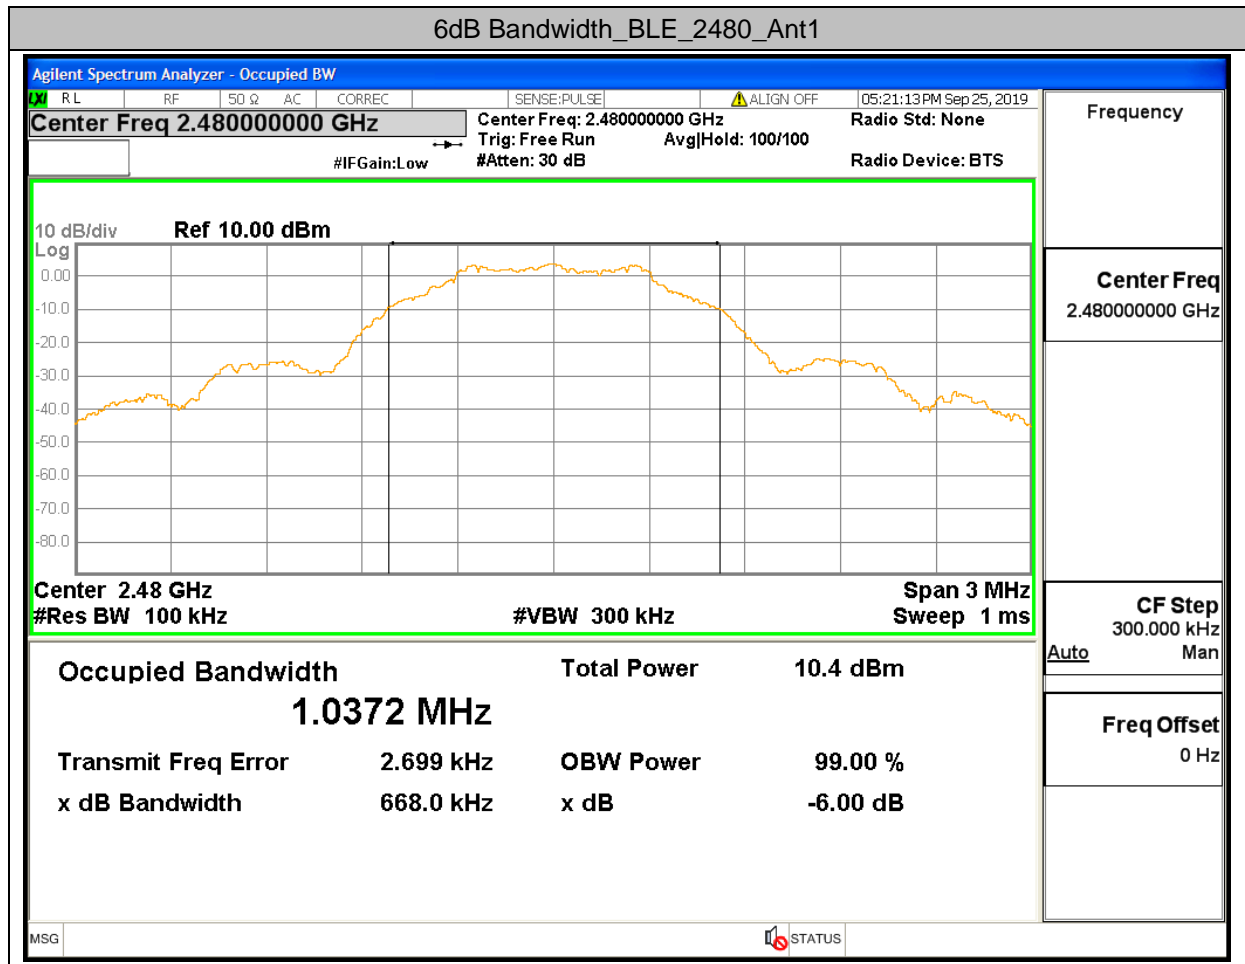


**A.2. Occupied Bandwidth**

Test Mode	Test Channel	Ant	OBW[MHz]	Limit[MHz]	Verdict
-----------	--------------	-----	----------	------------	---------


**A.3. Maximum peak conducted output power**

Test Mode	Test	Ant	Power[dBm]	Limit[dBm]	Verdict
BLE	2402	Ant1	1.723	30	PASS
BLE	2440	Ant1	-2.456	30	PASS
BLE	2480	Ant1	-0.967	30	PASS


Maximum peak conducted output power\_BLE\_2402\_Ant1

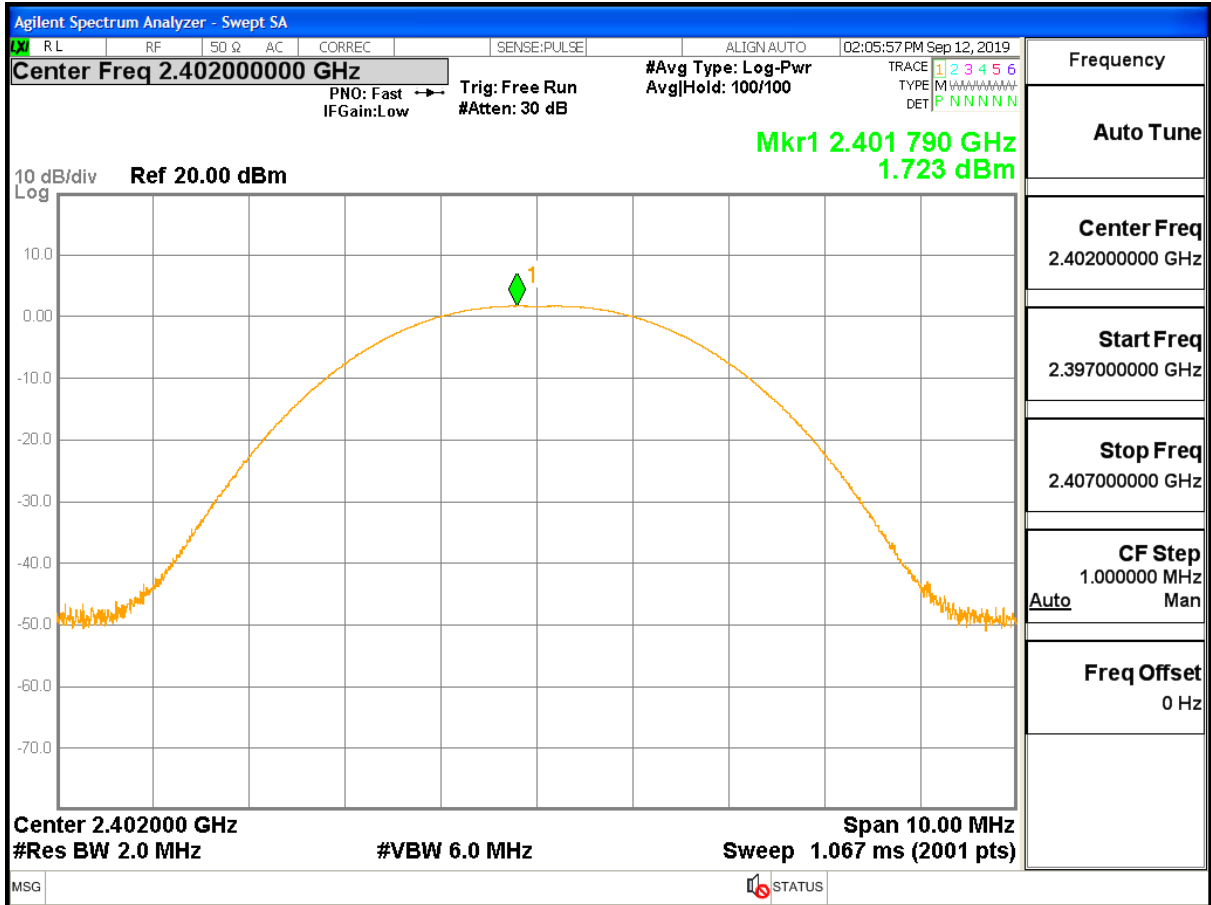

Maximum peak conducted output power\_BLE\_2440\_Ant1

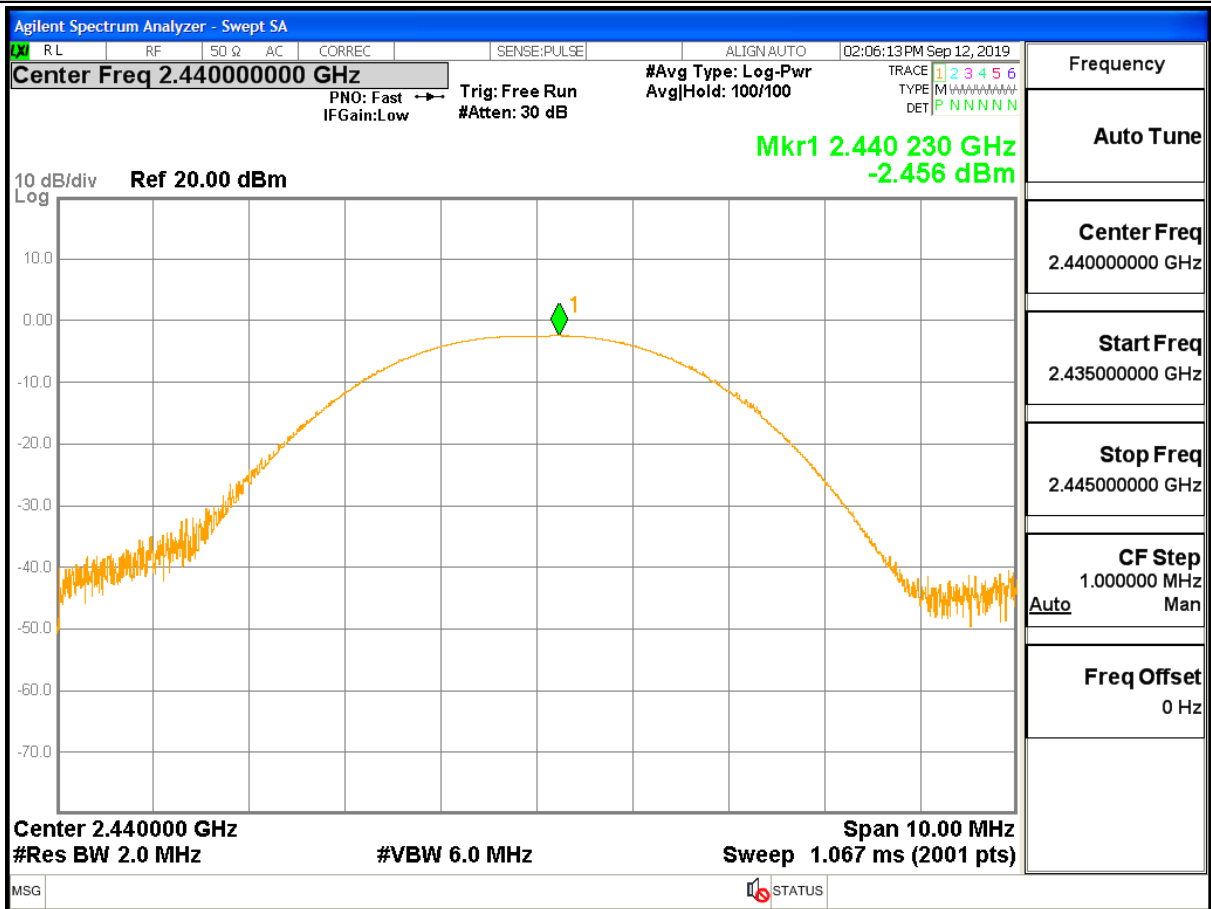


Maximum peak conducted output power\_BLE\_2480\_Ant1

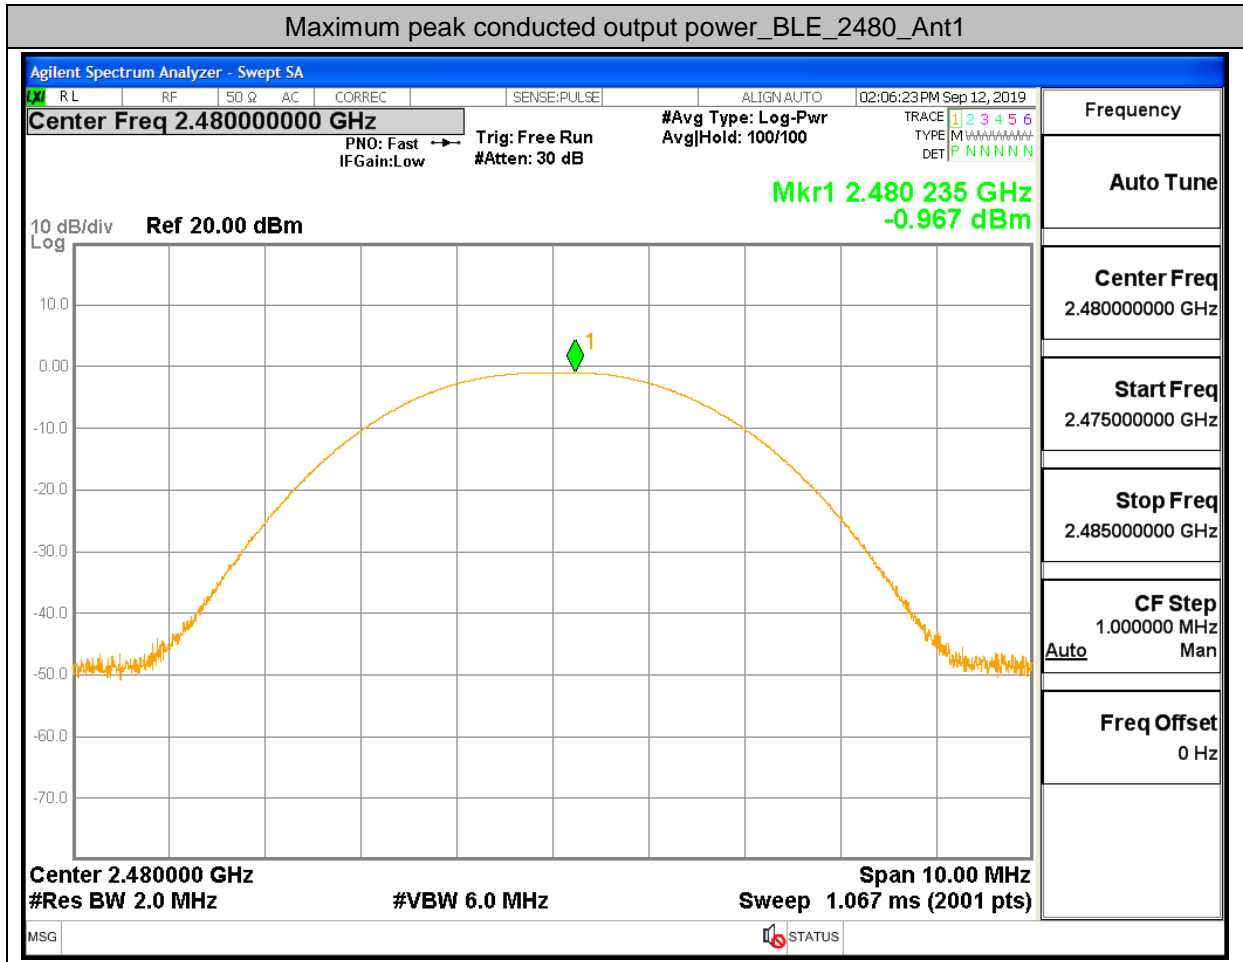


**A.4. Maximum Peak power spectral density**

Test	Test	Ant	PSD[dBm/3KHz]	Limit[dBm/3KHz]	Verdict
BLE	2402	Ant1	-8.381	8.00	PASS
BLE	2440	Ant1	-11.528	8.00	PASS
BLE	2480	Ant1	-10.534	8.00	PASS


Maximum Peak power spectral density\_BLE\_2402\_Ant1

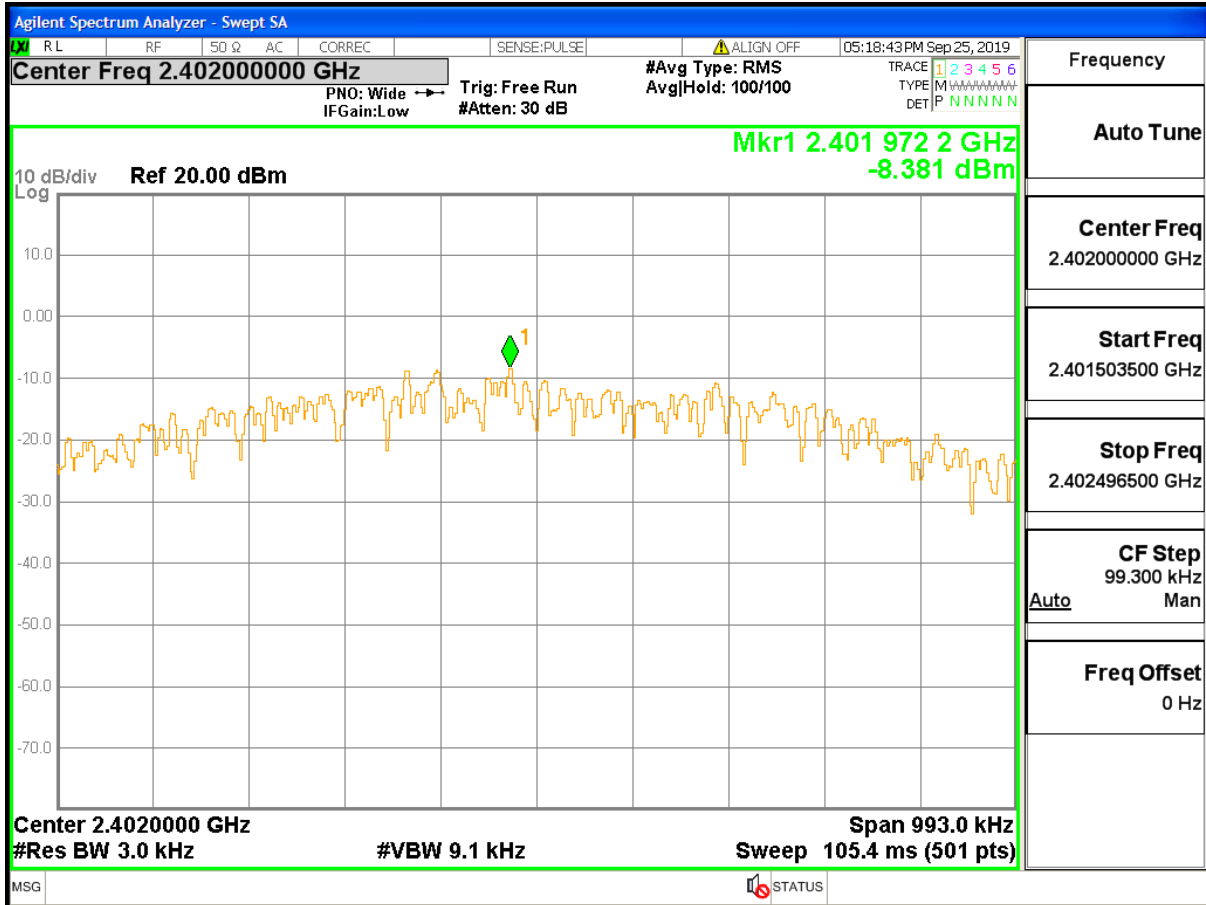

Maximum Peak power spectral density\_BLE\_2440\_Ant1

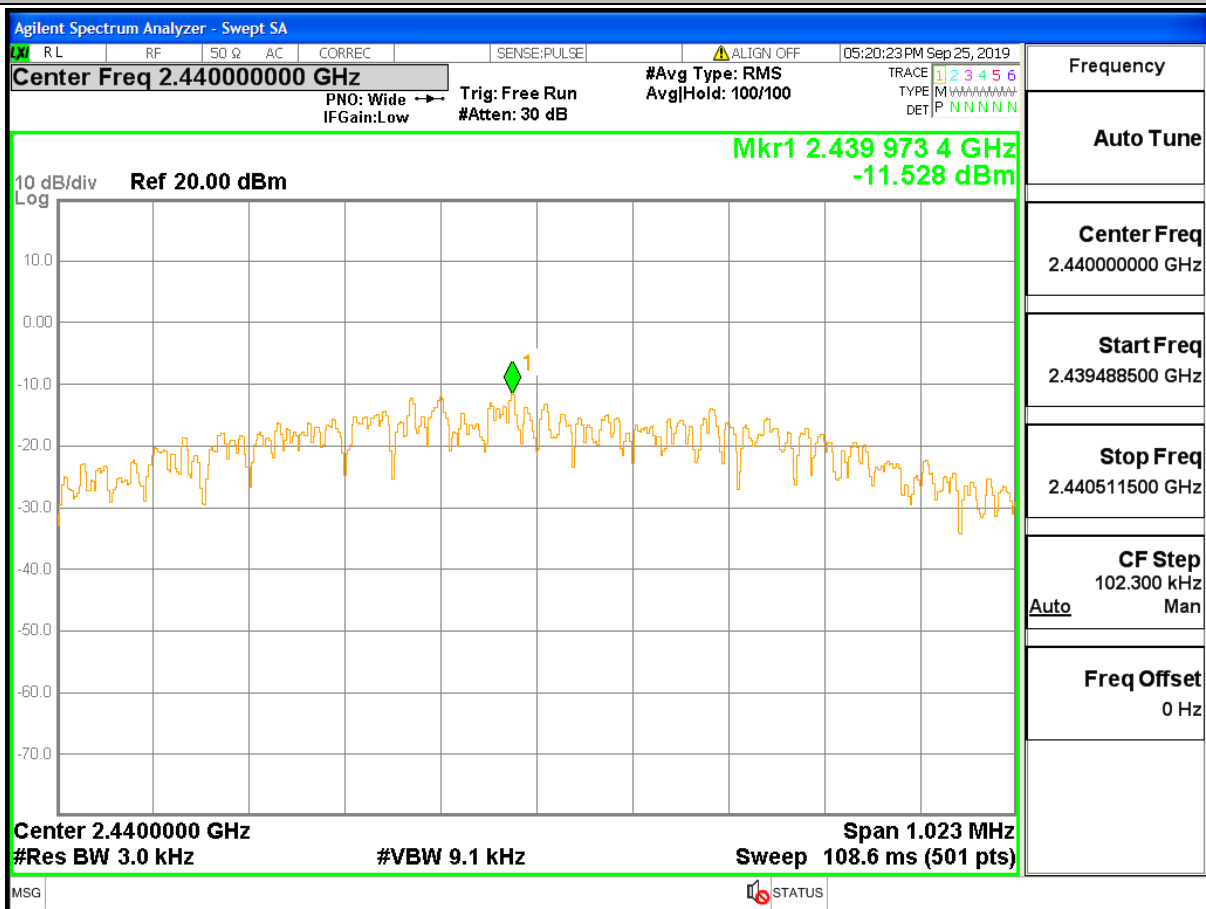




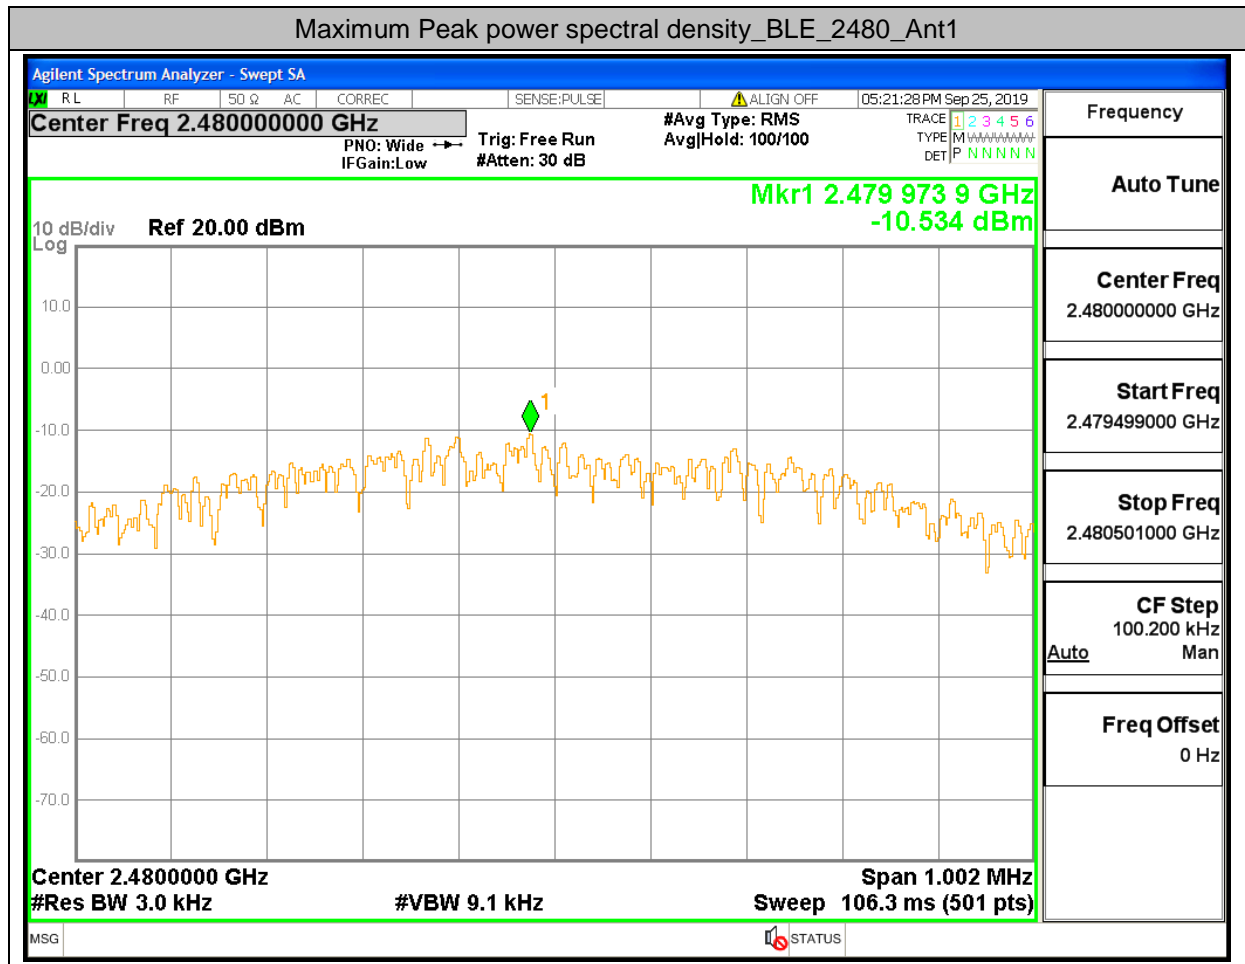


**A.5. Band-edge for RF Conducted Emissions**

Type	Carrier Frequency(MHz)	Frequency(MHz)	Carrier Frequency Power [dBm]	Bandedge Peak(dBm)	Upper limit(dBm)	Conclusion
BLE	2400	5.688	-55.42	-14.312	2400	Pass
BLE	2483.5	3.578	-62.54	-16.422	2483.5	Pass


Band-edge for RF Conducted Emissions\_BLE\_2402\_Ant1

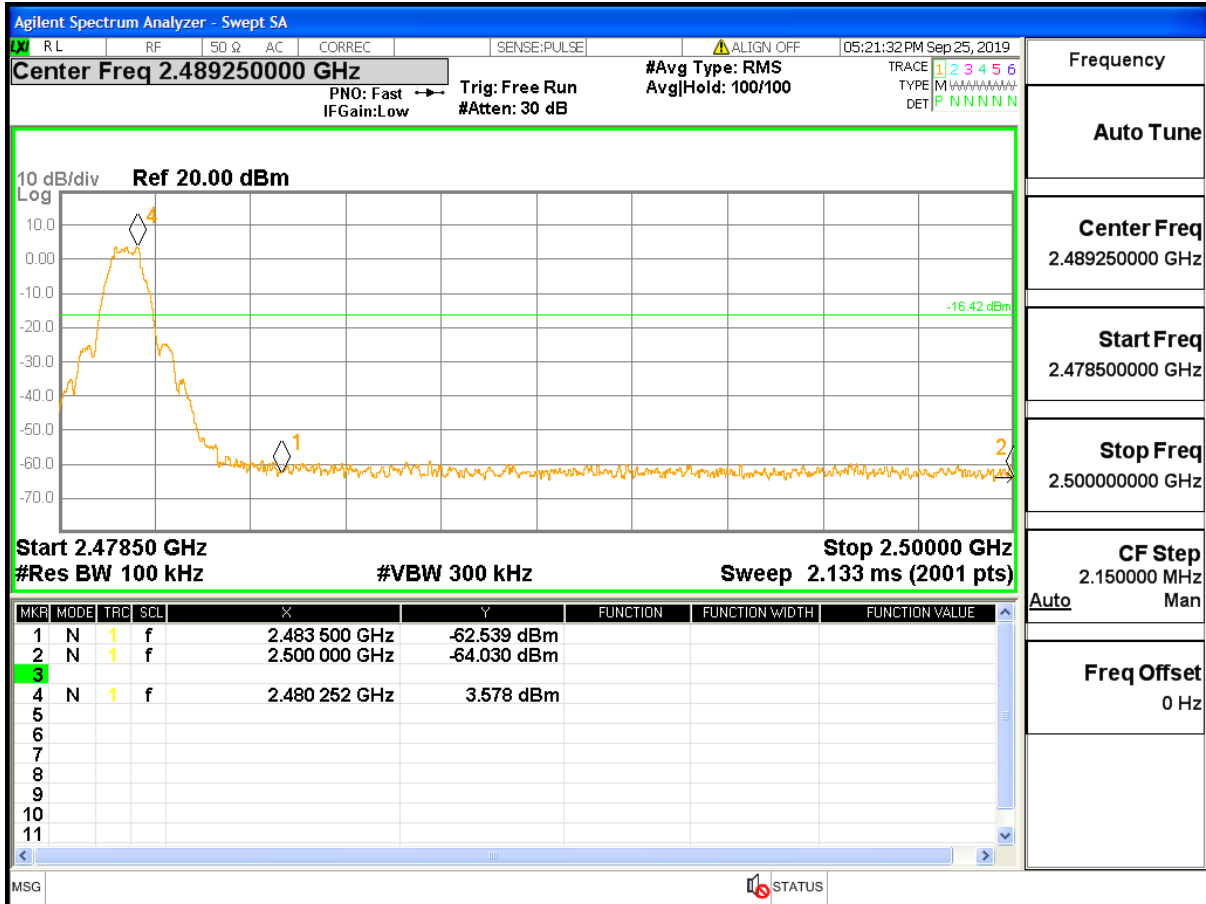

Band-edge for RF Conducted Emissions\_BLE\_2480\_Ant1

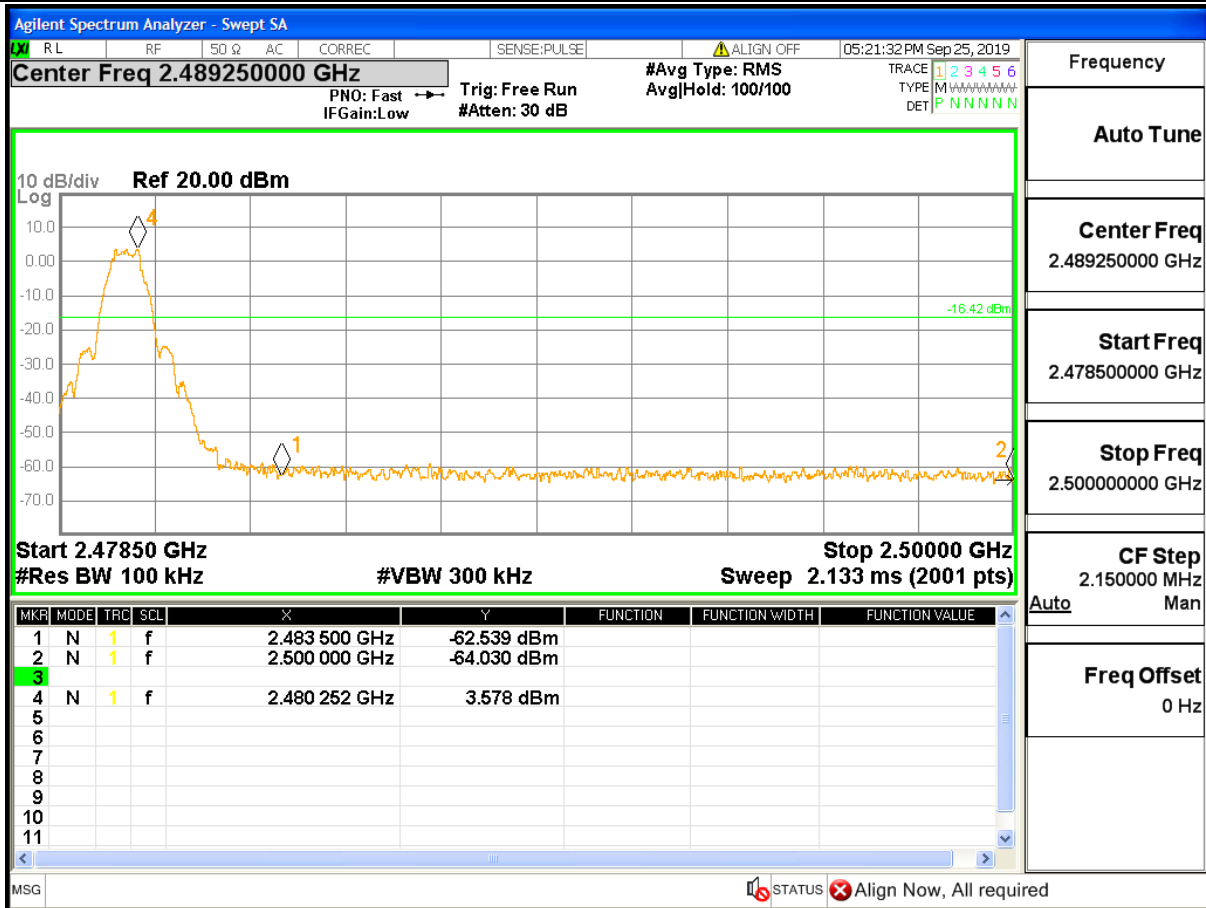


### A.6. RF Conducted Spurious Emissions

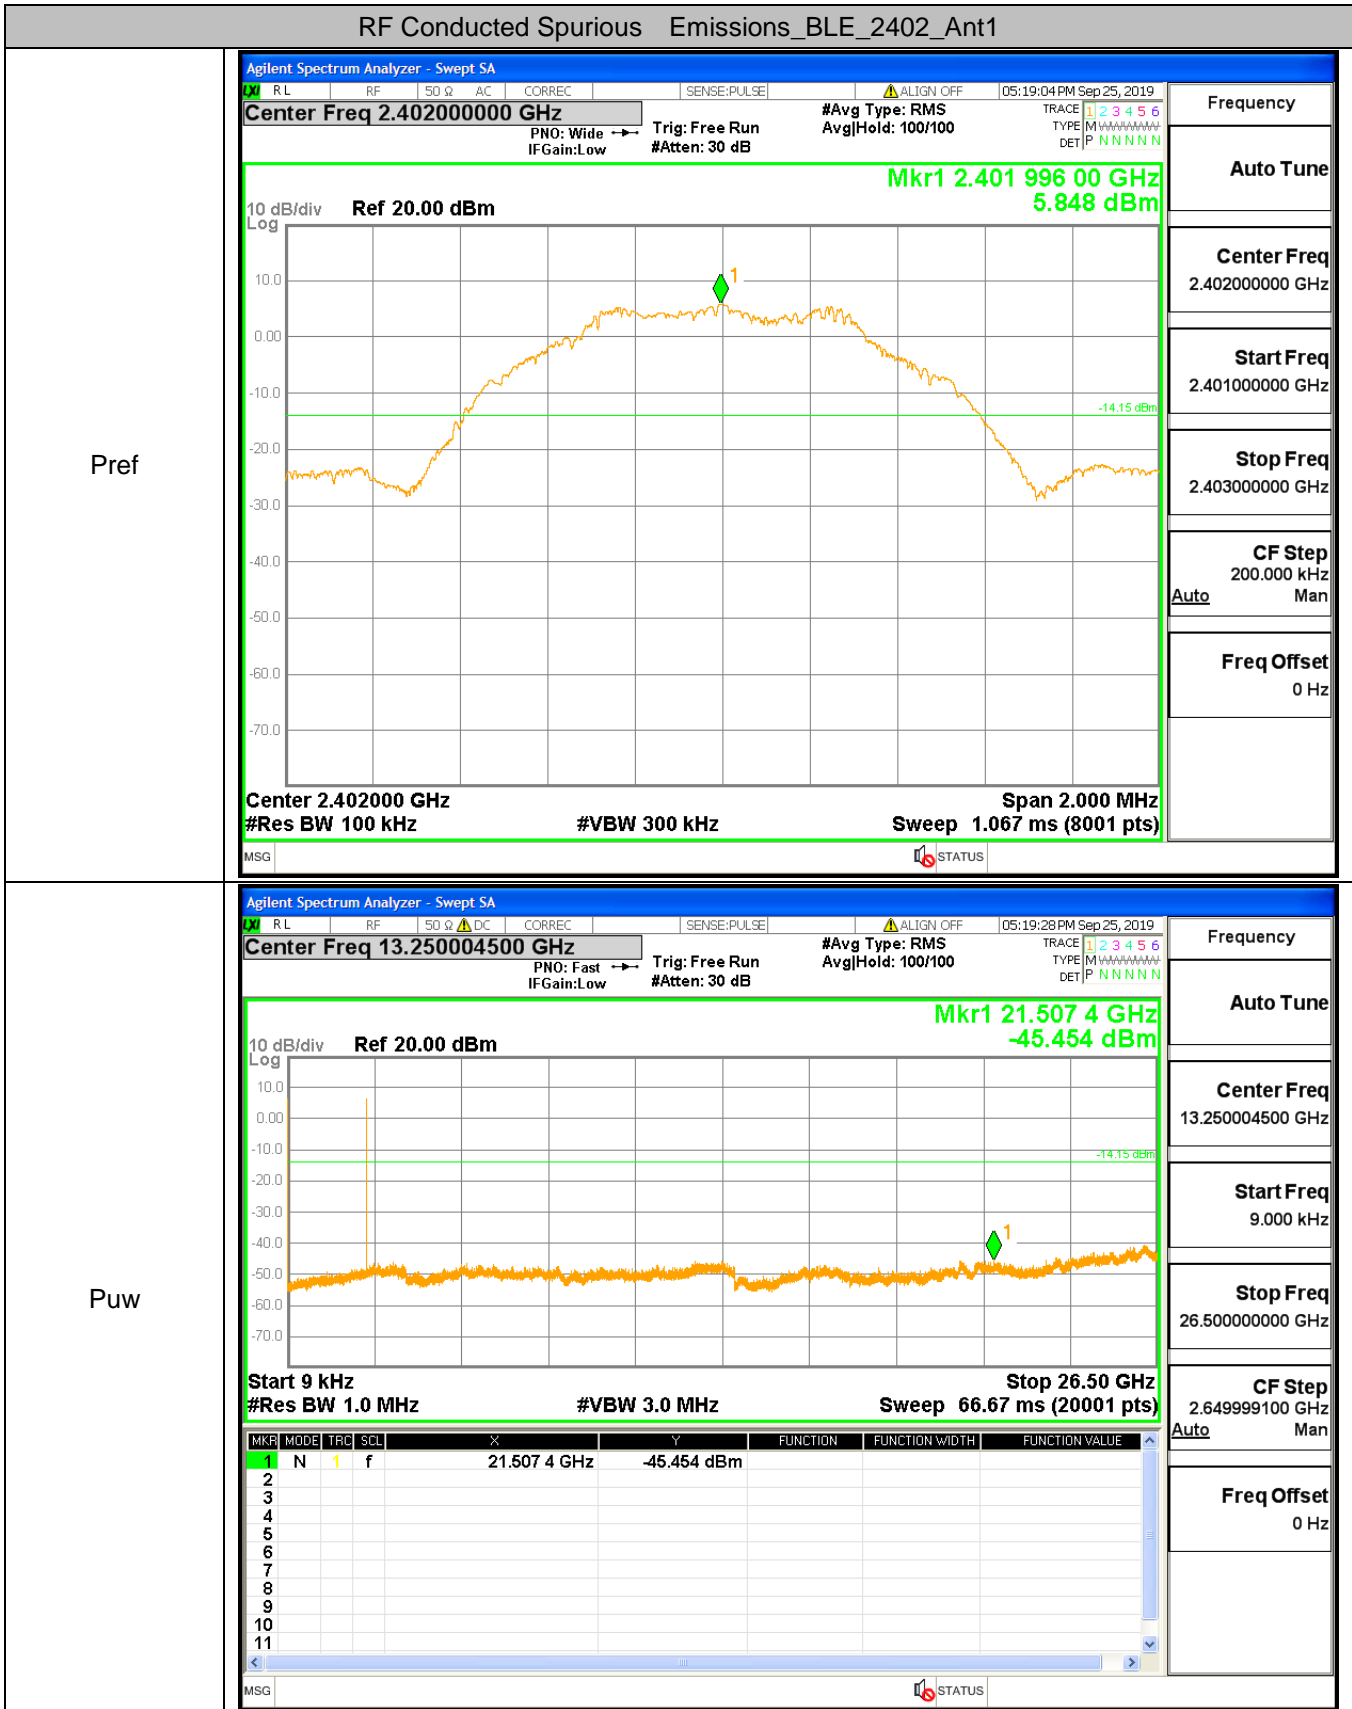


RF Conducted Spurious Emissions\_BLE\_2440\_Ant1

Pref

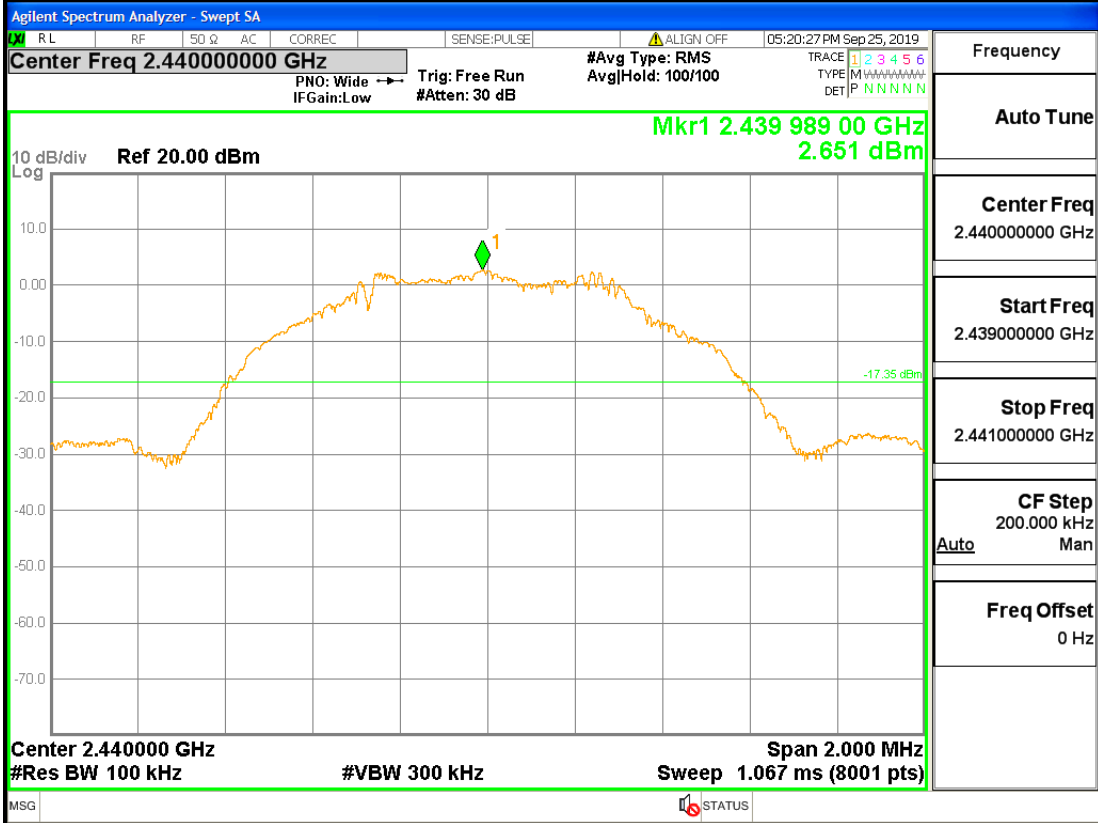


Puw

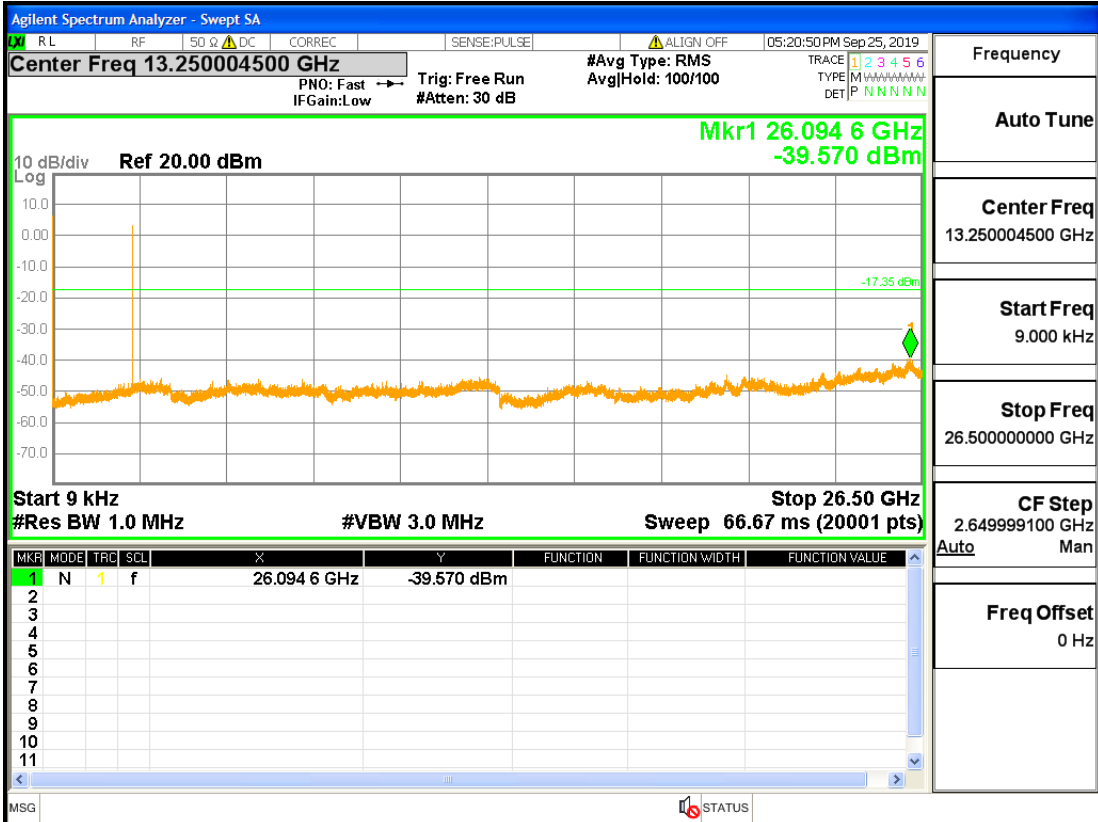


RF Conducted Spurious Emissions\_BLE\_2480\_Ant1

Pref

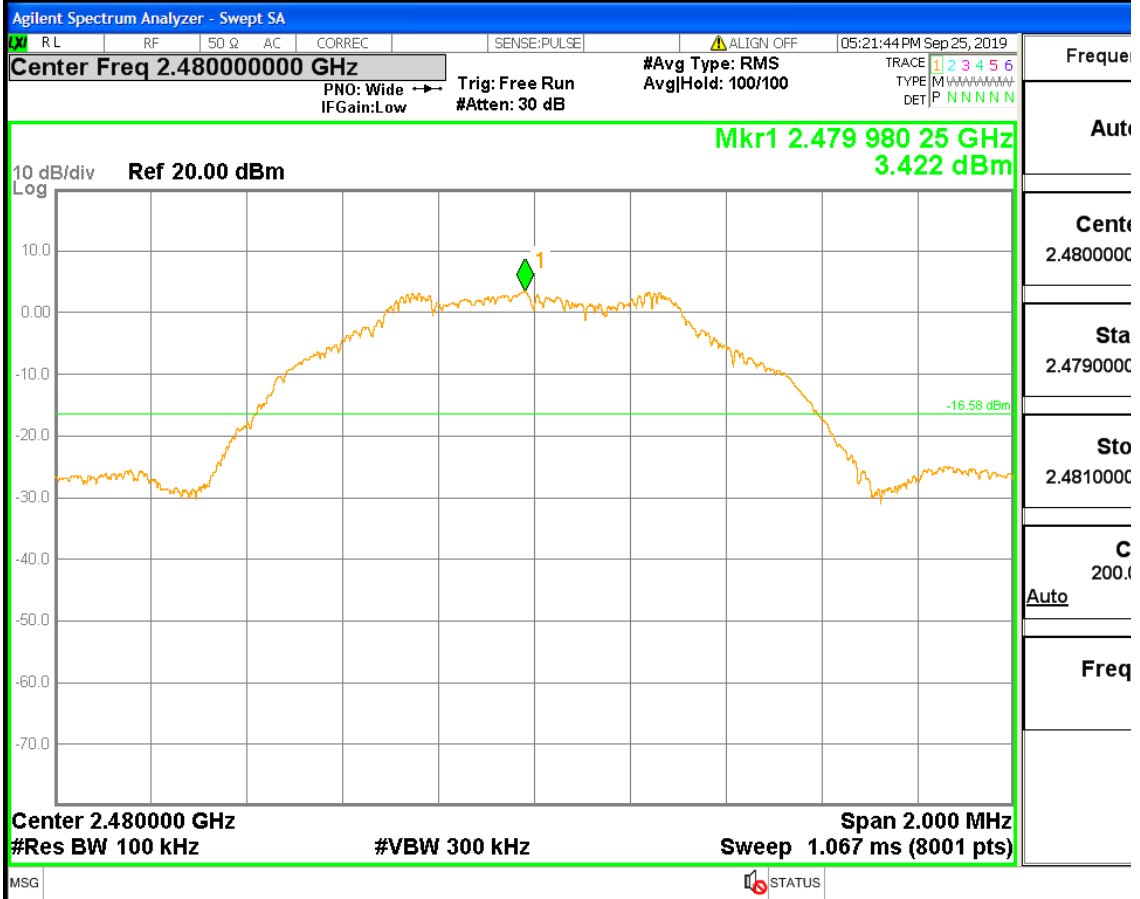

Puw

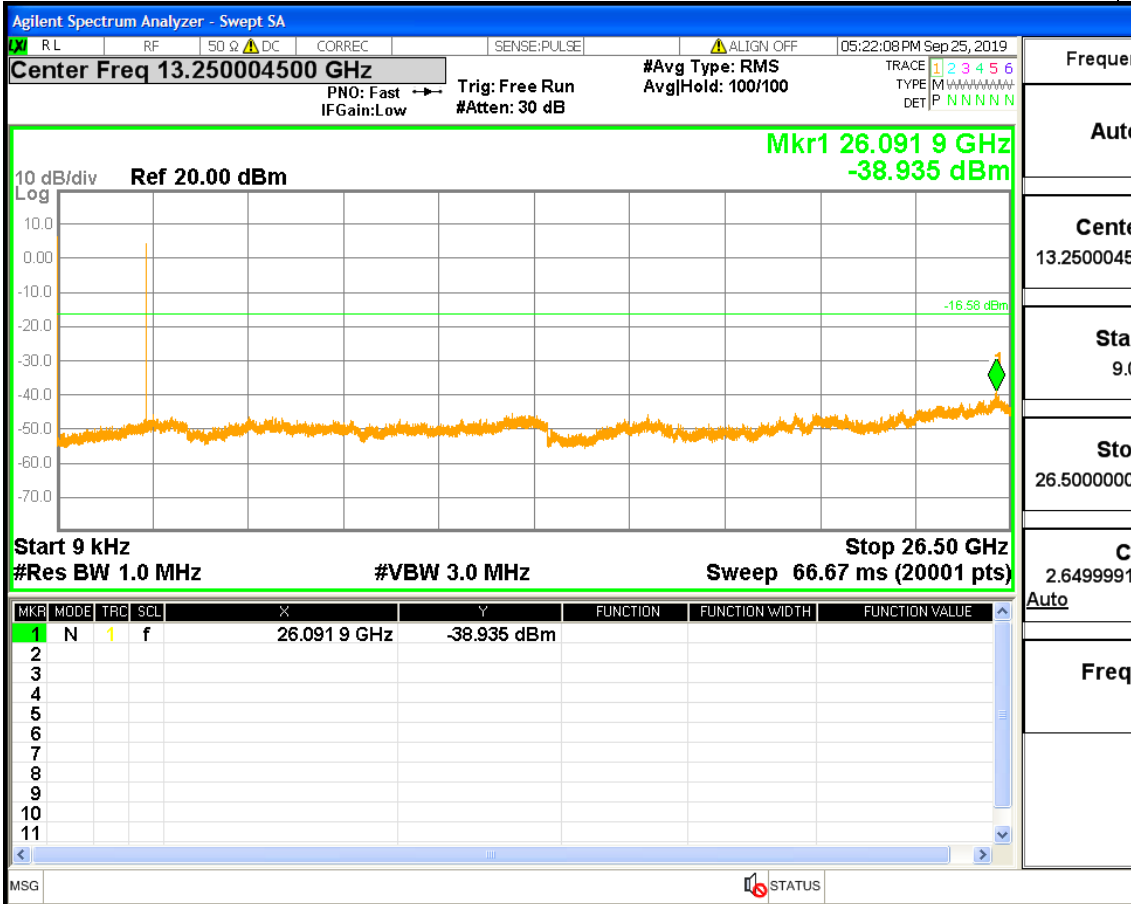


**A.7. Restrict-band band-edge measurements**


Type	Carrier Frequency (MHz)	Frequency(MHz)	Gain	Ground Factor	Peak Value(dBm)	E [dBuV/m]	Limit [dBuV/m]	Conclusion
BLE	2402	2310	2.00	0.00	-51.56	45.64	74	Pass
BLE	2480	2500	2.00	0.00	-51.63	45.57	74	Pass

Type	Carrier Frequency (MHz)	Frequency(MHz)	Gain	Ground Factor	Average Value(dBm)	E [dBuV/m]	Limit [dBuV/m]	Conclusion
BLE	2402	2310	2.00	0.00	-58.13	39.07	54	Pass
BLE	2480	2500	2.00	0.00	-56.74	40.46	54	Pass

Restrict-band band-edge measurements\_BLE\_2402\_Ant1\_PEAK

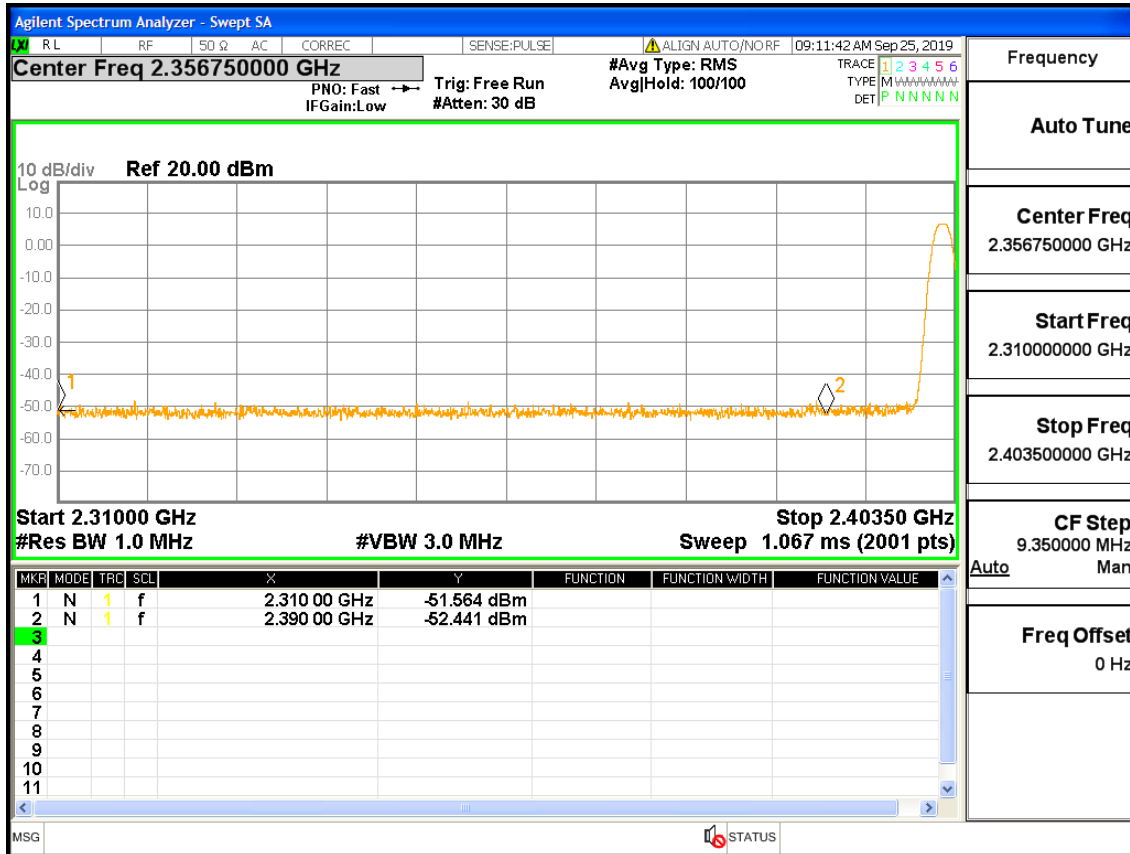


Restrict-band band-edge measurements\_BLE\_2402\_Ant1\_AV

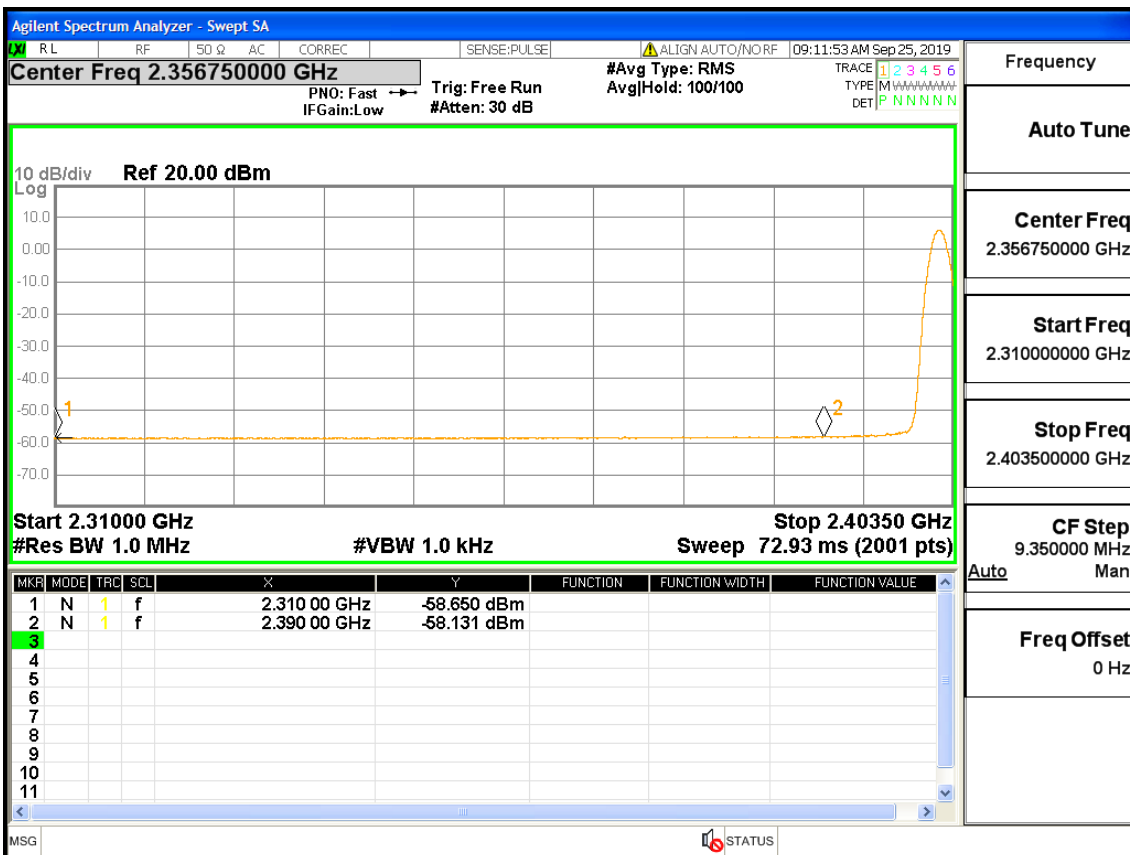



Restrict-band band-edge measurements\_BLE\_2480\_Ant1\_PEAK

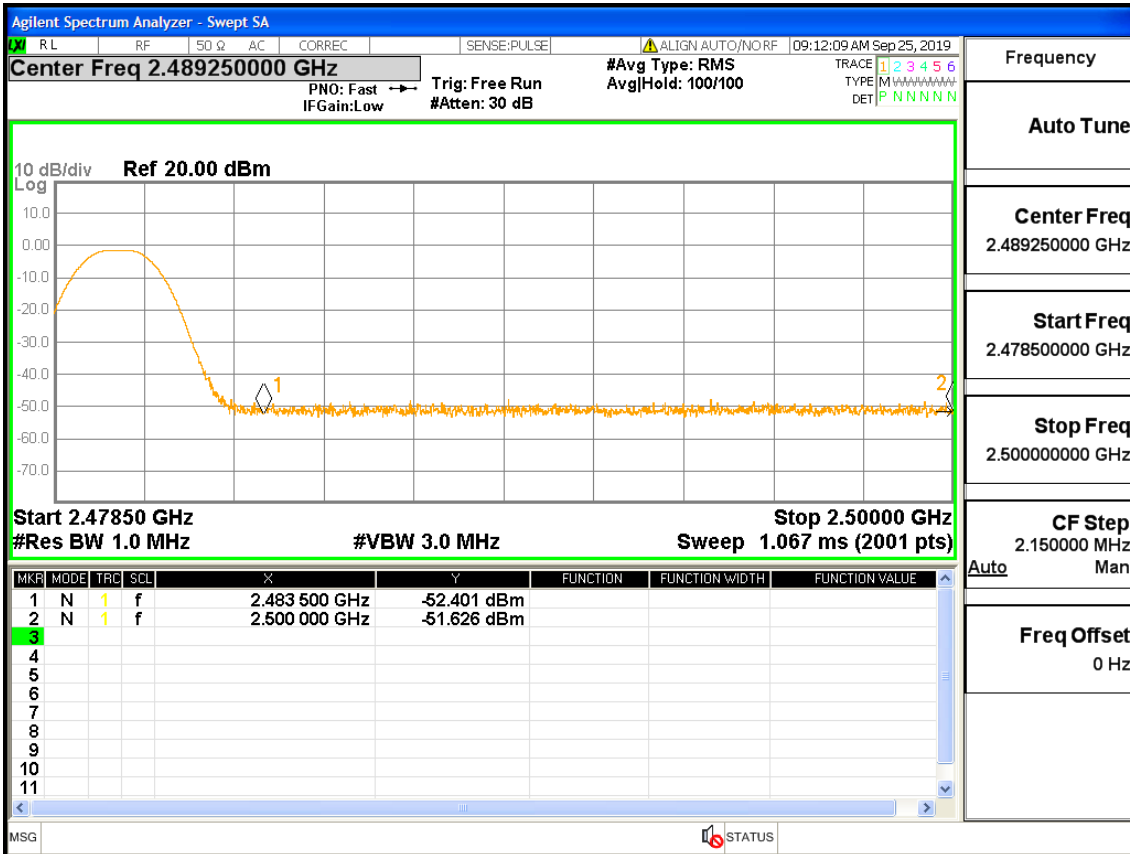

Restrict-band band-edge measurements\_BLE\_2480\_Ant1\_AV

