



TESTING LABORATORY  
CERTIFICATE#4323.01



FCC PART 15.407

TEST REPORT

For

**Shanghai ZoomSmart Technology Co., Ltd**

Room 802 Hengxi Road No.809 Pujiang Town Minhang district, Shanghai, 201114 China

**FCC ID: 2AUFL-LT51**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Rugged Phone
<b>Project Engineer:</b>	<u>CK Huang</u> <i>CK Huang</i>
<b>Report Number:</b>	<u>RSHD200817002-00D</u>
<b>Report Date:</b>	<u>2020-12-21</u>
<b>Reviewed By:</b>	<u>Oscar Ye EMC Manager</u> <i>Oscar.Ye</i>
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**TABLE OF CONTENTS**

**GENERAL INFORMATION.....3**

    PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

    OBJECTIVE.....3

    RELATED SUBMITTAL(S)/GRANT(S).....3

    TEST METHODOLOGY.....4

    MEASUREMENT UNCERTAINTY.....4

    TEST FACILITY.....4

**SYSTEM TEST CONFIGURATION.....5**

    DESCRIPTION OF TEST CONFIGURATION.....5

    EUT EXERCISE SOFTWARE.....6

    EQUIPMENT MODIFICATIONS.....12

    SUPPORT EQUIPMENT LIST AND DETAILS.....13

    EXTERNAL I/O CABLE.....13

    BLOCK DIAGRAM OF TEST SETUP.....14

**SUMMARY OF TEST RESULTS.....16**

**TEST EQUIPMENT LIST.....17**

**FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION.....19**

    TEST RESULT.....19

**FCC §15.203 – ANTENNA REQUIREMENT.....20**

    APPLICABLE STANDARD.....20

    ANTENNA CONNECTOR CONSTRUCTION.....20

**FCC §15.407 (b) (8) §15.207 (a) – AC POWER LINE CONDUCTED EMISSIONS.....21**

    APPLICABLE STANDARD.....21

    EUT SETUP.....21

    EMI TEST RECEIVER SETUP.....21

    TEST PROCEDURE.....22

    CORRECTED FACTOR & OVER LIMIT CALCULATION.....22

    TEST RESULTS SUMMARY.....22

    TEST DATA.....22

**§15.205 & §15.209 & §15.407(B) (1), (4), (8),(9) – UNDESIRABLE EMISSION & RESTRICTED BANDS.....27**

    APPLICABLE STANDARD.....27

    EUT SETUP.....27

    EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....28

    TEST PROCEDURE.....28

    CORRECTED AMPLITUDE & MARGIN CALCULATION.....29

    TEST DATA.....29

**FCC §15.407(a) & §15.407(e)–EMISSION BANDWIDTH.....67**

    APPLICABLE STANDARD.....67

    TEST PROCEDURE.....67

    TEST DATA.....68

**FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER.....91**

    APPLICABLE STANDARD.....91

    TEST PROCEDURE.....91

    TEST DATA.....92

**FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY.....94**

    APPLICABLE STANDARD.....94

    TEST PROCEDURE.....94

    TEST DATA.....94

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Applicant	Shanghai ZoomSmart Technology Co., Ltd
Tested Model	LT51
Product Type	Rugged Phone
Power Supply	DC 5.0V from adapter and DC 3.85V from Lithium-ion polymer battery
Operating Frequency	5G Wi-Fi B1: 5180-5240 MHz, B4: 5745-5825 MHz
Channel Number	5G Wi-Fi B1: 7, B4: 8
Channel Separation	5G Wi-Fi: a/ac20/n20: 20 MHz, ac40/n40: 40 MHz, ac80: 80 MHz
Modulation Type	OFDM
Antenna Type	FPC Antenna
*Maximum Antenna Gain	-0.25 dBi

*Adapter Information:*

*Model: P12DUSB050200 US*

*Input: AC 100-240V, 50/60Hz, 0.3A*

*Output: DC 5.0V, 2.0A*

*Note: The Maximum Antenna Gain was declared by the manufacturer.*

*\*All measurement and test data in this report was gathered from production sample serial number: 20200817002. (Assigned by the BACL. The EUT supplied by the applicant was received on 2020-08-17)*

### Objective

This type approval report is prepared on behalf of *Shanghai ZoomSmart Technology Co., Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions' rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS Submittal with FCC ID: 2AUFL-LT51

FCC Part 15.247 DTS Submittal with FCC ID: 2AUFL-LT51

FCC Part 15.225 DXX submissions with FCC ID: 2AUFL-LT51

FCC Part 22H24E27 PCE submissions with FCC ID: 2AUFL-LT51

## Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan).

## Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01), the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

For **5150~5250 MHz** band, test channel list is as below,

802.11a/ac20/n20 mode Channel 36, 40, 48 were tested.

802.11n40/ac40 mode Channel 38, 46 were tested.

802.11ac80 mode Channel 42 was tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For **5725~5850 MHz** band,

802.11a/ac20/n20 mode Channel 149, 157, 165 were tested.

802.11n40/ac40 mode Channel 151, 159 were tested.

802.11ac80 mode Channel 155 was tested.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
155	5775	/	/
157	5785	/	/

**EUT Exercise Software**

RF test tool: QRCT

The worst case was performed under:


Mode	Data rate	*Power Level Setting	
		5150-5250 Band	5725-5850 Band
802.11a	6 Mbps	15	15
802.11ac20	MCS0	15	15
802.11n-HT20	MCS0	15	15
802.11ac40	MCS0	14	15
802.11n-HT40	MCS0	14	15
802.11ac80	MCS0	15	15

Note: The power level setting was declared by the applicant.


**Duty Cycle**

**5150MHz-5250MHz Band:**


**802.11a mode**

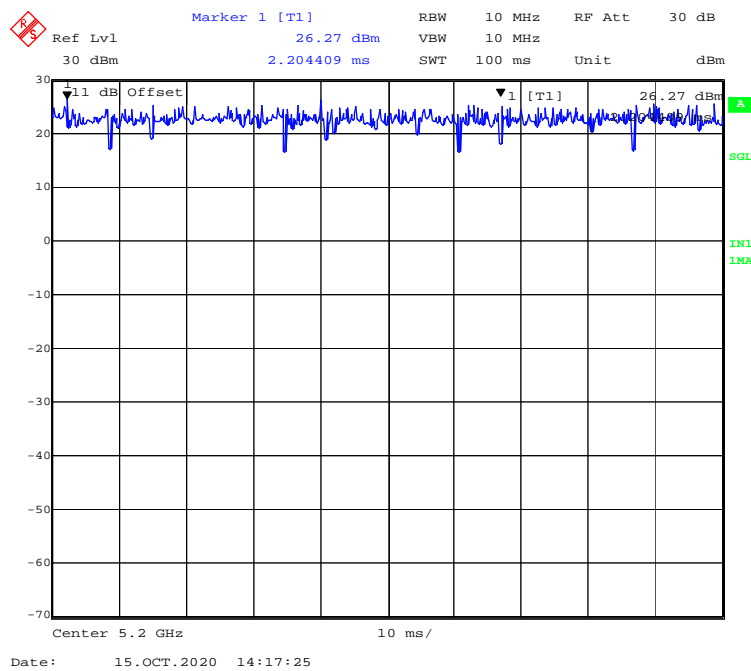


### 802.11ac20 mode

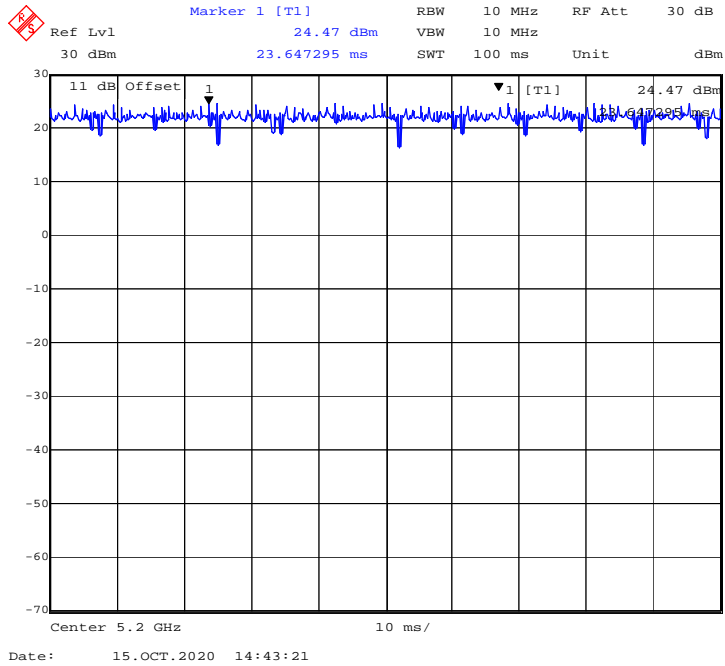


### 802.11n-HT20 mode

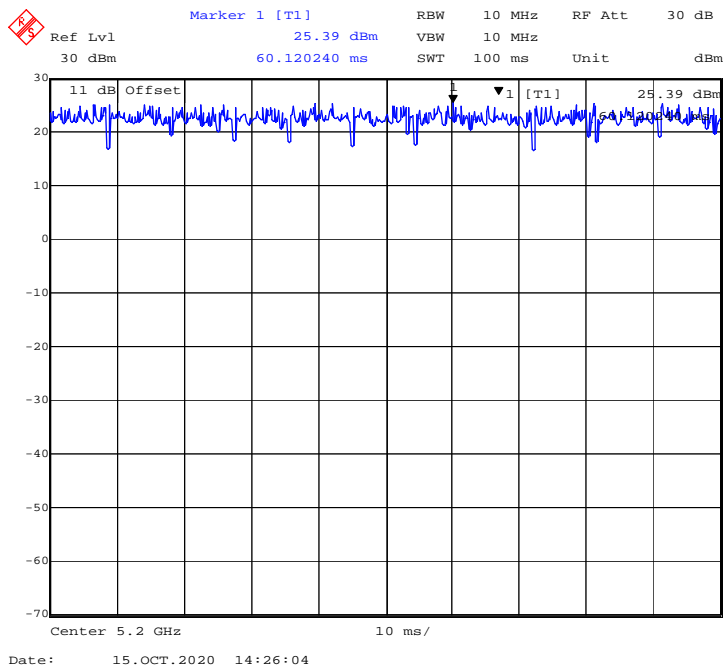

### 802.11ac40 mode

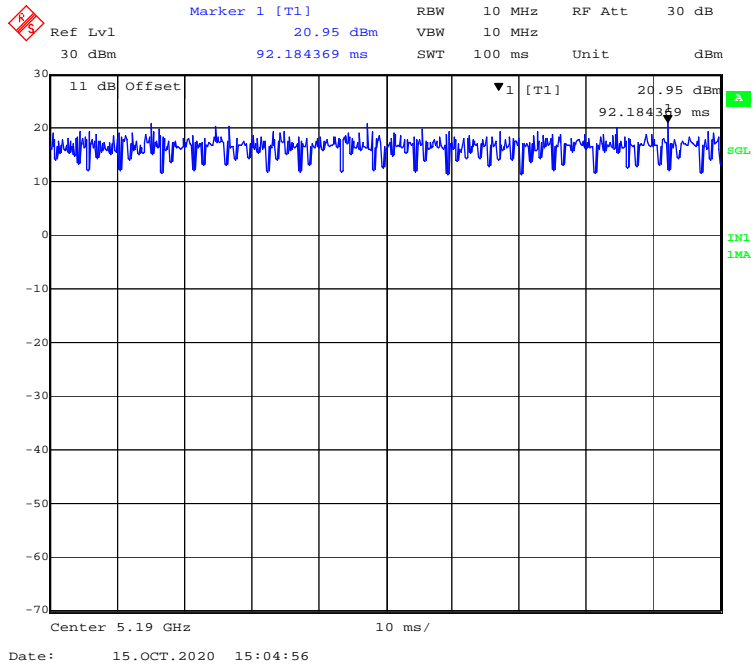


### 802.11n-HT40 mode

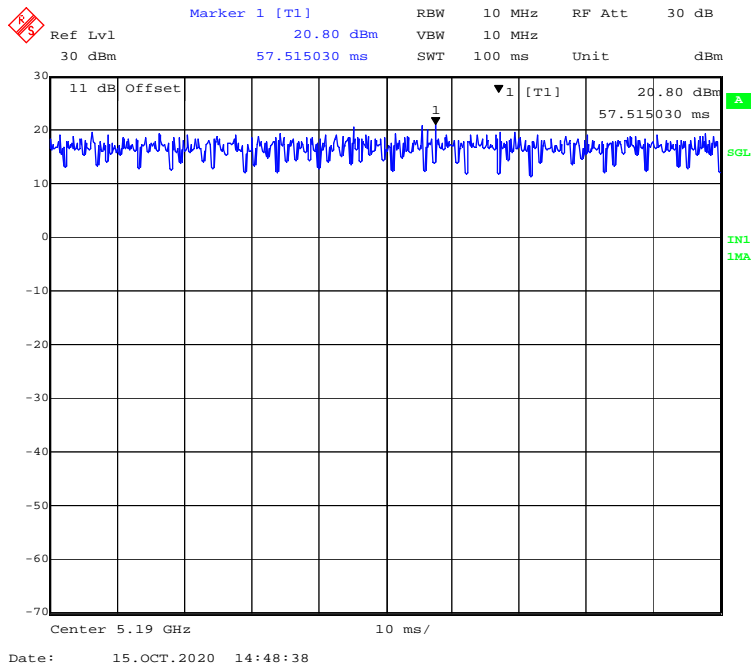




### 802.11ac80 mode

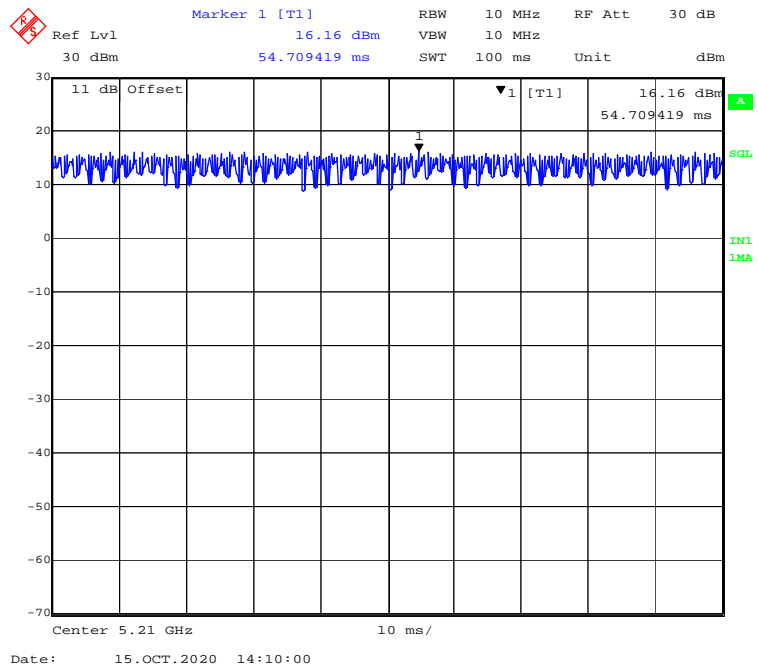


### 5725MHz-5850MHz Band:


### 802.11a mode

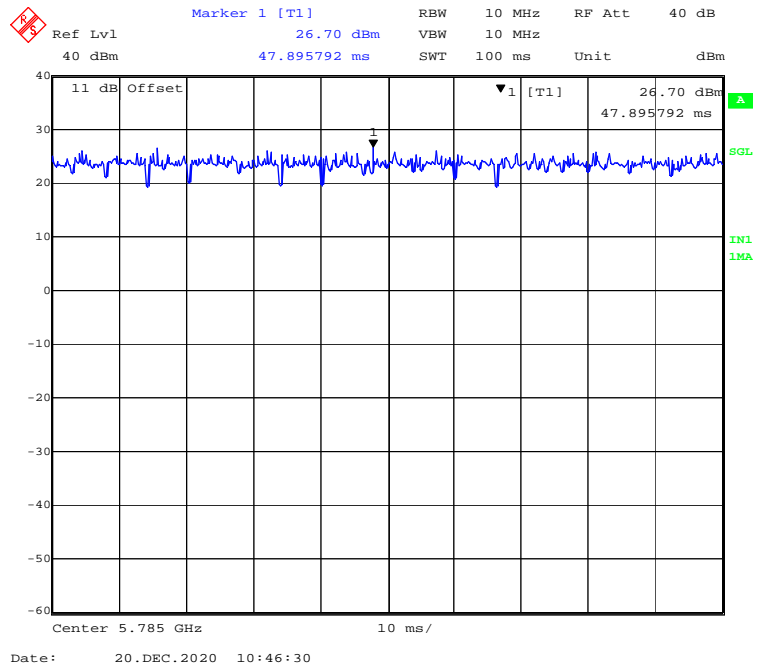


**802.11ac20 mode**

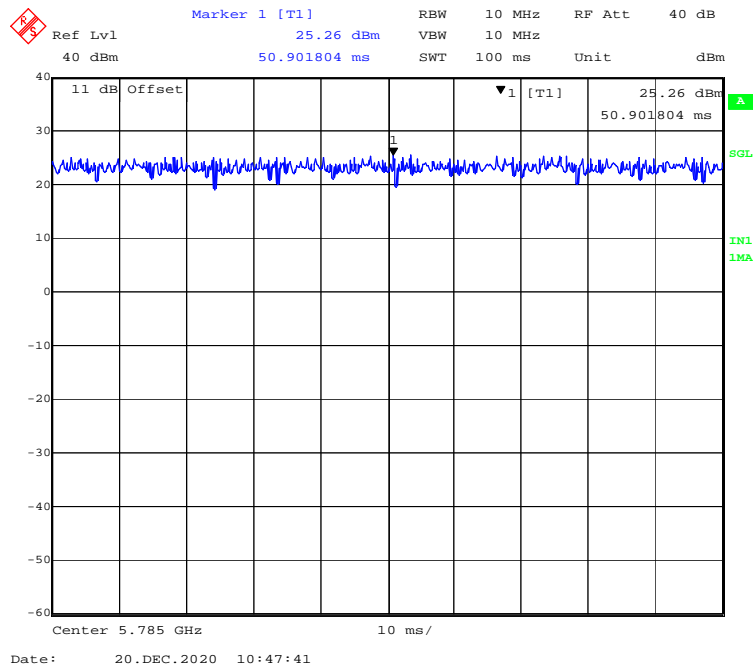


**802.11n-HT20 mode**

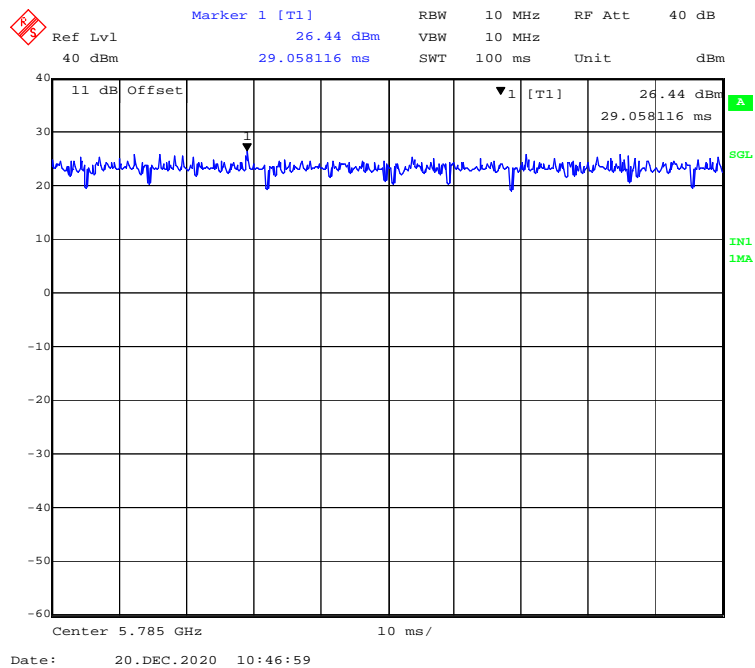


### 802.11ac40 mode

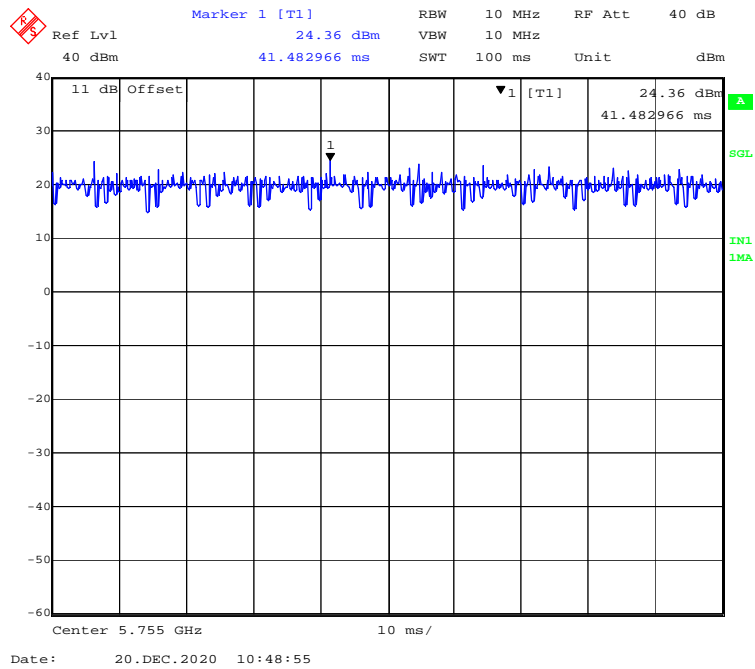

### 802.11n-HT40 mode

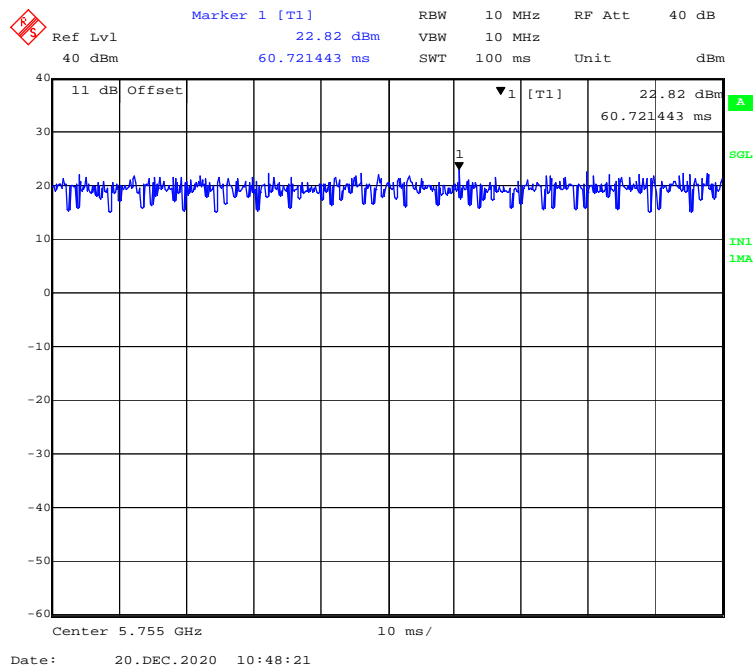

**802.11ac80 mode**

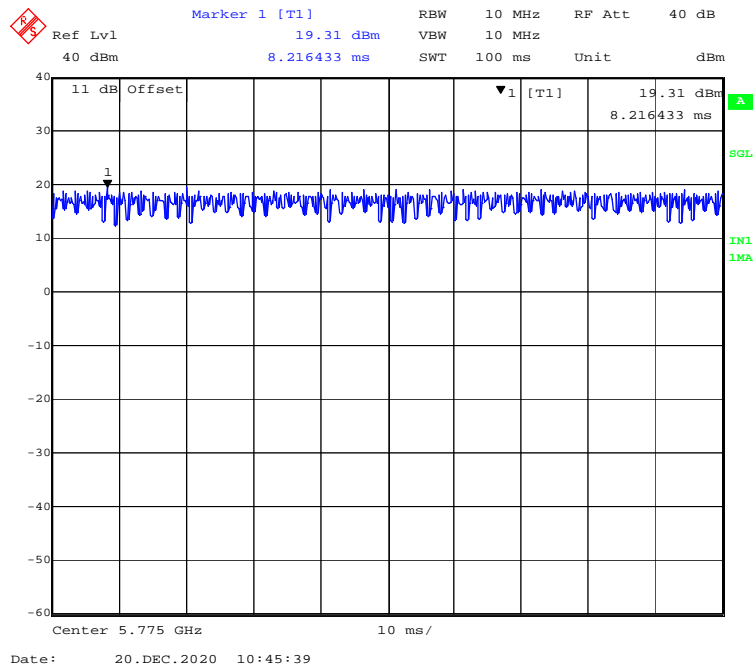

Mode	Frequency Range (MHz)	Duty Cycle (%)	T (ms)	1/T (kHz)	10log(1/x)
802.11a	5150-5250	100	/	/	0
802.11ac20		100	/	/	0
802.11n-HT20		100	/	/	0
802.11ac40		100	/	/	0
802.11n-HT40		100	/	/	0
802.11ac80		100	/	/	0
802.11a	5725-5850	100	/	/	0
802.11ac20		100	/	/	0
802.11n-HT20		100	/	/	0
802.11ac40		100	/	/	0
802.11n-HT40		100	/	/	0
802.11ac80		100	/	/	0

**Note:** "x" means duty cycle.

**Equipment Modifications**

No modification was made to the EUT.

**Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
/	/	/	/

**External I/O Cable**


Cable Description	Length (m)	From Port	To
USB Cable	1.0	EUT	Adapter
Power Cable	1.0	Adapter	LISN

### Block Diagram of Test Setup


For Conducted Emissions:

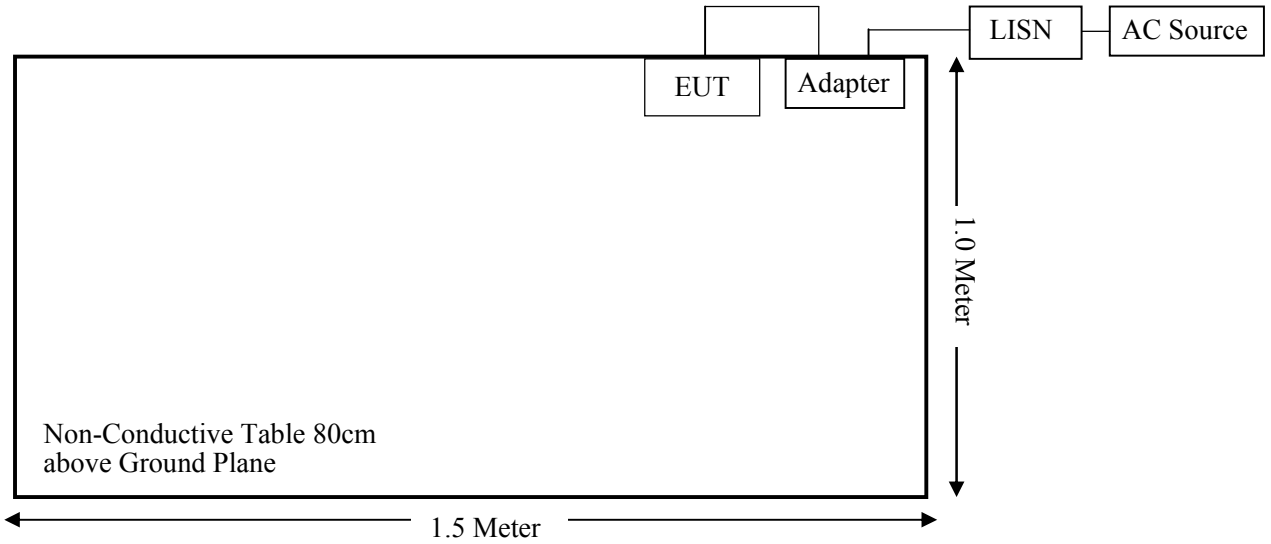

For Radiated Emissions (Below 1GHz):

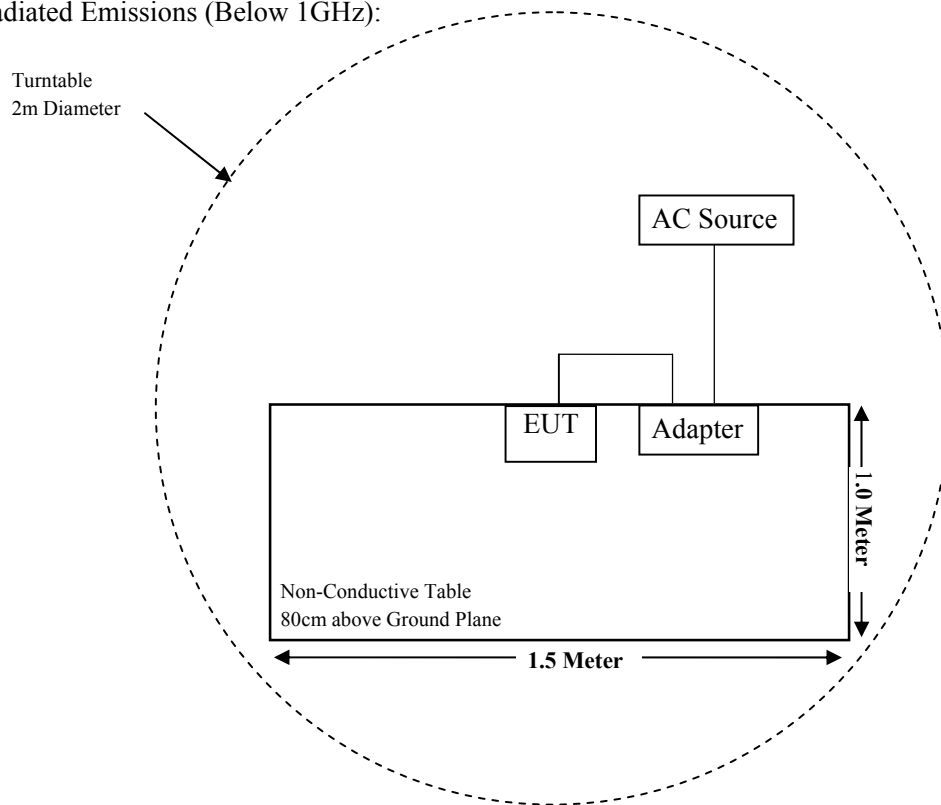

For Radiated Emissions (Above 1GHz):

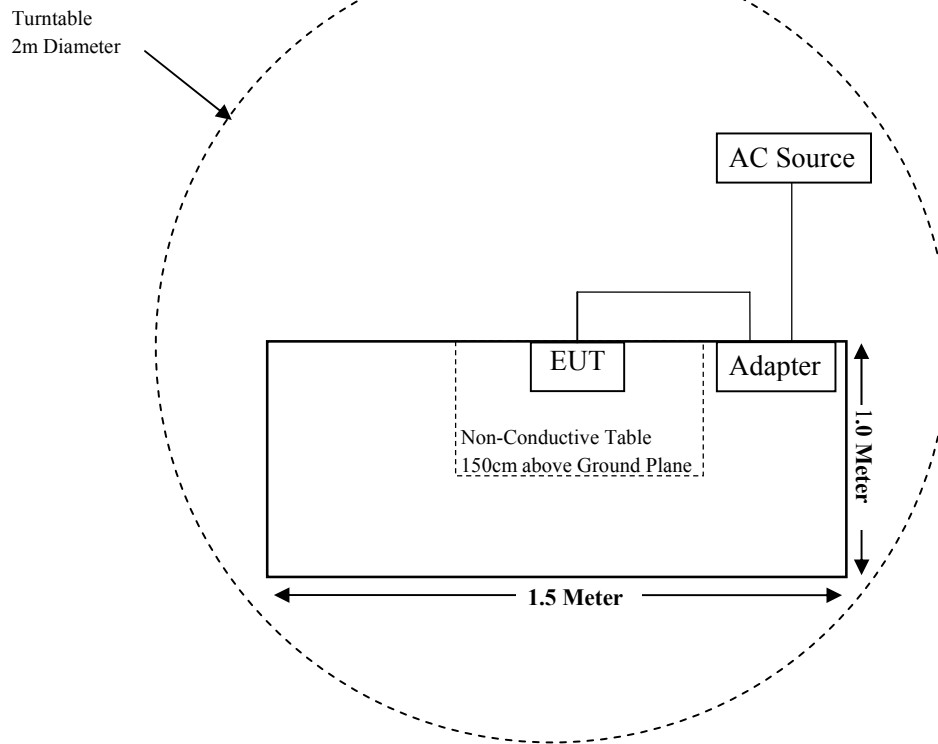

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§1.1307(b)(1)& §2.1093	RF Exposure Information	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 & §15.407(b) (8)	AC Power Line Conducted Emissions	Compliant
§ 15.205 & §15.209 & §15.407(b) (1), (4), (8),(9)	Undesirable Emission & Restricted Bands	Compliant
§§15.407(a) &§15.407(e)	Emission Bandwidth	Compliant
§15.407(a) (1) (3)	Conducted Transmitter Output Power	Compliant
§15.407(a) (1) (3)	Power Spectral Density	Compliant



**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test (Chamber 1#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2019-12-14	2020-12-13
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2017-12-26	2020-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2020-08-14	2021-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2020-08-15	2021-08-14
<b>Radiated Emission Test (Chamber 2#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2020-04-01	2021-03-31
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2020-07-15	2023-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2019-12-12	2022-12-11
A.H.Systems,inc	Amplifier	PAM-0118P	512	2020-02-20	2021-02-19
EM Electronics Corporation	Amplifier	EM18G40G	060726	2020-03-22	2021-03-21
MICRO-TRONICS	Band Reject Filter	BRC50703	G094	2020-08-05	2021-08-04
MICRO-TRONICS	Band Reject Filter	BRC50705	G085	2020-08-05	2021-08-04
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-12-12	2020-12-11
MICRO-COAX	Coaxial Cable	Cable-11	011	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2020-08-15	2021-08-14
<b>RF Conducted Test</b>					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/0009	2019-12-14	2020-12-13
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/0009	2020-12-14	2021-12-13
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2019-12-14	2020-12-13
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2020-12-14	2021-12-13
Agilent	Power Meter	N1912A	MY5000492	2019-11-18	2020-11-17
Agilent	Power Meter	N1912A	MY5000492	2020-11-18	2021-11-17
Agilent	Power Sensor	N1921A	MY54210024	2019-11-18	2020-11-17
Agilent	Power Sensor	N1921A	MY54210024	2020-11-18	2021-11-17
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
ZOOMSMART	RF Cable	ZOOMSMART C01	C01	Each Time	/

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2020-08-05	2021-08-04
Rohde & Schwarz	LISN	ENV216	101115	2019-12-14	2020-12-13
Audix	Test Software	e3	V9	--	--
Rohde & Schwarz	Pulse limiter	ESH3-Z2	357.8810.52	2020-08-10	2021-08-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2020-08-15	2021-08-14

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

---

## **FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION**

---

### **Applicable Standard**

FCC§1.1307,§2.1093.

### **Test Result**

Compliance, please refer to the SAR report: RSH201022050-SA

## **FCC §15.203 – ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
  - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407, if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

The EUT has an FPC antenna for 5G Wi-Fi which the antenna gain is -0.25 dBi, which is permanently attached to the unit, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliant.

## FCC §15.407 (b) (8) §15.207 (a) – AC POWER LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a), §15.407(b) (8)

### EUT Setup

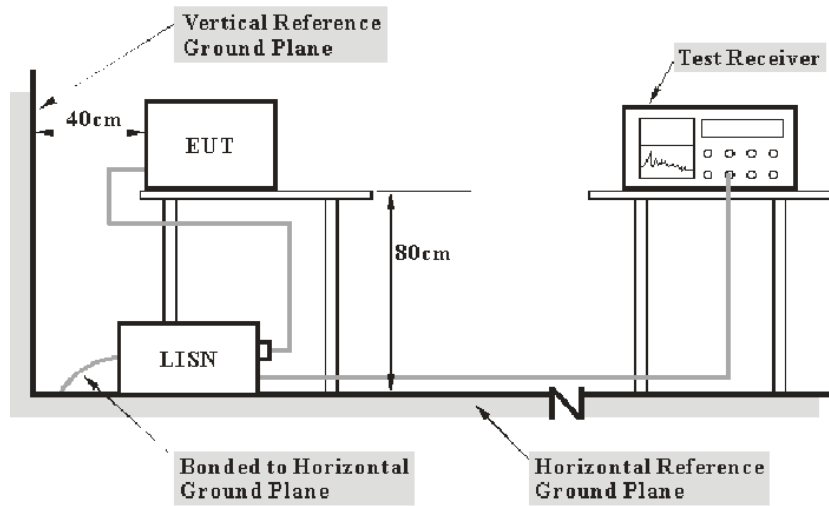

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 30 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

## Corrected Factor & Over Limit Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

## Test Data


### Environmental Conditions

<b>Temperature:</b>	24.5 °C
<b>Relative Humidity:</b>	52 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by CK Huang on 2020-10-10.*


*EUT operation mode: Transmitting in 802.11n-HT20 mode low channel of 5150~5250MHz (worst case).*

AC 120V/60 Hz, Line

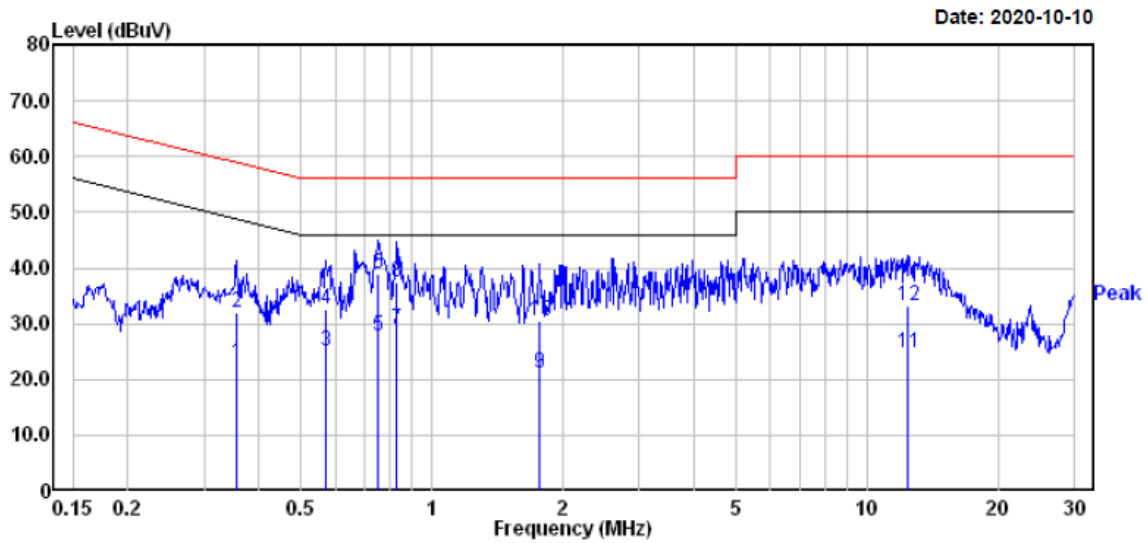

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.356	3.00	19.80	22.80	48.83	-26.03	Average
2	0.356	12.10	19.80	31.90	58.83	-26.93	QP
3	0.570	5.20	19.75	24.95	46.00	-21.05	Average
4	0.570	12.90	19.75	32.65	56.00	-23.35	QP
5	0.755	8.00	19.72	27.72	46.00	-18.28	Average
6	0.755	19.30	19.72	39.02	56.00	-16.98	QP
7	0.830	9.20	19.71	28.91	46.00	-17.09	Average
8	0.830	17.70	19.71	37.41	56.00	-18.59	QP
9	1.762	1.20	19.84	21.04	46.00	-24.96	Average
10	1.762	10.50	19.84	30.34	56.00	-25.66	QP
11	12.449	5.19	19.60	24.79	50.00	-25.21	Average
12	12.449	13.69	19.60	33.29	60.00	-26.71	QP

AC 120V/60 Hz, Neutral

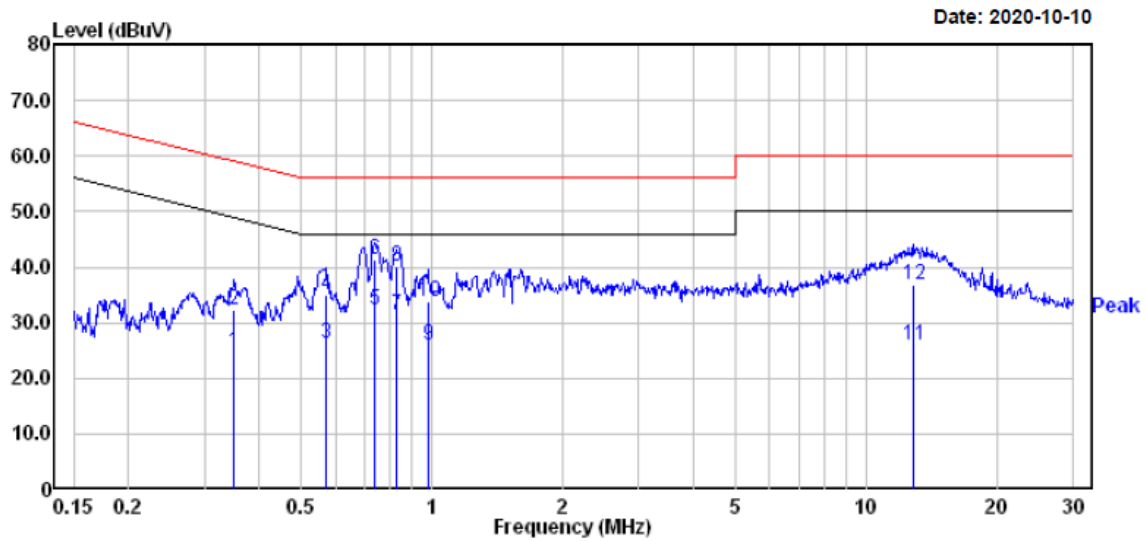

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.350	4.80	19.81	24.61	48.96	-24.35	Average
2	0.350	12.60	19.81	32.41	58.96	-26.55	QP
3	0.570	6.50	19.75	26.25	46.00	-19.75	Average
4	0.570	15.40	19.75	35.15	56.00	-20.85	QP
5	0.739	12.50	19.73	32.23	46.00	-13.77	Average
6	0.739	21.60	19.73	41.33	56.00	-14.67	QP
7	0.826	11.70	19.71	31.41	46.00	-14.59	Average
8	0.826	20.30	19.71	40.01	56.00	-15.99	QP
9	0.979	6.20	19.80	26.00	46.00	-20.00	Average
10	0.979	14.10	19.80	33.90	56.00	-22.10	QP
11	12.920	6.30	19.60	25.90	50.00	-24.10	Average
12	12.920	17.20	19.60	36.80	60.00	-23.20	QP


Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)




EUT operation mode: Transmitting in 802.11ac20 mode low channel of 5725~5850MHz (worst case).

AC 120V/60 Hz, Line

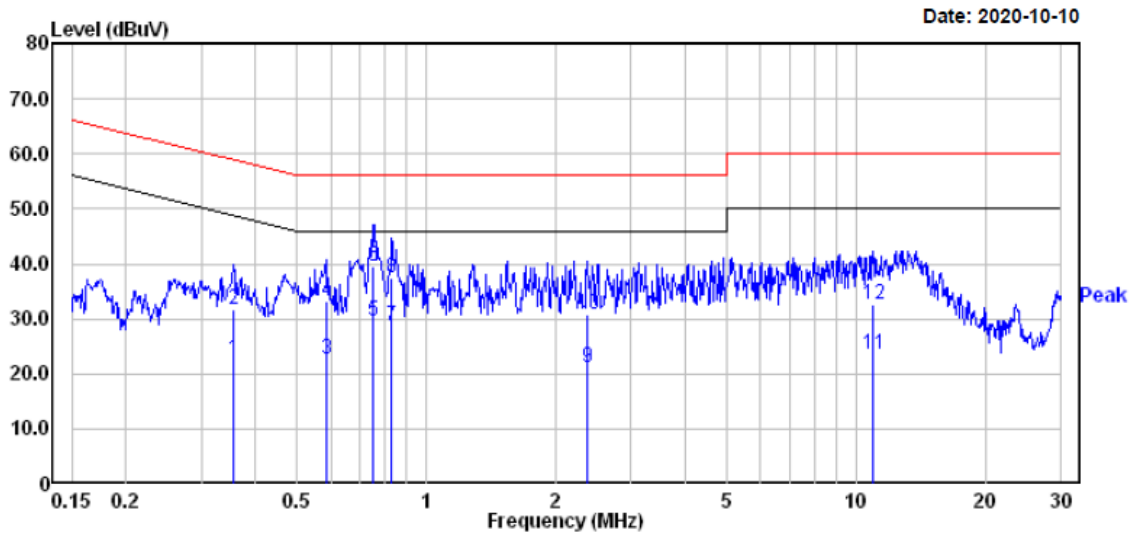

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.356	2.80	19.80	22.60	48.83	-26.23	Average
2	0.356	12.00	19.80	31.80	58.83	-27.03	QP
3	0.585	2.80	19.75	22.55	46.00	-23.45	Average
4	0.585	13.50	19.75	33.25	56.00	-22.75	QP
5	0.751	10.00	19.72	29.72	46.00	-16.28	Average
6	0.751	19.90	19.72	39.62	56.00	-16.38	QP
7	0.830	9.10	19.71	28.81	46.00	-17.19	Average
8	0.830	17.60	19.71	37.31	56.00	-18.69	QP
9	2.371	1.50	19.56	21.06	46.00	-24.94	Average
10	2.371	11.20	19.56	30.76	56.00	-25.24	QP
11	10.963	3.90	19.57	23.47	50.00	-26.53	Average
12	10.963	13.00	19.57	32.57	60.00	-27.43	QP

AC 120V/60 Hz, Neutral

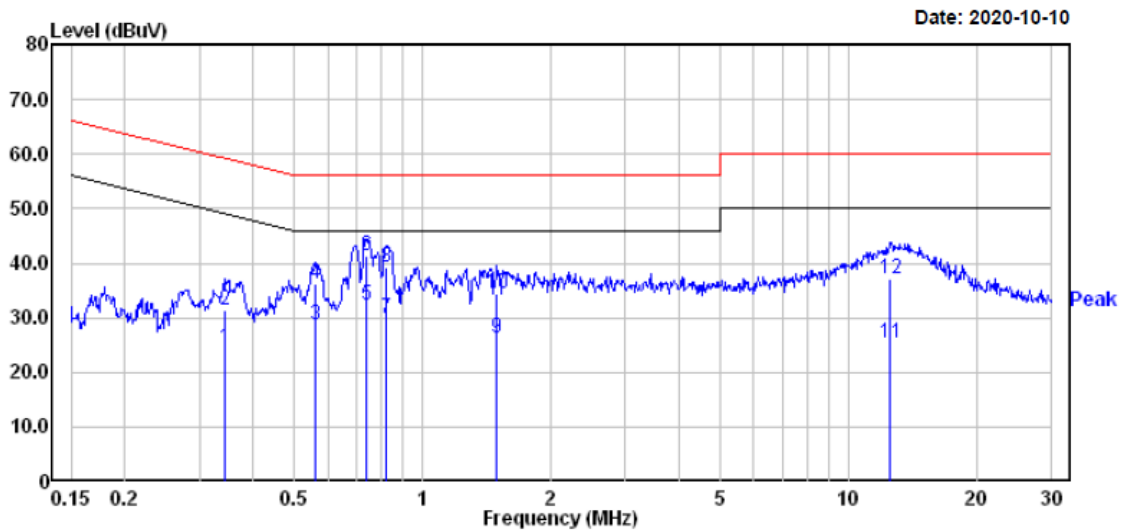

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.345	4.70	19.81	24.51	49.09	-24.58	Average
2	0.345	11.60	19.81	31.41	59.09	-27.68	QP
3	0.561	8.90	19.75	28.65	46.00	-17.35	Average
4	0.561	16.50	19.75	36.25	56.00	-19.75	QP
5	0.739	12.60	19.73	32.33	46.00	-13.67	Average
6	0.739	21.60	19.73	41.33	56.00	-14.67	QP
7	0.822	10.21	19.70	29.91	46.00	-16.09	Average
8	0.822	19.51	19.70	39.21	56.00	-16.79	QP
9	1.495	6.50	19.84	26.34	46.00	-19.66	Average
10	1.495	14.70	19.84	34.54	56.00	-21.46	QP
11	12.582	5.80	19.60	25.40	50.00	-24.60	Average
12	12.582	17.50	19.60	37.10	60.00	-22.90	QP

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)

**§15.205 & §15.209 & §15.407(B) (1), (4), (8),(9) – UNDESIRABLE EMISSION & RESTRICTED BANDS**

**Applicable Standard**

FCC §15.407 (b) (1), (4), (8), (9); §15.209; §15.205;

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.


For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000MHz shall be performed using a minimum resolution bandwidth of 1MHz.


According to 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as:  $E [dB\mu V/m] = EIRP [dBm] + 95.2$ , for  $d = 3$  meters.

**EUT Setup**

Below 1 GHz:

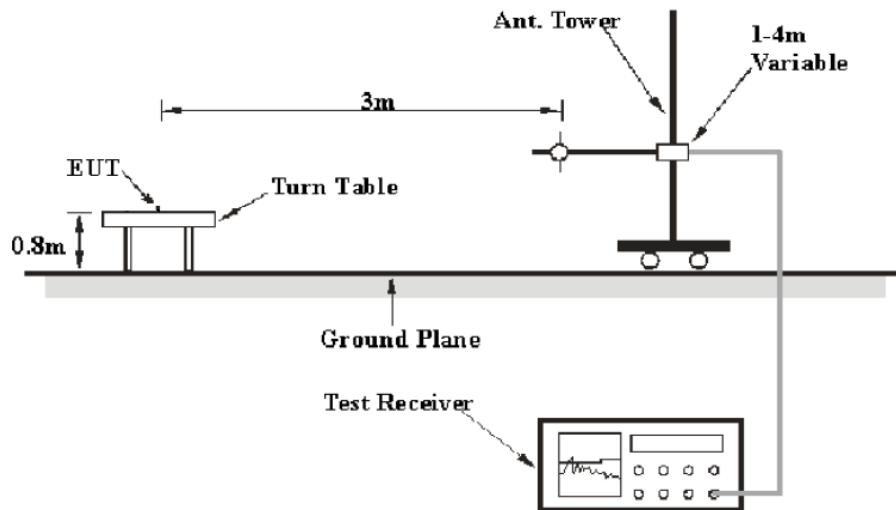

1 GHz-40GHz:

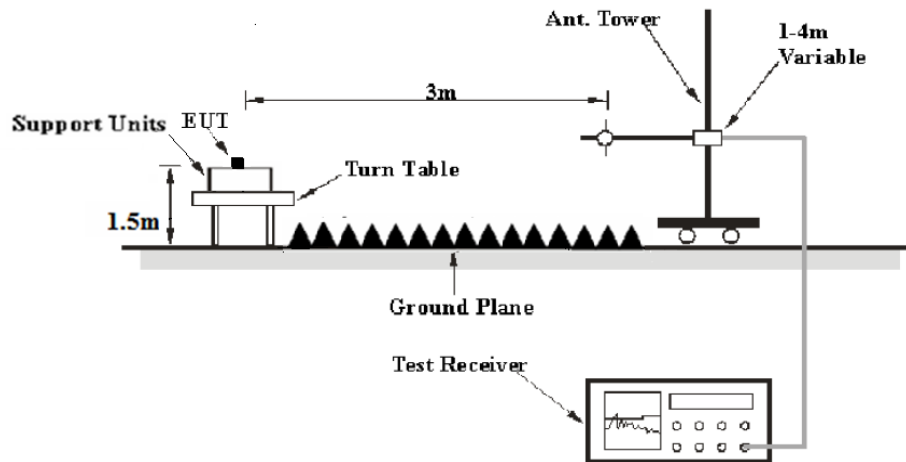

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

**Test Procedure**

During the radiated emission test, the adapter was connected to AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Data

### Environmental Conditions

<b>Temperature:</b>	23.2~23.4 °C
<b>Relative Humidity:</b>	53~57 %
<b>ATM Pressure:</b>	101.1~101.7 kPa


*The testing was performed by CK Huang from 2020-10-15 to 2020-10-22.*

*Test Mode: Transmitting*

### Spurious Emission Test

#### 30MHz-1GHz(5150-5250MHz Band):


Pre-scan with 802.11a, 802.11ac20, 802.11n-HT20, 802.11ac40, 802.11n-HT40 and 802.11 ac80 modes of operation in the X,Y and Z axes of orientation, **the worst case 802.11n-HT20 mode low channel** in Y-axis of orientation was recorded

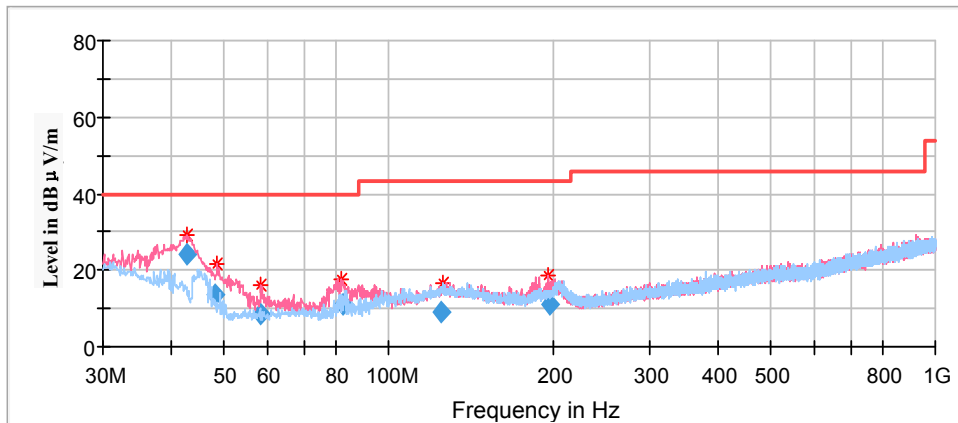

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
42.86	24.34	100.0	V	45.0	-19.2	40.00	15.66
48.24	13.55	100.0	V	64.0	-22.1	40.00	26.45
58.51	8.49	200.0	V	195.0	-24.0	40.00	31.51
82.75	10.95	100.0	V	358.0	-23.9	40.00	29.05
125.07	9.00	200.0	H	243.0	-17.2	43.50	34.50
197.17	10.94	100.0	V	115.0	-17.7	43.50	32.56

**30MHz-1GHz(5725-5850MHz Band):**

*Pre-scan with 802.11a, 802.11ac20, 802.11n-HT20, 802.11ac40, 802.11n-HT40 and 802.11 ac80 modes of operation in the X,Y and Z axes of orientation, the worst case 802.11ac20 mode low channel in Y-axis of orientation was recorded*

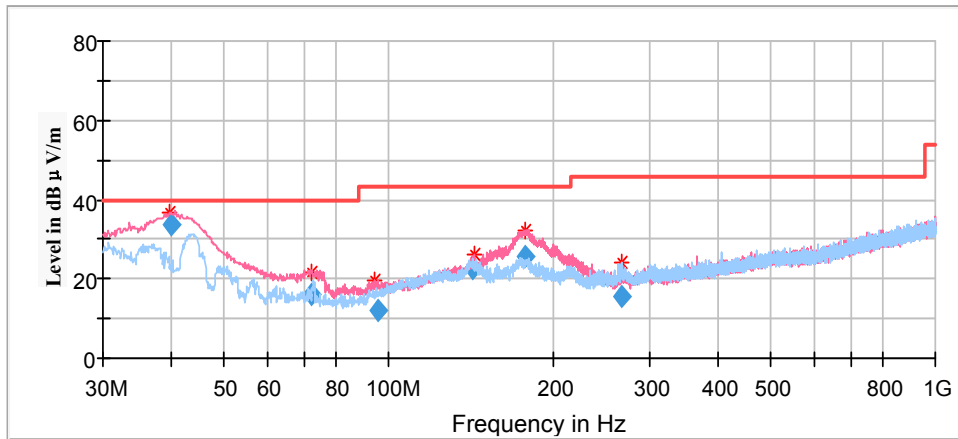

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
39.98	33.69	100.0	V	137.0	-11.3	40.00	6.31
72.35	15.85	100.0	V	290.0	-17.3	40.00	24.15
95.40	12.31	100.0	V	278.0	-16.2	43.50	31.19
142.62	22.87	100.0	V	174.0	-12.0	43.50	20.63
177.13	25.42	100.0	V	193.0	-13.3	43.50	18.08
266.79	15.75	200.0	H	240.0	-12.5	46.00	30.25

**1GHz-18GHz(5150-5250MHz Band):**


**802.11a Mode:**

(Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation was recorded.)

Note:

1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit - Corrected. Amplitude


**Low Channel: 5180MHz**

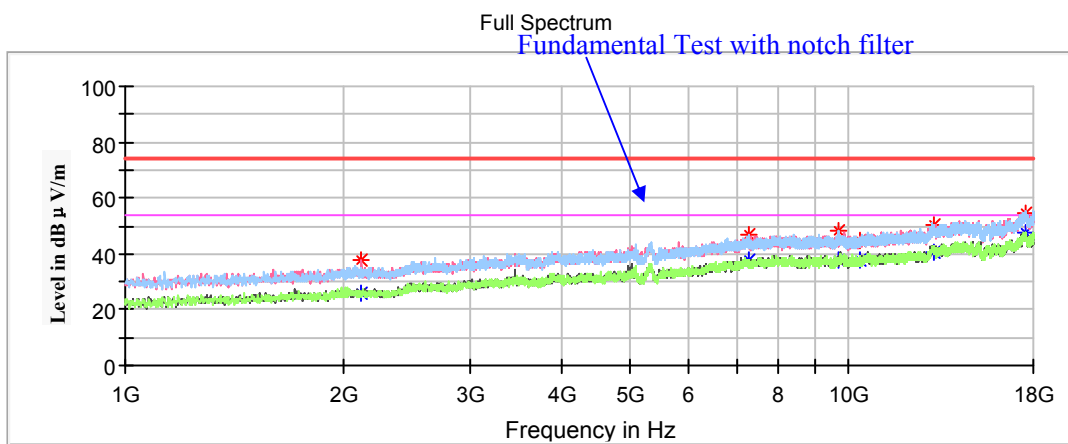

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
2123.70	37.79	---	200	V	223.0	-14.0	68.20	30.41
7269.60	---	37.77	200	H	137.0	0.5	54.00	16.23
7269.60	46.56	---	200	H	137.0	0.5	74.00	27.44
9671.70	48.04	---	150	H	86.0	2.1	68.20	20.16
10358.50	44.62	---	150	V	129.0	2.2	68.20	23.58
13138.00	50.54	---	150	H	201.0	5.3	68.20	17.66
17564.80	54.33	---	200	V	337.0	8.9	68.20	13.87




**Middle Channel: 5200MHz**

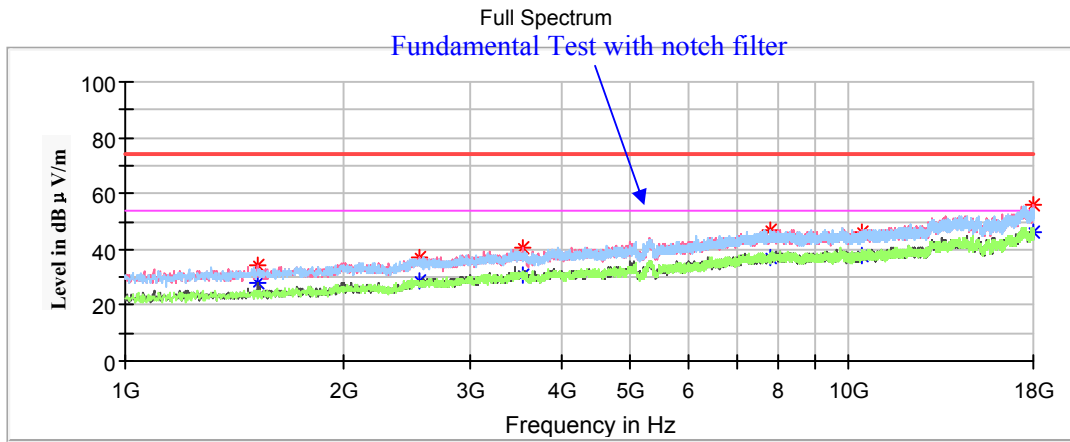

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1521.90	---	27.69	200	V	249.0	-16.3	54.00	26.31
1521.90	34.40	---	200	V	249.0	-16.3	74.00	39.60
2553.80	36.79	---	150	V	224.0	-12.2	68.20	31.41
3543.20	40.41	---	150	V	287.0	-8.7	68.20	27.79
7786.40	47.19	---	150	H	84.0	1.5	68.20	21.01
10399.30	45.89	---	150	V	262.0	2.2	68.20	22.31
17957.50	---	46.00	150	V	274.0	8.8	54.00	8.00
17957.50	55.63	---	150	V	274.0	8.8	74.00	18.37

**High Channel: 5240MHz**

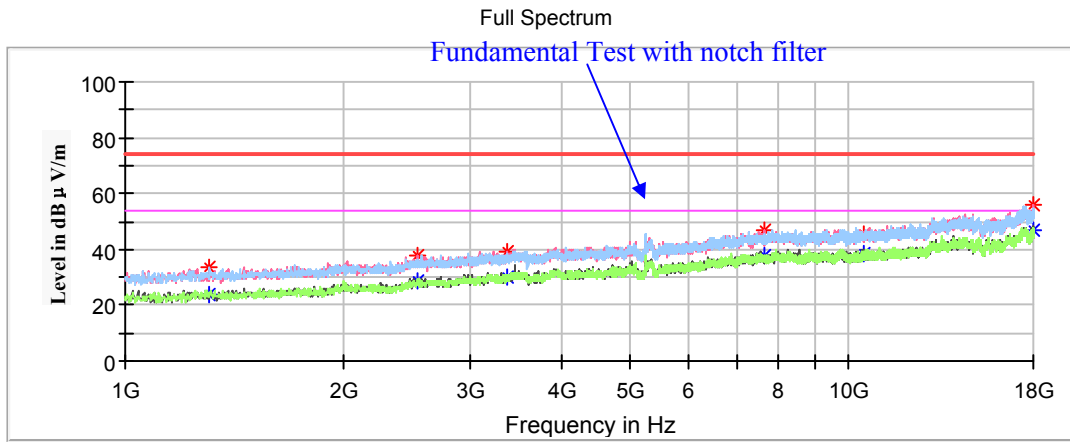

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1309.40	---	24.02	200	H	256.0	-17.4	54.00	29.98
1309.40	33.62	---	200	H	256.0	-17.4	74.00	40.38
2536.80	37.50	---	200	V	89.0	-12.2	68.20	30.70
3371.50	39.41	---	150	V	63.0	-9.1	68.20	28.79
7652.10	---	37.43	150	V	36.0	1.3	54.00	16.57
7652.10	46.70	---	150	V	36.0	1.3	74.00	27.30
10484.30	45.70	---	150	H	0.0	2.3	68.20	22.50
17969.40	---	46.57	150	V	354.0	8.8	54.00	7.43
17969.40	55.70	---	150	V	354.0	8.8	74.00	18.30


**802.11ac20 Mode:**

(Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation was recorded.)

Note:


1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit - Corrected. Amplitude

**Low Channel: 5180MHz**

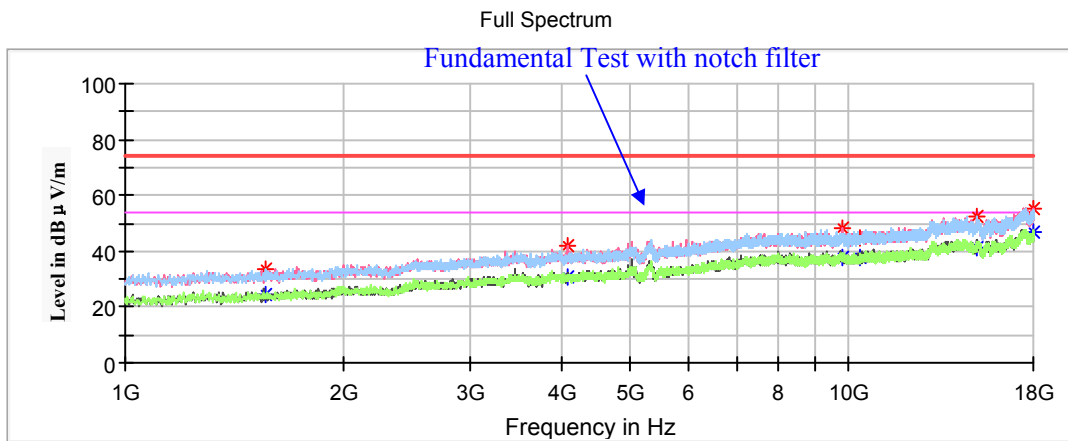


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1566.10	---	24.33	200	H	193.0	-16.1	54.00	29.67
1566.10	33.22	---	200	H	193.0	-16.1	74.00	40.78
4094.00	---	30.75	150	V	258.0	-6.9	54.00	23.25
4094.00	42.05	---	150	V	49.0	-6.9	74.00	31.95
9824.70	48.04	---	150	V	344.0	2.0	68.20	20.16
10360.20	44.61	---	150	V	76.0	2.2	68.20	23.59
15074.30	52.20	---	200	H	66.0	5.0	68.20	16.00
17960.90	---	46.76	150	H	16.0	8.8	54.00	7.24
17960.90	55.45	---	150	H	0.0	8.8	74.00	18.55

**Middle Channel: 5200MHz**

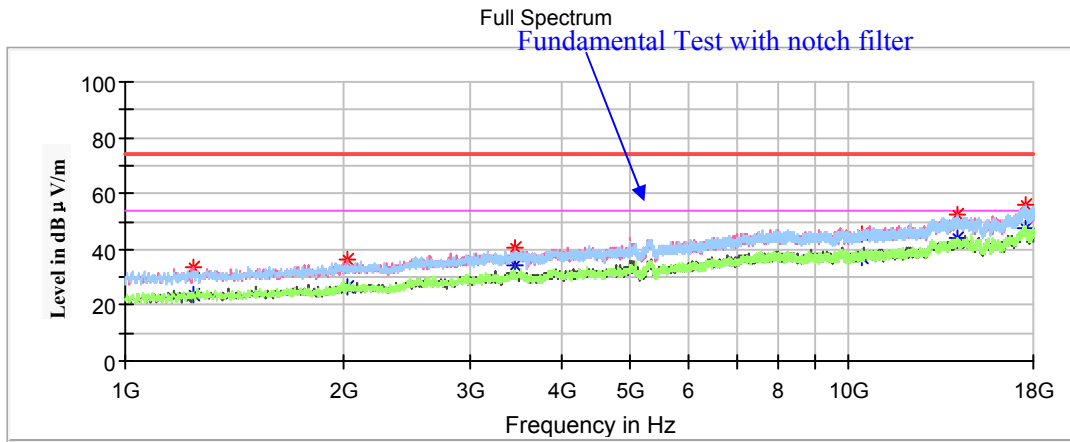

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1243.10	33.81	---	150	V	286.0	-17.8	68.20	34.39
2023.40	36.26	---	150	V	0.0	-14.4	68.20	31.94
3454.80	40.84	---	200	V	311.0	-8.9	68.20	27.36
10401.00	45.27	---	150	V	311.0	2.2	68.20	22.93
14159.70	52.34	---	200	V	2.0	6.3	68.20	15.86
17592.00	55.71	---	150	V	298.0	8.9	68.20	12.49

**High Channel: 5240MHz**

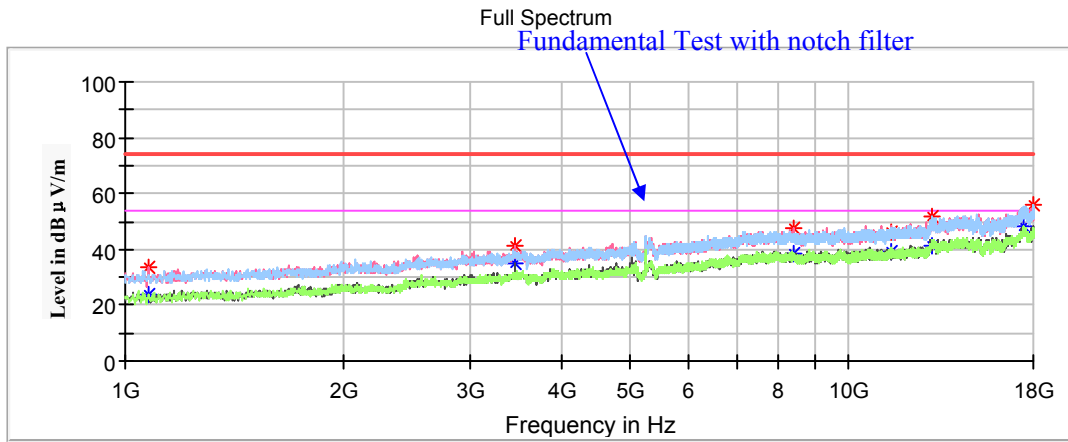

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1076.50	33.47	---	150	V	262.0	-18.7	54.00	30.07
1076.50	---	23.93	150	V	262.0	-18.7	74.00	40.53
3454.80	41.10	---	150	V	0.0	-8.9	68.20	27.10
8388.20	---	38.43	200	V	129.0	1.4	54.00	15.57
8388.20	47.28	---	200	V	129.0	1.4	74.00	26.72
11478.80	---	38.84	150	H	356.0	2.8	54.00	15.16
11478.80	45.91	---	150	H	356.0	2.8	74.00	28.09
13025.80	51.97	---	150	H	122.0	5.2	68.20	16.23
17954.10	---	47.96	200	H	270.0	8.6	54.00	6.04
17954.10	55.67	---	200	H	270.0	8.8	74.00	18.33


**802.11n-HT20 Mode:**

Pre-scan with X,Y and Z axes of orientation, the worst case Y-axis of orientation was recorded

Note:


1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit - Corrected. Amplitude

**Low Channel: 5180MHz**

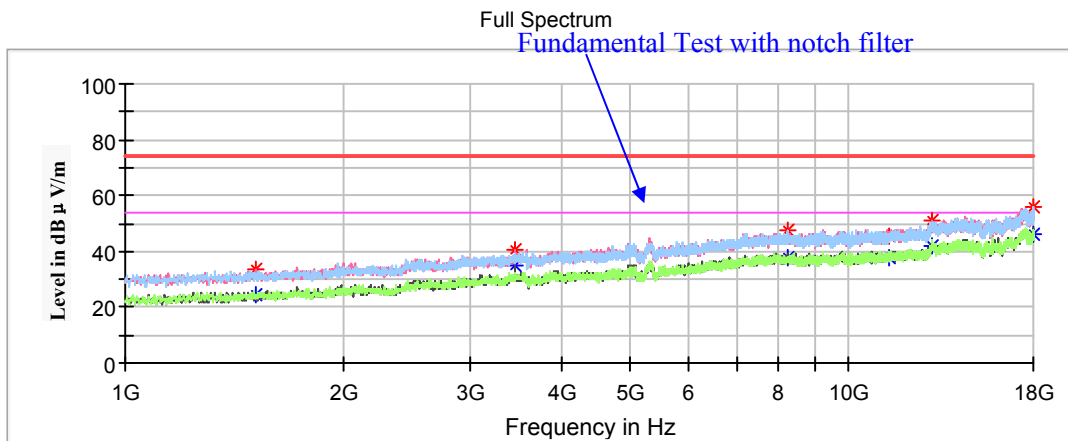


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1511.70	---	24.56	200	V	2.0	-16.3	54.00	29.44
1511.70	33.87	---	200	V	2.0	-16.3	74.00	40.13
3454.80	40.69	---	150	V	313.0	-8.9	68.20	27.51
8214.80	---	37.71	200	V	73.0	1.6	54.00	16.29
8214.80	47.47	---	200	H	73.0	1.6	74.00	26.53
11359.80	---	37.57	150	H	0.0	2.8	54.00	16.43
11359.80	45.56	---	150	H	0.0	2.8	74.00	28.44
13064.90	51.10	---	150	V	0.0	5.3	68.20	17.10
17954.10	---	46.50	150	H	265.0	8.8	54.00	7.50
17954.10	55.98	---	150	H	265.0	8.8	74.00	18.02

**Middle Channel: 5200MHz**

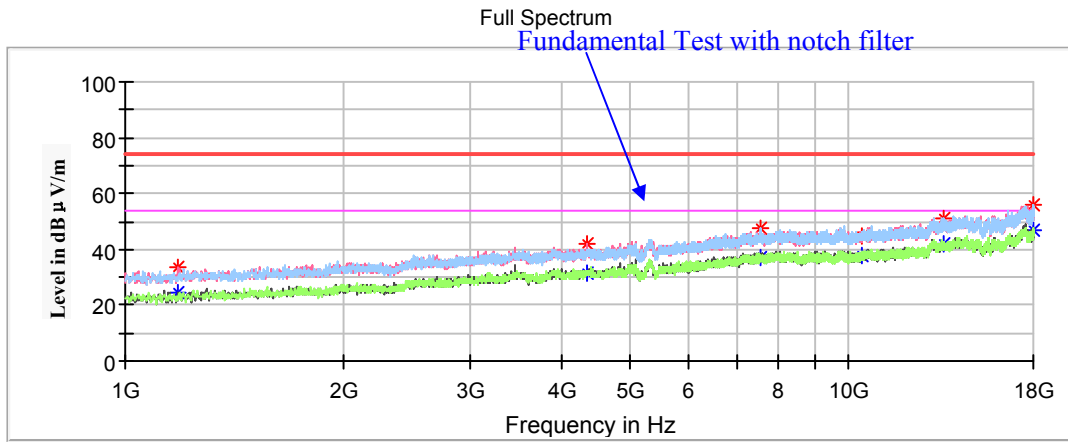

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1185.30	---	24.29	200	V	129.0	-18.1	54.00	29.71
1185.30	33.35	---	200	V	129.0	-18.1	74.00	40.65
4355.80	---	31.18	150	V	295.0	-6.4	54.00	22.82
4355.80	42.25	---	150	V	295.0	-6.4	74.00	31.75
7562.00	---	36.72	200	H	35.0	1.1	54.00	17.28
7562.00	47.24	---	200	H	35.0	1.1	74.00	26.76
10401.00	44.45	---	150	H	298.0	2.2	68.20	23.75
13544.30	50.74	---	200	H	48.0	5.7	68.20	17.46
17957.50	---	46.54	150	V	23.0	8.8	54.00	7.46
17957.50	55.84	---	150	V	23.0	8.8	74.00	18.16

**High Channel: 5240MHz**

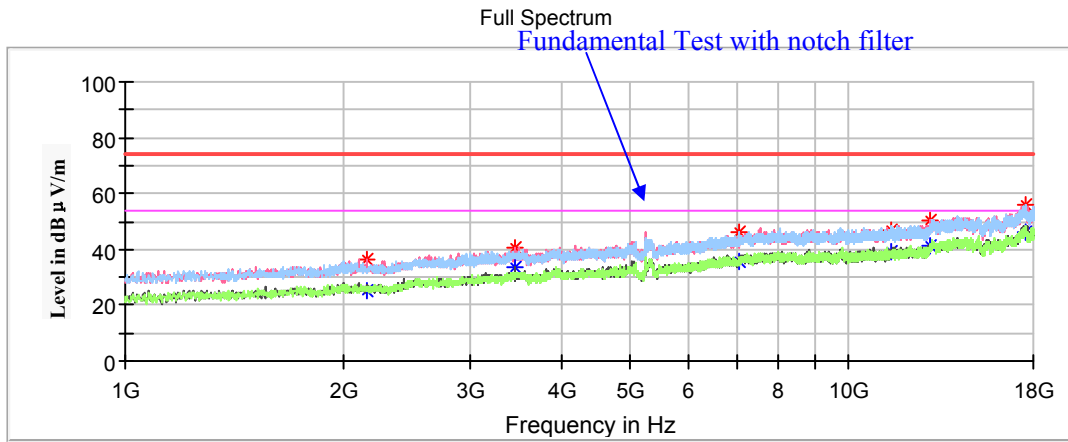

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
2156.00	36.54	---	150	V	337.0	-13.8	68.20	31.66
3454.80	40.39	---	150	V	325.0	-8.9	68.20	27.81
7036.70	46.33	---	150	H	148.0	0.0	68.20	21.87
11477.10	---	38.98	200	V	49.0	2.8	54.00	15.02
11477.10	46.67	---	200	V	49.0	2.8	74.00	27.33
12956.10	50.61	---	150	V	102.0	5.0	68.20	17.59
17566.50	56.07	---	150	H	123.0	8.9	68.20	12.13




**802.11ac40 Mode:**

(Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation was recorded.)

Note:

1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit - Corrected. Amplitude


**Low Channel: 5190MHz**

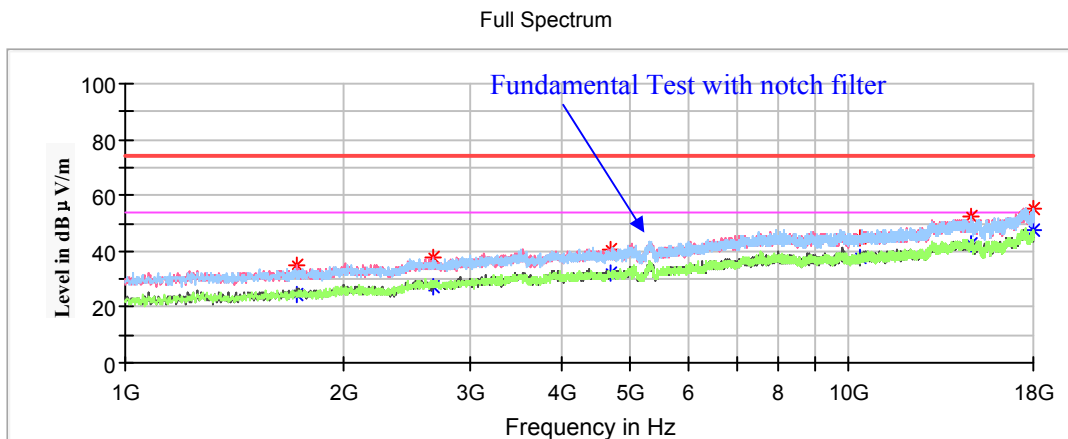

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1725.90	35.16	---	200	V	275.0	-15.5	68.20	33.04
2664.30	37.86	---	150	V	143.0	-11.7	68.20	30.34
4673.70	40.82	---	150	V	339.0	-5.9	74.00	33.18
4673.70	---	32.52	150	V	339.0	-5.9	54.00	21.48
10382.30	44.69	---	150	H	10.0	2.2	68.20	23.51
14766.60	52.19	---	150	H	296.0	5.8	68.20	16.01
17964.30	55.59	---	150	H	173.0	8.8	74.00	18.41
17964.30	---	47.34	150	H	173.0	8.8	54.00	6.66

**High Channel: 5230MHz**

Full Spectrum

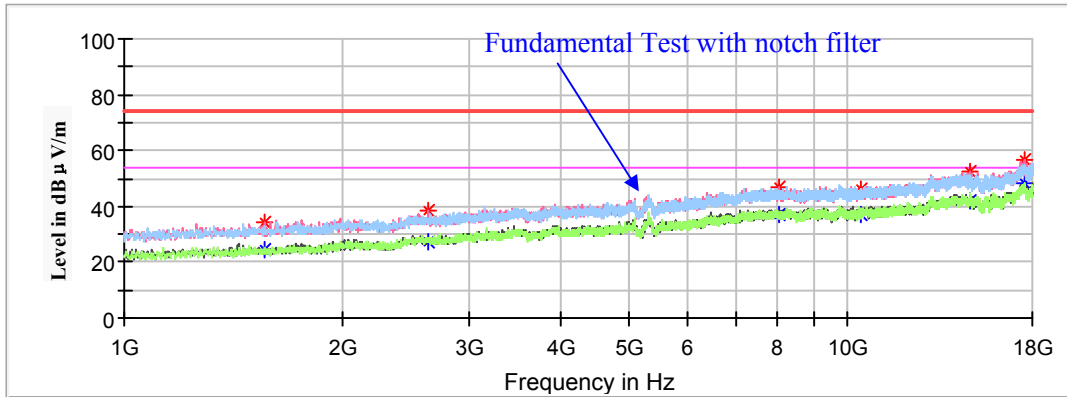

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1567.80	---	24.65	200	V	0.0	-16.1	54.00	29.35
1567.80	34.58	---	200	V	0.0	-16.1	74.00	39.42
2628.60	38.23	---	150	V	7.0	-11.8	68.20	29.97
8031.20	---	37.17	150	H	21.0	1.8	54.00	16.83
8031.20	46.82	---	150	H	21.0	1.8	74.00	27.18
10460.50	46.08	---	150	H	85.0	2.3	68.20	22.12
14770.00	52.70	---	200	V	180.0	5.8	68.20	15.50
17552.90	56.41	---	150	V	2.0	8.9	68.20	11.79


**802.11n-HT40 Mode:**

*Pre-scan with X,Y and Z axes of orientation, the worst case Y-axis of orientation was recorded*

Note:

1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit - Corrected. Amplitude


**Low Channel: 5190MHz**

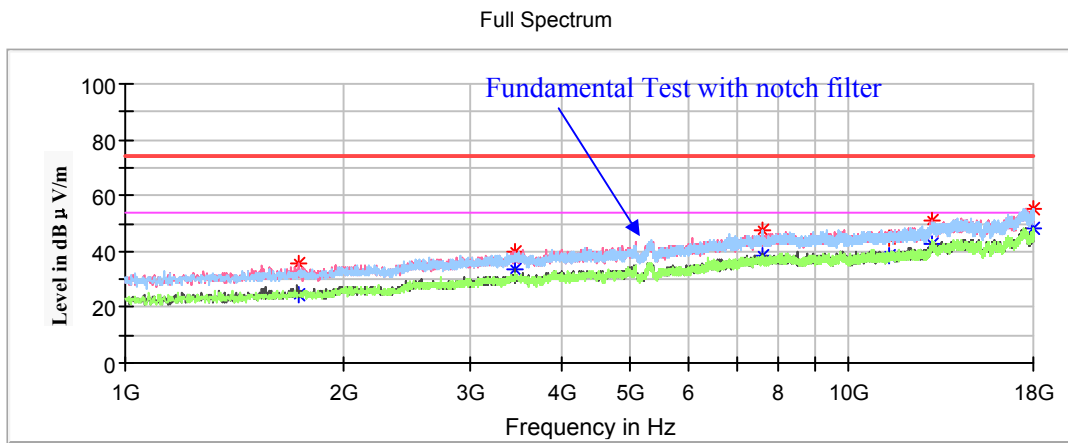

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1737.80	35.46	---	150	V	313.0	-15.5	68.20	32.74
3454.80	39.86	---	150	V	326.0	-8.9	68.20	28.34
7584.10	---	38.23	200	H	174.0	1.2	54.00	15.77
7584.10	47.65	---	200	H	174.0	1.2	74.00	26.35
11385.30	---	38.21	150	H	212.0	2.8	54.00	15.79
11385.30	44.56	---	150	H	212.0	2.8	74.00	29.44
13017.30	51.00	---	150	V	326.0	5.2	68.20	17.20
17966.00	55.41	---	200	V	142.0	8.8	74.00	18.59
17966.00	---	48.29	200	V	142.0	8.8	54.00	5.71

**Middle Channel: 5230MHz**

Full Spectrum

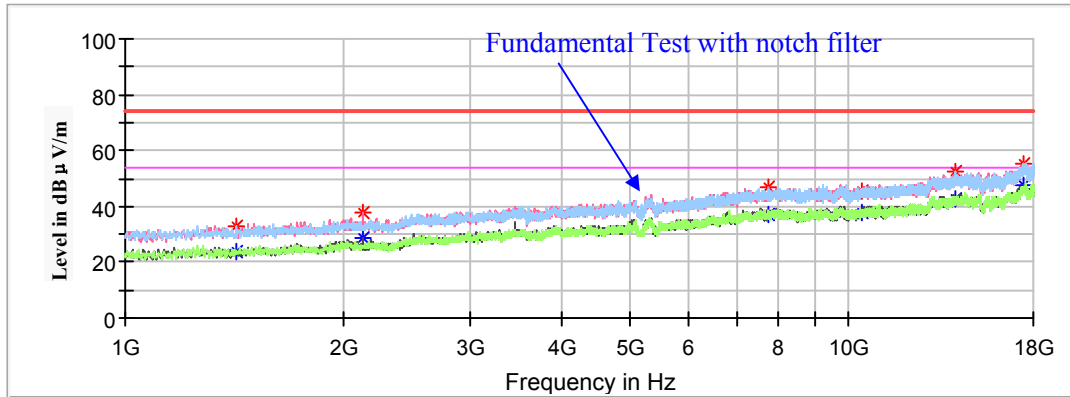

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1426.70	---	23.49	150	H	47.0	-16.8	54.00	30.51
1426.70	33.03	---	150	H	47.0	-16.8	74.00	40.97
2127.10	37.74	---	150	V	333.0	-13.9	68.20	30.46
7743.90	---	36.83	150	V	321.0	1.4	54.00	17.17
7743.90	46.54	---	150	V	321.0	1.4	74.00	27.46
10460.50	45.43	---	150	V	181.0	2.3	68.20	22.77
14042.40	52.36	---	150	H	297.0	6.2	68.20	15.84
17411.80	55.16	---	150	V	50.0	8.6	68.20	13.04


**802.11ac80 Mode:**

*Pre-scan with X,Y and Z axes of orientation, the worst case Y-axis of orientation was recorded*

Note:

1. This test was performed with the 5150-5250MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit - Corrected. Amplitude

**Low Channel: 5210MHz**

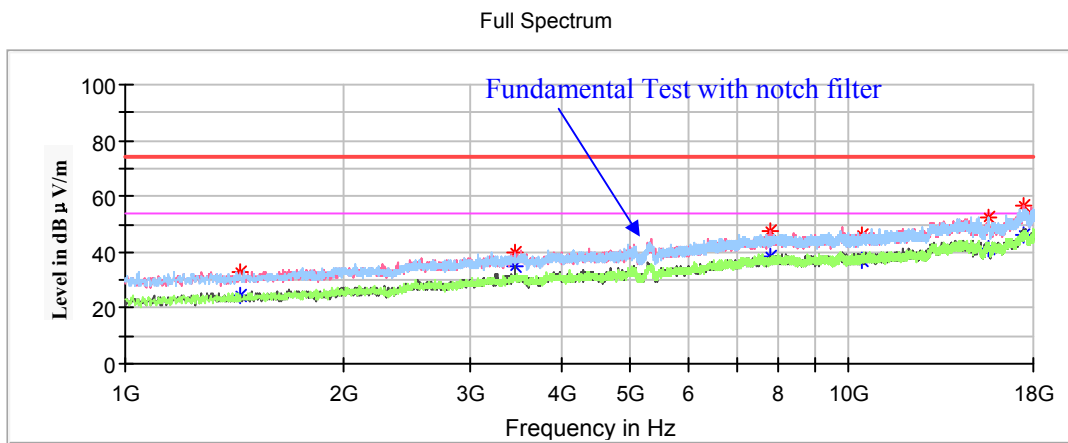

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1438.60	---	24.41	200	H	168.0	-16.7	54.00	29.59
1438.60	33.18	---	200	H	168.0	-16.7	74.00	40.82
3454.80	40.12	---	150	V	311.0	-8.9	68.20	28.08
7801.70	47.24	---	200	V	311.0	1.5	68.20	20.96
10419.70	45.82	---	150	H	81.0	2.2	68.20	22.38
15577.50	---	41.17	150	H	257.0	4.8	54.00	12.83
15577.50	52.41	---	150	H	257.0	4.8	74.00	21.59
17445.80	56.55	---	150	V	184.0	8.7	68.20	11.65

**1GHz-18GHz(5725-5850MHz Band):**


**802.11a Mode:**

(Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation was recorded.)

Note:


1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit - Corrected. Amplitude

**Low Channel: 5745MHz**

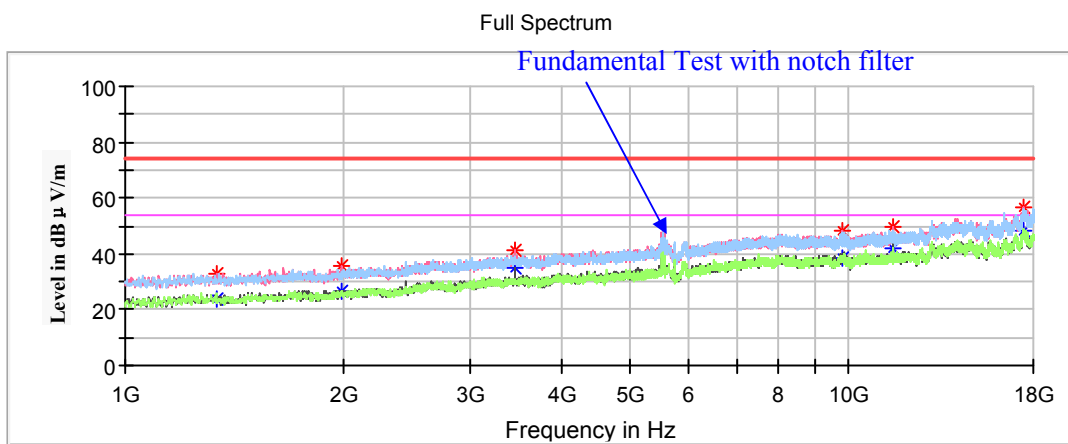


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1336.60	---	24.11	200	V	309.0	-17.2	54.00	29.89
1336.60	32.83	---	200	V	309.0	-17.2	74.00	41.17
1996.20	35.37	---	150	V	233.0	-14.5	68.20	32.83
3454.80	41.34	---	200	V	296.0	-8.9	68.20	26.86
9780.50	48.54	---	150	V	90.0	2.0	68.20	19.66
11492.40	49.87	---	150	V	25.0	2.8	74.00	24.13
11492.40	---	42.06	150	V	25.0	2.8	54.00	11.94
17498.50	56.54	---	200	V	104.0	8.9	68.20	11.66

**Middle Channel: 5785MHz**

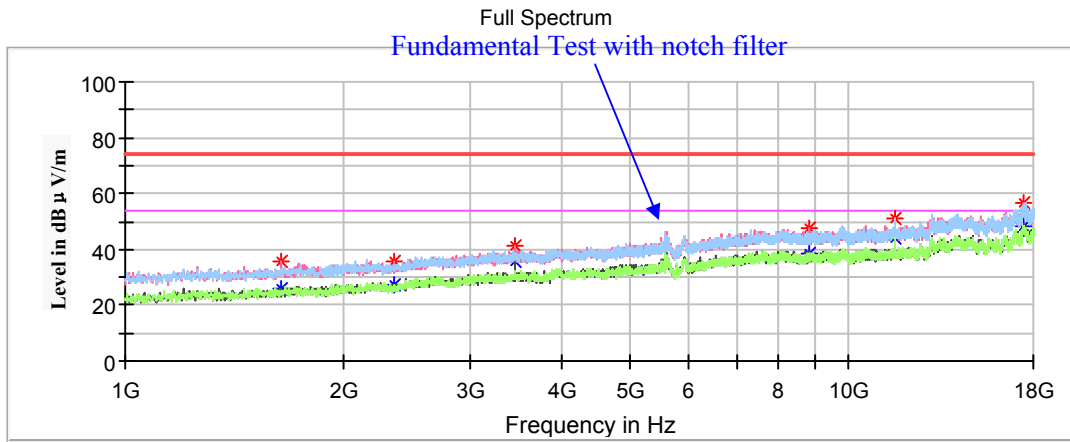

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1642.60	35.50	---	200	V	4.0	-15.8	68.20	32.70
2358.30	---	26.93	150	H	75.0	-13.0	54.00	27.07
2358.30	35.48	---	150	H	75.0	-13.0	74.00	38.52
3454.80	41.34	---	200	V	311.0	-8.9	68.20	26.86
8831.90	47.44	---	150	V	77.0	1.7	68.20	20.76
11570.60	---	43.87	200	V	311.0	2.9	54.00	10.13
11570.60	50.81	---	200	V	311.0	2.9	74.00	23.19
17491.70	56.34	---	150	V	273.0	8.9	68.20	11.86

**High Channel: 5825MHz**

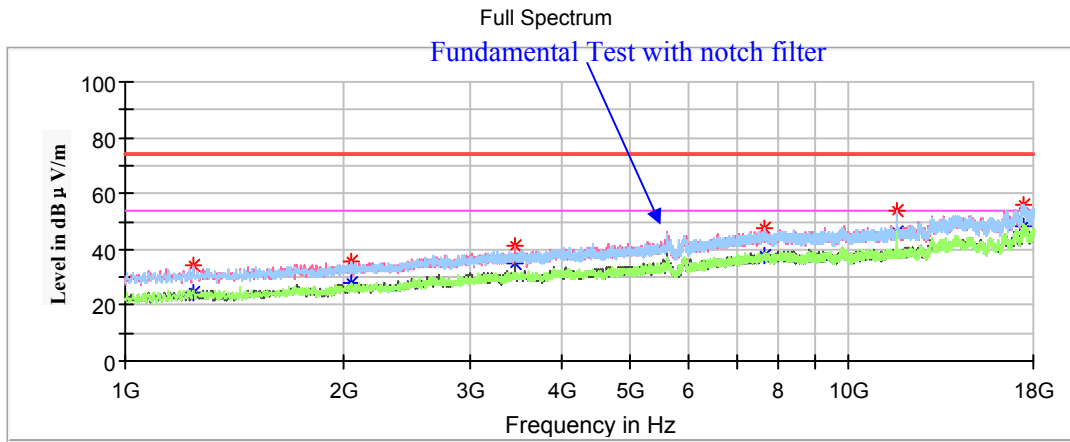

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1243.10	34.06	---	200	V	303.0	-17.8	68.20	34.14
2059.10	35.94	---	150	H	20.0	-14.2	68.20	32.26
3454.80	41.04	---	150	V	316.0	-8.9	68.20	27.16
7660.60	---	37.80	200	V	239.0	1.3	54.00	16.20
7660.60	47.52	---	200	V	239.0	1.3	74.00	26.48
11652.20	---	46.07	200	H	318.0	3.1	54.00	7.93
11652.20	53.53	---	200	H	318.0	3.1	74.00	20.47
17474.70	56.06	---	150	H	238.0	8.8	68.20	12.14




**802.11ac20 Mode:**

(Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation was recorded.)

Note:


1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit - Corrected. Amplitude

**Low Channel: 5745MHz**

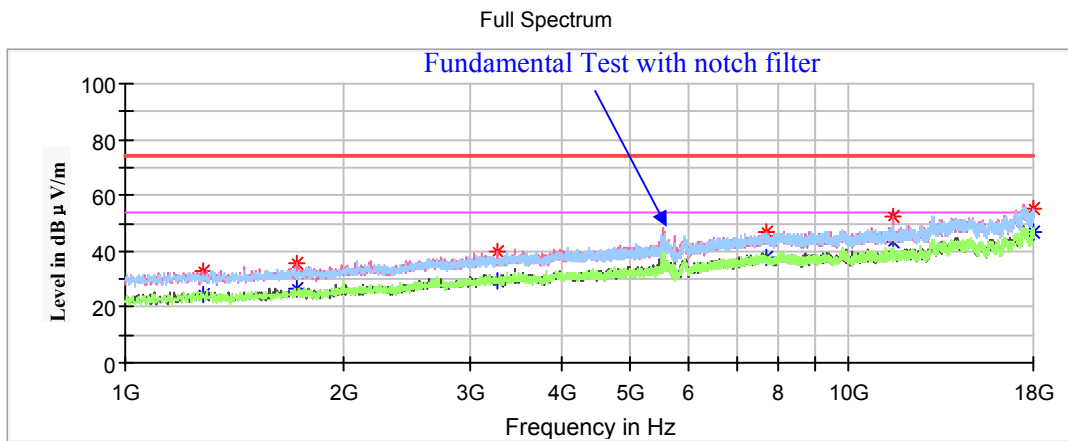


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1278.80	33.10	---	150	V	149.0	-17.6	68.20	35.10
1729.30	35.41	---	150	V	315.0	-15.5	68.20	32.79
3272.90	39.51	---	150	V	109.0	-9.4	68.20	28.69
7674.20	---	37.65	200	V	357.0	1.3	54.00	16.35
7674.20	46.51	---	200	V	357.0	1.3	74.00	27.49
11492.40	---	43.36	150	V	18.0	2.8	54.00	10.64
11492.40	52.38	---	150	V	18.0	2.8	74.00	21.62
17952.40	---	46.51	150	H	127.0	8.8	54.00	7.49
17952.40	55.15	---	150	H	127.0	8.8	74.00	18.85

**Middle Channel: 5785MHz**

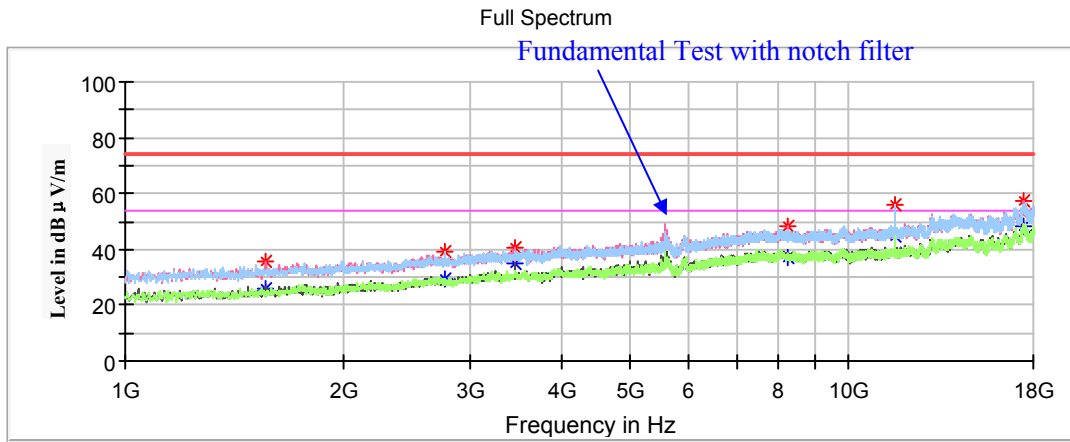

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1567.80	---	25.95	200	V	269.0	-16.1	54.00	28.05
1567.80	35.68	---	200	V	269.0	-16.1	74.00	38.32
2769.70	---	29.35	200	H	223.0	-11.2	54.00	24.65
2769.70	38.88	---	200	H	223.0	-11.2	74.00	35.12
3454.80	40.57	---	150	V	303.0	-8.9	68.20	27.63
8219.90	---	37.34	200	V	176.0	1.6	54.00	16.66
8219.90	47.92	---	200	V	176.0	1.6	74.00	26.08
11568.90	---	44.76	150	H	50.0	2.9	54.00	9.24
11568.90	55.84	---	150	H	122.0	2.9	74.00	18.16
17496.80	57.02	---	150	V	316.0	8.9	68.20	11.18

**High Channel: 5825MHz**

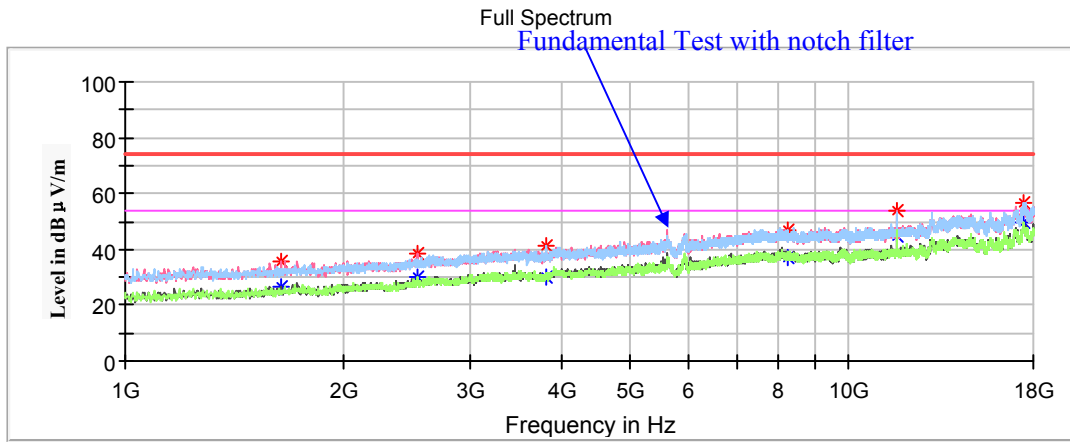

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1644.30	36.00	---	150	V	283.0	-15.8	68.20	32.20
2536.80	38.55	---	200	V	123.0	-12.2	68.20	29.65
3810.10	---	30.29	200	H	170.0	-7.7	54.00	23.71
3810.10	40.93	---	200	H	170.0	-7.7	74.00	33.07
8225.00	---	37.00	200	V	170.0	1.6	54.00	17.00
8225.00	47.14	---	200	H	170.0	1.6	74.00	26.86
11652.20	---	44.70	150	V	323.0	3.1	54.00	9.30
11652.20	53.55	---	150	V	50.0	3.1	74.00	20.45
17484.90	56.48	---	150	H	3.0	8.8	68.20	11.72


**802.11n-HT20 Mode:**

*Pre-scan with X,Y and Z axes of orientation, the worst case Y-axis of orientation was recorded*

Note:


1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit - Corrected. Amplitude

**Low Channel: 5745MHz**

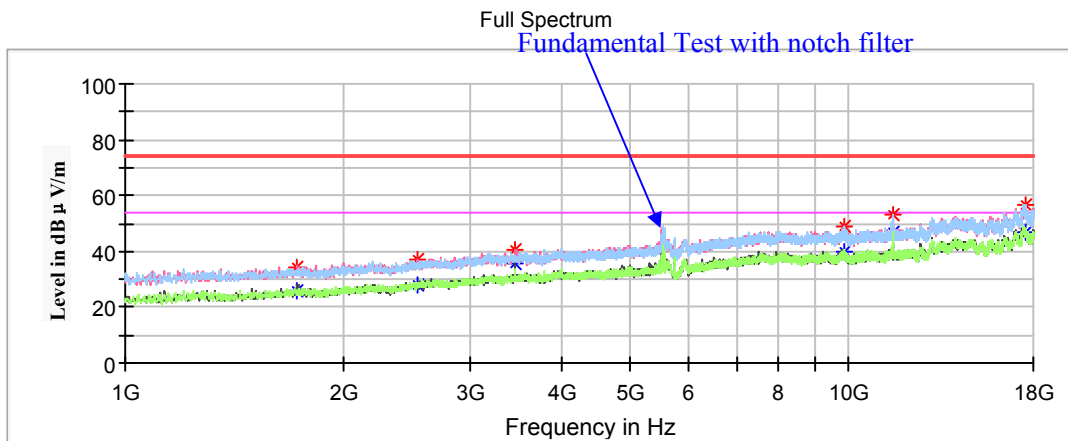


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1727.60	34.57	---	150	V	90.0	-15.5	68.20	33.63
2530.00	37.22	---	150	V	143.0	-12.3	68.20	30.98
3454.80	40.40	---	150	V	307.0	-8.9	68.20	27.80
9836.60	48.95	---	200	H	321.0	2.0	68.20	19.25
11489.00	---	46.58	200	H	321.0	2.8	54.00	7.42
11489.00	53.24	---	200	H	321.0	2.8	74.00	20.76
17508.70	56.64	---	150	H	128.0	8.9	68.20	11.56

**Middle Channel: 5785MHz**

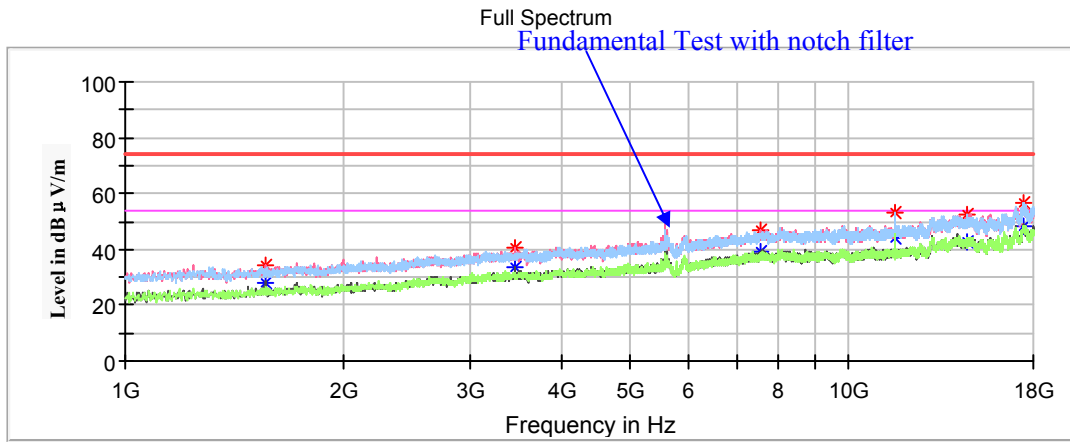

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1564.40	34.52	---	150	V	289.0	-16.1	74.00	39.48
1564.40	---	27.98	150	V	289.0	-16.1	54.00	26.02
3454.80	40.30	---	200	V	265.0	-8.9	68.20	27.90
7565.40	46.86	---	150	V	340.0	1.1	74.00	27.14
7565.40	---	38.92	150	V	340.0	1.1	54.00	15.08
11574.00	52.92	---	150	H	111.0	3.0	74.00	21.08
11574.00	---	44.24	150	H	111.0	3.0	54.00	9.76
14601.70	52.29	---	200	H	0.0	6.2	68.20	15.91
17495.10	56.93	---	150	H	111.0	8.9	68.20	11.27

**High Channel: 5825MHz**

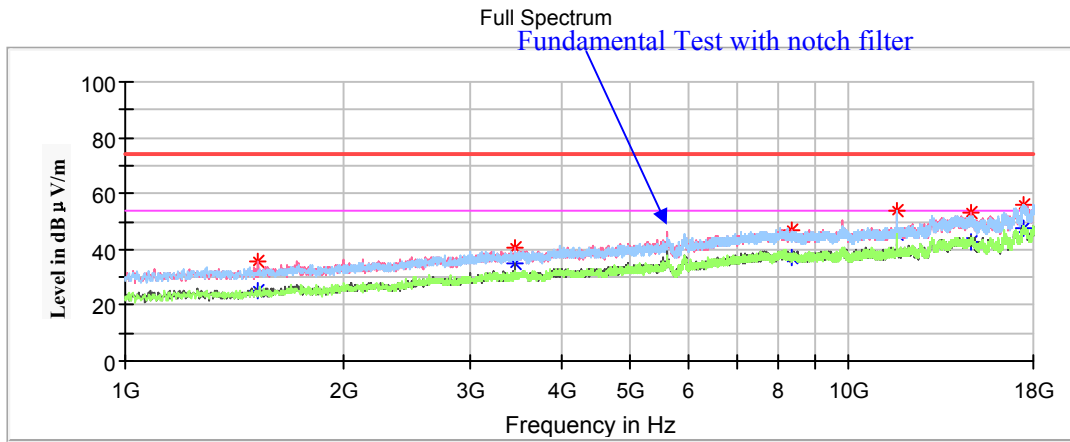

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1528.70	---	25.19	150	V	281.0	-16.3	54.00	28.81
1528.70	35.55	---	150	V	281.0	-16.3	74.00	38.45
3454.80	40.56	---	200	V	309.0	-8.9	68.20	27.64
8345.70	---	37.28	150	H	85.0	1.5	54.00	16.72
8345.70	47.13	---	150	H	85.0	1.5	74.00	26.87
11652.20	53.83	---	200	H	307.0	3.1	74.00	20.17
11652.20	---	45.14	200	H	307.0	3.1	54.00	8.86
14771.70	52.88	---	150	V	205.0	5.8	68.20	15.32
17427.10	56.15	---	200	H	242.0	8.6	68.20	12.05


**802.11ac40 Mode:**

(Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation was recorded.)

Note:

1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit - Corrected. Amplitude


**Low Channel: 5755MHz**

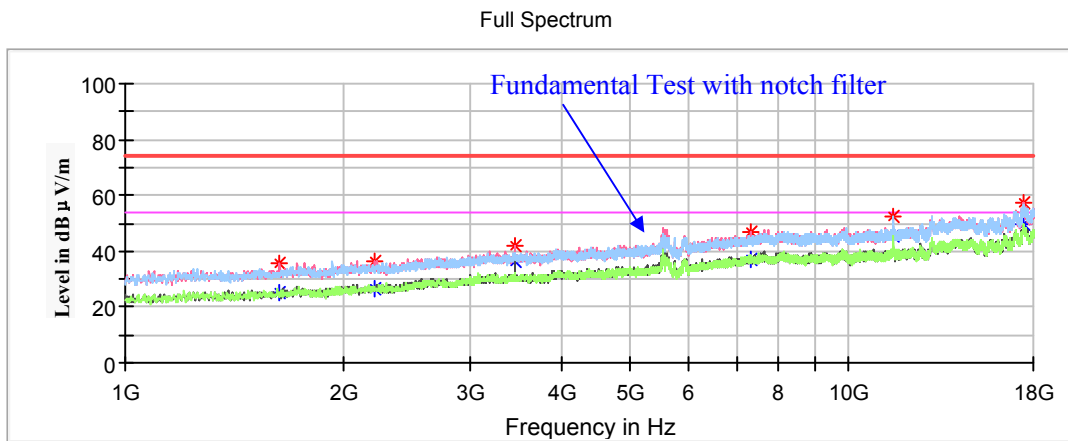

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1635.80	35.39	---	200	V	309.0	-15.8	68.20	32.81
2207.00	---	26.77	150	V	129.0	-13.6	54.00	27.23
2207.00	36.24	---	150	V	129.0	-13.6	74.00	37.76
3454.80	42.30	---	200	V	309.0	-8.9	68.20	25.90
7327.40	---	36.91	150	V	354.0	0.7	54.00	17.09
7327.40	47.16	---	150	V	354.0	0.7	74.00	26.84
11506.00	---	45.20	200	H	314.0	2.8	54.00	8.80
11506.00	52.39	---	200	H	314.0	2.8	74.00	21.61
17478.10	57.54	---	150	V	258.0	8.8	68.20	10.66

**High Channel: 5795MHz**

Full Spectrum

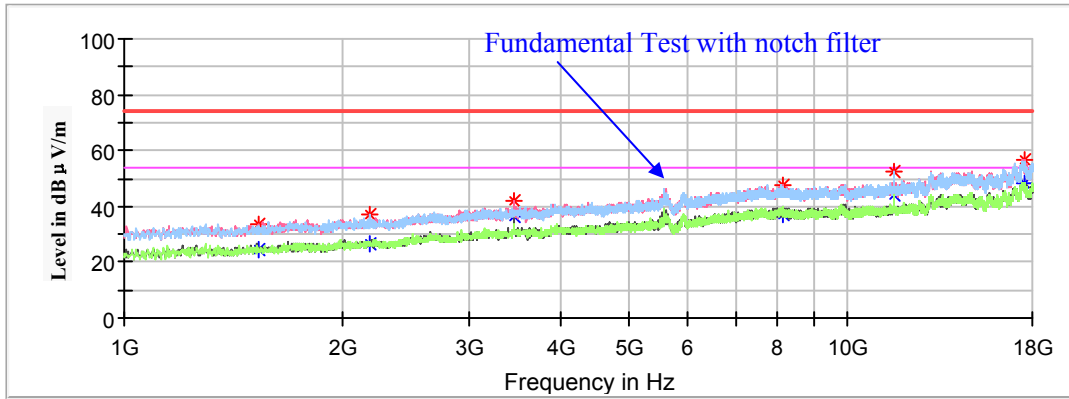

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1530.40	---	24.44	200	H	339.0	-16.2	54.00	29.56
1530.40	33.82	---	200	H	339.0	-16.2	74.00	40.18
2190.00	36.95	---	200	H	212.0	-13.7	68.20	31.25
3454.80	41.66	---	200	V	310.0	-8.9	68.20	26.54
8150.20	---	36.95	150	H	91.0	1.7	54.00	17.05
8150.20	47.60	---	150	H	91.0	1.7	74.00	26.40
11584.20	---	44.15	200	H	314.0	3.0	54.00	9.85
11584.20	52.78	---	200	H	314.0	3.0	74.00	21.22
17559.70	56.97	---	150	V	41.0	8.9	68.20	11.23




**802.11n-HT40 Mode:**

*Pre-scan with X,Y and Z axes of orientation, the worst case Y-axis of orientation was recorded*

Note:

1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit - Corrected. Amplitude


**Low Channel: 5755MHz**

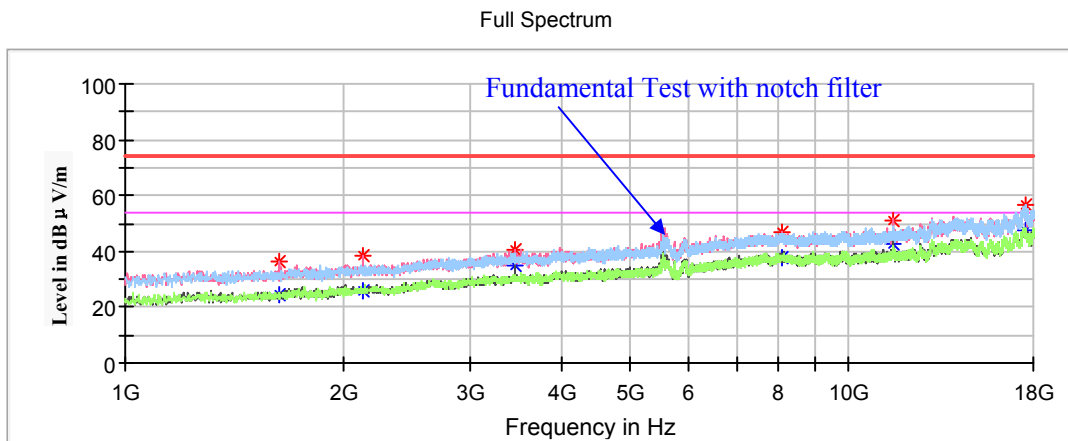

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1629.00	36.41	---	150	V	289.0	-15.9	68.20	31.79
2128.80	38.35	---	200	V	301.0	-13.9	68.20	29.85
3454.80	40.63	---	150	V	314.0	-8.9	68.20	27.57
8072.00	---	37.90	200	H	101.0	1.7	54.00	16.10
8072.00	46.56	---	200	H	101.0	1.7	74.00	27.44
11511.10	---	42.94	150	V	55.0	2.8	54.00	11.06
11511.10	51.26	---	150	V	55.0	2.8	74.00	22.74
17569.90	56.32	---	150	H	51.0	8.9	68.20	11.88

**Middle Channel: 5795MHz**

Full Spectrum

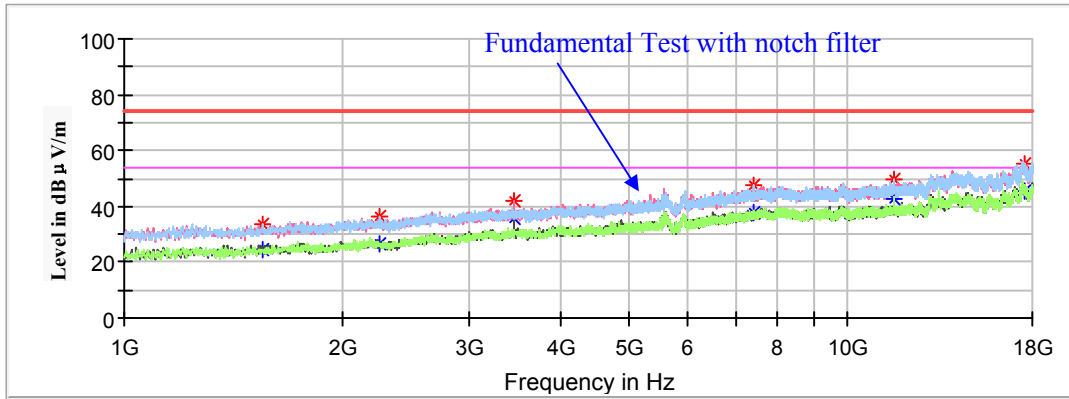

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1550.80	33.53	---	200	H	309.0	-16.2	74.00	40.47
1550.80	---	24.62	200	H	309.0	-16.2	54.00	29.38
2259.70	---	26.34	150	H	352.0	-13.4	54.00	27.66
2259.70	36.32	---	150	H	352.0	-13.4	74.00	37.68
3454.80	41.63	---	200	V	304.0	-8.9	68.20	26.57
7427.70	---	37.70	150	V	69.0	0.9	54.00	16.30
7427.70	47.67	---	150	V	69.0	0.9	74.00	26.33
11597.80	---	42.82	200	H	323.0	3.0	54.00	11.18
11597.80	49.50	---	200	H	323.0	3.0	74.00	24.50
17522.30	55.54	---	150	V	149.0	8.9	68.20	12.66


**802.11ac80 Mode:**

*Pre-scan with X,Y and Z axes of orientation, the worst case Y-axis of orientation was recorded*

Note:

1. This test was performed with the 5725-5850MHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit - Corrected. Amplitude

**Low Channel: 5775MHz**

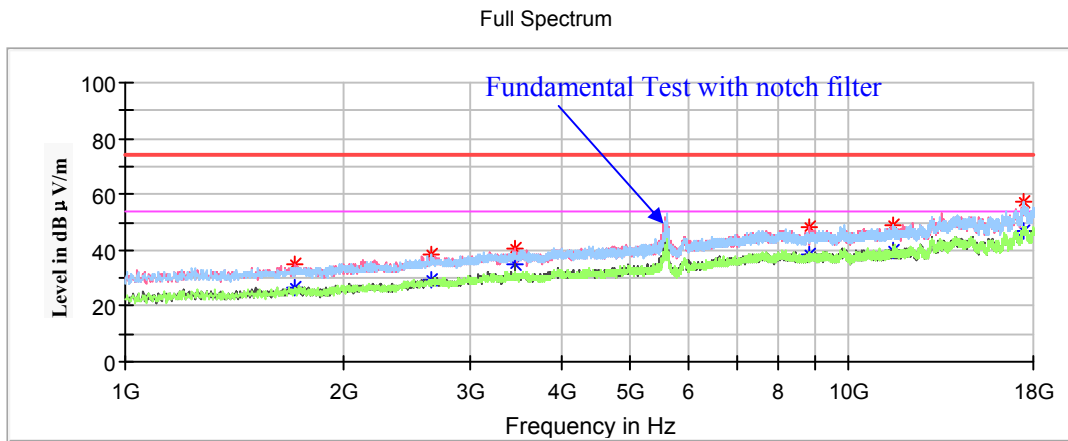


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
1719.10	---	26.36	150	V	308.0	-15.5	54.00	27.64
1719.10	34.90	---	150	V	308.0	-15.5	74.00	39.10
2647.30	38.38	---	200	H	276.0	-11.7	68.20	29.82
3454.80	40.68	---	200	V	310.0	-8.9	68.20	27.52
8842.10	48.02	---	200	V	230.0	1.7	68.20	20.18
11540.00	---	39.79	200	H	302.0	2.9	54.00	14.21
11540.00	48.87	---	200	H	302.0	2.9	74.00	25.13
17467.90	57.10	---	200	H	213.0	8.8	68.20	11.10

**18GHz-40GHz(5150-5250MHz Band):**


Pre-scan with 802.11a, 802.11ac20, 802.11n-HT20, 802.11ac40, 802.11n-HT40 and 802.11 ac80 modes of operation in the X,Y and Z axes of orientation, the worst case 802.11n-HT20 mode low channel in Y-axis of orientation was recorded

**Horizontal**

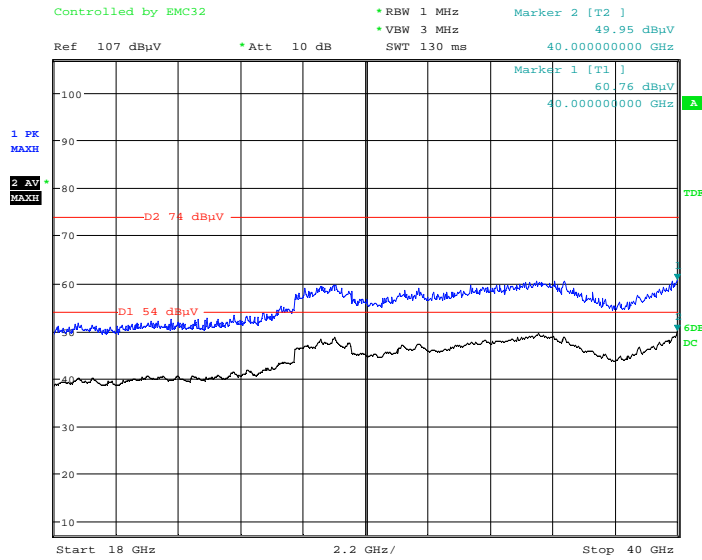

Date: 22.OCT.2020 22:29:05

**Vertical**

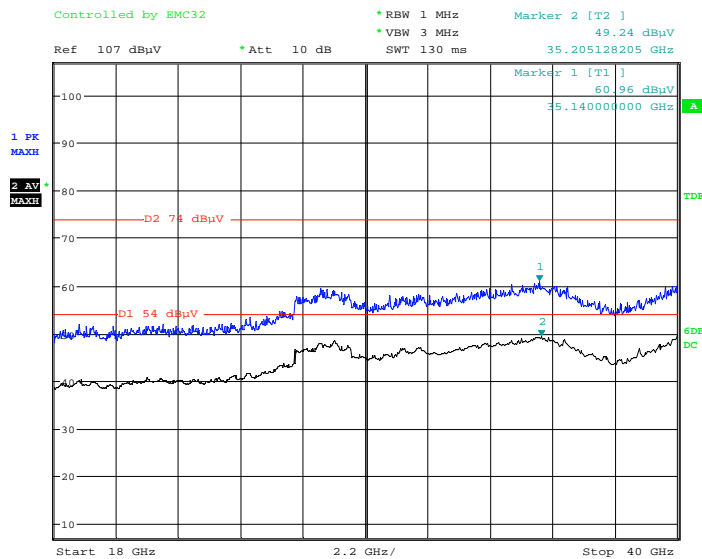


Date: 22.OCT.2020 22:39:30

**18GHz-40GHz(5725-5850MHz Band):**


Pre-scan with 802.11a, 802.11ac20, 802.11n-HT20, 802.11ac40, 802.11n-HT40 and 802.11 ac80 modes of operation in the X,Y and Z axes of orientation, the worst case 802.11ac20 mode low channel in Y-axis of orientation was recorded

**Horizontal**

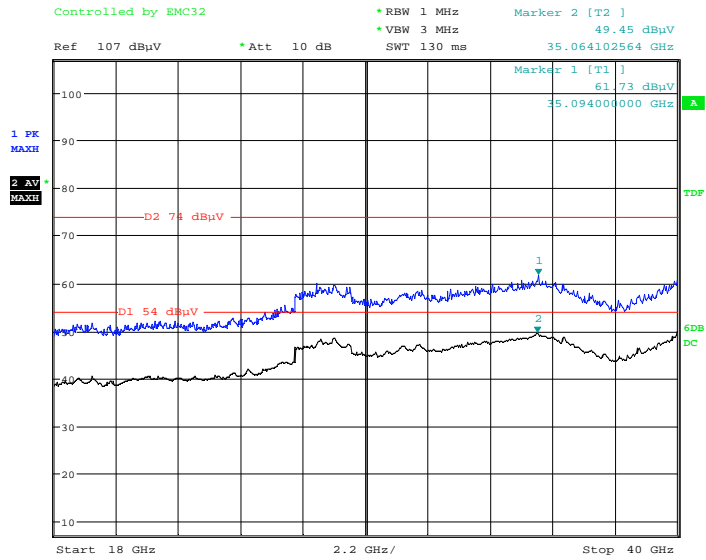

Date: 22.OCT.2020 22:58:44

**Vertical**

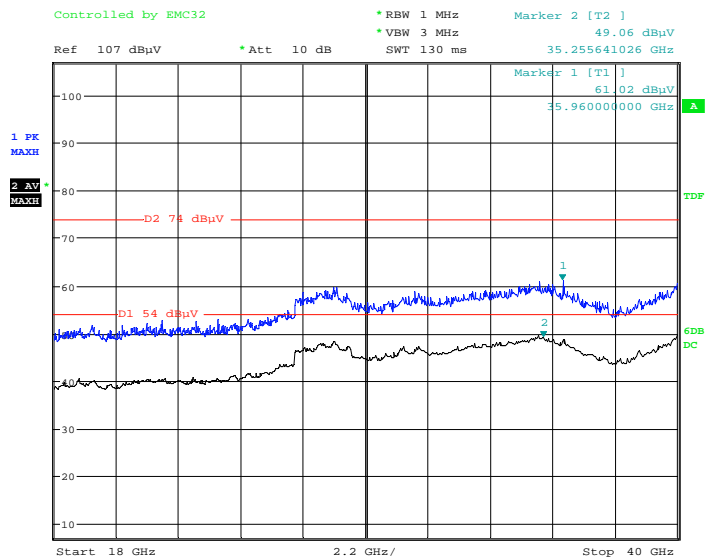

Date: 22.OCT.2020 22:10:25

**Restricted Bands Emissions Test (5150-5250MHz Band):**

Note:

1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
2. Corrected Amplitude = Corrected Factor + Reading
3. Margin = Limit - Corrected. Amplitude

**802.11a Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5180MHz								
5150.00	54.34	---	150.0	V	11.0	5.2	74.00	19.66
5150.00	---	50.31	150.0	V	11.0	5.2	54.00	3.69
High Channel: 5240MHz								
5350.00	54.82	---	150.0	V	359.0	5.7	74.00	19.18
5350.00	---	50.46	150.0	V	359.0	5.7	54.00	3.54

**802.11ac20 Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5180MHz								
5150.00	52.92	---	200.0	V	93.0	5.2	74.00	21.08
5150.00	---	50.47	200.0	V	93.0	5.2	54.00	3.53
High Channel: 5240MHz								
5350.00	54.42	---	150.0	V	143.0	5.7	74.00	19.58
5350.00	---	51.62	150.0	V	143.0	5.7	54.00	2.38

**802.11n-HT20 Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5180MHz								
5150.00	53.58	---	150.0	V	15.0	5.2	74.00	20.42
5150.00	---	50.40	150.0	V	15.0	5.2	54.00	3.60
High Channel: 5240MHz								
5350.00	53.43	---	150.0	V	189.0	5.7	74.00	20.57
5350.00	---	50.21	150.0	V	189.0	5.7	54.00	3.79

**802.11ac40 Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5190MHz								
5150.00	53.98	---	200.0	V	270.0	5.2	74.00	20.02
5150.00	---	50.64	200.0	V	270.0	5.2	54.00	3.36
High Channel: 5230MHz								
5350.00	53.06	---	150.0	V	40.0	5.7	74.00	20.94
5350.00	---	51.06	150.0	V	40.0	5.7	54.00	2.94

**802.11n-HT40 Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5190MHz								
5150.00	53.62	---	200.0	V	0.0	5.2	74.00	20.38
5150.00	---	50.42	200.0	V	0.0	5.2	54.00	3.58
High Channel: 5230MHz								
5350.00	54.17	---	150.0	H	357.0	5.7	74.00	19.83
5350.00	---	51.05	150.0	H	357.0	5.7	54.00	2.95

**802.11ac80 Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Channel: 5210MHz								
5150.00	54.45	---	200.0	V	2.0	5.2	74.00	19.55
5150.00	---	50.32	150.0	V	2.0	5.2	54.00	3.68
5350.00	53.11	---	150.0	V	136.0	5.7	74.00	20.89
5350.00	---	51.10	200.0	V	136.0	5.7	54.00	2.90

**Restricted Bands Emissions Test (5725-5850MHz Band):**

Note:

1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
2. Corrected Amplitude = Corrected Factor + Reading
3. Margin = Limit - Corrected. Amplitude

**802.11a Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5745MHz								
5650.00	54.77	---	200.0	H	238.0	6.4	68.2	13.43
5700.00	60.02	---	150.0	H	301.0	6.5	105.2	45.18
5720.00	68.97	---	150.0	V	0.0	6.5	110.8	41.83
5725.00	81.17	---	150.0	V	28.0	6.5	122.2	41.03
High Channel: 5825MHz								
5850.00	72.06	---	150.0	V	0.0	6.7	122.2	50.14
5855.00	64.81	---	200.0	V	3.0	6.7	110.8	45.99
5875.00	58.05	---	150.0	V	128.0	6.8	105.2	47.15
5925.00	55.26	---	200.0	H	39.0	6.9	68.2	12.94

**802.11ac20 Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5745MHz								
5650.00	53.28	---	200.0	H	41.0	6.4	68.2	14.92
5700.00	60.52	---	200.0	V	112.0	6.5	105.2	44.68
5720.00	73.17	---	200.0	V	94.0	6.5	110.8	37.63
5725.00	83.52	---	200.0	V	94.0	6.5	122.2	38.68
High Channel: 5825MHz								
5850.00	72.93	---	150.0	V	121.0	6.7	122.2	49.27
5855.00	69.82	---	150.0	V	358.0	6.7	110.8	40.98
5875.00	57.45	---	200.0	V	57.0	6.8	105.2	47.75
5925.00	55.05	---	200.0	H	71.0	6.9	68.2	13.15



**802.11n-HT20 Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5745MHz								
5650.00	53.99	---	150.0	H	322.0	6.4	68.2	14.21
5700.00	58.33	---	200.0	V	113.0	6.5	105.2	46.87
5720.00	74.13	---	150.0	V	77.0	6.5	110.8	36.67
5725.00	80.73	---	150.0	V	113.0	6.5	122.2	41.47
High Channel: 5825MHz								
5850.00	74.08	---	150.0	V	96.0	6.7	122.2	48.12
5855.00	68.27	---	200.0	V	2.0	6.7	110.8	42.53
5875.00	56.16	---	150.0	V	194.0	6.8	105.2	49.04
5925.00	54.19	---	150.0	V	0.0	6.9	68.2	14.01

**802.11ac40 Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV/m)	Average (dBµV/m)	Height (cm)	Polar (H/V)				
Low Channel: 5755MHz								
5650.00	56.96	---	200.0	V	39.0	6.4	68.2	11.24
5700.00	67.51	---	150.0	H	56.0	6.5	105.2	37.69
5720.00	82.30	---	150.0	V	39.0	6.5	110.8	28.50
5725.00	82.31	---	150.0	H	155.0	6.5	122.2	39.89
High Channel: 5795MHz								
5850.00	66.33	---	150.0	V	119.0	6.7	122.2	55.87
5855.00	64.18	---	200.0	V	83.0	6.7	110.8	46.62
5875.00	59.18	---	150.0	H	64.0	6.8	105.2	46.02
5925.00	54.70	---	150.0	H	128.0	6.9	68.2	13.50

**802.11n-HT40 Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case in X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Height (cm)	Polar (H/V)				
Low Channel: 5755MHz								
5650.00	56.06	---	200.0	V	87.0	6.4	68.2	12.14
5700.00	65.32	---	150.0	V	87.0	6.5	105.2	39.88
5720.00	79.63	---	150.0	H	147.0	6.5	110.8	31.17
5725.00	83.38	---	150.0	V	87.0	6.5	122.2	38.82
High Channel: 5795MHz								
5850.00	69.63	---	150.0	V	69.0	6.7	122.2	52.57
5855.00	65.00	---	150.0	V	69.0	6.7	110.8	45.80
5875.00	61.11	---	200.0	V	69.0	6.8	105.2	44.09
5925.00	55.62	---	150.0	V	110.0	6.9	68.2	12.58

**802.11ac80 Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Correct Factor (dB/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Height (cm)	Polar (H/V)				
Channel: 5775MHz								
5650.00	56.85	---	150.0	H	160.0	6.4	68.2	11.35
5700.00	72.15	---	200.0	V	97.0	6.5	105.2	33.05
5720.00	79.30	---	150.0	V	57.0	6.5	110.8	31.50
5725.00	74.45	---	150.0	H	160.0	6.5	122.2	47.75
5850.00	72.64	---	150.0	V	57.0	6.7	122.2	49.56
5855.00	67.74	---	150.0	V	305.0	6.7	110.8	43.06
5875.00	61.83	---	200.0	V	57.0	6.8	105.2	43.37
5925.00	55.31	---	150.0	V	244.0	6.9	68.2	12.89

## **FCC §15.407(a) & §15.407(e)–EMISSION BANDWIDTH**

### **Applicable Standard**

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz band is made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### **Test Procedure**


#### **1. Emission Bandwidth (EBW)**

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### **2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz**

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	23.0~23.4°C
<b>Relative Humidity:</b>	48~54 %
<b>ATM Pressure:</b>	100.9~101.3 kPa

The testing was performed by CK Huang from 2020-10-15 to 2020-12-20.

**Test Result:** Compliant

5150-5250 MHz:

Test mode	Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11a	Low	5180	23.09	17.47
	Middle	5200	23.09	17.39
	High	5240	23.41	17.39
802.11ac20	Low	5180	22.61	18.20
	Middle	5200	22.53	18.28
	High	5240	22.53	18.28
802.11n-HT20	Low	5180	23.17	18.36
	Middle	5200	23.01	18.36
	High	5240	25.09	18.44
802.11ac40	Low	5190	44.61	36.55
	High	5230	43.53	36.55
802.11n-HT40	Low	5190	43.89	36.43
	High	5230	44.49	36.43
802.11ac80	/	5210	85.37	75.03


5725-5850MHz:

Test mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
802.11a	Low	5745	16.473	18.096	$\geq 0.5$
	Middle	5785	16.413	17.735	$\geq 0.5$
	High	5825	16.413	17.976	$\geq 0.5$
802.11ac20	Low	5745	17.615	18.637	$\geq 0.5$
	Middle	5785	17.675	18.577	$\geq 0.5$
	High	5825	17.615	18.697	$\geq 0.5$
802.11n-HT20	Low	5745	17.675	18.878	$\geq 0.5$
	Middle	5785	17.675	18.637	$\geq 0.5$
	High	5825	17.615	18.697	$\geq 0.5$
802.11ac40	Low	5755	35.711	36.794	$\geq 0.5$
	High	5795	35.591	36.794	$\geq 0.5$
802.11n-HT40	Low	5755	35.832	36.794	$\geq 0.5$
	High	5795	35.952	36.794	$\geq 0.5$
802.11ac80	/	5775	75.271	75.271	$\geq 0.5$


5150-5250 MHz Band:

26 Bandwidth & 99% Occupied Bandwidth


802.11a mode, 5180MHz

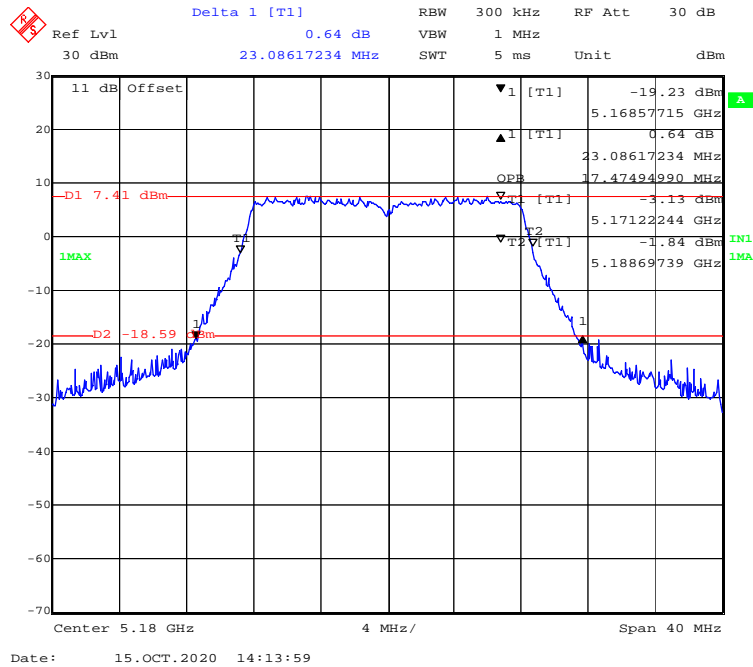


802.11a mode, 5200MHz

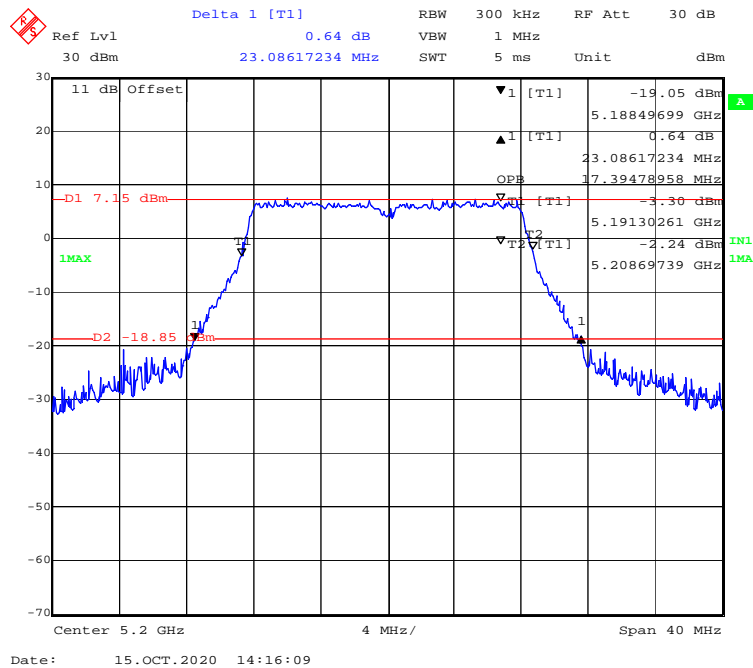


**802.11a mode, 5240MHz**

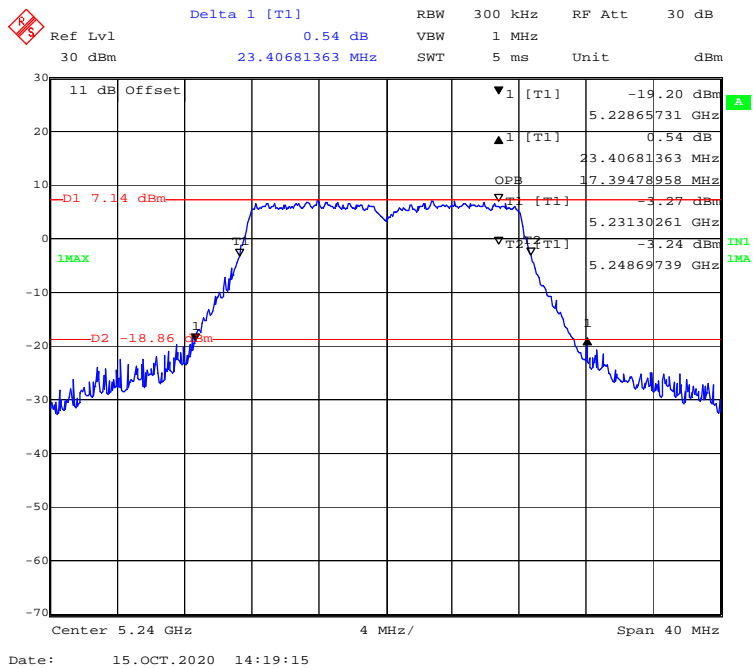


**802.11ac20 mode, 5180MHz**

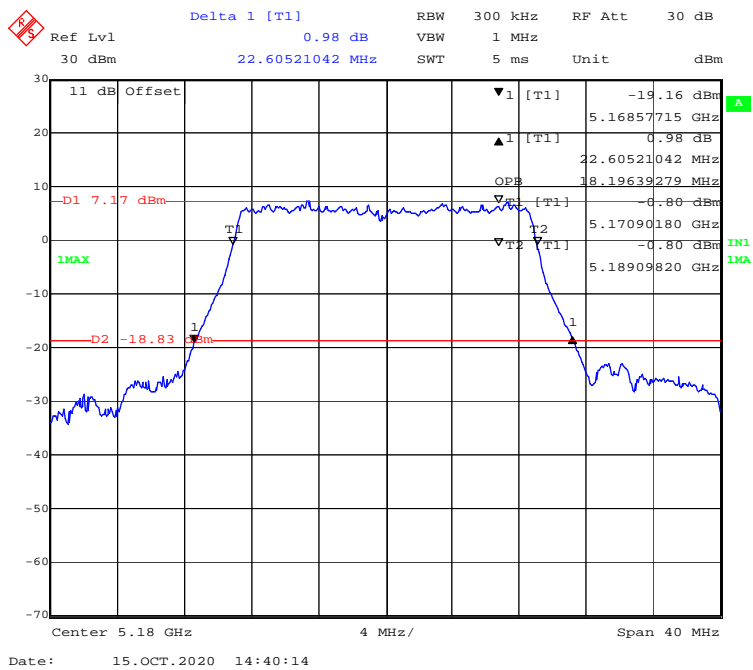

802.11ac20 mode, 5200MHz

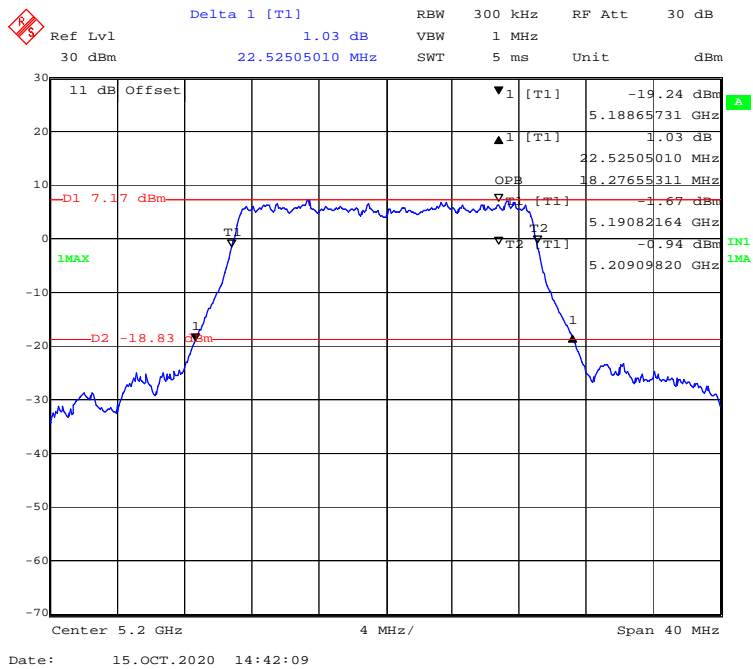


802.11ac20 mode, 5240MHz

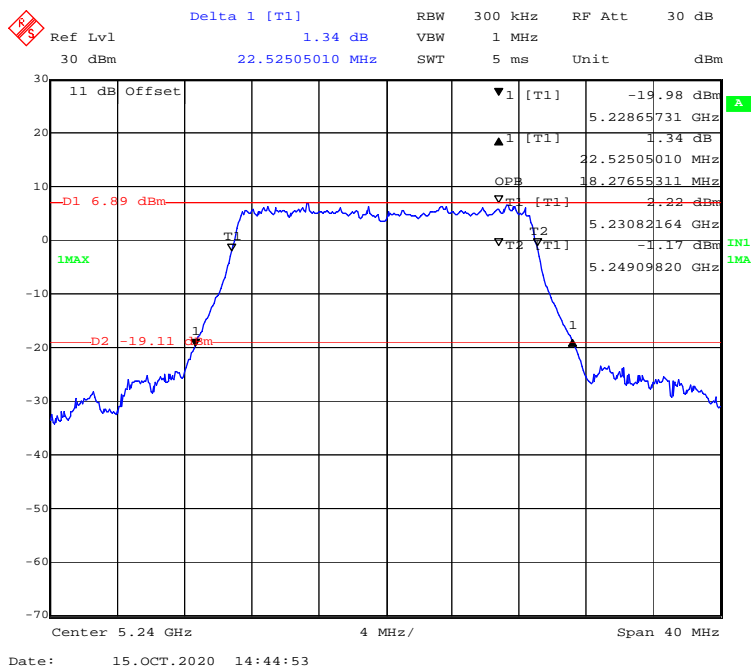





802.11n-HT20 mode, 5180MHz

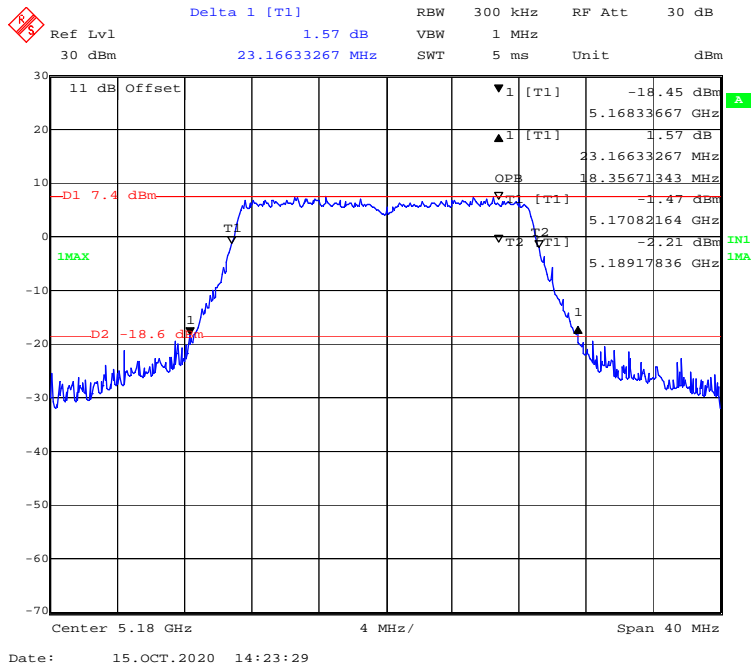


802.11n-HT20 mode, 5200MHz

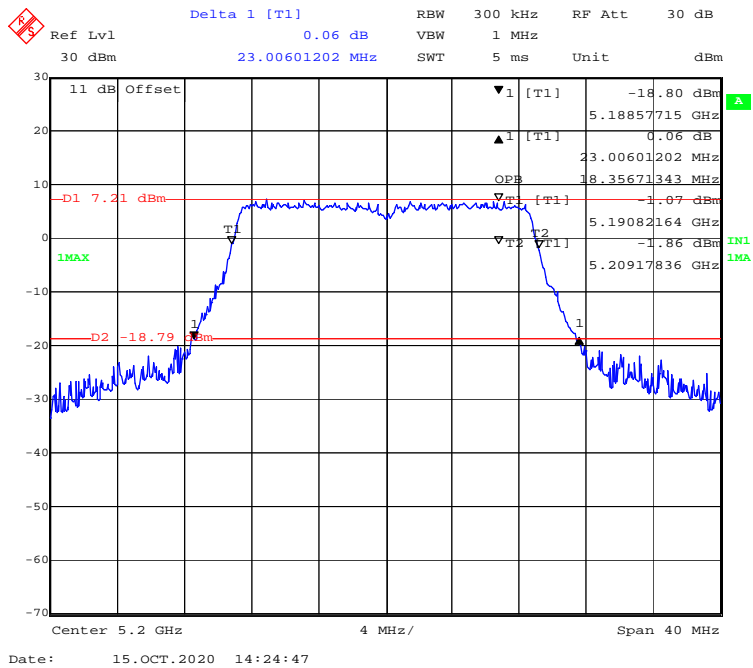


**802.11n-HT20 mode, 5240MHz**

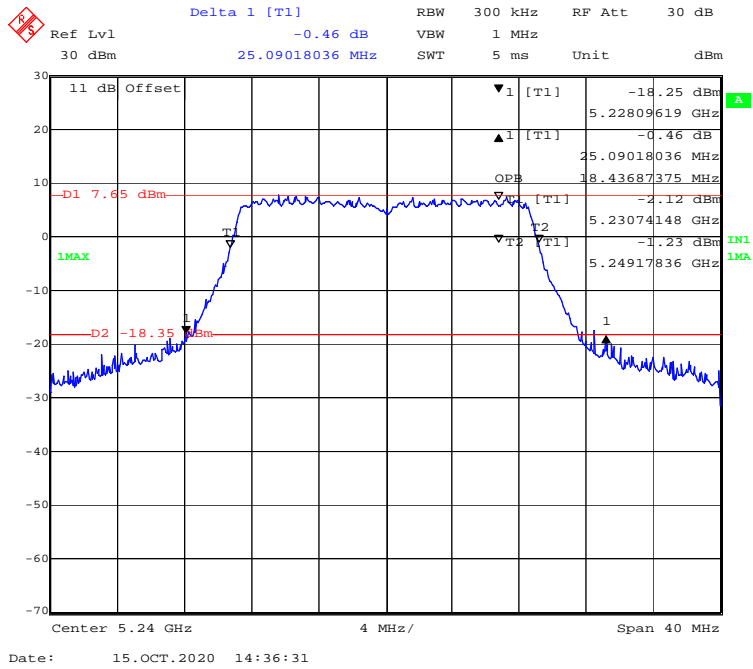


**802.11ac40 mode, 5190MHz**

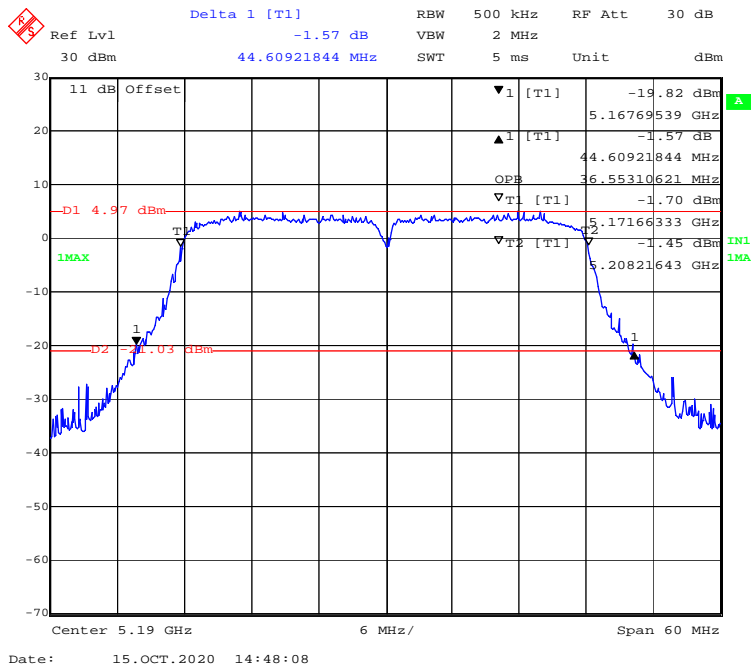


**802.11ac40 mode, 5230MHz**

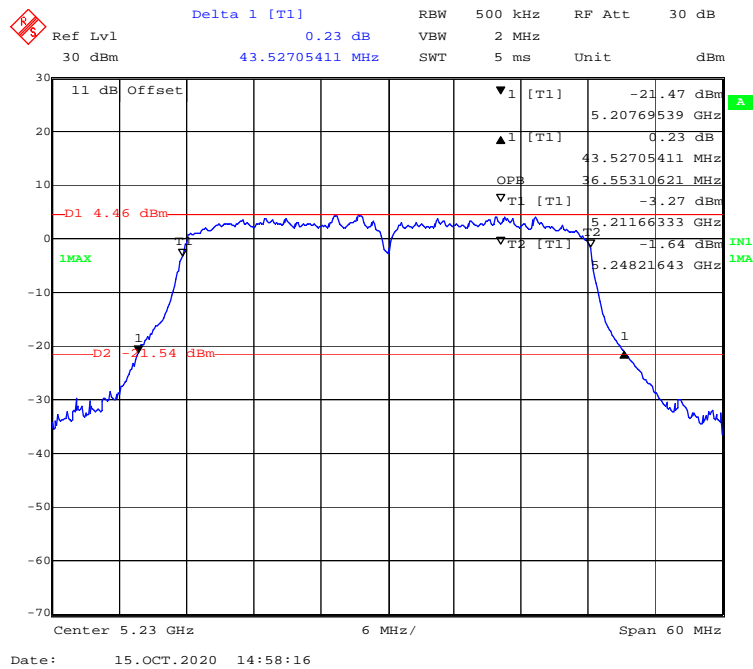


**802.11n-HT40 mode, 5190MHz**

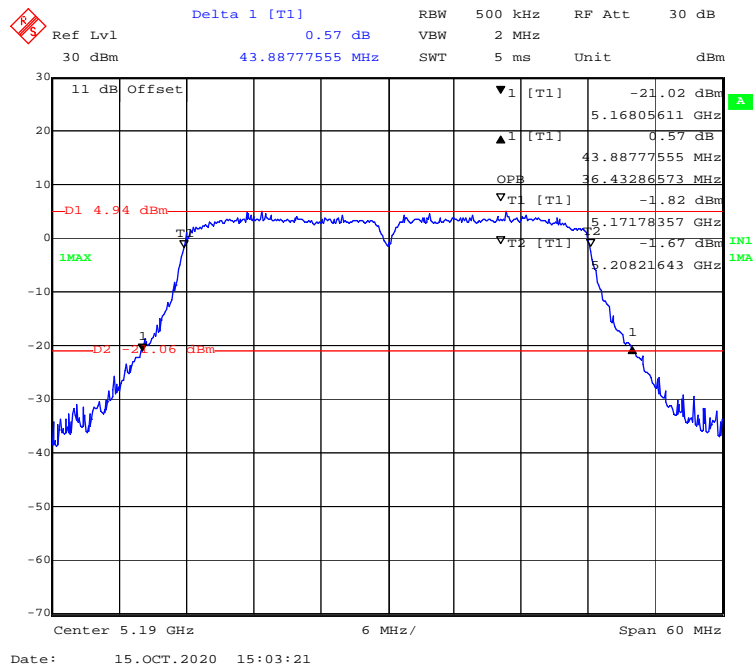

**802.11n-HT40 mode, 5230MHz**

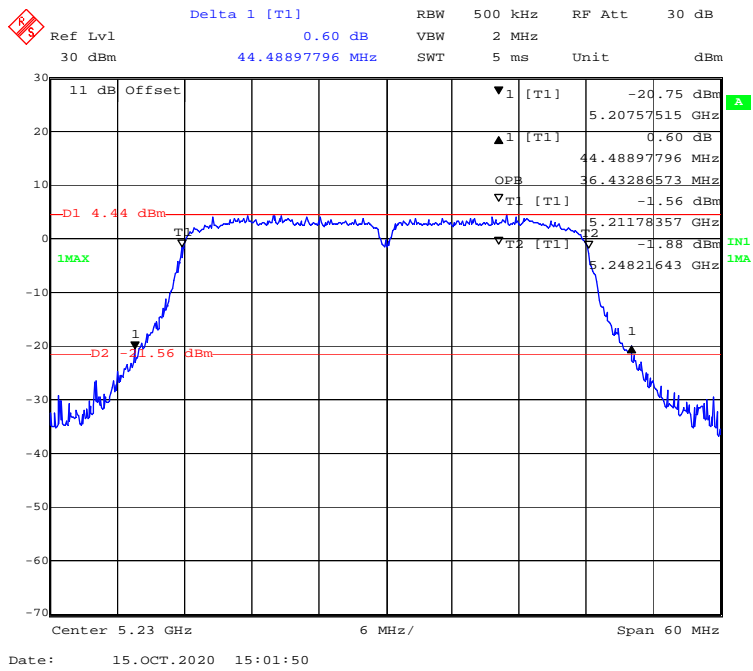


**802.11ac80 mode, 5210MHz**

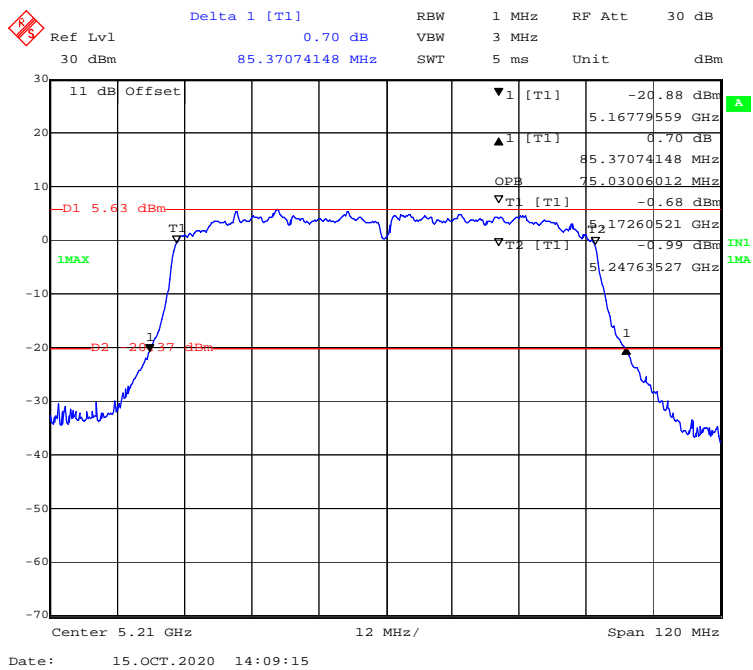


5725-5850 MHz Band

6dB Bandwidth


802.11a mode, 5745MHz

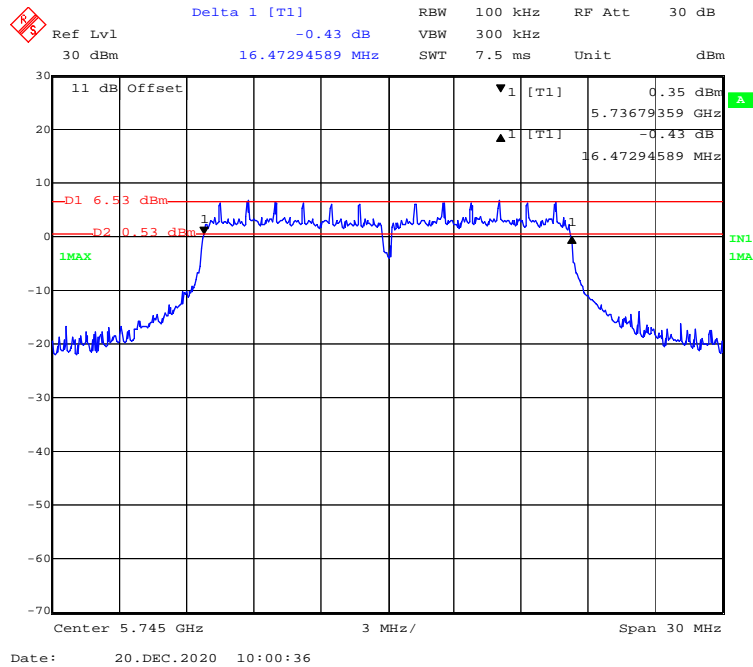


802.11a mode, 5785MHz

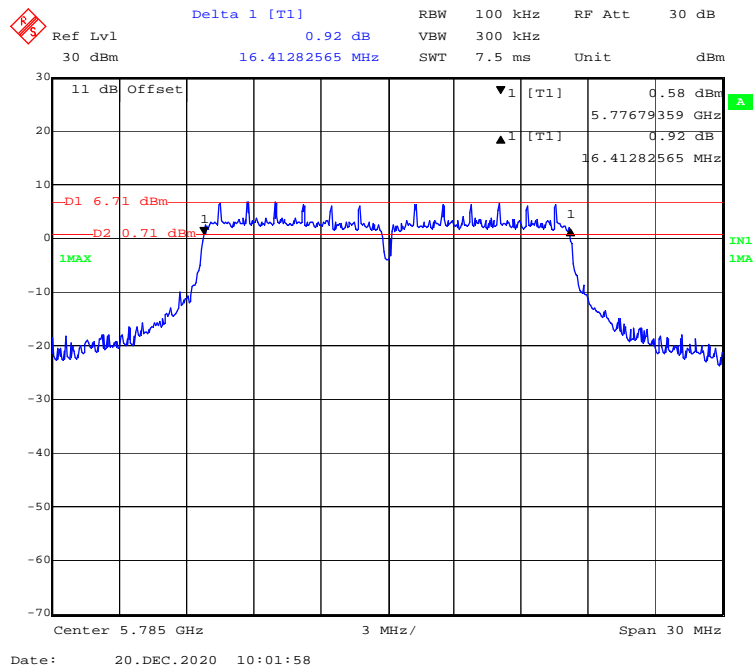


**802.11a mode, 5825MHz**

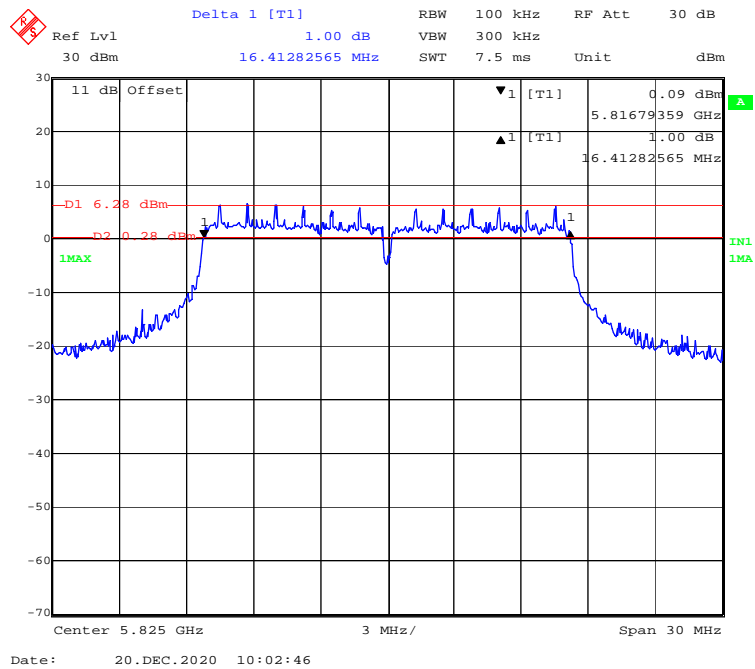


**802.11ac20 mode, 5745MHz**

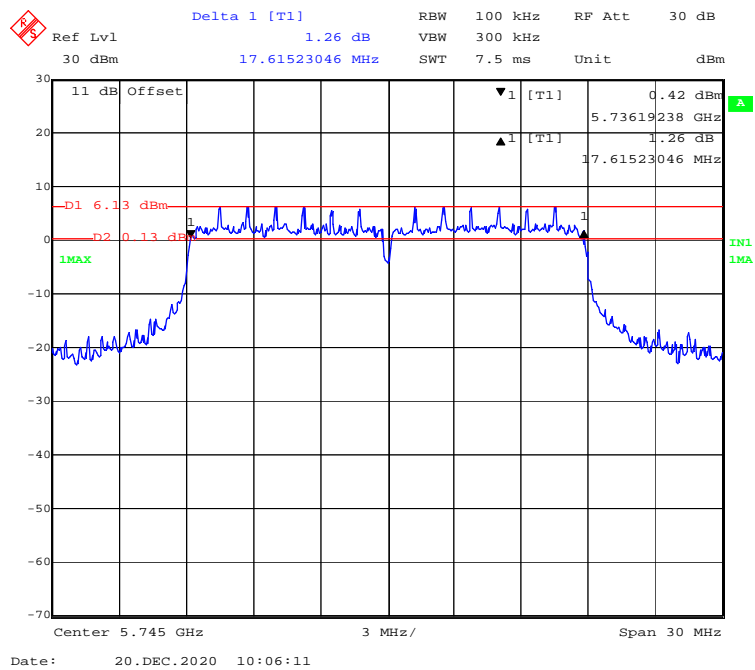


**802.11ac20 mode, 5785MHz**

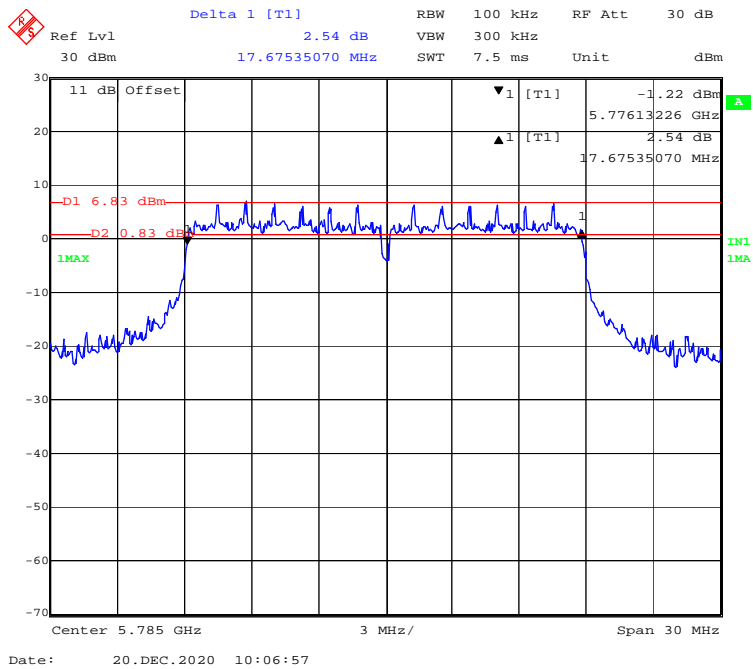


**802.11ac20 mode, 5825MHz**

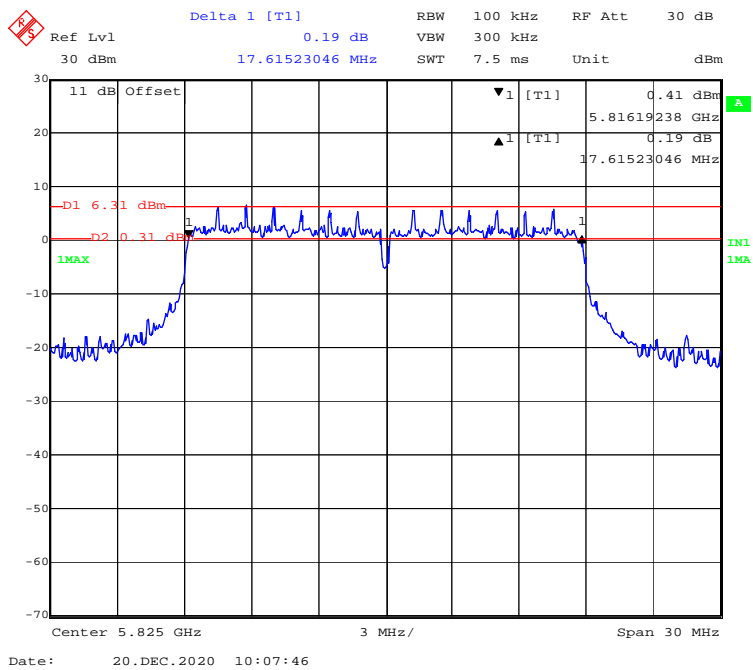

**802.11n-HT20 mode, 5745MHz**

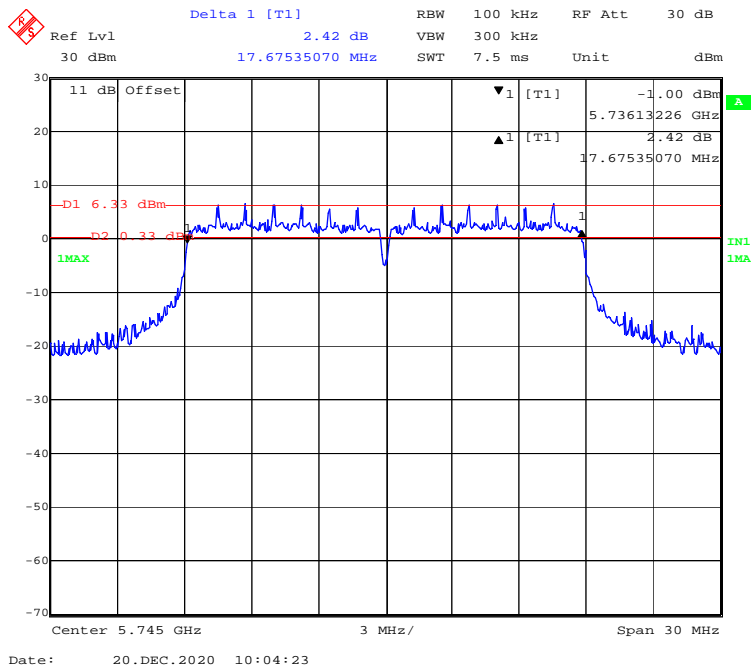


**802.11n-HT20 mode, 5785MHz**

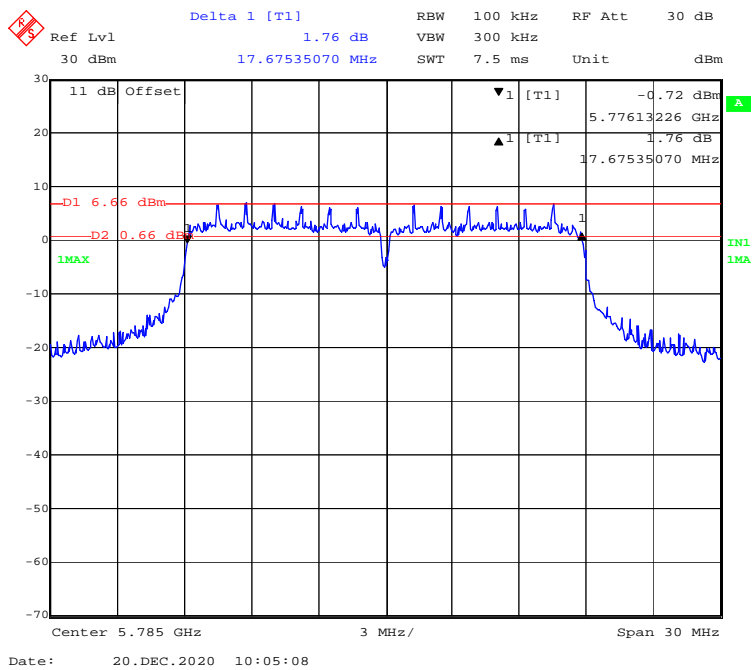





**802.11n-HT20 mode, 5825MHz**

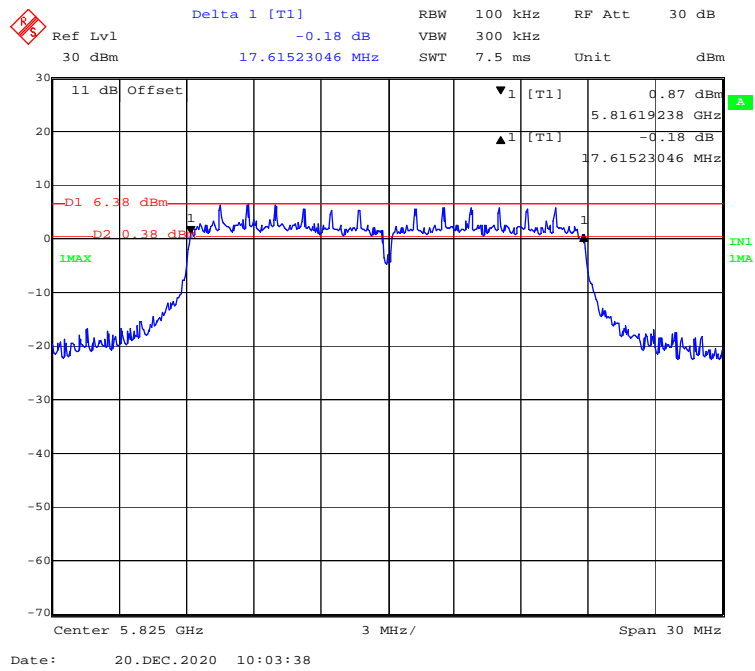


**802.11ac40 mode, 5755MHz**

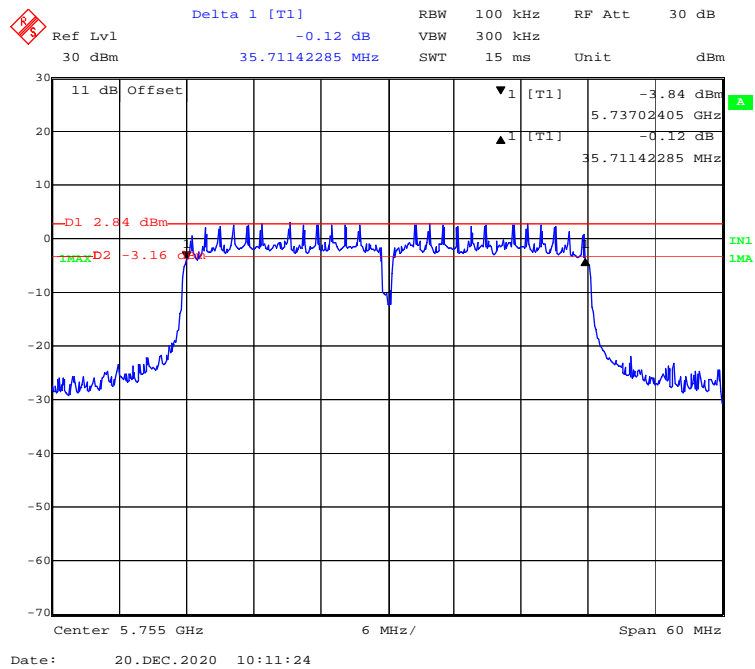


**802.11ac40 mode, 5795MHz**

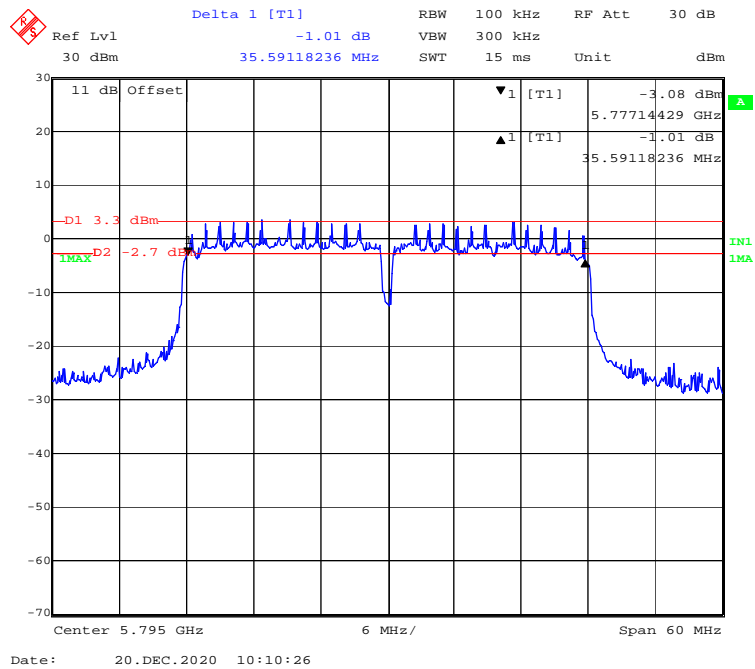


**802.11n-HT40 mode, 5755MHz**

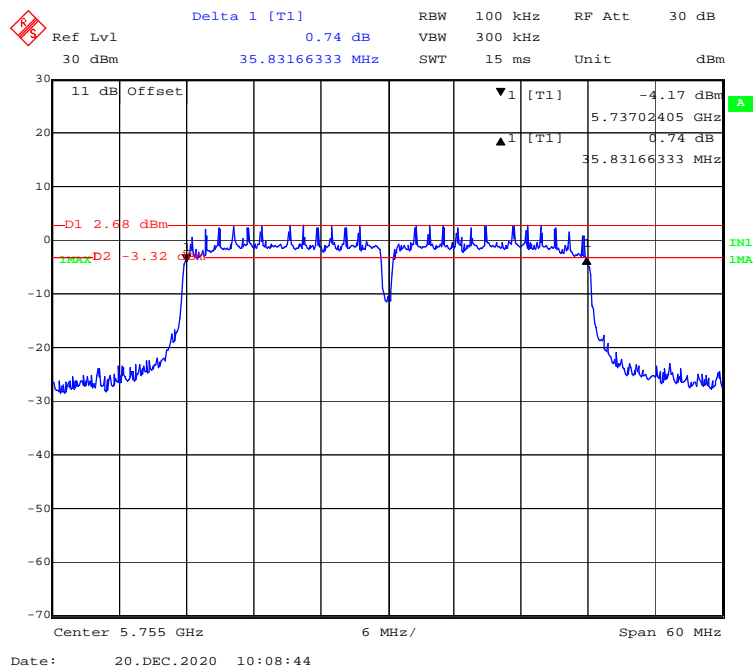

**802.11n-HT40 mode, 5795MHz**

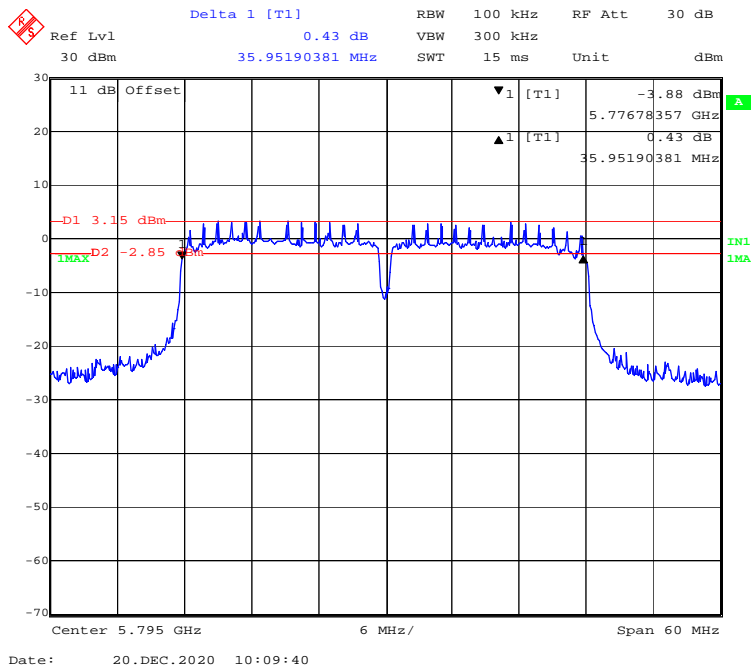


**802.11ac80 mode, 5775MHz**

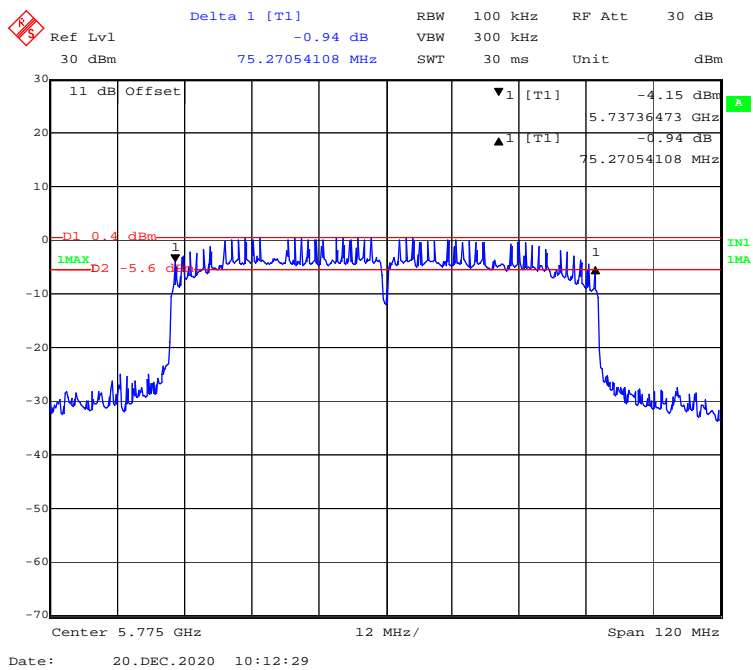


99% Occupied Bandwidth:


802.11a mode, 5745MHz

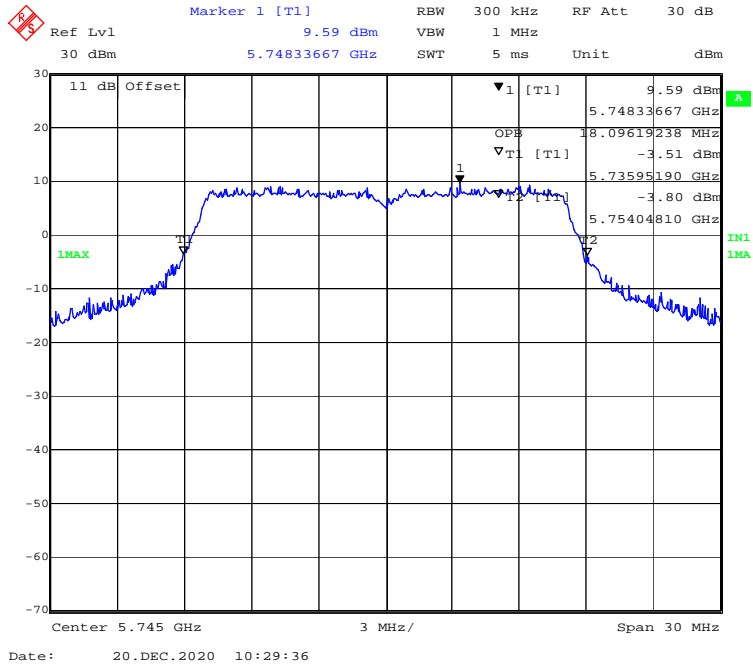


802.11a mode, 5785MHz

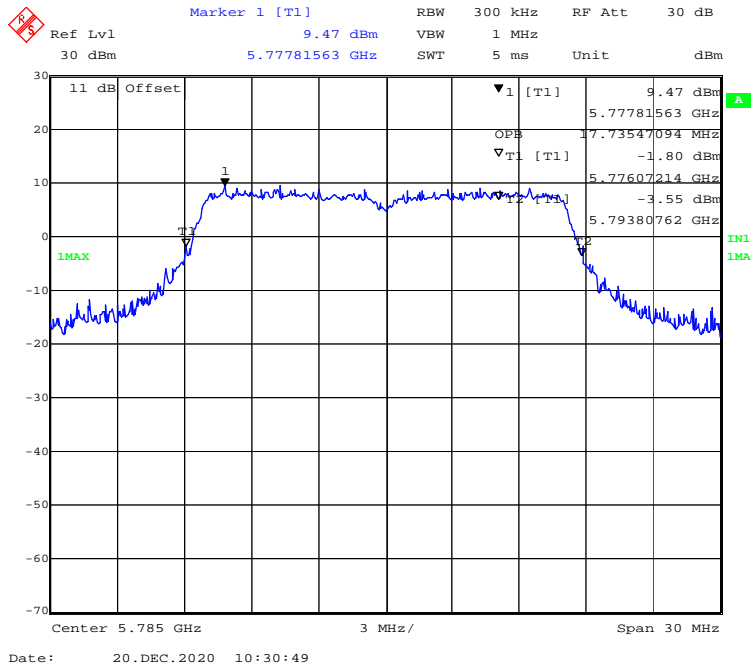


**802.11a mode, 5825MHz**

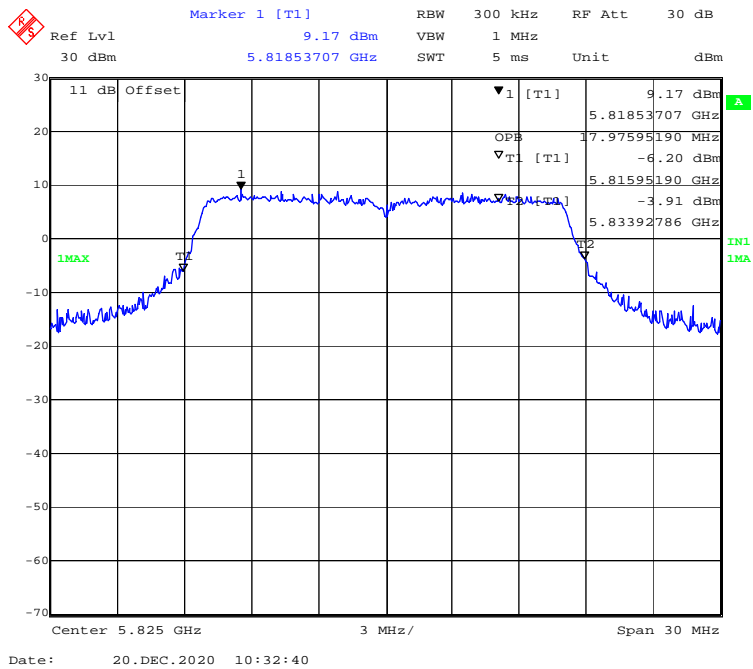


**802.11ac20 mode, 5745MHz**

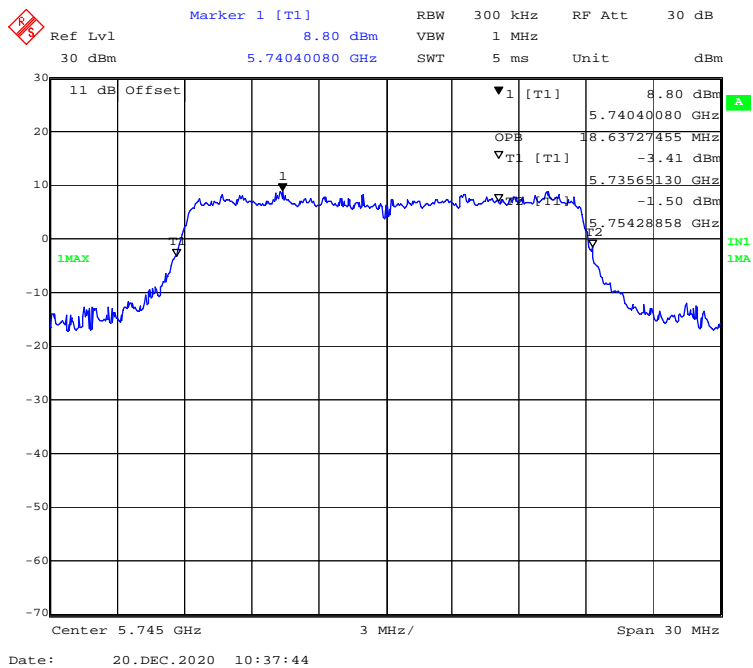


**802.11ac20 mode, 5785MHz**

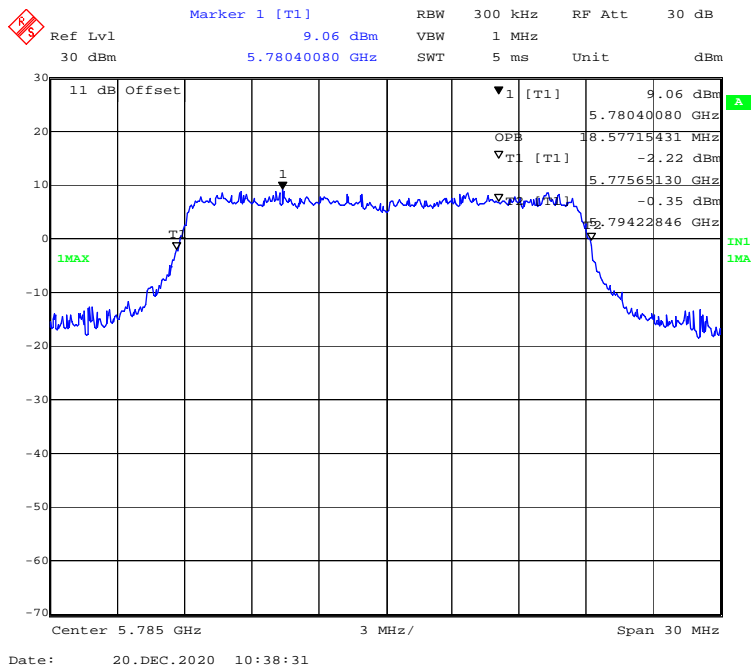


**802.11ac20 mode, 5825MHz**

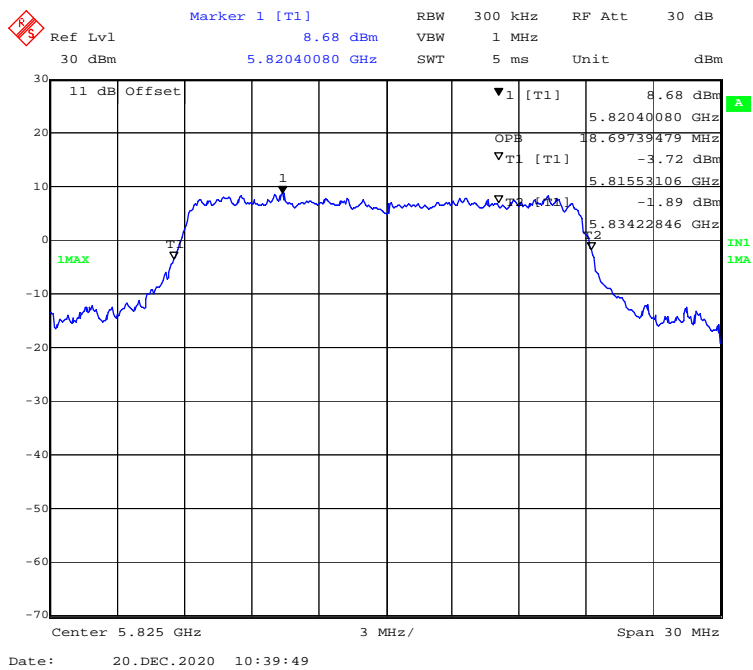


**802.11n-HT20 mode, 5745MHz**

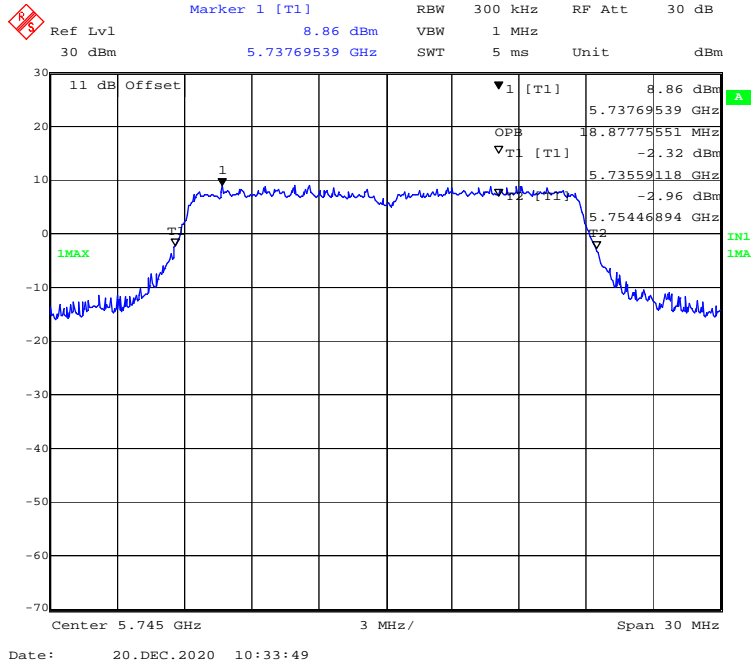


**802.11n-HT20 mode, 5785MHz**

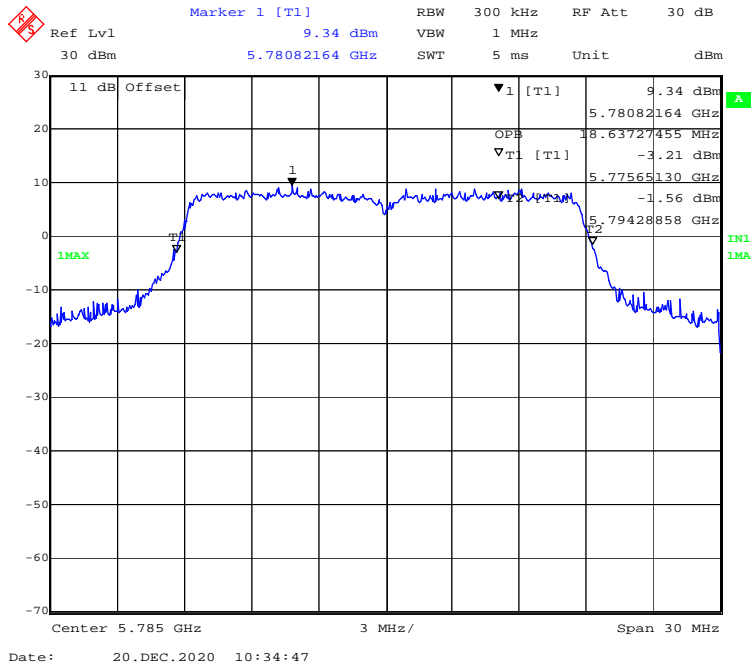

**802.11n-HT20 mode, 5825MHz**

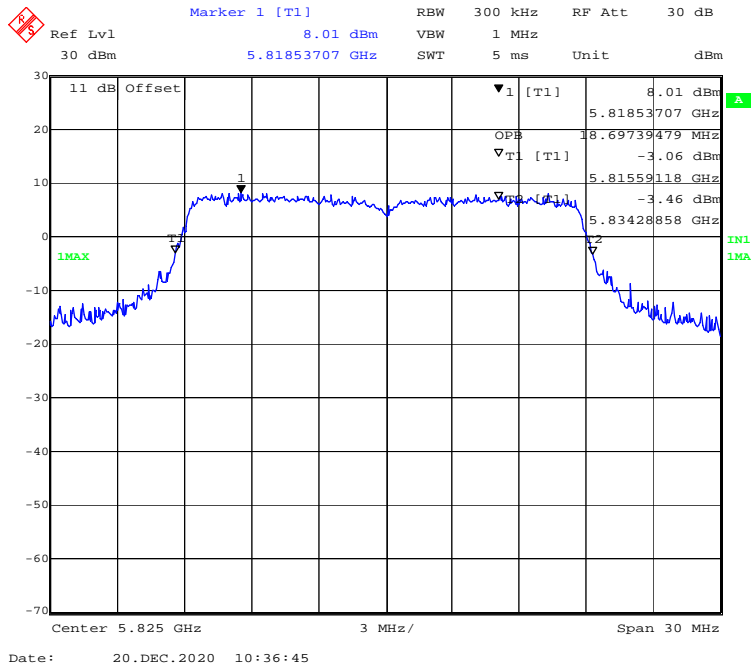


**802.11ac40 mode, 5755MHz**

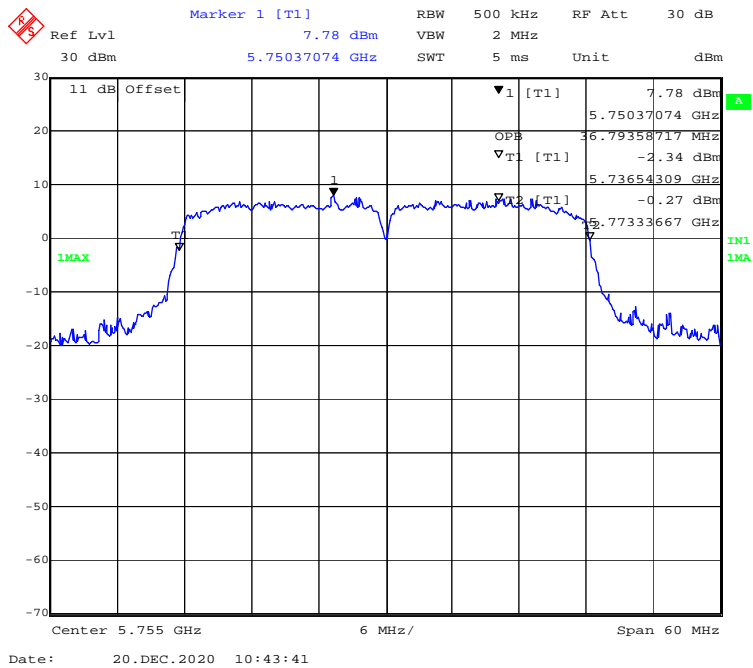





**802.11ac40 mode, 5795MHz**

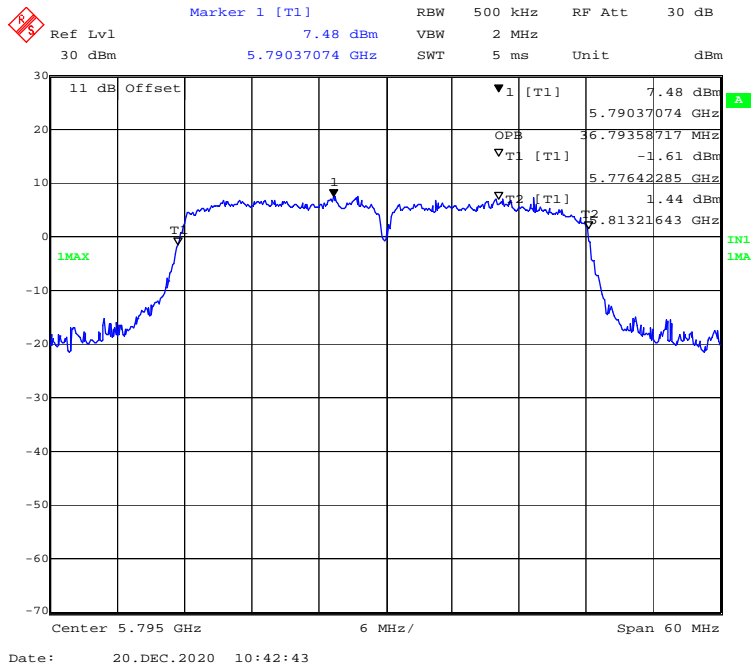


**802.11n-HT40 mode, 5755MHz**

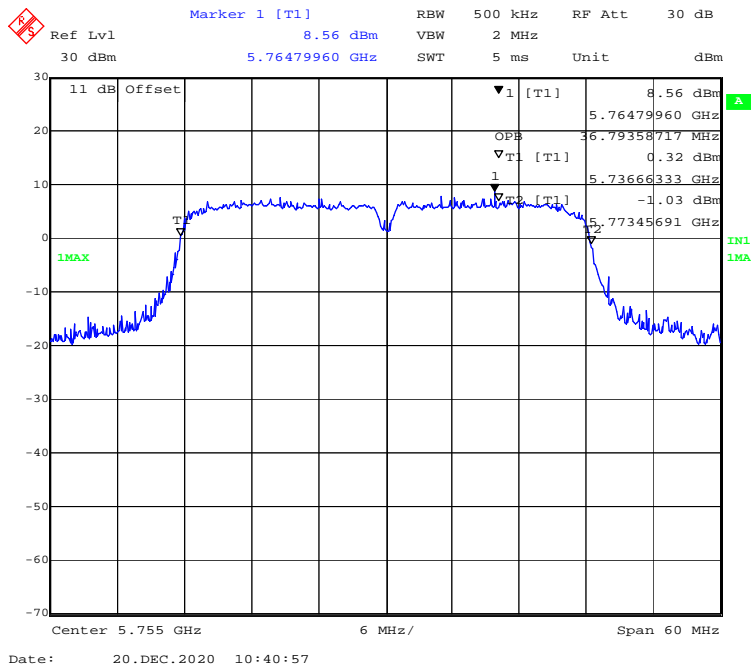

**802.11n-HT40 mode, 5795MHz**

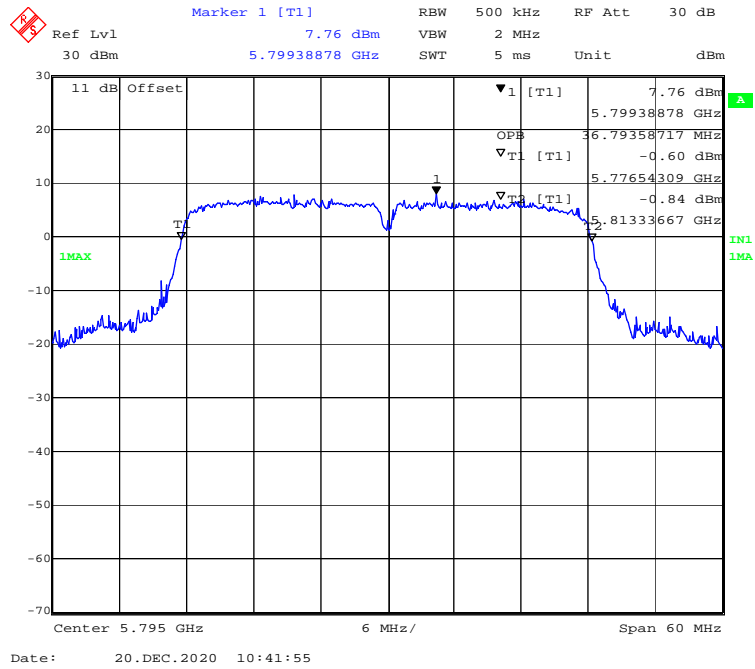

**802.11n-ac80 mode, 5775MHz**

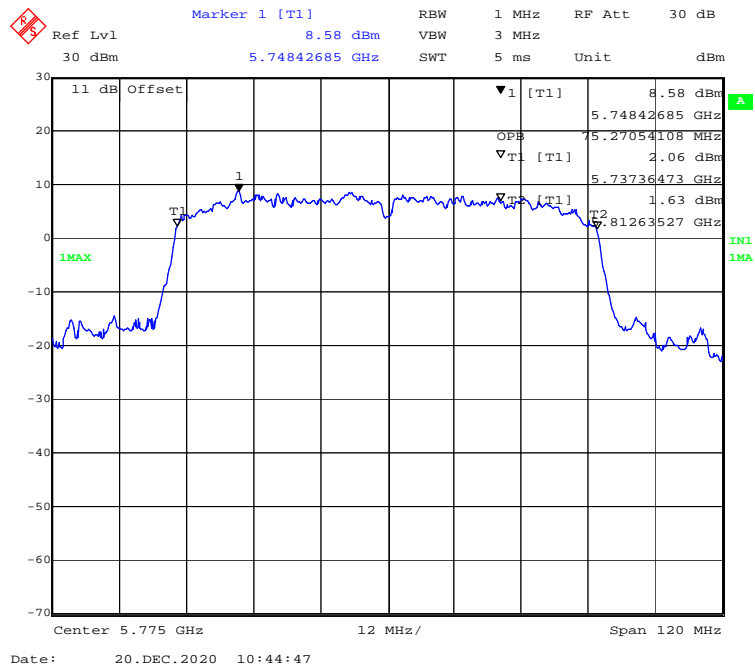

## **FCC §15.407(a) (1) (3) – CONDUCTED TRANSMITTER OUTPUT POWER**

### **Applicable Standard**

According to §15.407(a)(1)


(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to §15.407(a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### **Test Procedure**

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



**Test Data****Environmental Conditions**

<b>Temperature:</b>	23.0~23.4°C
<b>Relative Humidity:</b>	48~54 %
<b>ATM Pressure:</b>	100.9~101.3 kPa

The testing was performed by CK Huang from 2020-10-15 to 2020-12-20.

Test Mode: Transmitting

Test mode	Band	Frequency (MHz)	Average Conducted Output Power (dBm)	Limit (dBm)	Result
802.11a	5150-5250 MHz	5180	16.22	24	PASS
		5200	16.15	24	PASS
		5240	16.22	24	PASS
802.11ac20	5150-5250 MHz	5180	16.44	24	PASS
		5200	16.34	24	PASS
		5240	16.16	24	PASS
802.11n-HT20	5150-5250 MHz	5180	16.41	24	PASS
		5200	16.14	24	PASS
		5240	16.29	24	PASS
802.11ac40	5150-5250 MHz	5190	14.29	24	PASS
		5230	14.45	24	PASS
802.11n-HT40	5150-5250 MHz	5190	14.43	24	PASS
		5230	14.44	24	PASS
802.11ac80	5150-5250 MHz	5210	14.41	24	PASS

Test mode	Band	Frequency (MHz)	Average Conducted Output Power (dBm)	Limit (dBm)	Result
802.11a	5725-5850 MHz	5745	11.47	30	PASS
		5785	11.78	30	PASS
		5825	11.57	30	PASS
802.11ac20	5725-5850 MHz	5745	11.44	30	PASS
		5785	11.39	30	PASS
		5825	11.12	30	PASS
802.11n-HT20	5725-5850 MHz	5745	11.37	30	PASS
		5785	11.93	30	PASS
		5825	11.25	30	PASS
802.11ac40	5725-5850 MHz	5755	10.41	30	PASS
		5795	10.87	30	PASS
802.11n-HT40	5725-5850 MHz	5755	10.37	30	PASS
		5795	10.64	30	PASS
802.11ac80	5725-5850 MHz	5775	11.13	30	PASS

Note: The maximum antenna gain is -0.25 dBi.

## **FCC §15.407(a) (1) (3) - POWER SPECTRAL DENSITY**

### **Applicable Standard**

According to §15.407(a) (1)

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to §15.407(a) (3)

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### **Test Procedure**

The measurements are base on FCC KDB 789033 D02 General UNII Test Proceidyres New Rules v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices section F: Maximum power spectral density (PPSD)

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	23.0~23.4°C
<b>Relative Humidity:</b>	48~54 %
<b>ATM Pressure:</b>	100.9~101.3 kPa

*The testing was performed by CK Huang from 2020-10-15 to 2020-12-20 .*

Test Mode: Transmitting

5150MHz-5250MHz:

Mode	Channel	Frequency (MHz)	PSD (dBm/MHz)	Limit (dBm/MHz)	Result
802.11a	Low	5180	6.01	11	PASS
	Middle	5200	5.58	11	PASS
	High	5240	5.60	11	PASS
802.11ac20	Low	5180	5.78	11	PASS
	Middle	5200	5.44	11	PASS
	High	5240	5.39	11	PASS
802.11n-HT20	Low	5180	5.64	11	PASS
	Middle	5200	5.51	11	PASS
	High	5240	5.50	11	PASS
802.11ac40	Low	5190	0.79	11	PASS
	High	5230	0.45	11	PASS
802.11n-HT40	Low	5190	0.99	11	PASS
	High	5230	0.28	11	PASS
802.11ac80	/	5210	-1.72	11	PASS

5725MHz-5850MHz:


Mode	Channel	Frequency (MHz)	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11a	Low	5745	6.36	30	PASS
	Middle	5785	6.08	30	PASS
	High	5825	5.74	30	PASS
802.11ac20	Low	5745	6.45	30	PASS
	Middle	5785	6.40	30	PASS
	High	5825	5.50	30	PASS
802.11n-HT20	Low	5745	6.61	30	PASS
	Middle	5785	6.68	30	PASS
	High	5825	6.19	30	PASS
802.11ac40	Low	5755	2.66	30	PASS
	High	5795	3.11	30	PASS
802.11n-HT40	Low	5755	3.16	30	PASS
	High	5795	2.75	30	PASS
802.11ac80	/	5775	0.82	30	PASS

Note:


The maximum antenna gain is -0.25 dBi.

5150MHz-5250MHz Band:

802.11a mode, Power spectral density-5180MHz

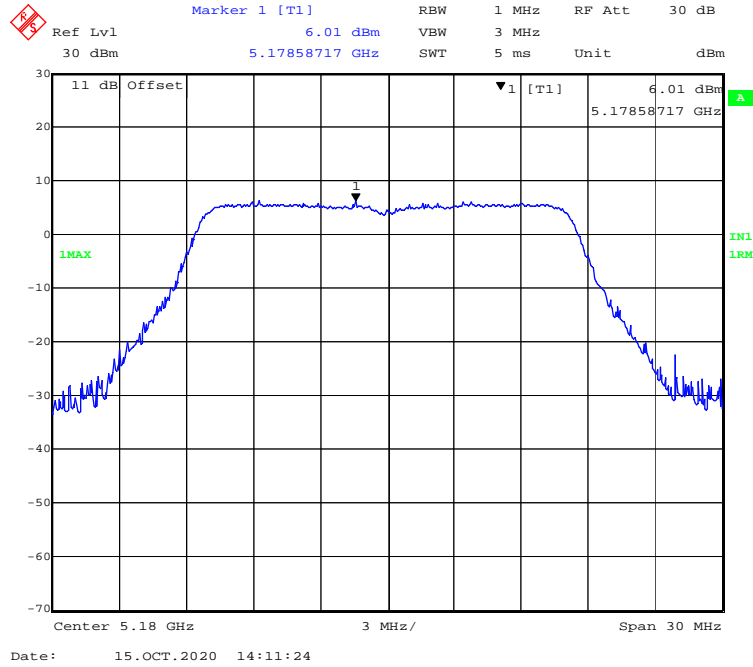


802.11a mode, Power spectral density-5200MHz

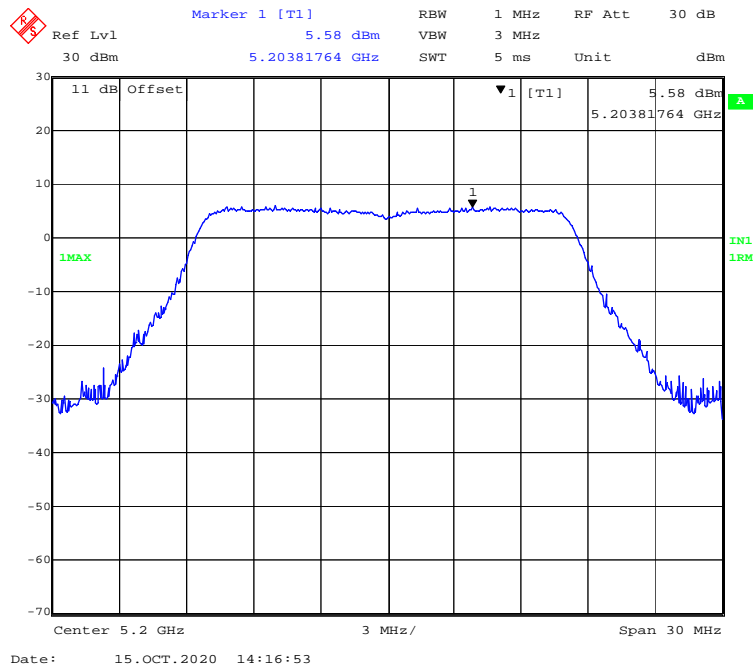





**802.11a mode, Power spectral density-5240MHz**

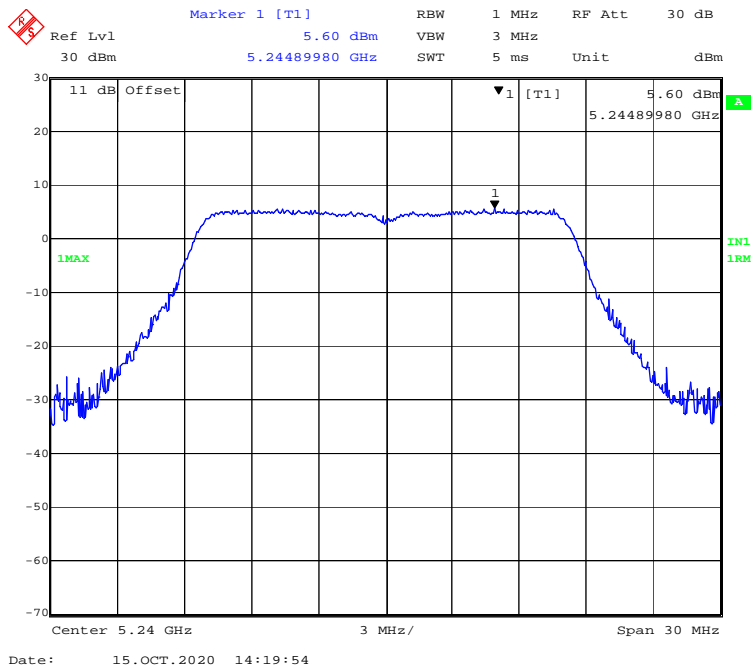


**802.11ac20 mode, Power spectral density-5180MHz**

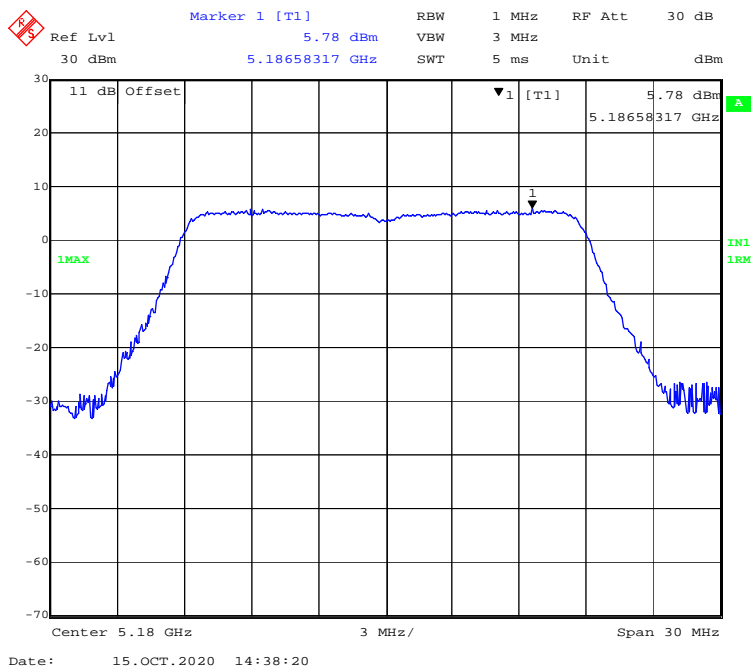


**802.11ac20 mode, Power spectral density-5200MHz**

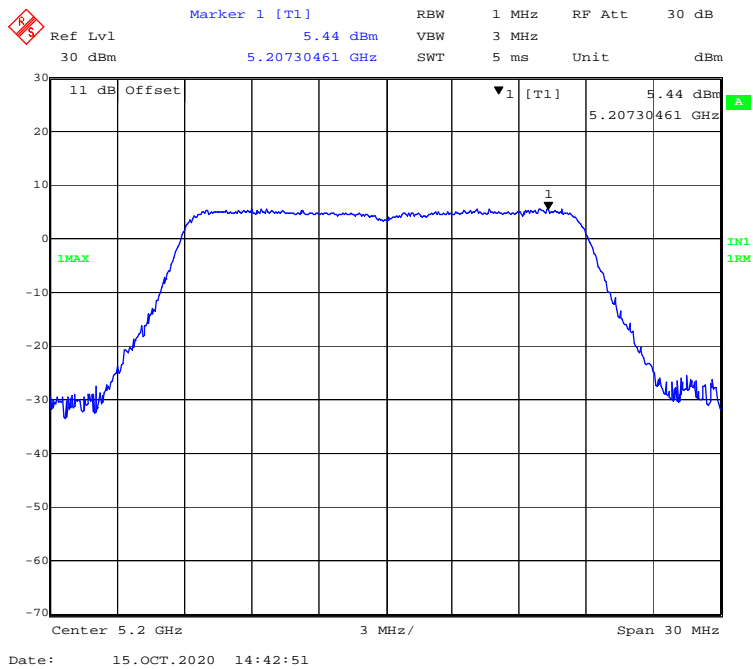


**802.11ac20 mode, Power spectral density-5240MHz**

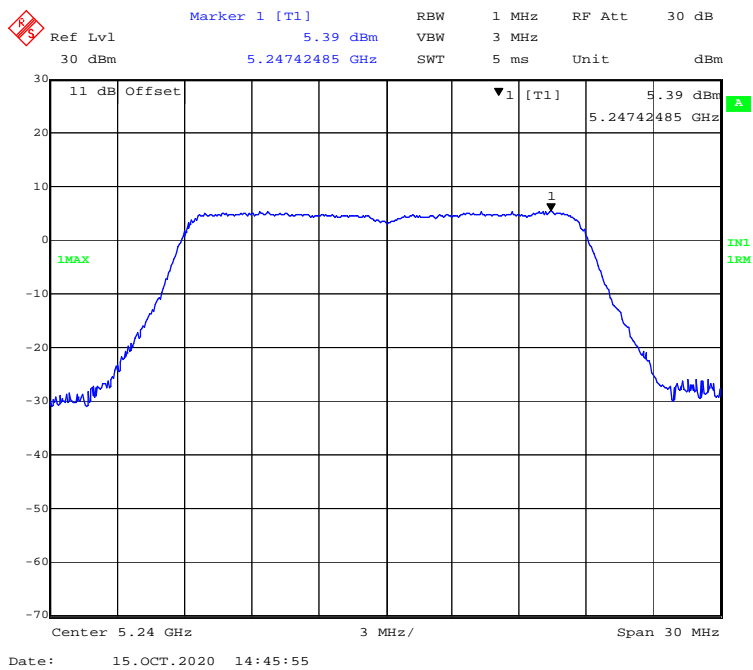


**802.11n-HT20 mode, Power spectral density-5180MHz**

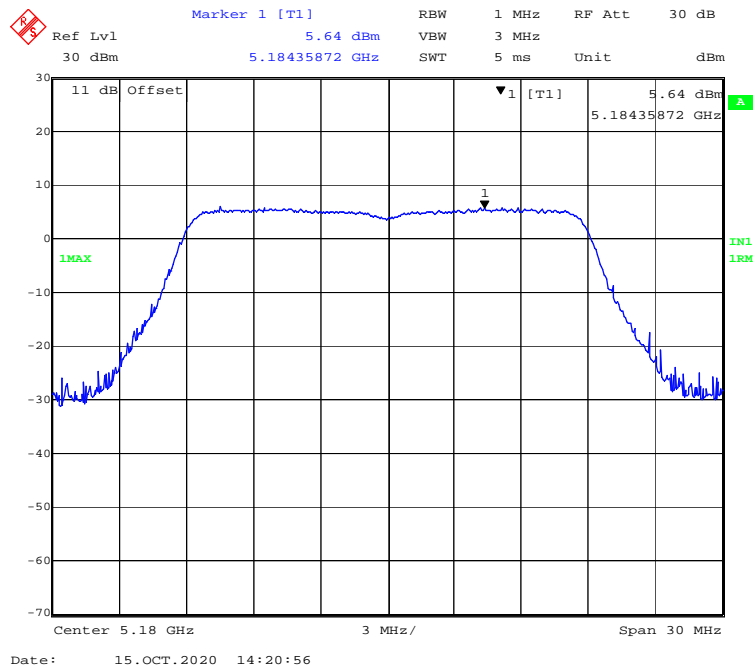


**802.11n-HT20 mode, Power spectral density-5200MHz**

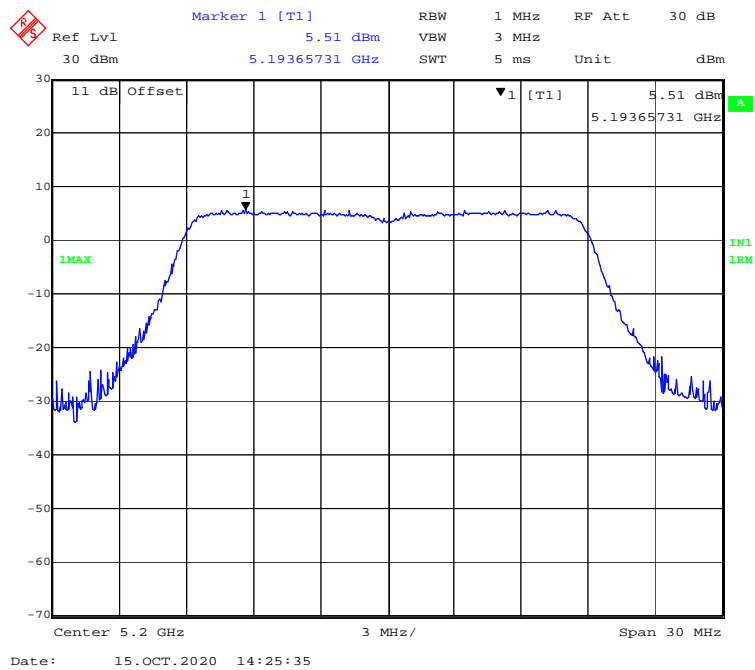


**802.11n-HT20 mode, Power spectral density-5240MHz**

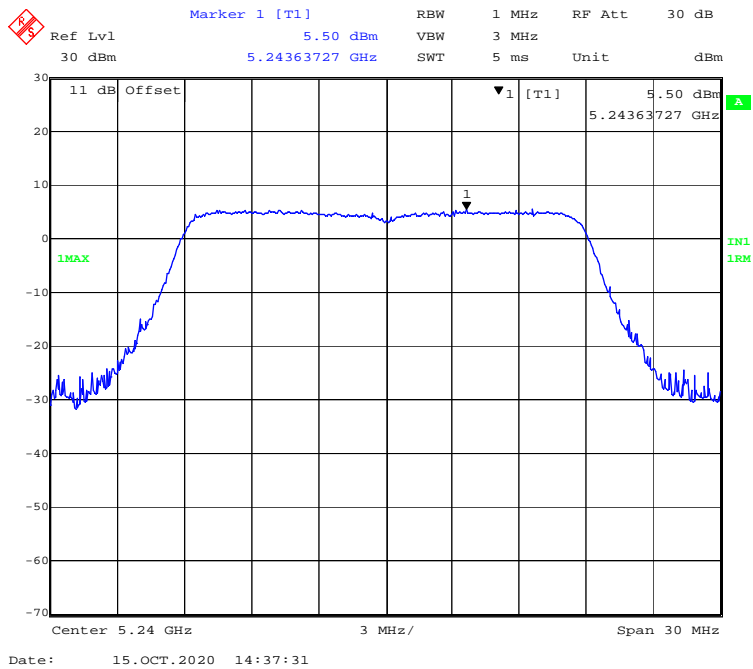


**802.11ac40 mode, Power spectral density-5190MHz**

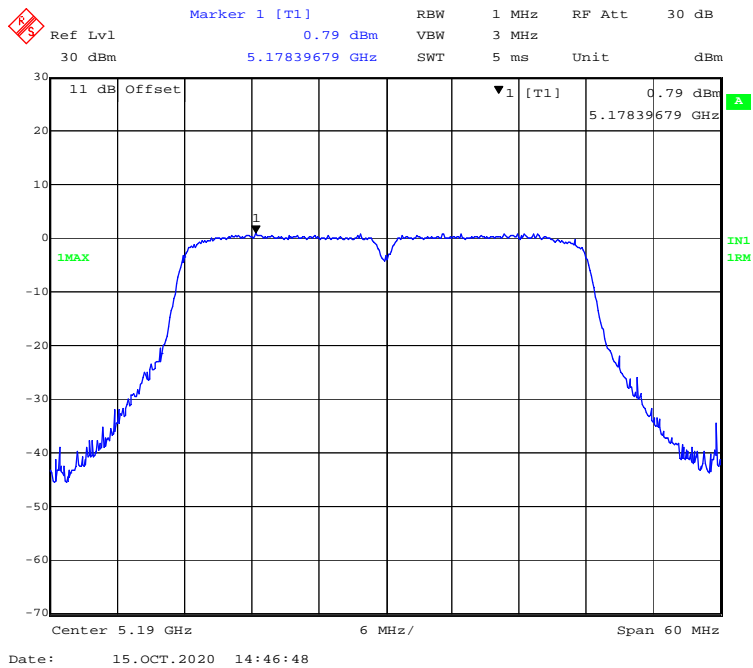


**802.11ac40 mode, Power spectral density-5230MHz**

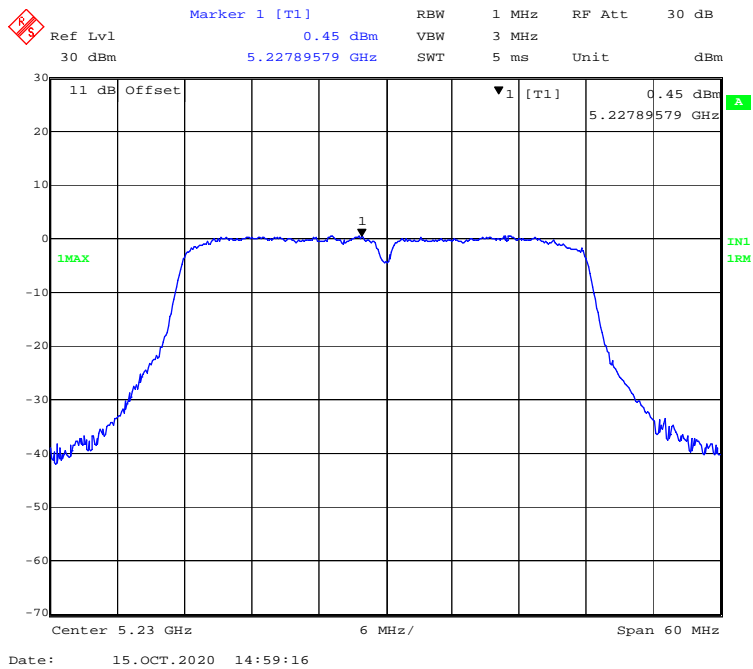


**802.11n-HT40 mode, Power spectral density-5190MHz**

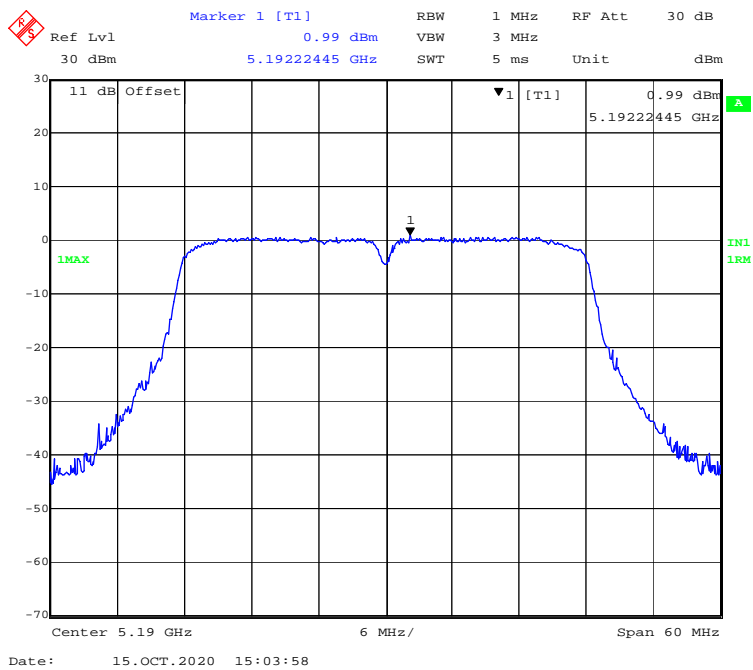

**802.11n-HT40 mode, Power spectral density-5230MHz**

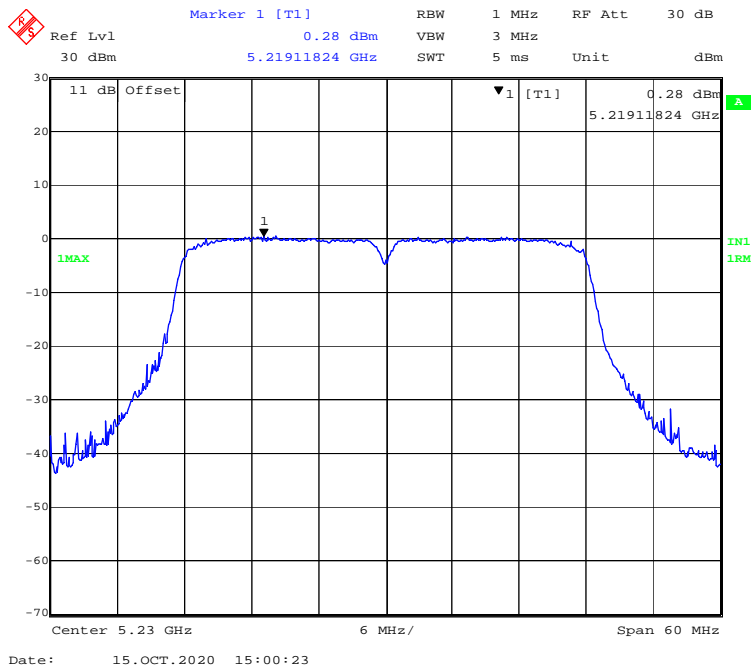


**802.11ac80 mode, Power spectral density-5210MHz**

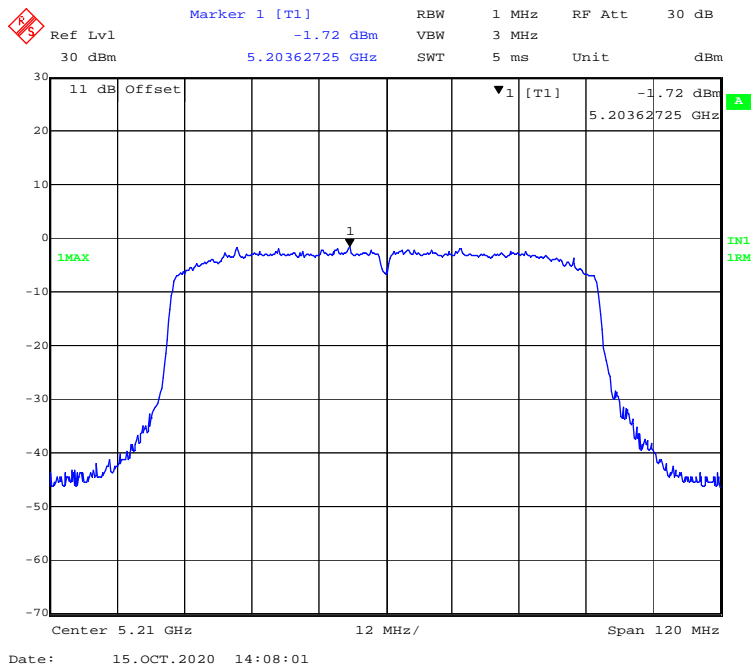


**5725MHz-5850 MHz Band:**


**802.11a mode, Power spectral density-5745MHz**

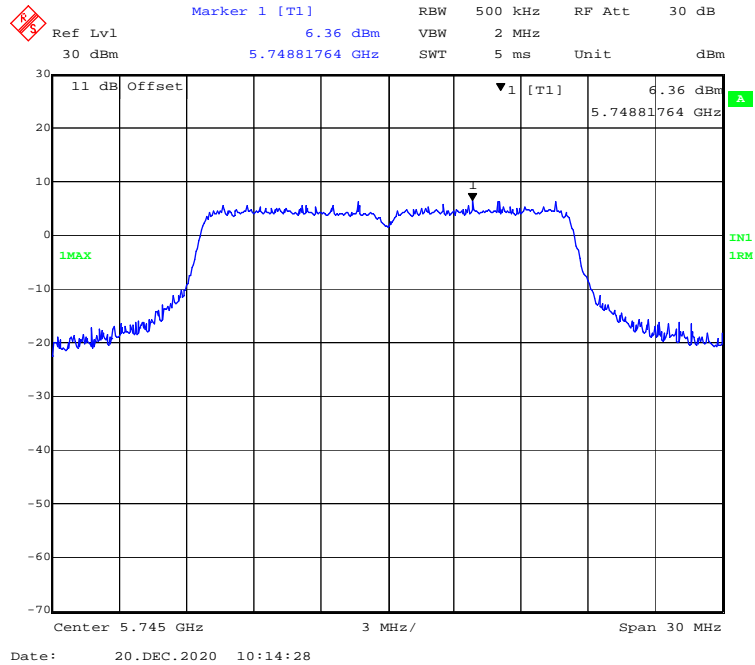


**802.11a mode, Power spectral density-5785MHz**

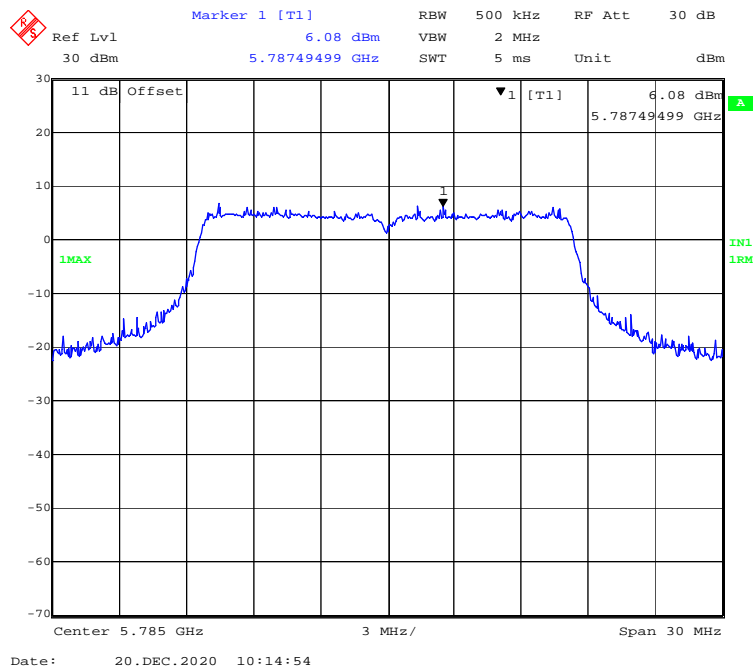

### 802.11a mode, Power spectral density-5825MHz

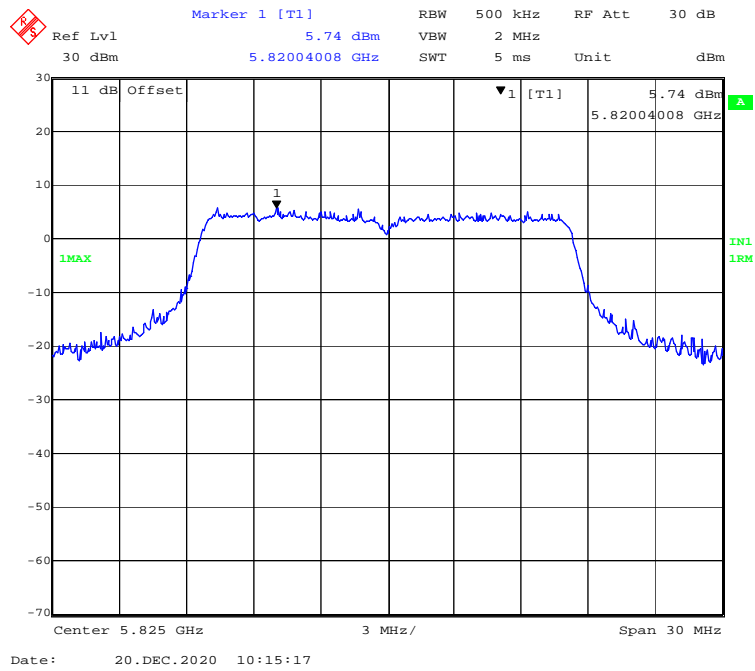


### 802.11ac20 mode, Power spectral density-5745MHz

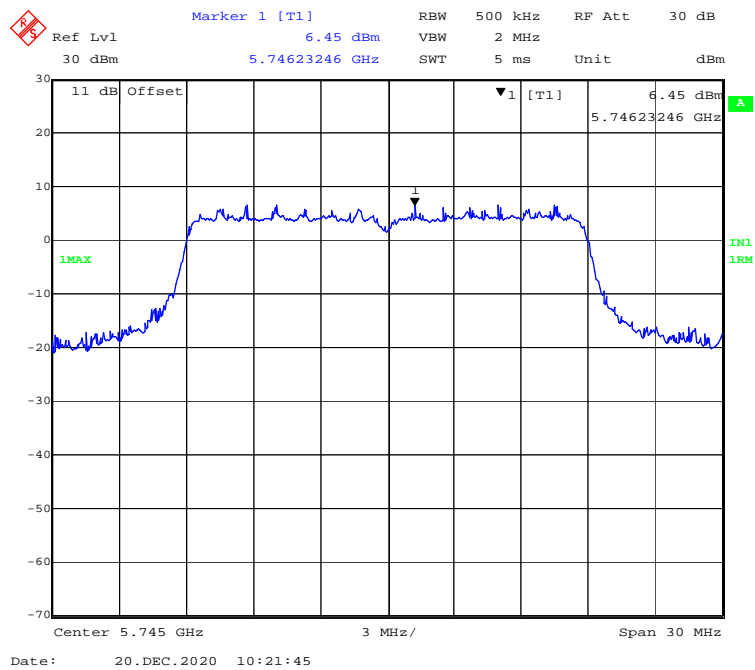





802.11ac20 mode, Power spectral density-5785MHz

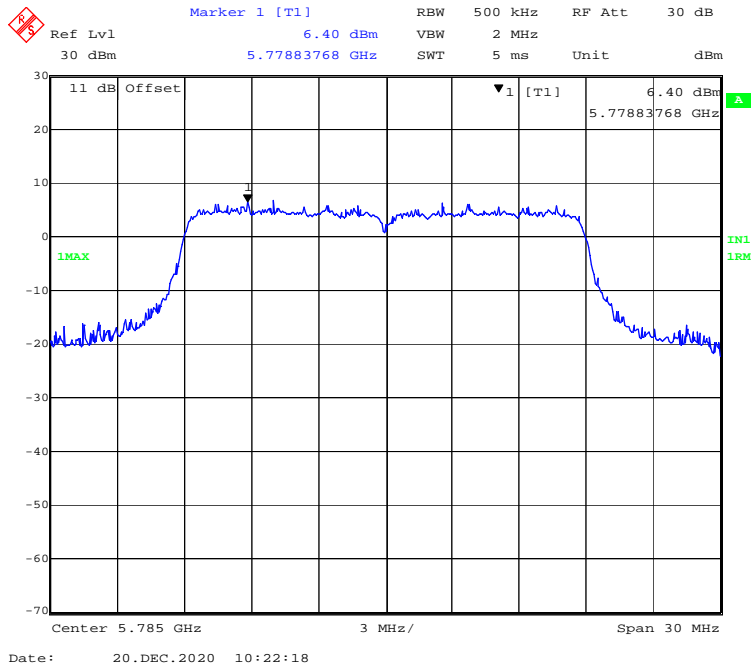


802.11ac20 mode, Power spectral density-5825MHz

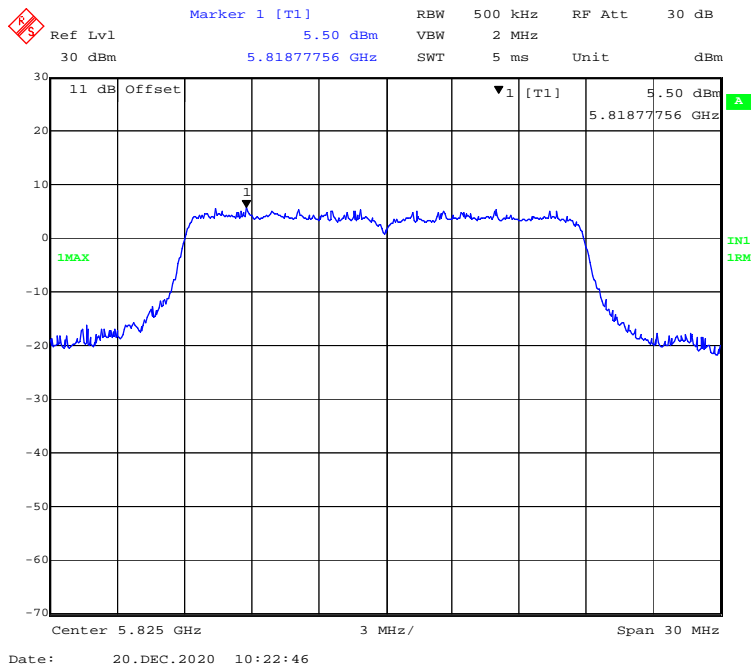


**802.11n-HT20 mode, Power spectral density-5745MHz**

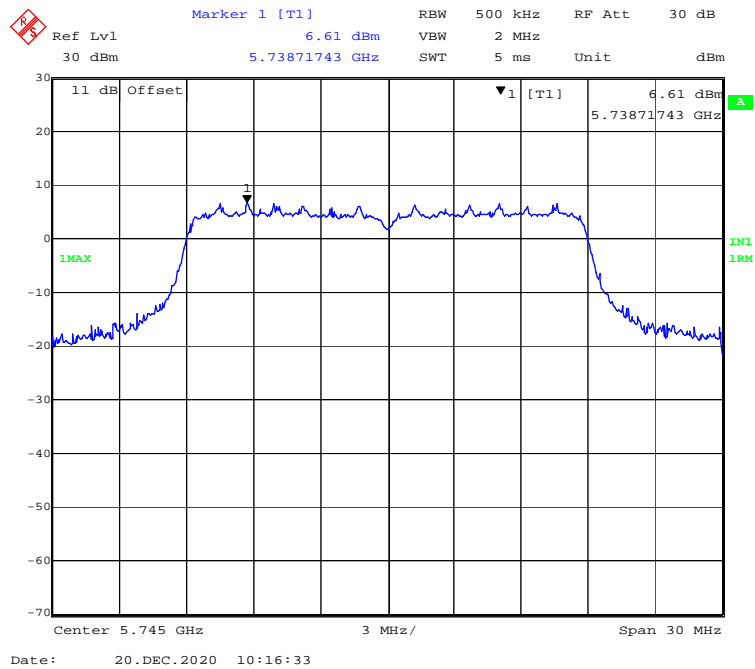


**802.11n-HT20 mode, Power spectral density-5785MHz**

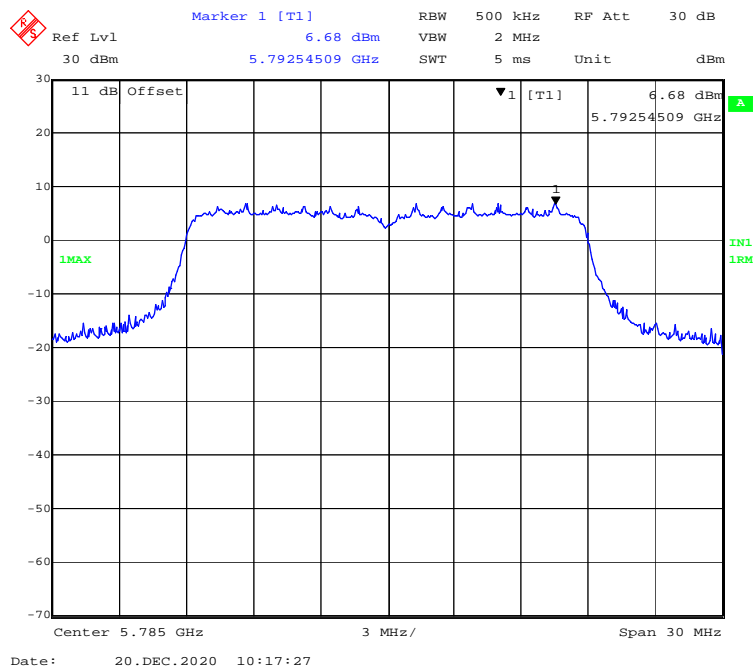


### 802.11n-HT20 mode, Power spectral density-5825MHz

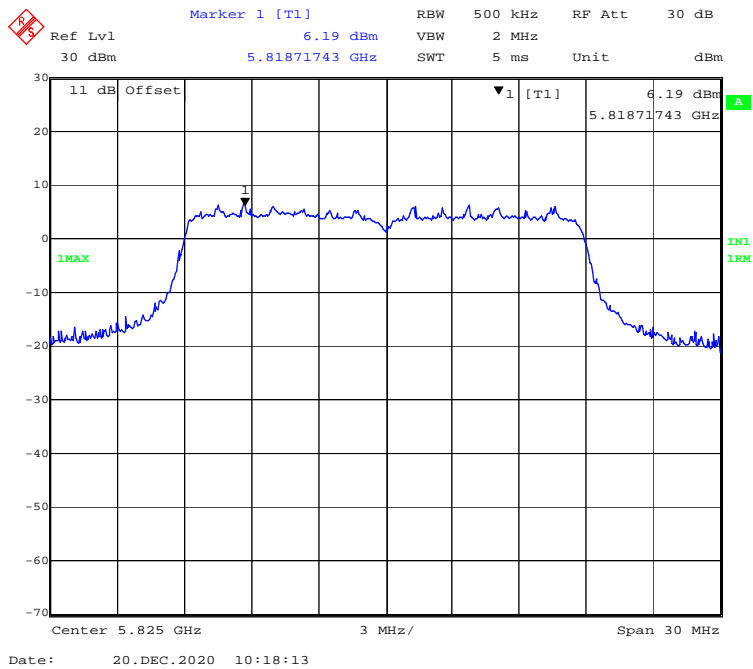


### 802.11ac40 mode, Power spectral density-5755MHz

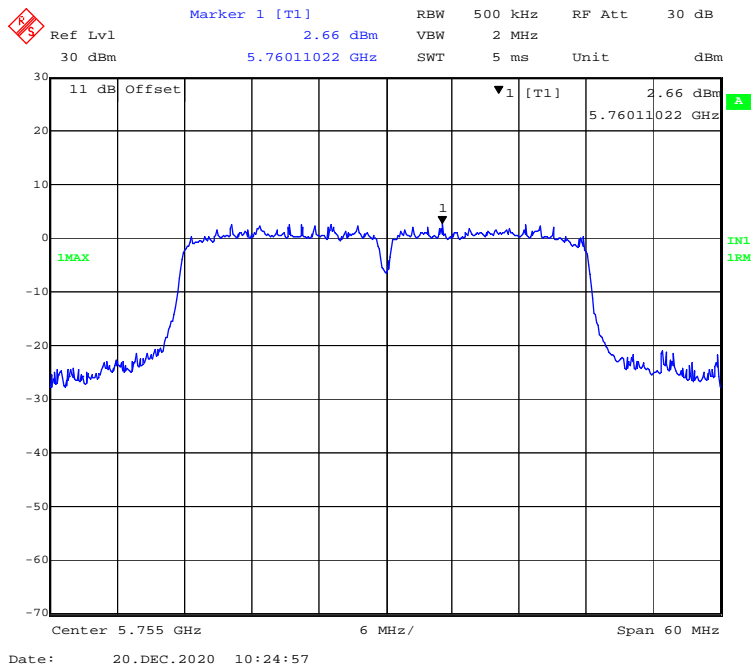


**802.11ac40 mode, Power spectral density-5795MHz**

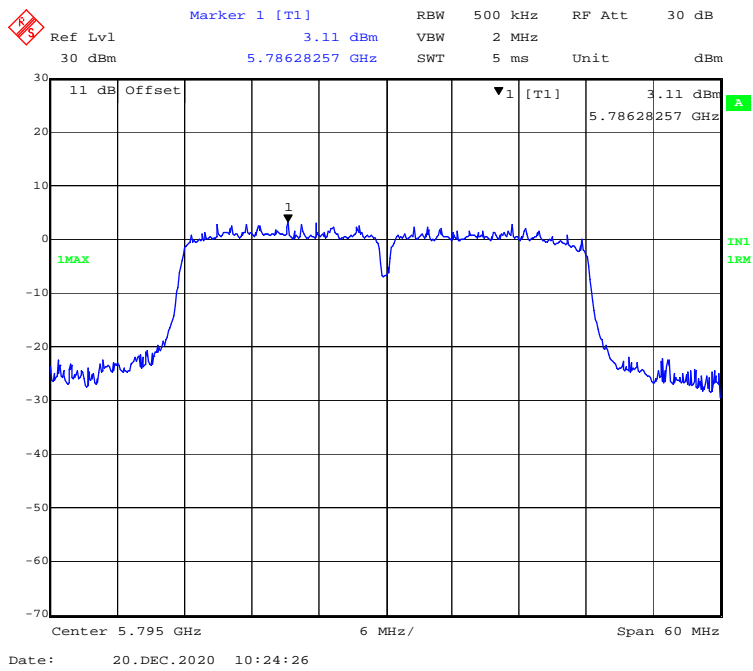


**802.11n-HT40 mode, Power spectral density-5755MHz**

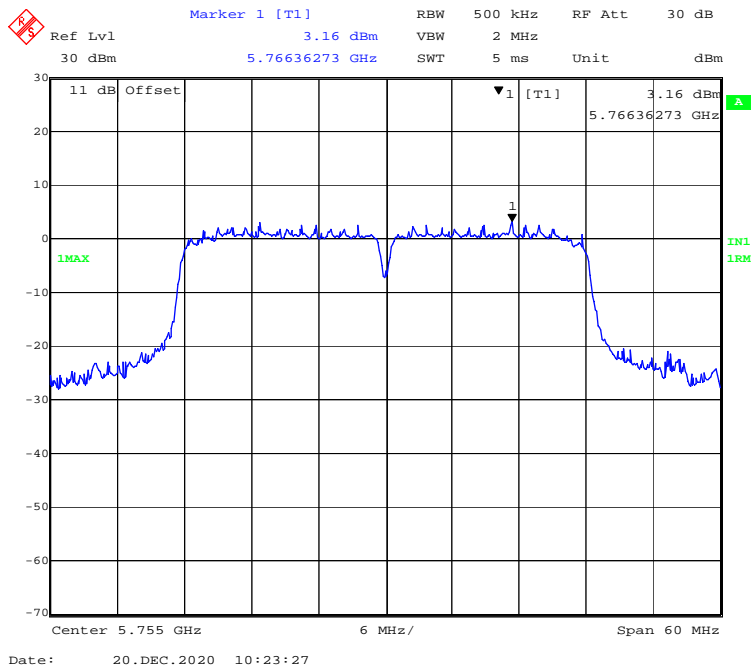

### 802.11n-HT40 mode, Power spectral density-5795MHz

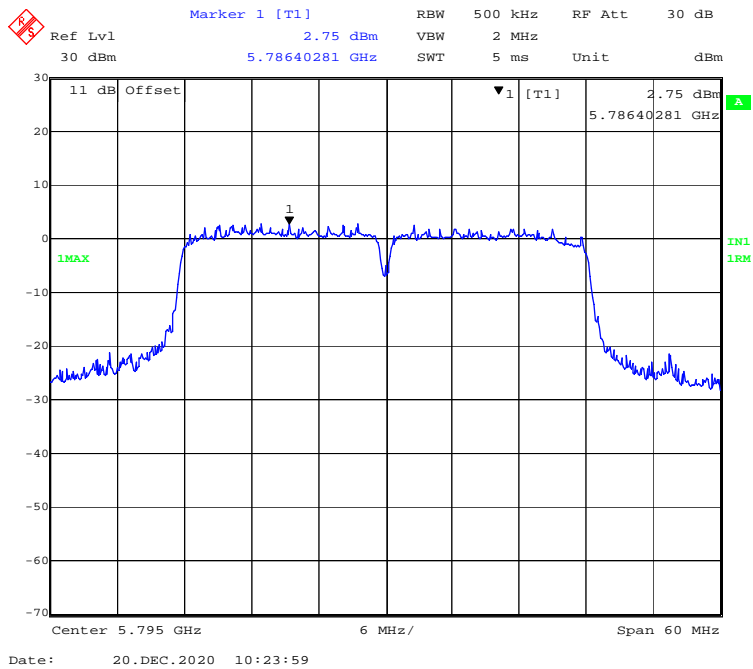

### 802.11ac80 mode, Power spectral density-5775MHz

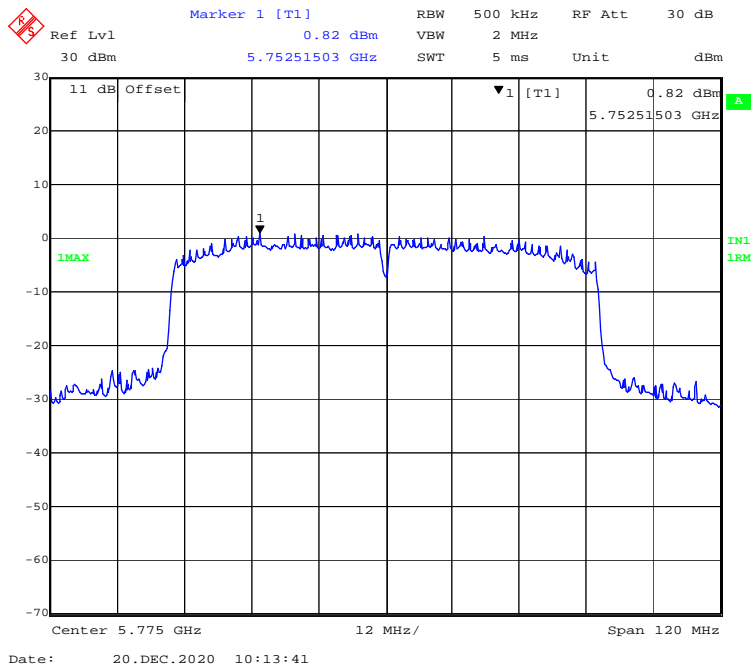

### **Declarations**

1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '\*'. Customer model name, addresses, names, trademarks etc. are not considered data.

2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

5: This report cannot be reproduced except in full, without prior written approval of the Company.

6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***