

Test Report

FCC ID: 2AUFWOL

Date of issue: Dec. 30, 2021

Report number: MTi20090801-1E1

Sample description: OL DESK LAMP

Model(s): OL

Applicant: Dongguan You You Lighting Technology Co., Ltd

Address: 4th Floor, Building A, No. 1724, Provincial Road S358, Xiabian Community, Changan Town, Dongguan City, Guangdong Pro.

Date of test: Sept. 18, 2020 –Dec. 31, 2021

Shenzhen Microtest Co., Ltd.
<http://www.mtitest.com>

This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.

Tel:(86-755)88850135

Fax: (86-755) 88850136

Web: <http://www.mtitest.com>

E-mail: mti@51mti.com

Address: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao' an District, Shenzhen, Guangdong, China.

Table of Contents

1	GENERAL INFORMATION	4
1.1	FEATURE OF EQUIPMENT UNDER TEST (EUT).....	4
1.2	TEST MODE	4
1.3	EUT TEST SETUP.....	5
1.4	ANCILLARY EQUIPMENT	5
2	SUMMARY OF TEST RESULT	6
2.1	OPERATION CHANNEL LIST	6
2.2	TEST CHANNEL	6
3	TEST FACILITIES AND ACCREDITATIONS	7
3.1	TEST LABORATORY	7
3.2	ENVIRONMENTAL CONDITIONS	7
3.3	MEASUREMENT UNCERTAINTY.....	7
3.4	TEST SOFTWARE	7
4	LIST OF TEST EQUIPMENT	8
5	TEST RESULTS.....	9
5.1	ANTENNA REQUIREMENT	9
5.1.1	<i>Standard requirement</i>	9
5.1.2	<i>EUT Antenna</i>	9
5.2	CONDUCTED EMISSION	10
5.2.1	<i>Limits</i>	10
5.2.2	<i>Test Procedures</i>	10
5.2.3	<i>Test Setup</i>	10
5.2.4	<i>Test Result</i>	10
5.3	RADIATED EMISSION.....	15
5.3.1	<i>Limits</i>	15
5.3.2	<i>Test Procedures</i>	16
5.3.3	<i>Test Setup</i>	17
5.3.4	<i>Test Result</i>	17
5.4	OCCUPIED BANDWIDTH.....	21
5.4.1	<i>Test method</i>	21
5.4.2	<i>Test result</i>	21
	PHOTOGRAPHS OF THE TEST SETUP	22
	PHOTOGRAPHS OF THE EUT.....	24

Test Result Certification

Applicant's name: Dongguan You You Lighting Technology Co., Ltd

Address: 4th Floor, Building A, No. 1724, Provincial Road S358, Xiabian Community, Changan Town, Dongguan City, Guangdong Pro.

Manufacture's name: Dongguan You You Lighting Technology Co., Ltd

Address: 4th Floor, Building A, No. 1724, Provincial Road S358, Xiabian Community, Changan Town, Dongguan City, Guangdong Pro.

Product name: OL DESK LAMP

Trademark: Yoursmay

Model name: OL

Standards: FCC Part 15C

Test procedure: ANSI C63.10-2013

This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


Tested by:



Danny Xu

Dec. 31, 2021

Reviewed by:



Leon Chen

Dec. 31, 2021

Approved by:



Tom Xue

Dec. 31 2021

1 GENERAL INFORMATION

1.1 Feature of equipment under test (EUT)

Product name:	OL DESK LAMP
Model name:	OL
Model difference:	N/A
Operation frequency:	115–205 kHz
Modulation type:	FSK
Antenna type:	Coil Antenna
Power supply:	AC 120V/60Hz
Battery:	N/A
Adapter information:	N/A
EUT serial number:	MTi20090801-1-S0001

1.2 Test mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test mode	Description
Mode 1	TX(5W)

Note:

1: EUT is tested under full load.

1.3 EUT test setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.4 Ancillary equipment

Equipment	Model	S/N	Manufacturer
Load	/	/	/
Mobile phone	S9+	/	SAMSUNG

2 Summary of Test Result

Item	FCC Part No.	Description of Test	Result
1	FCC PART 15.203	Antenna requirement	Pass
2	FCC PART 15.207	Conducted emission	Pass
3	FCC PART 15.209	Radiated emission	Pass
4	FCC Part 15.215	20dB bandwidth	Pass

2.1 Operation channel list

Channel	Frequency (kHz)
Low	115
Middle	128
High	205

2.2 Test channel

Channel	Frequency (kHz)
Middle	128

3 Test Facilities and Accreditations

3.1 Test laboratory

Test Laboratory	Shenzhen Microtest Co., Ltd
Location	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao' an District, Shenzhen, Guangdong, China.
FCC Registration No.:	448573

3.2 Environmental conditions

Temperature:	15°C~35°C
Humidity	20%~75%
Atmospheric pressure	98kPa~101kPa

3.3 Measurement uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %, $U=2xUc(y)$

RF frequency	1×10^{-7}
RF power, conducted	± 1 dB
Conducted emission (9 kHz~30 MHz)	± 2.5 dB
Radiated emission (9 kHz ~ 30 MHz)	± 4.0 dB
Radiated emission (30 MHz~1 GHz)	± 4.2 dB
Radiated emission (above 1 GHz)	± 4.3 dB
Occupied bandwidth	± 3 %
Temperature	± 1 degree
Humidity	± 5 %

3.4 Test software

Software Name	Manufacturer	Model	Version
RF Test System	Shenzhen JS tonskend co., ltd	JS1120-3	2.5.77.0418

4 List of test equipment

Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E043	EMI Test Receiver	Rohde&schwarz	ESCi7	101166	2020/06/04	2021/06/03
MTI-E044	TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-1338	2020/06/05	2021/06/04
MTI-E047	Amplifier	Hewlett-Packard	8447F	3113A06150	2020/06/04	2021/06/03
MTI-E089	ESG Vector Signal Generator	Agilent	N5182A	MY49060455	2020/06/03	2021/06/02
MTI-E058	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2020/07/03	2021/07/04
MTI-E062	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2020/06/04	2021/06/03
MTI-E066	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2020/06/04	2021/06/03
MTI-E078	Synthesized Sweeper	Agilent	83752A	3610A01957	2020/06/04	2021/06/03
MTI-E079	DC Power Supply	Agilent	E3632A	MY40027695	2020/06/04	2021/06/03
MTI-E021	EMI Test Receiver	Rohde&schwarz	ESCS30	100210	2020/06/04	2021/06/03
MTI-E022	Pulse Limiter	Schwarzbeck	VSTD 9561-F	00679	2020/06/03	2021/06/02
MTI-E023	Artificial mains network	Schwarzbeck	NSLK 8127	NSLK 8127 #841	2020/06/04	2021/06/03
MTI-E046	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00044	2020/06/05	2021/06/04
MTI-E048	Amplifier	Agilent	8449B	3008A02400	2020/07/03	2021/07/04
MTI-E072	Thermometer Clock Humidity Monitor	-	HTC-1	/	2020/06/07	2021/06/06
MTI-E090	Test Loop Antenna	DATETEK	LA-001	771409634	2020/06/05	2021/06/04

Note: the calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

5 Test Results

5.1 Antenna requirement

5.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

5.1.2 EUT Antenna

The EUT antenna is Coil Antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.

5.2 Conducted emission

5.2.1 Limits

For the following equipment, when designed to be connected to the public utility (AC) power line the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.5 -5	56	46
5 -30	60	50

Note:

the limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

5.2.2 Test Procedures

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.


Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN is at least 80 cm from nearest part of EUT chassis.

For the actual test configuration, please refer to the related Item – photographs of the test setup.


5.2.3 Test Setup

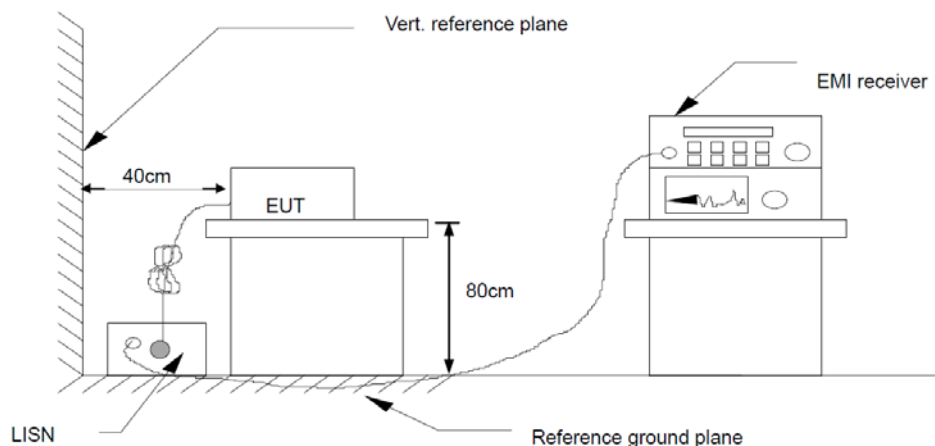

5.2.4 Test Result




EUT:	OL DESK LAMP	Model Name:	OL
Pressure:	101kPa	Phase:	L
Test voltage:	AC 120V/60Hz	Test mode:	Mode 1

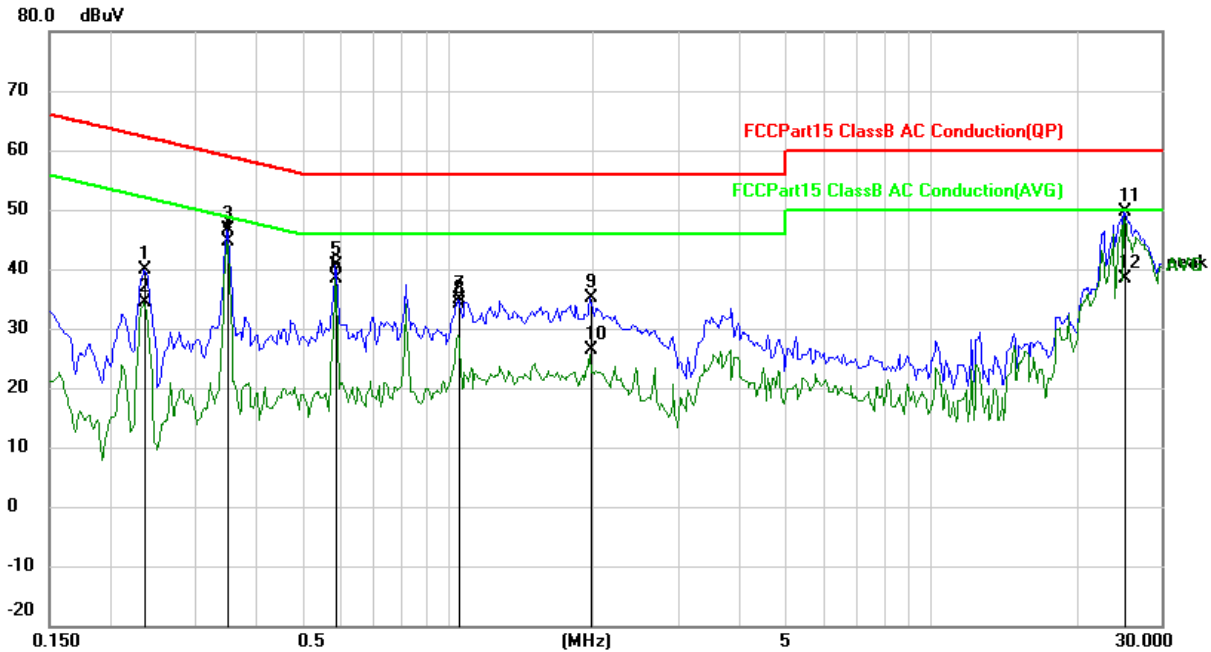

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.2359	30.22	9.74	39.96	62.24	-22.28	QP
2		0.2359	24.67	9.74	34.41	52.24	-17.83	AVG
3		0.3492	36.78	9.82	46.60	58.98	-12.38	QP
4	*	0.3492	34.71	9.82	44.53	48.98	-4.45	AVG
5		0.5875	30.71	9.94	40.65	56.00	-15.35	QP
6		0.5875	28.48	9.94	38.42	46.00	-7.58	AVG
7		1.0523	24.81	9.99	34.80	56.00	-21.20	QP
8		1.0523	24.21	9.99	34.20	46.00	-11.80	AVG
9		1.9781	25.03	10.01	35.04	56.00	-20.96	QP
10		1.9781	16.38	10.01	26.39	46.00	-19.61	AVG
11		25.0977	39.17	10.36	49.53	60.00	-10.47	QP
12		25.0977	27.94	10.36	38.30	50.00	-11.70	AVG




EUT:	OL DESK LAMP	Model Name:	OL
Pressure:	101kPa	Phase:	N
Test voltage:	AC 120V/60Hz	Test mode:	Mode 1

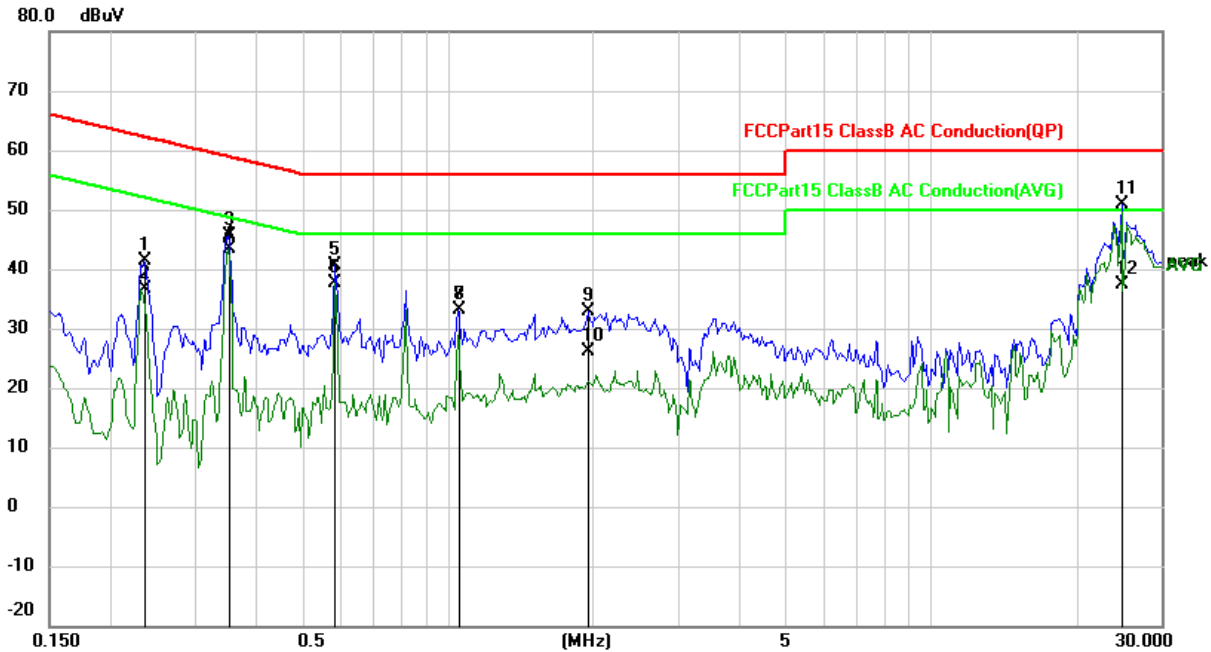

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2359	31.59	9.74	41.33	62.24	-20.91	QP
2		0.2359	26.88	9.74	36.62	52.24	-15.62	AVG
3		0.3531	35.92	9.82	45.74	58.89	-13.15	QP
4	*	0.3531	33.51	9.82	43.33	48.89	-5.56	AVG
5		0.5836	30.79	9.94	40.73	56.00	-15.27	QP
6		0.5836	27.77	9.94	37.71	46.00	-8.29	AVG
7		1.0523	23.15	9.99	33.14	56.00	-22.86	QP
8		1.0523	23.17	9.99	33.16	46.00	-12.84	AVG
9		1.9586	22.95	10.01	32.96	56.00	-23.04	QP
10		1.9586	16.01	10.01	26.02	46.00	-19.98	AVG
11		24.8750	40.56	10.35	50.91	60.00	-9.09	QP
12		24.8750	27.05	10.35	37.40	50.00	-12.60	AVG




EUT:	OL DESK LAMP	Model Name:	OL
Pressure:	101kPa	Phase:	L
Test voltage:	AC 240V/60Hz	Test mode:	Mode 1

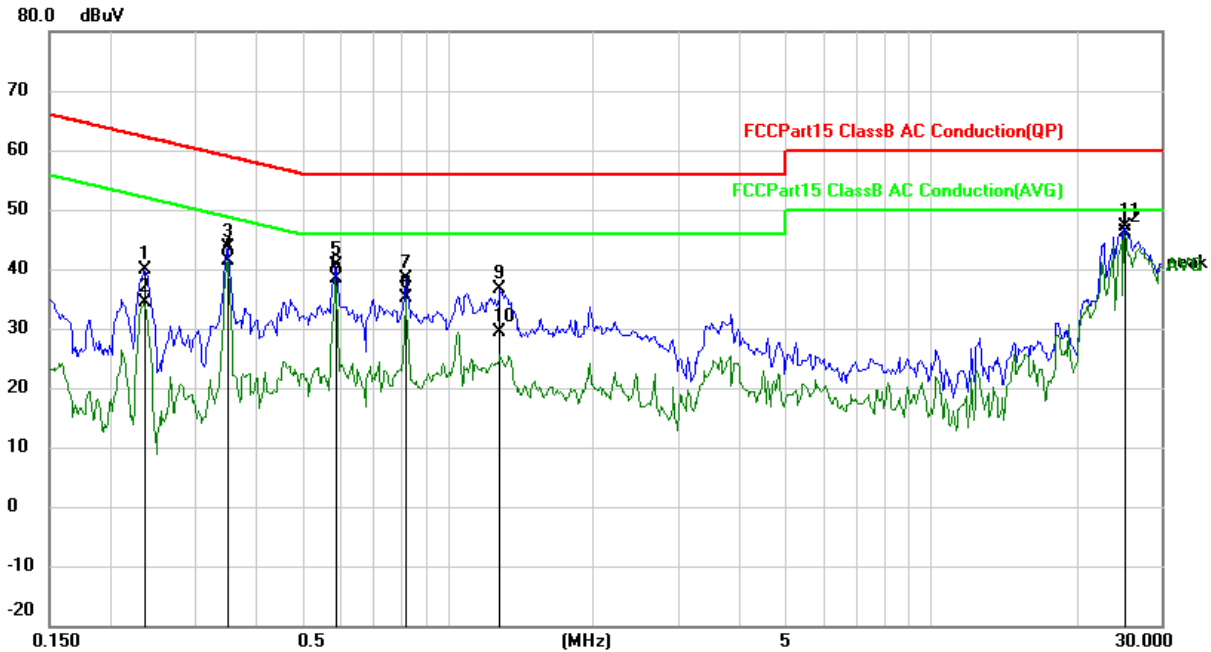

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.2358	30.22	9.74	39.96	62.24	-22.28	QP
2		0.2358	24.67	9.74	34.41	52.24	-17.83	AVG
3		0.3502	33.86	9.82	43.68	58.96	-15.28	QP
4		0.3502	31.63	9.82	41.45	48.96	-7.51	AVG
5		0.5875	30.71	9.94	40.65	56.00	-15.35	QP
6		0.5875	28.48	9.94	38.42	46.00	-7.58	AVG
7		0.8175	28.37	9.97	38.34	56.00	-17.66	QP
8		0.8175	25.23	9.97	35.20	46.00	-10.80	AVG
9		1.2823	26.53	10.00	36.53	56.00	-19.47	QP
10		1.2823	19.50	10.00	29.50	46.00	-16.50	AVG
11		25.0975	36.67	10.36	47.03	60.00	-12.97	QP
12	*	25.0975	35.87	10.36	46.23	50.00	-3.77	AVG



EUT:	OL DESK LAMP	Model Name:	OL
Pressure:	101kPa	Phase:	N
Test voltage:	AC 240V/60Hz	Test mode:	Mode 1

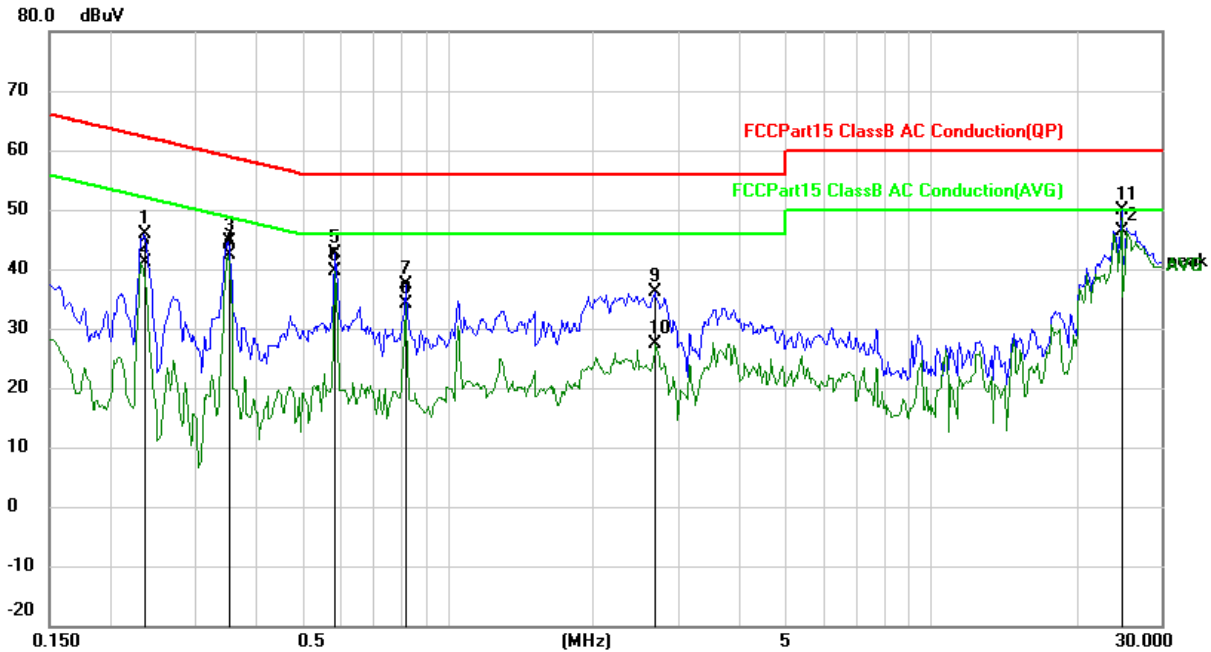

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2358	36.09	9.74	45.83	62.24	-16.41	QP
2		0.2358	31.38	9.74	41.12	52.24	-11.12	AVG
3		0.3531	34.92	9.82	44.74	58.89	-14.15	QP
4		0.3531	32.51	9.82	42.33	48.89	-6.56	AVG
5		0.5835	32.79	9.94	42.73	56.00	-13.27	QP
6		0.5835	29.77	9.94	39.71	46.00	-6.29	AVG
7		0.8175	27.37	9.97	37.34	56.00	-18.66	QP
8		0.8175	24.19	9.97	34.16	46.00	-11.84	AVG
9		2.6890	26.06	10.03	36.09	56.00	-19.91	QP
10		2.6890	17.29	10.03	27.32	46.00	-18.68	AVG
11		24.8750	39.56	10.35	49.91	60.00	-10.09	QP
12	*	24.8750	35.92	10.35	46.27	50.00	-3.73	AVG

5.3 Radiated emission

5.3.1 Limits

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

The limit for radiated test was performed according to FCC PART 15C.

The tighter limit applies at the band edges.

Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP

Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP
------------------------	----------------------------------


5.3.2 Test Procedures

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.
- h. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.


Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

5.3.3 Test Setup

Radiated Emission Test-Up Frequency Below 30MHz

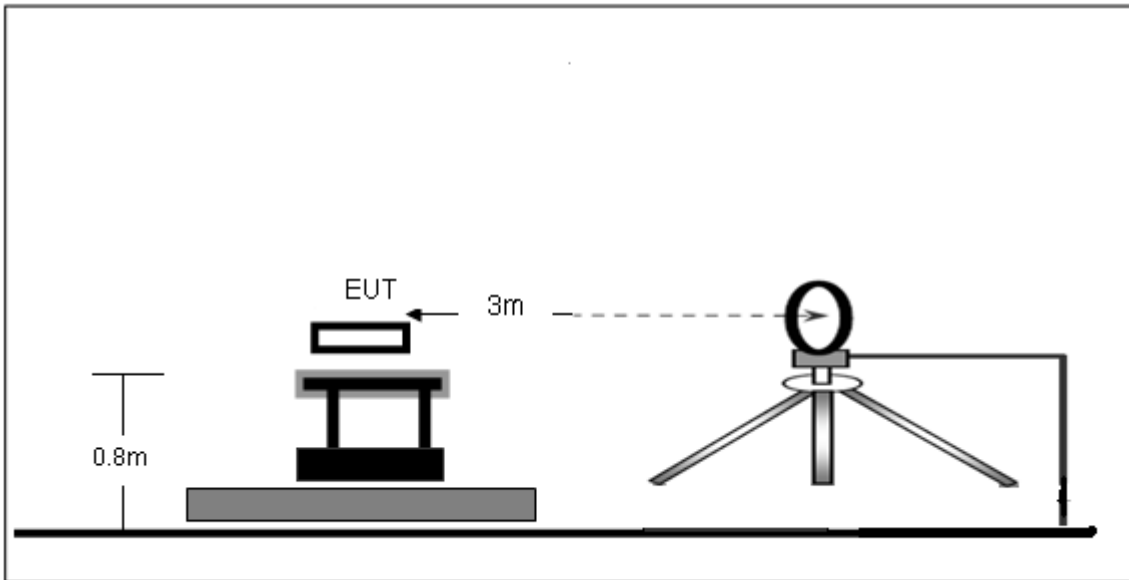


Radiated Emission Test-Up Frequency 30MHz~1GHz

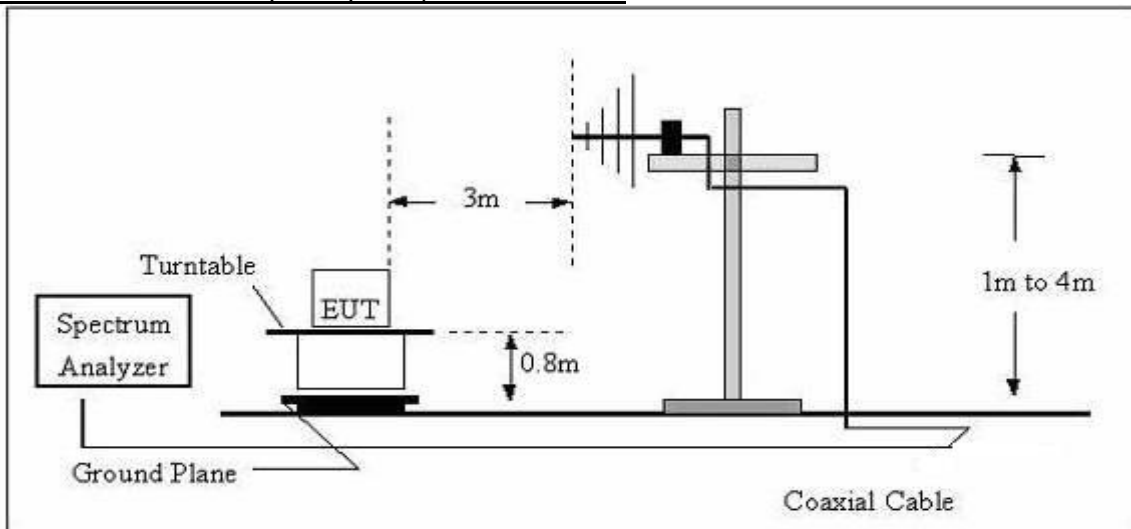

5.3.4 Test Result

Frequency range (9kHz – 30MHz)


EUT:	OL DESK LAMP	Model Name:	OL
Pressure:	101kPa	Test mode:	Mode 1
Test voltage:	AC 120V/60Hz		

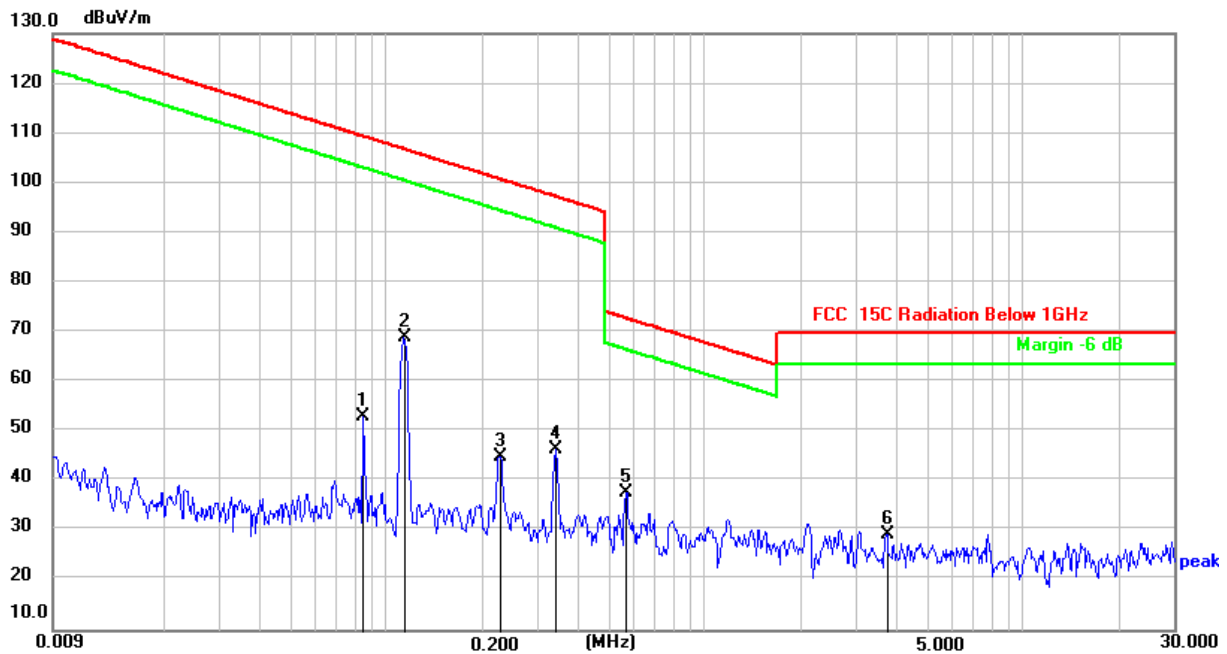

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0851	32.48	20.66	53.14	109.01	-55.87	peak
2	0.1190	48.48	20.43	68.91	106.47	-37.56	peak
3	0.2290	24.78	20.17	44.95	100.41	-55.46	peak
4	0.3407	26.13	20.24	46.37	96.96	-50.59	peak
5 *	0.5681	17.51	20.38	37.89	72.52	-34.63	peak
6	3.7607	9.25	20.24	29.49	69.50	-40.01	peak

Frequency range (30MHz – 1GHz)


EUT:	OL DESK LAMP	Model Name:	OL
Pressure:	101kPa	Polarization:	Vertical
Test voltage:	AC 120V/60Hz	Test mode:	Mode 1

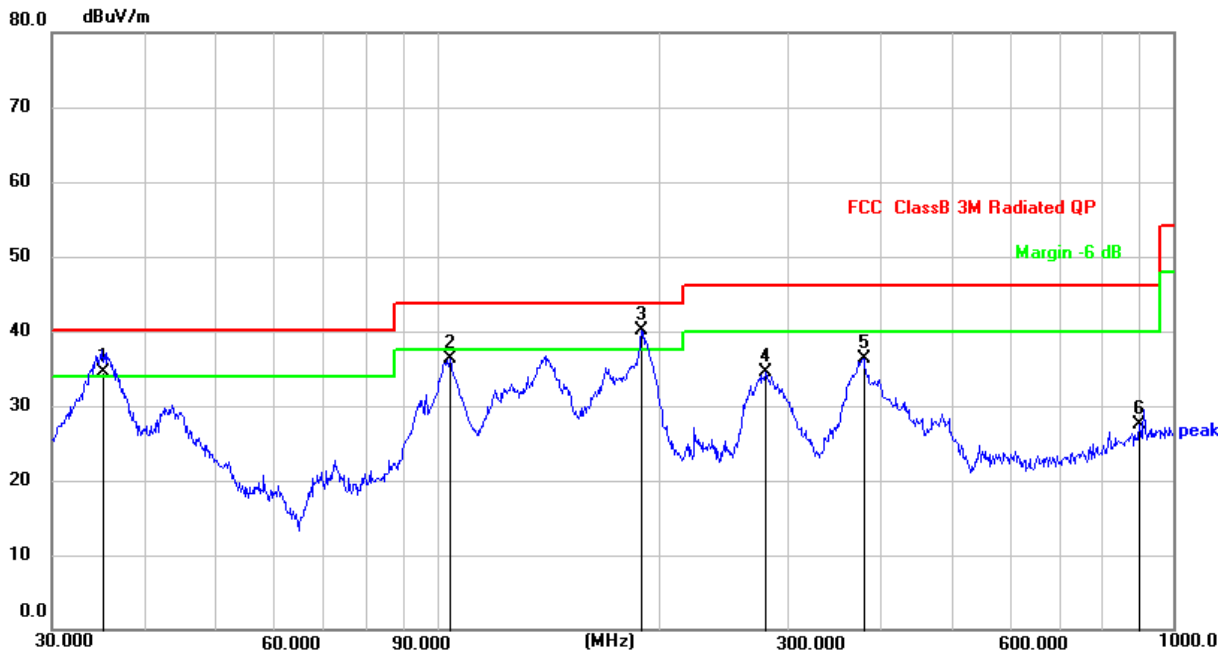

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	35.1278	49.80	-15.20	34.60	40.00	-5.40	QP
2	104.1701	51.11	-14.75	36.36	43.50	-7.14	peak
3 *	189.7385	54.54	-14.41	40.13	43.50	-3.37	peak
4	279.0436	45.56	-11.12	34.44	46.00	-11.56	peak
5	379.9141	45.60	-9.28	36.32	46.00	-9.68	peak
6	900.1474	27.29	0.26	27.55	46.00	-18.45	peak



EUT:	OL DESK LAMP	Model Name:	OL
Pressure:	101kPa	Polarization:	Horizontal
Test voltage:	AC 120V/60Hz	Test mode:	Mode 1

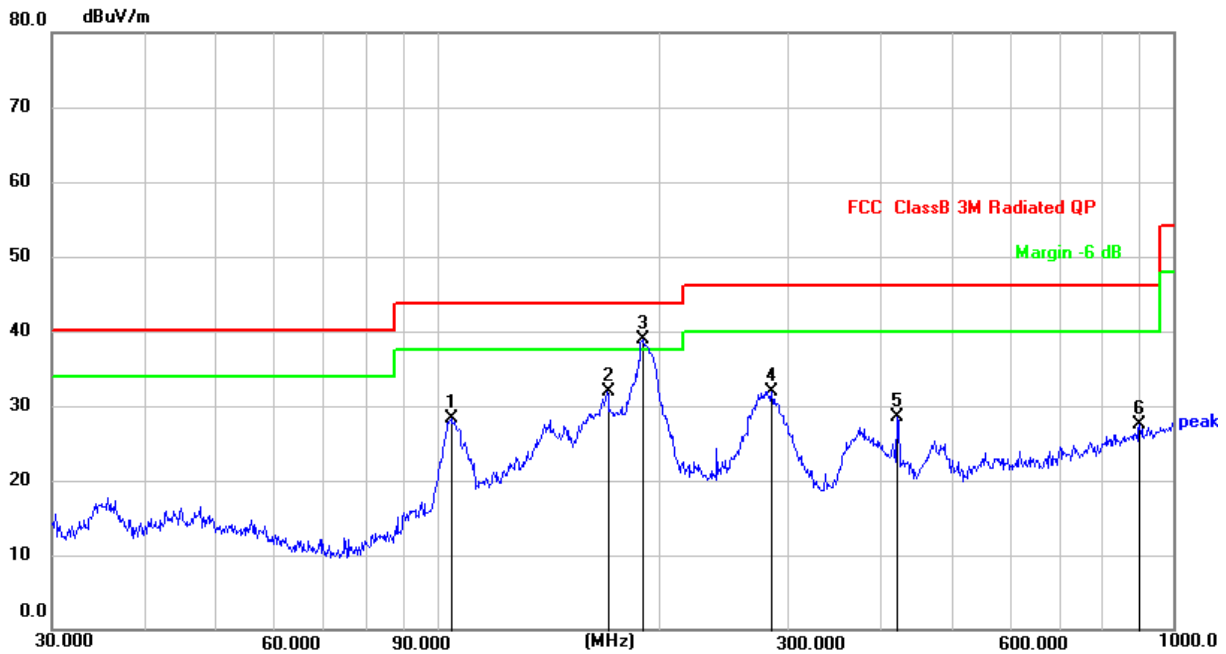

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	104.5361	43.02	-14.76	28.26	43.50	-15.24	QP
2	170.1948	47.91	-16.07	31.84	43.50	-11.66	QP
3 *	190.4050	53.22	-14.35	38.87	43.50	-4.63	QP
4	284.9767	42.89	-10.94	31.95	46.00	-14.05	QP
5	422.0577	37.01	-8.56	28.45	46.00	-17.55	QP
6	900.1474	27.19	0.26	27.45	46.00	-18.55	QP

5.4 Occupied bandwidth

5.4.1 Test method

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq 1\%$ of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak


Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth and 99% occupied bandwidth of the emission.

5.4.2 Test result


Frequency (kHz)	20dB emission bandwidth (kHz)	99% occupied bandwidth (kHz)
125	8.109	6.903

Test plots as below:

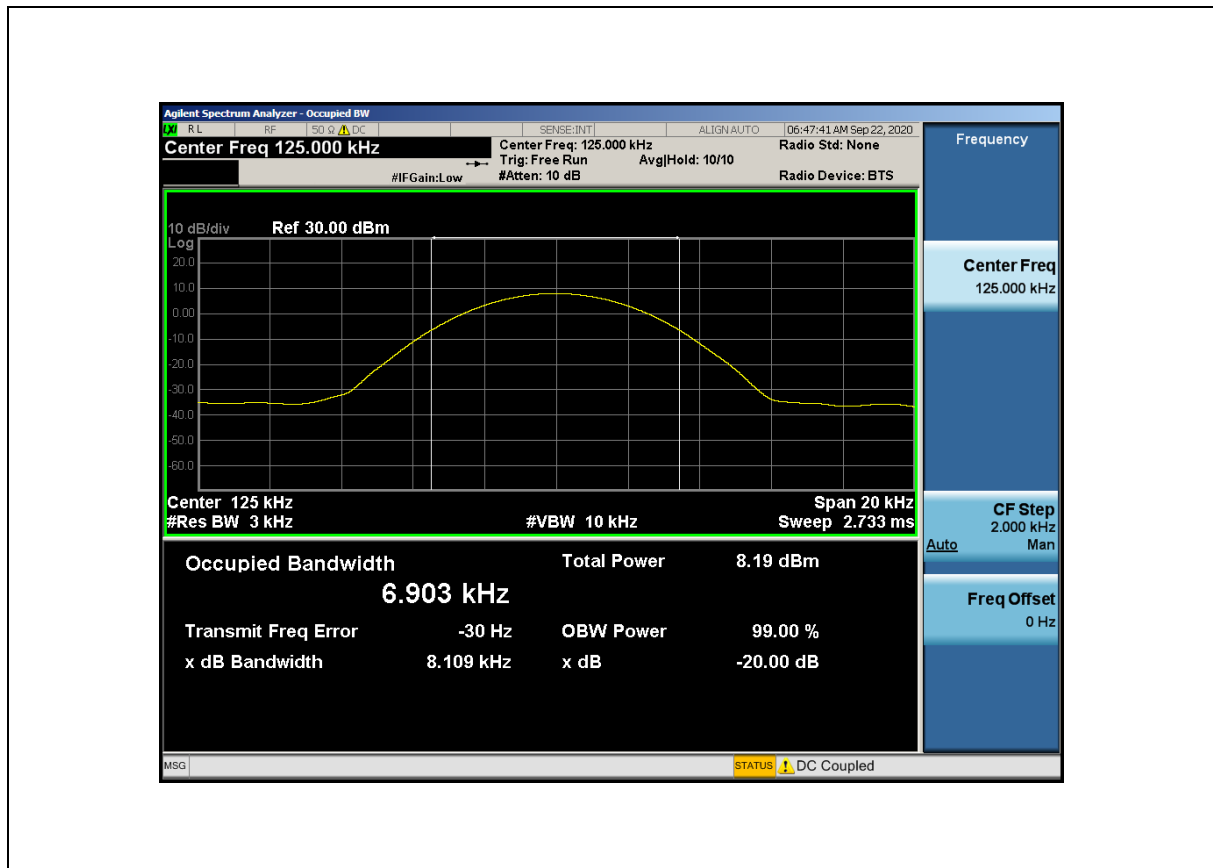

Photographs of the Test Setup

Radiated emission

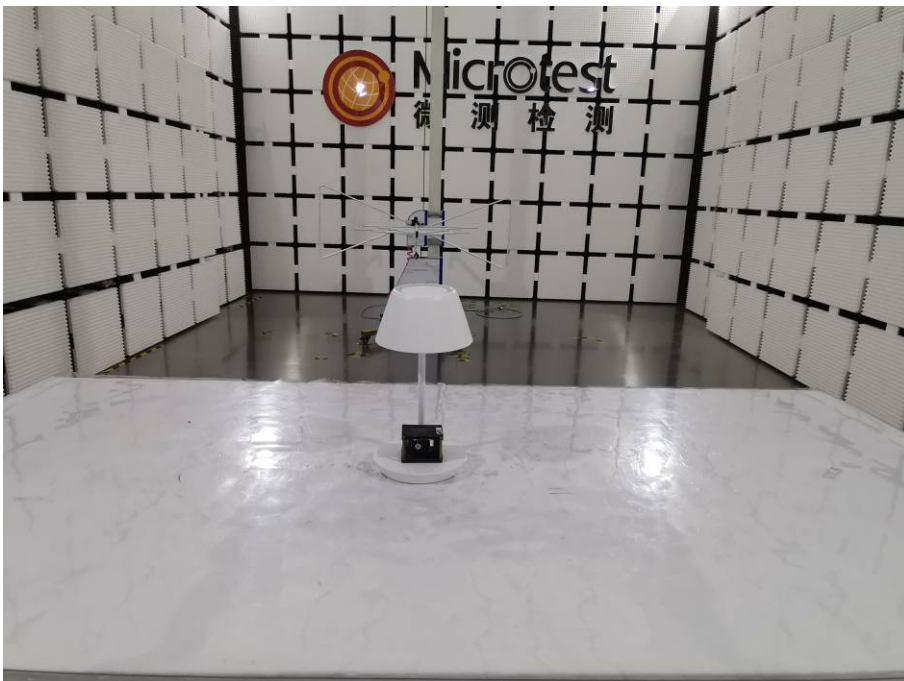

Conducted emission





Photographs of the EUT

See the APPENDIX 1: EUT PHOTOS in the report No.: MTi20090801-1E1-1.

----END OF REPORT----