

Q40MRP1012801A

客户 Customer GOGET

型号 Model G307-001

销向 Sales Area EU/US

安规签核 Safety parts:

Yes No

内销中文字体要求高度1.8mm以上

Yes No

针对带有ULI logo的标签,其厂家须在
最小包装上标示UL Recognized
Component Mark  公司名称,
型号及 UL file no.

条码印刷:
barcode print:

1. 所有条码读码等级: C级及以上,
客户有特殊要求除外;

REVISION

VERSION A

版本变更说明:

Version Changed Description:

备注 Remark:


xiaoling.zheng
Sep-16-19

嘉捷科技(福清)有限公司
TPV Electronics (Fujian) Co., Ltd.

地址(Add): 中国福建省福清市元洪路上郑
Shangzhen,Yuanhong Road, Fuqing City,
Fujian Province, China

电话(Tel): +86-591-85285555 85285559
传真(Fax): +86-591-85285447

邮编(Postcode): 350301

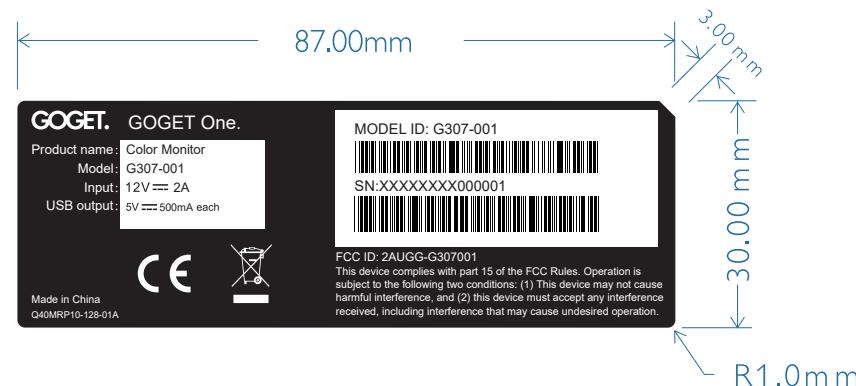

请注意,此label需要覆特殊雾膜,
避免无感刮伤

NOTE:

1. 印刷如上图

Printing as the drawing

2. 尺寸: 具体见上图所示 (公差: +/-0.2mm), R=2mm

Dimension: as the above drawing (Tolerance: +/-0.2mm), R=2mm

3. 材质: 50#防刮PET带不干背胶

Material: 50#PET with glue on the backside (material must be certified by UL laboratory)

4. 底色: 黑色; 字体颜色: 银色

Background color: Black, Font color: Silver

5. 贴附位置: 后壳定位框内

6. 粘力: 将label切成25mm宽, 一端粘贴于钢板上, 以180°方向的力拉胶带另一端, 所得拉力即为粘力。用粘力测试仪进行测试。
Stickiness strength: Cut label into 25mm width, one end paste on the plate, with 180° direction pulling the other end of the tape, the pull is stickiness strength. With stickiness strength instrument for testing.

7. 正常耐温测试: 在钢板上耐温范围为-20~100°C, 在80~100°C保持8小时后不翘角,不分层,不脱落,不起泡等。

在塑胶、纸箱上耐温范围-20~65°C, 在65°C保持8小时后不翘角,不分层,不脱落,不起泡等。

The normal temperature test: The range of temperature on plate is -20~100 °C. In 80~100 °C to maintain 8 hours, the label should not be warp, delamination, frothy and so on. The range of temperature on plastic and carton is -20~65 °C. In 65 °C to maintain 8 hours, the label should not be warp, delamination, frothy and so on.

8. 耐温湿度循环测试: 循环条件(贴在塑胶胶花面(PET) 贴在塑胶胶花面): 温度-20~65°C, 湿度30~90%,
时间96小时后不翘角不分层不脱落不起泡等。

Temperature and humidity cycle test: Cycle conditions(stick on texture(PET), stick on texture): In temperature of -20~65 °C and humidity of 30~90% to maintain 96 hours, the label should not be warp, delamination, frothy and so on.

9. 截裁需均匀且印刷不可有溢墨及颜色不均等不良现象。

Printing ink can not have overflow and printing color can not be uneven etc.

10. 包装方式: 卷状, 连接处打齿孔。

Packing style: coil and there should be a toothed hole between the link of two pieces


11. 两张连接处距离3mm, 左右边离型纸3mm(公差: +/-0.5mm).

3mm should be left between the link of two pieces. Around the edge of paper distance is 3mm(Tolerance: +/-0.5mm)

12. 内容由厂内打印, 具体内容由业务提供。

The content printed by the factory barcode group and the specific content provided by SS.

13. 其它测试要求详见 (FQ-背胶类产品测试检验规格)。

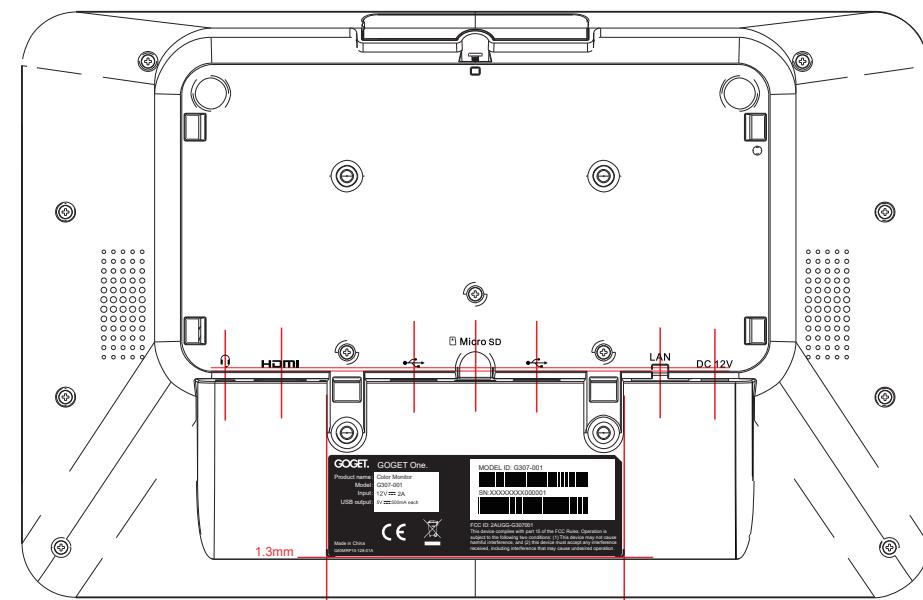

1) According to the rule about RoHS of TPV, all raw material and auxiliary material should accord with the rule of RoHS

2) All the stated substance of raw material: the actual content of

Cd/Hg/Pb/Cr/PBB's/PBDE's and Cd+Hg+Pb+Cr (at the packing material with the product), should accord with the latest version of RD EMS-01 <<The controlled standard about environment substance for supplier>>.

TPV
VISION INNOVATOR

冠捷科技
用心專注 領航視界