

FCC CFR47 PART 22H, 24E, 27 CERTIFICATION TEST REPORT

FCC ID: 2AUHC-CTIP401

Product: 4G Smart phone
Trade Mark: CommuniTake
Model Number: CTIP401
Family Model: N/A
Report No.: S19082902506006

Prepared for

CommuniTake Technologies Ltd.

Yokneam Star Building, High-Tech Park, POB 344, Yokneam, Israel 2069205

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District
Shenzhen, Guangdong, China
Tel.: +86-755-6115 9388 Fax.: +86-755-6115 6599
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : CommuniTake Technologies Ltd.
Address : Yokneam Star Building, High-Tech Park, POB 344, Yokneam, Israel 2069205
Manufacturer's Name : Shenzhen Joyhong Technology Co., Ltd.
Address : Building A2, Xihu Second Industrial Park, Zhongtai Road, Guangming, Bao'an, Shenzhen, Guangdong, China
Product name : 4G Smart phone
Model and/or type reference : CTIP401
Family Model: N/A
Standards : FCC CFR 47 Part 22H, Part 24E, Part 27
Test procedure : ANSI C63.26:2015
ANSI/TIA-603-E-2016

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test :
Date (s) of performance of tests : 20 Dec. 2019 ~ 04 Jun 2020
Date of Issue : 04 Jun, 2020
Test Result : Pass

Testing Engineer : (Mary Hu)
Technical Manager : (Jason Chen)
Authorized Signatory : (Sam Chen)

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION	5
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	7
1.3 TEST METHODOLOGY.....	7
1.4 TEST FACILITY.....	7
MEASUREMENT UNCERTAINTY	7
1.5 SPECIAL ACCESSORIES.....	7
2. SYSTEM TEST CONFIGURATION	8
2.1 EUT CONFIGURATION.....	8
2.2 EUT EXERCISE	8
2.3 CONFIGURATION OF EUT SYSTEM.....	8
2.4 TEST SETUP.....	9
3.TEST AND MEASUREMENT EQUIPMENT	10
4. OUTPUT POWER.....	11
4.1 OUTPUT POWER MEASUREMENT	11
6. BANEDGE AND EMISSION MASK	14
7. OUT OF BAND EMISSIONS.....	16
8. RADIATED MEASUREMENT	17
8.1. RADIATED POWER (ERP & EIRP).....	17
8.2 LTE BAND 2	18
8.3 LTE BAND 4	22
8.4 LTE BAND 5	26
8.5 LTE BAND 7	28
8.6 LTE BAND 12	30
8.7 LTE BAND 13	32

8.8 LTE BAND 25	34
8.9 LTE BAND 26	38
8.10 LTE BAND 41	42
9. SPURIOUS RADIATION EMISSION	44
9.2 LTE BAND 4	48
9.3 LTE BAND 5	50
9.4 LTE BAND 7	52
9.5 LTE BAND 12	54
9.6 LTE BAND 13	56
9.7 LTE BAND 25	58
9.8 LTE BAND 26	60
9.9 LTE BAND 41	64
10. FREQUENCY STABILITY	66
10.1 LTE BAND 2	67
10.2 LTE BAND 4	69
10.3 LTE BAND 5	71
10.4 LTE BAND 7	73
10.5 LTE BAND 12	75
10.6 LTE BAND 13	77
10.7 LTE BAND 25	79
10.7 LTE BAND 26	81
10.10 LTE BAND 41	85
11. PEAK-TO-AVERAGE RATIO	87
11.1 Description of the PAR Measurement	87
11.2 Measuring Instruments	87
11.3 Test Procedures	87
11.4 Test Setup	88

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	4G Smart phone
Trade Mark	CommuniTake
Model Name	CTIP401
Family Model	N/A
Model Difference	N/A
FCC ID:	2AUHC-CTIP401
Frequency Bands:	U.S. Bands: <input checked="" type="checkbox"/> LTE FDD Band 2,4,5,7,12,13,25,26 LTE TDD Band 41
Frequency Range:	LTE FDD Band 2 Uplink: 1850MHz-1910MHz, Downlink: 1930MHz-1990MHz; LTE FDD Band 4 Uplink: 1710MHz-1755MHz, Downlink: 2110MHz-2155MHz; LTE FDD Band 5 Uplink: 824MHz-849MHz, Downlink: 869MHz-894MHz; LTE-FDD Band 7 Uplink: 2500MHz-2570MHz, Downlink: 2620MHz-2690MHz; LTE FDD Band 12 Uplink: 699MHz-716MHz, Downlink: 729MHz-746MHz; LTE FDD Band 13 Uplink: 777MHz-787MHz, Downlink: 746MHz-756MHz; LTE FDD Band 25 Uplink: 1850MHz-1915MHz, Downlink: 1930MHz-1995MHz; LTE FDD Band 26 Uplink: 814MHz-849MHz, Downlink: 859MHz-894MHz(Number Of Channel see note 2); LTE TDD Band 41 Uplink: 2555MHz-2655MHz Downlink: 2555MHz-2655MHz (Number Of Channel see note 3)
Type of Modulation:	QPSK/16QAM
SIM Card	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.
Antenna:	FPC Antenna
Antenna gain:	0.5dBi
Power Supply:	DC 3.8V/3000mAh from Battery or DC 5V from adapter.
Adapter:	Model: SR-C50501000U1 Input: 100-240V~50/60Hz 0.2A

	Output: 5.0V $\overline{\text{---}}$ 1000mA
Extreme Vol. Limits:	DC 3.2V to DC4.4V (Nominal DC 3.8V) (Note 1)
HW Version	PD3S23CBG1A
SW Version	PD3S23.ZGW.F5732.HB.P0.HP.H6.0626.V0.04

** Note1: The High Voltage DC4.4V and Low Voltage 3.2V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.

Note 2:

Test Frequency ID	Bandwidth(MHz)	EARFCN	Frequency (UL and DL) (MHz)
Low Range	1.4	26697	814.7
	3	26705	815.5
	5	26715	816.5
	10	26740	819
Mid Range	1.4/3/5/10	26740	819.0
High Range	1.4	26783	823.3
	3	26775	822.5
	5	26765	821.5
	10	26740	819

Test Frequency ID	Bandwidth(MHz)	EARFCN	Frequency (UL and DL) (MHz)
Low Range	1.4	26797	824.7
	3	26805	825.5
	5	26815	826.5
	10	26840	829
	15	26865	831.5
Mid Range	1.4/3/5/10/15	26915	836.5
High Range	1.4	27033	848.3
	3	27025	847.5
	5	27015	846.5
	10	26990	844
	15	26965	841.5

Note 3:

Test Frequency ID	Bandwidth(MHz)	EARFCN	Frequency (UL and DL) (MHz)
Low Range	5	40265	2602.5
	10	40290	2600
	15	40315	2597.5
	20	40340	2595
Mid Range	5/10/15/20	40740	2605
High Range	5	41215	2615
	10	41190	2610
	15	41165	2612.5
	20	41140	2617.5

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AUHC-CTIP401** filing to comply with the FCC Part 22H&24E &27&Part 90S.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, Part 90 ANSI C63.26:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R.China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5dB

1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.6 WORST-CASE CONFIGURATION AND MODE
The worst-case scenario for all measurements is based on the investigation results.

The device has LTE Bands of: Band 2, Band 4, Band 5, Band 7, Band 12, Band 13, Band 25, Band 26, Band 41

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM


Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	4G Smart phone	CTIP401	FCC ID: 2AUHC-CTIP401	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP

CONDUCTED SETUP DIAGRAM FOR TESTS

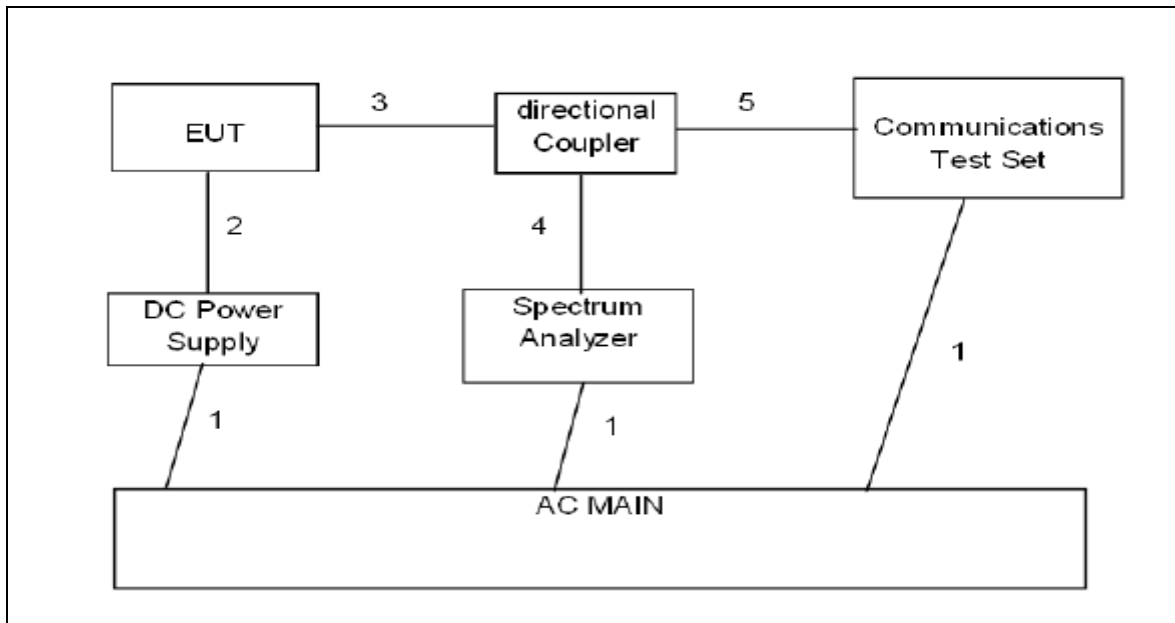

RADIATED SETUP DIAGRAM FOR TESTS

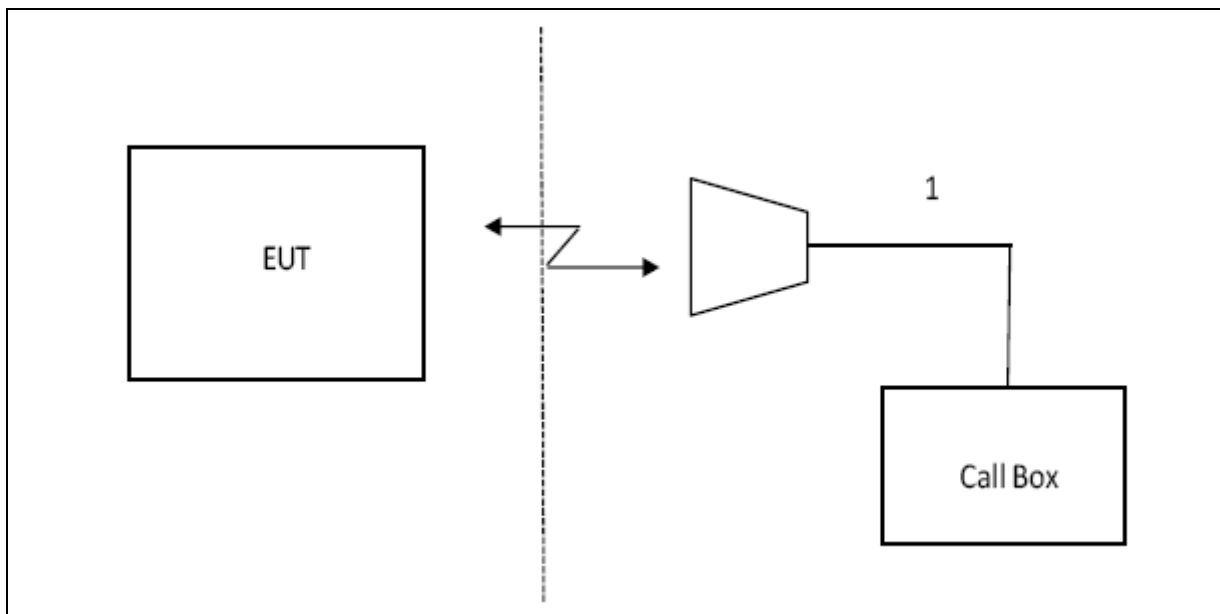

3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	NEXT CAL. DATE
SPECTRUM ANALYZER	AGILENT	N9020A	MY49100060	2020.08.27
TEST RECEIVER	R&S	ESCI	A0304218	2021.05.11
COMMUNICATION TESTER	R&S	CMU200	117858	2021.05.11
COMMUNICATION TESTER	R&S	CMW500	148500	2021.05.11
TEST RECEIVER	R&S	ESPI	101318	2021.05.11
LISN	SCHWARZBECK	NSLK8127	A0304233	2021.05.11
CLIMATE CHAMBER	ALBATROSS	--	--	2021.05.11
Loop Antenna	ARA	PLA-1030/B	1029	2021.05.11
Biological Antenna	TESEQ	CBL6111D	31216	2021.05.11
Horn Antenna	EM	EM-AH-10180	2011071402	2021.05.11
DC Power Source	N/A	PS-6005D	20170402923	2021.05.11

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

LTE Measurement Procedure:

All LTE bands conducted power peak and average are obtained from the CMW500 telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

- LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 25
- LTE Band 26
- LTE Band 41

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, §27.53, and §90.691

FCC: §22.359

LIMITS

FCC: §22.359, §24.238, §27.53, §90.691

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Show citation box.

(c)(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by greater than 37.5 kHz is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by up to and including 37.5 kHz is $50 + 10 \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

TEST PROCEDURE

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency (704, 716, 824, 849, 1710 and 1755, 1850 and 1910MHz)

Set a marker to point the corresponding band edge frequency in each test case.

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

- LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 25
- LTE Band 26
- LTE Band 41

RESULTS

Test data reference attachment.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238 and §27.53§90.691

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

-
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

LTE Band 2
LTE Band 4
LTE Band 5
LTE Band 7
LTE Band 12
LTE Band 13
LTE Band 25
LTE Band 26
LTE Band 41

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232 and §27.50, §90S

LIMITS:

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.

27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.

27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

27.50 (h)(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

90.635 (b) The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, "Measurement Guidance for Certification of Licensed Digital Transmitters"

MODES TESTED

LTE Band 2
LTE Band 4
LTE Band 5
LTE Band 7
LTE Band 12
LTE Band 13
LTE Band 25
LTE Band 26
LTE Band 41

RESULTS

Pass

8.2 LTE BAND 2

Radiated Power (EIRP) for Band 2										
Mode	RB/ RB SIZE	Frequency	Result						Polarizati on Of Max. ERP	Conclusio n
			SG Level (dBm)	Cable Loss (dBm)	Antenn a Gain (dB)	Max. EIRP Avera ge (dBm)	Max. EIRP			
							Average (mW)			
1.4MHz Band QPSK	6/0	1850.7	-1.80	3.76	28.24	22.68	185.32	Horizontal	Pass	
		1880	-0.86	3.91	28.22	23.45	221.26	Horizontal	Pass	
		1909.3	-1.56	3.93	28.20	22.71	186.80	Horizontal	Pass	
3.0MHz Band QPSK	15/0	1851.5	-1.16	3.77	28.23	23.30	213.65	Horizontal	Pass	
		1880	-2.08	3.91	28.24	22.25	167.87	Horizontal	Pass	
		1908.5	-1.34	3.94	28.25	22.97	198.33	Horizontal	Pass	
5.0MHz Band QPSK	25/0	1852.5	-1.78	3.77	28.31	22.76	188.65	Horizontal	Pass	
		1880	-1.19	3.91	28.22	23.12	205.03	Horizontal	Pass	
		1907.5	-1.47	3.94	28.20	22.79	190.27	Horizontal	Pass	
10.0MHz Band QPSK	50/0	1855	-1.99	3.79	28.33	22.55	179.98	Horizontal	Pass	
		1880	-0.70	3.95	28.22	23.57	227.26	Horizontal	Pass	
		1905	-1.34	3.97	28.19	22.88	194.05	Horizontal	Pass	
15.0MHz Band QPSK	75/0	1857.5	-1.53	3.79	28.34	23.02	200.48	Horizontal	Pass	
		1880	-1.36	3.95	28.22	22.91	195.65	Horizontal	Pass	
		1902.5	-1.38	3.97	28.18	22.83	191.83	Horizontal	Pass	
20.0MHz Band QPSK	100/ 0	1860	-2.38	3.81	28.35	22.16	164.37	Horizontal	Pass	
		1880	-1.75	3.96	28.22	22.51	178.37	Horizontal	Pass	
		1900	-1.63	4.00	28.16	22.53	178.94	Horizontal	Pass	
1.4MHz Band QPSK	6/0	1850.7	-1.84	3.76	28.24	22.64	183.50	Vertical	Pass	
		1880	-1.35	3.91	28.22	22.96	197.75	Vertical	Pass	
		1909.3	-0.55	3.93	28.20	23.72	235.30	Vertical	Pass	
3.0MHz Band QPSK	15/0	1851.5	-1.06	3.77	28.23	23.40	218.58	Vertical	Pass	
		1880	-0.72	3.91	28.24	23.61	229.73	Vertical	Pass	
		1908.5	-1.23	3.94	28.25	23.08	203.02	Vertical	Pass	
5.0MHz Band QPSK	25/0	1852.5	-1.11	3.77	28.31	23.43	220.14	Vertical	Pass	
		1880	-0.51	3.91	28.22	23.80	239.76	Vertical	Pass	
		1907.5	-1.28	3.94	28.20	22.98	198.72	Vertical	Pass	
10.0MHz Band QPSK	50/0	1855	-1.38	3.79	28.33	23.16	206.92	Vertical	Pass	
		1880	-1.47	3.95	28.22	22.80	190.69	Vertical	Pass	
		1905	-0.82	3.97	28.19	23.40	218.76	Vertical	Pass	

15.0MHz Band QPSK	75/0	1857.5	-2.03	3.79	28.34	22.52	178.85	Vertical	Pass
		1880	-0.91	3.95	28.22	23.36	216.68	Vertical	Pass
		1902.5	-0.92	3.97	28.18	23.29	213.25	Vertical	Pass
20.0MHz Band QPSK	100/0	1860	-1.80	3.81	28.35	22.74	187.93	Vertical	Pass
		1880	-0.43	3.96	28.22	23.83	241.55	Vertical	Pass
		1900	-0.44	4.00	28.16	23.72	235.50	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 2									
Mode	RB/ RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Averag e (mW)	Polarizati on Of Max. ERP	
1.4MHz Band 16 QAM	6/0	1850.7	-2.25	3.76	28.24	22.23	167.25	Horizontal	Pass
		1880	-1.59	3.91	28.22	22.72	187.07	Horizontal	Pass
		1909.3	-1.82	3.93	28.20	22.45	175.99	Horizontal	Pass
3.0MHz Band 16 QAM	15/0	1851.5	-2.23	3.77	28.23	22.23	167.24	Horizontal	Pass
		1880	-2.72	3.91	28.24	21.61	144.79	Horizontal	Pass
		1908.5	-2.79	3.94	28.25	21.52	141.85	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	1852.5	-2.53	3.77	28.31	22.01	158.93	Horizontal	Pass
		1880	-2.69	3.91	28.22	21.62	145.14	Horizontal	Pass
		1907.5	-2.24	3.94	28.20	22.02	159.10	Horizontal	Pass
10.0MHz z Band 16 QAM	50/0	1855	-3.22	3.79	28.33	21.32	135.63	Horizontal	Pass
		1880	-2.52	3.95	28.22	21.75	149.71	Horizontal	Pass
		1905	-1.53	3.97	28.19	22.69	185.76	Horizontal	Pass
15.0MHz z Band 16 QAM	75/0	1857.5	-2.81	3.79	28.34	21.74	149.13	Horizontal	Pass
		1880	-2.37	3.95	28.22	21.90	154.95	Horizontal	Pass
		1902.5	-1.81	3.97	28.18	22.40	173.84	Horizontal	Pass
20.0MHz z Band 16 QAM	100/0	1860	-3.81	3.81	28.35	20.73	118.38	Horizontal	Pass
		1880	-2.05	3.96	28.22	22.21	166.37	Horizontal	Pass
		1900	-2.96	4.00	28.16	21.20	131.96	Horizontal	Pass
1.4MHz Band 16 QAM	6/0	1850.7	-3.16	3.76	28.24	21.32	135.60	Vertical	Pass
		1880	-2.05	3.91	28.22	22.26	168.11	Vertical	Pass
		1909.3	-1.56	3.93	28.20	22.71	186.66	Vertical	Pass
3.0MHz Band 16 QAM	15/0	1851.5	-2.30	3.77	28.23	22.16	164.61	Vertical	Pass
		1880	-1.72	3.91	28.24	22.61	182.37	Vertical	Pass
		1908.5	-2.00	3.94	28.25	22.31	170.18	Vertical	Pass
5.0MHz Band 16 QAM	25/0	1852.5	-2.34	3.77	28.31	22.20	165.87	Vertical	Pass
		1880	-2.36	3.91	28.22	21.95	156.64	Vertical	Pass
		1907.5	-2.44	3.94	28.20	21.82	152.21	Vertical	Pass
10.0MHz z Band 16 QAM	50/0	1855	-2.73	3.79	28.33	21.81	151.71	Vertical	Pass
		1880	-3.00	3.95	28.22	21.27	133.91	Vertical	Pass
		1905	-1.88	3.97	28.19	22.34	171.24	Vertical	Pass
15.0MHz z Band	75/0	1857.5	-3.21	3.79	28.34	21.34	136.19	Vertical	Pass
		1880	-1.80	3.95	28.22	22.47	176.64	Vertical	Pass

16 QAM		1902.5	-1.48	3.97	28.18	22.73	187.50	Vertical	Pass
20.0MHz Band 16 QAM	100/0	1860	-3.42	3.81	28.35	21.12	129.30	Vertical	Pass
		1880	-1.48	3.96	28.22	22.78	189.61	Vertical	Pass
		1900	-1.99	4.00	28.16	22.17	164.97	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.3 LTE BAND 4

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	6/0	1710.7	-1.82	3.12	27.58	22.64	183.66	Horizontal	Pass
		1732.5	-1.15	3.27	27.61	23.19	208.56	Horizontal	Pass
		1754.3	-1.91	3.29	27.63	22.43	175.11	Horizontal	Pass
3.0MHz Band QPSK	15/0	1711.5	-2.00	3.13	27.61	22.48	177.14	Horizontal	Pass
		1732.5	-1.69	3.27	27.61	22.65	184.00	Horizontal	Pass
		1753.5	-1.60	3.30	27.62	22.72	187.06	Horizontal	Pass
5.0MHz Band QPSK	25/0	1712.5	-1.73	3.13	27.63	22.77	189.34	Horizontal	Pass
		1732.5	-1.46	3.27	27.61	22.88	194.16	Horizontal	Pass
		1752.5	-1.73	3.30	27.60	22.57	180.92	Horizontal	Pass
10.0MHz Band QPSK	50/0	1715	-1.94	3.15	27.64	22.55	179.82	Horizontal	Pass
		1732.5	-1.61	3.31	27.61	22.69	185.68	Horizontal	Pass
		1750	-1.77	3.33	27.59	22.49	177.58	Horizontal	Pass
15.0MHz Band QPSK	75/0	1717.5	-2.30	3.15	27.65	22.20	165.79	Horizontal	Pass
		1732.5	-1.58	3.31	27.61	22.72	187.11	Horizontal	Pass
		1747.5	-1.62	3.33	27.57	22.62	182.65	Horizontal	Pass
20.0MHz Band QPSK	100/0	1720	-3.16	3.17	27.66	21.33	135.86	Horizontal	Pass
		1732.5	-1.44	3.32	27.61	22.85	192.81	Horizontal	Pass
		1745	-2.05	3.36	27.56	22.15	164.07	Horizontal	Pass
1.4MHz Band QPSK	6/0	1710.7	-1.50	3.12	27.58	22.96	197.84	Vertical	Pass
		1732.5	-1.61	3.27	27.61	22.73	187.53	Vertical	Pass
		1754.3	-1.67	3.29	27.63	22.67	185.13	Vertical	Pass
3.0MHz Band QPSK	15/0	1711.5	-1.90	3.13	27.61	22.58	181.10	Vertical	Pass
		1732.5	-1.59	3.27	27.61	22.75	188.17	Vertical	Pass
		1753.5	-1.33	3.30	27.62	22.99	199.04	Vertical	Pass
5.0MHz Band QPSK	25/0	1712.5	-1.77	3.13	27.63	22.73	187.68	Vertical	Pass
		1732.5	-1.01	3.27	27.61	23.33	215.28	Vertical	Pass
		1752.5	-1.28	3.30	27.60	23.02	200.59	Vertical	Pass
10.0MHz Band QPSK	50/0	1715	-1.53	3.15	27.64	22.96	197.49	Vertical	Pass
		1732.5	-1.75	3.31	27.61	22.55	180.09	Vertical	Pass
		1750	-1.23	3.33	27.59	23.03	200.69	Vertical	Pass

15.0MH z Band QPSK	75/0	1717.5	-2.32	3.15	27.65	22.18	165.15	Vertical	Pass
		1732.5	-1.66	3.31	27.61	22.64	183.77	Vertical	Pass
		1747.5	-1.87	3.33	27.57	22.37	172.78	Vertical	Pass
20.0MH z Band QPSK	100/0	1720	-1.94	3.17	27.66	22.55	179.99	Vertical	Pass
		1732.5	-0.95	3.32	27.61	23.34	215.77	Vertical	Pass
		1745	-1.54	3.36	27.56	22.66	184.51	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	6/0	1710.7	-1.80	3.12	27.58	22.66	184.63	Horizontal	Pass
		1732.5	-1.55	3.27	27.61	22.79	190.32	Horizontal	Pass
		1754.3	-2.56	3.29	27.63	21.78	150.72	Horizontal	Pass
3.0MHz Band 16 QAM	15/0	1711.5	-2.97	3.13	27.61	21.51	141.67	Horizontal	Pass
		1732.5	-2.10	3.27	27.61	22.24	167.49	Horizontal	Pass
		1753.5	-1.68	3.30	27.62	22.64	183.85	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	1712.5	-2.46	3.13	27.63	22.04	160.02	Horizontal	Pass
		1732.5	-2.26	3.27	27.61	22.08	161.32	Horizontal	Pass
		1752.5	-2.39	3.30	27.60	21.91	155.17	Horizontal	Pass
10.0MHz Band 16 QAM	50/0	1715	-2.04	3.15	27.64	22.45	175.80	Horizontal	Pass
		1732.5	-2.21	3.31	27.61	22.09	161.64	Horizontal	Pass
		1750	-1.65	3.33	27.59	22.61	182.21	Horizontal	Pass
15.0MHz Band 16 QAM	75/0	1717.5	-2.20	3.15	27.65	22.30	169.89	Horizontal	Pass
		1732.5	-1.95	3.31	27.61	22.35	171.80	Horizontal	Pass
		1747.5	-2.39	3.33	27.57	21.85	153.23	Horizontal	Pass
20.0MHz Band 16 QAM	100/0	1720	-4.34	3.17	27.66	20.15	103.56	Horizontal	Pass
		1732.5	-1.81	3.32	27.61	22.48	177.13	Horizontal	Pass
		1745	-2.70	3.36	27.56	21.50	141.12	Horizontal	Pass
1.4MHz Band 16 QAM	6/0	1710.7	-2.43	3.12	27.58	22.03	159.52	Vertical	Pass
		1732.5	-2.16	3.27	27.61	22.18	165.11	Vertical	Pass
		1754.3	-2.05	3.29	27.63	22.29	169.58	Vertical	Pass
3.0MHz Band 16 QAM	15/0	1711.5	-1.26	3.13	27.61	23.22	209.96	Vertical	Pass
		1732.5	-0.77	3.27	27.61	23.57	227.53	Vertical	Pass
		1753.5	-1.59	3.30	27.62	22.73	187.31	Vertical	Pass
5.0MHz Band 16 QAM	25/0	1712.5	-2.20	3.13	27.63	22.30	169.82	Vertical	Pass
		1732.5	-2.51	3.27	27.61	21.83	152.28	Vertical	Pass
		1752.5	-1.72	3.30	27.60	22.58	181.19	Vertical	Pass
10.0MHz Band 16 QAM	50/0	1715	-1.88	3.15	27.64	22.61	182.32	Vertical	Pass
		1732.5	-2.55	3.31	27.61	21.75	149.46	Vertical	Pass
		1750	-2.27	3.33	27.59	21.99	158.02	Vertical	Pass
15.0MHz Band	75/0	1717.5	-2.98	3.15	27.65	21.52	141.84	Vertical	Pass
		1732.5	-1.79	3.31	27.61	22.51	178.28	Vertical	Pass

16 QAM		1747.5	-0.71	3.33	27.57	23.53	225.42	Vertical	Pass
20.0MH	100/0	1720	-2.07	3.17	27.66	22.42	174.55	Vertical	Pass
z Band		1732.5	-1.34	3.32	27.61	22.95	197.24	Vertical	Pass
16 QAM		1745	-0.57	3.36	27.56	23.63	230.67	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.4 LTE BAND 5

Radiated Power (ERP) for Band 5										
Mode	RB/ RB SIZE	Frequ ncy	Result							Conclu sion
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Corre ction (dB)	Max. EIRP Averag e (dBm)	Max. EIRP Averag e (mW)	Polarizati on Of Max. ERP	
1.4MHz Band QPSK	6/0	824.7	6.63	2.01	19.68	2.15	22.15	164.15	Horizontal	Pass
		836.5	5.50	2.01	19.77	2.15	21.11	129.14	Horizontal	Pass
		848.3	6.50	2.02	19.82	2.15	22.15	163.92	Horizontal	Pass
3.0MHz Band QPSK	15/0	825.5	5.96	2.01	19.70	2.15	21.50	141.26	Horizontal	Pass
		836.5	5.65	2.01	19.77	2.15	21.26	133.63	Horizontal	Pass
		847.5	6.37	2.02	19.81	2.15	22.01	158.95	Horizontal	Pass
5.0MHz Band QPSK	25/0	826.5	6.01	2.01	19.71	2.15	21.56	143.06	Horizontal	Pass
		836.5	5.11	2.01	19.77	2.15	20.72	118.12	Horizontal	Pass
		846.5	6.34	2.02	19.79	2.15	21.96	157.17	Horizontal	Pass
10.0MH z Band QPSK	50/0	829	5.88	2.01	19.73	2.15	21.45	139.58	Horizontal	Pass
		836.5	5.87	2.01	19.77	2.15	21.48	140.76	Horizontal	Pass
		844	5.80	2.02	19.78	2.15	21.41	138.24	Horizontal	Pass
1.4MHz Band QPSK	6/0	824.7	6.86	2.01	19.68	2.15	22.38	173.03	Vertical	Pass
		836.5	6.64	2.01	19.77	2.15	22.25	168.06	Vertical	Pass
		848.3	6.80	2.02	19.82	2.15	22.45	175.93	Vertical	Pass
3.0MHz Band QPSK	15/0	825.5	6.37	2.01	19.70	2.15	21.91	155.31	Vertical	Pass
		836.5	6.74	2.01	19.77	2.15	22.35	171.81	Vertical	Pass
		847.5	6.45	2.02	19.81	2.15	22.09	161.67	Vertical	Pass
5.0MHz Band QPSK	25/0	826.5	5.98	2.01	19.71	2.15	21.53	142.23	Vertical	Pass
		836.5	6.99	2.01	19.77	2.15	22.60	181.93	Vertical	Pass
		846.5	6.16	2.02	19.79	2.15	21.78	150.62	Vertical	Pass
10.0MH z Band QPSK	50/0	829	5.87	2.01	19.73	2.15	21.44	139.41	Vertical	Pass
		836.5	6.71	2.01	19.77	2.15	22.32	170.57	Vertical	Pass
		844	7.33	2.02	19.78	2.15	22.94	196.57	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

ERP=EIRP-2.15

Radiated Power (ERP) for Band 5										
Mode	RB/ RB SIZE	Freque ncy	Result							Conclu sion
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Corre ction (dB)	Max. EIRP Averag e (dBm)	Max. EIRP Averag e (mW)	Polarizati on Of Max. ERP	
1.4MHz Band 16 QAM	6/0	824.7	6.61	2.01	19.68	2.15	22.13	163.28	Horizontal	Pass
		836.5	5.53	2.01	19.77	2.15	21.14	130.08	Horizontal	Pass
		848.3	5.28	2.02	19.82	2.15	20.93	123.92	Horizontal	Pass
3.0MHz Band 16 QAM	15/0	825.5	5.61	2.01	19.70	2.15	21.15	130.21	Horizontal	Pass
		836.5	5.33	2.01	19.77	2.15	20.94	124.04	Horizontal	Pass
		847.5	5.46	2.02	19.81	2.15	21.10	128.91	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	826.5	5.28	2.01	19.71	2.15	20.83	120.99	Horizontal	Pass
		836.5	5.66	2.01	19.77	2.15	21.27	134.08	Horizontal	Pass
		846.5	5.40	2.02	19.79	2.15	21.02	126.39	Horizontal	Pass
10.0MH z Band 16 QAM	50/0	829	5.26	2.01	19.73	2.15	20.83	121.04	Horizontal	Pass
		836.5	5.69	2.01	19.77	2.15	21.30	134.99	Horizontal	Pass
		844	5.47	2.02	19.78	2.15	21.08	128.10	Horizontal	Pass
1.4MHz Band 16 QAM	6/0	824.7	6.00	2.01	19.68	2.15	21.52	142.06	Vertical	Pass
		836.5	6.07	2.01	19.77	2.15	21.68	147.19	Vertical	Pass
		848.3	6.06	2.02	19.82	2.15	21.71	148.42	Vertical	Pass
3.0MHz Band 16 QAM	15/0	825.5	5.20	2.01	19.70	2.15	20.74	118.52	Vertical	Pass
		836.5	5.14	2.01	19.77	2.15	20.75	118.84	Vertical	Pass
		847.5	6.04	2.02	19.81	2.15	21.68	147.36	Vertical	Pass
5.0MHz Band 16 QAM	25/0	826.5	6.22	2.01	19.71	2.15	21.77	150.38	Vertical	Pass
		836.5	4.85	2.01	19.77	2.15	20.46	111.20	Vertical	Pass
		846.5	6.01	2.02	19.79	2.15	21.63	145.68	Vertical	Pass
10.0MH z Band 16 QAM	50/0	829	6.58	2.01	19.73	2.15	22.15	164.06	Vertical	Pass
		836.5	5.96	2.01	19.77	2.15	21.57	143.56	Vertical	Pass
		844	5.46	2.02	19.78	2.15	21.07	127.84	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

ERP=EIRP-2.15

8.5 LTE BAND 7

Radiated Power (EIRP) for Band 7									
Mode	RB/ RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cabl e Loss (dBm)	Antenn a Gain (dB)	Max. EIRP Averag e (dBm)	Max. EIRP Averag e (mW)	Polarizati on Of Max. ERP	
5.0MHz Band QPSK	25/0	2502.5	-0.63	4.54	27.75	22.58	181.24	Horizontal	Pass
		2535	-0.59	4.69	27.72	22.44	175.53	Horizontal	Pass
		2567.5	-1.07	4.71	27.71	21.93	156.06	Horizontal	Pass
10.0MHz z Band QPSK	50/0	2505	0.03	4.55	27.76	23.24	211.07	Horizontal	Pass
		2535	-0.60	4.69	27.72	22.43	174.81	Horizontal	Pass
		2565	-0.63	4.72	27.7	22.35	171.77	Horizontal	Pass
15.0MHz z Band QPSK	75/0	2507.5	-1.16	4.55	27.77	22.06	160.75	Horizontal	Pass
		2535	-0.94	4.69	27.72	22.09	161.67	Horizontal	Pass
		2562.5	-1.23	4.72	27.69	21.74	149.43	Horizontal	Pass
20.0MHz z Band QPSK	100/ 0	2510	0.05	4.57	27.78	23.26	211.97	Horizontal	Pass
		2535	0.22	4.73	27.72	23.21	209.56	Horizontal	Pass
		2560	-1.08	4.75	27.68	21.85	153.04	Horizontal	Pass
5.0MHz Band QPSK	25/0	2502.5	-1.10	4.54	27.75	22.11	162.71	Vertical	Pass
		2535	-0.42	4.69	27.72	22.61	182.35	Vertical	Pass
		2567.5	-0.86	4.71	27.71	22.14	163.69	Vertical	Pass
10.0MHz z Band QPSK	50/0	2505	-0.57	4.55	27.76	22.64	183.59	Vertical	Pass
		2535	-0.18	4.69	27.72	22.85	192.60	Vertical	Pass
		2565	-0.28	4.72	27.70	22.70	186.21	Vertical	Pass
15.0MHz z Band QPSK	75/0	2507.5	-0.75	4.55	27.77	22.47	176.71	Vertical	Pass
		2535	-0.12	4.69	27.72	22.91	195.53	Vertical	Pass
		2562.5	-0.12	4.72	27.69	22.85	192.63	Vertical	Pass
20.0MHz z Band QPSK	100/ 0	2510	0.45	4.57	27.78	23.66	232.01	Vertical	Pass
		2535	-0.44	4.73	27.72	22.55	179.80	Vertical	Pass
		2560	-0.09	4.75	27.68	22.84	192.26	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 7									
Mode	RB/ RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cabl e Loss (dBm)	Antenn a Gain (dB)	Max. EIRP Averag e (dBm)	Max. EIRP Averag e (mW)	Polarizati on Of Max. ERP	
5.0MHz Band 16 QAM	25/0	2502.5	-0.84	4.54	27.75	22.37	172.76	Horizontal	Pass
		2535	-0.77	4.69	27.72	22.26	168.22	Horizontal	Pass
		2567.5	-0.84	4.71	27.71	22.16	164.47	Horizontal	Pass
10.0MH z Band 16 QAM	50/0	2505	-1.22	4.55	27.76	21.99	157.98	Horizontal	Pass
		2535	-0.24	4.69	27.72	22.79	190.06	Horizontal	Pass
		2565	-0.09	4.72	27.7	22.89	194.44	Horizontal	Pass
15.0MH z Band 16 QAM	75/0	2507.5	-0.40	4.55	27.77	22.82	191.24	Horizontal	Pass
		2535	-0.40	4.69	27.72	22.63	183.39	Horizontal	Pass
		2562.5	-0.78	4.72	27.69	22.19	165.75	Horizontal	Pass
20.0MH z Band 16 QAM	100/ 0	2510	-0.63	4.57	27.78	22.58	181.03	Horizontal	Pass
		2535	-0.79	4.73	27.72	22.20	165.92	Horizontal	Pass
		2560	-0.40	4.75	27.68	22.53	179.24	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	2502.5	-1.06	4.54	27.75	22.15	163.92	Vertical	Pass
		2535	-1.16	4.69	27.72	21.87	153.69	Vertical	Pass
		2567.5	-1.25	4.71	27.71	21.75	149.76	Vertical	Pass
10.0MH z Band 16 QAM	50/0	2505	-0.49	4.55	27.76	22.72	187.00	Vertical	Pass
		2535	-0.21	4.69	27.72	22.82	191.42	Vertical	Pass
		2565	-0.43	4.72	27.70	22.55	179.72	Vertical	Pass
15.0MH z Band 16 QAM	75/0	2507.5	-0.22	4.55	27.77	23.00	199.46	Vertical	Pass
		2535	-0.56	4.69	27.72	22.47	176.60	Vertical	Pass
		2562.5	-0.10	4.72	27.69	22.87	193.57	Vertical	Pass
20.0MH z Band 16 QAM	100/ 0	2510	0.15	4.57	27.78	23.36	216.77	Vertical	Pass
		2535	-0.64	4.73	27.72	22.35	171.61	Vertical	Pass
		2560	-0.36	4.75	27.68	22.57	180.89	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.6 LTE BAND 12

Radiated Power (ERP) for Band 12										
Mode	RB/ RB SIZE	Frequ ncy	Result							Conclu sion
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Corre ction (dB)	Max. EIRP Averag e (dBm)	Max. EIRP Averag e (mW)	Polarizati on Of Max. ERP	
1.4MHz Band QPSK	6/0	699.7	7.68	1.91	19.21	2.15	22.83	191.82	Horizontal	Pass
		707.5	7.13	1.91	19.26	2.15	22.33	170.89	Horizontal	Pass
		715.3	7.39	1.93	19.34	2.15	22.65	184.29	Horizontal	Pass
3.0MHz Band QPSK	15/0	700.5	7.62	1.91	19.21	2.15	22.77	189.38	Horizontal	Pass
		707.5	6.95	1.91	19.26	2.15	22.15	164.01	Horizontal	Pass
		714.5	6.57	1.93	19.34	2.15	21.83	152.34	Horizontal	Pass
5.0MHz Band QPSK	25/0	701.5	6.93	1.91	19.23	2.15	22.10	162.16	Horizontal	Pass
		707.5	7.22	1.91	19.26	2.15	22.42	174.47	Horizontal	Pass
		713.5	6.17	1.92	19.33	2.15	21.43	138.89	Horizontal	Pass
10.0MH z Band QPSK	50/0	704	6.98	1.91	19.25	2.15	22.17	164.81	Horizontal	Pass
		707.5	6.88	1.91	19.26	2.15	22.08	161.59	Horizontal	Pass
		711	6.68	1.92	19.32	2.15	21.93	155.95	Horizontal	Pass
1.4MHz Band QPSK	6/0	699.7	7.40	1.91	19.21	2.15	22.55	179.86	Vertical	Pass
		707.5	7.82	1.91	19.26	2.15	23.02	200.38	Vertical	Pass
		715.3	6.90	1.93	19.34	2.15	22.16	164.49	Vertical	Pass
3.0MHz Band QPSK	15/0	700.5	6.70	1.91	19.21	2.15	21.85	153.04	Vertical	Pass
		707.5	7.57	1.91	19.26	2.15	22.77	189.15	Vertical	Pass
		714.5	6.91	1.93	19.34	2.15	22.17	164.99	Vertical	Pass
5.0MHz Band QPSK	25/0	701.5	7.08	1.91	19.23	2.15	22.25	167.79	Vertical	Pass
		707.5	6.58	1.91	19.26	2.15	21.78	150.83	Vertical	Pass
		713.5	7.16	1.92	19.33	2.15	22.42	174.76	Vertical	Pass
10.0MH z Band QPSK	50/0	704	7.08	1.91	19.25	2.15	22.27	168.61	Vertical	Pass
		707.5	7.95	1.91	19.26	2.15	23.15	206.62	Vertical	Pass
		711	7.27	1.92	19.32	2.15	22.52	178.81	Vertical	Pass

Radiated Power (EIRP) for Band 12											
Mode	RB/ RB SIZE	Freque ncy	Result							Polarizati on Of Max. ERP	Conclu sion
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Corre ction (dB)	Max. EIRP Averag e (dBm)	Max. EIRP Averag e (mW)			
1.4MHz Band 16 QAM	6/0	699.7	7.50	1.91	19.21	2.15	22.65	184.19	Horizontal	Pass	
		707.5	7.74	1.91	19.26	2.15	22.94	196.63	Horizontal	Pass	
		715.3	6.83	1.93	19.34	2.15	22.09	161.86	Horizontal	Pass	
3.0MHz Band 16 QAM	15/0	700.5	7.32	1.91	19.21	2.15	22.47	176.46	Horizontal	Pass	
		707.5	7.20	1.91	19.26	2.15	22.40	173.92	Horizontal	Pass	
		714.5	7.15	1.93	19.34	2.15	22.41	174.01	Horizontal	Pass	
5.0MHz Band 16 QAM	25/0	701.5	7.79	1.91	19.23	2.15	22.96	197.52	Horizontal	Pass	
		707.5	6.87	1.91	19.26	2.15	22.07	161.06	Horizontal	Pass	
		713.5	6.79	1.92	19.33	2.15	22.05	160.17	Horizontal	Pass	
10.0MH z Band 16 QAM	50/0	704	7.29	1.91	19.25	2.15	22.48	177.18	Horizontal	Pass	
		707.5	6.80	1.91	19.26	2.15	22.00	158.65	Horizontal	Pass	
		711	7.75	1.92	19.32	2.15	23.00	199.62	Horizontal	Pass	
1.4MHz Band 16 QAM	6/0	699.7	8.04	1.91	19.21	2.15	23.19	208.45	Vertical	Pass	
		707.5	7.43	1.91	19.26	2.15	22.63	183.16	Vertical	Pass	
		715.3	7.00	1.93	19.34	2.15	22.26	168.30	Vertical	Pass	
3.0MHz Band 16 QAM	15/0	700.5	7.25	1.91	19.21	2.15	22.40	173.62	Vertical	Pass	
		707.5	7.79	1.91	19.26	2.15	22.99	199.24	Vertical	Pass	
		714.5	7.71	1.93	19.34	2.15	22.97	198.08	Vertical	Pass	
5.0MHz Band 16 QAM	25/0	701.5	7.89	1.91	19.23	2.15	23.06	202.15	Vertical	Pass	
		707.5	7.80	1.91	19.26	2.15	23.00	199.70	Vertical	Pass	
		713.5	7.87	1.92	19.33	2.15	23.13	205.75	Vertical	Pass	
10.0MH z Band 16 QAM	50/0	704	8.01	1.91	19.25	2.15	23.20	208.93	Vertical	Pass	
		707.5	7.18	1.91	19.26	2.15	22.38	172.98	Vertical	Pass	
		711	7.02	1.92	19.32	2.15	22.27	168.66	Vertical	Pass	

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

ERP=EIRP-2.15

8.7 LTE BAND 13

Radiated Power (ERP) for Band 13										
Mode	RB/ RB SIZE	Frequ ncy	Result							Conclu sion
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Corre ction (dB)	Max. EIRP Averag e (dBm)	Max. EIRP Averag e (mW)	Polarizati on Of Max. ERP	
5.0MHz Band QPSK	25/0	779.5	5.24	1.91	19.23	2.15	20.41	109.91	Horizontal	Pass
		782	6.10	1.91	19.26	2.15	21.30	135.01	Horizontal	Pass
		784.5	5.47	1.92	19.33	2.15	20.73	118.20	Horizontal	Pass
10.0MH z Band QPSK	50/0	782	5.06	1.91	19.25	2.15	20.25	106.01	Horizontal	Pass
			5.50	1.91	19.26	2.15	20.70	117.45	Horizontal	Pass
			5.84	1.92	19.32	2.15	21.09	128.67	Horizontal	Pass
5.0MHz Band QPSK	25/0	779.5	5.50	1.91	19.23	2.15	20.67	116.63	Vertical	Pass
		782	6.21	1.91	19.26	2.15	21.41	138.23	Vertical	Pass
		784.5	6.16	1.92	19.33	2.15	21.42	138.68	Vertical	Pass
10.0MH z Band QPSK	50/0	782	6.20	1.91	19.25	2.15	21.39	137.56	Vertical	Pass
			6.29	1.91	19.26	2.15	21.49	140.93	Vertical	Pass
			6.21	1.92	19.32	2.15	21.46	140.05	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

ERP=EIRP-2.15

Radiated Power (EIRP) for Band 13										
Mode	RB/ RB SIZE	Freque ncy	Result							Conclu sion
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Corre ction (dB)	Max. EIRP Averag e (dBm)	Max. EIRP Averag e (mW)	Polarizati on Of Max. ERP	
5.0MHz Band 16 QAM	25/0	779.5	6.85	1.91	19.23	2.15	22.02	159.07	Horizontal	Pass
		782	5.23	1.91	19.26	2.15	20.43	110.40	Horizontal	Pass
		784.5	6.36	1.92	19.33	2.15	21.62	145.10	Horizontal	Pass
10.0MH z Band 16 QAM	50/0	782	5.24	1.91	19.25	2.15	20.43	110.37	Horizontal	Pass
			6.19	1.91	19.26	2.15	21.39	137.80	Horizontal	Pass
			6.06	1.92	19.32	2.15	21.31	135.09	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	779.5	5.77	1.91	19.23	2.15	20.94	124.29	Vertical	Pass
		782	6.57	1.91	19.26	2.15	21.77	150.16	Vertical	Pass
		784.5	6.85	1.92	19.33	2.15	22.11	162.55	Vertical	Pass
10.0MH z Band 16 QAM	50/0	782	6.81	1.91	19.25	2.15	22.00	158.32	Vertical	Pass
			7.01	1.91	19.26	2.15	22.21	166.34	Vertical	Pass
			6.66	1.92	19.32	2.15	21.91	155.21	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

ERP=EIRP-2.15

8.8 LTE BAND 25

Radiated Power (EIRP) for Band 25									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	6/0	1850.7	-2.19	3.12	28.24	22.93	196.38	Horizontal	Pass
		1882.5	-2.57	3.27	28.22	22.38	172.87	Horizontal	Pass
		1914.3	-2.23	3.29	28.2	22.68	185.55	Horizontal	Pass
3.0MHz Band QPSK	15/0	1851.5	-2.27	3.13	28.23	22.83	191.87	Horizontal	Pass
		1882.5	-2.34	3.27	28.24	22.63	183.24	Horizontal	Pass
		1913.5	-2.84	3.30	28.25	22.11	162.74	Horizontal	Pass
5.0MHz Band QPSK	25/0	1852.5	-3.01	3.13	28.31	22.17	164.68	Horizontal	Pass
		1882.5	-2.45	3.27	28.22	22.50	177.73	Horizontal	Pass
		1912.5	-2.69	3.30	28.2	22.21	166.47	Horizontal	Pass
10.0MHz Band QPSK	50/0	1855	-2.92	3.15	28.33	22.26	168.23	Horizontal	Pass
		1882.5	-2.24	3.31	28.22	22.67	184.77	Horizontal	Pass
		1910	-2.46	3.33	28.19	22.40	173.98	Horizontal	Pass
15.0MHz Band QPSK	75/0	1857.5	-2.30	3.15	28.34	22.89	194.53	Horizontal	Pass
		1882.5	-2.70	3.31	28.22	22.21	166.39	Horizontal	Pass
		1907.5	-2.30	3.33	28.18	22.55	179.88	Horizontal	Pass
20.0MHz Band QPSK	100/0	1860	-3.75	3.17	28.35	21.43	139.00	Horizontal	Pass
		1882.5	-2.41	3.32	28.22	22.49	177.41	Horizontal	Pass
		1905	-2.88	3.36	28.16	21.92	155.64	Horizontal	Pass
1.4MHz Band QPSK	6/0	1850.7	-2.23	3.12	28.24	22.89	194.63	Vertical	Pass
		1882.5	-2.57	3.27	28.22	22.38	173.10	Vertical	Pass
		1914.3	-2.26	3.29	28.2	22.65	184.16	Vertical	Pass
3.0MHz Band QPSK	15/0	1851.5	-2.23	3.13	28.23	22.87	193.50	Vertical	Pass
		1882.5	-2.35	3.27	28.24	22.62	182.69	Vertical	Pass
		1913.5	-2.02	3.30	28.25	22.93	196.43	Vertical	Pass
5.0MHz Band QPSK	25/0	1852.5	-2.38	3.13	28.31	22.80	190.33	Vertical	Pass
		1882.5	-2.11	3.27	28.22	22.84	192.12	Vertical	Pass
		1912.5	-2.90	3.30	28.2	22.00	158.49	Vertical	Pass
10.0MHz Band QPSK	50/0	1855	-2.20	3.15	28.33	22.98	198.58	Vertical	Pass
		1882.5	-2.01	3.31	28.22	22.90	194.79	Vertical	Pass
		1910	-2.80	3.33	28.19	22.06	160.55	Vertical	Pass

15.0MH z Band QPSK	75/0	1857.5	-2.91	3.15	28.34	22.28	169.09	Vertical	Pass
		1882.5	-2.23	3.31	28.22	22.68	185.30	Vertical	Pass
		1907.5	-2.65	3.33	28.18	22.20	165.79	Vertical	Pass
20.0MH z Band QPSK	100/0	1860	-3.79	3.17	28.35	21.39	137.73	Vertical	Pass
		1882.5	-2.28	3.32	28.22	22.62	182.72	Vertical	Pass
		1905	-1.82	3.36	28.16	22.98	198.61	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 25									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	6/0	1850.7	-2.77	3.12	28.24	22.35	171.65	Horizontal	Pass
		1882.5	-2.57	3.27	28.22	22.38	173.05	Horizontal	Pass
		1914.3	-2.62	3.29	28.2	22.29	169.30	Horizontal	Pass
3.0MHz Band 16 QAM	15/0	1851.5	-2.83	3.13	28.23	22.27	168.83	Horizontal	Pass
		1882.5	-2.88	3.27	28.24	22.09	161.98	Horizontal	Pass
		1913.5	-2.71	3.30	28.25	22.24	167.49	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	1852.5	-2.69	3.13	28.31	22.49	177.57	Horizontal	Pass
		1882.5	-2.61	3.27	28.22	22.34	171.29	Horizontal	Pass
		1912.5	-2.48	3.30	28.2	22.42	174.69	Horizontal	Pass
10.0MHz Band 16 QAM	50/0	1855	-2.71	3.15	28.33	22.47	176.45	Horizontal	Pass
		1882.5	-2.78	3.31	28.22	22.13	163.35	Horizontal	Pass
		1910	-2.86	3.33	28.19	22.00	158.58	Horizontal	Pass
15.0MHz Band 16 QAM	75/0	1857.5	-2.62	3.15	28.34	22.57	180.64	Horizontal	Pass
		1882.5	-2.85	3.31	28.22	22.06	160.64	Horizontal	Pass
		1907.5	-2.62	3.33	28.18	22.23	166.93	Horizontal	Pass
20.0MHz Band 16 QAM	100/0	1860	-2.88	3.17	28.35	22.30	169.99	Horizontal	Pass
		1882.5	-2.74	3.32	28.22	22.16	164.55	Horizontal	Pass
		1905	-3.03	3.36	28.16	21.77	150.42	Horizontal	Pass
1.4MHz Band 16 QAM	6/0	1850.7	-2.47	3.12	28.24	22.65	184.26	Vertical	Pass
		1882.5	-3.09	3.27	28.22	21.86	153.29	Vertical	Pass
		1914.3	-2.57	3.29	28.2	22.34	171.53	Vertical	Pass
3.0MHz Band 16 QAM	15/0	1851.5	-2.88	3.13	28.23	22.22	166.69	Vertical	Pass
		1882.5	-2.96	3.27	28.24	22.01	158.79	Vertical	Pass
		1913.5	-2.42	3.30	28.25	22.53	179.23	Vertical	Pass
5.0MHz Band 16 QAM	25/0	1852.5	-2.42	3.13	28.31	22.76	188.94	Vertical	Pass
		1882.5	-2.92	3.27	28.22	22.03	159.50	Vertical	Pass
		1912.5	-2.47	3.30	28.2	22.43	175.11	Vertical	Pass
10.0MHz Band 16 QAM	50/0	1855	-3.11	3.15	28.33	22.07	160.94	Vertical	Pass
		1882.5	-2.49	3.31	28.22	22.42	174.72	Vertical	Pass
		1910	-2.54	3.33	28.19	22.32	170.68	Vertical	Pass
15.0MHz Band	75/0	1857.5	-3.06	3.15	28.34	22.13	163.35	Vertical	Pass
		1882.5	-2.49	3.31	28.22	22.42	174.45	Vertical	Pass

16 QAM		1907.5	-2.35	3.33	28.18	22.50	177.82	Vertical	Pass
20.0MH	100/0	1860	-2.25	3.17	28.35	22.93	196.55	Vertical	Pass
z Band		1882.5	-1.93	3.32	28.22	22.97	198.18	Vertical	Pass
16 QAM		1905	-2.47	3.36	28.16	22.33	170.93	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.9 LTE BAND 26

Radiated Power (EIRP) for Band 26 (814~824MHz)										
Mode	RB/ RB SIZE	Freque ncy	Result							Concl usion
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Corre ction (dB)	Max. EIRP Averag e (dBm)	Max. EIRP Averag e (mW)	Polarizati on Of Max. ERP	
1.4MHz BW QPSK	6/0	814.7	0.05	3.76	28.24	2.15	22.38	173.12	Horizontal	Pass
		819	0.17	3.91	28.22	2.15	22.33	170.92	Horizontal	Pass
		823.3	-0.06	3.93	28.20	2.15	22.06	160.56	Horizontal	Pass
3.0MHz BW QPSK	15/0	815.5	-0.16	3.77	28.23	2.15	22.15	163.97	Horizontal	Pass
		819	0.31	3.91	28.24	2.15	22.49	177.50	Horizontal	Pass
		822.5	0.22	3.94	28.25	2.15	22.38	172.85	Horizontal	Pass
5.0MHz BW QPSK	25/0	816.5	-0.21	3.77	28.31	2.15	22.18	165.34	Horizontal	Pass
		819	0.07	3.91	28.22	2.15	22.23	167.24	Horizontal	Pass
		821.5	0.03	3.94	28.20	2.15	22.14	163.86	Horizontal	Pass
10.0MHz z BW QPSK	50/0	819	0.58	3.91	28.22	2.15	22.74	187.93	Horizontal	Pass
1.4MHz BW QPSK	6/0	814.7	0.26	3.79	28.34	2.15	22.66	184.50	Vertical	Pass
		819	0.31	3.95	28.22	2.15	22.43	175.01	Vertical	Pass
		823.3	0.58	3.97	28.18	2.15	22.64	183.60	Vertical	Pass
3.0MHz BW QPSK	15/0	815.5	-0.22	3.77	28.23	2.15	22.09	161.72	Vertical	Pass
		819	0.25	3.91	28.24	2.15	22.43	175.06	Vertical	Pass
		822.5	0.16	3.94	28.25	2.15	22.32	170.47	Vertical	Pass
5.0MHz BW QPSK	25/0	816.5	-0.06	3.77	28.31	2.15	22.33	170.92	Vertical	Pass
		819	0.10	3.91	28.22	2.15	22.26	168.12	Vertical	Pass
		821.5	0.74	3.94	28.20	2.15	22.85	192.75	Vertical	Pass
10.0MHz z BW QPSK	50/0	819	0.70	3.91	28.22	2.15	22.86	193.20	Vertical	Pass

Radiated Power (EIRP) for Band 26 (814~824MHz)										
Mode	RB/ RB SIZE	Freque ncy	Result							Concl usion
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Corre ction (dB)	Max. EIRP Averag e (dBm)	Max. EIRP Averag e (mW)	Polarizati on Of Max. ERP	
1.4MHz Band 16 QAM	6/0	814.7	-0.21	3.76	28.24	2.15	22.12	162.91	Horizontal	Pass
		819	0.50	3.91	28.22	2.15	22.66	184.51	Horizontal	Pass
		823.3	0.63	3.93	28.20	2.15	22.75	188.47	Horizontal	Pass
3.0MHz Band 16 QAM	15/0	815.5	0.31	3.77	28.23	2.15	22.62	182.89	Horizontal	Pass
		819	0.38	3.91	28.24	2.15	22.56	180.42	Horizontal	Pass
		822.5	0.10	3.94	28.25	2.15	22.26	168.41	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	816.5	0.08	3.77	28.31	2.15	22.47	176.56	Horizontal	Pass
		819	0.15	3.91	28.22	2.15	22.31	170.32	Horizontal	Pass
		821.5	0.34	3.94	28.20	2.15	22.45	175.97	Horizontal	Pass
10.0MH z Band 16 QAM	50/0	819	0.48	3.91	28.24	2.15	22.66	184.50	Horizontal	Pass
1.4MHz Band 16 QAM	6/0	814.7	0.35	3.79	28.34	2.15	22.75	188.47	Vertical	Pass
		819	0.43	3.95	28.22	2.15	22.55	179.97	Vertical	Pass
		823.3	0.63	3.97	28.18	2.15	22.69	185.78	Vertical	Pass
3.0MHz Band 16 QAM	15/0	815.5	0.25	3.77	28.23	2.15	22.56	180.39	Vertical	Pass
		819	0.32	3.91	28.24	2.15	22.50	177.94	Vertical	Pass
		822.5	0.04	3.94	28.25	2.15	22.20	166.10	Vertical	Pass
5.0MHz Band 16 QAM	25/0	816.5	-0.38	3.77	28.31	2.15	22.01	158.82	Vertical	Pass
		819	0.09	3.91	28.22	2.15	22.25	167.98	Vertical	Pass
		821.5	0.38	3.94	28.20	2.15	22.49	177.42	Vertical	Pass
10.0MH z Band 16 QAM	50/0	819	0.58	3.91	28.24	2.15	22.76	188.80	Vertical	Pass

Radiated Power (EIRP) for Band 26 (824~849MHz)										
Mode	RB/ RB SIZE	Freque ncy	Result							Concl usion
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Corre ction (dB)	Max. EIRP Averag e (dBm)	Max. EIRP Averag e (mW)	Polarizati on Of Max. ERP	
1.4MHz BW QPSK	6/0	824.7	6.65	2.01	19.68	2.15	22.17	164.82	Horizontal	Pass
		836.5	5.57	2.01	19.77	2.15	21.18	131.22	Horizontal	Pass
		848.3	6.57	2.02	19.82	2.15	22.22	166.72	Horizontal	Pass
3.0MHz BW QPSK	15/0	825.5	6.01	2.01	19.70	2.15	21.55	142.89	Horizontal	Pass
		836.5	5.71	2.01	19.77	2.15	21.32	135.52	Horizontal	Pass
		847.5	6.41	2.02	19.81	2.15	22.05	160.32	Horizontal	Pass
5.0MHz BW QPSK	25/0	826.5	6.01	2.01	19.71	2.15	21.56	143.22	Horizontal	Pass
		836.5	5.20	2.01	19.77	2.15	20.81	120.50	Horizontal	Pass
		846.5	6.40	2.02	19.79	2.15	22.02	159.22	Horizontal	Pass
10.0MHz z BW QPSK	50/0	829	5.90	2.01	19.73	2.15	21.47	140.28	Horizontal	Pass
		836.5	5.96	2.01	19.77	2.15	21.57	143.55	Horizontal	Pass
		844	5.80	2.02	19.78	2.15	21.41	138.36	Horizontal	Pass
15.0MHz z BW QPSK	75/0	831.5	5.88	2.01	19.73	2.15	21.45	139.64	Horizontal	Pass
		836.5	5.93	2.01	19.77	2.15	21.54	142.56	Horizontal	Pass
		841.5	5.87	2.02	19.78	2.15	21.48	140.60	Horizontal	Pass
1.4MHz BW QPSK	6/0	824.7	6.95	2.01	19.68	2.15	22.47	176.60	Vertical	Pass
		836.5	6.74	2.01	19.77	2.15	22.35	171.79	Vertical	Pass
		848.3	6.89	2.02	19.82	2.15	22.54	179.47	Vertical	Pass
3.0MHz BW QPSK	15/0	825.5	6.37	2.01	19.70	2.15	21.91	155.24	Vertical	Pass
		836.5	6.82	2.01	19.77	2.15	22.43	174.98	Vertical	Pass
		847.5	6.52	2.02	19.81	2.15	22.16	164.44	Vertical	Pass
5.0MHz BW QPSK	25/0	826.5	6.12	2.01	19.71	2.15	21.67	146.89	Vertical	Pass
		836.5	7.02	2.01	19.77	2.15	22.63	183.23	Vertical	Pass
		846.5	6.22	2.02	19.79	2.15	21.84	152.76	Vertical	Pass
10.0MHz z BW QPSK	50/0	829	5.96	2.01	19.73	2.15	21.53	142.23	Vertical	Pass
		836.5	6.80	2.01	19.77	2.15	22.41	174.18	Vertical	Pass
		844	7.08	2.02	19.78	2.15	22.69	185.78	Vertical	Pass
15.0MHz z BW QPSK	75/0	831.5	5.89	2.01	19.73	2.15	21.46	139.96	Vertical	Pass
		836.5	6.79	2.01	19.77	2.15	22.40	173.78	Vertical	Pass
		841.5	7.27	2.02	19.78	2.15	22.88	194.09	Vertical	Pass

Radiated Power (EIRP) for Band 26 (824~849MHz)										
Mode	RB/ RB SIZE	Freque ncy	Result							Concl usion
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Corre ction (dB)	Max. EIRP Averag e (dBm)	Max. EIRP Averag e (mW)	Polarizati on Of Max. ERP	
1.4MHz Band 16 QAM	6/0	824.7	6.70	2.01	19.68	2.15	22.22	166.72	Horizontal	Pass
		836.5	5.58	2.01	19.77	2.15	21.19	131.52	Horizontal	Pass
		848.3	5.41	2.02	19.82	2.15	21.06	127.64	Horizontal	Pass
3.0MHz Band 16 QAM	15/0	825.5	5.66	2.01	19.70	2.15	21.20	131.83	Horizontal	Pass
		836.5	5.33	2.01	19.77	2.15	20.94	124.17	Horizontal	Pass
		847.5	5.48	2.02	19.81	2.15	21.12	129.42	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	826.5	5.36	2.01	19.71	2.15	20.91	123.31	Horizontal	Pass
		836.5	5.70	2.01	19.77	2.15	21.31	135.21	Horizontal	Pass
		846.5	5.40	2.02	19.79	2.15	21.02	126.47	Horizontal	Pass
10.0MH z Band 16 QAM	50/0	829	5.31	2.01	19.73	2.15	20.88	122.52	Horizontal	Pass
		836.5	5.79	2.01	19.77	2.15	21.40	138.04	Horizontal	Pass
		844	5.54	2.02	19.78	2.15	21.15	130.44	Horizontal	Pass
15.0MH z Band 16 QAM	75/0	831.5	5.26	2.01	19.73	2.15	20.83	121.06	Horizontal	Pass
		836.5	5.73	2.01	19.77	2.15	21.34	136.14	Horizontal	Pass
		841.5	5.46	2.02	19.78	2.15	21.07	127.94	Horizontal	Pass
1.4MHz Band 16 QAM	6/0	824.7	6.06	2.01	19.68	2.15	21.58	143.88	Vertical	Pass
		836.5	6.14	2.01	19.77	2.15	21.75	149.62	Vertical	Pass
		848.3	6.13	2.02	19.82	2.15	21.78	150.66	Vertical	Pass
3.0MHz Band 16 QAM	15/0	825.5	5.23	2.01	19.70	2.15	20.77	119.40	Vertical	Pass
		836.5	5.17	2.01	19.77	2.15	20.78	119.67	Vertical	Pass
		847.5	6.09	2.02	19.81	2.15	21.73	148.94	Vertical	Pass
5.0MHz Band 16 QAM	25/0	826.5	6.29	2.01	19.71	2.15	21.84	152.76	Vertical	Pass
		836.5	4.89	2.01	19.77	2.15	20.50	112.20	Vertical	Pass
		846.5	6.09	2.02	19.79	2.15	21.71	148.25	Vertical	Pass
10.0MH z Band 16 QAM	50/0	829	6.66	2.01	19.73	2.15	22.23	167.11	Vertical	Pass
		836.5	6.02	2.01	19.77	2.15	21.63	145.55	Vertical	Pass
		844	5.54	2.02	19.78	2.15	21.15	130.32	Vertical	Pass
15.0MH z Band 16 QAM	75/0	831.5	6.74	2.01	19.73	2.15	22.31	170.22	Vertical	Pass
		836.5	5.96	2.01	19.77	2.15	21.57	143.55	Vertical	Pass
		841.5	7.15	2.02	19.78	2.15	22.76	188.80	Vertical	Pass

8.10 LTE BAND 41

Radiated Power (EIRP) for Band 41										
Mode	RB/ RB SIZE	Frequency	Result						Polarizati on Of Max. ERP	Conclusio n
			SG Level (dBm)	Cable Loss (dBm)	Antenn a Gain (dB)	Max. EIRP Avera ge (dBm)	Max. EIRP			
							Average (mW)			
5.0MHz Band QPSK	25/0	2602.5	-1.06	4.54	27.75	22.15	163.88	Horizontal	Pass	
		2605	-1.44	4.69	27.72	21.59	144.21	Horizontal	Pass	
		2607.5	-0.81	4.71	27.71	22.19	165.41	Horizontal	Pass	
10.0MH z Band QPSK	50/0	2600	-1.32	4.55	27.76	21.89	154.39	Horizontal	Pass	
		2605	-0.71	4.69	27.72	22.32	170.46	Horizontal	Pass	
		2610	-0.95	4.72	27.7	22.03	159.73	Horizontal	Pass	
15.0MH z Band QPSK	75/0	2597.5	-0.58	4.55	27.77	22.64	183.47	Horizontal	Pass	
		2605	-0.99	4.69	27.72	22.04	160.07	Horizontal	Pass	
		2612.5	-1.20	4.72	27.69	21.77	150.26	Horizontal	Pass	
20.0MH z Band QPSK	100/ 0	2595	-1.28	4.57	27.78	21.93	156.08	Horizontal	Pass	
		2605	-0.82	4.73	27.72	22.17	164.92	Horizontal	Pass	
		2615	-0.68	4.75	27.68	22.25	167.78	Horizontal	Pass	
5.0MHz Band QPSK	25/0	2602.5	-0.70	4.54	27.75	22.51	178.11	Vertical	Pass	
		2605	-0.94	4.69	27.72	22.09	161.81	Vertical	Pass	
		2607.5	-1.08	4.71	27.71	21.92	155.73	Vertical	Pass	
10.0MH z Band QPSK	50/0	2600	-1.03	4.55	27.76	22.18	165.01	Vertical	Pass	
		2605	-0.99	4.69	27.72	22.04	159.93	Vertical	Pass	
		2610	-0.48	4.72	27.7	22.50	177.99	Vertical	Pass	
15.0MH z Band QPSK	75/0	2597.5	-0.62	4.55	27.77	22.60	181.89	Vertical	Pass	
		2605	-0.91	4.69	27.72	22.12	163.07	Vertical	Pass	
		2612.5	-0.84	4.72	27.69	22.13	163.29	Vertical	Pass	
20.0MH z Band QPSK	100/ 0	2595	-1.01	4.57	27.78	22.20	165.82	Vertical	Pass	
		2605	-0.66	4.73	27.72	22.33	170.81	Vertical	Pass	
		2615	-0.28	4.75	27.68	22.65	184.06	Vertical	Pass	

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 41									
Mode	RB/ RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Averag e (mW)	Polarizati on Of Max. ERP	
5.0MHz Band 16 QAM	25/0	2602.5	-1.10	4.54	27.75	22.11	162.38	Horizontal	Pass
		2605	-1.48	4.69	27.72	21.55	142.88	Horizontal	Pass
		2607.5	-0.85	4.71	27.71	22.15	163.90	Horizontal	Pass
10.0MH z Band 16 QAM	50/0	2600	-1.36	4.55	27.76	21.85	152.98	Horizontal	Pass
		2605	-0.75	4.69	27.72	22.28	168.89	Horizontal	Pass
		2610	-0.99	4.72	27.7	21.99	158.26	Horizontal	Pass
15.0MH z Band 16 QAM	75/0	2597.5	-0.62	4.55	27.77	22.60	181.79	Horizontal	Pass
		2605	-1.03	4.69	27.72	22.00	158.60	Horizontal	Pass
		2612.5	-1.24	4.72	27.69	21.73	148.88	Horizontal	Pass
20.0MH z Band 16 QAM	100/ 0	2595	-1.32	4.57	27.78	21.89	154.65	Horizontal	Pass
		2605	-0.86	4.73	27.72	22.13	163.41	Horizontal	Pass
		2615	-0.72	4.75	27.68	22.21	166.24	Horizontal	Pass
5.0MHz Band 16 QAM	25/0	2602.5	-0.74	4.54	27.75	22.47	176.47	Vertical	Pass
		2605	-0.98	4.69	27.72	22.05	160.33	Vertical	Pass
		2607.5	-1.12	4.71	27.71	21.88	154.30	Vertical	Pass
10.0MH z Band 16 QAM	50/0	2600	-1.07	4.55	27.76	22.14	163.50	Vertical	Pass
		2605	-1.03	4.69	27.72	22.00	158.47	Vertical	Pass
		2610	-0.52	4.72	27.7	22.46	176.36	Vertical	Pass
15.0MH z Band 16 QAM	75/0	2597.5	-0.66	4.55	27.77	22.56	180.23	Vertical	Pass
		2605	-0.95	4.69	27.72	22.08	161.58	Vertical	Pass
		2612.5	-0.88	4.72	27.69	22.09	161.79	Vertical	Pass
20.0MH z Band 16 QAM	100/ 0	2595	-1.05	4.57	27.78	22.16	164.30	Vertical	Pass
		2605	-0.70	4.73	27.72	22.29	169.25	Vertical	Pass
		2615	-0.32	4.75	27.68	22.61	182.37	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238 and §27.53

LIMIT

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

§27.53 (g) For operations in the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

§27.53 (h) For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \text{ Log}_{10}(p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \text{ Log}_{10}(p)$, dB at the channel edges and $55 + 10 \text{ Log}_{10}(p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

- LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 25
- LTE Band 26
- LTE Band 41

RESULTS

PASS

9.1 LTE BAND 2

QPSK EIRP POWER FOR LTE BAND 2 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1850.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3701.4	-51.09	4.04	33.51	-21.62	-13	-8.62	Horizontal
3701.4	-52.79	4.04	33.51	-23.32	-13	-10.32	Vertical
5552.1	-55.64	5.24	35.84	-25.04	-13	-12.04	Vertical
5552.1	-66.55	5.24	35.84	-35.95	-13	-22.95	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-53.15	4.04	33.56	-23.63	-13	-10.63	Horizontal
3760.0	-53.82	4.04	33.56	-24.30	-13	-11.30	Vertical
5640.0	-53.27	5.24	35.91	-22.60	-13	-9.60	Vertical
5640.0	-54.80	5.24	35.91	-24.13	-13	-11.13	Horizontal
Test Results for High Channel 1909.3MHz							
3818.6	-53.04	4.04	34.00	-23.08	-13	-10.08	Horizontal
3818.6	-53.99	4.04	34.00	-24.03	-13	-11.03	Vertical
5727.9	-57.55	5.24	36.04	-26.75	-13	-13.75	Vertical
5727.9	-55.89	5.24	36.04	-25.09	-13	-12.09	Horizontal

QPSK EIRP POWER FOR LTE BAND 2 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1860MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3720.0	-55.98	4.07	33.54	-26.51	-13	-13.51	Horizontal
3720.0	-50.92	4.07	33.54	-21.45	-13	-8.45	Vertical
5580.0	-58.31	5.28	35.86	-27.73	-13	-14.73	Vertical
5580.0	-59.95	5.28	35.86	-29.37	-13	-16.37	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-55.78	4.04	33.56	-26.26	-13	-13.26	Horizontal
3760.0	-52.28	4.04	33.56	-22.76	-13	-9.76	Vertical
5640.0	-56.63	5.24	35.91	-25.96	-13	-12.96	Vertical
5640.0	-57.81	5.24	35.91	-27.14	-13	-14.14	Horizontal
Test Results for High Channel 1900MHz							
3800.0	-54.02	4.04	34.00	-24.06	-13	-11.06	Horizontal
3800.0	-56.24	4.04	34.00	-26.28	-13	-13.28	Vertical
5700.0	-56.79	5.24	36.04	-25.99	-13	-12.99	Vertical
5700.0	-56.21	5.24	36.04	-25.41	-13	-12.41	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + AR_{pl}(dBm)$

. Over Limit = : $P_{Mea}(dBm) - Limit(dBm)$

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.2 LTE BAND 4

QPSK EIRP POWER FOR LTE BAND 4 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-58.68	4.02	29.80	-32.90	-13	-19.90	Horizontal
3421.4	-56.72	4.02	29.80	-30.94	-13	-17.94	Vertical
5132.1	-60.44	5.24	35.84	-29.84	-13	-16.84	Vertical
5132.1	-62.52	5.24	35.84	-31.92	-13	-18.92	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-50.41	4.03	30.00	-24.44	-13	-11.44	Horizontal
3465.0	-54.19	4.03	30.00	-28.22	-13	-15.22	Vertical
5197.5	-56.92	5.25	35.86	-26.31	-13	-13.31	Vertical
5197.5	-55.42	5.25	35.86	-24.81	-13	-11.81	Horizontal
Test Results for High Channel 1754.3MHz							
3508.6	-50.43	4.05	30.01	-24.47	-13	-11.47	Horizontal
3508.6	-57.43	4.05	30.01	-31.47	-13	-18.47	Vertical
5262.9	-56.71	5.26	35.86	-26.11	-13	-13.11	Vertical
5262.9	-55.24	5.26	35.86	-24.64	-13	-11.64	Horizontal

QPSK EIRP POWER FOR LTE BAND 4 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1720MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440.0	-55.24	4.02	29.80	-29.46	-13	-16.46	Horizontal
3440.0	-57.43	4.02	29.80	-31.65	-13	-18.65	Vertical
5160.0	-59.27	5.24	35.84	-28.67	-13	-15.67	Vertical
5160.0	-61.58	5.24	35.84	-30.98	-13	-17.98	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-50.46	4.03	30.00	-24.49	-13	-11.49	Horizontal
3465.0	-53.00	4.03	30.00	-27.03	-13	-14.03	Vertical
5197.5	-60.13	5.25	35.86	-29.52	-13	-16.52	Vertical
5197.5	-58.00	5.25	35.86	-27.39	-13	-14.39	Horizontal
Test Results for High Channel 1745MHz							
3490.0	-53.24	2.91	27.68	-28.47	-13	-15.47	Horizontal
3490.0	-54.74	2.91	27.68	-29.97	-13	-16.97	Vertical
5235.0	-58.20	5.26	35.86	-27.60	-13	-14.60	Vertical
5235.0	-56.83	5.26	35.86	-26.23	-13	-13.23	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.3 LTE BAND 5

QPSK EIRP POWER FOR LTE BAND 5 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 824.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1649.4	-50.04	2.78	27.50	-25.32	-13	-12.32	Horizontal
1649.4	-55.11	2.78	27.50	-30.39	-13	-17.39	Vertical
2474.1	-53.92	2.90	27.80	-29.02	-13	-16.02	Vertical
2474.1	-52.54	2.90	27.80	-27.64	-13	-14.64	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-51.47	2.78	27.48	-26.77	-13	-13.77	Horizontal
1673.0	-49.06	2.78	27.48	-24.36	-13	-11.36	Vertical
2509.5	-51.20	2.91	27.70	-26.41	-13	-13.41	Vertical
2509.5	-50.80	2.91	27.70	-26.01	-13	-13.01	Horizontal
Test Results for High Channel 848.3MHz							
1696.6	-51.77	2.78	27.43	-27.12	-13	-14.12	Horizontal
1696.6	-52.58	2.78	27.43	-27.93	-13	-14.93	Vertical
2544.9	-50.11	2.92	27.74	-25.29	-13	-12.29	Vertical
2544.9	-50.68	2.92	27.74	-25.86	-13	-12.86	Horizontal

QPSK EIRP POWER FOR LTE BAND 5 (10MHZ BANDWIDTH)

Test Results for Low Channel 829MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1658.0	-52.19	2.78	27.50	-27.47	-13	-14.47	Horizontal
1658.0	-49.29	2.78	27.50	-24.57	-13	-11.57	Vertical
2487.0	-54.64	2.90	27.80	-29.74	-13	-16.74	Vertical
2487.0	-52.43	2.90	27.80	-27.53	-13	-14.53	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-51.04	2.78	27.48	-26.34	-13	-13.34	Horizontal
1673.0	-51.01	2.78	27.48	-26.31	-13	-13.31	Vertical
2509.5	-55.34	2.91	27.70	-30.55	-13	-17.55	Vertical
2509.5	-52.28	2.91	27.70	-27.49	-13	-14.49	Horizontal
Test Results for High Channel 844MHz							
1688.0	-54.82	2.78	27.43	-30.17	-13	-17.17	Horizontal
1688.0	-48.84	2.78	27.43	-24.19	-13	-11.19	Vertical
2532.0	-49.30	2.92	27.74	-24.48	-13	-11.48	Vertical
2532.0	-51.03	2.92	27.74	-26.21	-13	-13.21	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + ARpl (dBm)$

. Over Limit= : $P_{Mea}(dBm) - Limit(dBm)$

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.4 LTE BAND 7

QPSK EIRP POWER FOR LTE BAND 7 (5.0MHZ BANDWIDTH)

Test Results for Low Channel 2502.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5005.0	-65.52	5.23	35.81	-34.94	-25	-9.94	Horizontal
5005.0	-63.26	5.23	35.81	-32.68	-25	-7.68	Vertical
7507.5	-67.62	5.67	36.85	-36.44	-25	-11.44	Vertical
7507.5	-62.91	5.67	36.85	-31.73	-25	-6.73	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-62.64	5.23	35.82	-32.05	-25	-7.05	Horizontal
5070.0	-63.91	5.23	35.82	-33.32	-25	-8.32	Vertical
7605.0	-66.13	5.67	36.85	-34.95	-25	-9.95	Vertical
7605.0	-67.11	5.67	36.85	-35.93	-25	-10.93	Horizontal
Test Results for High Channel 2567.5MHz							
5135.0	-66.10	5.24	35.83	-35.51	-25	-10.51	Horizontal
5135.0	-63.64	5.24	35.83	-33.05	-25	-8.05	Vertical
7702.5	-64.91	5.68	36.87	-33.72	-25	-8.72	Vertical
7702.5	-66.18	5.68	36.87	-34.99	-25	-9.99	Horizontal

QPSK EIRP POWER FOR LTE BAND 7 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 2510MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5020.0	-65.40	5.23	35.82	-34.81	-25	-9.81	Horizontal
5020.0	-63.35	5.23	35.82	-32.76	-25	-7.76	Vertical
7530.0	-65.79	5.67	36.86	-34.60	-25	-9.60	Vertical
7530.0	-63.04	5.67	36.86	-31.85	-25	-6.85	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-63.42	5.23	35.82	-32.83	-25	-7.83	Horizontal
5070.0	-63.00	5.23	35.82	-32.41	-25	-7.41	Vertical
7605.0	-66.12	5.67	36.85	-34.94	-25	-9.94	Vertical
7605.0	-66.36	5.67	36.85	-35.18	-25	-10.18	Horizontal
Test Results for High Channel 2560MHz							
5120.0	-62.45	5.24	35.83	-31.86	-25	-6.86	Horizontal
5120.0	-65.98	5.24	35.83	-35.39	-25	-10.39	Vertical
7680.0	-65.80	5.70	36.88	-34.62	-25	-9.62	Vertical
7680.0	-66.29	5.70	36.88	-35.11	-25	-10.11	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.5 LTE BAND 12

QPSK EIRP POWER FOR LTE BAND 12 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 699.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1399.4	-48.68	2.60	27.2	-24.08	-13	-11.08	Horizontal
1399.4	-49.22	2.60	27.2	-24.62	-13	-11.62	Vertical
2099.1	-49.68	2.85	27.54	-24.99	-13	-11.99	Vertical
2099.1	-49.34	2.85	27.54	-24.65	-13	-11.65	Horizontal
Test Results For Mid Channel 707.5MHz							
1415.0	-51.34	2.61	27.28	-26.67	-13	-13.67	Horizontal
1415.0	-49.82	2.61	27.28	-25.15	-13	-12.15	Vertical
2122.5	-47.72	2.87	27.59	-23.00	-13	-10.00	Vertical
2122.5	-52.66	2.87	27.59	-27.94	-13	-14.94	Horizontal
Test Results for High Channel 715.3MHz							
1430.6	-50.68	2.63	27.28	-26.03	-13	-13.03	Horizontal
1430.6	-55.15	2.63	27.28	-30.50	-13	-17.50	Vertical
2145.9	-52.61	2.88	27.60	-27.89	-13	-14.89	Vertical
2145.9	-50.90	2.88	27.60	-26.18	-13	-13.18	Horizontal

QPSK EIRP POWER FOR LTE BAND 12 (10MHZ BANDWIDTH)

Test Results for Low Channel 704MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1408.0	-47.64	2.61	27.26	-22.99	-13	-9.99	Horizontal
1408.0	-52.40	2.61	27.26	-27.75	-13	-14.75	Vertical
2112.0	-51.64	2.87	27.58	-26.93	-13	-13.93	Vertical
2112.0	-52.75	2.87	27.58	-28.04	-13	-15.04	Horizontal
Test Results for Mid Channel 707.5MHz							
1415.0	-50.92	2.61	27.28	-26.25	-13	-13.25	Horizontal
1415.0	-54.46	2.61	27.28	-29.79	-13	-16.79	Vertical
2122.5	-52.46	2.87	27.59	-27.74	-13	-14.74	Vertical
2122.5	-51.31	2.87	27.59	-26.59	-13	-13.59	Horizontal
Test Results for High Channel 711MHz							
1422.0	-53.73	2.62	27.28	-29.07	-13	-16.07	Horizontal
1422.0	-48.98	2.62	27.28	-24.32	-13	-11.32	Vertical
2133.0	-53.05	2.87	27.60	-28.32	-13	-15.32	Vertical
2133.0	-52.25	2.87	27.60	-27.52	-13	-14.52	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + ARpl (dBm)$

. Over Limit= : $P_{Mea}(dBm) - Limit(dBm)$

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.6 LTE BAND 13

QPSK EIRP POWER FOR LTE BAND 13 (5MHZ BANDWIDTH)

Test Results for Low Channel 1779.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1559	-49.31	2.61	27.28	-24.64	-13	-11.64	Horizontal
1559	-48.27	2.61	27.28	-23.60	-13	-10.60	Vertical
2338.5	-50.06	2.87	27.59	-25.34	-13	-12.34	Vertical
2338.5	-48.55	2.87	27.59	-23.83	-13	-10.83	Horizontal
Test Results For Mid Channel 1782MHz							
1564	-48.62	2.62	27.30	-23.94	-13	-10.94	Horizontal
1564	-50.47	2.62	27.30	-25.79	-13	-12.79	Vertical
2346	-52.30	2.87	27.62	-27.55	-13	-14.55	Vertical
2346	-54.45	2.87	27.62	-29.70	-13	-16.70	Horizontal
Test Results for High Channel 1784.5MHz							
1569	-53.31	2.66	27.28	-28.69	-13	-15.69	Horizontal
1569	-51.60	2.66	27.28	-26.98	-13	-13.98	Vertical
2353.5	-49.69	2.88	27.60	-24.97	-13	-11.97	Vertical
2353.5	-48.91	2.88	27.60	-24.19	-13	-11.19	Horizontal

QPSK EIRP POWER FOR LTE BAND 13 (10MHZ BANDWIDTH)

Test Results for Channel 782MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1564	-52.76	2.62	27.30	-28.08	-13	-15.08	Horizontal
1564	-49.73	2.62	27.30	-25.05	-13	-12.05	Vertical
2346	-51.96	2.87	27.62	-27.21	-13	-14.21	Vertical
2346	-54.60	2.87	27.62	-29.85	-13	-16.85	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + ARpl(dBm)$

. Over Limit = : $P_{Mea}(dBm) - Limit(dBm)$

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.7 LTE BAND 25

QPSK EIRP POWER FOR LTE BAND 25 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1850.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3701.4	-53.23	2.62	27.30	-28.55	-13	-15.55	Horizontal
3701.4	-53.48	2.62	27.30	-28.80	-13	-15.80	Vertical
5552.1	-53.81	2.87	27.62	-29.06	-13	-16.06	Vertical
5552.1	-51.97	2.87	27.62	-27.22	-13	-14.22	Horizontal
Test Results For Mid Channel 1882.5MHz							
3765	-54.70	2.64	27.33	-30.01	-13	-17.01	Horizontal
3765	-53.23	2.64	27.33	-28.54	-13	-15.54	Vertical
5647.5	-54.28	2.88	27.67	-29.49	-13	-16.49	Vertical
5647.5	-53.01	2.88	27.67	-28.22	-13	-15.22	Horizontal
Test Results for High Channel 1914.3MHz							
3828.6	-50.24	2.64	27.33	-25.55	-13	-12.55	Horizontal
3828.6	-54.00	2.64	27.33	-29.31	-13	-16.31	Vertical
5742.9	-52.61	2.88	27.67	-27.82	-13	-14.82	Vertical
5742.9	-52.09	2.88	27.67	-27.30	-13	-14.30	Horizontal

QPSK EIRP POWER FOR LTE BAND 25 (20MHZ BANDWIDTH)

Test Results for Low Channel 1860MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3720	-51.58	2.61	27.26	-26.93	-13	-13.93	Horizontal
3720	-51.75	2.61	27.26	-27.10	-13	-14.10	Vertical
5580	-54.43	2.87	27.58	-29.72	-13	-16.72	Vertical
5580	-52.40	2.87	27.58	-27.69	-13	-14.69	Horizontal
Test Results for Mid Channel 1882.5MHz							
3764	-50.11	2.63	27.28	-25.46	-13	-12.46	Horizontal
3764	-52.80	2.63	27.28	-28.15	-13	-15.15	Vertical
5646	-50.33	2.88	27.62	-25.59	-13	-12.59	Vertical
5646	-51.90	2.88	27.62	-27.16	-13	-14.16	Horizontal
Test Results for High Channel 1905MHz							
3810	-53.71	2.65	27.28	-29.08	-13	-16.08	Horizontal
3810	-53.81	2.65	27.28	-29.18	-13	-16.18	Vertical
5715	-52.37	2.88	27.70	-27.55	-13	-14.55	Vertical
5715	-52.10	2.88	27.70	-27.28	-13	-14.28	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + ARpl(dBm)$

. Over Limit = : $P_{Mea}(dBm) - Limit(dBm)$

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.8 LTE BAND 26

For 814~824MHz

QPSK EIRP POWER FOR LTE BAND 26 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 814.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1629.4	-51.54	2.78	27.50	-26.82	-13	-13.82	Horizontal
1629.4	-52.91	2.78	27.50	-28.19	-13	-15.19	Vertical
2444.1	-55.40	2.90	27.80	-30.50	-13	-17.50	Vertical
2444.1	-66.12	2.90	27.80	-41.22	-13	-28.22	Horizontal
Test Results For Mid Channel 819.0MHz							
1638	-52.62	2.80	27.48	-27.94	-13	-14.94	Horizontal
1638	-53.59	2.80	27.48	-28.91	-13	-15.91	Vertical
2457.5	-54.32	2.91	27.70	-29.53	-13	-16.53	Vertical
2457.5	-55.91	2.91	27.70	-31.12	-13	-18.12	Horizontal
Test Results for High Channel 821.5MHz							
1646.6	-53.04	2.82	27.43	-28.43	-13	-15.43	Horizontal
1646.6	-55.25	2.82	27.43	-30.64	-13	-17.64	Vertical
2469.9	-56.48	2.92	27.74	-31.66	-13	-18.66	Vertical
2469.9	-56.21	2.92	27.74	-31.39	-13	-18.39	Horizontal

QPSK EIRP POWER FOR LTE BAND 26 (10MHZ BANDWIDTH)

Test Results for Low Channel 819MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1638	-54.68	2.82	27.43	-30.07	-13	-17.07	Horizontal
1638	-55.34	2.82	27.43	-30.73	-13	-17.73	Vertical
2457.5	-56.99	2.91	27.74	-32.17	-13	-19.16	Vertical
2457.5	-55.22	2.91	27.74	-30.40	-13	-17.39	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. We test both H direction and V direction, recorded worst case direction.

Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

For 824~849MHz

QPSK EIRP POWER FOR LTE BAND 26 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 824.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1649.4	-56.17	2.78	27.28	-31.67	-13	-18.67	Horizontal
1649.4	-69.26	2.78	27.28	-44.76	-13	-31.76	Vertical
2474.1	-64.13	2.90	27.59	-39.44	-13	-26.44	Vertical
2474.1	-52.49	2.90	27.59	-27.80	-13	-14.80	Horizontal
Test Results For Mid Channel 836.5MHz							
1673	-54.05	2.78	27.3	-29.53	-13	-16.53	Horizontal
1673	-63.99	2.78	27.3	-39.47	-13	-26.47	Vertical
2509.4	-62.52	2.91	27.62	-37.81	-13	-24.81	Vertical
2509.4	-59.79	2.91	27.62	-35.08	-13	-22.08	Horizontal
Test Results for High Channel 848.3MHz							
1696.6	-61.39	2.78	27.28	-36.89	-13	-23.89	Horizontal
1696.6	-56.26	2.78	27.28	-31.76	-13	-18.76	Vertical
2544.9	-56.45	2.92	27.6	-31.77	-13	-18.77	Vertical
2544.9	-61.54	2.92	27.6	-36.86	-13	-23.86	Horizontal

QPSK EIRP POWER FOR LTE BAND 26 (15MHZ BANDWIDTH)

Test Results for Low Channel 821.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1663	-53.09	2.78	27.3	-28.57	-13	-15.57	Horizontal
1663	-58.85	2.78	27.3	-34.33	-13	-21.33	Vertical
2494.5	-61.99	2.90	27.62	-37.27	-13	-24.27	Vertical
2494.5	-58.18	2.90	27.62	-33.46	-13	-20.46	Horizontal
Test Results For Mid Channel 836.5MHz							
1673	-58.12	2.78	27.3	-33.60	-13	-20.60	Horizontal
1673	-56.56	2.78	27.3	-32.04	-13	-19.04	Vertical
2509.5	-63.56	2.91	27.62	-38.85	-13	-25.85	Vertical
2509.5	-60.23	2.91	27.62	-35.52	-13	-22.52	Horizontal
Test Results for High Channel 841.5MHz							
1683	-58.58	2.78	27.3	-34.06	-13	-21.06	Horizontal
1683	-56.77	2.78	27.3	-32.25	-13	-19.25	Vertical
2524.5	-55.94	2.92	27.62	-31.24	-13	-18.24	Vertical
2524.5	-53.50	2.92	27.62	-28.80	-13	-15.80	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + AR_{pl}(dBm)$

. Over Limit = : $P_{Mea}(dBm) - Limit(dBm)$

. We test both H direction and V direction, recorded worst case direction.

Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.9 LTE BAND 41

QPSK EIRP POWER FOR LTE BAND 41 (5MHZ BANDWIDTH)

Test Results for Low Channel 2602.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5205	-58.71	2.63	27.30	-34.04	-13	-21.04	Horizontal
5205	-53.28	2.63	27.30	-28.61	-13	-15.61	Vertical
7807.5	-59.75	2.67	27.62	-34.80	-13	-21.80	Vertical
7807.5	-62.69	2.67	27.62	-37.74	-13	-24.74	Horizontal
Test Results For Mid Channel 2605MHz							
5210	-58.38	2.62	27.33	-33.67	-13	-20.67	Horizontal
5210	-55.62	2.62	27.33	-30.91	-13	-17.91	Vertical
7815	-60.08	2.85	27.67	-35.26	-13	-22.26	Vertical
7815	-59.98	2.85	27.67	-35.16	-13	-22.16	Horizontal
Test Results for High Channel 2607.5MHz							
5215	-56.53	2.64	27.33	-31.84	-13	-18.84	Horizontal
5215	-58.85	2.64	27.33	-34.16	-13	-21.16	Vertical
7822.5	-60.23	2.85	27.67	-35.41	-13	-22.41	Vertical
7822.5	-56.90	2.85	27.67	-32.08	-13	-19.08	Horizontal

QPSK EIRP POWER FOR LTE BAND 41 (20MHZ BANDWIDTH)

Test Results for Low Channel 2595MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5085	-59.61	2.63	27.26	-34.98	-13	-21.98	Horizontal
5085	-58.16	2.63	27.26	-33.53	-13	-20.53	Vertical
7627.5	-60.72	2.67	27.58	-35.81	-13	-22.81	Vertical
7627.5	-62.74	2.67	27.58	-37.83	-13	-24.83	Horizontal
Test Results for Mid Channel 2605MHz							
5186	-50.50	2.62	27.28	-25.84	-13	-12.84	Horizontal
5186	-55.32	2.62	27.28	-30.66	-13	-17.66	Vertical
7779	-58.79	2.85	27.62	-34.02	-13	-21.02	Vertical
7779	-56.61	2.85	27.62	-31.84	-13	-18.84	Horizontal
Test Results for High Channel 2615MHz							
5295	-50.44	2.64	27.28	-25.80	-13	-12.80	Horizontal
5295	-57.70	2.64	27.28	-33.06	-13	-20.06	Vertical
7942.5	-57.60	2.85	27.70	-32.75	-13	-19.75	Vertical
7942.5	-55.84	2.85	27.70	-30.99	-13	-17.99	Horizontal

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30° to $+50^{\circ}\text{C}$
- Voltage = low voltage, DC 3.2V, Normal, DC 3.8V and High voltage, DC 4.4V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

LTE Band 2
LTE Band 4
LTE Band 5
LTE Band 7
LTE Band 12
LTE Band 13
LTE Band 25
LTE Band 26
LTE Band 41

RESULTS

See the following pages.

10.1 LTE BAND 2

QPSK, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 QPSK, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.2	1880	5.2	0.002754	2.5
3.8	1880	6.8	0.003614	2.5
4.4	1880	5.2	0.002747	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 QPSK, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1880	5.9	0.003138	2.5
Extreme (50C)	1880	6.5	0.003453	2.5
Extreme (40C)	1880	7.5	0.004001	2.5
Extreme (30C)	1880	8.1	0.004335	2.5
Extreme (10C)	1880	8.3	0.004392	2.5
Extreme (0C)	1880	5.9	0.003121	2.5
Extreme (-10C)	1880	7.7	0.004070	2.5
Extreme (-20C)	1880	7.8	0.004136	2.5
Extreme (-30C)	1880	5.3	0.002817	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 16QAM, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.2	1880	7.3	0.003902	2.5
3.8	1880	5.6	0.002971	2.5
4.4	1880	6.2	0.003324	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 16QAM, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1880	7.0	0.003706	2.5
Extreme (50C)	1880	4.3	0.002290	2.5
Extreme (40C)	1880	4.9	0.002605	2.5
Extreme (30C)	1880	4.2	0.002260	2.5
Extreme (10C)	1880	5.9	0.003161	2.5
Extreme (0C)	1880	4.3	0.002301	2.5
Extreme (-10C)	1880	9.0	0.004800	2.5
Extreme (-20C)	1880	10.3	0.005483	2.5
Extreme (-30C)	1880	5.7	0.003019	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.2 LTE BAND 4

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 4 QPSK, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.2	1732.5	5.2	0.003020	2.5
3.8	1732.5	9.9	0.005707	2.5
4.4	1732.5	10.0	0.005756	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 4 QPSK, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1732.5	6.6	0.003804	2.5
Extreme (50C)	1732.5	5.8	0.003357	2.5
Extreme (40C)	1732.5	5.4	0.003121	2.5
Extreme (30C)	1732.5	8.7	0.005029	2.5
Extreme (10C)	1732.5	0.4	0.000234	2.5
Extreme (0C)	1732.5	4.3	0.002464	2.5
Extreme (-10C)	1732.5	8.5	0.004904	2.5
Extreme (-20C)	1732.5	8.6	0.004954	2.5
Extreme (-30C)	1732.5	8.5	0.004914	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 4 16QAM, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.2	1732.5	6.5	0.003766	2.5
3.8	1732.5	7.5	0.004306	2.5
4.4	1732.5	6.3	0.003642	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 4 16QAM, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1732.5	5.1	0.002951	2.5
Extreme (50C)	1732.5	5.1	0.002951	2.5
Extreme (40C)	1732.5	3.5	0.002015	2.5
Extreme (30C)	1732.5	6.4	0.003686	2.5
Extreme (10C)	1732.5	3.1	0.001766	2.5
Extreme (0C)	1732.5	4.3	0.002484	2.5
Extreme (-10C)	1732.5	6.3	0.003632	2.5
Extreme (-20C)	1732.5	6.8	0.003897	2.5
Extreme (-30C)	1732.5	5.9	0.003429	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.3 LTE BAND 5

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 QPSK, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.2	836.5	6.2	0.007388	2.5
3.8	836.5	3.1	0.003658	2.5
4.4	836.5	4.3	0.005146	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 QPSK, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	836.5	3.5	0.004173	2.5
Extreme (50C)	836.5	6.4	0.007635	2.5
Extreme (40C)	836.5	3.1	0.003658	2.5
Extreme (30C)	836.5	4.3	0.005146	2.5
Extreme (10C)	836.5	3.1	0.003658	2.5
Extreme (0C)	836.5	4.3	0.005146	2.5
Extreme (-10C)	836.5	6.3	0.007523	2.5
Extreme (-20C)	836.5	6.8	0.008070	2.5
Extreme (-30C)	836.5	5.9	0.007101	2.5

16QAM, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 16QAM, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.2	836.5	12.0	0.014345	2.5
3.8	836.5	12.0	0.014345	2.5
4.4	836.5	8.3	0.009880	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 16QAM, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	836.5	8.8	0.010526	2.5
Extreme (50C)	836.5	6.4	0.007693	2.5
Extreme (40C)	836.5	8.3	0.009896	2.5
Extreme (30C)	836.5	12.0	0.014345	2.5
Extreme (10C)	836.5	11.0	0.013150	2.5
Extreme (0C)	836.5	13.0	0.015541	2.5
Extreme (-10C)	836.5	8.3	0.009880	2.5
Extreme (-20C)	836.5	7.7	0.009190	2.5
Extreme (-30C)	836.5	7.7	0.009209	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.4 LTE BAND 7

QPSK, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 QPSK, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.2	2535	6.3	0.002482	2.5
3.8	2535	6.8	0.002663	2.5
4.4	2535	5.8	0.002288	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 QPSK, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	2535	3.5	0.001377	2.5
Extreme (50C)	2535	6.4	0.002519	2.5
Extreme (40C)	2535	3.1	0.001207	2.5
Extreme (30C)	2535	4.3	0.001698	2.5
Extreme (10C)	2535	3.1	0.001207	2.5
Extreme (0C)	2535	4.3	0.001698	2.5
Extreme (-10C)	2535	6.3	0.002482	2.5
Extreme (-20C)	2535	6.8	0.002663	2.5
Extreme (-30C)	2535	5.9	0.002343	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 16QAM, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.2	2535	6.3	0.002482	2.5
3.8	2535	6.8	0.002663	2.5
4.4	2535	5.9	0.002343	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 16QAM, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	2535	3.5	0.001377	2.5
Extreme (50C)	2535	6.4	0.002519	2.5
Extreme (40C)	2535	3.1	0.001207	2.5
Extreme (30C)	2535	4.3	0.001698	2.5
Extreme (10C)	2535	3.1	0.001207	2.5
Extreme (0C)	2535	4.3	0.001698	2.5
Extreme (-10C)	2535	6.3	0.002482	2.5
Extreme (-20C)	2535	6.8	0.002663	2.5
Extreme (-30C)	2535	5.9	0.002343	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.5 LTE BAND 12

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 12 QPSK, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.2	707.5	6.4	0.009022	2.5
3.8	707.5	6.6	0.009356	2.5
4.4	707.5	6.9	0.009798	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 12 QPSK, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	707.5	8.2	0.011613	2.5
Extreme (50C)	707.5	7.6	0.010754	2.5
Extreme (40C)	707.5	6.4	0.009022	2.5
Extreme (30C)	707.5	6.6	0.009356	2.5
Extreme (10C)	707.5	6.9	0.009798	2.5
Extreme (0C)	707.5	7.7	0.010838	2.5
Extreme (-10C)	707.5	9.1	0.012870	2.5
Extreme (-20C)	707.5	7.0	0.009831	2.5
Extreme (-30C)	707.5	7.4	0.010389	2.5

16QAM, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 12 16QAM, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.2	707.5	6.4	0.009022	2.5
3.8	707.5	6.6	0.009356	2.5
4.4	707.5	6.9	0.009798	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 12 QPSK, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	707.5	6.9	0.009798	2.5
Extreme (50C)	707.5	7.7	0.010838	2.5
Extreme (40C)	707.5	6.4	0.009022	2.5
Extreme (30C)	707.5	6.8	0.009611	2.5
Extreme (10C)	707.5	6.9	0.009798	2.5
Extreme (0C)	707.5	7.7	0.010838	2.5
Extreme (-10C)	707.5	9.1	0.012870	2.5
Extreme (-20C)	707.5	7.0	0.009831	2.5
Extreme (-30C)	707.5	7.4	0.010389	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.6 LTE BAND 13

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 13 QPSK, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.2	707.5	3.5	0.004908	2.5
3.8	707.5	6.1	0.008574	2.5
4.4	707.5	6.6	0.009340	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 13 QPSK, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	707.5	4.6	0.006439	2.5
Extreme (50C)	707.5	3.8	0.005338	2.5
Extreme (40C)	707.5	5.4	0.007612	2.5
Extreme (30C)	707.5	5.8	0.008160	2.5
Extreme (10C)	707.5	7.7	0.010866	2.5
Extreme (0C)	707.5	6.7	0.009502	2.5
Extreme (-10C)	707.5	6.4	0.008956	2.5
Extreme (-20C)	707.5	7.8	0.010931	2.5
Extreme (-30C)	707.5	6.9	0.009669	2.5

16QAM, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 13 16QAM, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.2	707.5	6.4	0.008956	2.5
3.8	707.5	7.8	0.010931	2.5
4.4	707.5	6.9	0.009669	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 13 QPSK, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	707.5	4.0	0.005673	2.5
Extreme (50C)	707.5	3.8	0.005338	2.5
Extreme (40C)	707.5	5.4	0.007612	2.5
Extreme (30C)	707.5	5.8	0.008160	2.5
Extreme (10C)	707.5	7.7	0.010866	2.5
Extreme (0C)	707.5	6.7	0.009502	2.5
Extreme (-10C)	707.5	8.5	0.011985	2.5
Extreme (-20C)	707.5	7.0	0.009917	2.5
Extreme (-30C)	707.5	5.5	0.007693	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.7 LTE BAND 25

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 25 QPSK, (CH 26365 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.2	1882.5	8.5	0.004520	2.5
3.8	1882.5	7.0	0.003740	2.5
4.4	1882.5	5.5	0.002902	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 25 QPSK, (CH 26365 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1882.5	6.5	0.003458	2.5
Extreme (50C)	1882.5	6.0	0.003209	2.5
Extreme (40C)	1882.5	4.5	0.002370	2.5
Extreme (30C)	1882.5	2.5	0.001343	2.5
Extreme (10C)	1882.5	3.7	0.001986	2.5
Extreme (0C)	1882.5	4.8	0.002547	2.5
Extreme (-10C)	1882.5	6.7	0.003567	2.5
Extreme (-20C)	1882.5	5.7	0.003053	2.5
Extreme (-30C)	1882.5	5.4	0.002846	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 25 16QAM, (CH 23790 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.2	1882.5	3.7	0.001986	2.5
3.8	1882.5	4.8	0.002547	2.5
4.4	1882.5	6.7	0.003567	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 25 QPSK, (CH 23790 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	1882.5	4.4	0.002337	2.5
Extreme (50C)	1882.5	6.1	0.003240	2.5
Extreme (40C)	1882.5	6.9	0.003665	2.5
Extreme (30C)	1882.5	8.6	0.004568	2.5
Extreme (10C)	1882.5	8.6	0.004568	2.5
Extreme (0C)	1882.5	6.4	0.003400	2.5
Extreme (-10C)	1882.5	10.7	0.005706	2.5
Extreme (-20C)	1882.5	9.4	0.005015	2.5
Extreme (-30C)	1882.5	6.2	0.003293	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.7 LTE BAND 26

814~824MHz

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 26 QPSK, (CH 26740 RB size 75 RB Offset 0 10MHz BANDWIDTH)				
3.2	819.0	8.1	0.009890	2.5
3.8	819.0	8.3	0.010134	2.5
4.4	819.0	5.9	0.007204	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 26 QPSK, (CH 26740 RB size 75 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	819.0	5.9	0.007204	2.5
Extreme (50C)	819.0	6.5	0.007937	2.5
Extreme (40C)	819.0	7.5	0.009158	2.5
Extreme (30C)	819.0	6.2	0.007570	2.5
Extreme (10C)	819.0	5.3	0.006471	2.5
Extreme (0C)	819.0	4.9	0.005983	2.5
Extreme (-10C)	819.0	7.7	0.009402	2.5
Extreme (-20C)	819.0	7.8	0.009524	2.5
Extreme (-30C)	819.0	5.2	0.006349	2.5

16QAM, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 26 16QAM, (CH 26740 RB size 75 RB Offset 0 10MHz BANDWIDTH)				
3.2	819.0	3.7	0.004518	2.5
3.8	819.0	3.6	0.004396	2.5
4.4	819.0	4.6	0.005617	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 26 16QAM, (CH 26740 RB size 75 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	819	5	0.006105	2.5
Extreme (50C)	819	5.1	0.006227	2.5
Extreme (40C)	819	3.7	0.004518	2.5
Extreme (30C)	819	3.6	0.004396	2.5
Extreme (10C)	819	4.6	0.005617	2.5
Extreme (0C)	819	1.5	0.001832	2.5
Extreme (-10C)	819	3.5	0.004274	2.5
Extreme (-20C)	819	6.9	0.008425	2.5
Extreme (-30C)	819	5.2	0.006349	2.5

QPSK, (15MHz BANDWIDTH)

824~849MHz

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 26 QPSK, (CH 26740 RB size 75 RB Offset 0 10MHz BANDWIDTH)				
3.2	836.5	9.2	0.010998	2.5
3.8	836.5	10.5	0.012552	2.5
4.4	836.5	9.5	0.011357	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 26 QPSK, (CH 26740 RB size 75 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	836.5	10.0	0.011955	2.5
Extreme (50C)	836.5	9.6	0.011476	2.5
Extreme (40C)	836.5	8.2	0.009803	2.5
Extreme (30C)	836.5	8.5	0.010161	2.5
Extreme (10C)	836.5	9.7	0.011596	2.5
Extreme (0C)	836.5	7.2	0.008607	2.5
Extreme (-10C)	836.5	5.2	0.006216	2.5
Extreme (-20C)	836.5	8.4	0.010042	2.5
Extreme (-30C)	836.5	8.1	0.009683	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 26 16QAM, (CH 26740 RB size 75 RB Offset 0 10MHz BANDWIDTH)				
3.2	836.5	8.9	0.010640	2.5
3.8	836.5	10.8	0.012911	2.5
4.4	836.5	9.6	0.011476	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 26 16QAM, (CH 26740 RB size 75 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	836.5	6.6	0.007890	2.5
Extreme (50C)	836.5	7.1	0.008488	2.5
Extreme (40C)	836.5	9.6	0.011476	2.5
Extreme (30C)	836.5	6.3	0.007531	2.5
Extreme (10C)	836.5	6.2	0.007412	2.5
Extreme (0C)	836.5	5.4	0.006455	2.5
Extreme (-10C)	836.5	9.6	0.011476	2.5
Extreme (-20C)	836.5	9.4	0.011237	2.5
Extreme (-30C)	836.5	6.1	0.007292	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.10 LTE BAND 41

QPSK, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 41 QPSK, (CH 40620 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.2	2605	3.2	0.001228	2.5
3.8	2605	9.8	0.003762	2.5
4.4	2605	-3.2	-0.001228	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 41 QPSK, (CH 40620 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	2605	-6.3	-0.002418	2.5
Extreme (50C)	2605	-5.2	-0.001996	2.5
Extreme (40C)	2605	-5.4	-0.002073	2.5
Extreme (30C)	2605	2.6	0.000998	2.5
Extreme (10C)	2605	1.7	0.000667	2.5
Extreme (0C)	2605	-7.6	-0.002923	2.5
Extreme (-10C)	2605	-6.1	-0.002342	2.5
Extreme (-20C)	2605	-4.7	-0.001804	2.5
Extreme (-30C)	2605	-3.5	-0.001344	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 41 16QAM, (CH 40620 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.2	2605	2.9	0.001113	2.5
3.8	2605	10.1	0.003877	2.5
4.4	2605	3.6	0.001382	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 41 16QAM, (CH 40620 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	2605	6.4	0.002457	2.5
Extreme (50C)	2605	7.1	0.002726	2.5
Extreme (40C)	2605	4.6	0.001766	2.5
Extreme (30C)	2605	-6.4	-0.002457	2.5
Extreme (10C)	2605	3.5	0.001344	2.5
Extreme (0C)	2605	4.7	0.001804	2.5
Extreme (-10C)	2605	5.2	0.001996	2.5
Extreme (-20C)	2605	2.4	0.000921	2.5
Extreme (-30C)	2605	-3.1	-0.001190	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
 - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
 - b. Set EUT in maximum power output, and triggered the burst signal.
 - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

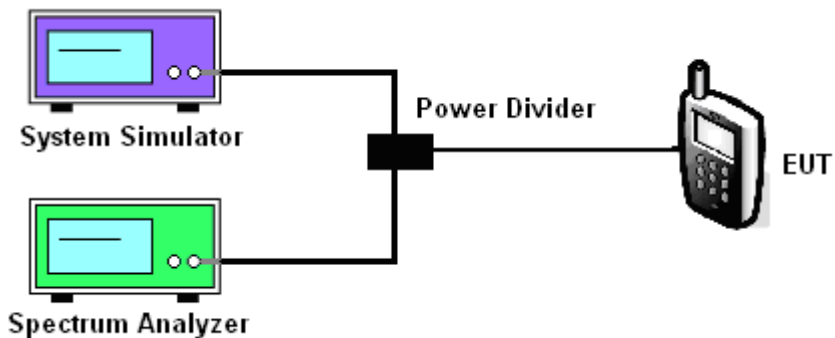

MODES TESTED

- LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 25
- LTE Band 26
- LTE Band 41

Test data reference attachment.

----END OF REPORT----