



**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
UNINTENTIONAL RADIATORS CERTIFICATION TO  
FCC PART 15 SUBPART B REQUIREMENT**

for

**Panel light**

**Model No.: Please refer to page 6**

**Trademark: TWINSEL, SHUANGYU, RISEN, SYL, Artika**

**FCC ID: 2AUHG-FLP14-SRCT**

**Report No.: EA20110091F01001**

**Issue Date: Nov. 20, 2020**

*Prepared for*

**ARTIKA FOR LIVING INC**

**1756 50th avenue, Lachine, Quebec, Canada, H8T 2V5**

*Prepared by*

**Dong Guan Anci Electronic Technology Co., Ltd.**

**1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan, Lake Hi-tech  
Industrial Development Zone, Dongguan City, Guangdong Pr., China.**

**This report shall not be reproduced, except in full, without the written approval of  
Dong Guan Anci Electronic Technology Co., Ltd.**

## TABLE OF CONTENT

<b>Test Report Description</b>	<b>Page</b>
<b>1. SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
<b>2. GENERAL INFORMATION.....</b>	<b>6</b>
2.1. Description of Device (EUT).....	6
2.2. Input / Output Ports.....	6
2.3. Independent Operation Modes.....	6
2.4. Test Manner.....	7
2.5. Description of Test Facility.....	8
2.6. Test Software.....	8
2.7. Description of Support Device.....	8
2.8. Measurement Uncertainty.....	8
<b>3. MEASURING DEVICE AND TEST EQUIPMENT.....</b>	<b>9</b>
3.1. For Power Line Conducted Emission Measurement.....	9
3.2. For Radiated Emission Measurement.....	9
<b>4. POWER LINE CONDUCTED EMISSION MEASUREMENT.....</b>	<b>10</b>
4.1. Block Diagram of Test Setup.....	10
4.2. Limits.....	10
4.3. Test Procedure.....	10
4.4. Measuring Results.....	11
<b>5. RADIATED EMISSION MEASUREMENT (UP TO 1GHZ).....</b>	<b>14</b>
5.1. Block Diagram of Test Setup.....	14
5.2. Radiated Limit.....	14
5.3. Test Procedure.....	14
5.4. Measuring Results.....	15
<b>6. PHOTOGRAPHS.....</b>	<b>18</b>
6.1. Photos of Conducted Emission Measurement.....	18
6.2. Photos of Radiation Emission Measurement.....	18
 APPENDIX A: Photos of EUT (6 Pages)	



### TEST REPORT DESCRIPTION

Applicant : ARTIKA FOR LIVING INC  
Manufacturer : ARTIKA FOR LIVING INC  
Factory : ZHEJIANG SHUANGYU ELECTRONIC TECHNOLOGY CO.,LTD  
Trade Mark : TWINSEL, SHUANGYU, RISEN, SYL, Artika  
EUT : Panel light  
Model No. : Please refer to page 6  
Power Supply : AC 120V/60Hz,160mA

**Measurement Procedure Used:**


CFR 47, FCC Part 15 Subpart B  
ANSI C63.4-2014

The device described above is tested by Dong Guan Anci Electronic Technology Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Dong Guan Anci Electronic Technology Co., Ltd. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Dong Guan Anci Electronic Technology Co., Ltd.

Date of Test : Nov. 17, 2020 to Nov. 20, 2020

Prepared by :   
Tomas Yang/Supervisor

Approved & Authorized Signer :   
Alan He/Manager



### Modified Information

Version	Report No.	Revision Data	Summary
Ver.1.0	EA20110091F01001	/	Original Version

## 1. SUMMARY OF TEST RESULTS

<b>EMISSION</b>		
Description of Test Item	Standard & Limits	Results
Conducted Emission at Mains Terminals	FCC Part 15, Subpart B, Class B ANSI C63.4-2014	Pass
Radiated Emission	FCC Part 15, Subpart B, Class B ANSI C63.4-2014	Pass

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

EUT : Panel light

Model Number : PLU02-1446T-YX/X/X-NI  
 : (YX in the model designation could be any numbers, where each Y could be one number to indicate Color Rendering Index (like 8 represents RI 80, 9 represents CRI 80, 9 represents CRI 90), each X could be two numbers or two number ranges to indicate color temperature (like 22 represents 2200K, 65 represen)),  
 FLP14-SRC-XXX-XXX  
 (“XXX” can be 0 to 9 and/or A to Z and/or Blank (commercial code))  
 The two models are the same except for the model name and band.

Test Model : FL14P-SRC-C-T

Test Voltage : AC 120V/60Hz

Applicant : ARTIKA FOR LIVING INC

Address : 1756 50th avenue, Lachine, Quebec, Canada, H8T 2V5

Manufacturer : ARTIKA FOR LIVING INC

Address : 1756 50th avenue, Lachine, Quebec, Canada, H8T 2V5

Factory : ZHEJIANG SHUANGYU ELECTRONIC TECHNOLOGY CO.,LTD

Address : Tashan Industry Zone, Meilin Street, Ninghai County, Ningbo City, 315609, Zhejiang, P.R.China

Date of Received : Nov. 17, 2020

Date of Test : Nov. 17, 2020 to Nov. 20, 2020

### 2.2. Input / Output Ports

Port #	Name	Type*	Cable Max. >3m	Cable Shielded	Comments
0	Enclosure	N/E	--	--	None
1	AC Input port	AC	--	--	1 Port
2	USB Port	I/O	--	--	1 Port
3	Aux Port	I/O	--	--	1 Port
4	Earphone	I/O	--	--	1 Port

\* Note: Use abbreviations:  
 AC= AC Power Port  
 DC= DC Power Port  
 N/E= Non-Electrical  
 I/O= Signal Input or Output Port (Not Involved in Process Control)  
 TP= Telecommunication Ports

### 2.3. Independent Operation Modes

A. On

B. Off

#### 2.4. Test Manner

Test Items	Test Voltage	Operation Modes	Worst case
Conducted Emission	AC 120V/60Hz	Mode A	On
Radiated Emission	AC 120V/60Hz	Mode A	On

## 2.5. Description of Test Facility

Site Description EMC Lab.	: Accredited by CNAS, 2017.06.26 The certificate is valid until 2022.10.28 The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005) The Certificate Registration Number is L0468.
	Accredited by A2LA, 2018.03.15 The Certificate Number is 4422.01.
Name of Firm	: Dong Guan Anci Electronic Technology Co., Ltd.
Site Location	: Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China.

## 2.6. Test Software

Item Conducted Emission	Software : EZ-EMC Ver:ANCI-3A1
----------------------------	-----------------------------------

Radiated Emission : EZ-EMC Ver:ANCI-3A1

## 2.7. Description of Support Device

N/A

## 2.8. Measurement Uncertainty

Test Item	Uncertainty
Conducted Emission Uncertainty	: 2.96dB(9k~150kHz Conduction 1#) 2.74dB(150k-30MHz Conduction 1#)
Radiated Emission Uncertainty (3m Chamber)	: 3.78dB (30M~1GHz Polarize: H) 4.27dB (30M~1GHz Polarize: V)



### 3. MEASURING DEVICE AND TEST EQUIPMENT

#### 3.1. For Power Line Conducted Emission Measurement


Item	EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Calibrated until
1.	L.I.S.N	SCHWARZBECK	NSLK 8127	8127-669	2021-05-18
2.	10 db attenuator	JFW	50FP-010-H4	4360846-427-1	2021-05-18
3.	RF Cable	N/A	N/A	2#	2021-05-18
4.	EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101358	2021-05-18

#### 3.2. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
5.	EMI Test Receiver	Rohde & Schwarz	ESPI	100502	2020-11-28
6.	Pre-Amplifier	HP	8447D	2727A06172	2021-05-18
7.	Bilog Antenna	Schwarzbeck	VULB9163	VULB9163-588	2021-05-18
8.	Loop Antenna	Schwarzbeck	FMZB 1516	1516-141	2021-05-18
9.	RF Cable	Gigalink Microwave	ZT40-2.92J-2.92 J-2m	N/A	2021-05-18
10.	RF Cable	Gigalink Microwave	ZT40-2.92J-2.92 J-0.3m	N/A	2021-05-18
11.	RF Cable	N/A	N/A	6#	2021-05-18
12.	3m Semi-anechoic Chamber	chengyu	9m*6m*6m	N/A	2021-05-18
13.	Test Software	Farad	EZ-EMC Ver:ANCI-3A1	N/A	N/A

## 4. POWER LINE CONDUCTED EMISSION MEASUREMENT

### 4.1. Block Diagram of Test Setup

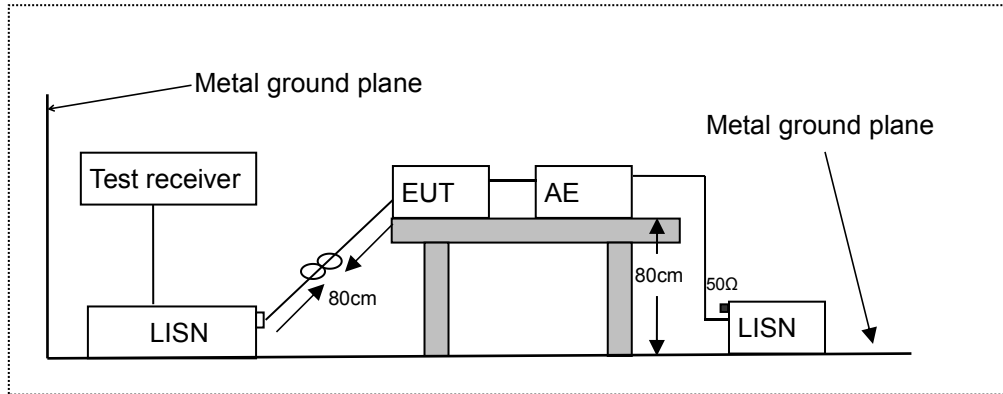

LISN: Line Impedance Stabilization Network  
 AE: Associated equipment  
 EUT: Equipment under test

### 4.2. Limits

FCC Part 15, Subpart B, Class B

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.  
 NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

### 4.3. Test Procedure

The EUT was placed on a desk 0.8 m height from the metal ground plane and 0.4 m from the conducting wall of the shielding room and it was kept at least 0.8 m from any other grounded conducting surface. The size of the table will nominally be 1.5 m x1.0 m.

The rear of the arrangement shall be flush with the back of the supporting tabletop unless that would not be possible or typical of normal use.

All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0.1 m separation is achieved between the neighboring units.

Connect EUT to the power mains through a line impedance stabilization network (LISN). Where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, so that its length is shortened to 1 m.

All the support units are connecting to the other LISN.

The LISN provides 50 ohm coupling impedance for the measuring instrument.

Both sides of AC line were checked for maximum conducted interference.

The frequency range from 150 kHz to 30 MHz was sweep.

Set the test-receiver system to quasi peak detect function and average detect function, and to

measure the conducted emissions values.

Test results were obtained from the following equation:


Emission Level (dB $\mu$ V) = LISN Factor (dB) + Cable Loss (dB) + Reading (dB $\mu$ V)

Margin (dB) = Emission Level (dB $\mu$ V) - Limit (dB $\mu$ V)

#### 4.4. Measuring Results

**PASS.**


Please refer to following pages.

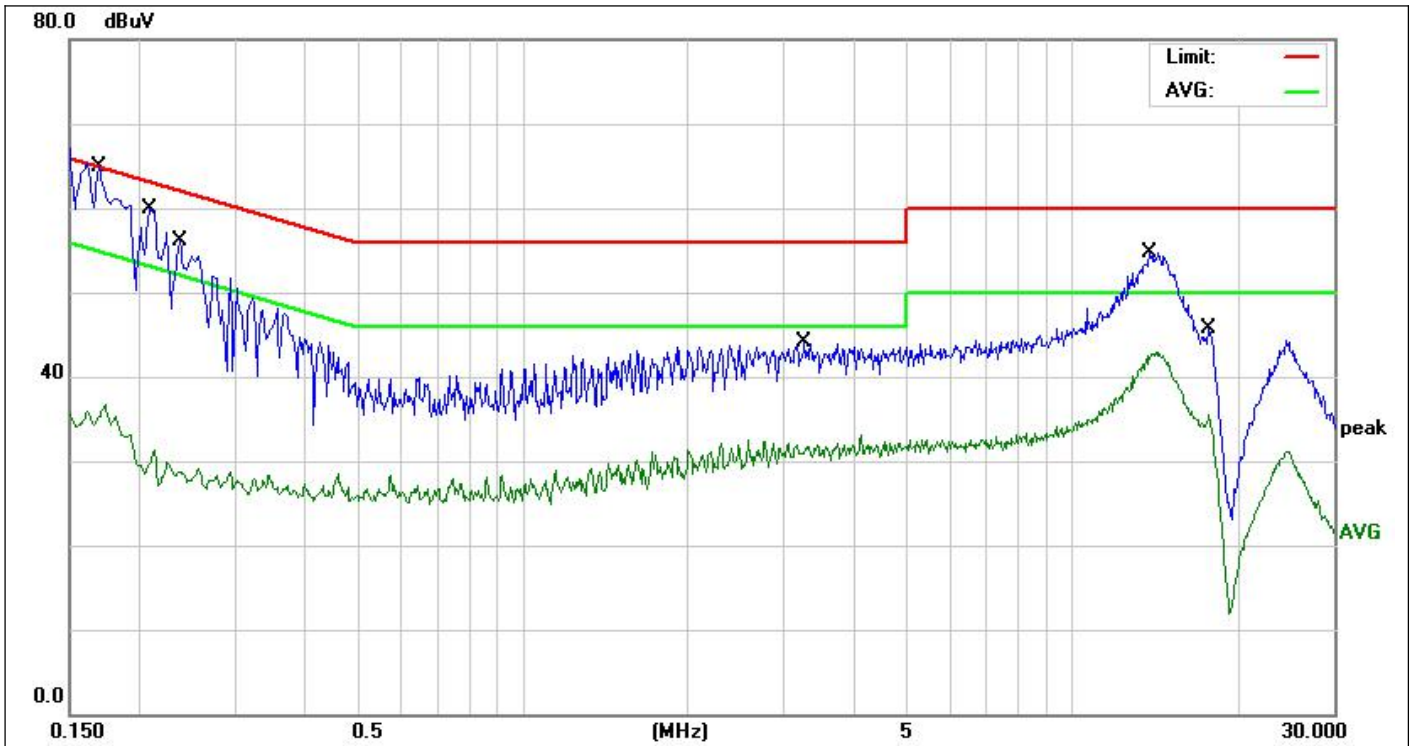

Site:	843	Phase:L1	Temperature(C):26(C)
Limit:	FCC PART 15B Conduction(QP)	Test Time:	Humidity(%):60%
EUT:	Panel light	Power Rating:	2020-11-20
M/N.:	FL14P-SRC-C-T	Test Engineer:	AC 120V/60Hz
Mode:	ON		Sunshine
Note:			

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.1700	45.01	9.69	54.70	64.96	-10.26	QP	
2	0.1700	25.47	9.69	35.16	54.96	-19.80	AVG	
3	0.2100	40.24	9.72	49.96	63.20	-13.24	QP	
4	0.2100	19.13	9.72	28.85	53.20	-24.35	AVG	
5	0.2380	37.42	9.72	47.14	62.16	-15.02	QP	
6	0.2380	18.44	9.72	28.16	52.16	-24.00	AVG	
7	3.2740	27.77	9.84	37.61	56.00	-18.39	QP	
8	3.2740	20.54	9.84	30.38	46.00	-15.62	AVG	
9	13.9100	39.42	10.00	49.42	60.00	-10.58	QP	
10 *	13.9100	30.79	10.00	40.79	50.00	-9.21	AVG	
11	17.6820	30.40	10.11	40.51	60.00	-19.49	QP	
12	17.6820	23.87	10.11	33.98	50.00	-16.02	AVG	

\*:Maximum data x:Over limit !:over margin

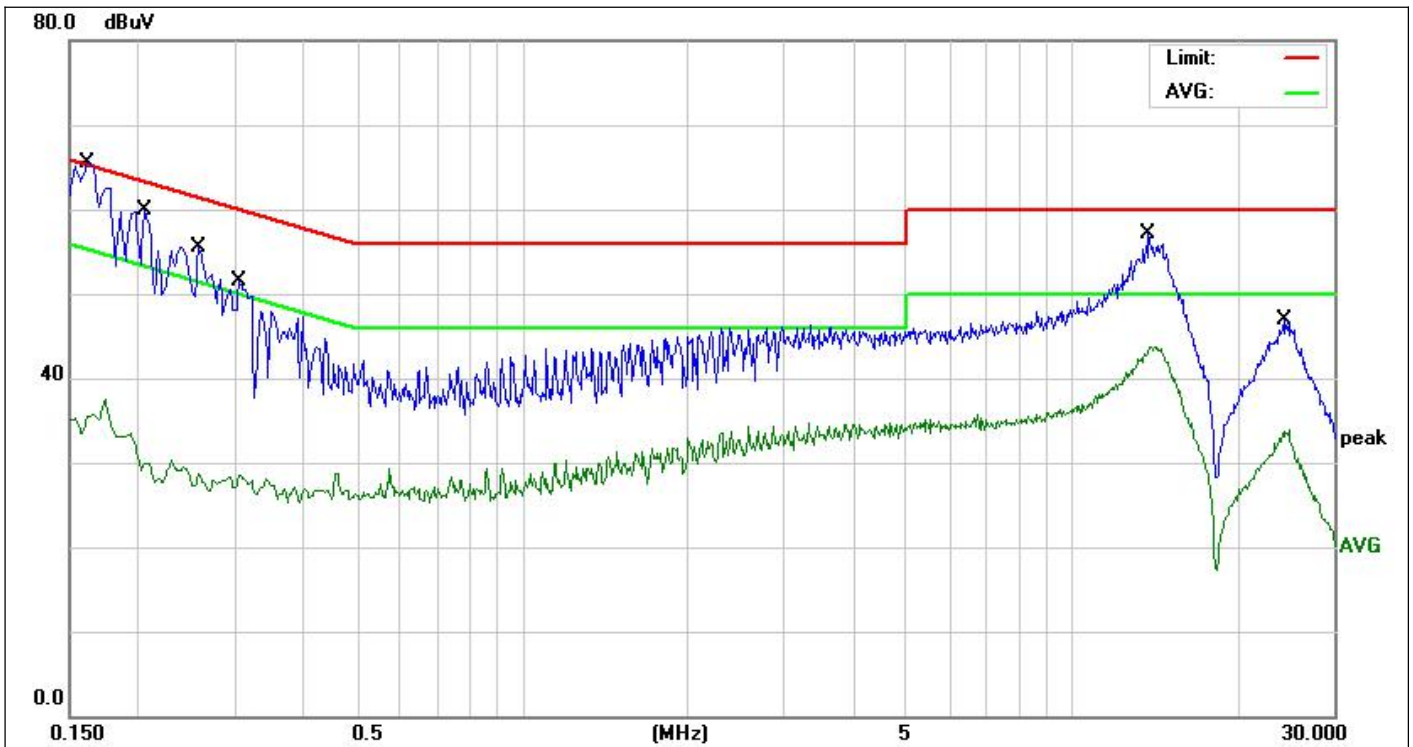


Site:	843	Phase:	N	Temperature(C):	26(C)
Limit:	FCC PART 15B Conduction(QP)	Test Time:	2020-11-20	Humidity(%):	60%
EUT:	Panel light	Power Rating:	AC 120V/60Hz	Test Engineer:	Sunshine
M/N.:	FL14P-SRC-C-T	Test Engineer:	Sunshine		
Mode:	ON				
Note:					

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.1620	46.15	9.69	55.84	65.36	-9.52	QP	
2	0.1620	23.80	9.69	33.49	55.36	-21.87	AVG	
3	0.2060	40.52	9.72	50.24	63.36	-13.12	QP	
4	0.2060	19.59	9.72	29.31	53.36	-24.05	AVG	
5	0.2580	34.78	9.73	44.51	61.49	-16.98	QP	
6	0.2580	17.45	9.73	27.18	51.49	-24.31	AVG	
7	0.3060	31.03	9.73	40.76	60.08	-19.32	QP	
8	0.3060	17.44	9.73	27.17	50.08	-22.91	AVG	
9	13.8380	40.62	10.00	50.62	60.00	-9.38	QP	
10 *	13.8380	32.22	10.00	42.22	50.00	-7.78	AVG	
11	24.3140	29.38	10.23	39.61	60.00	-20.39	QP	
12	24.3140	21.34	10.23	31.57	50.00	-18.43	AVG	

\*:Maximum data x:Over limit !:over margin

## 5. RADIATED EMISSION MEASUREMENT (UP TO 1GHz)

### 5.1. Block Diagram of Test Setup

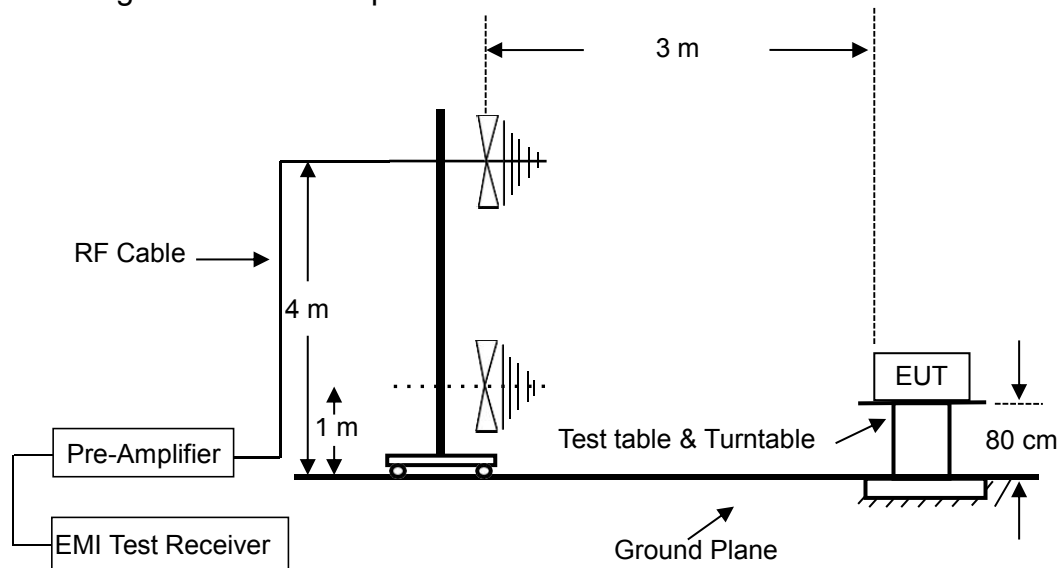

### 5.2. Radiated Limit

FCC Part 15, Subpart B, Class B

Frequency MHz	Distance Meters	Field Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

### 5.3. Test Procedure

The EUT was placed on a non-conductive table whose total height equaled 80cm. All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0.1 m separation is achieved between the neighboring units. Where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, so that its length is shortened to 1 m.

The EUT was set 3 meters away from the receiving antenna that was mounted on a non-conductive mast. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level.

The turntable can rotate 360 degree to determine the position of the maximum emission level.

The initial testing identified the frequency that has the highest disturbance relative to the limit while operating the EUT in typical modes of operation and cable positions in a test setup representative of typical system configuration.

The identification of the frequency of highest emission with respect to the limit was found by investigating emissions at a number of significant frequencies. The probable frequency of maximum emission had been found and that the associated cable and EUT configuration and mode of operation had been identified.

The bandwidth of the Receiver is set at 120 kHz.

Test results were obtained from the following equation:  
Emission level (dB $\mu$ V/m) = Antenna Factor -Amp Factor +Cable Loss + Reading  
Margin (dB) = Emission Level (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)

#### 5.4. Measuring Results

**PASS.**

Please refer to following pages.




Site:	843.3	Antenna::Horizontal	Temperature(C):26(C)
Limit:	FCC Part 15 B Radiation(QP)	Test Time:	Humidity(%):60%
EUT:	Panel light	Power Rating:	AC 120V/60Hz
M/N.:	FL14P-SRC-C-T	Test Engineer:	Bast
Mode:	ON		
Note:			

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	116.7446	30.16	-12.32	17.84	43.50	-25.66	QP	
2	136.6993	44.22	-14.33	29.89	43.50	-13.61	QP	
3 *	173.2051	46.02	-12.65	33.37	43.50	-10.13	QP	
4	187.4241	39.01	-11.54	27.47	43.50	-16.03	QP	
5	206.3976	34.69	-10.64	24.05	43.50	-19.45	QP	
6	243.8043	30.26	-9.77	20.49	46.00	-25.51	QP	

\*:Maximum data x:Over limit !:over margin



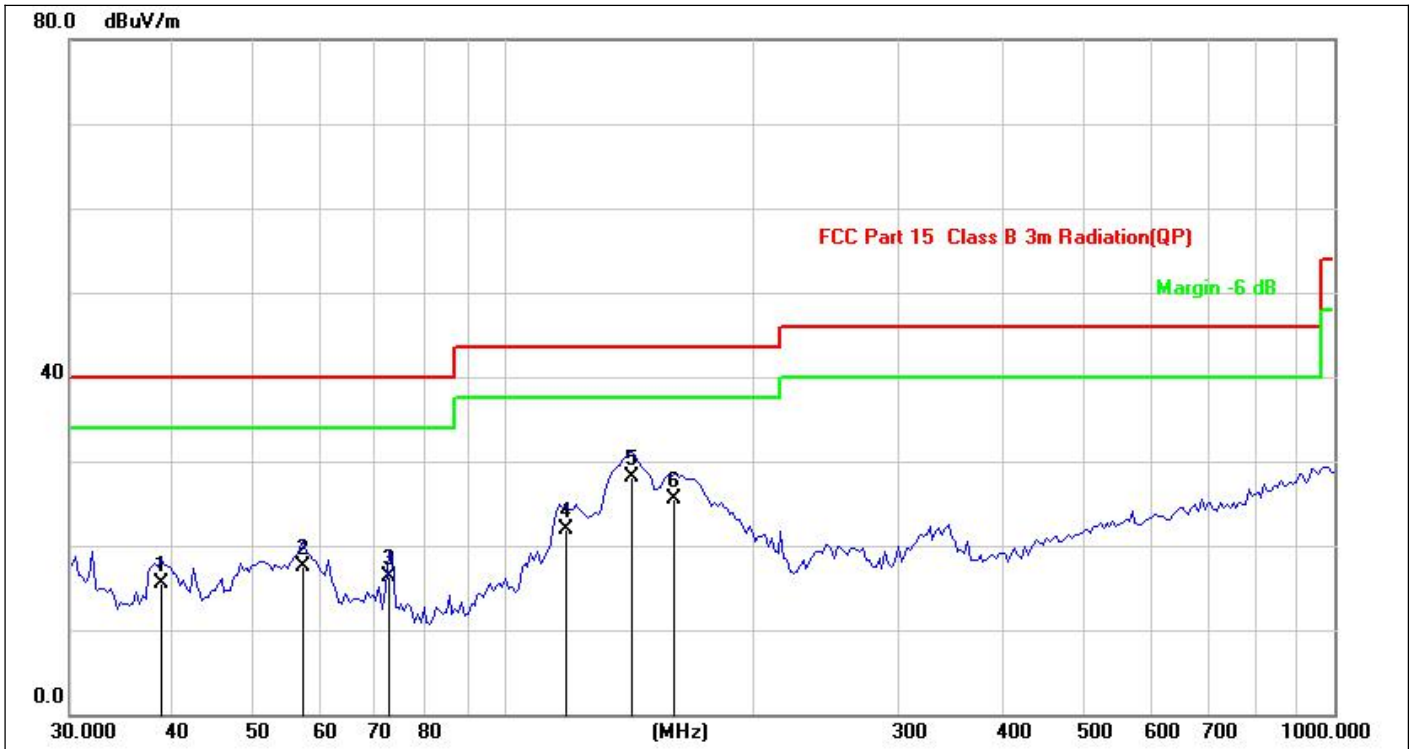

Site:	843.3	Antenna::Vertical	Temperature(C):26(C)
Limit:	FCC Part 15 B Radiation(QP)		Humidity(%):60%
EUT:	Panel light	Test Time:	2020-11-19
M/N.:	FL14P-SRC-C-T	Power Rating:	AC 120V/60Hz
Mode:	ON	Test Engineer:	Bast
Note:			

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	38.6839	28.85	-13.27	15.58	40.00	-24.42	QP	
2	57.3923	30.59	-13.14	17.45	40.00	-22.55	QP	
3	72.7190	32.13	-15.76	16.37	40.00	-23.63	QP	
4	118.8095	34.64	-12.65	21.99	43.50	-21.51	QP	
5 *	142.8243	42.52	-14.47	28.05	43.50	-15.45	QP	
6	160.0648	39.01	-13.56	25.45	43.50	-18.05	QP	

\*:Maximum data x:Over limit !:over margin

## 6. PHOTOGRAPHS



### 6.1. Photos of Conducted Emission Measurement





### 6.2. Photos of Radiation Emission Measurement




**APPENDIX A: Photos of EUT**

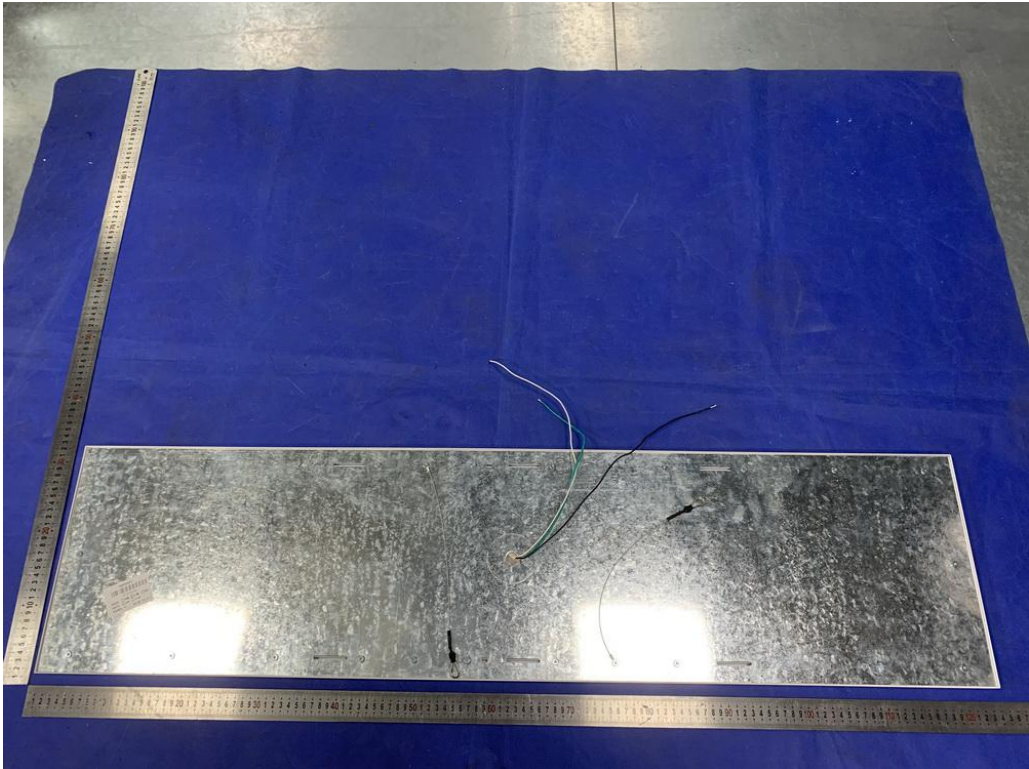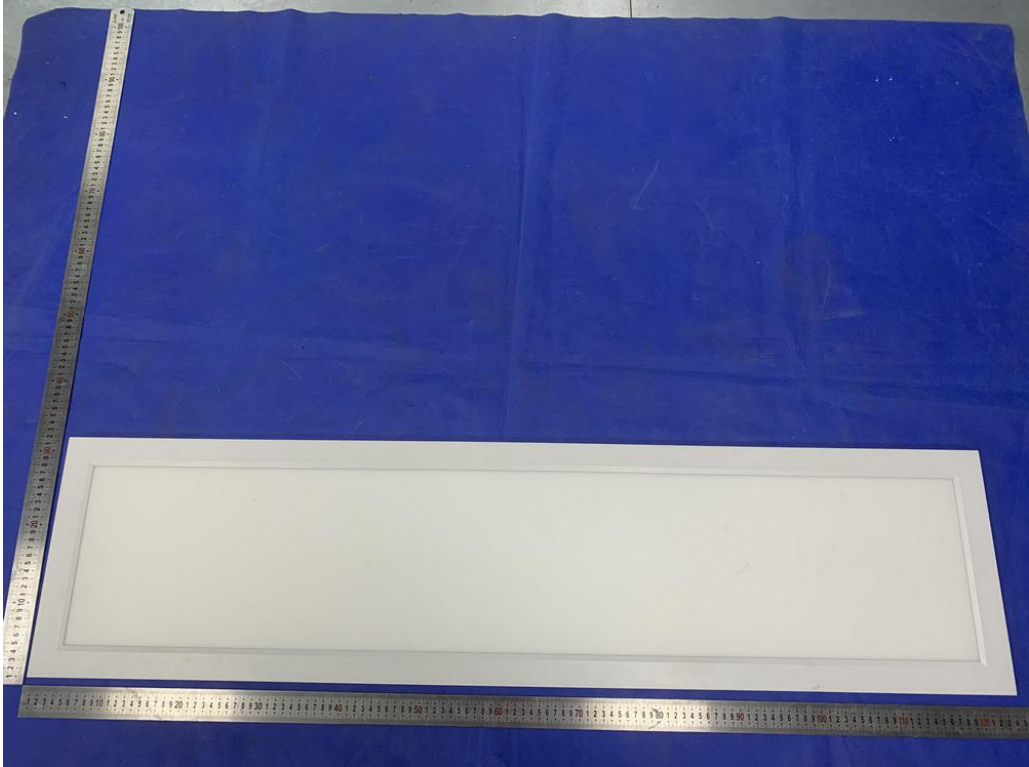




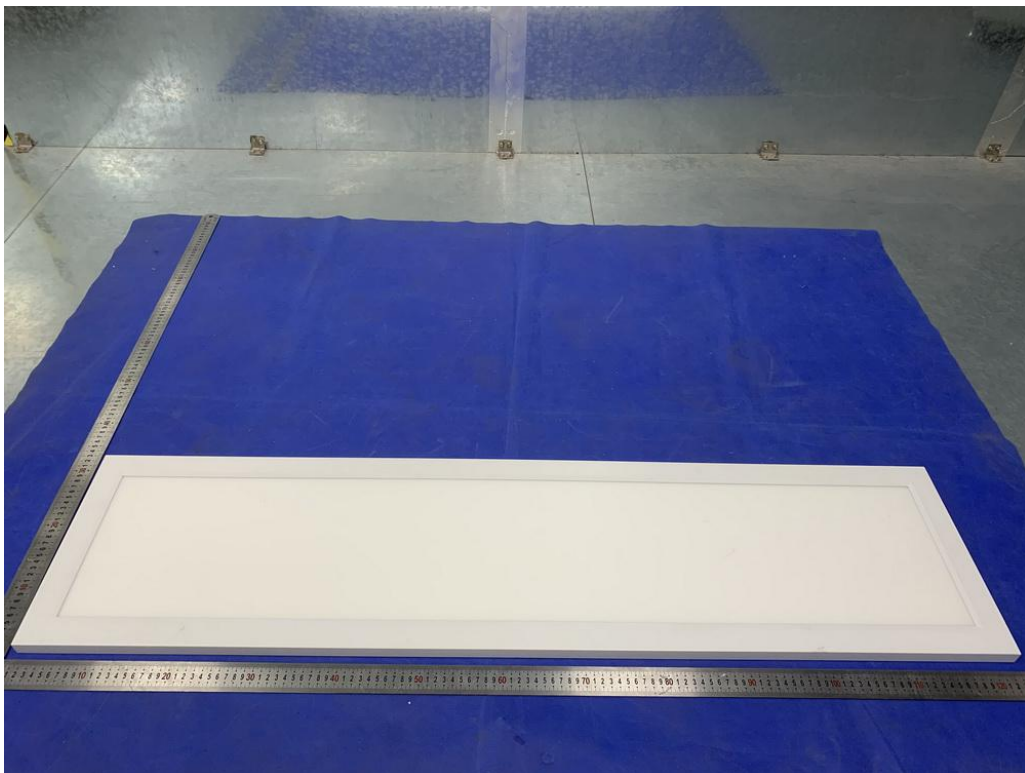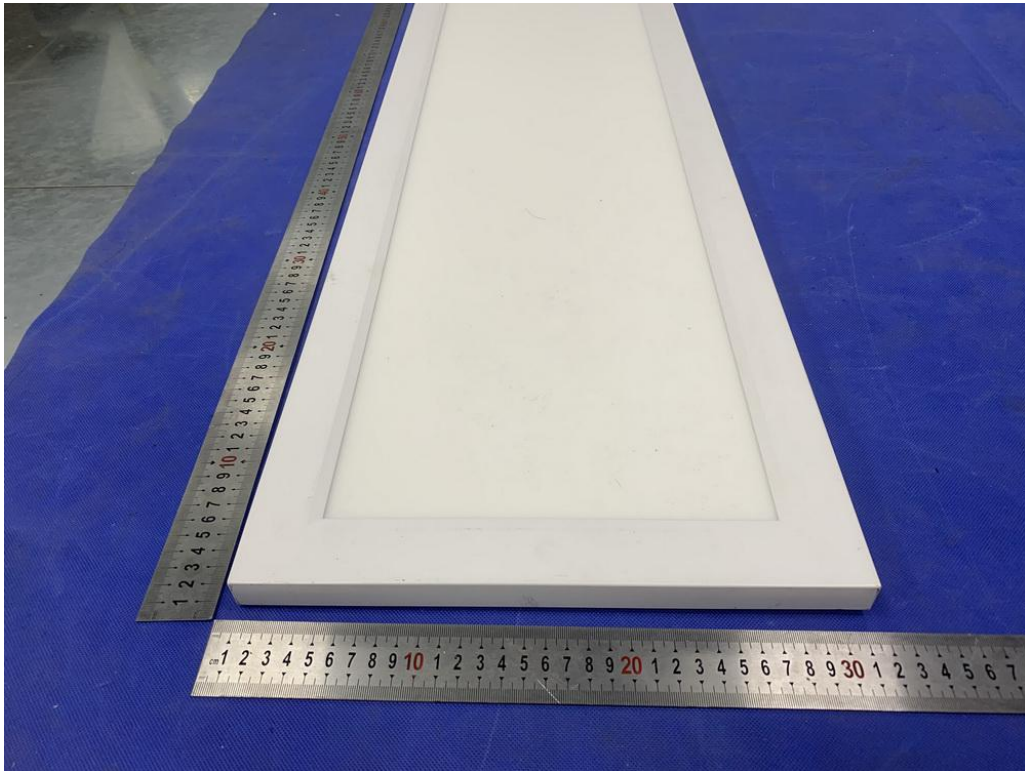

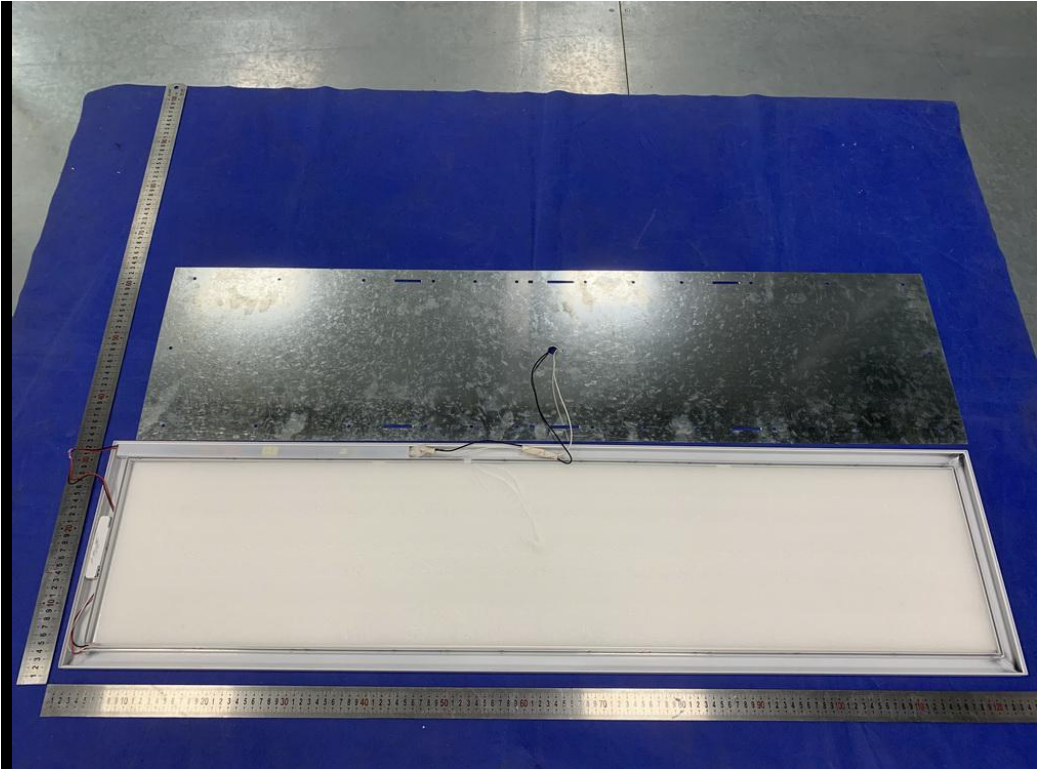



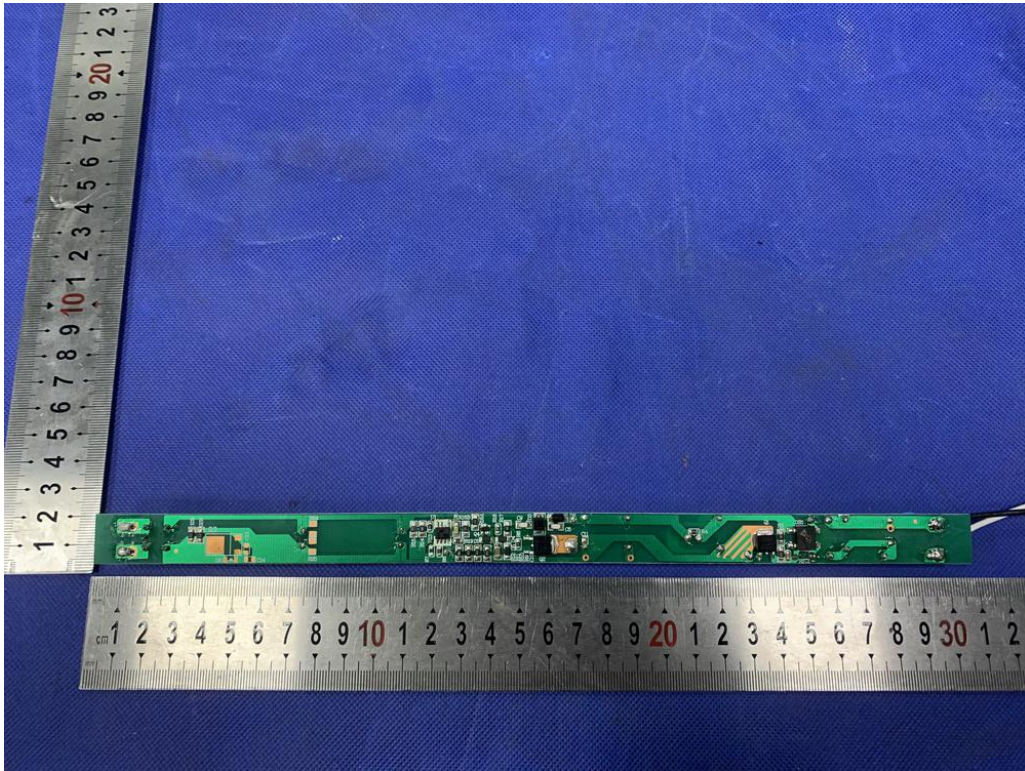

-----The end-----