



FCC Part15 Subpart B

TEST REPORT

For

LED Vanity Light

MODEL NUMBER: VAN-RIC-xxxxxxx
(x can be any character or blank for commercial use only)

FCC ID: 2AUHG-VAN-RIC

REPORT NUMBER: 4790494520-F03-00

ISSUE DATE: August 28, 2022

Prepared for

ARTIKA FOR LIVING INC.
1756, 50th Avenue Montreal (Lachine), Quebec Canada, H8T 2V5

Prepared by

UL-CCIC Company Limited
Electronic Building, Parage Electronic Industrial Park, No. 8 Nanyun Er Road,
Guangzhou Science Park, Guangzhou, 510670 China
Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.



Revision History

| Rev. | Issue Date | Revisions | Revised By |
|------|------------|---------------|------------|
| -- | 08/28/2022 | Initial Issue | -- |



| Summary of Test Results | | | | |
|----------------------------------------------|----------------------------------|---------|--------|----------------------|
| Standard | Test Item | Limit | Result | Remark |
| FCC PART 15, Subpart B (October 01, 2020) | Conducted Disturbance | Class B | PASS | |
| | Radiated Disturbance below 1 GHz | Class B | PASS | |
| | Radiated Disturbance above 1 GHz | Class B | N/A | NOTE (1) NOTE (2) |

Note:

(1) "N/A" denotes test is not applicable in this Test Report

(2) If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is less.

(2) The highest frequency of the internal sources of the EUT is less than 108 MHz.



CONTENTS

| | |
|---------------------------------------------------------------------------|-----------|
| 1. ATTESTATION OF TEST RESULTS..... | 5 |
| 2. TEST METHODOLOGY..... | 6 |
| 3. FACILITIES AND ACCREDITATION..... | 6 |
| 4. CALIBRATION AND UNCERTAINTY | 6 |
| 4.1. <i>Measuring Instrument Calibration</i> | <i>6</i> |
| 4.2. <i>Measurement Uncertainty</i> | <i>6</i> |
| 5. EQUIPMENT UNDER TEST | 7 |
| 5.1. <i>Description of EUT.....</i> | <i>7</i> |
| 5.2. <i>Test Mode.....</i> | <i>7</i> |
| 5.3. <i>EUT Accessory.....</i> | <i>7</i> |
| 5.4. <i>Block Diagram Showing the Configuration of System Tested.....</i> | <i>8</i> |
| 6. MEASURING EQUIPMENT AND SOFTWARE USED..... | 9 |
| 7. EMISSION TEST | 10 |
| 7.1. <i>Conducted Disturbance Measurement.....</i> | <i>10</i> |
| 7.1.1. <i>Limits of conducted disturbance voltage</i> | <i>10</i> |
| 7.1.2. <i>Test Procedure</i> | <i>10</i> |
| 7.1.3. <i>Test Setup</i> | <i>11</i> |
| 7.1.4. <i>Test Environment.....</i> | <i>11</i> |
| 7.1.5. <i>Test Mode.....</i> | <i>11</i> |
| 7.1.6. <i>Test Results.....</i> | <i>12</i> |
| 7.2. <i>Radiated Disturbance Measurement.....</i> | <i>14</i> |
| 7.2.1. <i>Limits of radiated disturbance measurement.....</i> | <i>14</i> |
| 7.2.2. <i>Test Procedure</i> | <i>15</i> |
| 7.2.3. <i>Test Setup</i> | <i>15</i> |
| 7.2.4. <i>Test Environment.....</i> | <i>16</i> |
| 7.2.5. <i>Test Mode.....</i> | <i>16</i> |
| 7.2.6. <i>Test Results – below 1GHz.....</i> | <i>17</i> |
| Appendix I: Photographs of Test Configuration | 19 |
| Appendix II: Photographs of the EUT | 20 |
| Appendix III : FCC Compliance Statement | 27 |



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: ARTIKA FOR LIVING INC.
 Address: 1756, 50th Avenue Montreal (Lachine), Quebec Canada, H8T 2V5

Manufacturer Information

Company Name: DongGuan City Rising Stars Lighting Co., LTD
 Address: YuanQuan Road No.6, BaiHao Village, HouJie town , DongGuan City, GuangDong Province, China

EUT Information

Product Name: LED Vanity Light
 Model Name: VAN-RIC-xxxxxxx
 (x can be any character or blank for commercial use only)
 Brand Name: Artika
 Sample Status: Normal
 Sample ID: 18007363
 Sample Received Date: July 18, 2022
 Date of Tested: July 19, 2022~ July 22, 2022

| APPLICABLE STANDARDS | |
|------------------------|--------------|
| STANDARDS | TEST RESULTS |
| FCC PART 15, Subpart B | PASS* |

*=Decision rule for statement(s) of conformity is based on IEC Guide 115:2007 Clause 4.4.3 Procedure 2" Accuracy Method"

Prepared By:

Ryan Pang
Project Engineer

Approved By:

Yam Shan
Project Engineer



2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC Part15 Subpart B and ANSI C63.4-2014.

3. FACILITIES AND ACCREDITATION

| | |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Accreditation Certificate | A2LA (Certificate No.: 3870.01) Dongguan Dongdian Testing Service Co., Ltd. has been assessed and proved to be in compliance with A2LA. CNAS (Registration No.: L6451) Dongguan Dongdian Testing Service Co., Ltd. has been assessed and proved to be in compliance with CNAS. |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Note: All tests measurement facilities use to collect the measurement data are located at Dongguan Dongdian Testing Service Co., Ltd.

4. CALIBRATION AND UNCERTAINTY

4.1. Measuring Instrument Calibration

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Test Item | Measurement Frequency Range | K | U(dB) |
|------------------------------------------------|-----------------------------|---|-------------------------------|
| Conducted disturbance at mains terminals ports | 0.15MHz ~ 30MHz | 2 | 3.32 dB |
| Radiated disturbance Test | Below 1GHz(10m) | 2 | 4.48 dB (Antenna Polarize: V) |
| | | 2 | 4.64 dB (Antenna Polarize: H) |
| Radiated disturbance Test | 1GHz-18GHz | 2 | 4.10dB (1-6GHz) |
| | | 2 | 4.40dB (6GHz-18Gz) |

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



5. EQUIPMENT UNDER TEST

5.1. Description of EUT

| | |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EUT Name | LED Vanity Light |
| EUT Description | This devices are LED fixed luminaires for indoor use. |
| Model | VAN-RIC-xxxxxxx |
| Model Difference | 1. x can be any character or blank for commercial use only. 2. All models are identical except for the model name. 3. All models use same built-in LED driver NE024120045-2G. |
| Rated Input | AC 120V,60Hz,20W |
| Test Model | VAN-RIC-CBL |
| Test Power Supply | AC 120V 60Hz |

5.2. Test Mode


| | |
|-----------|----------------|
| Test Mode | Description |
| Mode 1 | Lighting mode. |

5.3. EUT Accessory

| Item | Accessory | Brand Name | Model Name | Description |
|------|-----------|------------|------------|-------------|
| 1 | N/A | N/A | N/A | N/A |



5.4. Block Diagram Showing the Configuration of System Tested

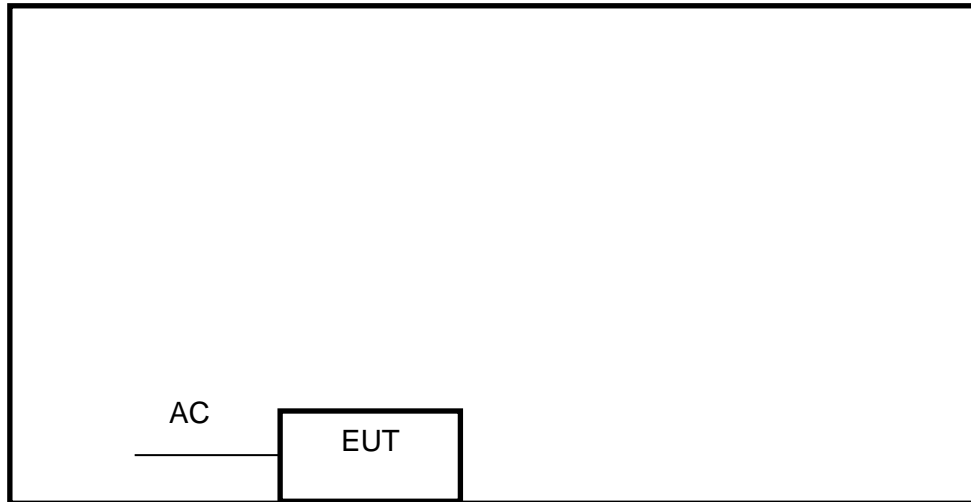

The EUT has been tested without other necessary accessories or support units.

| Item | Equipment | Mfr/Brand | Model/Type No. | Length | Note |
|------|-----------|-----------|----------------|--------|------|
| N/A | N/A | N/A | N/A | N/A | N/A |

Support units

| Item | Equipment | Mfr/Brand | Model/Type No. | Length | Note |
|------|-----------|-----------|----------------|--------|------|
| N/A | N/A | N/A | N/A | N/A | N/A |

**6. MEASURING EQUIPMENT AND SOFTWARE USED**

| Conducted Disturbance | | | | | | |
|-------------------------------------|---------------------------------------|--------------|-----------|------------|------------|------------|
| Used | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
| <input checked="" type="checkbox"/> | Test Receiver | R&S | ESCI | 100551 | 2022.08.31 | 2023.08.30 |
| <input checked="" type="checkbox"/> | LISN 1 | R&S | ENV216 | 101109 | 2021.09.07 | 2022.09.06 |
| Software | | | | | | |
| Used | Description | Manufacturer | Name | Version | | |
| <input checked="" type="checkbox"/> | Test Software for Conducted Emissions | Audix | E3 | V 6.11111b | | |
| Radiated Disturbance | | | | | | |
| Used | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
| <input checked="" type="checkbox"/> | Test Receiver | R&S | ESU8 | 100316 | 2022.04.08 | 2023.04.07 |
| <input checked="" type="checkbox"/> | Trilog Broadband Antenna | Schwarzbeck | VULB9163 | 01426 | 2022.08.05 | 2023.08.04 |
| Software | | | | | | |
| Used | Description | Manufacturer | Name | Version | | |
| <input checked="" type="checkbox"/> | Test Software for Radiated Emissions | Audix | E3 | V 6.11111b | | |



7. EMISSION TEST

7.1. Conducted Disturbance Measurement

7.1.1. Limits of conducted disturbance voltage

| FREQUENCY (MHz) | <input type="checkbox"/> Class A (dB μ V) | | <input checked="" type="checkbox"/> Class B (dB μ V) | |
|--------------------|-----------------------------------------------|---------|----------------------------------------------------------|-----------|
| | Quasi-peak | Average | Quasi-peak | Average |
| 0.15 -0.5 | 79.00 | 66.00 | 66 - 56 * | 56 - 46 * |
| 0.50 -5.0 | 73.00 | 60.00 | 56.00 | 46.00 |
| 5.0 -30.0 | 73.00 | 60.00 | 60.00 | 50.00 |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor
 Margin Level = Measurement Value - Limit Value


The following table is the setting of the receiver

| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 kHz |

7.1.2. Test Procedure

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item:EUT Test Photos.

7.1.3. Test Setup

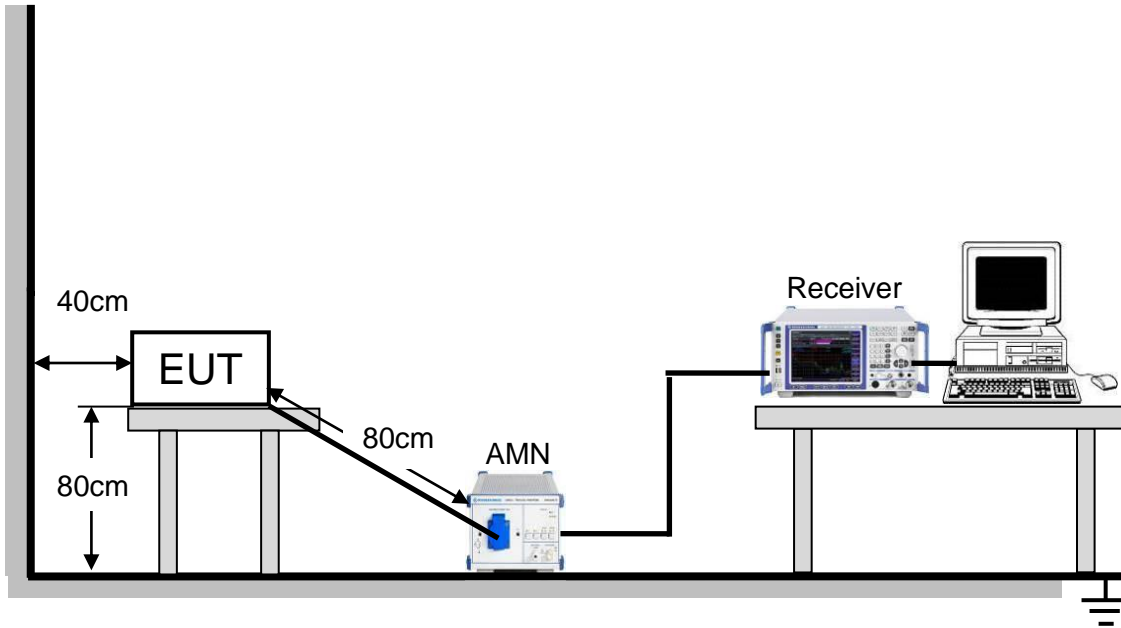

For the actual test configuration, please refer to Appendix I: Photographs of the Test Configuration.

7.1.4. Test Environment

| | |
|---------------|----------|
| Temperature: | 23.9°C |
| Humidity: | 55.8% |
| ATM pressure: | 101.4kPa |

7.1.5. Test Mode

| | |
|------------------|--------|
| Pre-test Mode: | Mode 1 |
| Final Test Mode: | Mode 1 |

Note: According to pre-test results, the final test mode is each independent function's worst case and only shown in the report.



7.1.6. Test Results

EUT : LED Vanity Light

Model Number : VAN-RIC-CBL


Power Supply : AC 120V/60Hz

Test Mode : Mode 1

Condition : Temp:23.9°C,Humi:55.8%,Press:101.4kPa

LISN : ENV216 2#/LINE

Data: 14

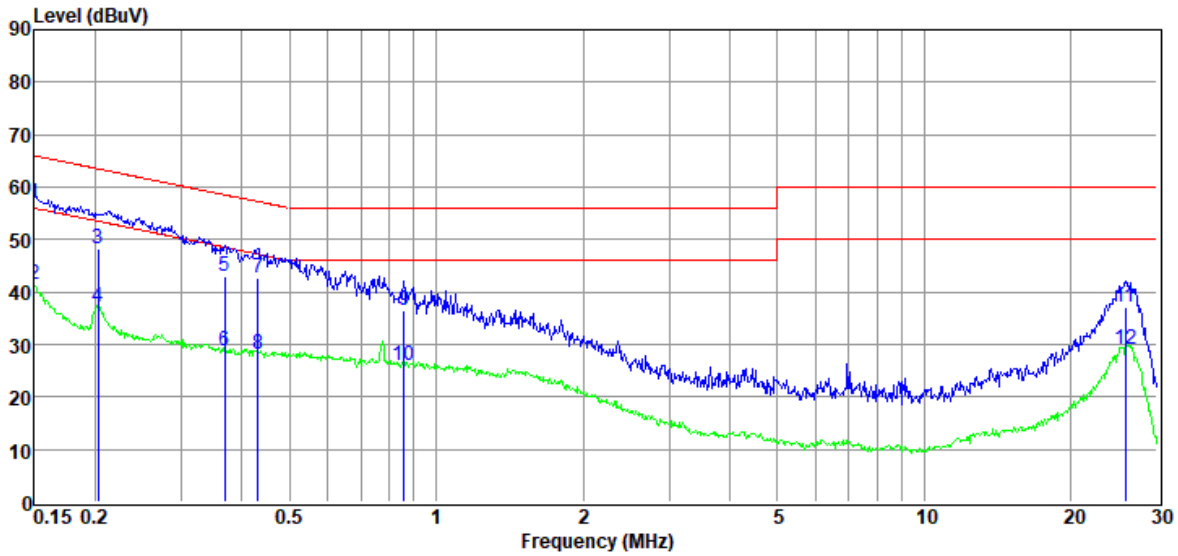

| Item (Mark) | Freq. (MHz) | Read Level (dBμV) | LISN Factor (dB) | Cable Loss (dB) | Pulse Limiter Factor (dB) | Result Level (dBμV) | Limit Line (dBμV) | Over Limit (dB) | Detector | Phase |
|----------------|----------------|----------------------|---------------------|--------------------|------------------------------|------------------------|----------------------|--------------------|----------|-------|
| 1 | 0.15 | 36.46 | 9.40 | 0.03 | 10.90 | 56.79 | 66.00 | -9.21 | QP | LINE |
| 2 | 0.15 | 21.00 | 9.40 | 0.03 | 10.90 | 41.33 | 56.00 | -14.67 | Average | LINE |
| 3 | 0.20 | 27.73 | 9.60 | 0.03 | 10.87 | 48.23 | 63.49 | -15.26 | QP | LINE |
| 4 | 0.20 | 16.64 | 9.60 | 0.03 | 10.87 | 37.14 | 53.49 | -16.35 | Average | LINE |
| 5 | 0.37 | 22.91 | 9.40 | 0.03 | 10.74 | 43.08 | 58.52 | -15.44 | QP | LINE |
| 6 | 0.37 | 8.52 | 9.40 | 0.03 | 10.74 | 28.69 | 48.52 | -19.83 | Average | LINE |
| 7 | 0.43 | 22.71 | 9.35 | 0.03 | 10.71 | 42.80 | 57.24 | -14.44 | QP | LINE |
| 8 | 0.43 | 8.11 | 9.35 | 0.03 | 10.71 | 28.20 | 47.24 | -19.04 | Average | LINE |
| 9 | 0.86 | 16.71 | 9.26 | 0.04 | 10.42 | 36.43 | 56.00 | -19.57 | QP | LINE |
| 10 | 0.86 | 6.34 | 9.26 | 0.04 | 10.42 | 26.06 | 46.00 | -19.94 | Average | LINE |
| 11 | 25.86 | 17.22 | 9.46 | 0.34 | 10.03 | 37.05 | 60.00 | -22.95 | QP | LINE |
| 12 | 25.86 | 9.22 | 9.46 | 0.34 | 10.03 | 29.05 | 50.00 | -20.95 | Average | LINE |

- Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.



EUT : LED Vanity Light

Model Number : VAN-RIC-CBL


Power Supply : AC 120V/60Hz

Test Mode : Mode 1

Condition : Temp:23.9°C,Humi:55.8%,Press:101.4kPa

LISN : ENV216 2#/LINE

Data: 16

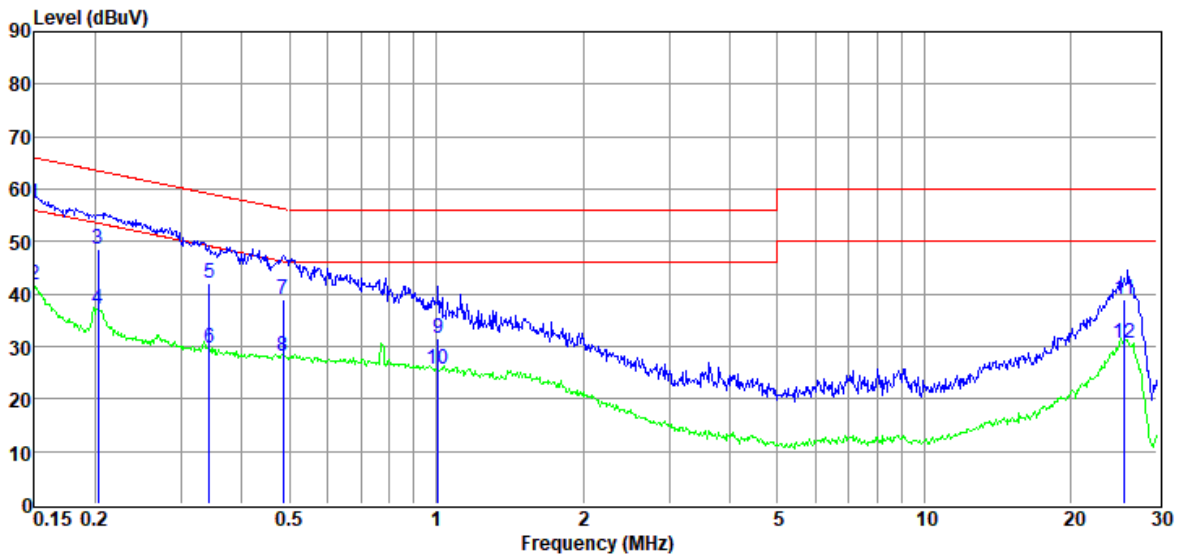

| Item (Mark) | Freq. (MHz) | Read Level (dBuV) | LISN Factor (dB) | Cable Loss (dB) | Pulse Limiter Factor (dB) | Result Level (dBuV) | Limit Line (dBuV) | Over Limit (dB) | Detector | Phase |
|----------------|----------------|----------------------|---------------------|--------------------|------------------------------|------------------------|----------------------|--------------------|----------|---------|
| 1 | 0.15 | 36.54 | 9.60 | 0.03 | 10.90 | 57.07 | 66.00 | -8.93 | QP | NEUTRAL |
| 2 | 0.15 | 21.13 | 9.60 | 0.03 | 10.90 | 41.66 | 56.00 | -14.34 | Average | NEUTRAL |
| 3 | 0.20 | 28.09 | 9.50 | 0.03 | 10.87 | 48.49 | 63.49 | -15.00 | QP | NEUTRAL |
| 4 | 0.20 | 16.70 | 9.50 | 0.03 | 10.87 | 37.10 | 53.49 | -16.39 | Average | NEUTRAL |
| 5 | 0.34 | 21.79 | 9.38 | 0.03 | 10.76 | 41.96 | 59.13 | -17.17 | QP | NEUTRAL |
| 6 | 0.34 | 9.40 | 9.38 | 0.03 | 10.76 | 29.57 | 49.13 | -19.56 | Average | NEUTRAL |
| 7 | 0.49 | 18.96 | 9.31 | 0.04 | 10.69 | 39.00 | 56.23 | -17.23 | QP | NEUTRAL |
| 8 | 0.49 | 7.98 | 9.31 | 0.04 | 10.69 | 28.02 | 46.23 | -18.21 | Average | NEUTRAL |
| 9 | 1.01 | 11.69 | 9.40 | 0.04 | 10.34 | 31.47 | 56.00 | -24.53 | QP | NEUTRAL |
| 10 | 1.01 | 5.95 | 9.40 | 0.04 | 10.34 | 25.73 | 46.00 | -20.27 | Average | NEUTRAL |
| 11 | 25.73 | 18.88 | 9.66 | 0.33 | 10.03 | 38.90 | 60.00 | -21.10 | QP | NEUTRAL |
| 12 | 25.73 | 10.60 | 9.66 | 0.33 | 10.03 | 30.62 | 50.00 | -19.38 | Average | NEUTRAL |

- Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.



7.2. Radiated Disturbance Measurement

7.2.1. Limits of radiated disturbance measurement

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

| Frequency (MHz) | <input type="checkbox"/> Class A | | <input checked="" type="checkbox"/> Class B | |
|-----------------|----------------------------------|---------------------------------|---------------------------------------------|---------------------------------|
| | Field strength (dBuV/m) (at 10m) | Field strength (dBuV/m) (at 3m) | Field strength (dBuV/m) (at 10m) | Field strength (dBuV/m) (at 3m) |
| 30 - 88 | 39 | 49.5 | 29.5 | 40 |
| 88 - 216 | 43.5 | 54 | 33.0 | 43.5 |
| 216 - 960 | 46.4 | 56.9 | 35.5 | 46 |
| Above 960 | 49.5 | 60 | 43.5 | 54 |

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

| Frequency (MHz) | <input type="checkbox"/> Class A | | | | <input type="checkbox"/> Class B | |
|-----------------|----------------------------------|---------|-------------------|---------|----------------------------------|---------|
| | (dBuV/m) (at 3m) | | (dBuV/m) (at 10m) | | (dBuV/m) (at 3m) | |
| | Peak | Average | Peak | Average | Peak | Average |
| Above 1000 | 80 | 60 | 69.5 | 49.5 | 74 | 54 |

Frequency Range of Radiated Disturbance Measurement

| Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz) | Range (MHz) |
|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Below 1.705 | 30 |
| 1.705 - 108 | 1000 |
| 108 - 500 | 2000 |
| 500 - 1000 | 5000 |
| Above 1000 | 5 th harmonic of the highest frequency or 40 GHz, whichever is lower |

NOTE:


- (1) The limit for radiated test was performed according to FCC Part 15, Subpart B;
- (2) The tighter limit applies at the band edges;
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m),
3m Emission level = 10m Emission level + 20log(10m/3m);
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use),
Margin Level = Measurement Value - Limit Value.

7.2.2. Test Procedure


- a. The measuring distance of at 3m shall be used for measurements at frequency up to 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For the actual test configuration, please refer to the related Item:EUT Test Photos.

7.2.3. Test Setup

(a) Radiated Disturbance Test Set-Up Frequency 30MHz - 1GHz

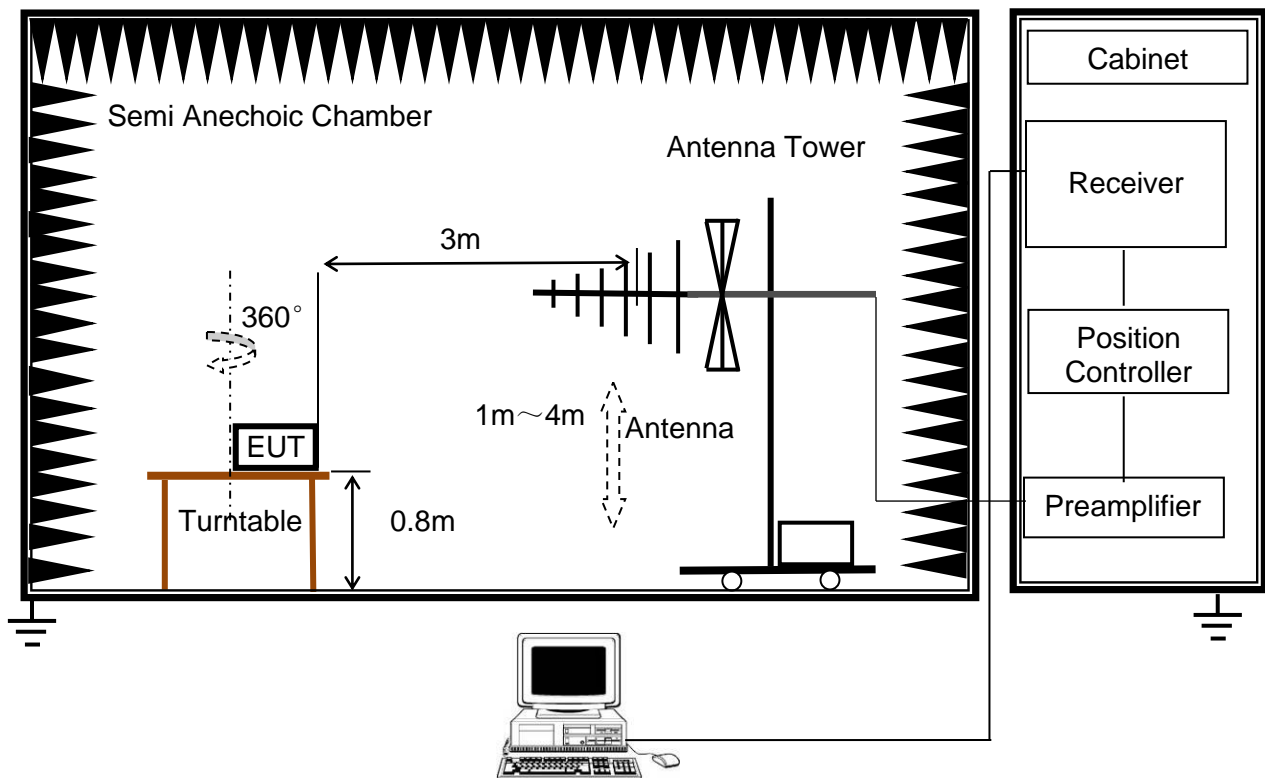

(b) Radiated Disturbance Test Set-Up Frequency above 1GHz

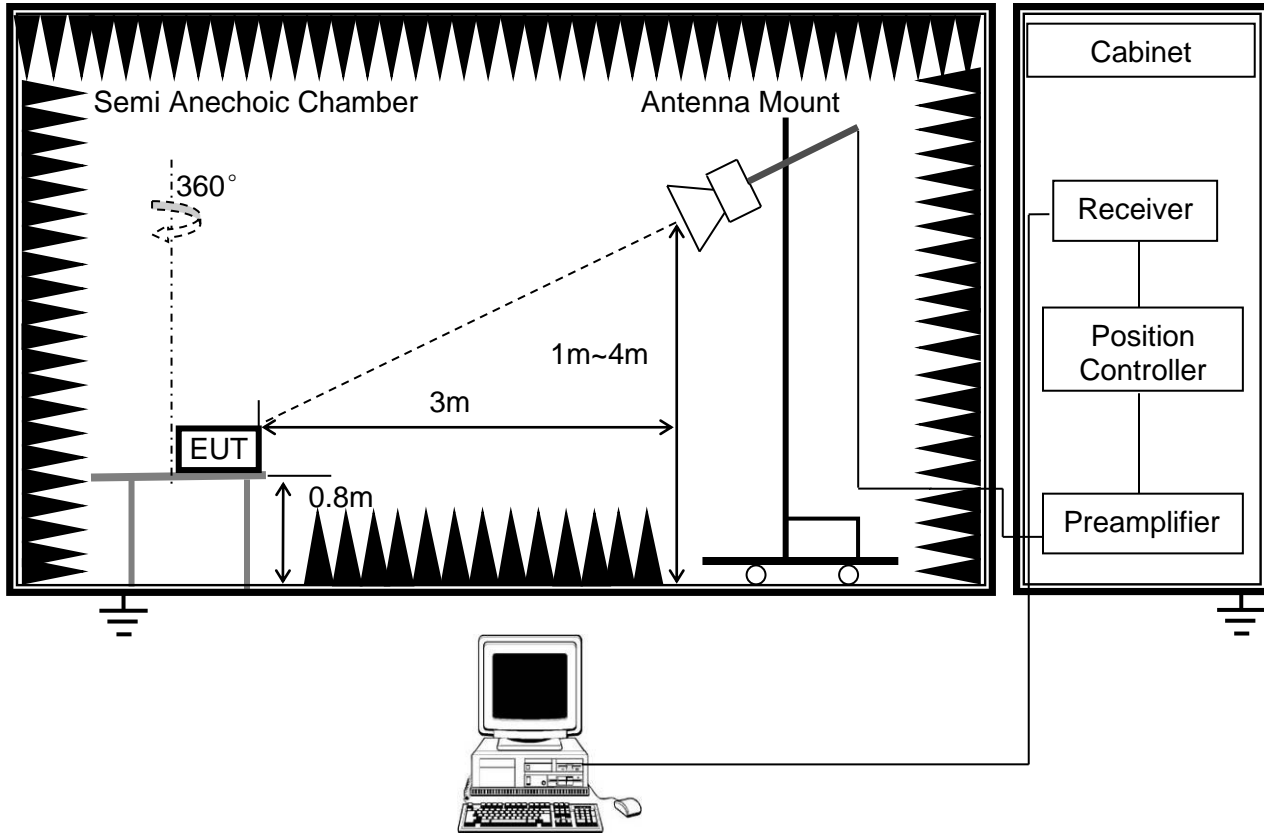

For the actual test configuration, please refer to Appendix I: Photographs of the Test Configuration.

7.2.4. Test Environment

| Radiated Disturbance - below 1 GHz | | Radiated Disturbance - above 1 GHz | |
|------------------------------------|----------|------------------------------------|-----|
| Temperature: | 24.5°C | Temperature: | N/A |
| Humidity: | 55% | Humidity: | N/A |
| ATM pressure: | 100.1kPa | ATM pressure: | N/A |

7.2.5. Test Mode

| Radiated Disturbance - below 1 GHz | | Radiated Disturbance - above 1 GHz | |
|------------------------------------|--------|------------------------------------|-----|
| Pre-test Mode: | Mode 1 | Pre-test Mode: | N/A |
| Final Test Mode: | Mode 1 | Final Test Mode: | N/A |


Note: According to pre-test results, the final test mode is each independent function's worst case and only shown in the report.



7.2.6. Test Results – below 1GHz

EUT : LED Vanity Light **Model Number** : VAN-RIC-CBL
Power Supply : AC 120V/60Hz **Test Mode** : Mode 1
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : VULB 9163 2#/3m/VERTICAL
Memo :

Data: 3
 Data:
 3

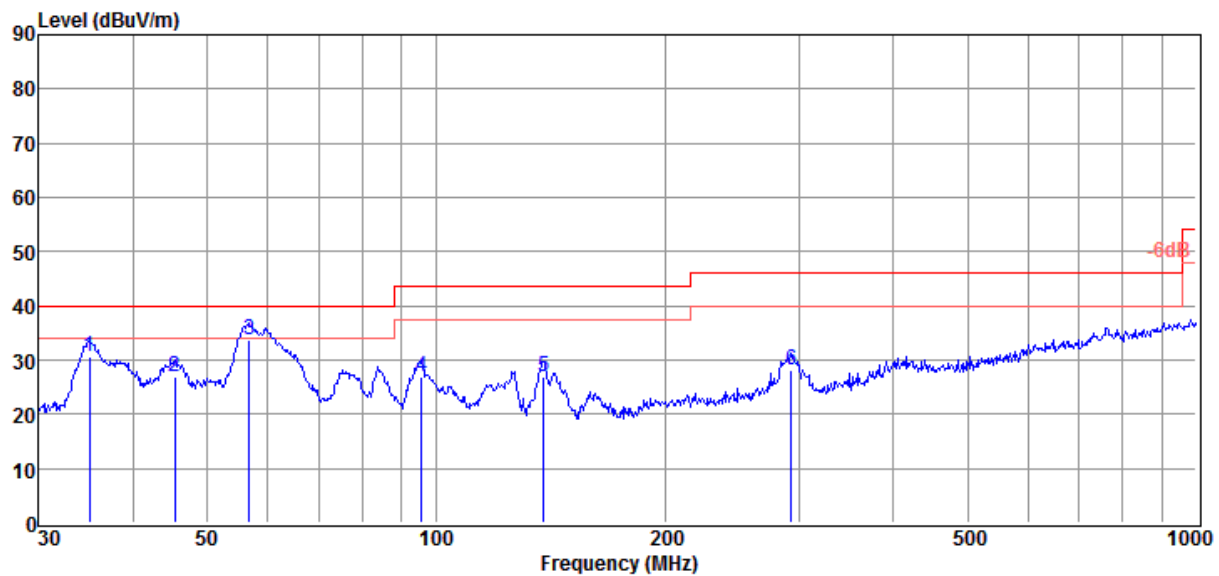


| Item (Mark) | Freq. (MHz) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Result Level (dBμV/m) | Limit Line (dBμV/m) | Over Limit (dB) | Detector | Polarization |
|-------------|-------------|-------------------|-----------------------|-----------------|-----------------------|---------------------|-----------------|----------|--------------|
| 1 | 35.01 | 14.48 | 12.30 | 3.81 | 30.59 | 40.00 | -9.41 | QP | VERTICAL |
| 2 | 45.38 | 8.87 | 14.16 | 3.97 | 27.00 | 40.00 | -13.00 | QP | VERTICAL |
| 3 | 56.79 | 16.43 | 13.22 | 4.10 | 33.75 | 40.00 | -6.25 | QP | VERTICAL |
| 4 | 95.76 | 9.99 | 12.40 | 4.46 | 26.85 | 43.50 | -16.65 | QP | VERTICAL |
| 5 | 138.39 | 12.60 | 9.40 | 4.83 | 26.83 | 43.50 | -16.67 | QP | VERTICAL |
| 6 | 293.08 | 9.25 | 13.16 | 5.81 | 28.22 | 46.00 | -17.78 | QP | VERTICAL |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



EUT : LED Vanity Light **Model Number** : VAN-RIC-CBL
Power Supply : AC 120V/60Hz **Test Mode** : Mode 1
Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa **Antenna/Distance** : VULB 9163 2#/3m/VERTICAL
Memo :

Data: 4
Data:
4

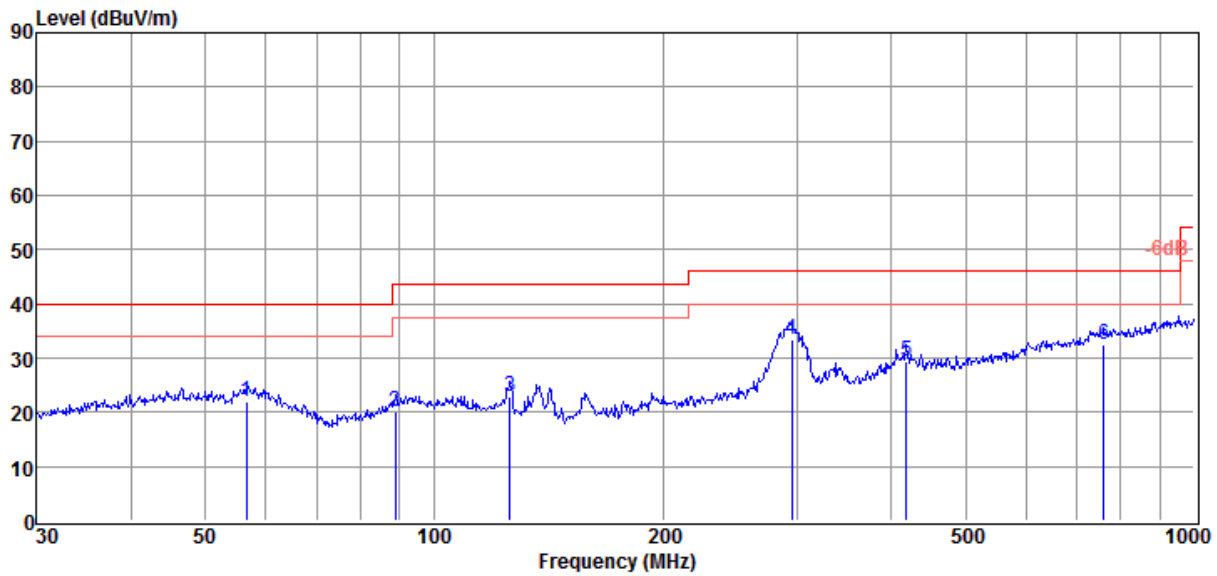

| Item (Mark) | Freq. (MHz) | Read Level (dBμV) | Antenna Factor (dB/m) | Cable Loss (dB) | Result Level (dBμV/m) | Limit Line (dBμV/m) | Over Limit (dB) | Detector | Polarization |
|-------------|-------------|-------------------|-----------------------|-----------------|-----------------------|---------------------|-----------------|----------|--------------|
| 1 | 56.59 | 4.50 | 13.24 | 4.10 | 21.84 | 40.00 | -18.16 | QP | HORIZONTAL |
| 2 | 88.96 | 3.81 | 11.99 | 4.40 | 20.20 | 43.50 | -23.30 | QP | HORIZONTAL |
| 3 | 125.89 | 7.61 | 10.41 | 4.73 | 22.75 | 43.50 | -20.75 | QP | HORIZONTAL |
| 4 | 295.15 | 14.43 | 13.20 | 5.82 | 33.45 | 46.00 | -12.55 | QP | HORIZONTAL |
| 5 | 417.64 | 6.54 | 16.35 | 6.50 | 29.39 | 46.00 | -16.61 | QP | HORIZONTAL |
| 6 | 760.70 | 3.55 | 21.00 | 8.04 | 32.59 | 46.00 | -13.41 | QP | HORIZONTAL |

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Appendix I: Photographs of Test Configuration



Conducted Disturbance







Radiated Disturbance below 1GHz






Appendix II: Photographs of the EUT

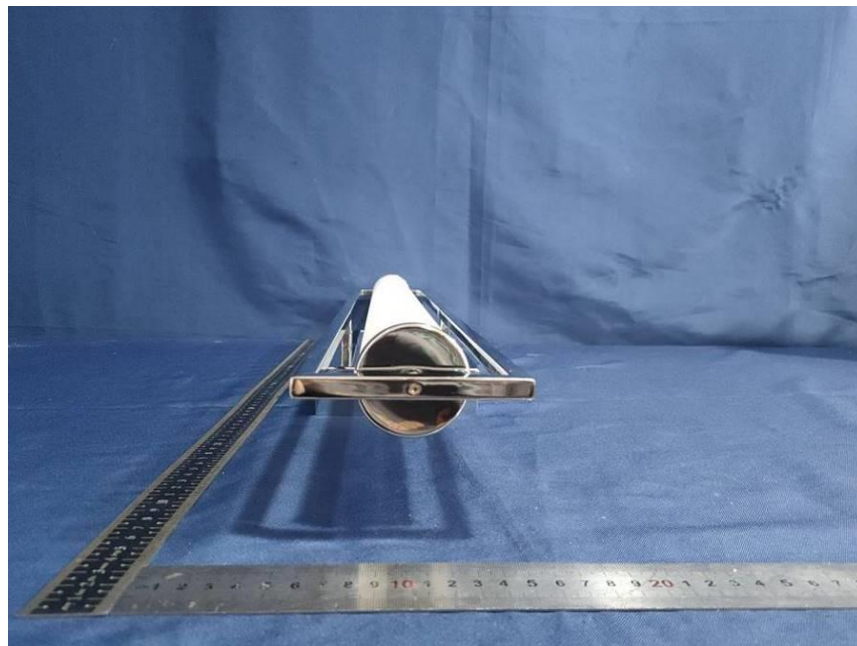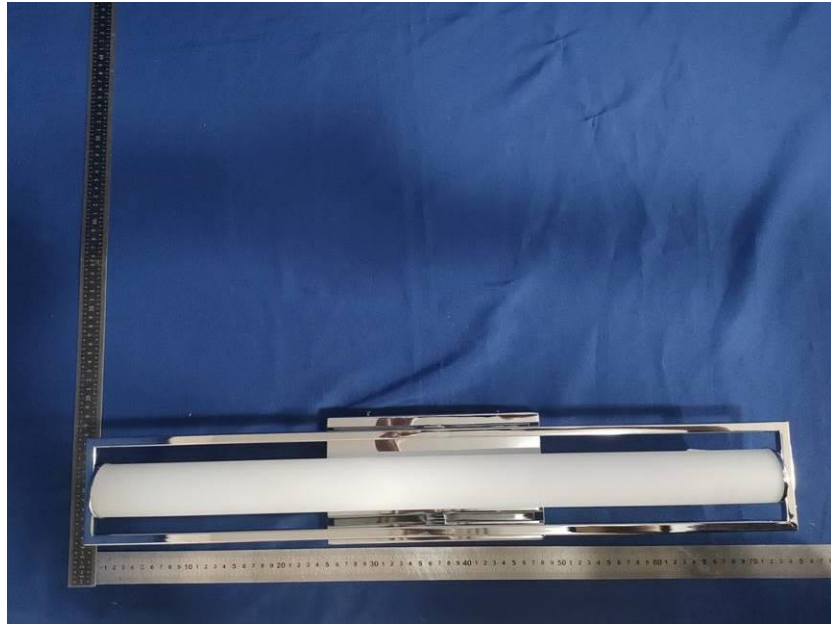


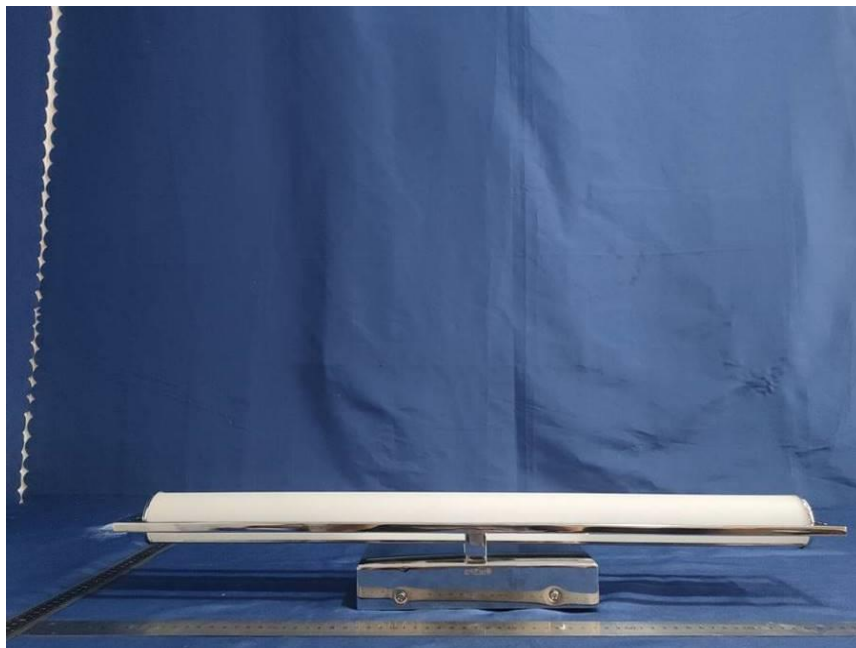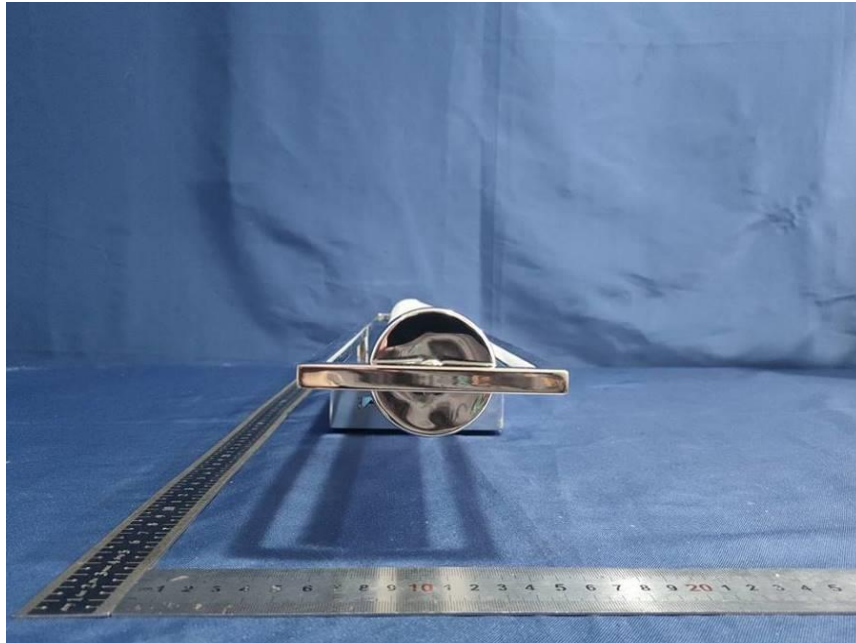


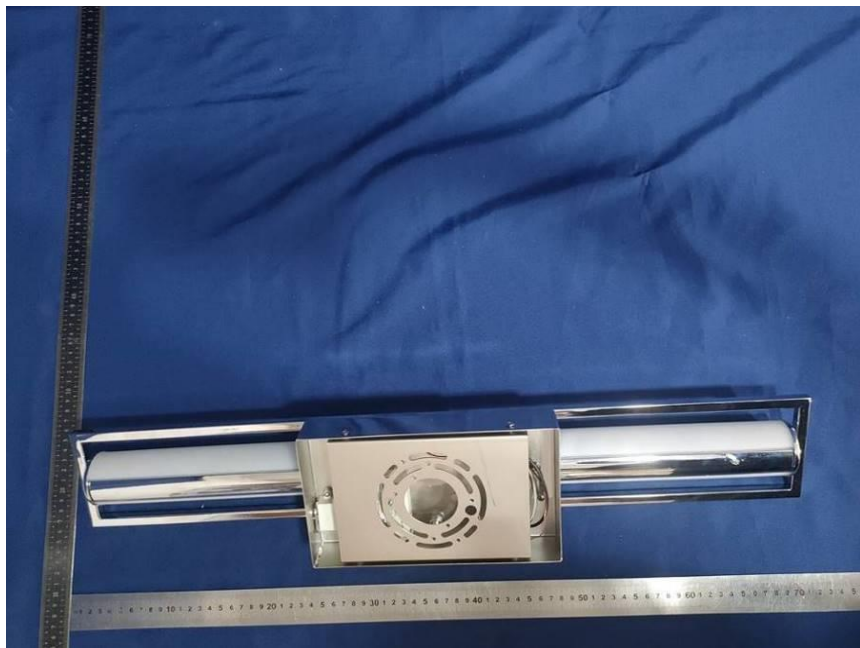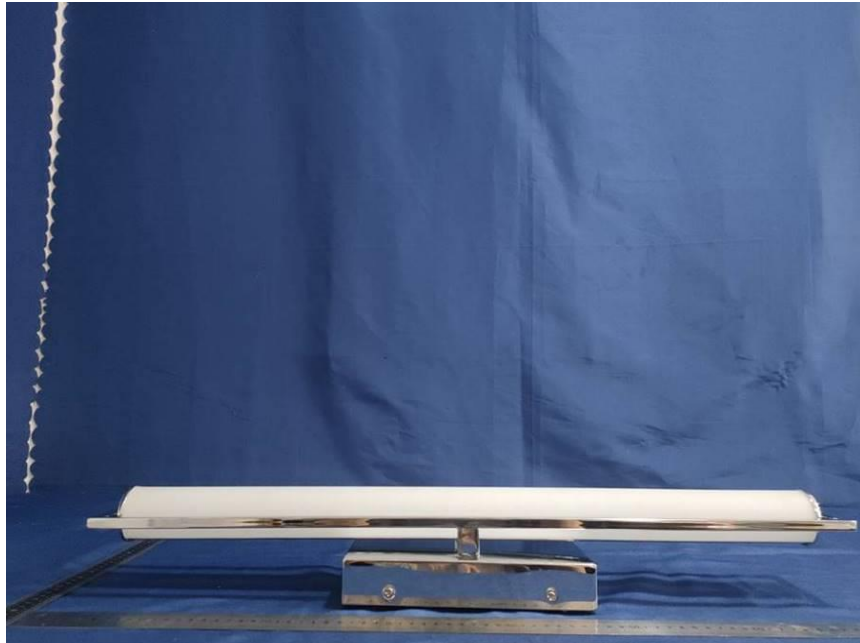

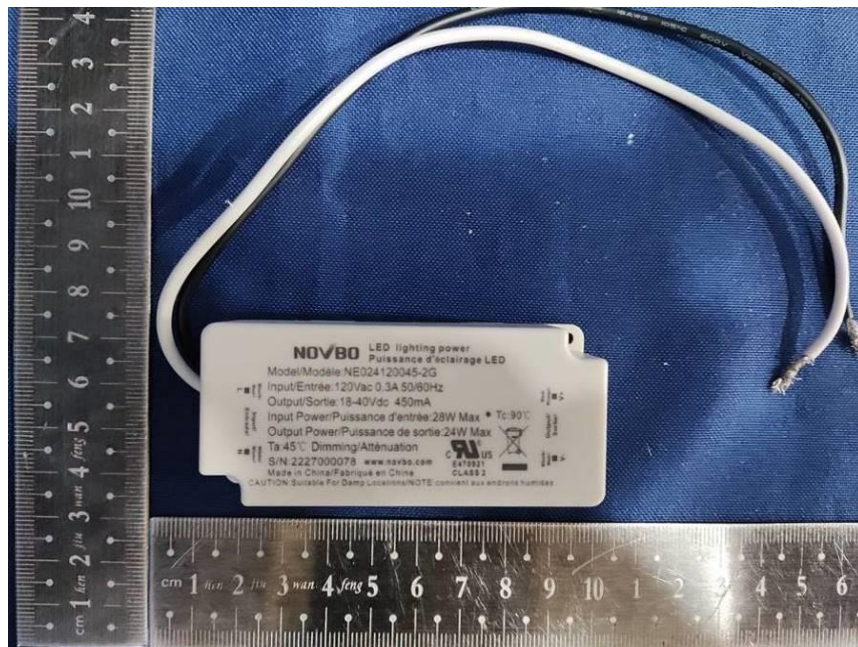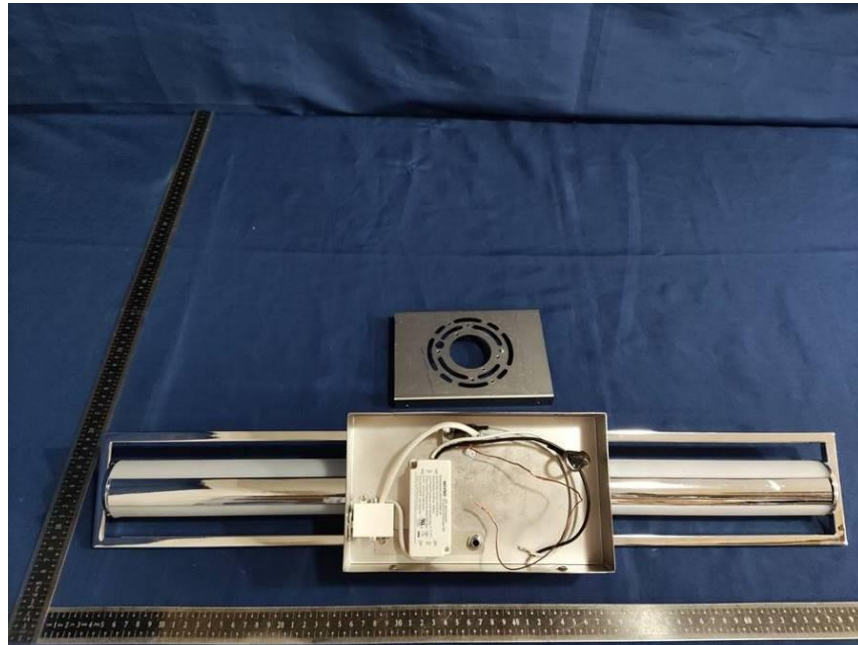

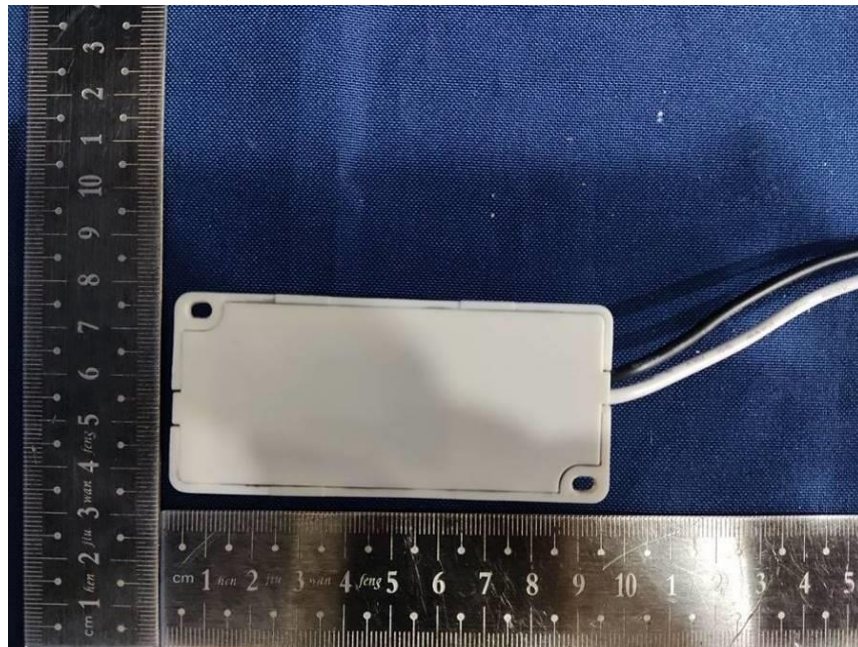

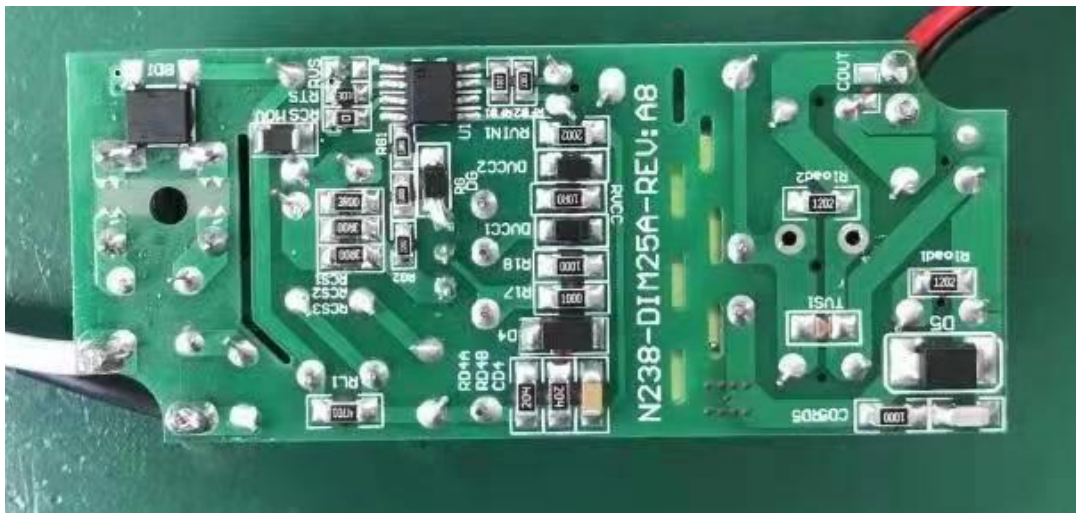

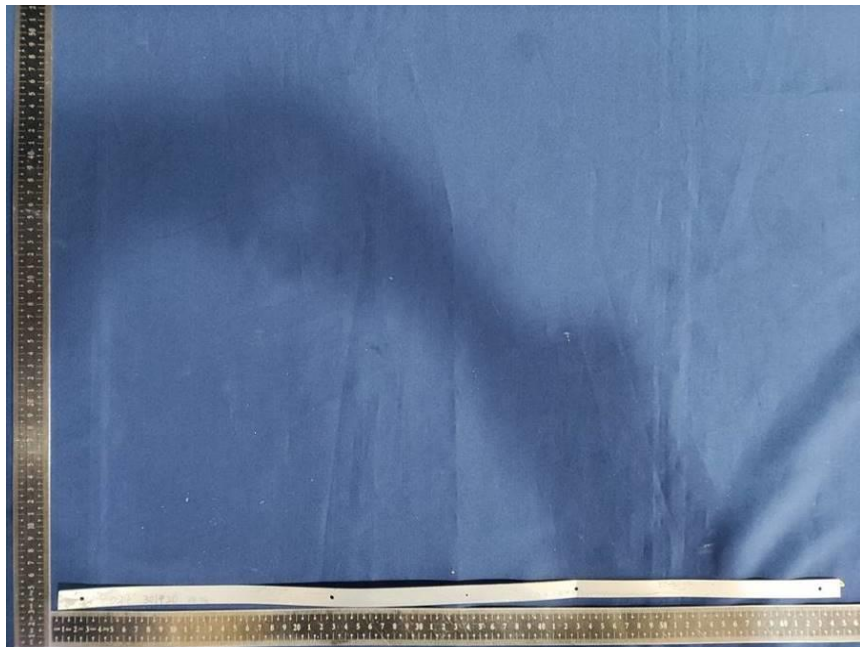



Appendix III : FCC Compliance Statement

1. Labeling requirements

Devices shall bear the following statement in a conspicuous location on the device. When the device is so small, and the device does not have a display that can show electronic labeling, then the information required by this paragraph shall be placed in the user manual and must also either be placed on the device packaging or on a removable label attached to the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2. User manual or instruction manual requirements

The user manual or instruction manual shall caution the user the following statement:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

3. FCC logo

Devices authorized under the SDoC procedure have the option to use the FCC logo to indicate compliance with the FCC rules, and the logo may be included in the instruction materials or as part of an e-label.



The FCC logo shall only be used on a product that has been tested, evaluated, and found to be compliant in accordance with the SDoC procedures.

End of Report