

TEST REPORT

Reference No...... : WTX20X11090589W-1
FCC ID : 2AUI4-OS-M355C1-V
Applicant : Universal Ubiquitous Co., Ltd.
Address..... : Room 658, Building 1, No.1, Lvting Road, Cangqian Street, Yuhang District,
Hangzhou City
Product Name : Face Recognition Terminal
Test Model. : OS-M355C1-V-R23WFC-TEMP03
Standards : **FCC Part 15.247**
Date of Receipt sample : Nov.27, 2020
Date of Test..... : Nov.27, 2020 to Dec.24, 2020
Date of Issue : Dec.24, 2020
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China


Tel.: +86-755-33663308

Fax.: +86-755-33663309


Tested by:

Reviewed By:

Approved & Authorized By:



Mike Shi / Project Engineer



Lion Cai / RF Manager



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	7
1.7 TEST EQUIPMENT LIST AND DETAILS.....	8
2. SUMMARY OF TEST RESULTS	10
3. ANTENNA REQUIREMENT	11
3.1 STANDARD APPLICABLE.....	11
3.2 EVALUATION INFORMATION.....	11
4. POWER SPECTRAL DENSITY	12
4.1 STANDARD APPLICABLE.....	12
4.2 TEST SETUP BLOCK DIAGRAM.....	12
4.3 TEST PROCEDURE.....	12
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	12
5. DTS BANDWIDTH	13
5.1 STANDARD APPLICABLE.....	13
5.2 TEST SETUP BLOCK DIAGRAM.....	13
5.3 TEST PROCEDURE.....	13
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	13
6. RF OUTPUT POWER	14
6.1 STANDARD APPLICABLE.....	14
6.2 TEST SETUP BLOCK DIAGRAM.....	14
6.3 TEST PROCEDURE.....	14
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	14
7. FIELD STRENGTH OF SPURIOUS EMISSIONS	15
7.1 STANDARD APPLICABLE.....	15
7.2 TEST PROCEDURE.....	15
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	17
8. OUT OF BAND EMISSIONS	25
8.1 STANDARD APPLICABLE.....	25
8.2 TEST PROCEDURE.....	25
8.3 SUMMARY OF TEST RESULTS/PLOTS.....	26
9. CONDUCTED EMISSIONS	36
9.1 TEST PROCEDURE.....	36
9.2 BASIC TEST SETUP BLOCK DIAGRAM.....	36
9.3 TEST RECEIVER SETUP.....	36
9.4 SUMMARY OF TEST RESULTS/PLOTS.....	36
APPENDIX SUMMARY	39
APPENDIX A	40
APPENDIX B	45
APPENDIX C	50
APPENDIX D	55
APPENDIX PHOTOGRAPHS	63

Report version

Version No.	Date of issue	Description
Rev.00	Dec.24, 2020	Original
/	/	/


1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Universal Ubiquitous Co., Ltd.
 Address of applicant: Room 658, Building 1, No.1, Lvting Road, Cangqian Street, Yuhang District, Hangzhou City

Manufacturer: Universal Ubiquitous Co., Ltd.
 Address of manufacturer: Room 658, Building 1, No.1, Lvting Road, Cangqian Street, Yuhang District, Hangzhou City

General Description of EUT	
Product Name:	Face Recognition Terminal
Trade Name:	 宇泛智能
Model No.:	OS-M355C1-V-R23WFC-TEMP03
Adding Model(s):	/
Rated Voltage:	DC12V
Power Adapter Model:	MODEL: XED-UL120200CC INPUT: AC100-240V, 0.6A, 50/60Hz; OUTPUT: DC12V, 2A
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	15.41dBm (Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	4.4dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC CABLE	1.1	Unshielded	With Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Network Cable	4.5	Unshielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Wireless Router	TP-LINK	TL-WR842N	2253243030553
Computer	Lenovo	ThinkPad Edge E445	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2020-04-28	2021-04-27
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2020-04-28	2021-04-27
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2020-04-28	2021-04-27
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2020-04-28	2021-04-27
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2020-04-28	2021-04-27
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2020-04-28	2021-04-27
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2020-04-28	2021-04-27
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2020-04-28	2021-04-27
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2020-04-28	2021-04-27
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2020-04-28	2021-04-27
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2020-04-28	2021-04-27
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2020-04-28	2021-04-27
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2020-04-28	2021-04-27
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2020-04-28	2021-04-27
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2020-03-17	2021-03-16
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2020-03-17	2021-03-16
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2020-03-17	2021-03-16
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2020-03-17	2021-03-16
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2020-03-17	2021-03-16

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information


This product has an integral antenna, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram

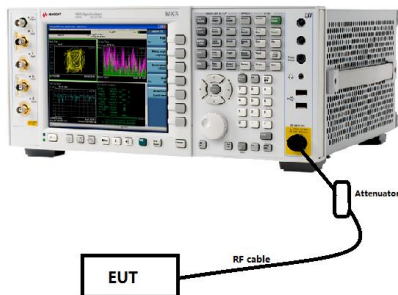

4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

4.4 Summary of Test Results/Plots


Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.2 Test Setup Block Diagram

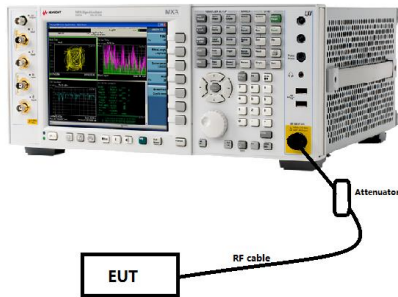

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots


Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

6.2 Test Setup Block Diagram

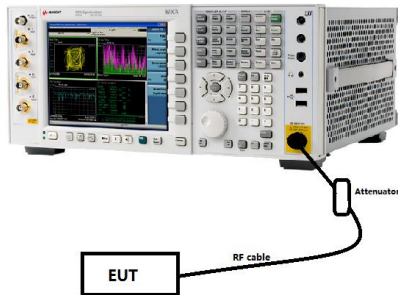

6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

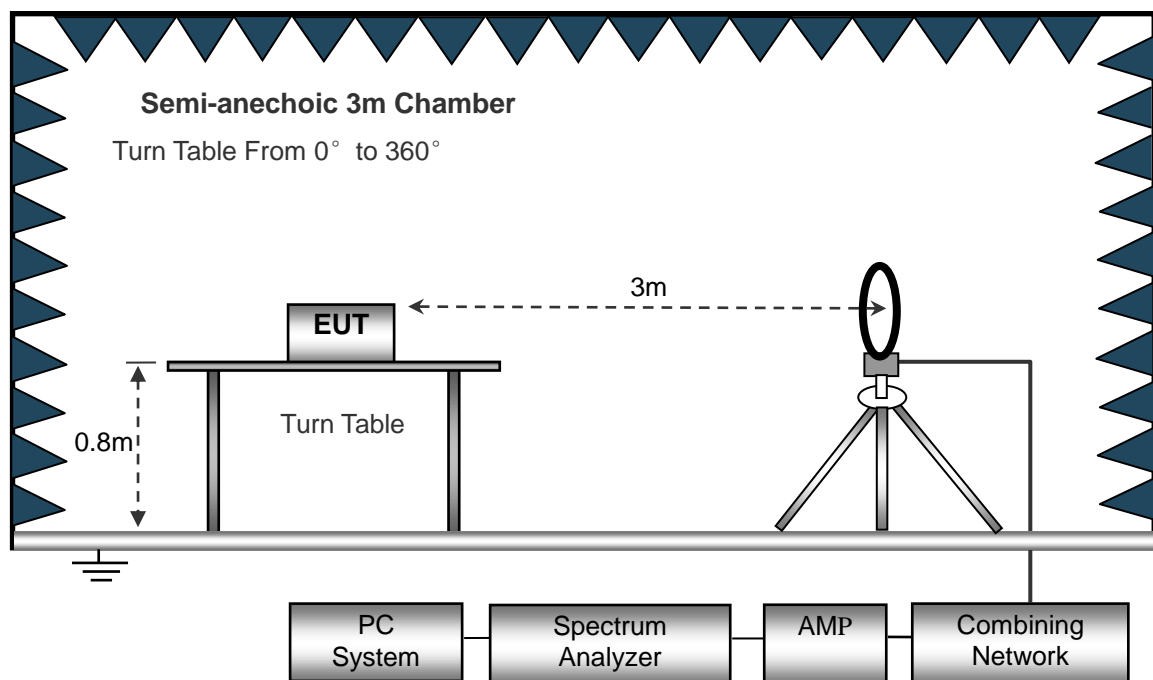

The test setup for emission measurement from 30 MHz to 1 GHz..

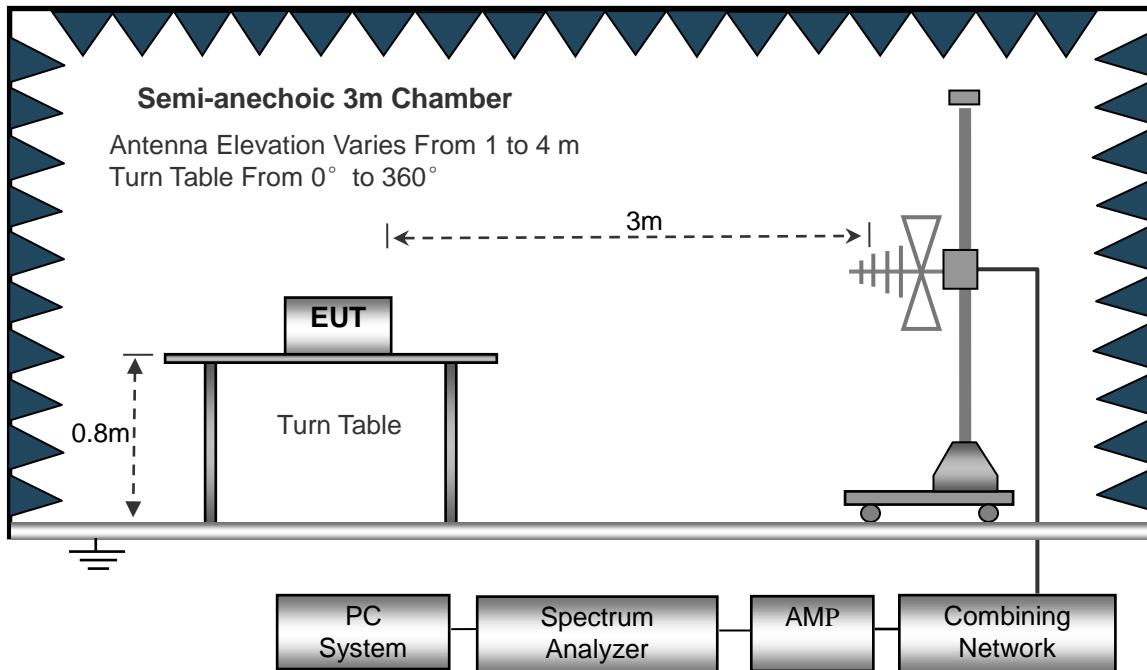

The test setup for emission measurement above 1 GHz..

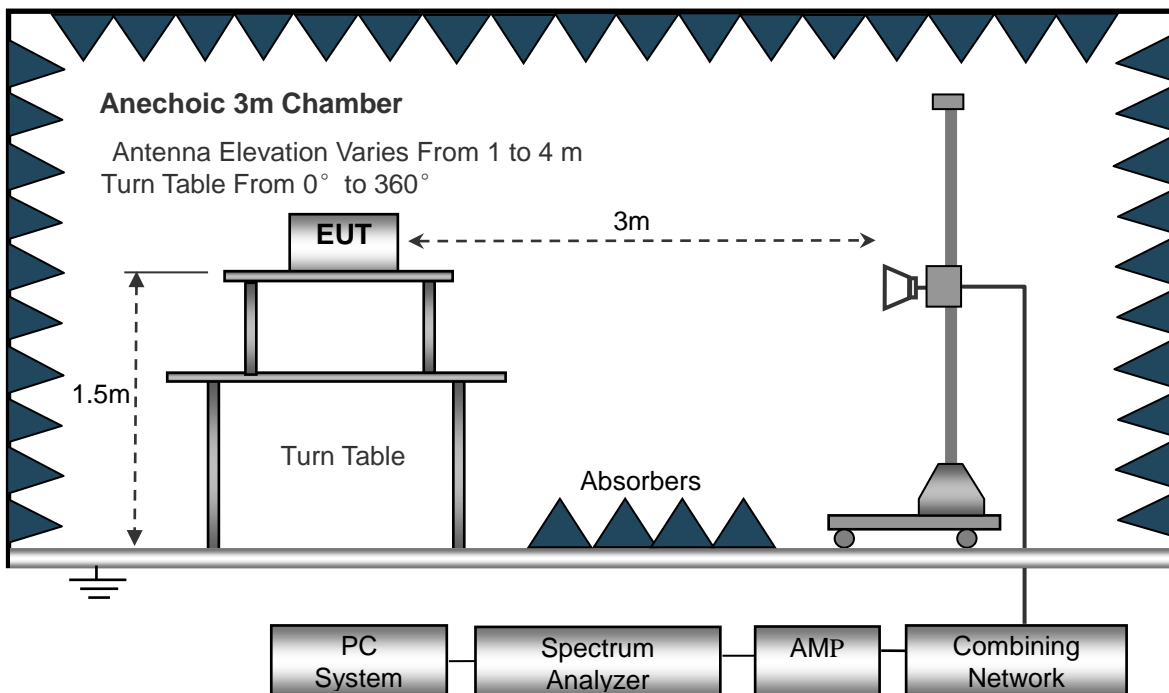

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


7.4 Summary of Test Results/Plots

Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b_11Mbps) is recorded in this report.


➤ Spurious Emissions Below 1GHz

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal

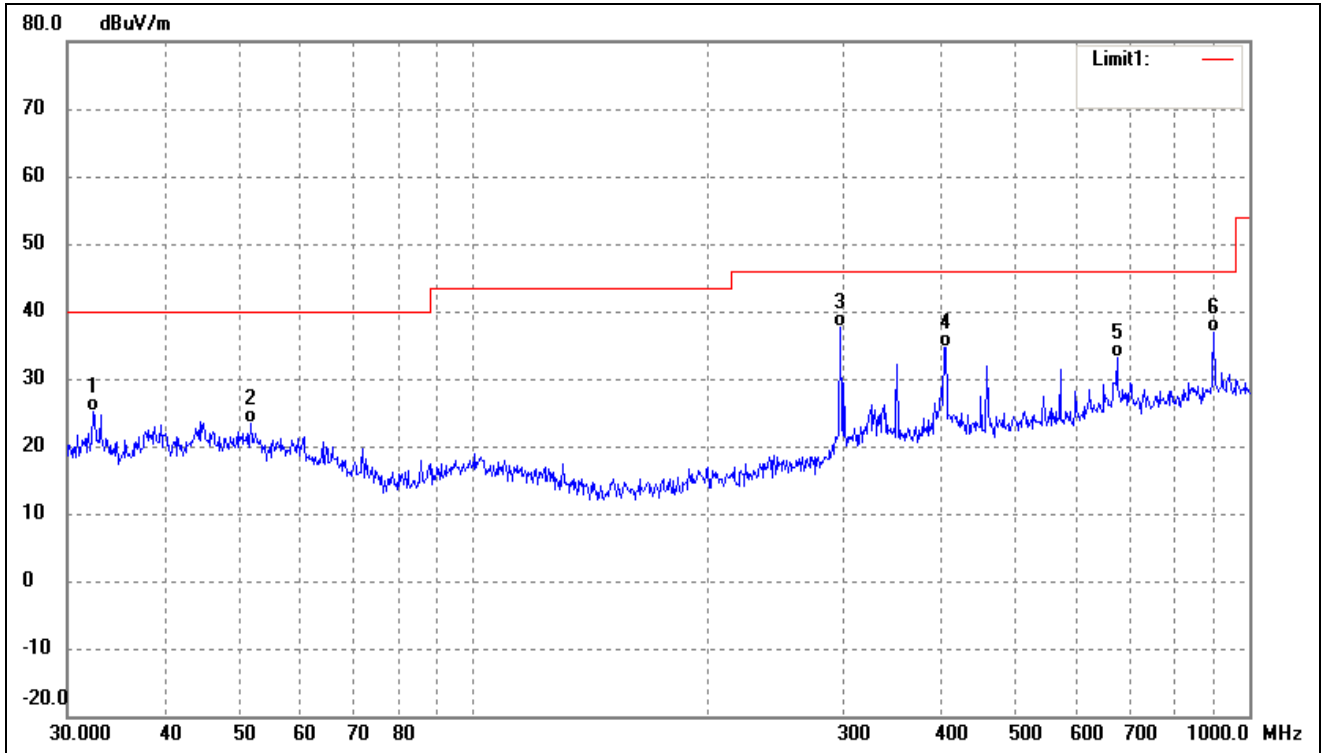


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.4059	39.09	-14.02	25.07	40.00	-14.93	-	-	QP
2	51.6616	35.41	-12.00	23.41	40.00	-16.59	-	-	QP
3	297.2241	46.71	-9.13	37.58	46.00	-8.42	-	-	QP
4	406.0880	40.95	-6.31	34.64	46.00	-11.36	-	-	QP
5	675.2080	34.95	-1.87	33.08	46.00	-12.92	-	-	QP
6	900.1474	35.35	1.55	36.90	46.00	-9.10	-	-	QP

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

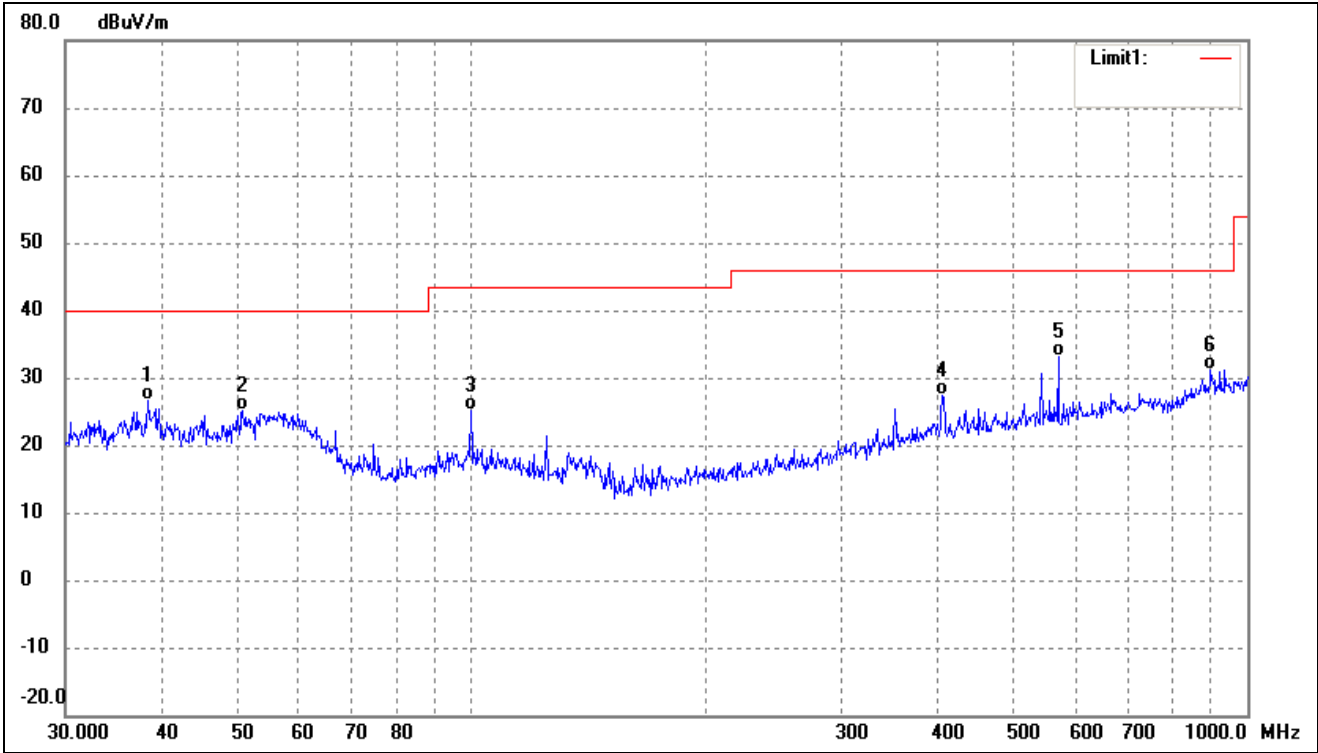


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.3462	39.18	-12.61	26.57	40.00	-13.43	-	-	QP
2	50.7637	36.79	-11.75	25.04	40.00	-14.96	-	-	QP
3	99.8777	38.49	-13.34	25.15	43.50	-18.35	-	-	QP
4	404.6665	33.80	-6.36	27.44	46.00	-18.56	-	-	QP
5	570.6100	35.98	-2.78	33.20	46.00	-12.80	-	-	QP
6	896.9965	29.68	1.42	31.10	46.00	-14.90	-	-	QP

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Horizontal

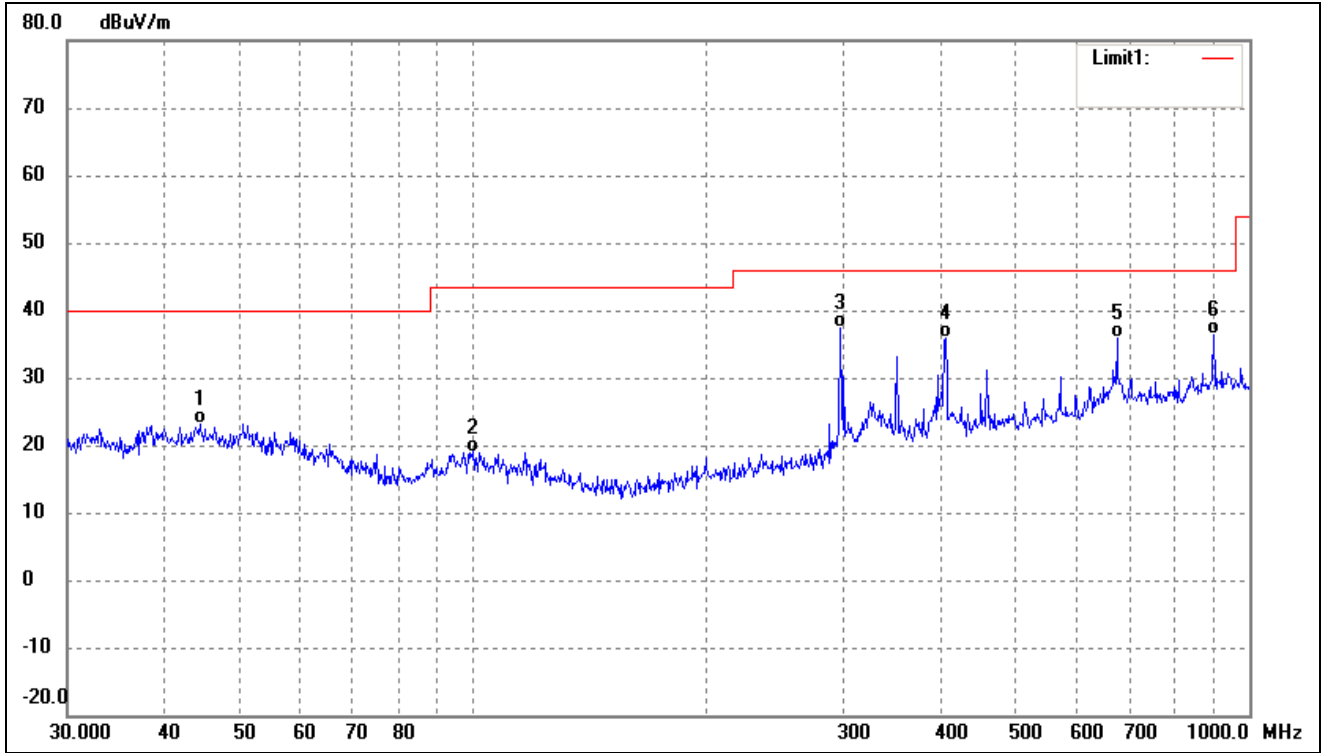


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	44.4308	34.88	-11.82	23.06	40.00	-16.94	-	-	QP
2	99.8777	32.34	-13.34	19.00	43.50	-24.50	-	-	QP
3	297.2241	46.51	-9.13	37.38	46.00	-8.62	-	-	QP
4	406.0880	42.28	-6.31	35.97	46.00	-10.03	-	-	QP
5	675.2080	37.86	-1.87	35.99	46.00	-10.01	-	-	QP
6	900.1474	34.90	1.55	36.45	46.00	-9.55	-	-	QP

802.11b_11Mbps			
Test Channel	Middle	Polarity:	Vertical

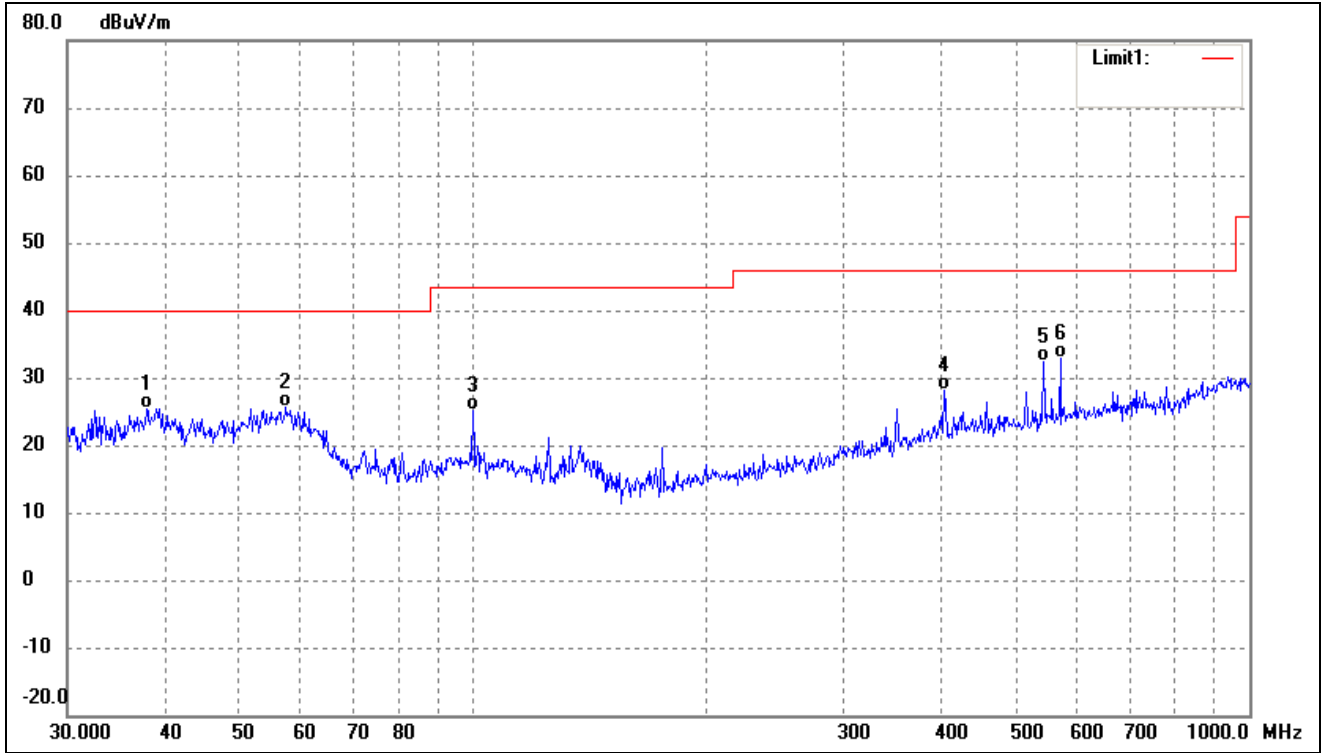


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	37.9450	38.23	-12.76	25.47	40.00	-14.53	-	-	QP
2	57.3923	38.53	-12.97	25.56	40.00	-14.44	-	-	QP
3	99.8777	38.38	-13.34	25.04	43.50	-18.46	-	-	QP
4	404.6665	34.58	-6.36	28.22	46.00	-17.78	-	-	QP
5	543.2742	36.25	-3.90	32.35	46.00	-13.65	-	-	QP
6	570.6100	35.56	-2.78	32.78	46.00	-13.22	-	-	QP

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal

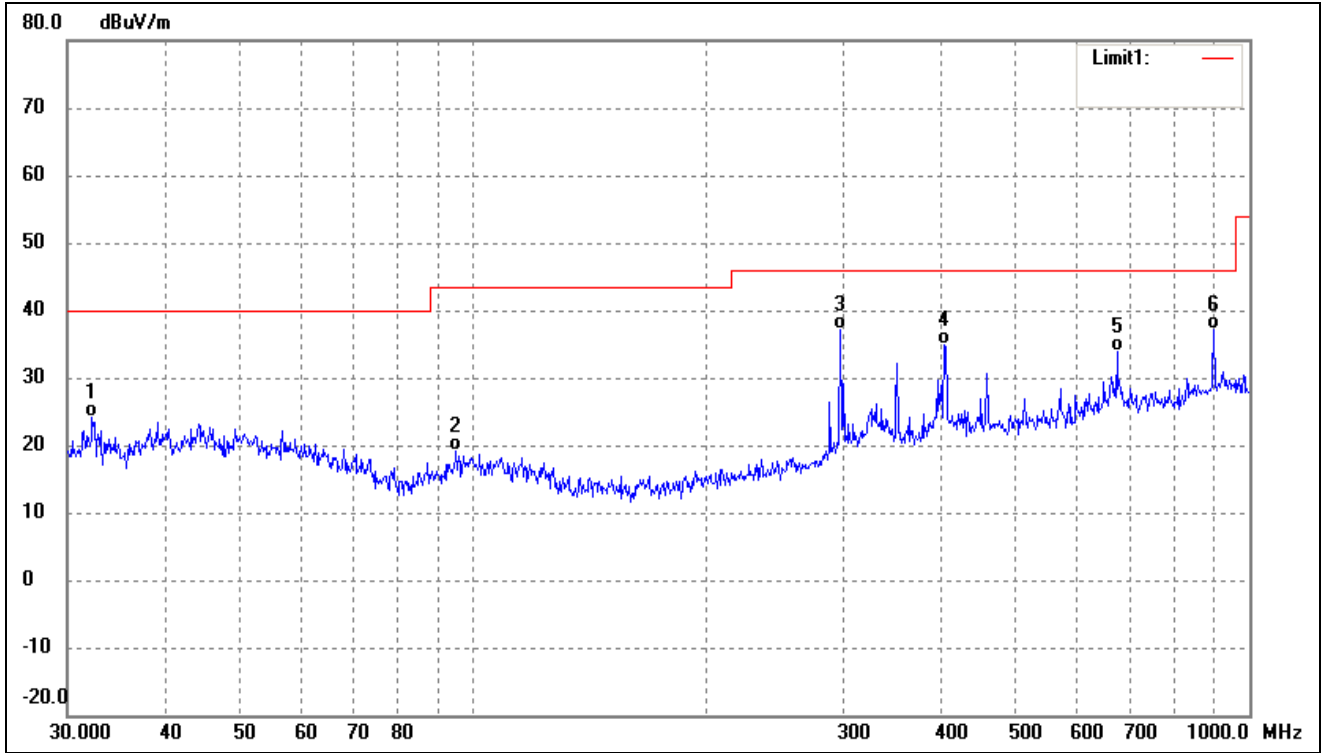

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.2925	38.20	-14.03	24.17	40.00	-15.83	-	-	QP
2	95.0930	33.34	-14.13	19.21	43.50	-24.29	-	-	QP
3	297.2241	46.24	-9.13	37.11	46.00	-8.89	-	-	QP
4	404.6665	41.14	-6.36	34.78	46.00	-11.22	-	-	QP
5	675.2080	35.73	-1.87	33.86	46.00	-12.14	-	-	QP
6	900.1474	35.67	1.55	37.22	46.00	-8.78	-	-	QP

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical

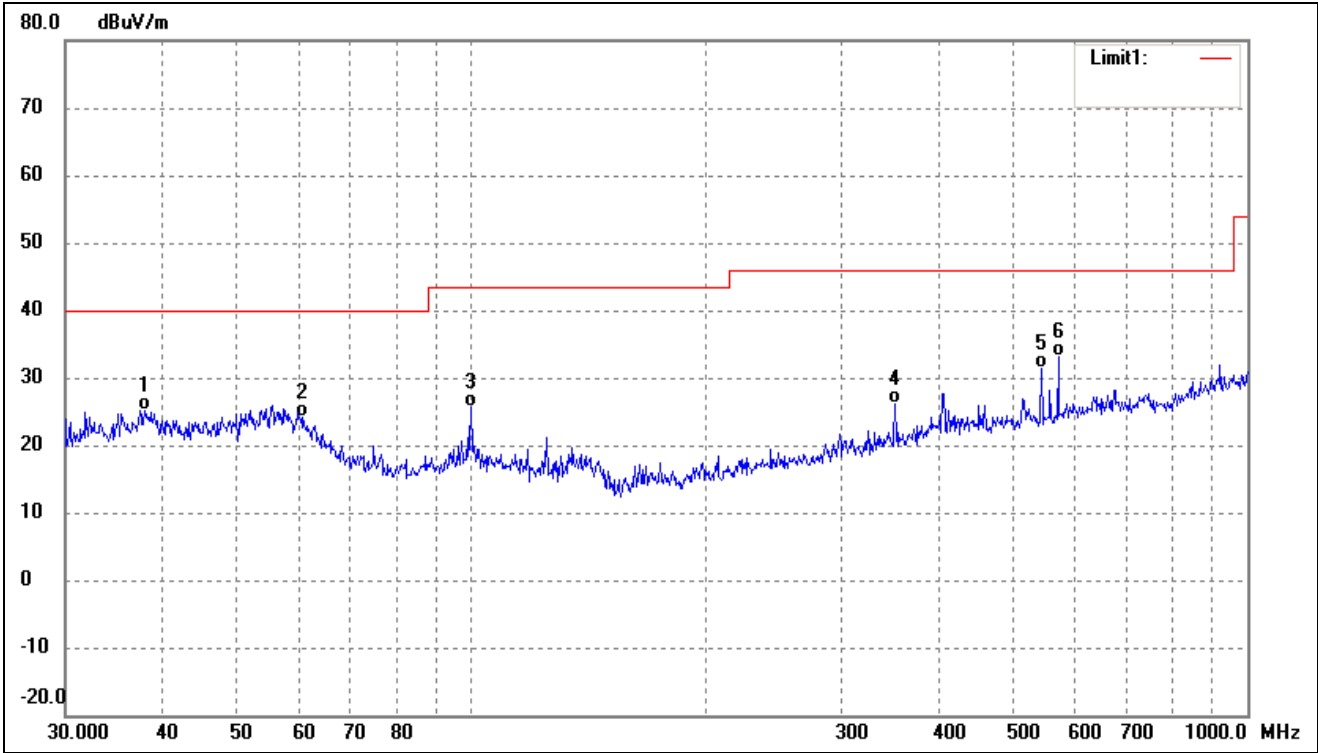

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	37.9450	37.79	-12.76	25.03	40.00	-14.97	-	-	QP
2	60.7044	37.27	-13.12	24.15	40.00	-15.85	-	-	QP
3	99.8777	38.90	-13.34	25.56	43.50	-17.94	-	-	QP
4	351.7079	33.56	-7.41	26.15	46.00	-19.85	-	-	QP
5	543.2742	35.23	-3.90	31.33	46.00	-14.67	-	-	QP
6	570.6100	35.83	-2.78	33.05	46.00	-12.95	-	-	QP

Remark: '-'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- Test Mode: 802.11b_11Mbps (worst case)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	64.46	-3.87	60.59	74	-13.41	H	PK
4824.000	46.76	-3.87	42.89	54	-11.11	H	AV
7236.000	57.17	1.14	58.31	74	-15.69	H	PK
7236.000	42.79	1.19	43.98	54	-10.02	H	AV
4824.000	62.96	-3.86	59.10	74	-14.90	V	PK
4824.000	45.10	-3.86	41.24	54	-12.76	V	AV
7236.000	56.73	1.10	57.83	74	-16.17	V	PK
7236.000	38.18	1.10	39.28	54	-14.72	V	AV
Middle Channel-2437MHz							
4874.000	64.70	-3.74	60.96	74	-13.04	H	PK
4874.000	46.29	-3.74	42.55	54	-11.45	H	AV
7311.000	56.48	1.47	57.95	74	-16.05	H	PK
7311.000	40.33	1.47	41.80	54	-12.20	H	AV
4874.000	63.51	-3.74	59.77	74	-14.23	V	PK
4874.000	46.61	-3.74	42.87	54	-11.13	V	AV
7311.000	57.17	1.47	58.64	74	-15.36	V	PK
7311.000	39.39	1.47	40.86	54	-13.14	V	AV
High Channel-2462MHz							
4924.000	64.57	-3.59	60.98	74	-13.02	H	PK
4924.000	45.12	-3.59	41.53	54	-12.47	H	AV
7386.000	56.29	1.79	58.08	74	-15.92	H	PK
7386.000	40.04	1.79	41.83	54	-12.17	H	AV
4924.000	62.84	-3.59	59.25	74	-14.75	V	PK
4924.000	46.39	-3.59	42.80	54	-11.20	V	AV
7386.000	58.45	1.79	60.24	74	-13.76	V	PK
7386.000	39.29	1.79	41.08	54	-12.92	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW \geq $[3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots


➤ Radiated test

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal(worst case)

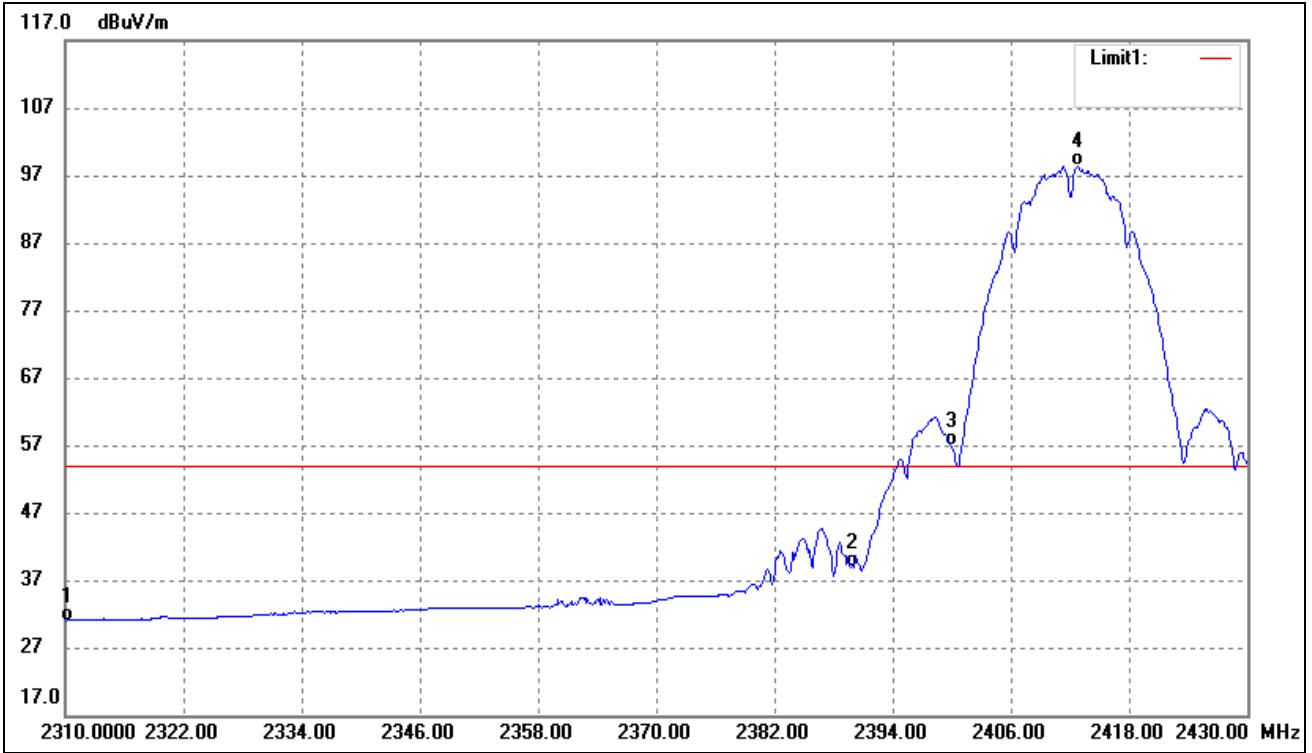


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.65	-9.66	30.99	54.00	-23.01	Average Detector
		53.63	-9.66	43.97	74.00	-30.03	Peak Detector
2	2390.000	48.48	-9.50	38.98	54.00	-15.02	Average Detector
		60.40	-9.50	50.90	74.00	-23.10	Peak Detector
3	2400.000	66.29	-9.48	56.81	Delta=41.65dBc		Average Detector
4	2412.840	107.92	-9.46	98.46			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal(worst case)

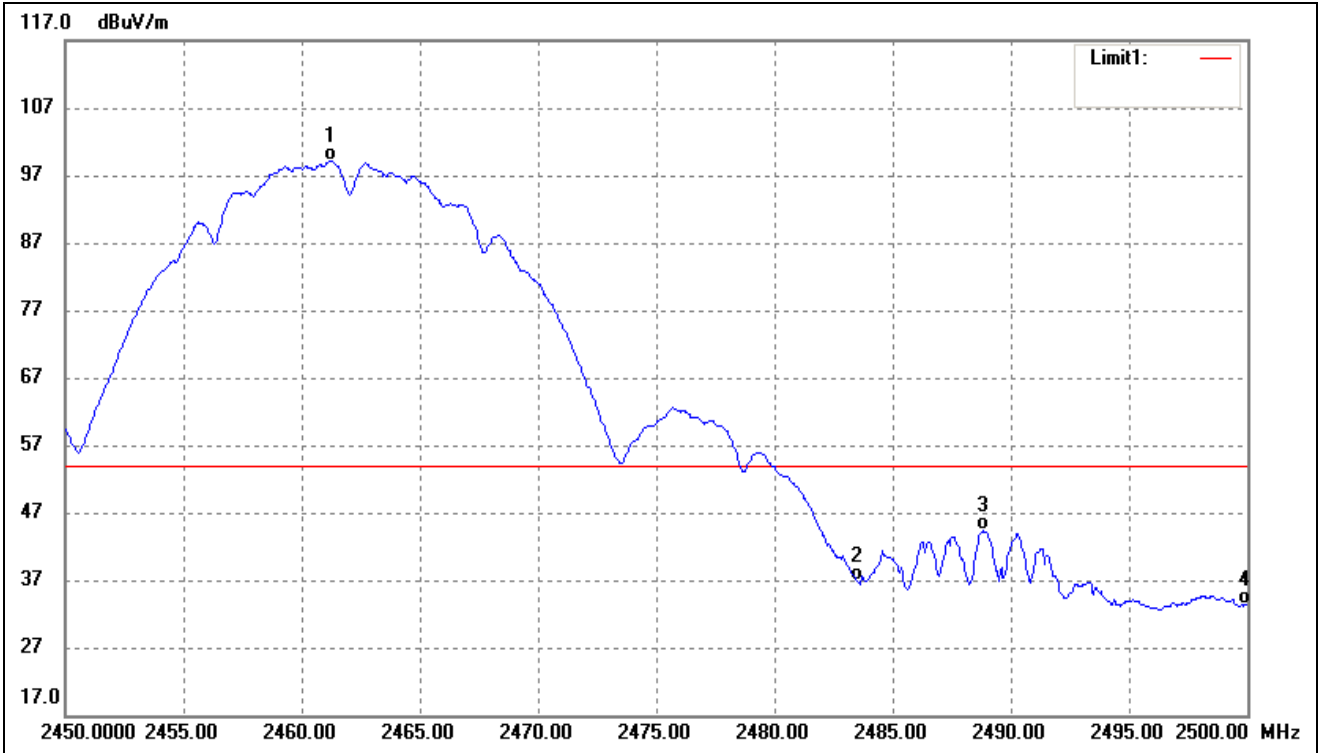


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.200	108.52	-9.36	99.16	/	/	Average Detector
	2460.850	113.64	-9.36	104.28	/	/	Peak Detector
2	2483.500	46.21	-9.31	36.90	54.00	-17.10	Average Detector
	2483.500	60.02	-9.31	50.71	74.00	-23.29	Peak Detector
3	2488.850	53.57	-9.30	44.27	54.00	-9.73	Average Detector
4	2500.000	42.70	-9.28	33.42	54.00	-20.58	Average Detector
	2500.000	56.22	-9.28	46.94	74.00	-27.06	Peak Detector

802.11g_54Mbps			
Test Channel	Low	Polarity:	Horizontal(worst case)

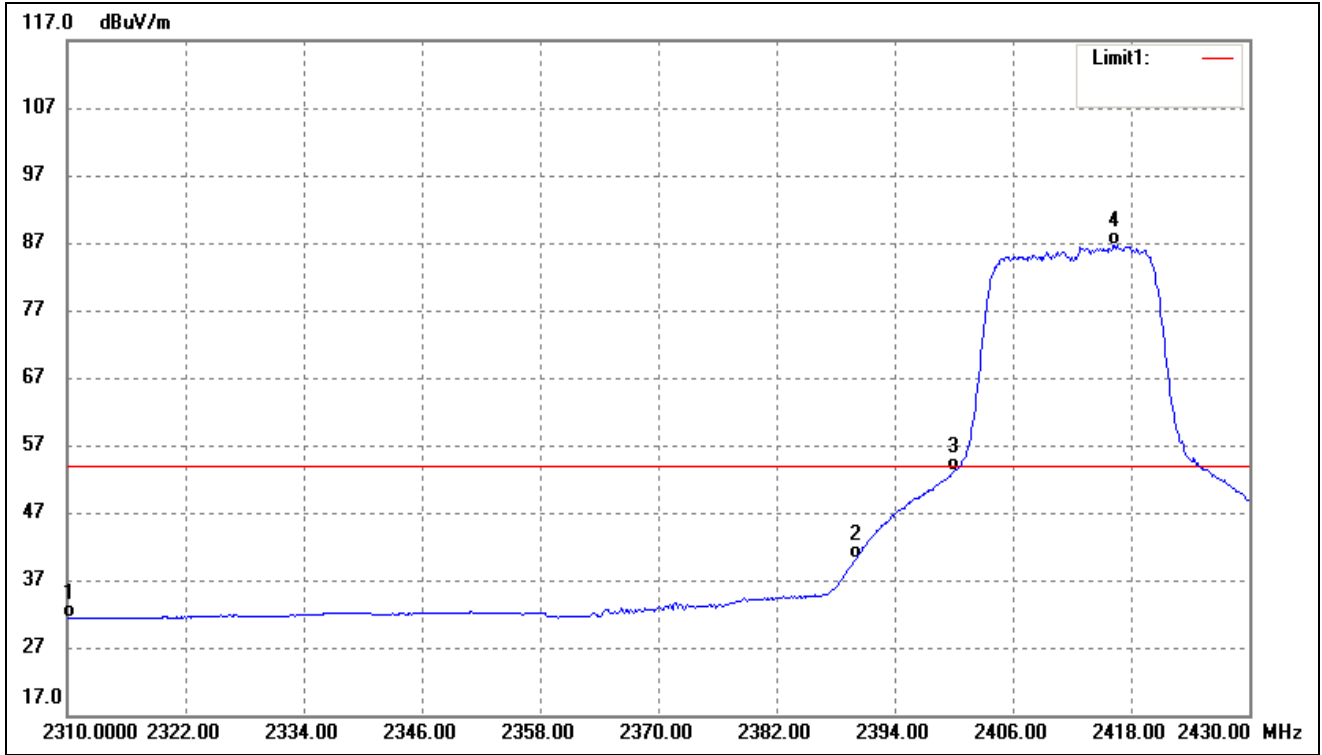


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.98	-9.66	31.32	54.00	-22.68	Average Detector
		55.07	-9.66	45.41	74.00	-28.59	Peak Detector
2	2390.000	49.62	-9.50	40.12	54.00	-13.88	Average Detector
		71.37	-9.50	61.87	74.00	-12.13	Peak Detector
3	2400.000	62.66	-9.48	53.18	Delta=33.41dBc		Average Detector
4	2416.320	96.05	-9.46	86.59		Average Detector	

802.11g_54Mbps			
Test Channel	High	Polarity:	Horizontal(worst case)

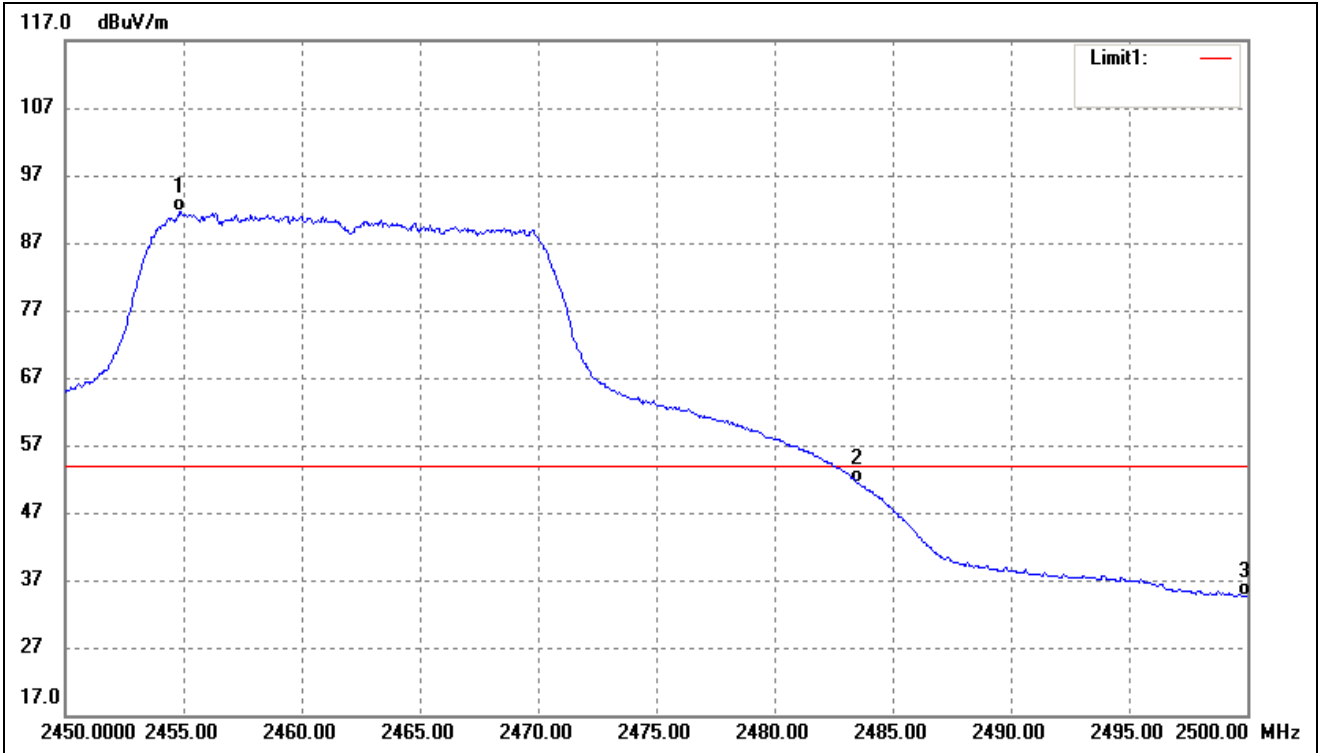


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2454.850	100.95	-9.37	91.58	/	/	Average Detector
	2460.800	111.45	-9.36	102.09	/	/	Peak Detector
2	2483.500	60.76	-9.31	51.45	54.00	-2.55	Average Detector
	2483.500	76.66	-9.31	67.35	74.00	-6.65	Peak Detector
3	2500.000	43.90	-9.28	34.62	54.00	-19.38	Average Detector
	2500.000	56.56	-9.28	47.28	74.00	-26.72	Peak Detector

802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Horizontal(worst case)

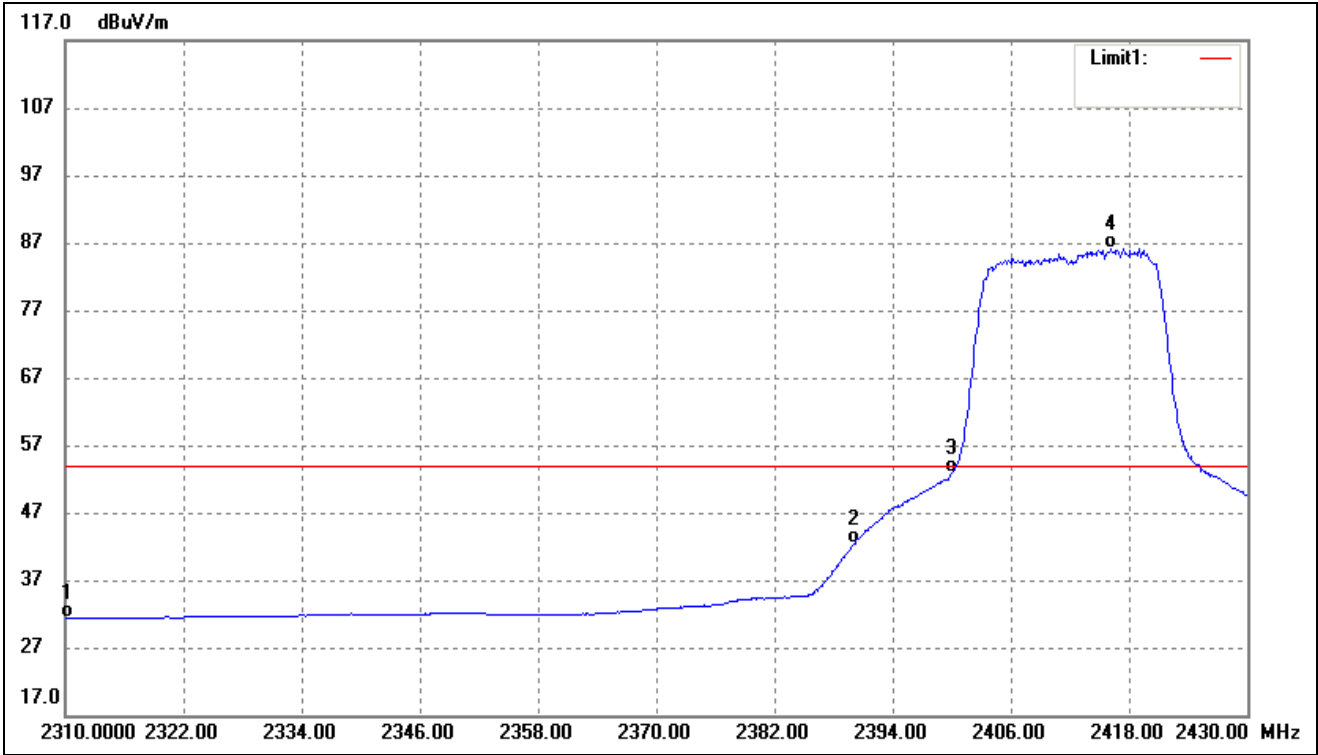


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.00	-9.66	31.34	54.00	-22.66	Average Detector
		53.17	-9.66	43.51	74.00	-30.49	Peak Detector
2	2390.000	51.79	-9.50	42.29	54.00	-11.71	Average Detector
		70.39	-9.50	60.89	74.00	-13.11	Peak Detector
3	2400.000	62.39	-9.48	52.91	Delta=33.26dBc		Average Detector
4	2416.200	95.63	-9.46	86.17		Average Detector	

802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Horizontal(worst case)

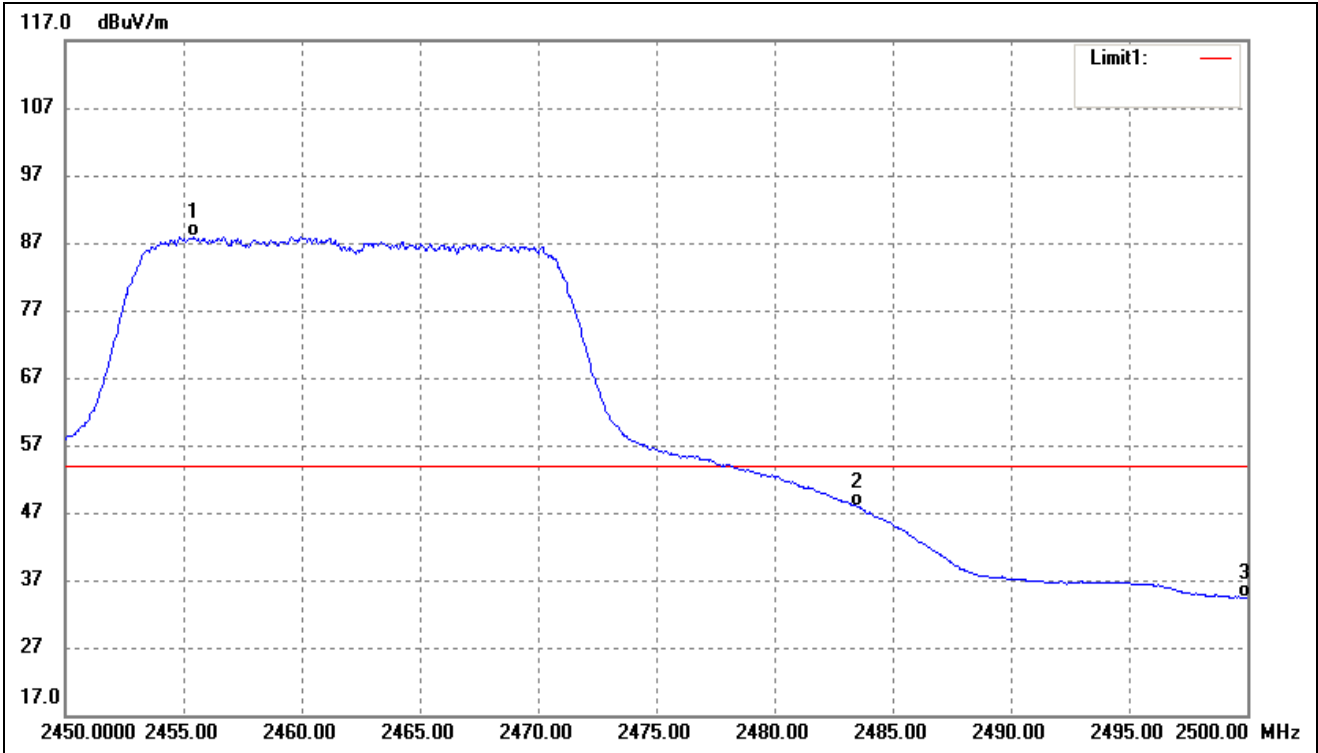


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2455.400	97.31	-9.37	87.94	/	/	Average Detector
	2456.000	111.00	-9.36	101.64	/	/	Peak Detector
2	2483.500	57.20	-9.31	47.89	54.00	-6.11	Average Detector
	2483.500	81.21	-9.31	71.90	74.00	-2.10	Peak Detector
3	2500.000	43.64	-9.28	34.36	54.00	-19.64	Average Detector
	2500.000	56.59	-9.28	47.31	74.00	-26.69	Peak Detector

802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Horizontal(worst case)

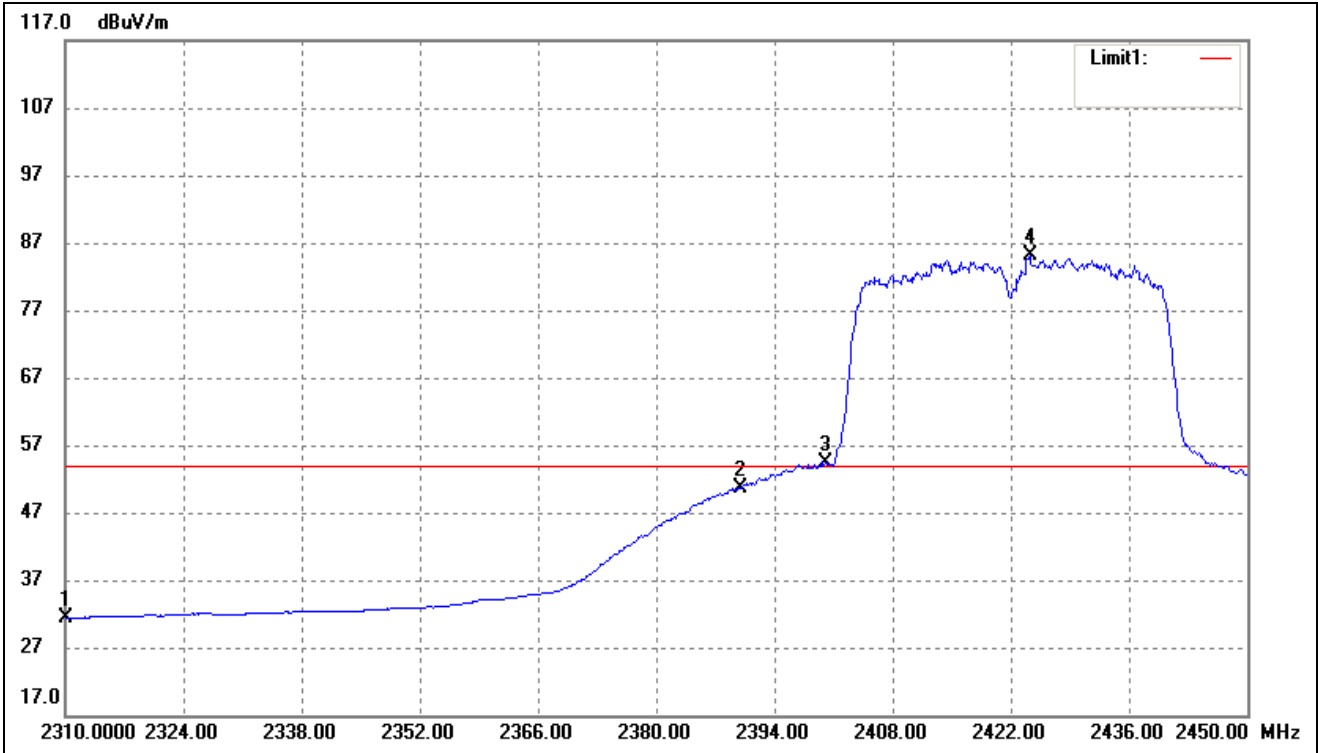

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.04	-9.66	31.38	54.00	-22.62	Average Detector
		53.29	-9.66	43.63	74.00	-30.37	Peak Detector
2	2390.000	60.09	-9.50	50.59	54.00	-3.41	Average Detector
		76.58	-9.50	67.08	74.00	-6.92	Peak Detector
3	2400.000	63.89	-9.48	54.41	Delta=30.62dB	Average Detector	
4	2424.240	94.46	-9.43	85.03		Average Detector	

802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Horizontal(worst case)

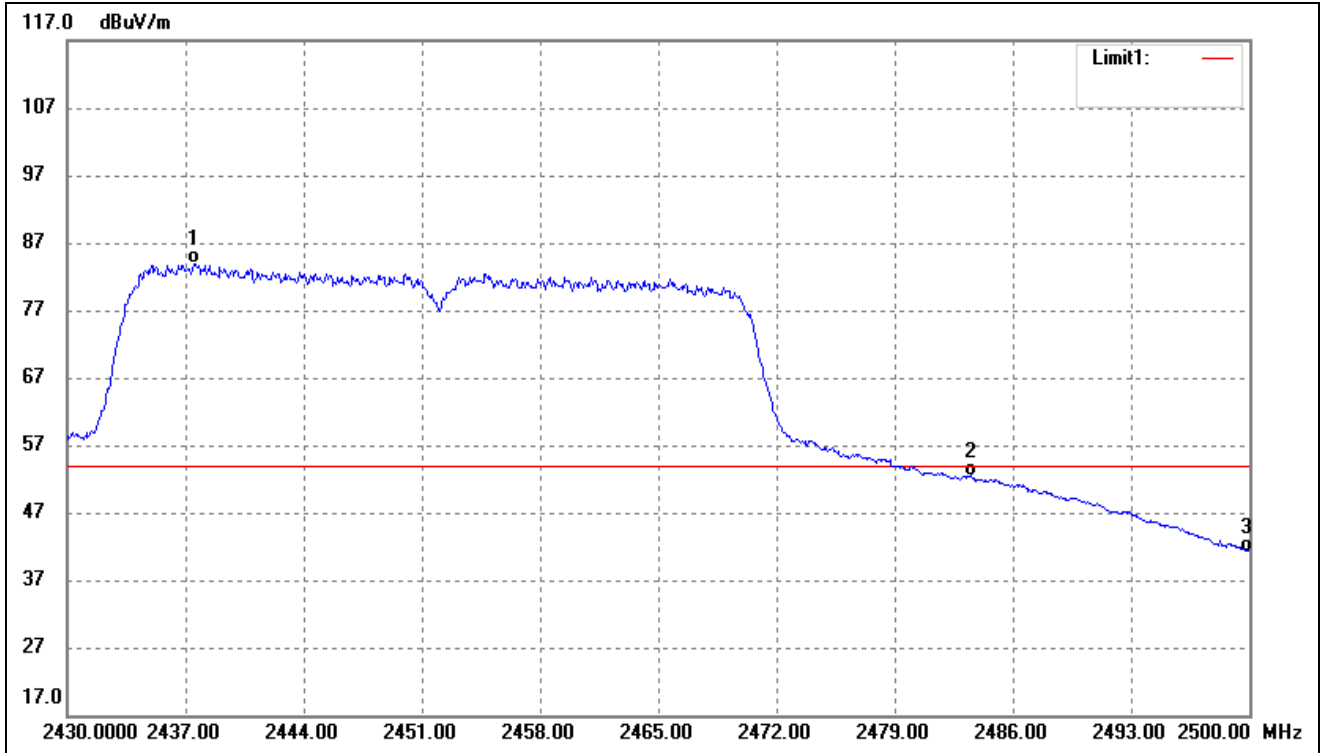

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2437.490	93.29	-9.40	83.89	/	/	Average Detector
	2437.770	109.23	-9.41	99.82	/	/	Peak Detector
2	2483.500	61.57	-9.31	52.26	54.00	-1.74	Average Detector
	2483.500	78.67	-9.31	69.36	74.00	-4.64	Peak Detector
3	2500.000	50.52	-9.28	41.24	54.00	-12.76	Average Detector
	2500.000	69.91	-9.28	60.63	74.00	-13.37	Peak Detector

➤ Conducted test

Please refer to Appendix D

9. Conducted Emissions


9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

9.2 Basic Test Setup Block Diagram

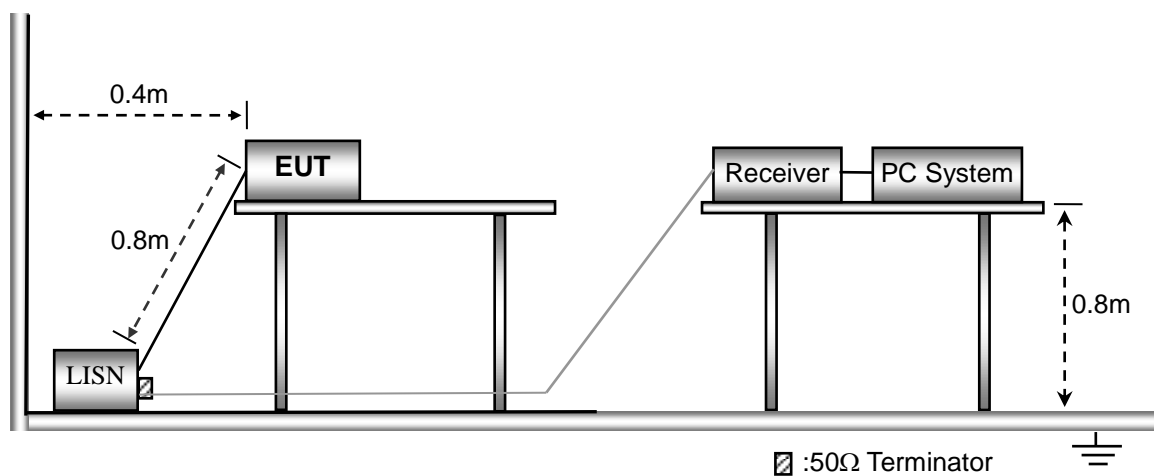


9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


9.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

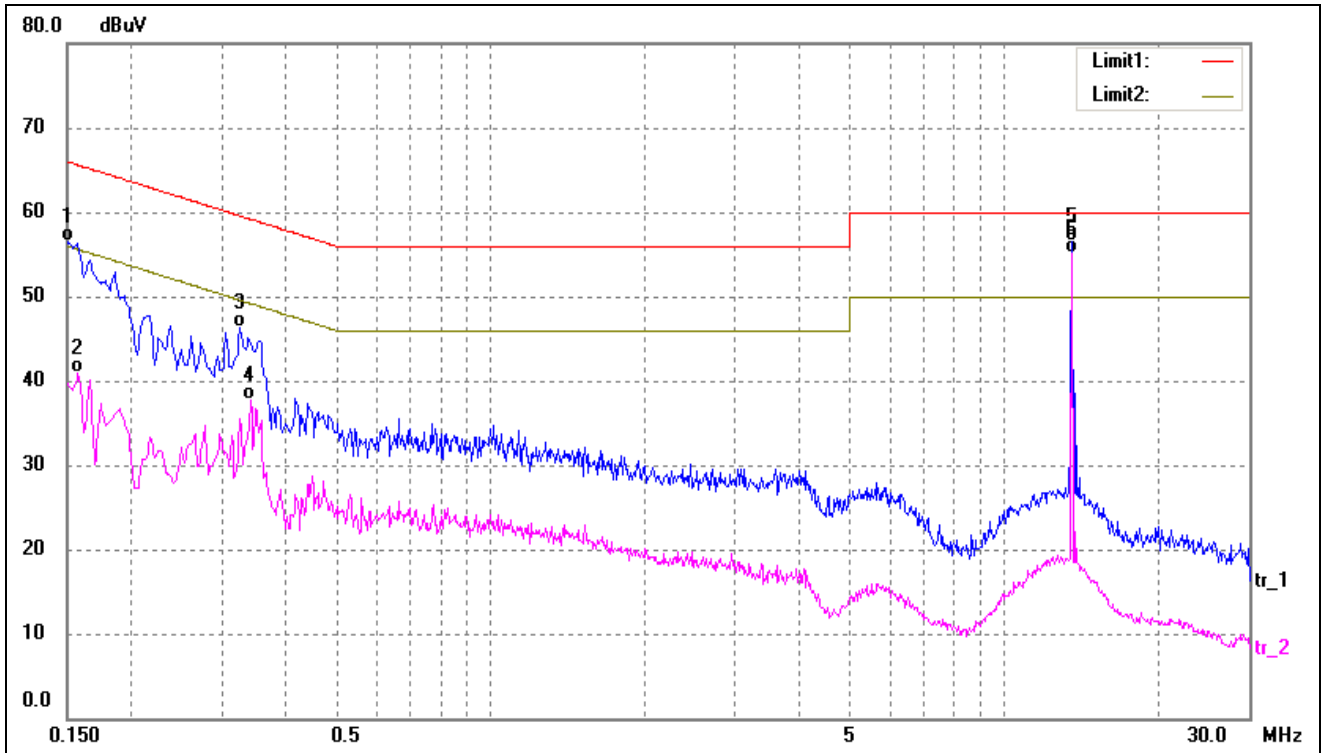

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	46.26	10.25	56.51	65.99	-9.48	QP
2	0.1580	30.67	10.25	40.92	55.56	-14.64	AVG
3	0.3260	36.13	10.26	46.39	59.55	-13.16	QP
4	0.3420	27.45	10.26	37.71	49.15	-11.44	AVG
5	13.5620	46.08	10.50	56.58	Fundamental		QP
6	13.5620	44.53	10.50	55.03			AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

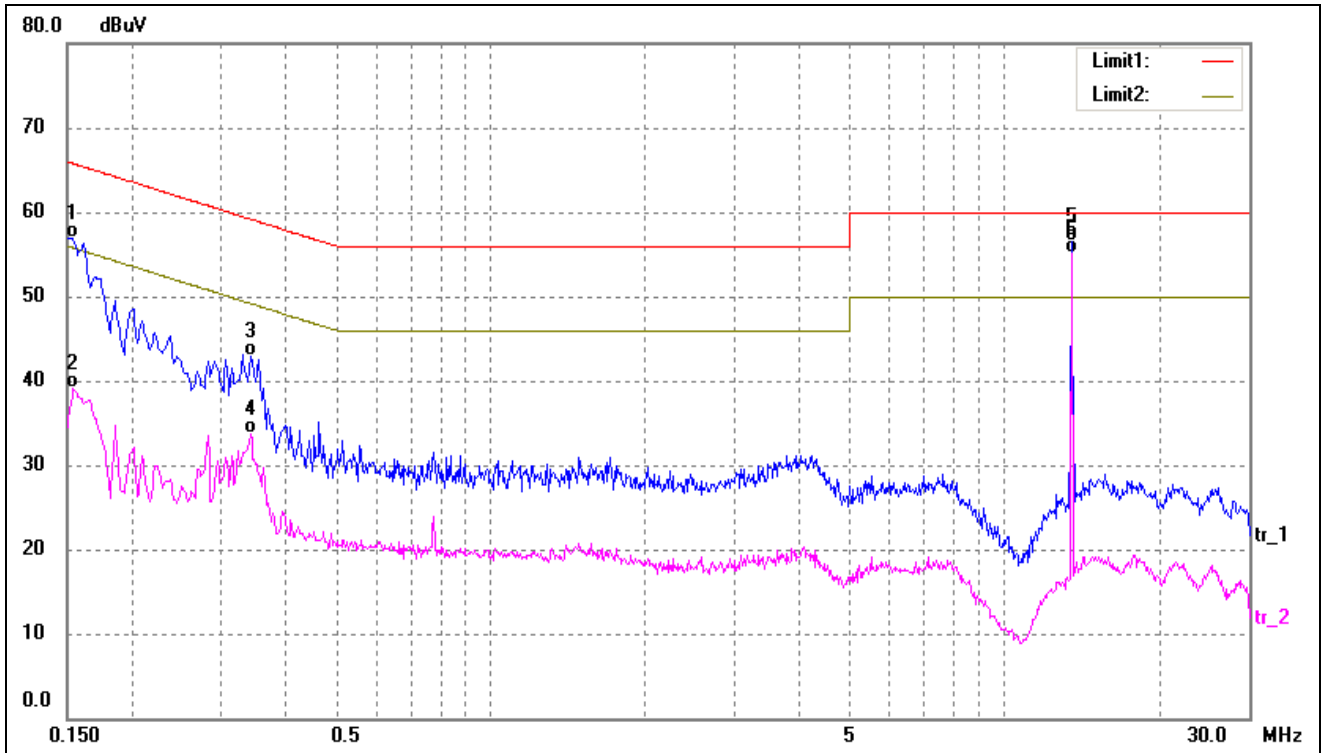

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	46.69	10.25	56.94	65.99	-9.05	QP
2	0.1539	28.94	10.25	39.19	55.78	-16.59	AVG
3	0.3420	32.55	10.26	42.81	59.15	-16.34	QP
4	0.3420	23.43	10.26	33.69	49.15	-15.46	AVG
5	13.5620	45.95	10.50	56.45	Fundamental		QP
6	13.5620	44.63	10.50	55.13			AVG

APPENDIX SUMMARY

Project No.	WTX20X11090589W	Test Engineer	Moon
Start date	2020/12/01	Finish date	2020/12/01
Temperature	22.8°C	Humidity	38%
RF specifications	WIFI-2.4G		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant




APPENDIX A

Power Spectral Density			
Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b_11Mbps	2412	-15.70	8
	2437	-15.87	8
	2462	-15.82	8
802.11g_54Mbps	2412	-19.05	8
	2437	-18.88	8
	2462	-19.57	8
802.11n-HT20_MCS7	2412	-20.01	8
	2437	-19.47	8
	2462	-20.17	8
802.11n-HT40_MCS7	2422	-21.66	8
	2437	-21.64	8
	2452	-21.73	8

<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	

<p>802.11g-Low</p>	<p>Agilent R T</p> <p>Ref 20 dBm #Atten 30 dB Mkr1 2.40702 GHz -19.05 dBm</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>W1 S2 S3 FC AA</p> <p>Marker 2.407020000 GHz -19.05 dBm</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p> <p>Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
<p>802.11g-Middle</p>	<p>Agilent R T</p> <p>Ref 20 dBm #Atten 30 dB Mkr1 2.43793 GHz -18.88 dBm</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>W1 S2 S3 FC AA</p> <p>Marker 2.437930000 GHz -18.88 dBm</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p> <p>Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
<p>802.11g-High</p>	<p>Agilent R T</p> <p>Ref 20 dBm #Atten 30 dB Mkr1 2.46293 GHz -19.57 dBm</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>W1 S2 S3 FC AA</p> <p>Marker 2.462930000 GHz -19.57 dBm</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p> <p>Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>




<p>802.11n-HT20-Low</p>	<p>Agilent R T Ref 20 dBm #Atten 30 dB Mkr1 2.41701 GHz -20.01 dBm #Avg Log 10 dB/ Offst 1 dB W1 S2 S3 FC AA Marker 2.417010000 GHz -20.01 dBm Center 2.412 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p>
<p>802.11n-HT20-Middle</p>	<p>Agilent R T Ref 20 dBm #Atten 30 dB Mkr1 2.42950 GHz -19.47 dBm #Avg Log 10 dB/ Offst 1 dB W1 S2 S3 FC AA Marker 2.429500000 GHz -19.47 dBm Center 2.437 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p>
<p>802.11n-HT20-High</p>	<p>Agilent R T Ref 20 dBm #Atten 30 dB Mkr1 2.45825 GHz -20.17 dBm #Avg Log 10 dB/ Offst 1 dB W1 S2 S3 FC AA Marker 2.458250000 GHz -20.17 dBm Center 2.462 GHz Span 30 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 5.425 s (1001 pts)</p>

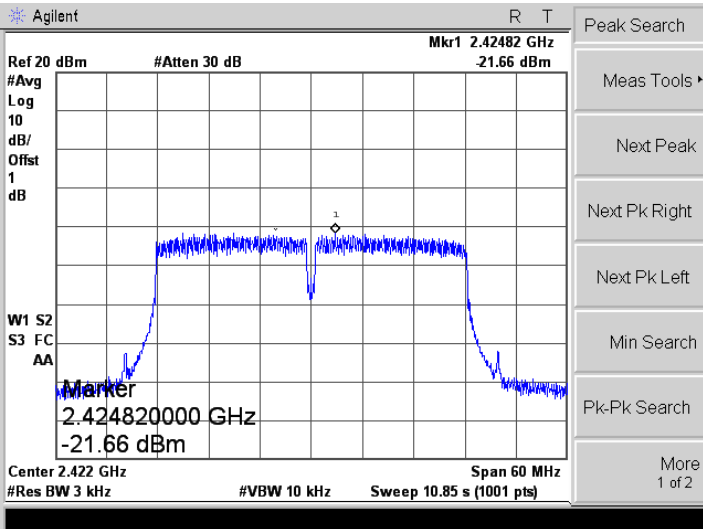
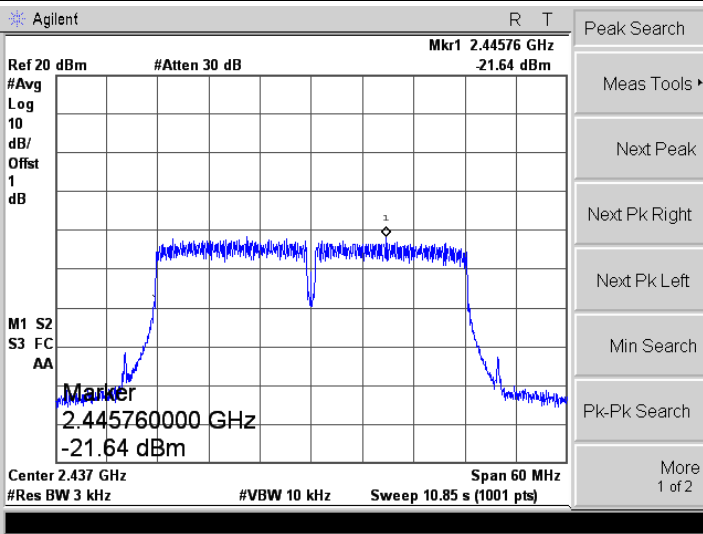
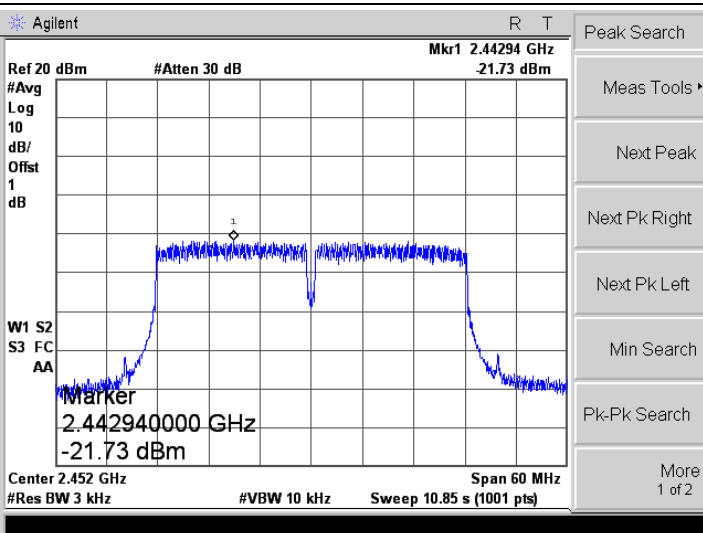
<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-Middle</p>	
<p>802.11n-HT40-High</p>	




APPENDIX B

DTS Bandwidth			
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b_11Mbps	2412	9.023	≥500
	2437	8.560	≥500
	2462	8.564	≥500
802.11g_54Mbps	2412	16.355	≥500
	2437	16.375	≥500
	2462	16.368	≥500
802.11n-HT20_MCS7	2412	17.583	≥500
	2437	17.586	≥500
	2462	17.572	≥500
802.11n-HT40_MCS7	2422	35.549	≥500
	2437	35.518	≥500
	2452	35.577	≥500

<p>802.11b-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>x dB -6.00 dB</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 13.3856 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 25.669 kHz</p> <p>x dB Bandwidth 9.023 MHz</p> <p>Meas Setup</p> <p>Avg Number 10 On Off</p> <p>Avg Mode Exp Repeat</p> <p>Max Hold On Off</p> <p>Occ BW % Pwr 99.00 %</p> <p>OBW Spar 30.000000 MHz</p> <p>x dB -6.00 dB</p> <p>Optimize Ref Level</p>
<p>802.11b-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 13.3303 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -5.969 kHz</p> <p>x dB Bandwidth 8.560 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 13.2942 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 12.073 kHz</p> <p>x dB Bandwidth 8.564 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

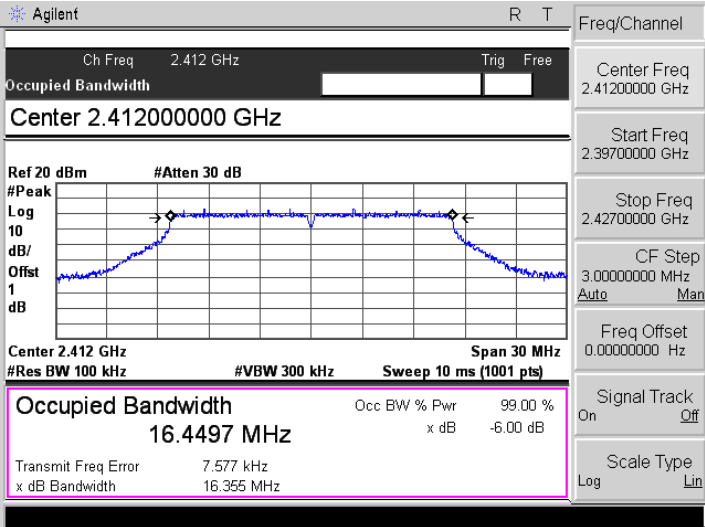
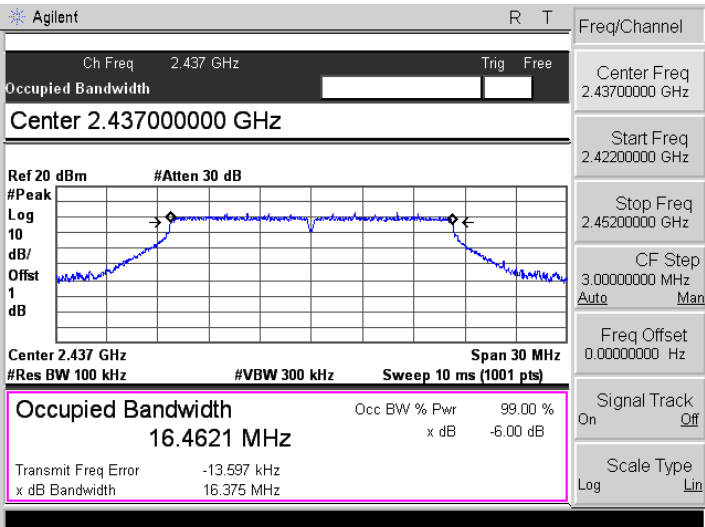
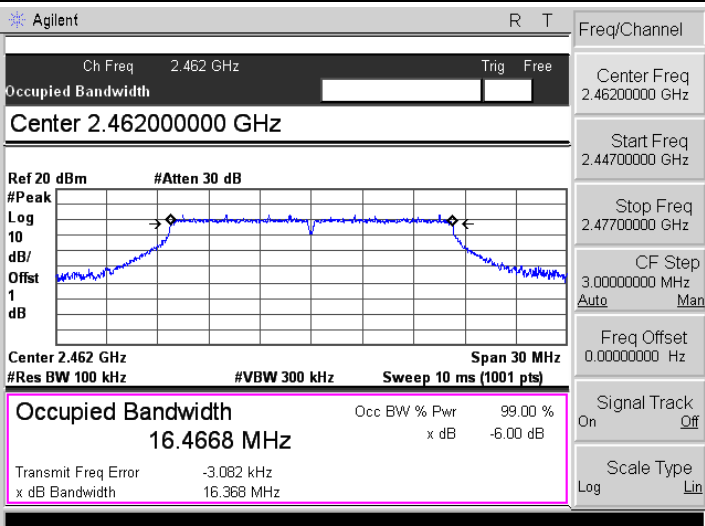
<p>802.11g-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.4497 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 7.577 kHz x dB Bandwidth 16.355 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.4621 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -13.597 kHz x dB Bandwidth 16.375 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.4668 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -3.082 kHz x dB Bandwidth 16.368 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

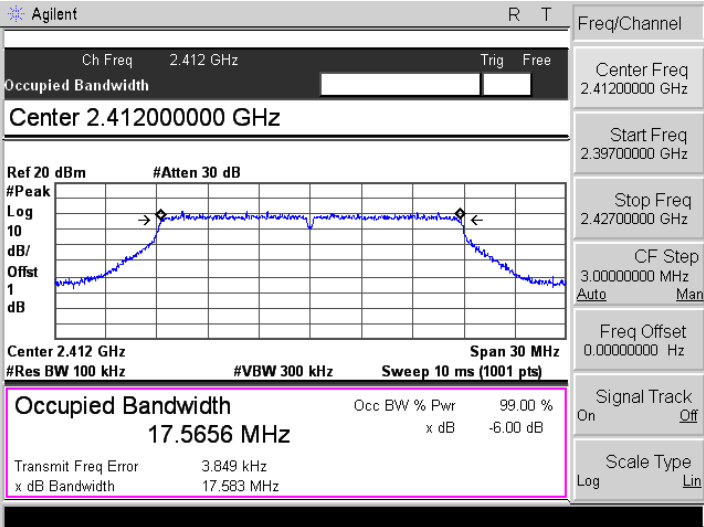
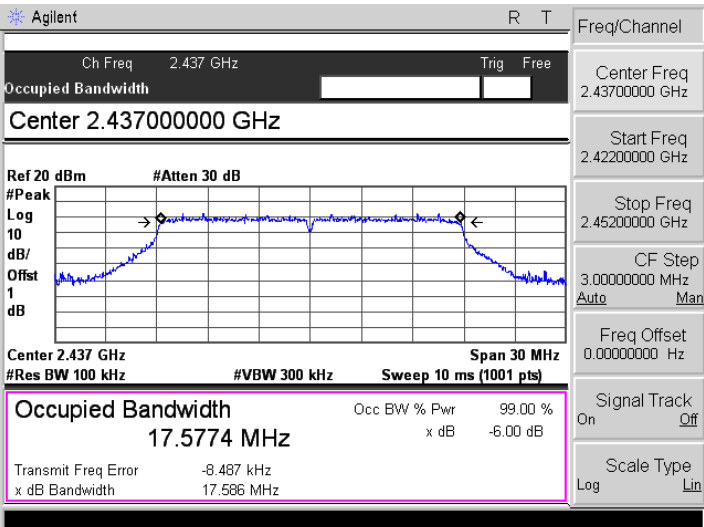
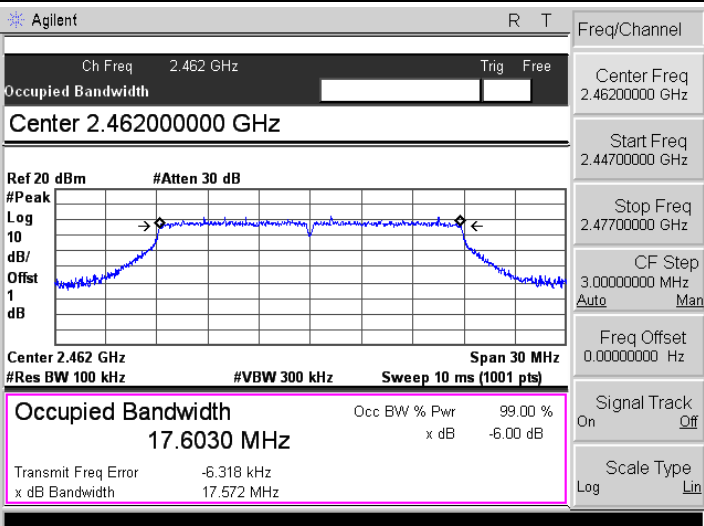
<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5656 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 3.849 kHz x dB Bandwidth 17.583 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5774 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -8.487 kHz x dB Bandwidth 17.586 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.6030 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -6.318 kHz x dB Bandwidth 17.572 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

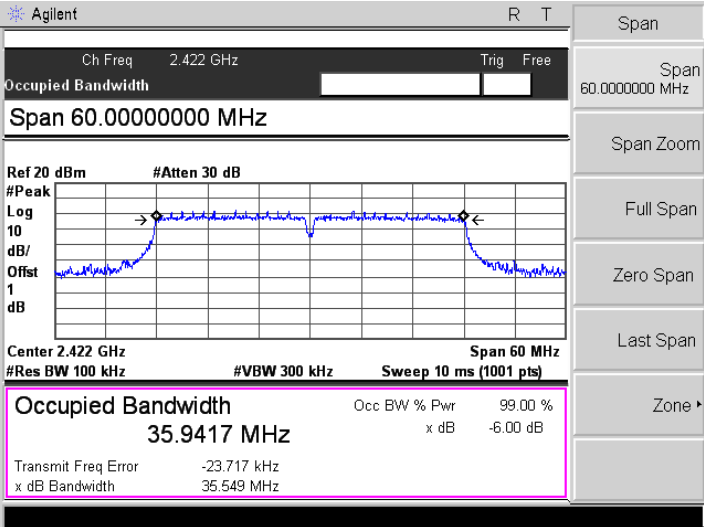
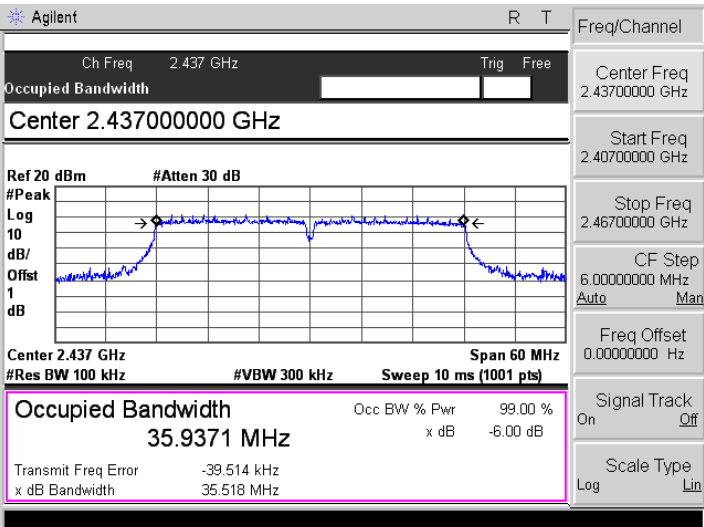
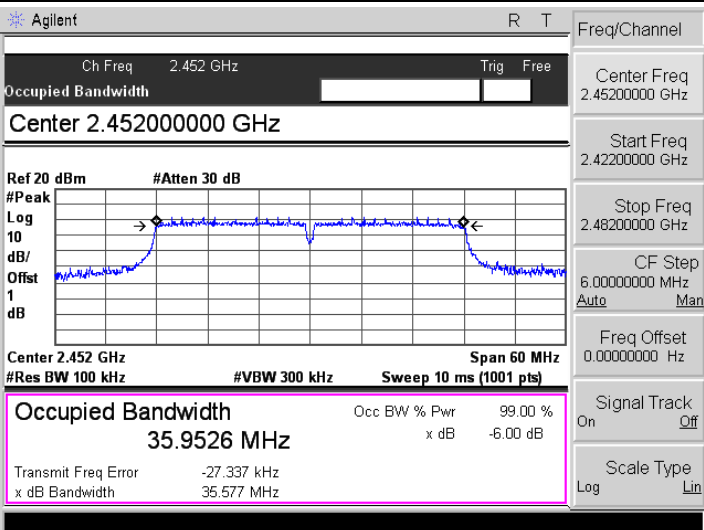
<p>802.11n-HT40-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Span 60.0000000 MHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.9417 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -23.717 kHz x dB Bandwidth 35.549 MHz</p> <p>Span 60.0000000 MHz</p> <p>Span Zoom</p> <p>Full Span</p> <p>Zero Span</p> <p>Last Span</p> <p>Zone ▶</p>
<p>802.11n-HT40-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.9371 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -39.514 kHz x dB Bandwidth 35.518 MHz</p> <p>Span 60 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.40700000 GHz</p> <p>Stop Freq 2.46700000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.45200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Ofst 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 35.9526 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -27.337 kHz x dB Bandwidth 35.577 MHz</p> <p>Span 60 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.48200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

APPENDIX C

Test Mode	Frequency MHz	Reading dBm	Limit dBm
802.11b _ 11Mbps	2412	15.41	30.00
	2437	15.39	30.00
	2462	15.31	30.00
802.11g_54Mbps	2412	14.65	30.00
	2437	14.60	30.00
	2462	14.84	30.00
802.11n HT20_MCS7	2412	13.31	30.00
	2437	13.50	30.00
	2462	13.21	30.00
802.11n HT40_MCS7	2422	12.52	30.00
	2437	12.40	30.00
	2452	12.73	30.00
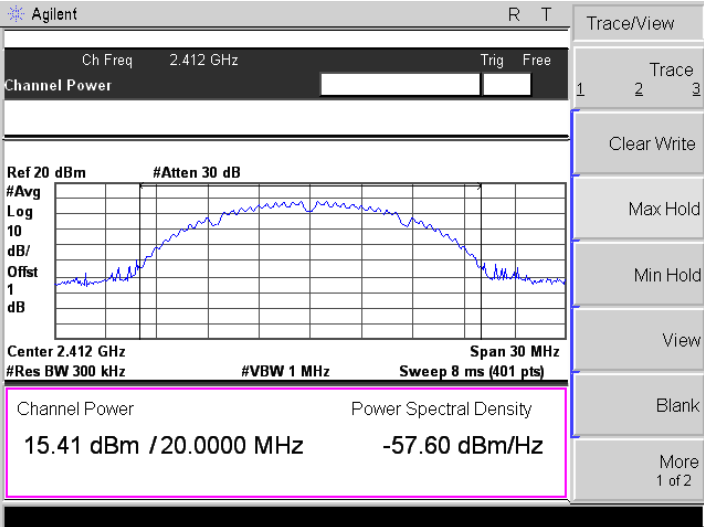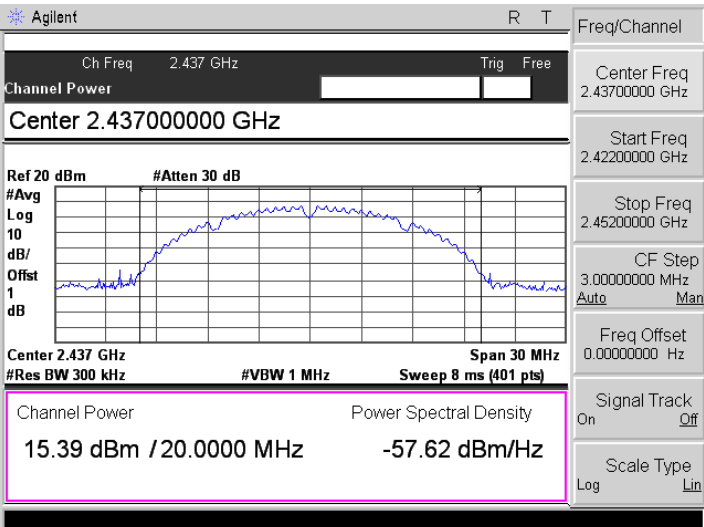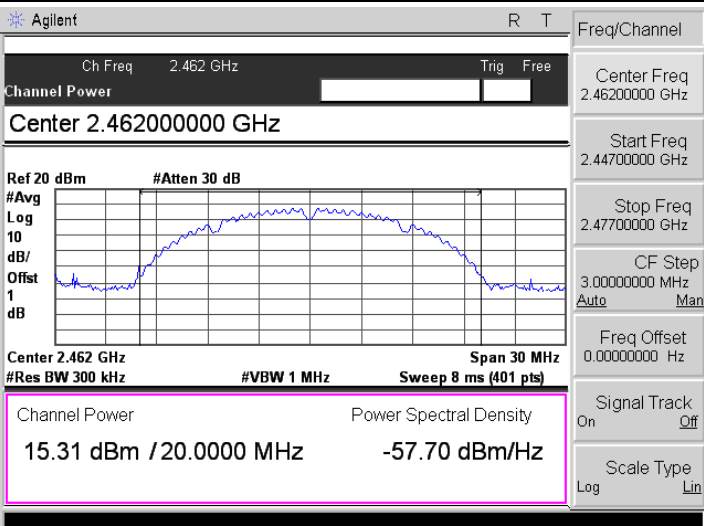
<p>802.11b-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>15.41 dBm / 20.0000 MHz -57.60 dBm/Hz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11b-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>15.39 dBm / 20.0000 MHz -57.62 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>15.31 dBm / 20.0000 MHz -57.70 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

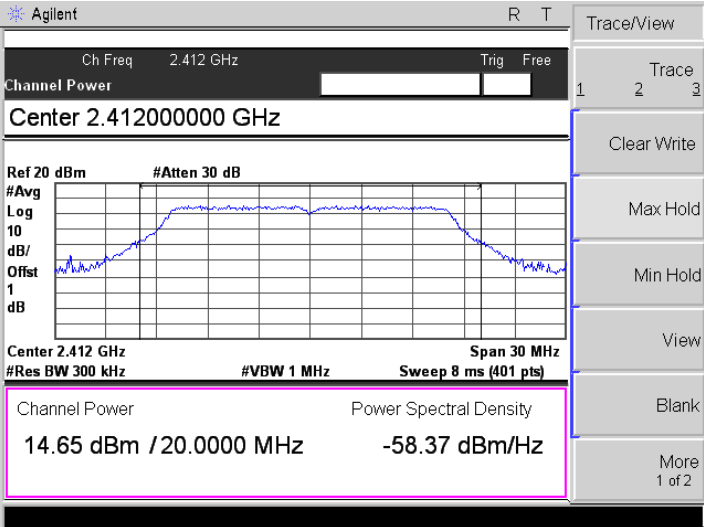
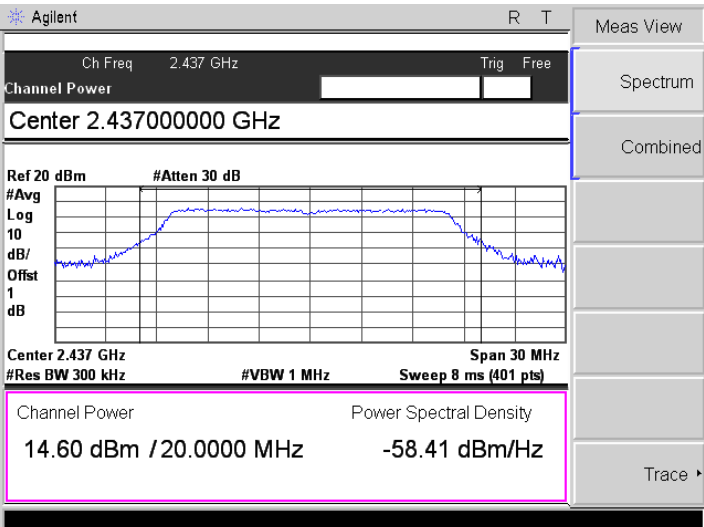
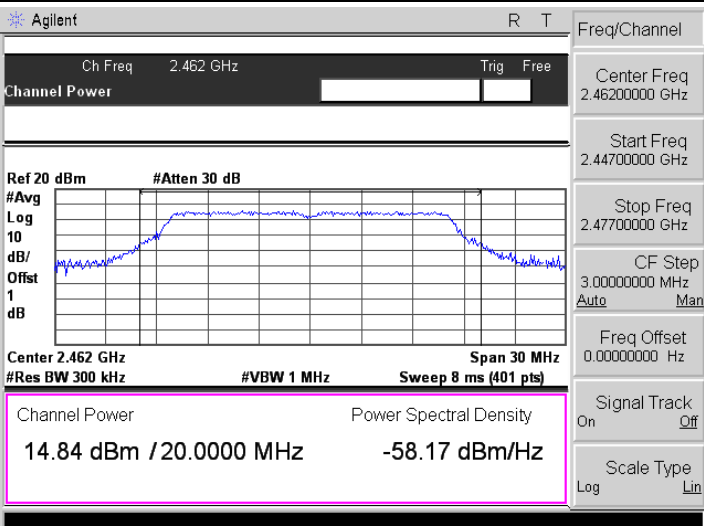
<p>802.11g-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.65 dBm / 20.0000 MHz -58.37 dBm/Hz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11g-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.60 dBm / 20.0000 MHz -58.41 dBm/Hz</p> <p>Meas View</p> <p>Spectrum</p> <p>Combined</p> <p>Trace ▶</p>
<p>802.11g-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.84 dBm / 20.0000 MHz -58.17 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

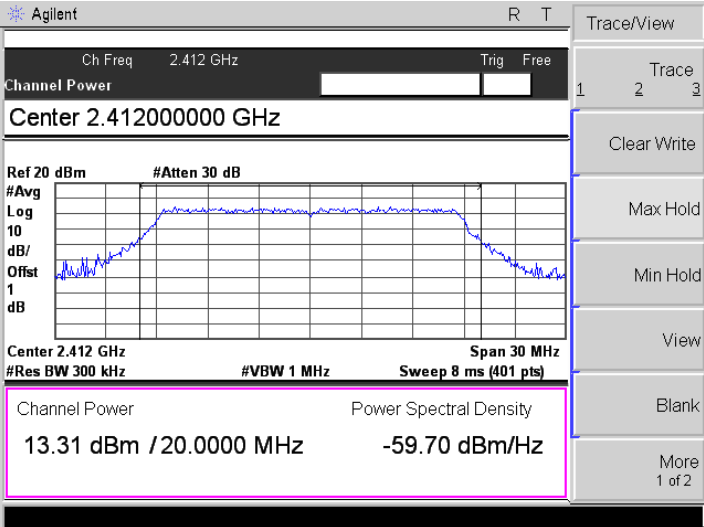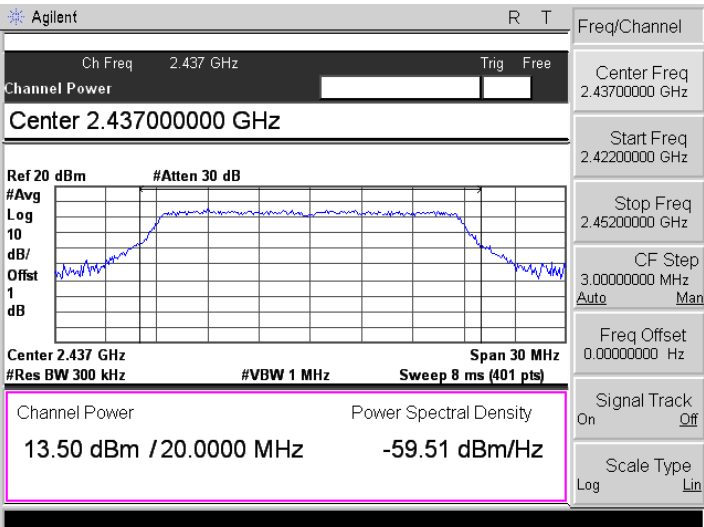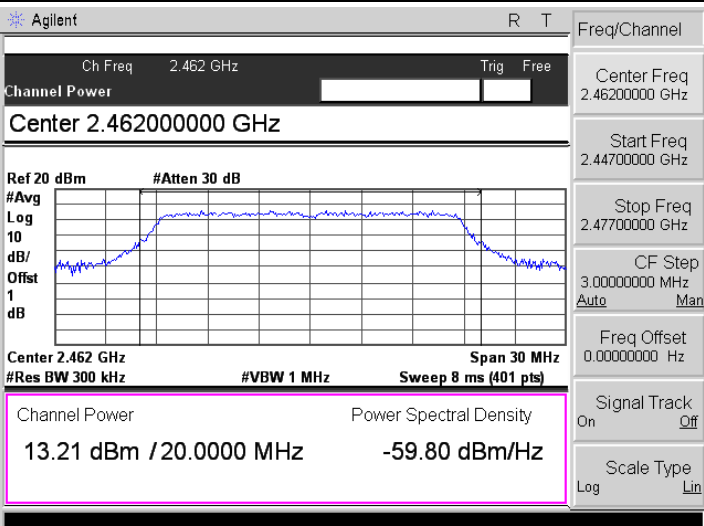
<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.31 dBm / 20.0000 MHz -59.70 dBm/Hz</p> <p>Trace/View</p> <p>1 2 3</p> <p>Trace</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.50 dBm / 20.0000 MHz -59.51 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.21 dBm / 20.0000 MHz -59.80 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT40-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.42200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.52 dBm / 20.0000 MHz -60.49 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.40 dBm / 20.0000 MHz -60.62 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.40700000 GHz</p> <p>Stop Freq 2.46700000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Channel Power</p> <p>Center 2.45200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>12.73 dBm / 20.0000 MHz -60.28 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.48200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>


APPENDIX D

Conducted Out of Band Emissions

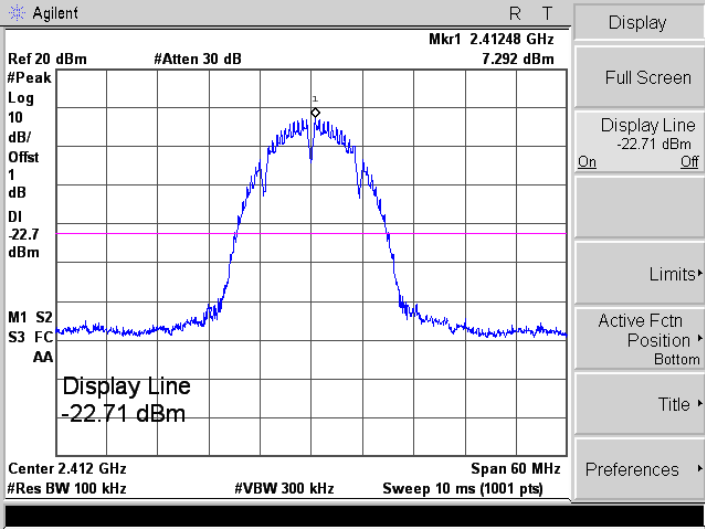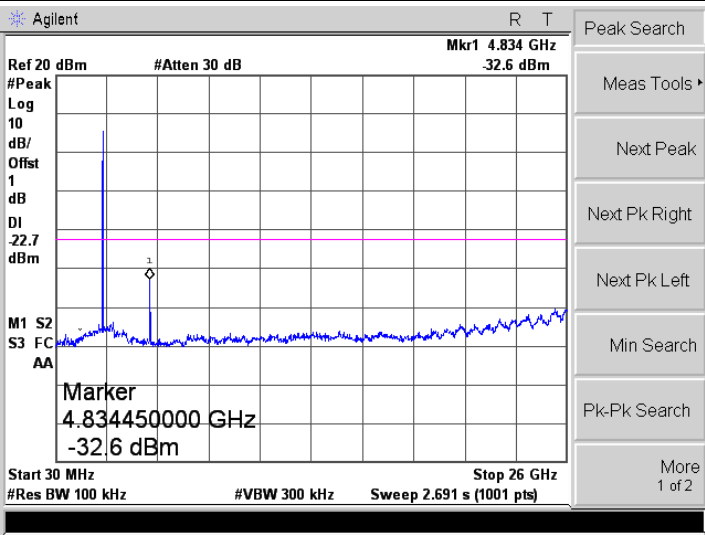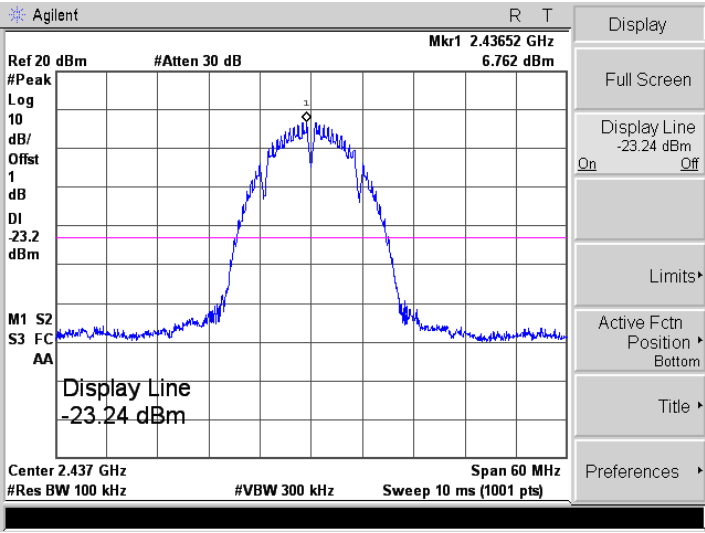
<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	

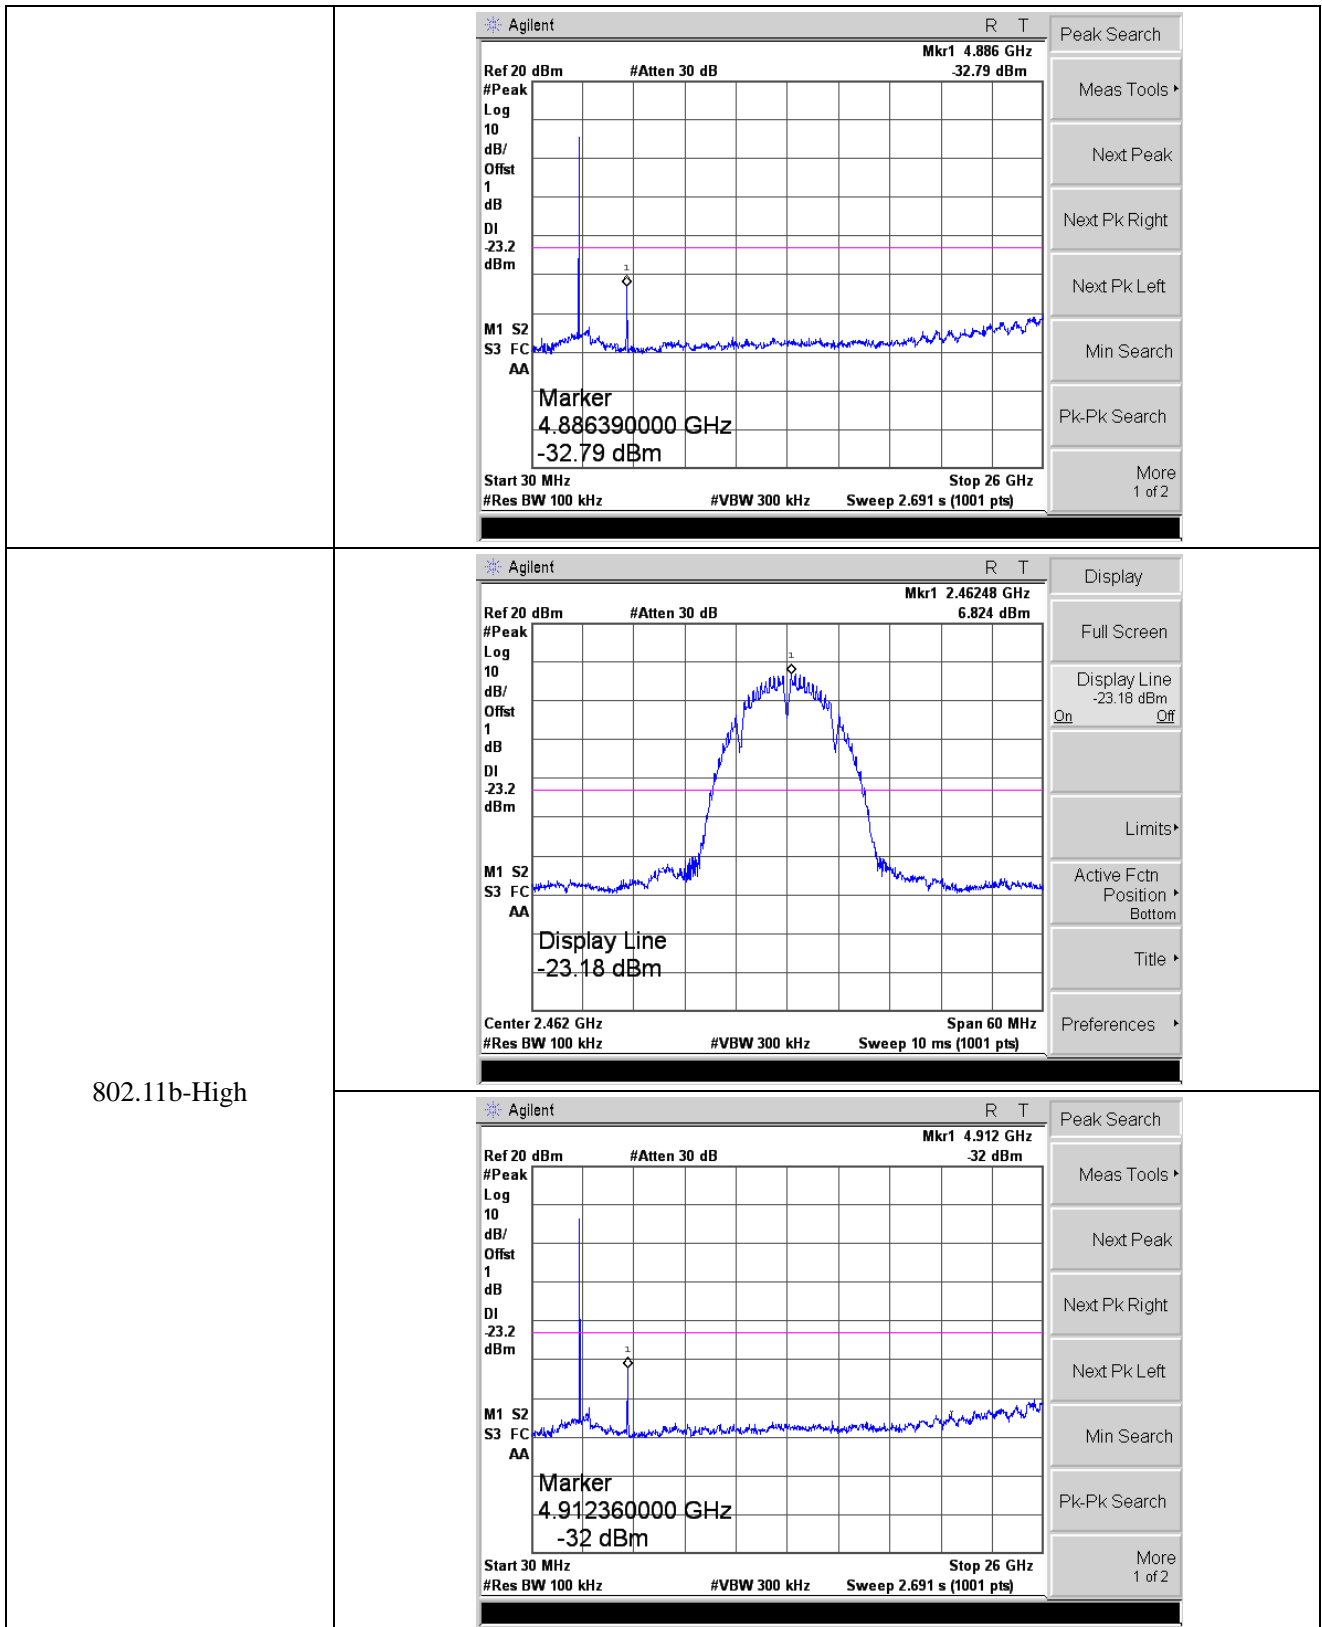

802.11g-Low

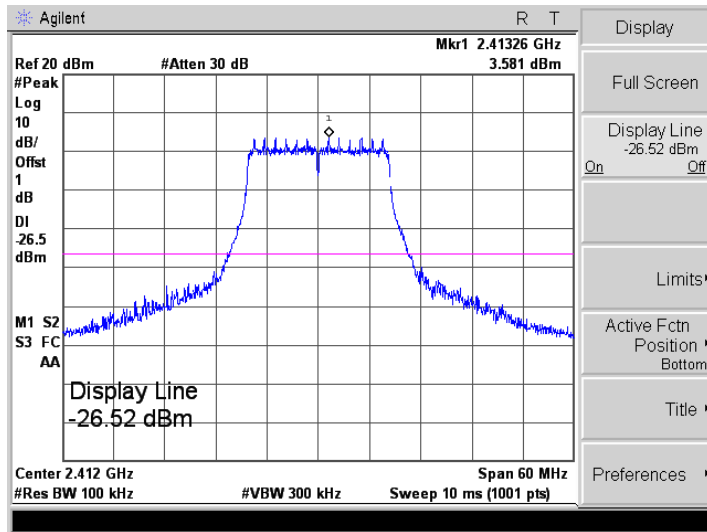


Display
Full Screen
Display Line
On -26.52 dBm Off
Limits
Active Fctn
Position Bottom
Title
Preferences

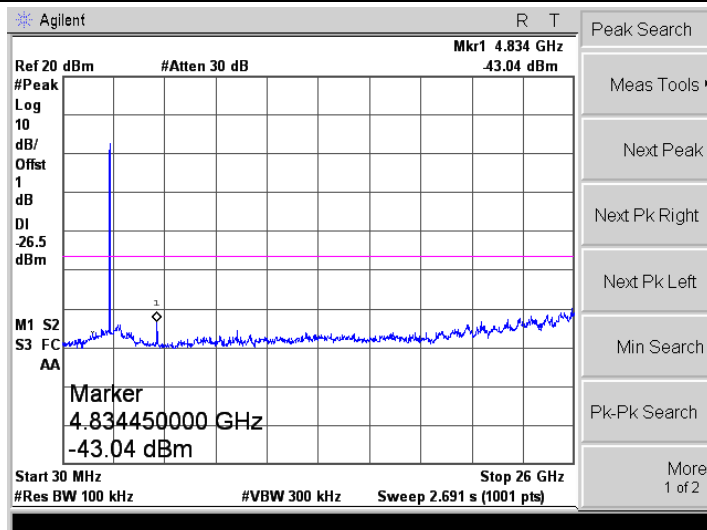


Peak Search
Meas Tools
Next Peak
Next Pk Right
Next Pk Left
Min Search
Pk-Pk Search
More 1 of 2


802.11g-Middle

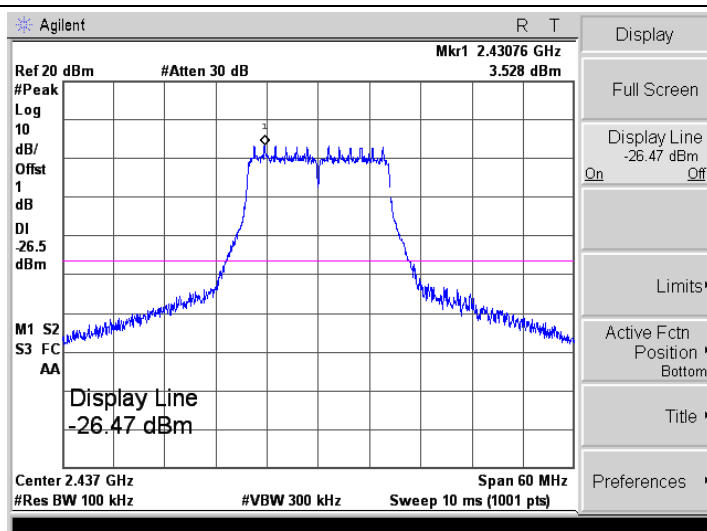



Display
Full Screen
Display Line
On -26.47 dBm Off
Limits
Active Fctn
Position Bottom
Title
Preferences

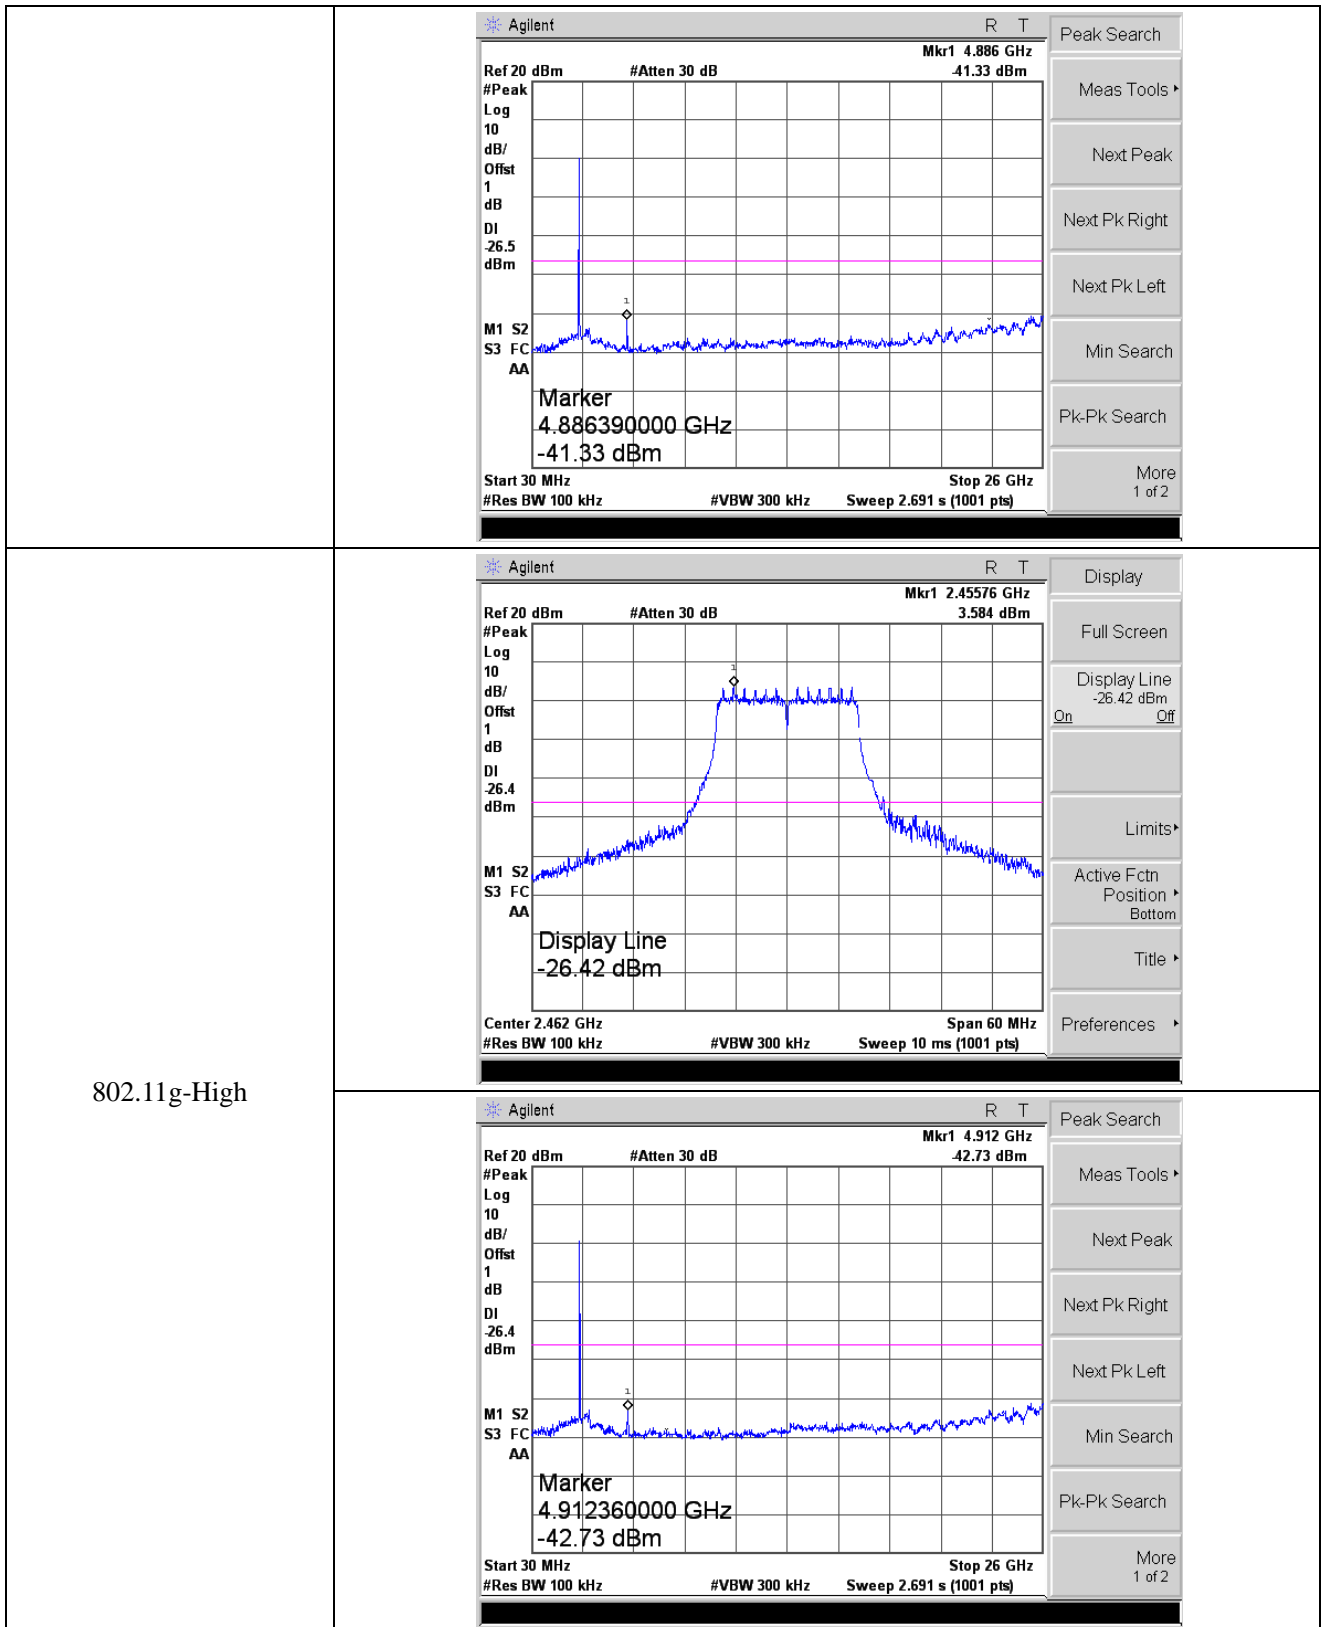


802.11n-HT20-Low

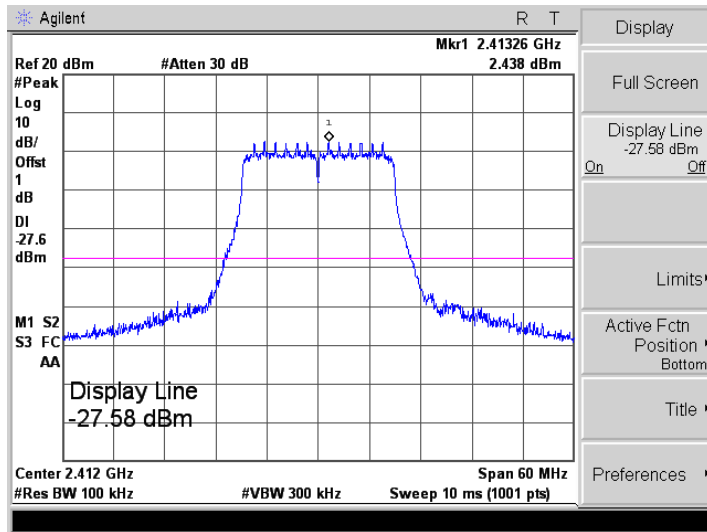


802.11n-HT20-Middle

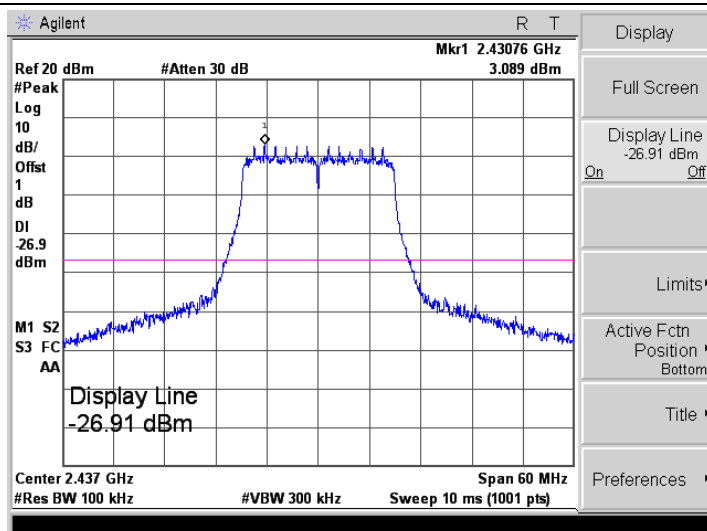
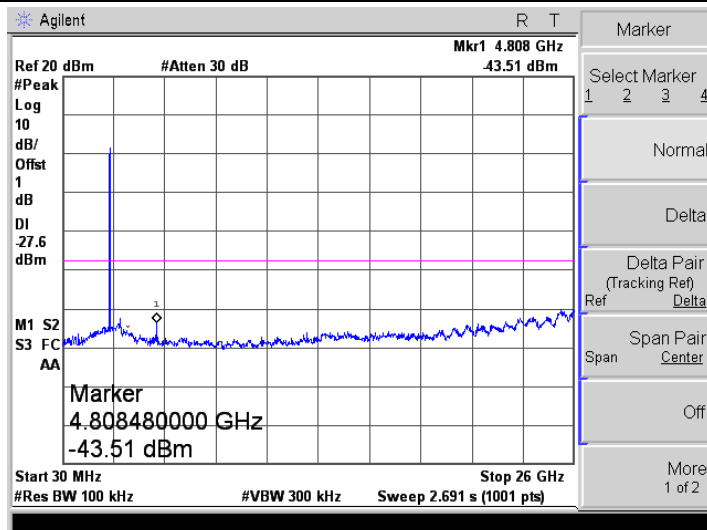


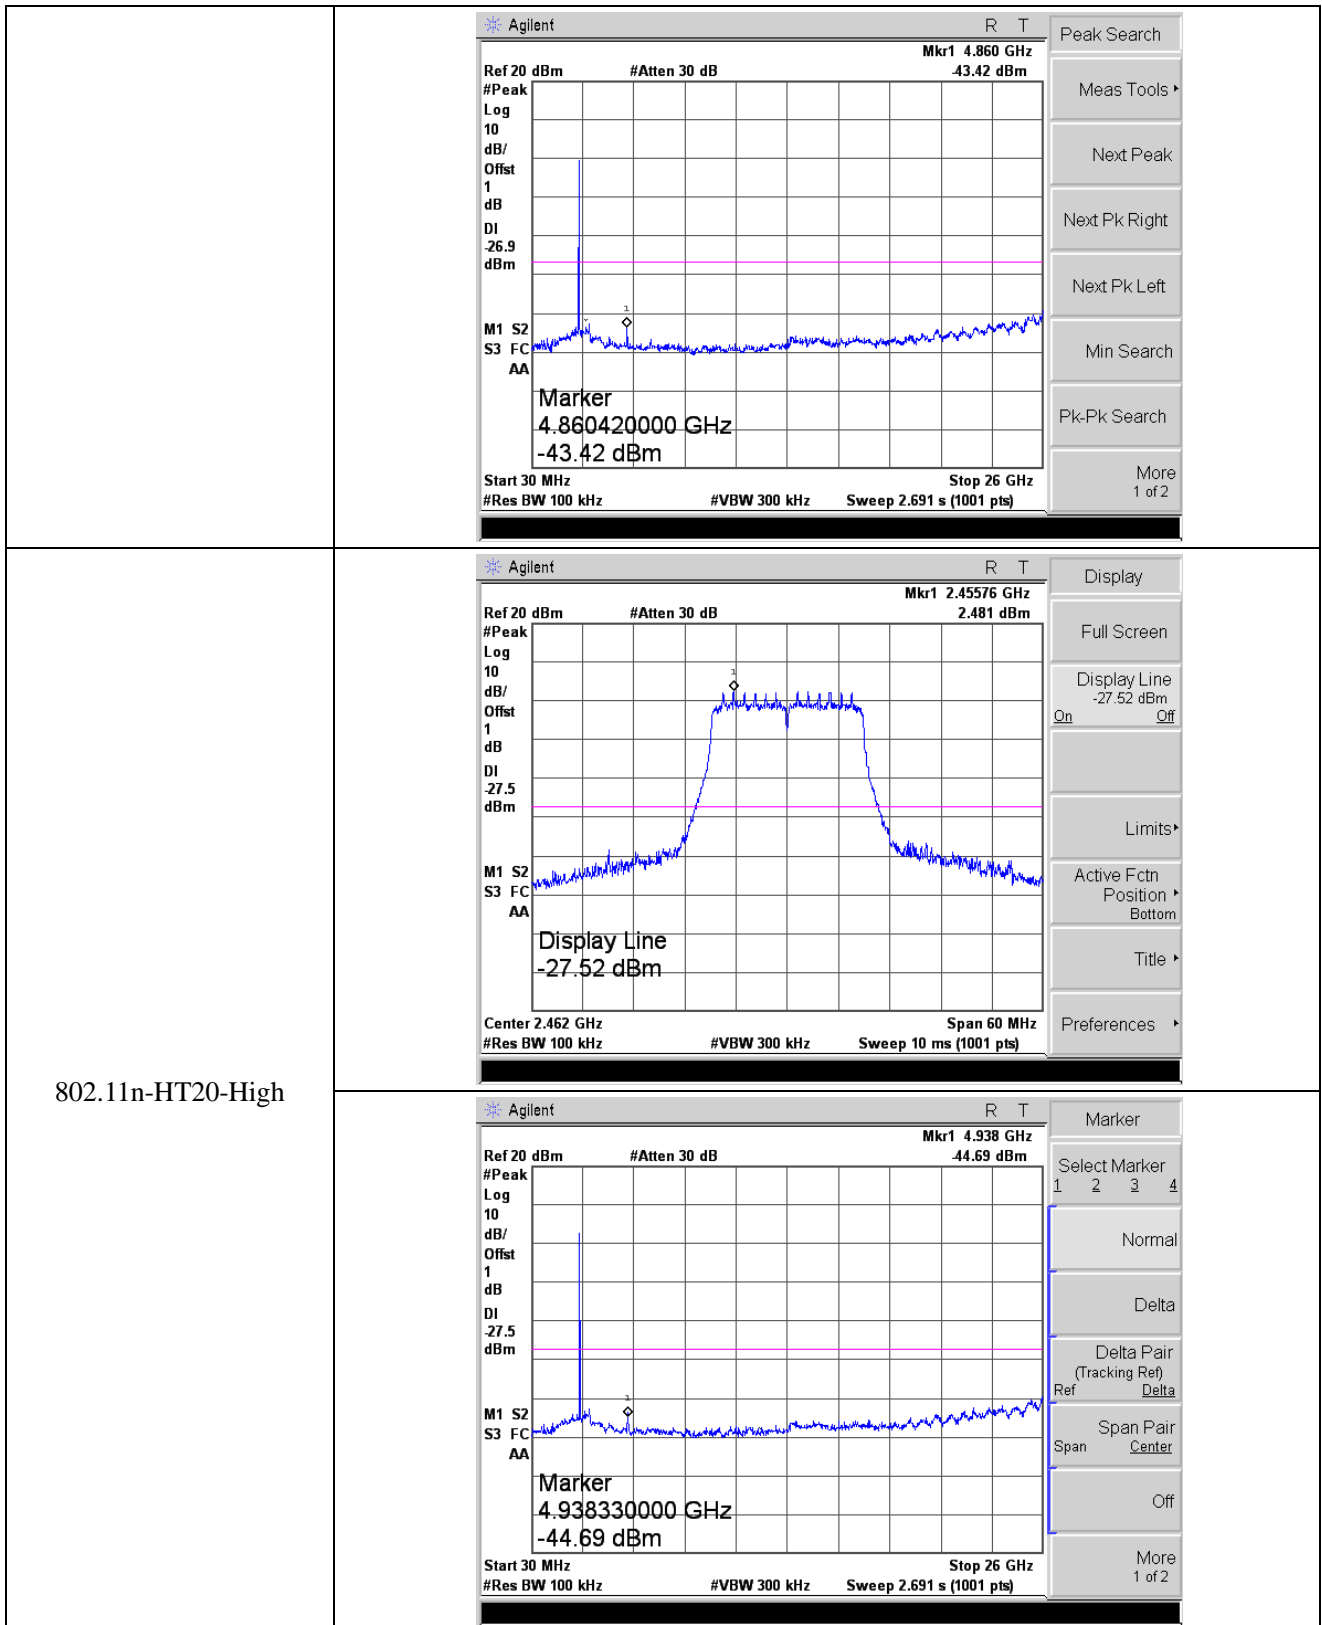


802.11n-HT40-Low

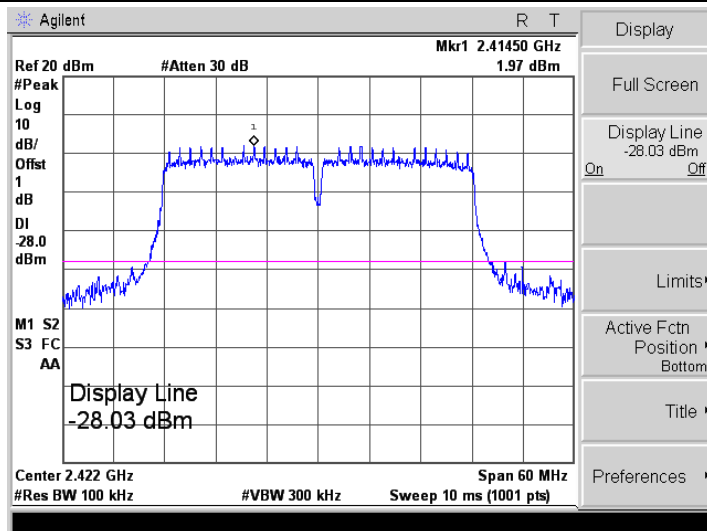

802.11n-HT40-Middle

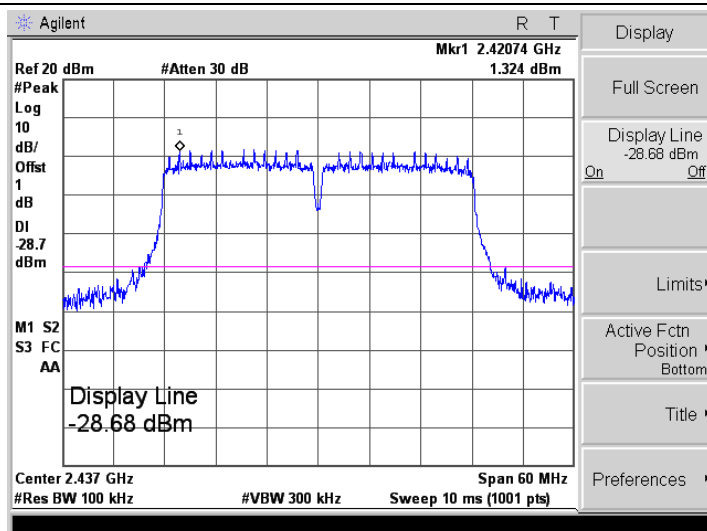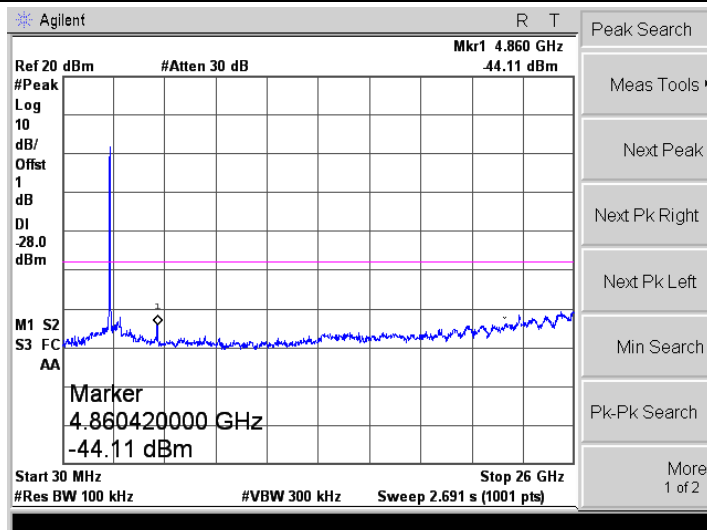

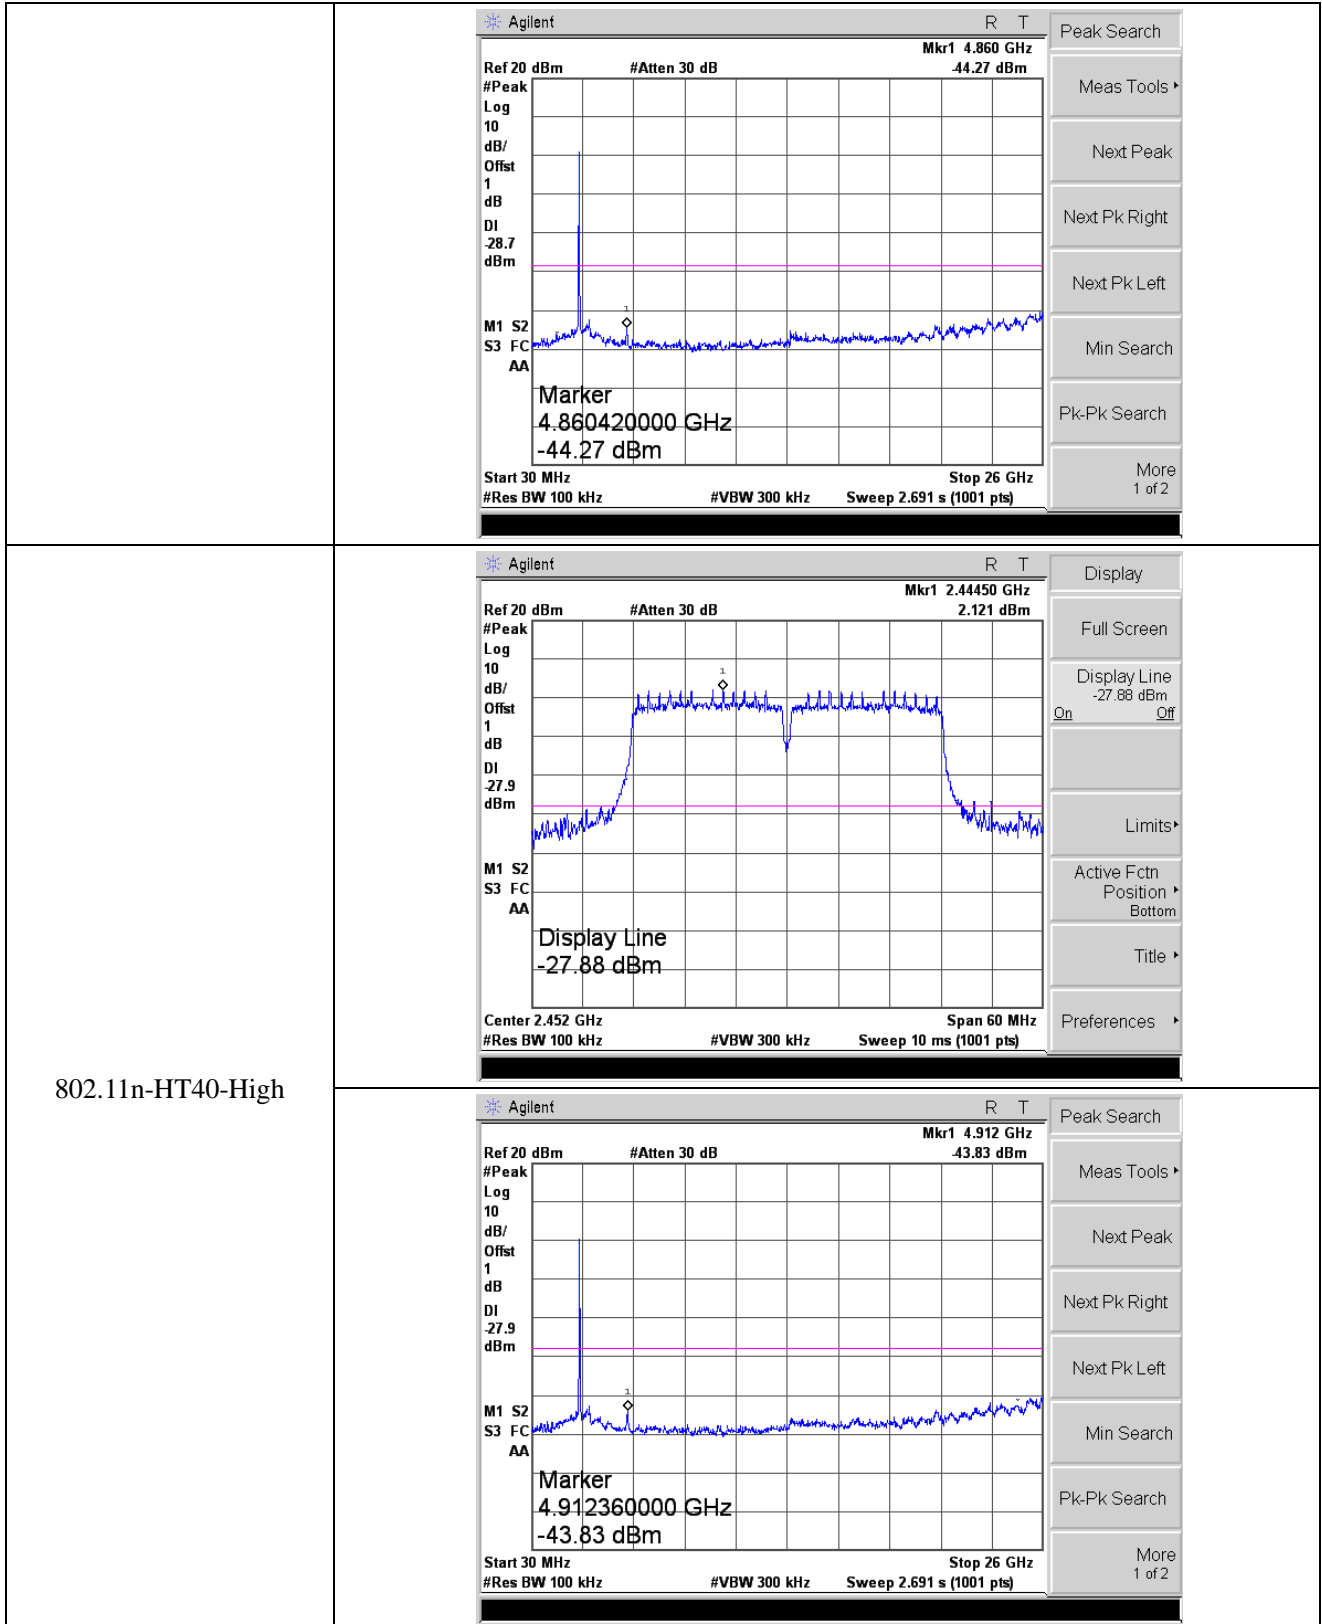

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******