

FCC AND ISED CERTIFICATION TEST REPORT

Report No.: DDT-B23040413-2E01

Applicant	:	Wyze Labs, Inc.
Address	:	5808 Lake Washington Blvd NE Ste 300, Kirkland, WA 98033, United States
Equipment under Test	:	Wyze Cam Floodlight v2
Model No.	:	WYZECFL2, WYZECFL2BL
Trade Mark	:	WYZE
FCC ID	:	2AUIUWYZECFL2
IC	:	25466-WYZECFL2
Manufacturer	:	Wyze Labs, Inc.
Address	:	5808 Lake Washington Blvd NE Ste 300, Kirkland, WA 98033, United States

Issued By: Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weishi Road, Microelectronics Industrial Park Development Area, Tianjin, China

Tel: +86-22-58038033, E-mail: ddt@dgddt.com, <http://www.ddttest.com>



REPORT

Table of Contents

Test report declares.....	4
1. Summary of Test Results	6
2. General Test Information	7
2.1. Description of EUT.....	7
2.2. Accessories of EUT	7
2.3. Assistant equipment used for test.....	7
2.4. Block diagram of EUT configuration for test	8
2.5. Deviations of test standard	8
2.6. Test environment conditions	8
2.7. Test laboratory.....	9
2.8. Measurement uncertainty	9
3. Equipment Used During Test.....	10
4. 6dB Bandwidth and 99% Bandwidth.....	11
4.1. Block diagram of test setup	11
4.2. Limits	11
4.3. Test procedure.....	11
4.4. Test result.....	12
4.5. original test data	14
5. Maximum PK Conducted Output Power	32
5.1. Block diagram of test setup	32
5.2. Limits	32
5.3. Test procedure.....	32
5.4. Test result.....	33
6. Power Spectral Density	34
6.1. Block diagram of test setup	34
6.2. Limits	34
6.3. Test procedure.....	34
6.4. Test result.....	35
6.5. original test data	36
7. Band Edge Compliance (Conducted Method).....	45
7.1. Block diagram of test setup	45
7.2. Limits	45
7.3. Test procedure.....	45
7.4. Test result.....	46
7.5. original test data	46
8. Radiated Spurious Emissions.....	59
8.1. Block diagram of test setup	59

8.2.	Limit	60
8.3.	Test procedure.....	62
8.4.	Test result.....	63
9.	RF Conducted Spurious Emissions	137
9.1.	Block diagram of test setup	137
9.2.	Limits	137
9.3.	Test procedure.....	137
9.4.	Test result.....	138
9.5.	Original test data.....	138
10.	Radiated Band Edge Compliance.....	157
10.1.	Block diagram of test setup	157
10.2.	Limit	157
10.3.	Test procedure.....	157
10.4.	Test result.....	157
11.	Power Line Conducted Emission	182
11.1.	Block diagram of test setup	182
11.2.	Power Line Conducted Emission Limits (Class B).....	182
11.3.	Test procedure.....	182
11.4.	Test result.....	183
12.	Antenna Requirements	185
12.1.	Limit	185
12.2.	Result	185
13.	Test Setup Photograph.....	186
14.	Photos of the EUT	188

Test Report Declare

Applicant	:	Wyze Labs, Inc.
Address	:	5808 Lake Washington Blvd NE Ste 300, Kirkland, WA 98033, United States
Equipment under Test	:	Wyze Cam Floodlight v2
Model No.	:	WYZECFL2, WYZECFL2BL
Trade Mark	:	WYZE
Manufacturer	:	Wyze Labs, Inc.
Address	:	5808 Lake Washington Blvd NE Ste 300, Kirkland, WA 98033, United States


Test Standard Used: FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023.

Test procedure used: ANSI C63.10:2020, RSS-Gen Issue 5, Apr. 2018, KDB 558074 D01 15.247 Meas Guidance v05r02

We Declare:

The equipment described above is tested by Tianjin Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Tianjin Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&ISED standards.

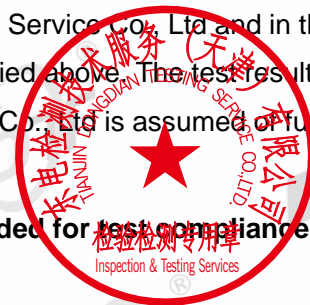

Report No:	DDT-B23040413-2E01		
Date of Receipt:	Jul. 18, 2023	Date of Test:	Jul. 18, 2023 ~ Sep. 04, 2023

Prepared By:

Sunny Zhang

Sunny Zhang/Engineer

Approved By:

Aaron Zhang

Aaron Zhang/Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Tianjin Dongdian Testing Service Co., Ltd.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Sep. 04, 2023	

1. Summary of Test Results

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Verdict
6dB Bandwidth and 99% Bandwidth	FCC 15.247 (a) (2) RSS-247 Clause 5.2 (a)	Pass
Maximum Conducted Output Power	FCC 15.247 (b) (3) RSS-247 Clause 5.4 (e)	Pass
Power Spectral Density	FCC 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
Band-edge and Spurious Emissions (Conducted)	FCC 15.247 (d) RSS-247 Clause 5.5	Pass
Radiated Spurious Emissions	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Radiated Band Edge Compliance	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Power Line Conducted Emission	FCC 15.207 RSS-GEN Clause 8.8	Pass
Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	Pass

2. General Test Information

2.1. Description of EUT

EUT* Name	: Wyze Cam Floodlight v2
Test Model Number	: WYZECFL2
EUT Function Description	: Please reference user manual of this device
Power supply	: AC 120V/60Hz
Radio Technology	: IEEE 802.11b/g/n
Operation Frequency	: IEEE 802.11b: 2412MHz-2462MHz IEEE 802.11g: 2412MHz-2462MHz IEEE 802.11n HT20: 2412MHz-2462MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK)
Transmitter Rate	: IEEE 802.11b: 1, 2, 5.5, 11 Mbps IEEE 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n HT20: MCS0~MCS7
Antenna Type	: FPC antenna with IPEX connector, maximum PK gain: 3.48dBi
Serial Number	: N/A

Note1: EUT is the ab. of equipment under test.

Note2: These series models only the color/shell material is different, others all keep same is declared by the manufacturer.

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number	Description	Remark
N/A	N/A	N/A	N/A	N/A

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Notebook	Lenovo Beijing Co. Ltd.	ThinkPad	FCC/CE	TP00067A

2.4. Block diagram of EUT configuration for test

AC Mains

EUT

Run the special test software "PUTTY.exe" provided by manufacturer to control EUT work in Continuous Tx mode, and select test channel, wireless mode and data rate.

Tested mode, channel, setting Tx power and rand data rate information				
Mode	Setting Tx Power	Data rate (Mbps) (See Note)	Channel	Frequency (MHz)
IEEE 802.11b	Default	1/11	LCH: CH1	2412
	Default	1/11	MCH: CH6	2437
	Default	1/11	HCH: CH11	2462
IEEE 802.11g	Default	6/54	LCH: CH1	2412
	Default	6/54	MCH: CH6	2437
	Default	6/54	HCH: CH11	2462
IEEE 802.11n HT20	Default	MCS 0/ MCS 7	LCH: CH1	2412
	Default	MCS 0/ MCS 7	MCH: CH6	2437
	Default	MCS 0/ MCS 7	HCH: CH11	2462

Note1: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

2.5. Deviations of test standard

No Deviation

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-28°C
Humidity range:	20-75%
Pressure range:	86-106kPa

2.7. Test laboratory

Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park Development Area, Tianjin, China.

Tel: +86-22-58038033, <http://www.ddttest.com>, Email: ddt@dgddt.com

NVLAP (National Voluntary Laboratory Accreditation Program) CODE: 500036-0

CNAS (China National Accreditation Service for Conformity Assessment) CODE: L13402

FCC Designation Number: CN5004; FCC Test Firm Registration Number: 368676

ISED (Innovation, Science and Economic Development Canada) Company Number: 27768

Conformity Assessment Body Identifier: CN0125

VCCI Facility Registration Number: C-20089, T-20093, R-20125, G-20122

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	0.14%
Peak Output Power (Conducted) (Spectrum Analyzer)	0.12 dB (10 MHz ≤ f < 3.6 GHz);
	0.32 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.51 dB
Power Spectral Density	0.12 dB (10 MHz ≤ f < 3.6 GHz);
	0.32 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 x 10 ⁻⁸ (Antenna couple method)
	3.4 x 10 ⁻⁸ (Conducted method)
Conducted Spurious Emissions	0.12 dB (10 MHz ≤ f < 3.6 GHz);
	0.32 dB (3.6 GHz ≤ f < 8 GHz)
	0.52 dB (8 GHz ≤ f < 22 GHz)
Uncertainty for Radio Frequency (RBW < 20 kHz)	3x10 ⁻⁷
Temperature	±2°C
Humidity	±1%
Uncertainty for Radiation Emission Test (30 MHz - 1 GHz)	2.72 dB (Antenna Polarize: V)
	2.72 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission Test (1 GHz - 40 GHz)	2.74 dB (1 - 6 GHz)
	2.72 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power Line Conduction Emission Test	3.40 dB (150 kHz - 30 MHz)


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
RF Connected Test (MWRFtest system)					
Microwave Signal Generator	R&S	SMF100A	101396	2023/05/29	1 Year
MXG Vector Signal Generator	Keysight	N5182A	MY50143288	2023/03/07	1 Year
EMI Test Receiver	R&S	ESU26	100243	2023/03/03	1 Year
Signal Analyzer	R&S	FSV	101730	2023/04/04	1 Year
Wideband Radio Communication Tester	R&S	CMW500	158800	2023/06/10	1 Year
Power Sensor	KEYSIGHT	U2021XA	MY59150007	2023/03/22	1 Year
DC Power Supply	inSTEK	PSP-2010	EN122317	2023/02/12	1 Year
Test Software	MWRFtest	MTS8310	V03	N/A	N/A
Radiated Emission -10m EMI Chamber					
Broadband Horn Antenna	TESEQ	BHA 9118	31754	2022/10/12	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	2023/05/06	1 Year
Active Loop Antenna	R&S	HFH2-Z2	100269	2022/07/11	2 Year
Low noise amplifier	MITEQ	TPA0118-36	0914	2023/02/16	1 Year
EMI Test Receiver	R&S	ESCI	101024	2023/02/15	1 Year
EMI Test Receiver	R&S	ESCI	101030	2023/02/15	1 Year
EMI Test Receiver	R&S	ESU26	100244	2023/03/03	1 Year
Bilog Antenna	TESEQ	CBL6112D	29068	2022/10/10	2 Year
Bilog Antenna	TESEQ	CBL6112D	29069	2022/10/10	2 Year
Amplifier	Sonoma	310N	300913	2023/02/15	1 Year
Amplifier	Sonoma	310N	300914	2023/02/15	1 Year
Ant Mast	Innco	MA4000	N/A	N/A	N/A
Ant Mast	Innco	MA4000	N/A	N/A	N/A
Mast Controller	Innco	CO2000	N/A	N/A	N/A
Mast Controller	Innco	CO2000	N/A	N/A	N/A
RF Selector 4CH	TOYO	NS4904N	Selector1	N/A	N/A
RF Selector 4CH	TOYO	NS4904N	Selector2	N/A	N/A
Test software	TOYO	EP5/RSE	Ver 1.9.1	N/A	N/A
Test software	TOYO	EP5/RE	Ver 5.7.10	N/A	N/A
Test software	Audix	E3	V 6.11111b	N/A	N/A
Power Line Conducted Emissions Test					
Test Receiver	R&S	ESCI	101397	2023/02/15	1 Year
LISN	R&S	ENV216	101122	2023/02/15	1 Year
Test software	TOYO	EP5/CE	V 5.4.40	N/A	N/A

4. 6dB Bandwidth and 99% Bandwidth

4.1. Block diagram of test setup

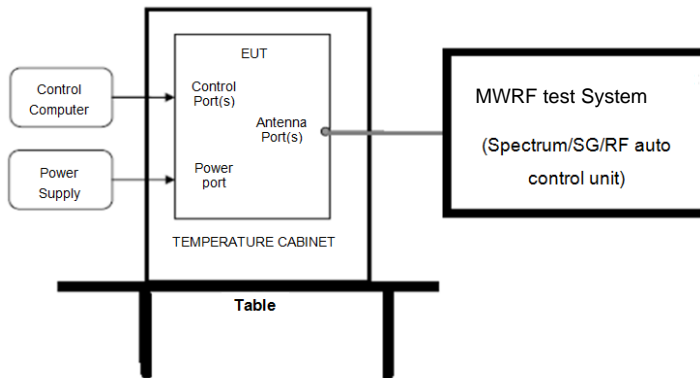

4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

4.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) 99% Bandwidth set the spectrum analyzer as follows:

RBW: 1% to 5% of the OBW

VBW: Three times the RBW

Detector Mode: Peak

Sweep time: auto

Trace mode Max hold

(3) 6dB Bandwidth set the spectrum analyzer as follows:

RBW: 100 kHz

VBW: 300 kHz

Detector Mode: Peak

Sweep time: auto

Trace mode Max hold

(4) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.4. Test result


Test Mode	Test Channel	Antenna	6dB Bandwidth (MHz)	Limit (MHz)	Verdict
b 11M	2412	Ant1	9.744	$\cong 0.5$	Pass
b 11M	2437	Ant1	9.735	$\cong 0.5$	Pass
b 11M	2462	Ant1	9.744	$\cong 0.5$	Pass
b 1M	2412	Ant1	9.738	$\cong 0.5$	Pass
b 1M	2437	Ant1	9.741	$\cong 0.5$	Pass
b 1M	2462	Ant1	9.738	$\cong 0.5$	Pass
g 54M	2412	Ant1	16.497	$\cong 0.5$	Pass
g 54M	2437	Ant1	16.476	$\cong 0.5$	Pass
g 54M	2462	Ant1	16.476	$\cong 0.5$	Pass
g 6M	2412	Ant1	16.344	$\cong 0.5$	Pass
g 6M	2437	Ant1	16.350	$\cong 0.5$	Pass
g 6M	2462	Ant1	16.335	$\cong 0.5$	Pass
n20 MCS0	2412	Ant1	17.499	$\cong 0.5$	Pass
n20 MCS0	2437	Ant1	17.064	$\cong 0.5$	Pass
n20 MCS0	2462	Ant1	17.286	$\cong 0.5$	Pass
n20 MCS7	2412	Ant1	17.646	$\cong 0.5$	Pass
n20 MCS7	2437	Ant1	17.643	$\cong 0.5$	Pass
n20 MCS7	2462	Ant1	17.616	$\cong 0.5$	Pass


Test Mode	Test Channel	Antenna	99% OBW (MHz)	Limit (MHz)	Verdict
b 11M	2412	Ant1	13.058	---	Pass
b 11M	2437	Ant1	13.106	---	Pass
b 11M	2462	Ant1	13.118	---	Pass
b 1M	2412	Ant1	13.055	---	Pass
b 1M	2437	Ant1	13.091	---	Pass
b 1M	2462	Ant1	13.118	---	Pass
g 54M	2412	Ant1	16.528	---	Pass
g 54M	2437	Ant1	16.519	---	Pass
g 54M	2462	Ant1	16.519	---	Pass
g 6M	2412	Ant1	16.603	---	Pass
g 6M	2437	Ant1	16.609	---	Pass
g 6M	2462	Ant1	16.606	---	Pass
n20 MCS0	2412	Ant1	17.560	---	Pass
n20 MCS0	2437	Ant1	17.560	---	Pass
n20 MCS0	2462	Ant1	17.560	---	Pass

n20 MCS7	2412	Ant1	17.578	---	Pass
n20 MCS7	2437	Ant1	17.563	---	Pass
n20 MCS7	2462	Ant1	17.578	---	Pass


4.5. original test data

6dB Bandwidth:

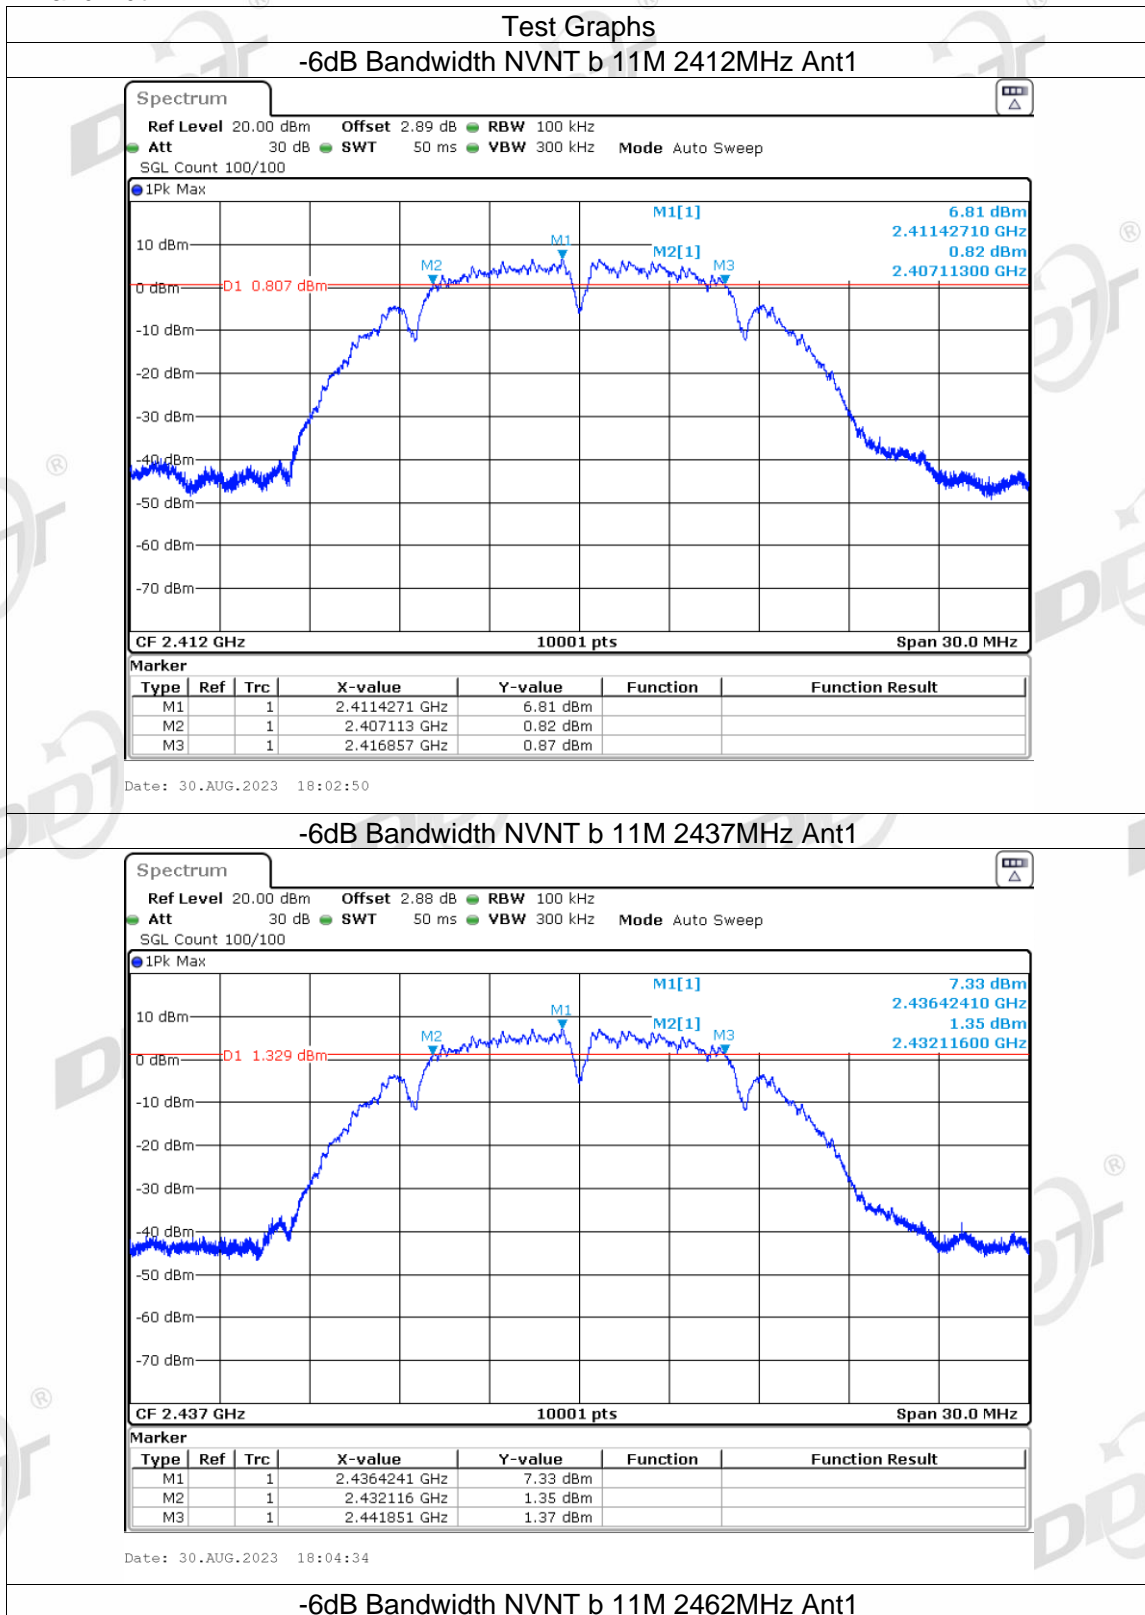


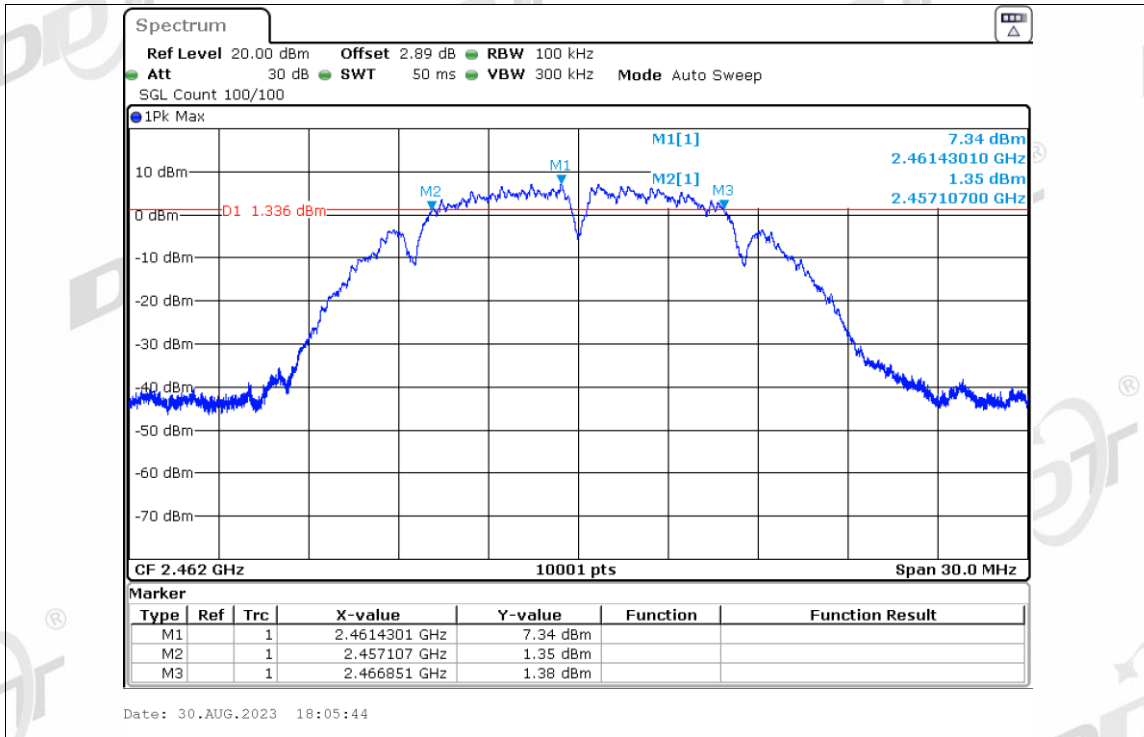


-6dB Bandwidth NVNT b 1M 2412MHz Ant1

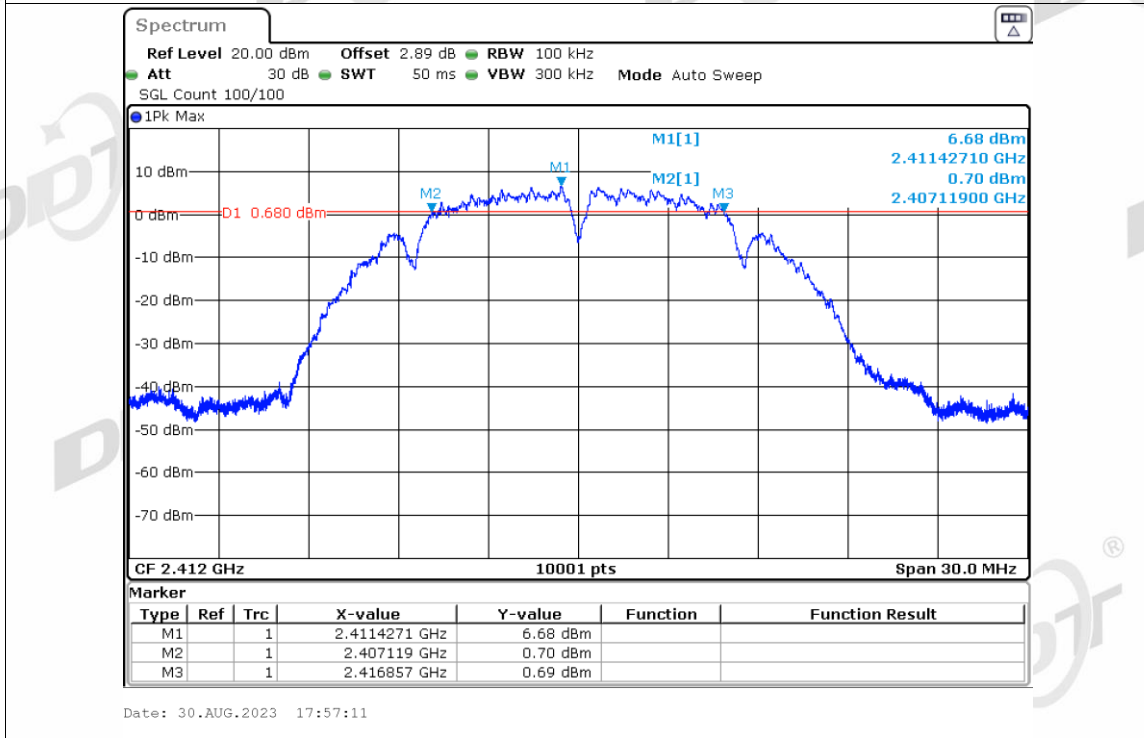


-6dB Bandwidth NVNT b 1M 2437MHz Ant1

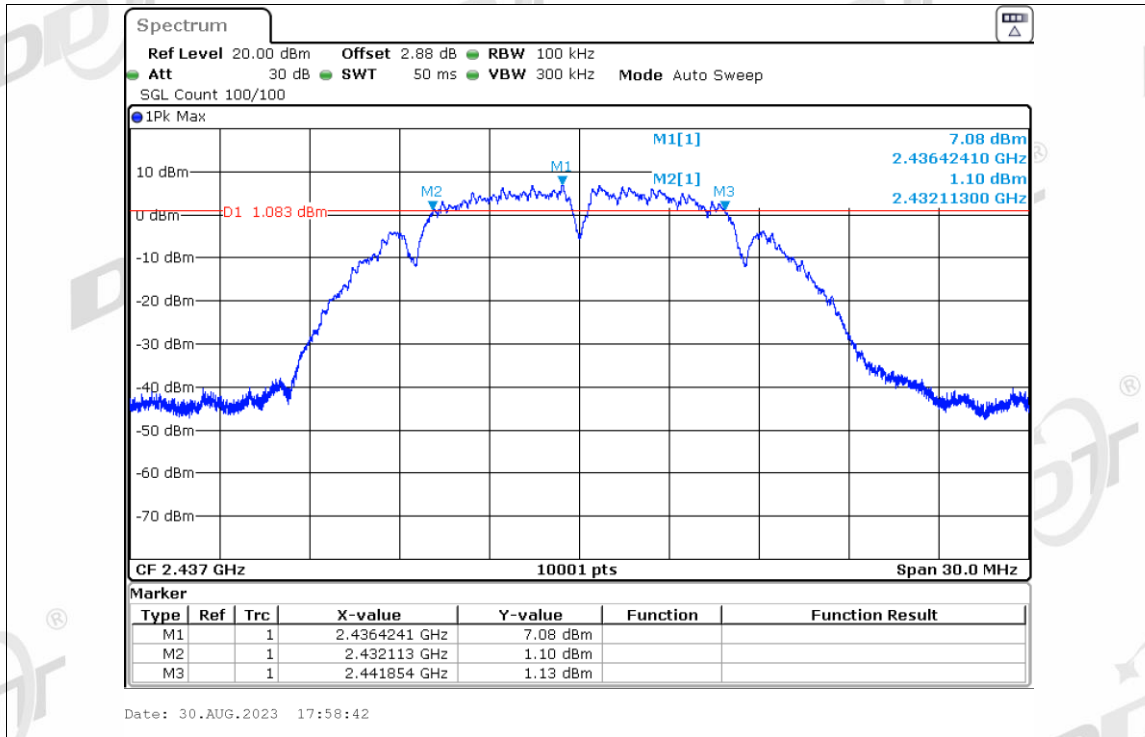


-6dB Bandwidth NVNT b 1M 2462MHz Ant1

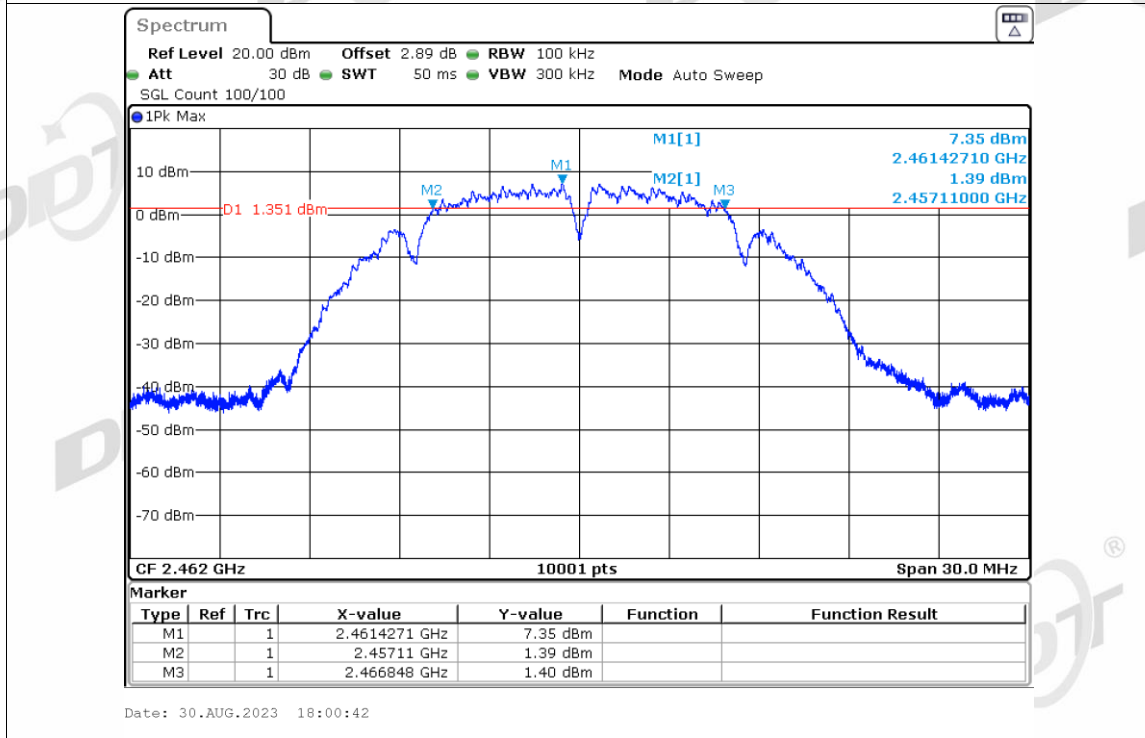


-6dB Bandwidth NVNT g 54M 2412MHz Ant1

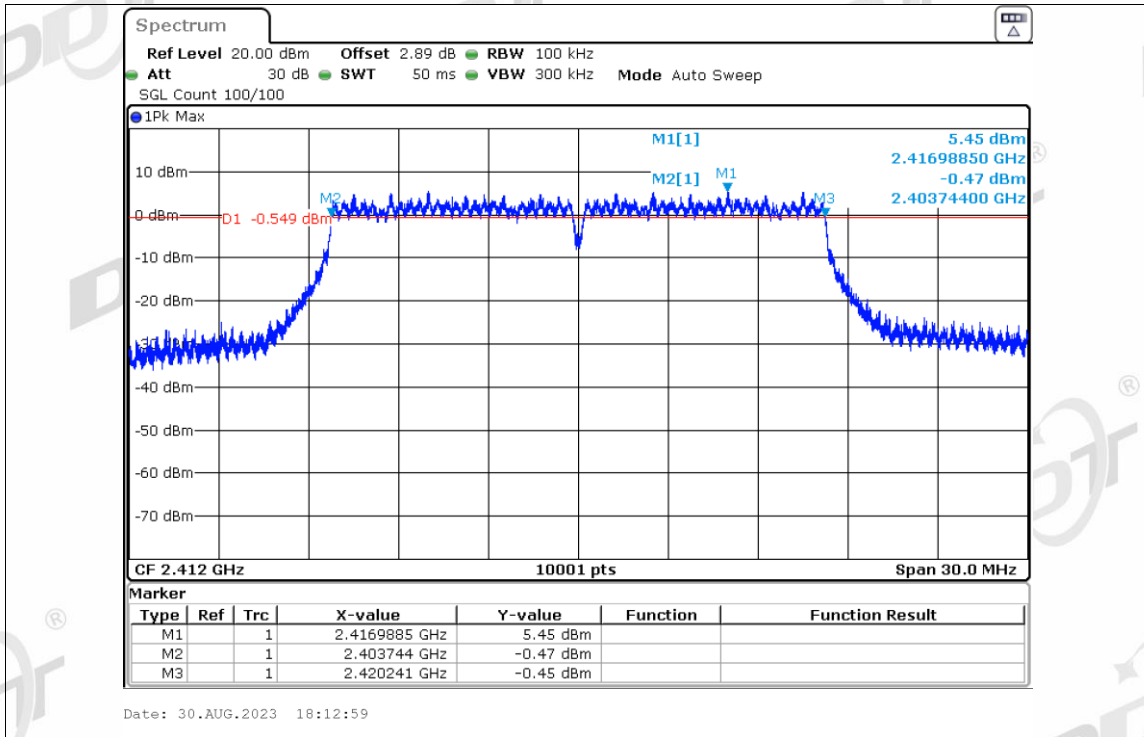


-6dB Bandwidth NVNT g 54M 2437MHz Ant1

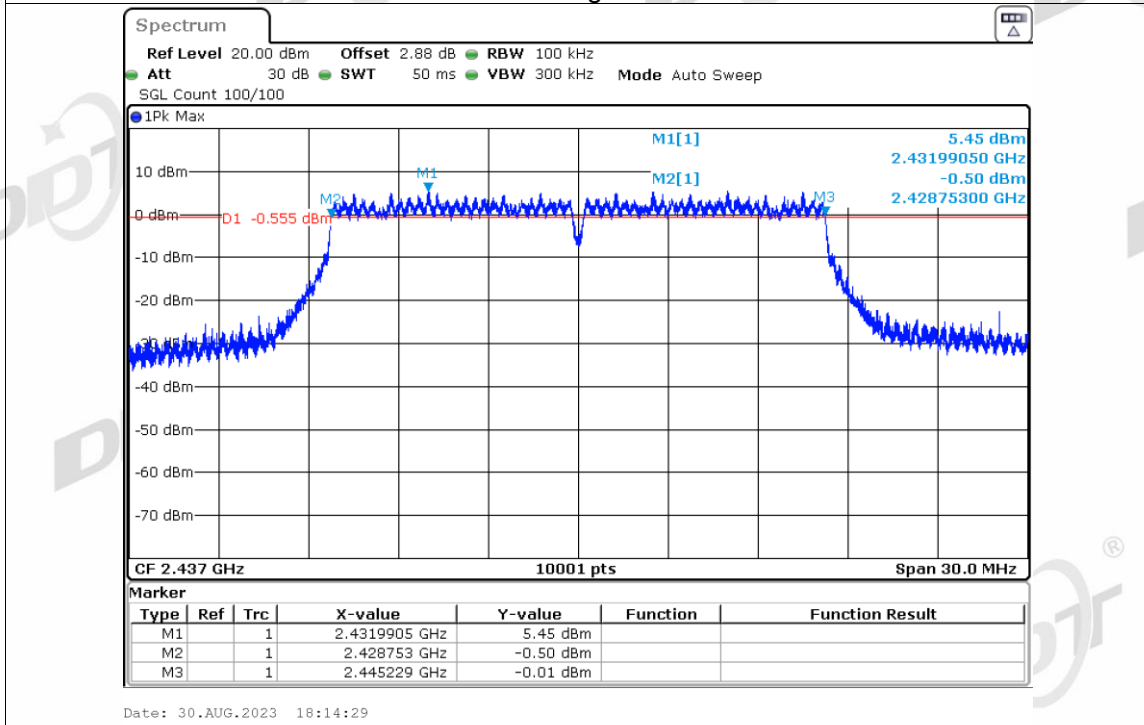


-6dB Bandwidth NVNT g 54M 2462MHz Ant1

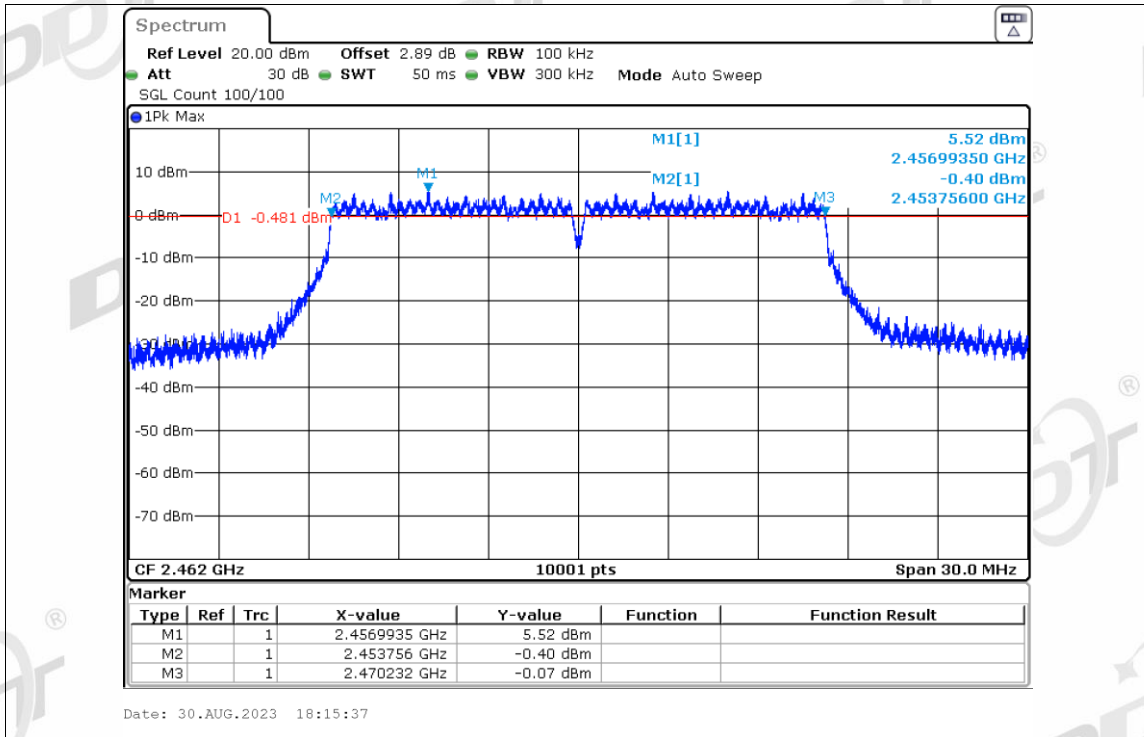


-6dB Bandwidth NVNT g 6M 2412MHz Ant1

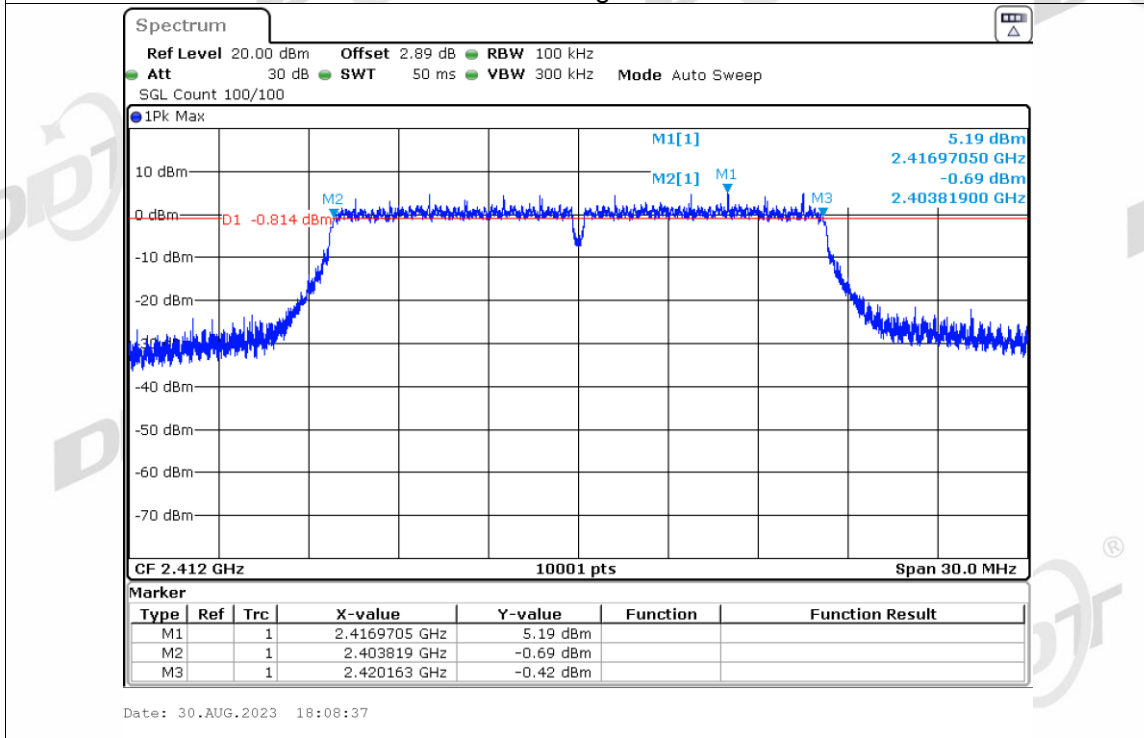


-6dB Bandwidth NVNT g 6M 2437MHz Ant1

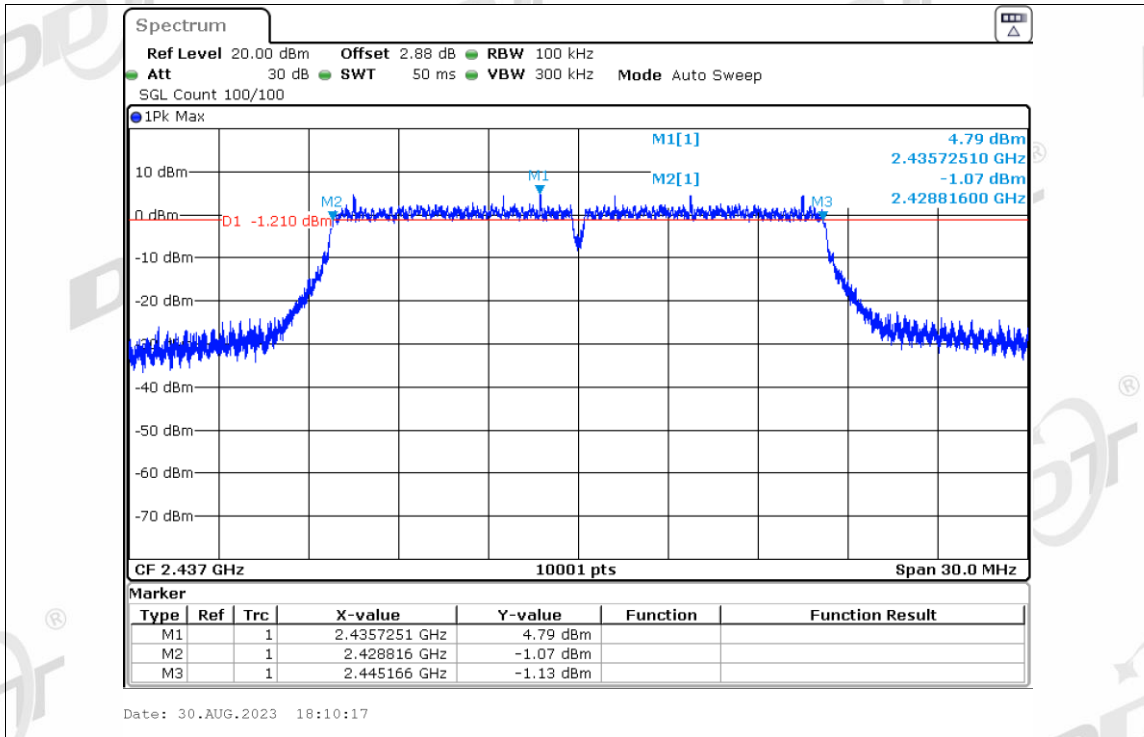


-6dB Bandwidth NVNT g 6M 2462MHz Ant1

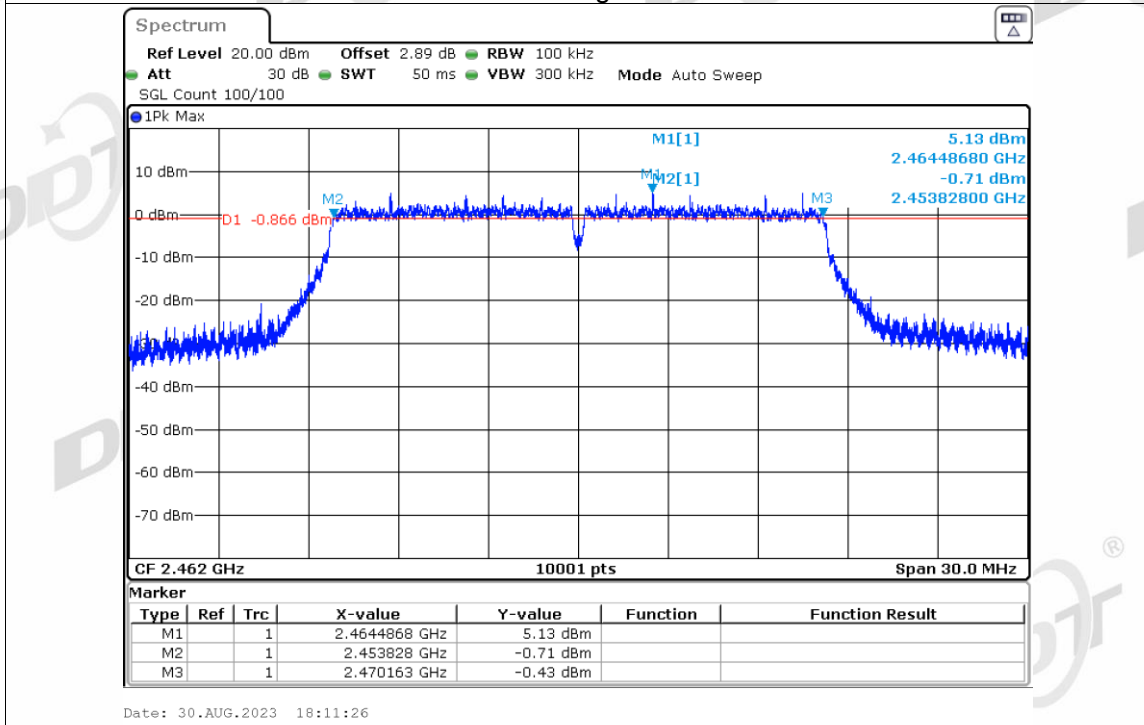


-6dB Bandwidth NVNT n20 MCS0 2412MHz Ant1

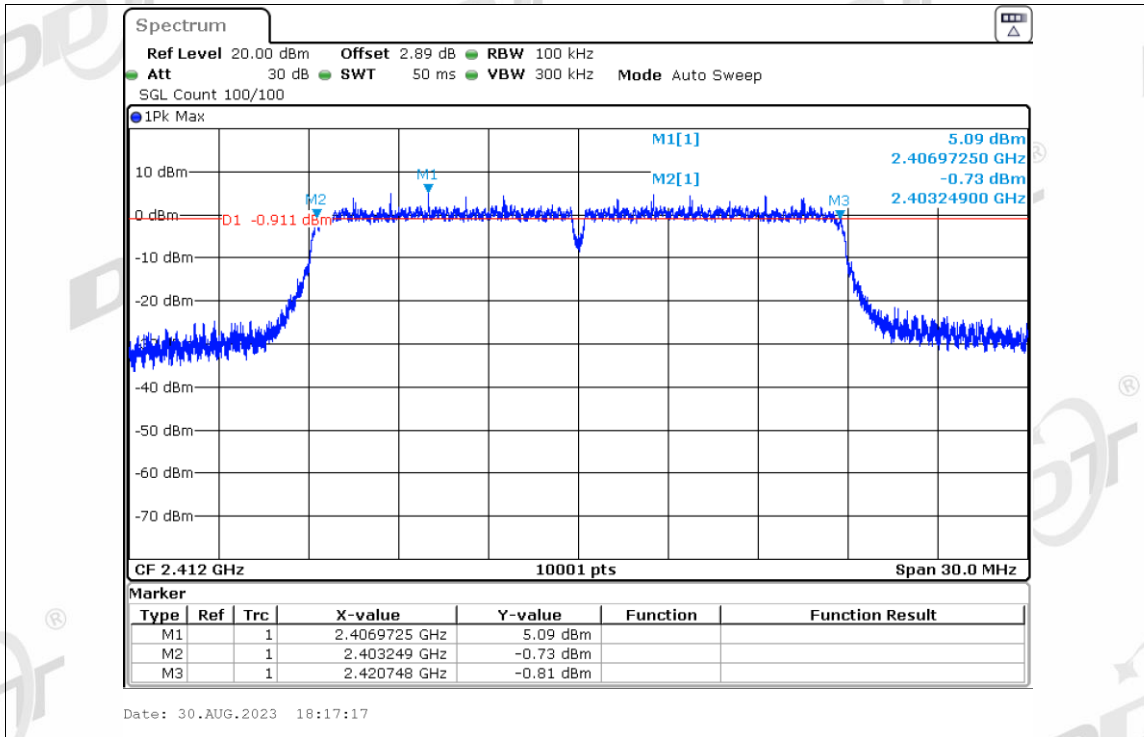


-6dB Bandwidth NVNT n20 MCS0 2437MHz Ant1

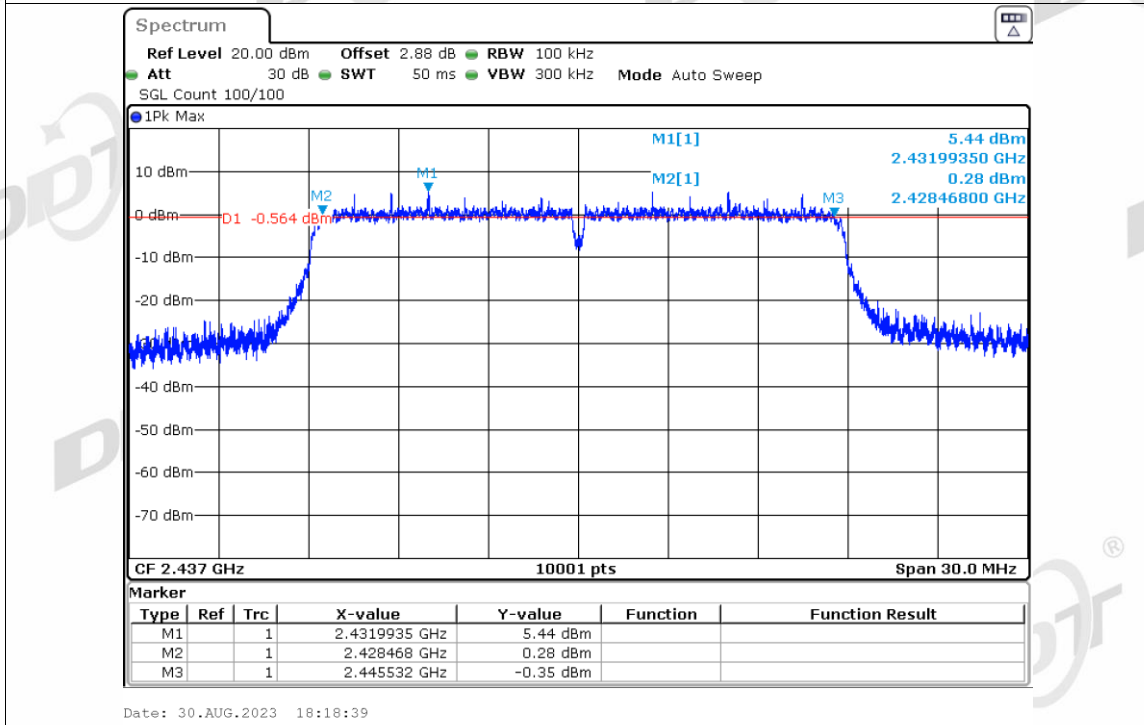


-6dB Bandwidth NVNT n20 MCS0 2462MHz Ant1

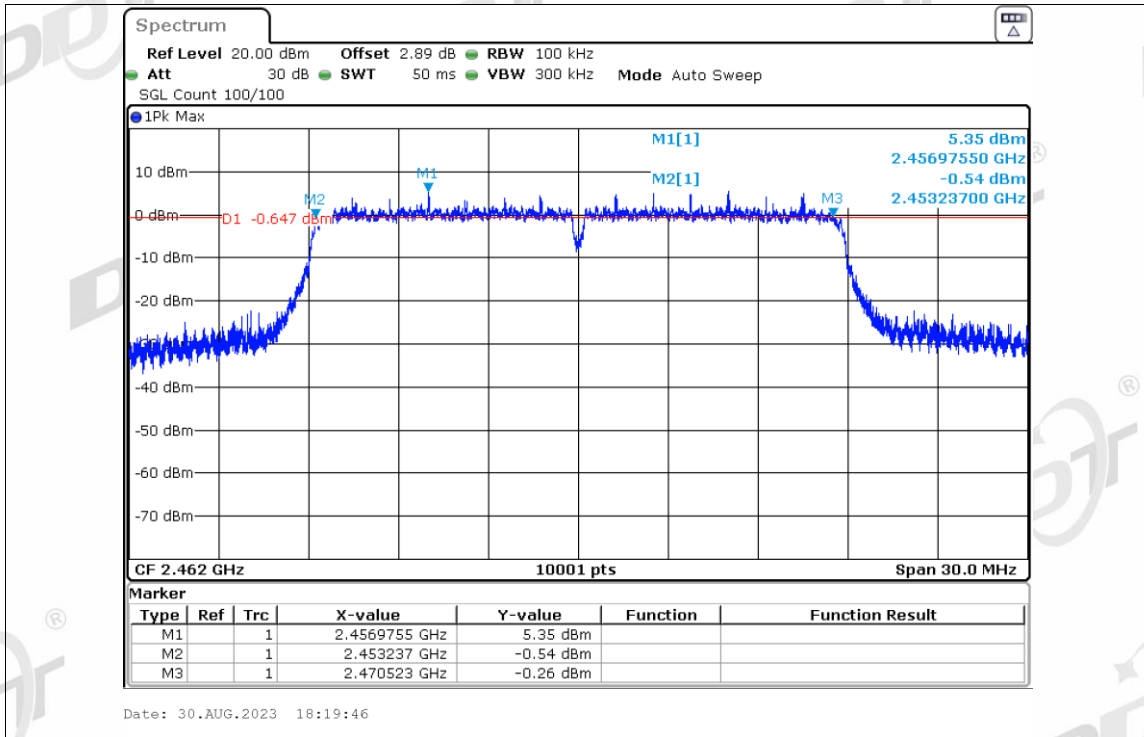


-6dB Bandwidth NVNT n20 MCS7 2412MHz Ant1

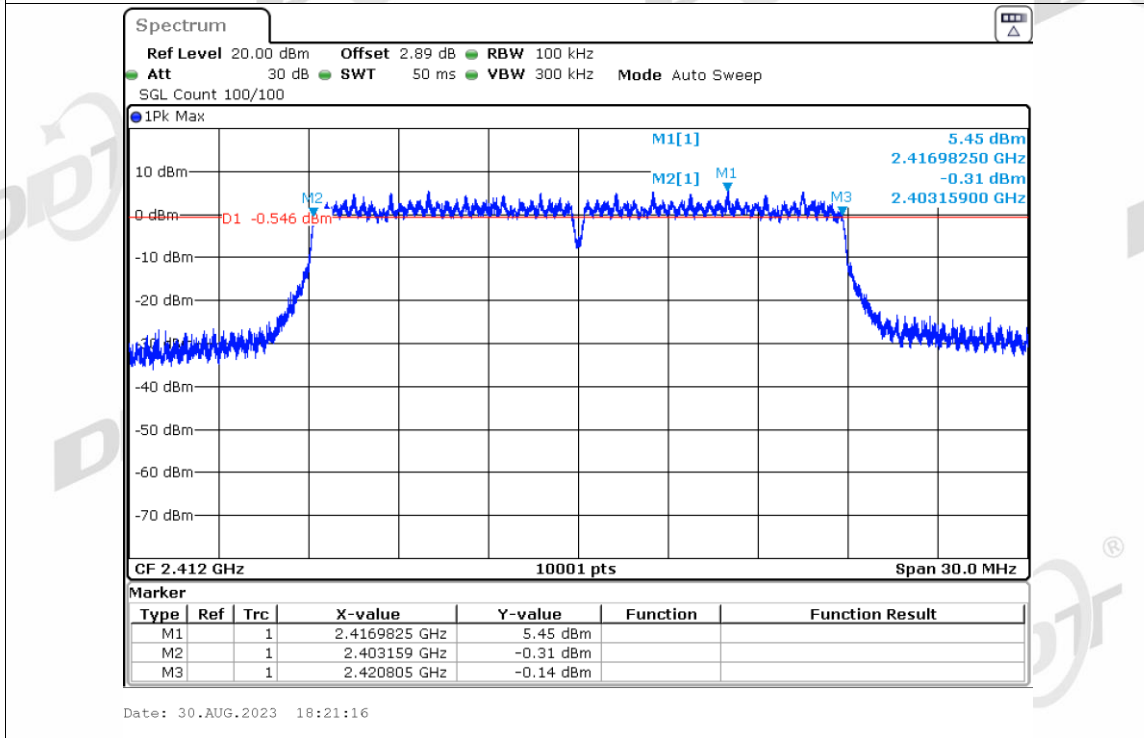



-6dB Bandwidth NVNT n20 MCS7 2437MHz Ant1

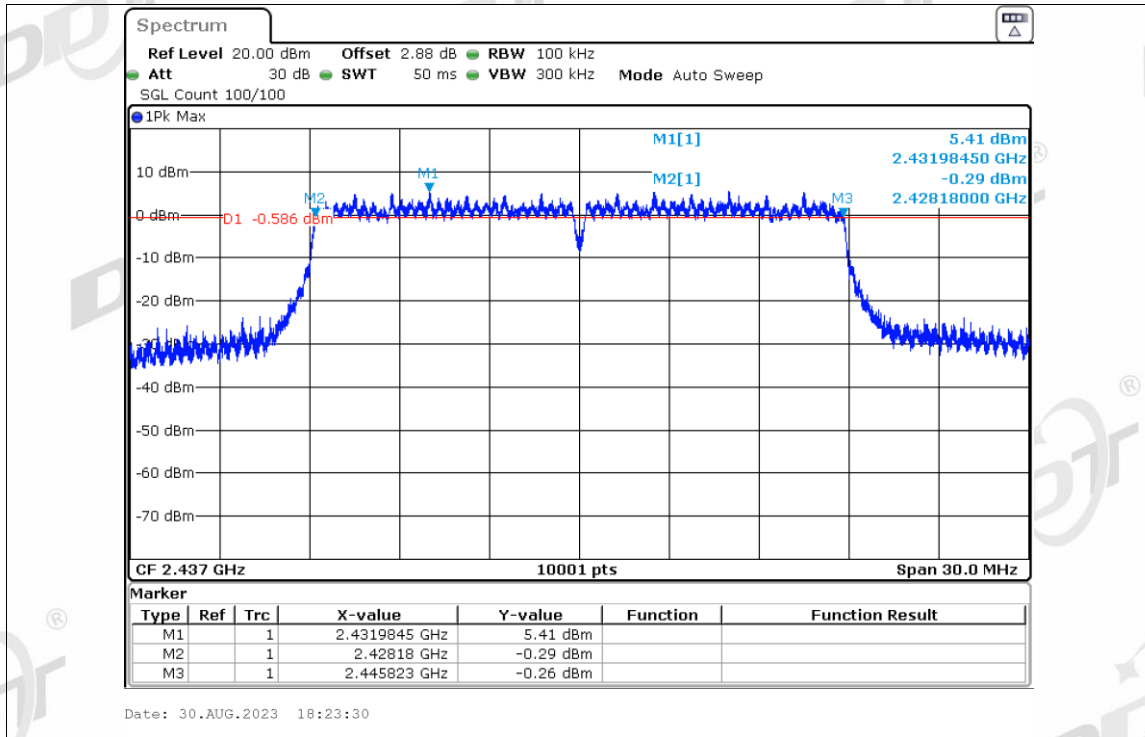


-6dB Bandwidth NVNT n20 MCS7 2462MHz Ant1

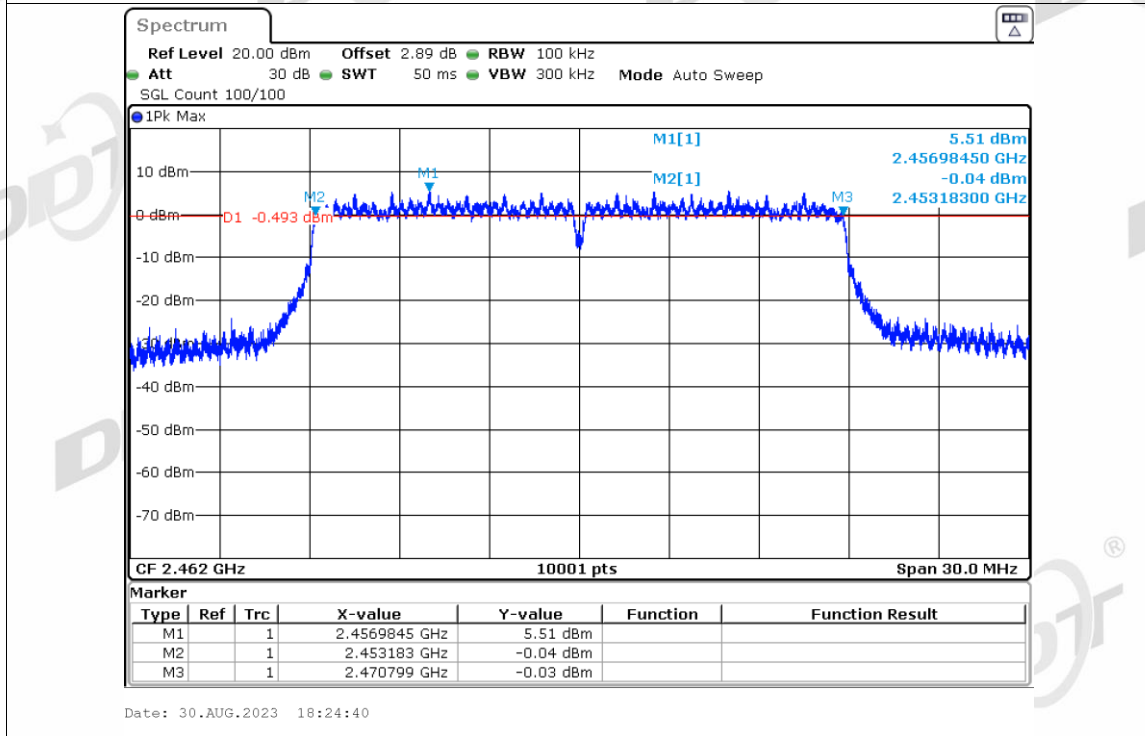


99% Bandwidth

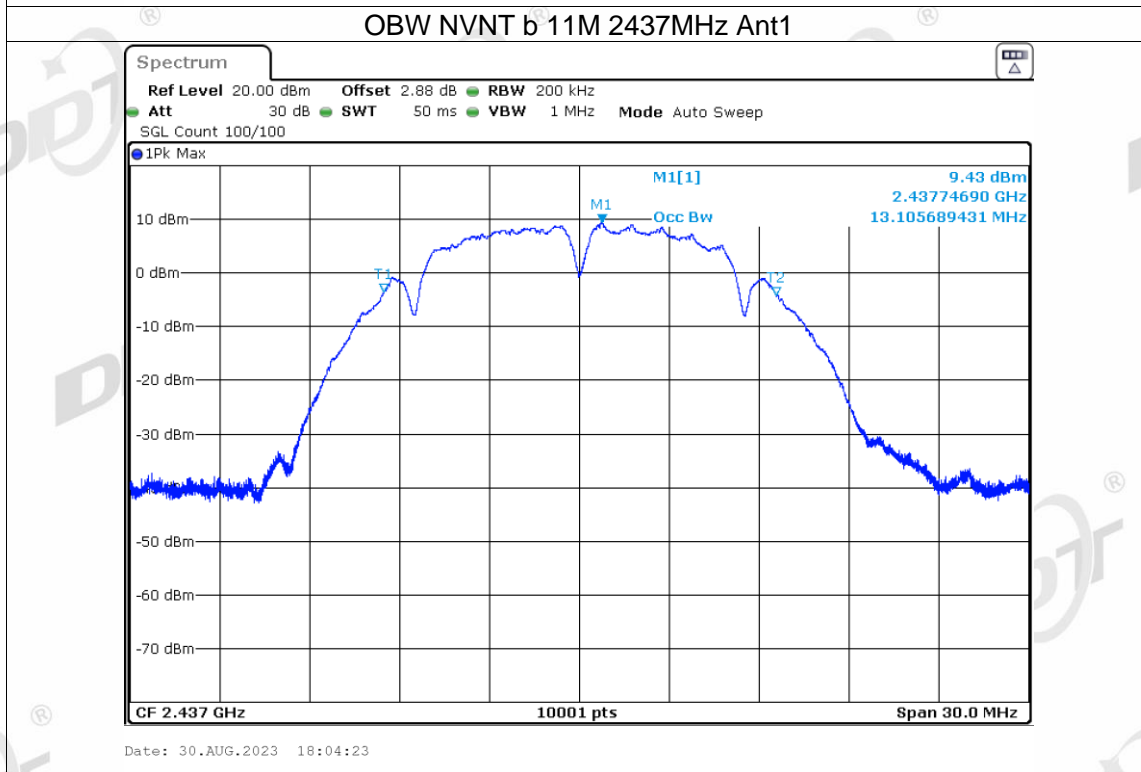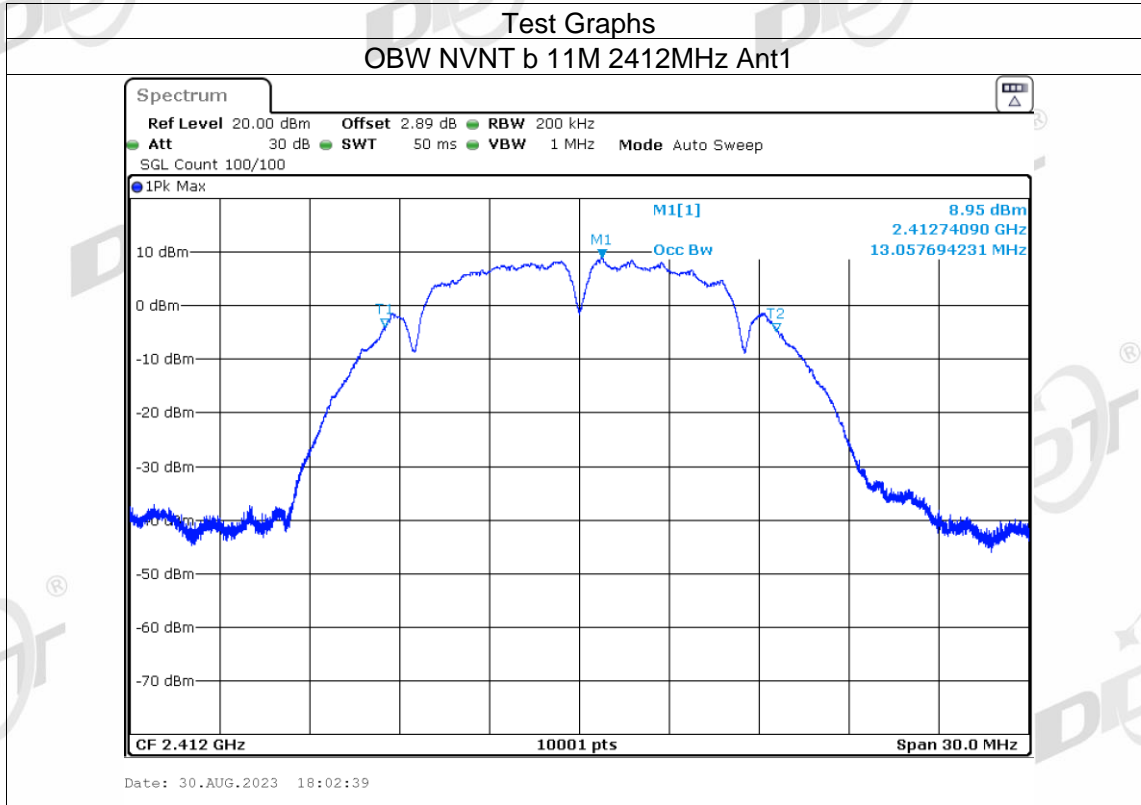


OBW NVNT b 11M 2462MHz Ant1

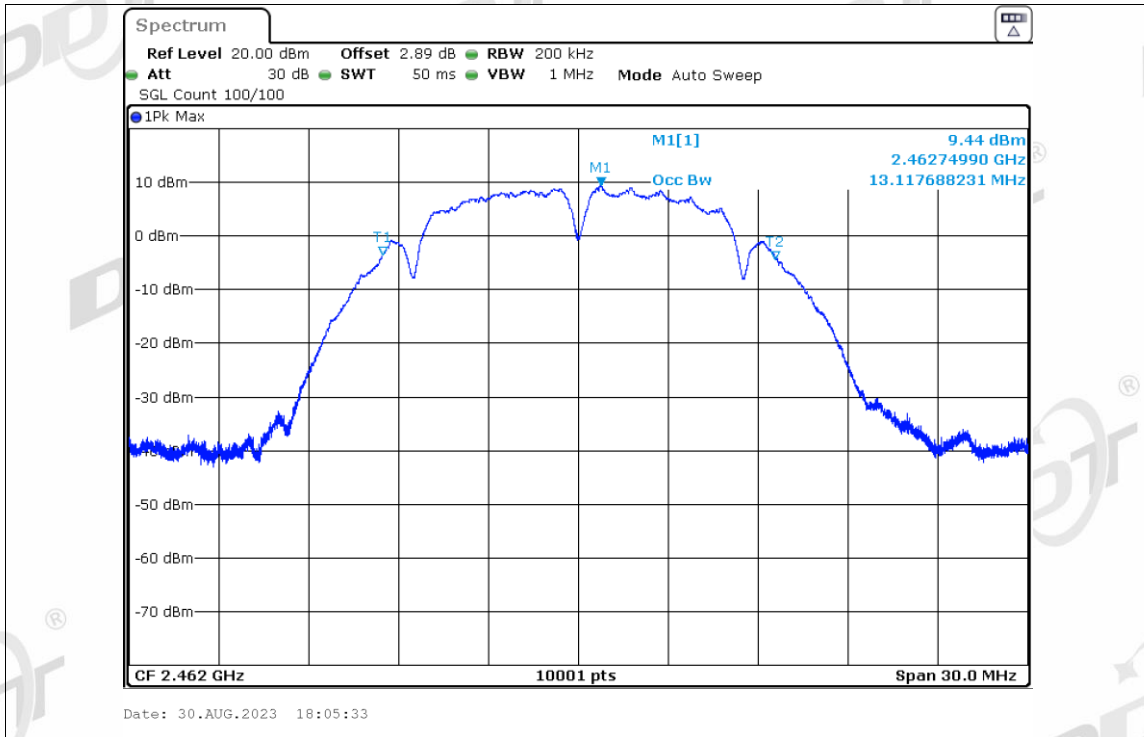


OBW NVNT b 1M 2412MHz Ant1

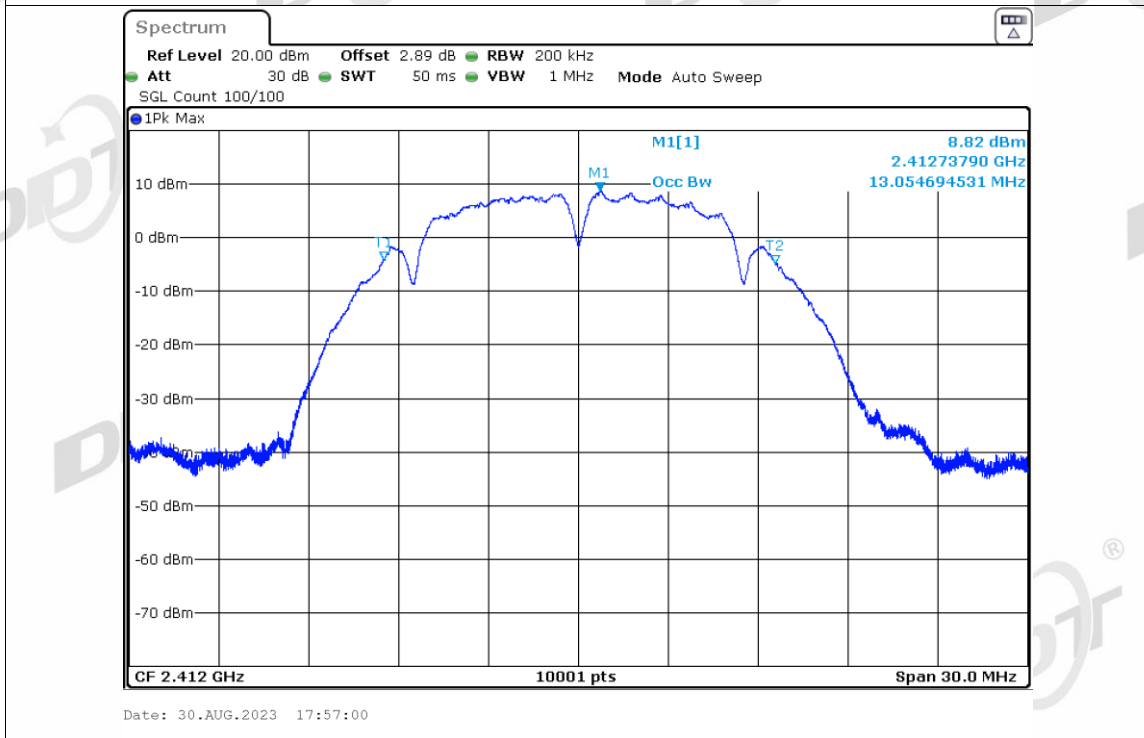


OBW NVNT b 1M 2437MHz Ant1

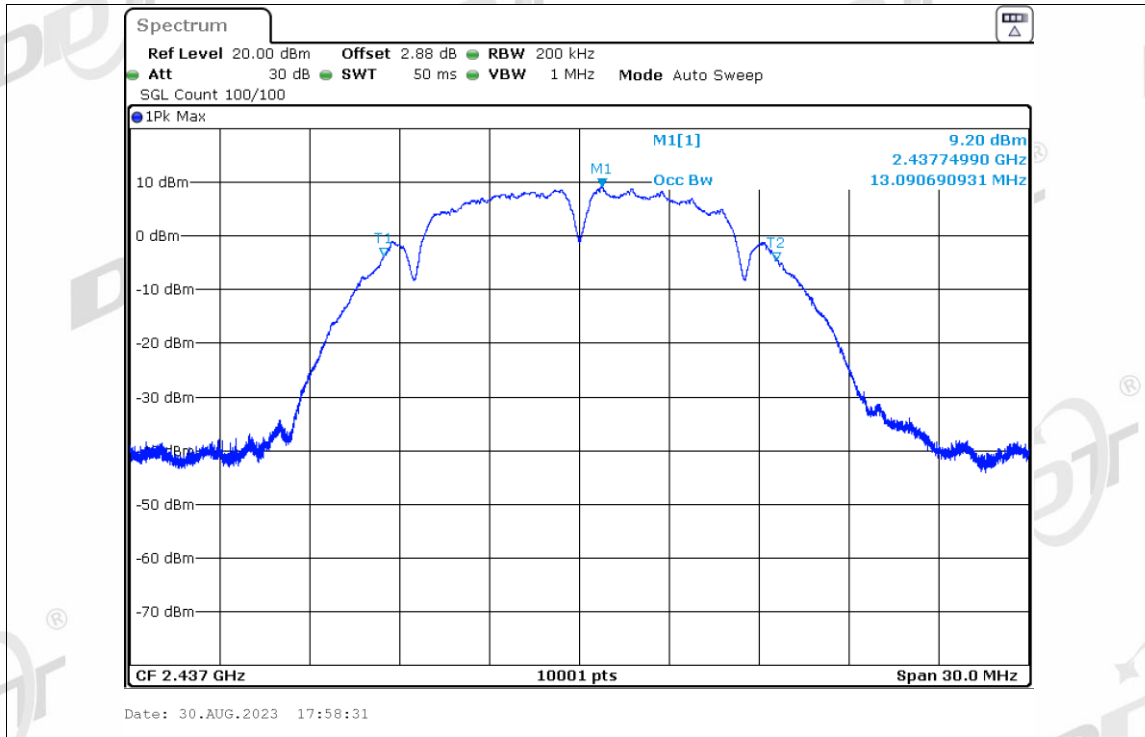


OBW NVNT b 1M 2462MHz Ant1

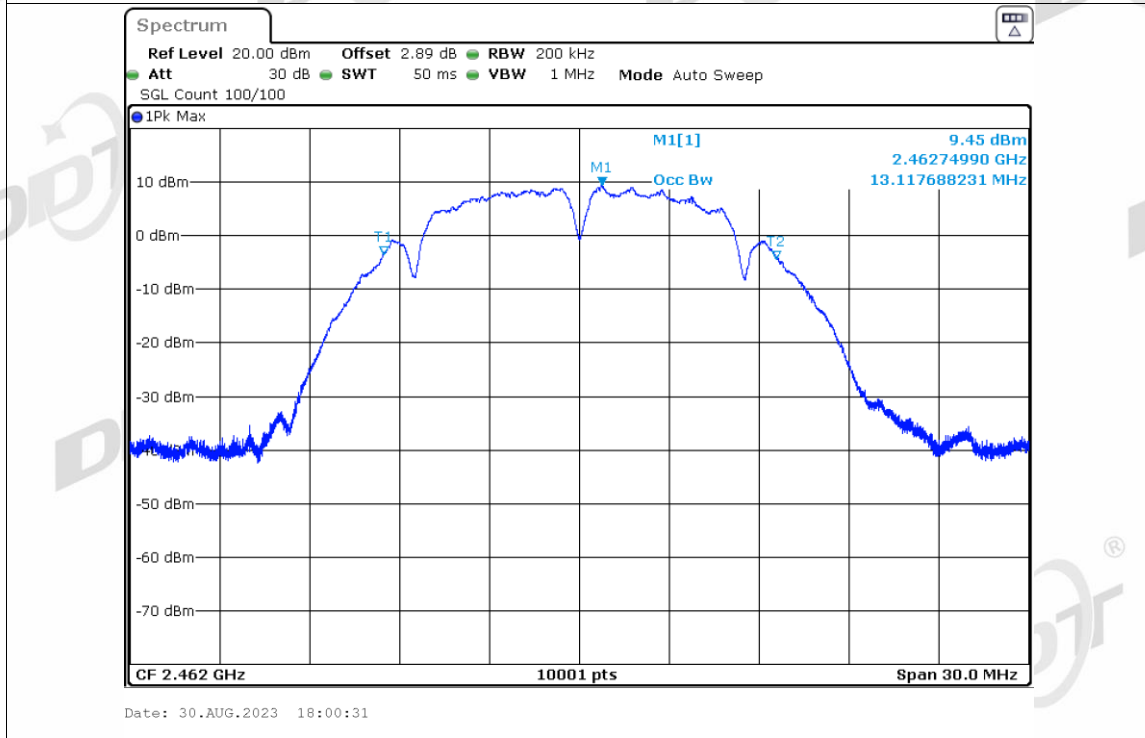


OBW NVNT g 54M 2412MHz Ant1

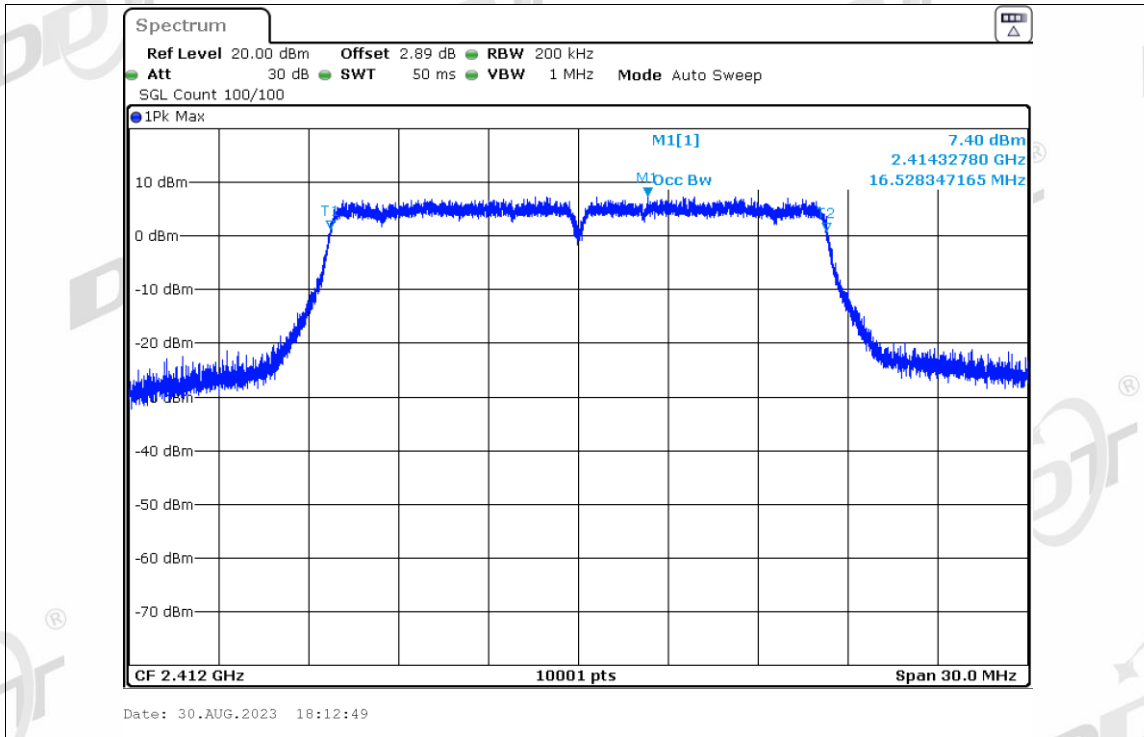


OBW NVNT g 54M 2437MHz Ant1

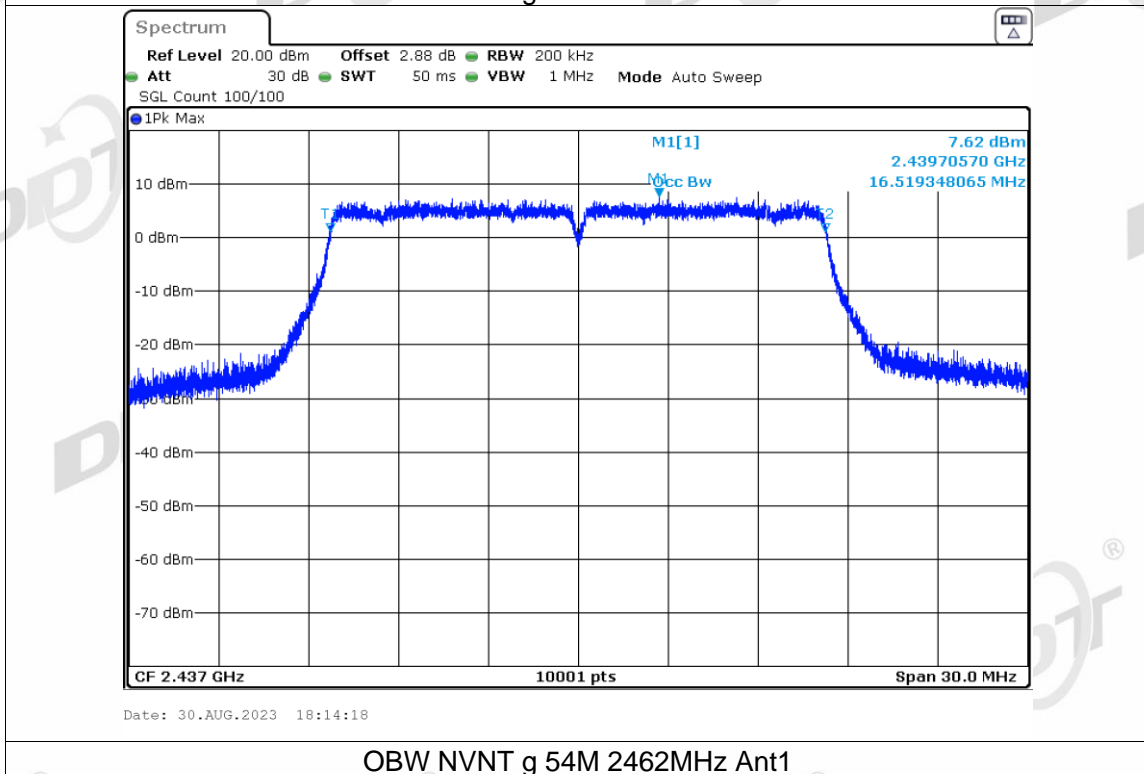


OBW NVNT g 54M 2462MHz Ant1

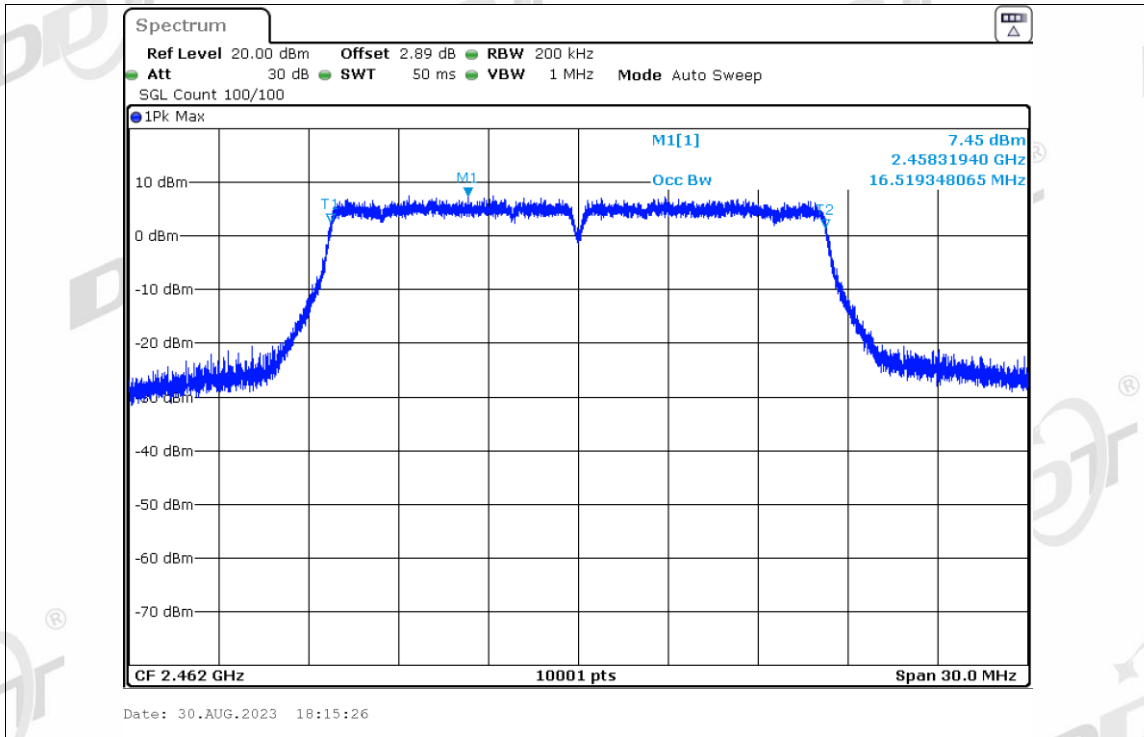


OBW NVNT g 6M 2412MHz Ant1

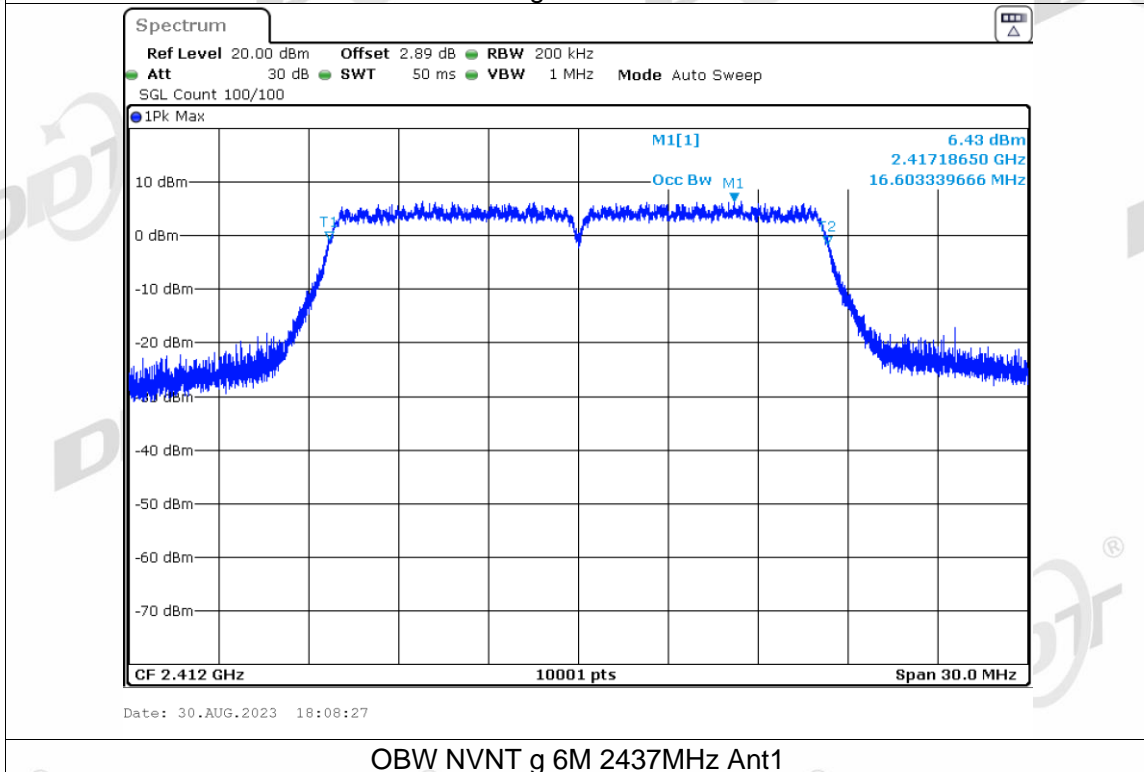


OBW NVNT g 6M 2437MHz Ant1

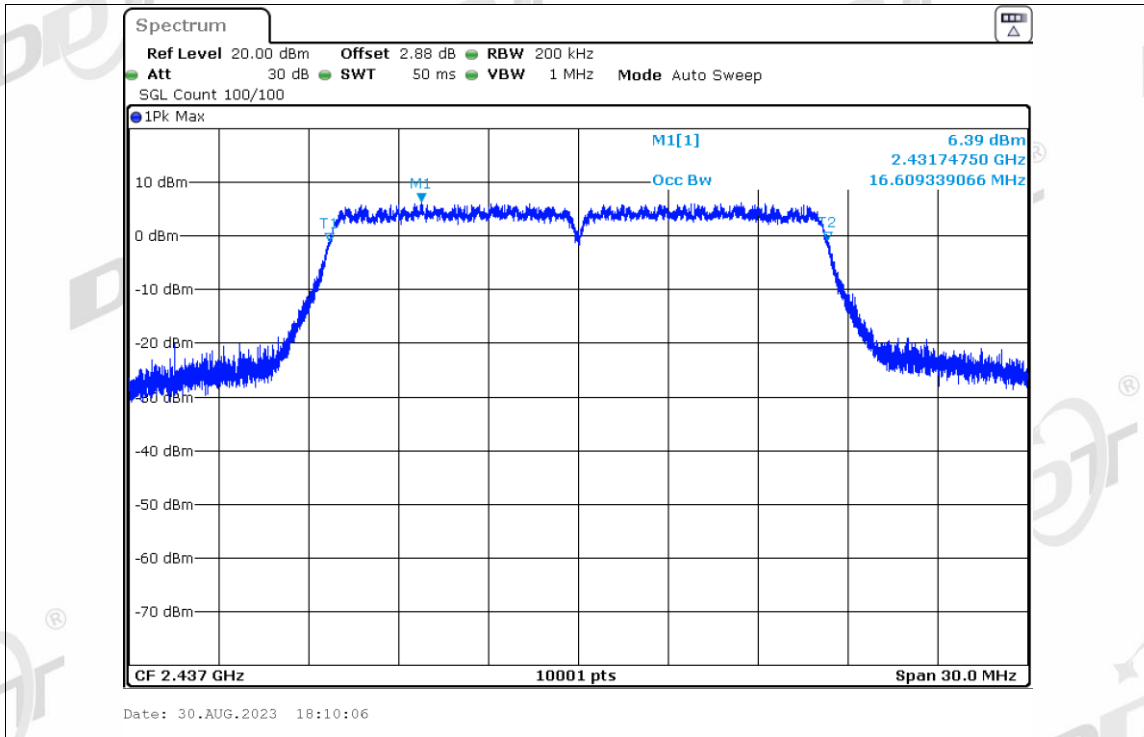


OBW NVNT g 6M 2462MHz Ant1

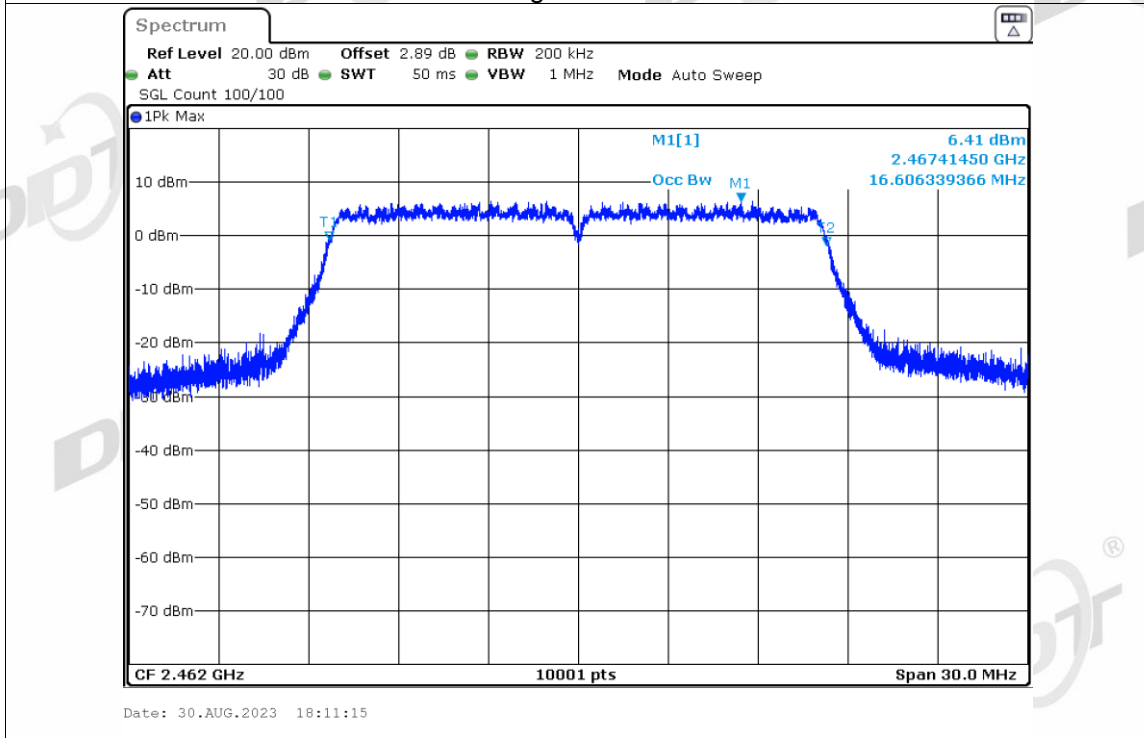


OBW NVNT n20 MCS0 2412MHz Ant1

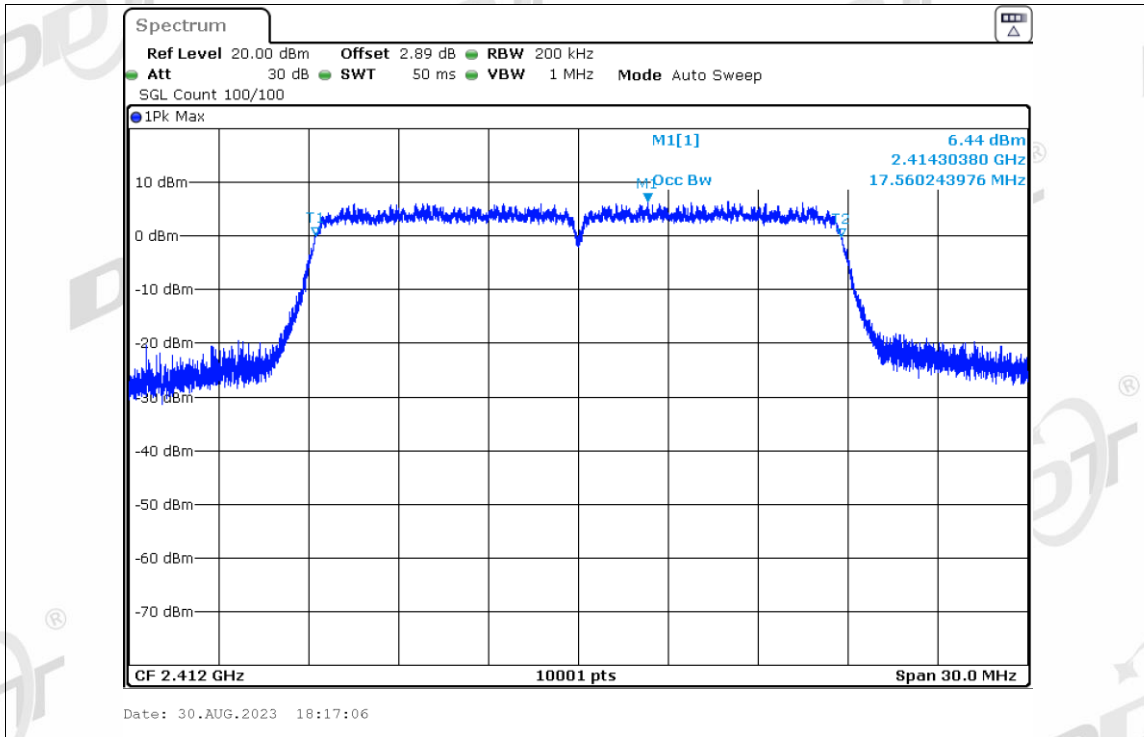


OBW NVNT n20 MCS0 2437MHz Ant1

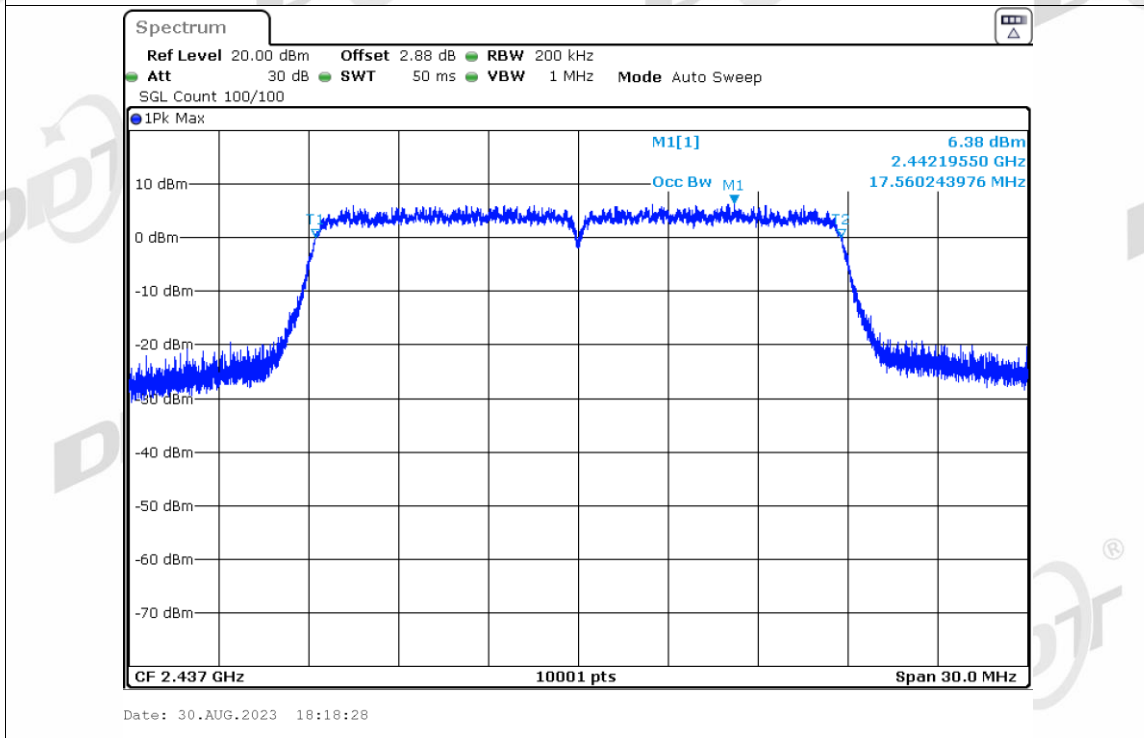


OBW NVNT n20 MCS0 2462MHz Ant1

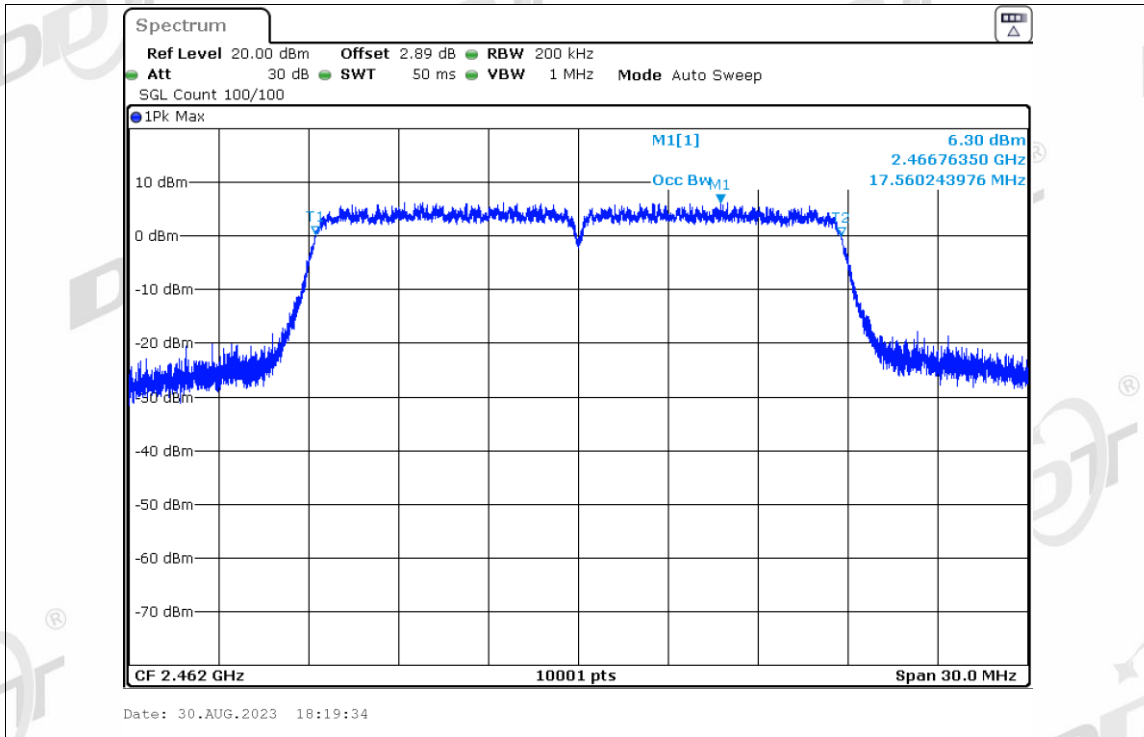


OBW NVNT n20 MCS7 2412MHz Ant1

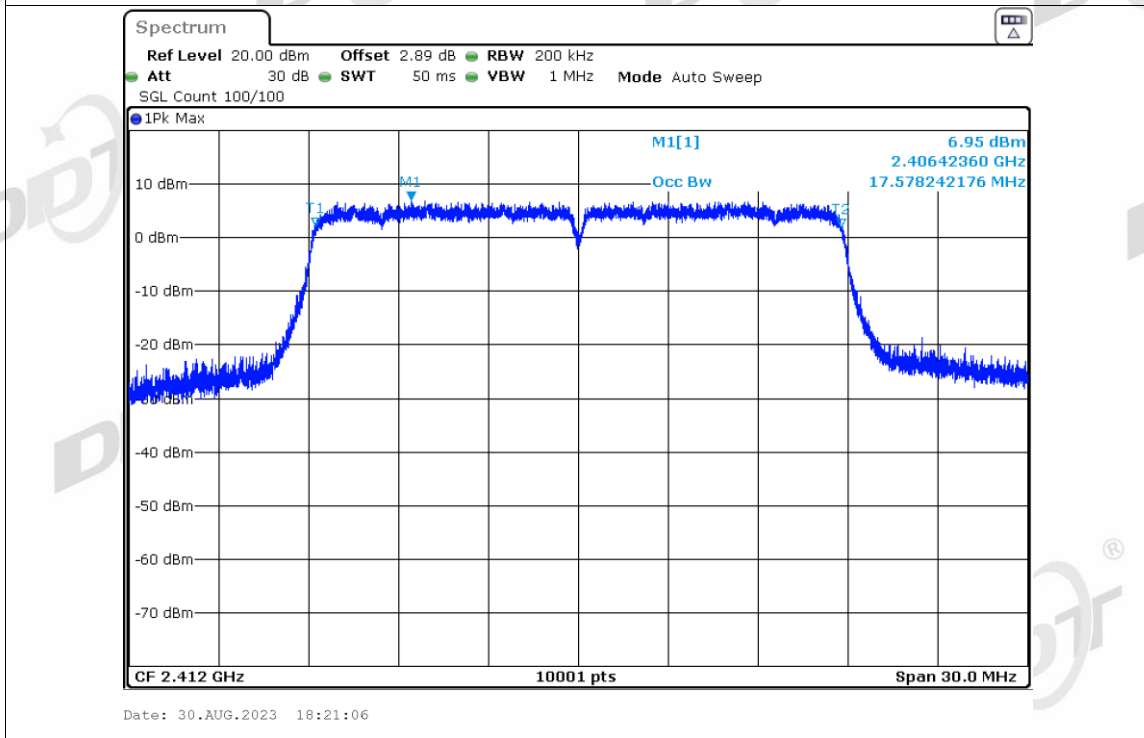

OBW NVNT n20 MCS7 2437MHz Ant1

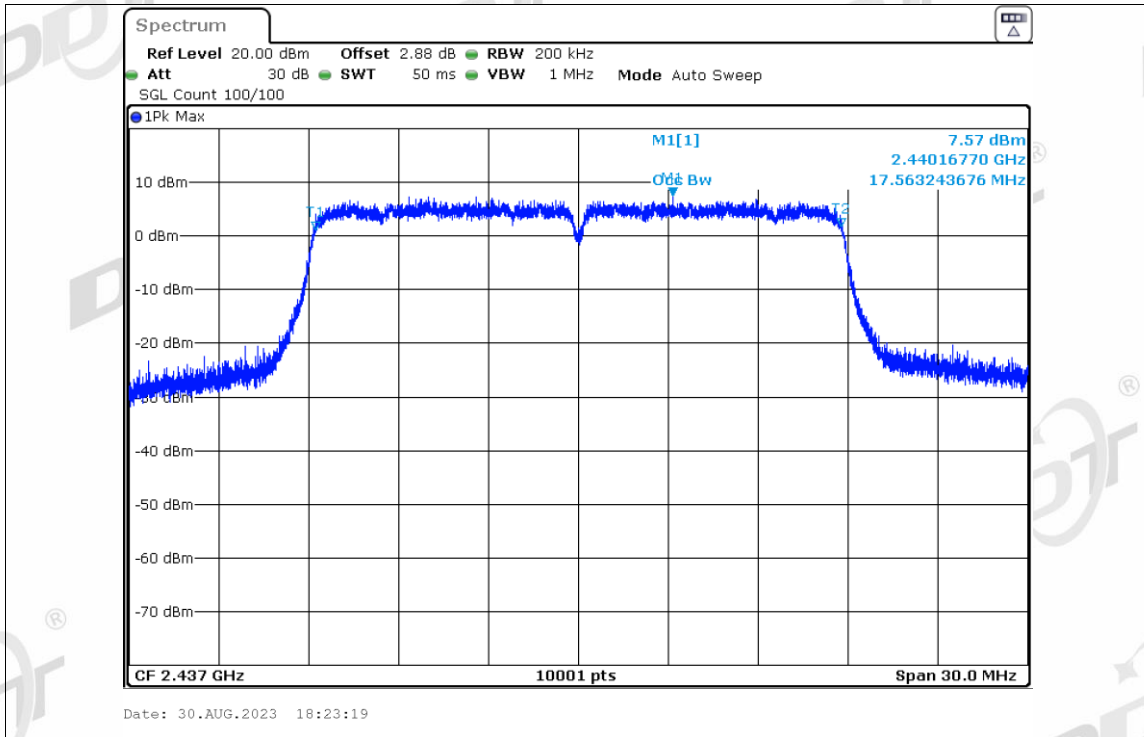

OBW NVNT n20 MCS7 2462MHz Ant1

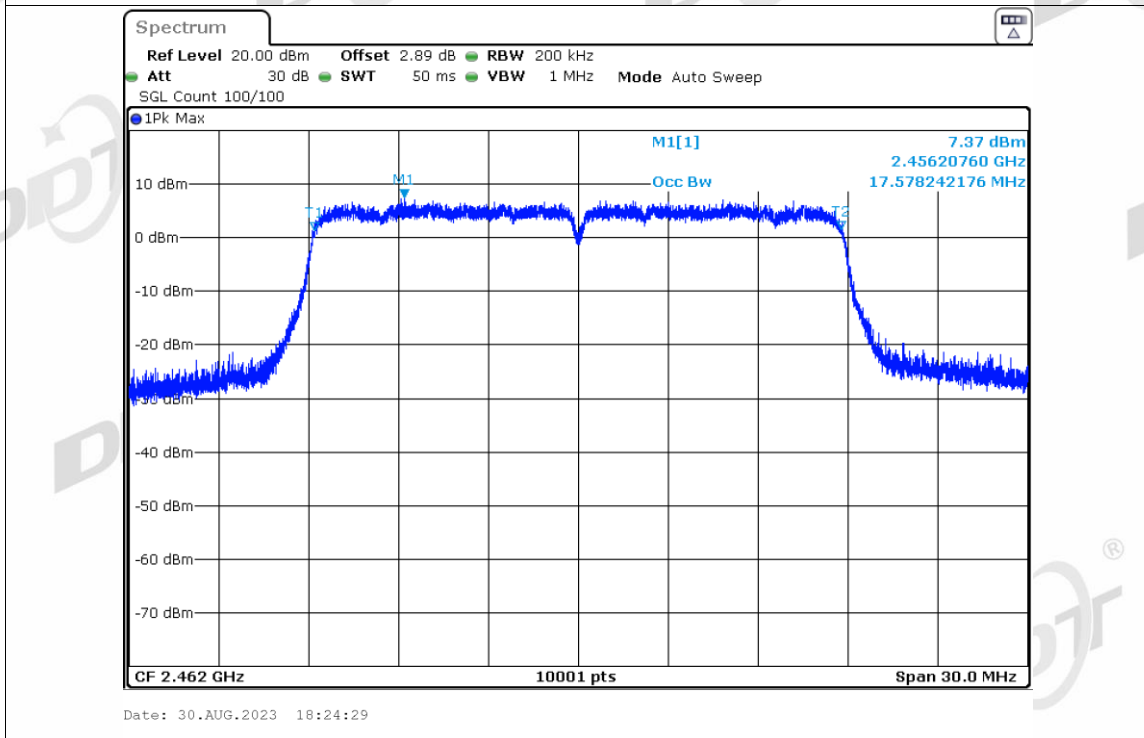

5. Maximum PK Conducted Output Power

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3. Test procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator
Measure the Maximum output power of antenna port by power sensor.

5.4. Test result

PK Power

Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
11B 1M	2412	Ant1	20.02	30	23.50	36	Pass
11B 1M	2437	Ant1	20.71	30	24.19	36	Pass
11B 1M	2462	Ant1	20.84	30	24.32	36	Pass
11G 6M	2412	Ant1	24.48	30	27.96	36	Pass
11G 6M	2437	Ant1	24.48	30	27.96	36	Pass
11G 6M	2462	Ant1	24.49	30	27.97	36	Pass
11N20 MCS0	2412	Ant1	24.56	30	28.04	36	Pass
11N20 MCS0	2437	Ant1	24.37	30	27.85	36	Pass
11N20 MCS0	2462	Ant1	24.62	30	28.10	36	Pass
11B 11M	2412	Ant1	20.47	30	23.95	36	Pass
11B 11M	2437	Ant1	20.61	30	24.09	36	Pass
11B 11M	2462	Ant1	20.81	30	24.29	36	Pass
11G 54M	2412	Ant1	24.53	30	28.01	36	Pass
11G 54M	2437	Ant1	24.52	30	28.00	36	Pass
11G 54M	2462	Ant1	24.40	30	27.88	36	Pass
11N20 MCS7	2412	Ant1	24.55	30	28.03	36	Pass
11N20 MCS7	2437	Ant1	24.52	30	28.00	36	Pass
11N20 MCS7	2462	Ant1	24.40	30	27.88	36	Pass

Average Power

Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)
11B 1M	2412	Ant1	17.21
11B 1M	2437	Ant1	17.96
11B 1M	2462	Ant1	18.10
11G 6M	2412	Ant1	16.37
11G 6M	2437	Ant1	16.37
11G 6M	2462	Ant1	16.39
11N20 MCS0	2412	Ant1	16.29
11N20 MCS0	2437	Ant1	16.25
11N20 MCS0	2462	Ant1	16.46
11B 11M	2412	Ant1	17.54
11B 11M	2437	Ant1	17.94
11B 11M	2462	Ant1	17.95
11G 54M	2412	Ant1	16.17
11G 54M	2437	Ant1	16.33
11G 54M	2462	Ant1	16.53
11N20 MCS7	2412	Ant1	16.22
11N20 MCS7	2437	Ant1	16.23
11N20 MCS7	2462	Ant1	16.41

6. Power Spectral Density

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	peak
Sweep time:	auto
Trace mode	Max hold


(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.


(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.4. Test result


Test Mode	Test Channel	Ant	PSD (dBm/3kHz)	Limit(dBm/3kHz)	Verdict
b 11M	2412	Ant1	-4.63	8.00	Pass
b 11M	2437	Ant1	-4.19	8.00	Pass
b 11M	2462	Ant1	-4.18	8.00	Pass
b 1M	2412	Ant1	-4.78	8.00	Pass
b 1M	2437	Ant1	-4.38	8.00	Pass
b 1M	2462	Ant1	-4.12	8.00	Pass
g 54M	2412	Ant1	-6.98	8.00	Pass
g 54M	2437	Ant1	-7.36	8.00	Pass
g 54M	2462	Ant1	-7.00	8.00	Pass
g 6M	2412	Ant1	-6.83	8.00	Pass
g 6M	2437	Ant1	-6.30	8.00	Pass
g 6M	2462	Ant1	-6.11	8.00	Pass
n20 MCS0	2412	Ant1	-6.72	8.00	Pass
n20 MCS0	2437	Ant1	-6.74	8.00	Pass
n20 MCS0	2462	Ant1	-7.20	8.00	Pass
n20 MCS7	2412	Ant1	-7.14	8.00	Pass
n20 MCS7	2437	Ant1	-7.34	8.00	Pass
n20 MCS7	2462	Ant1	-7.17	8.00	Pass

6.5. original test data

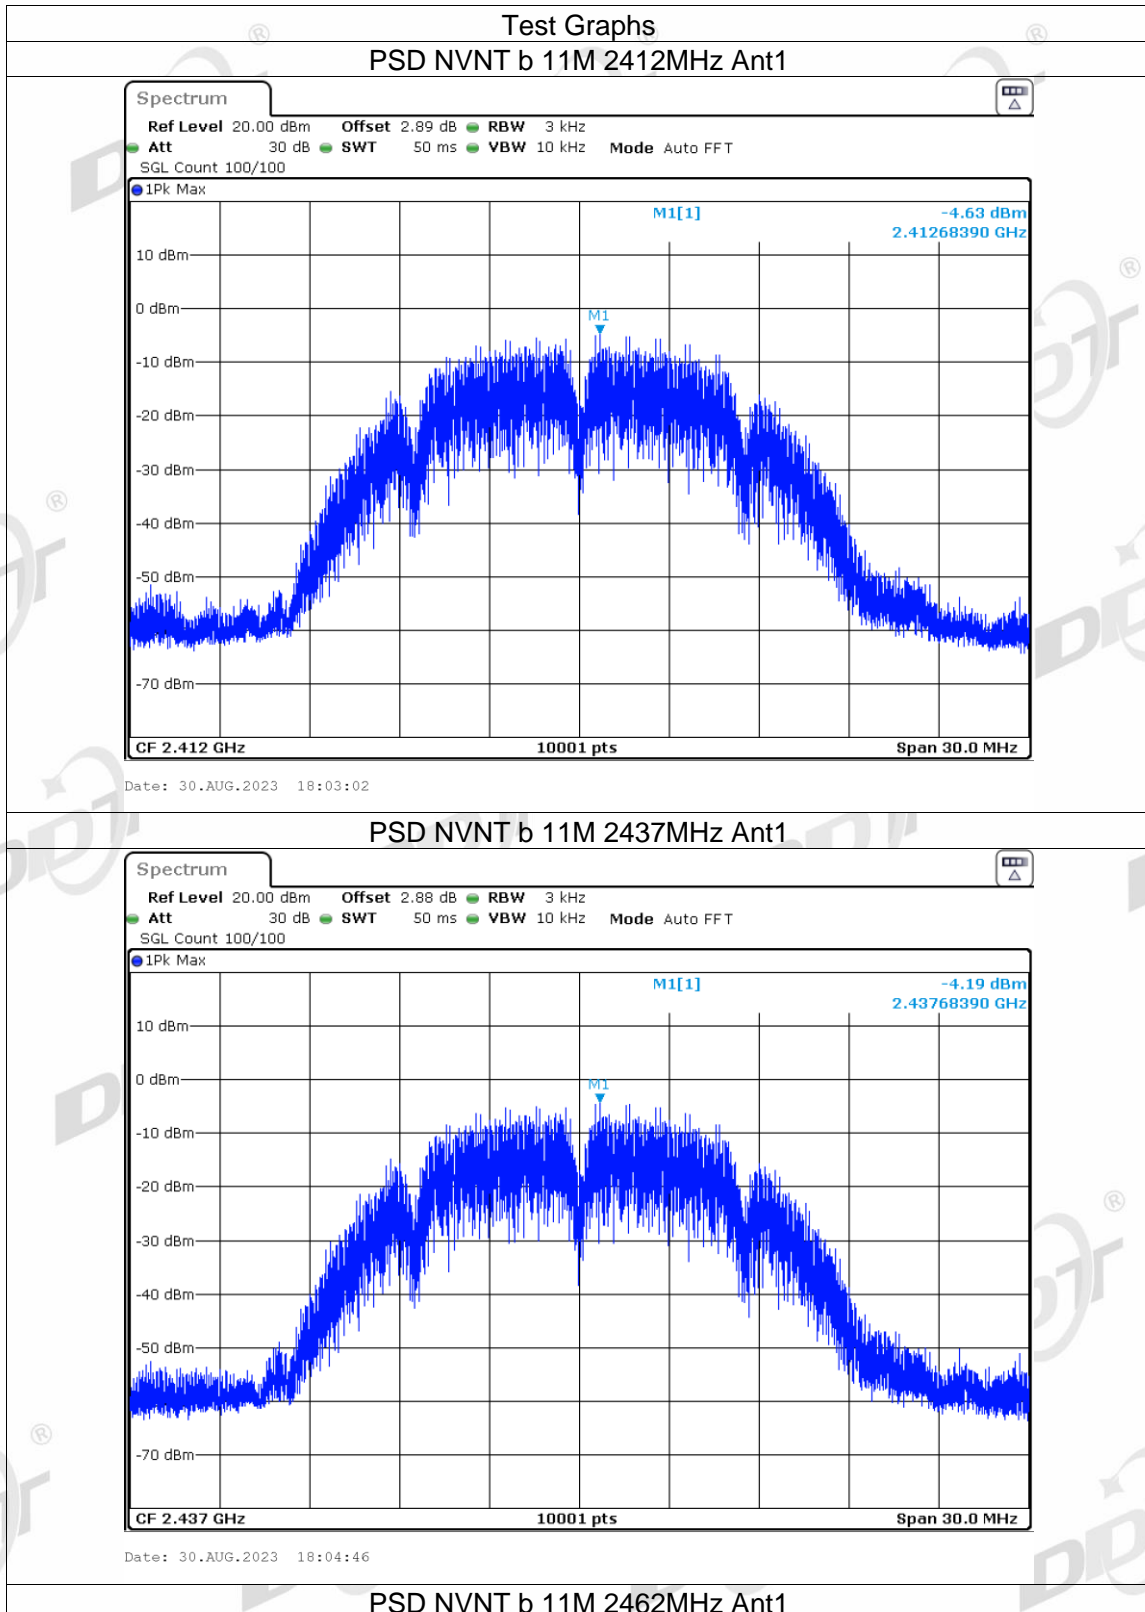


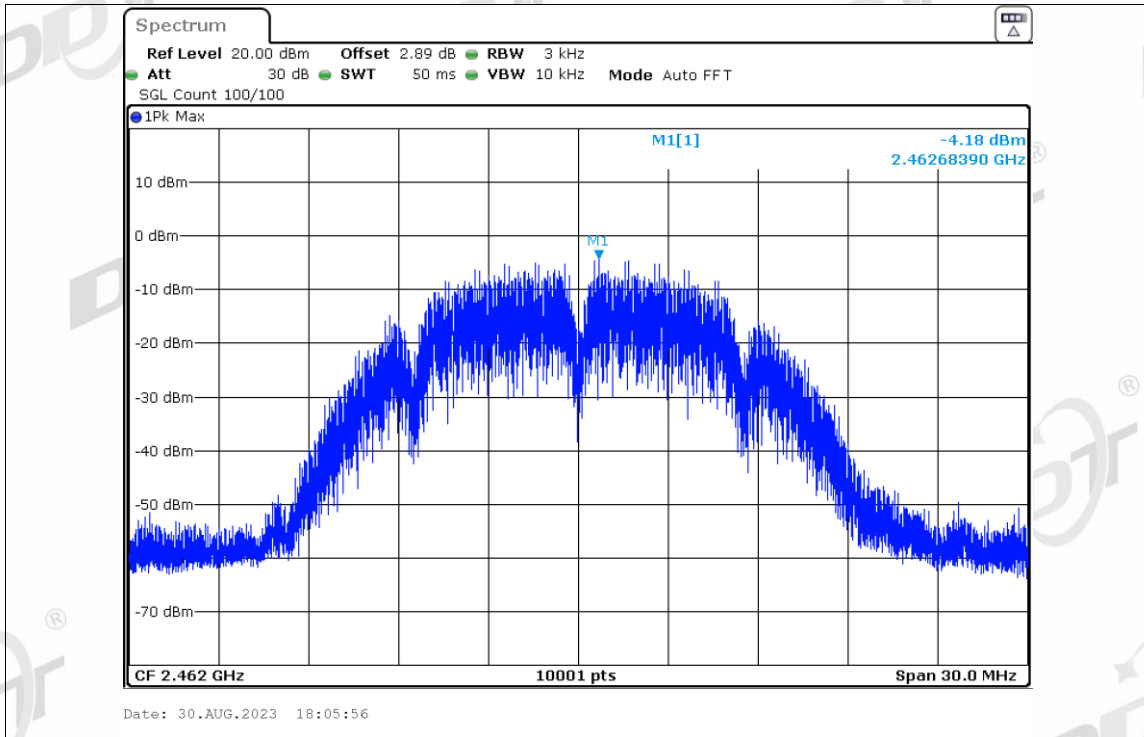


PSD NVNT b 1M 2412MHz Ant1

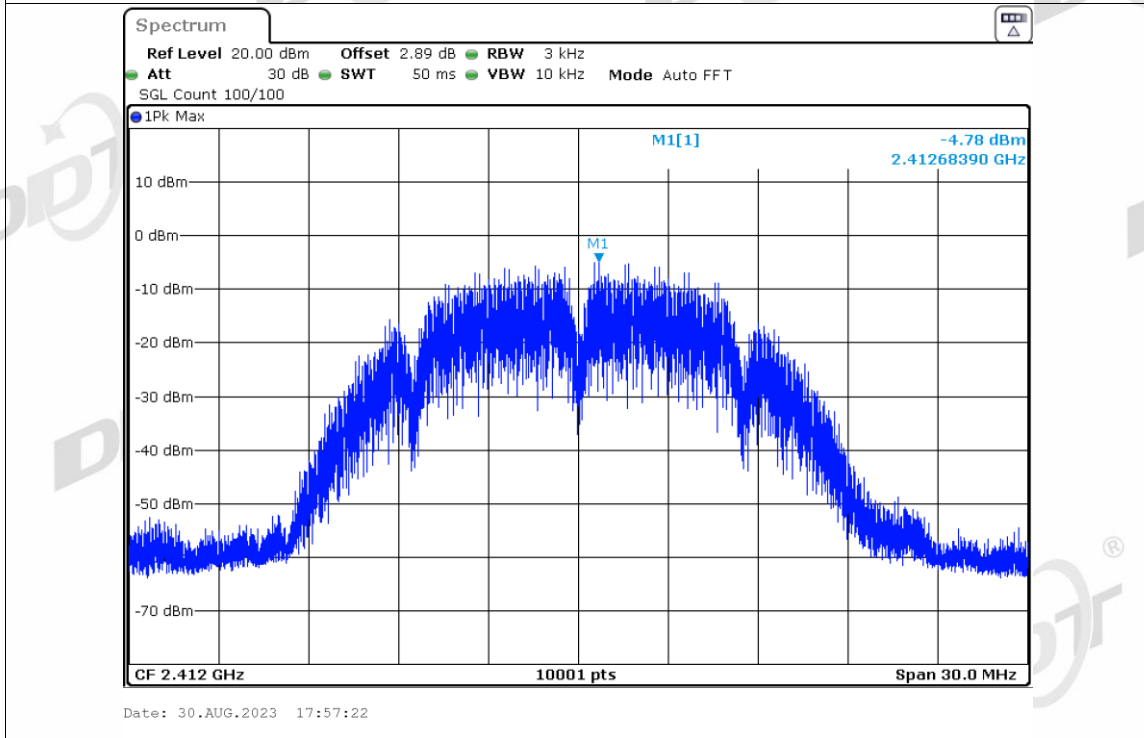


PSD NVNT b 1M 2437MHz Ant1

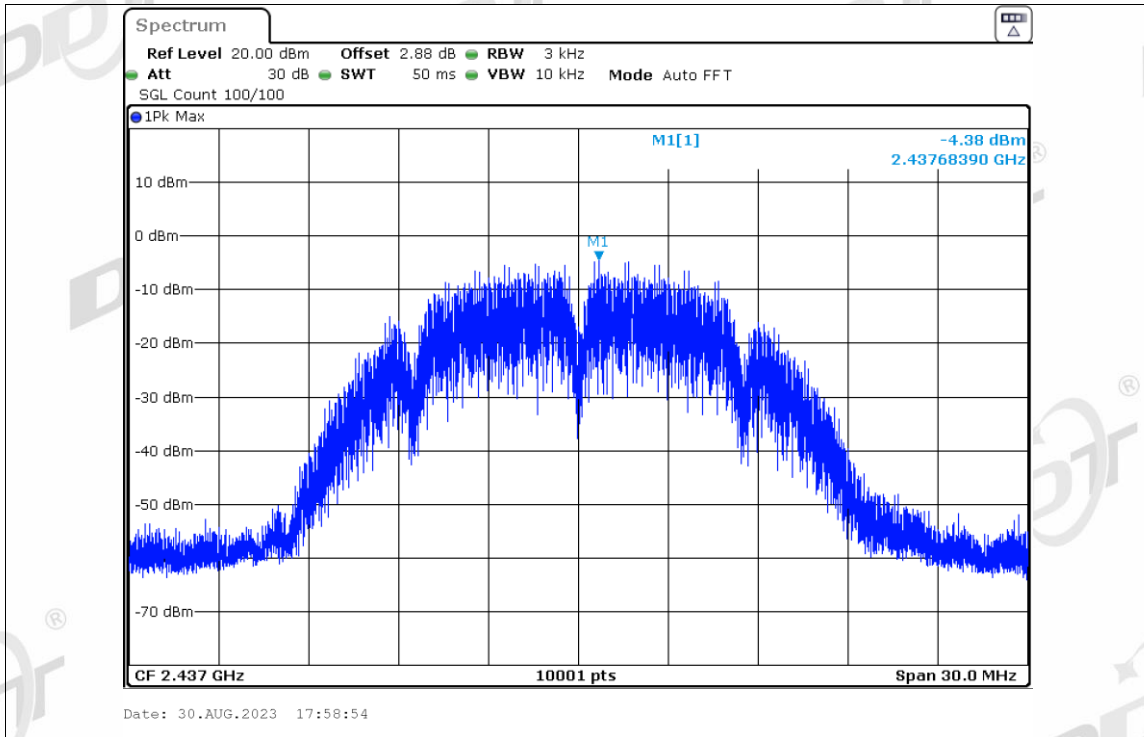


PSD NVNT b 1M 2462MHz Ant1

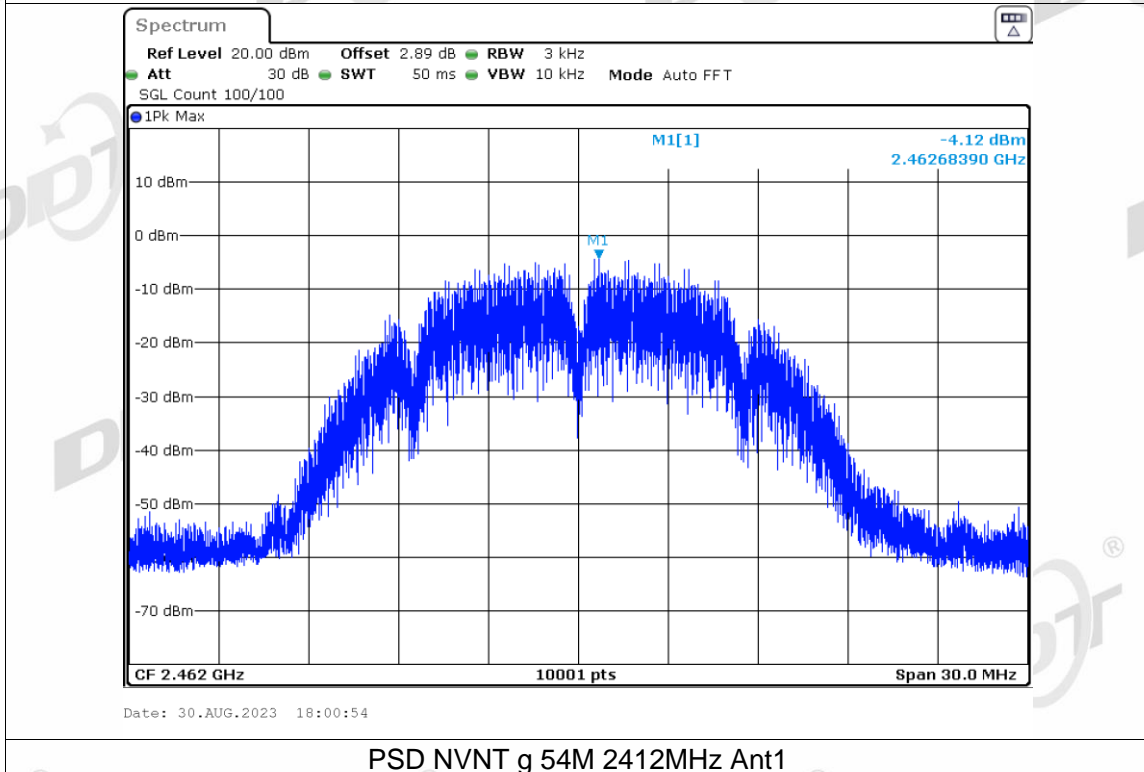


PSD NVNT g 54M 2412MHz Ant1

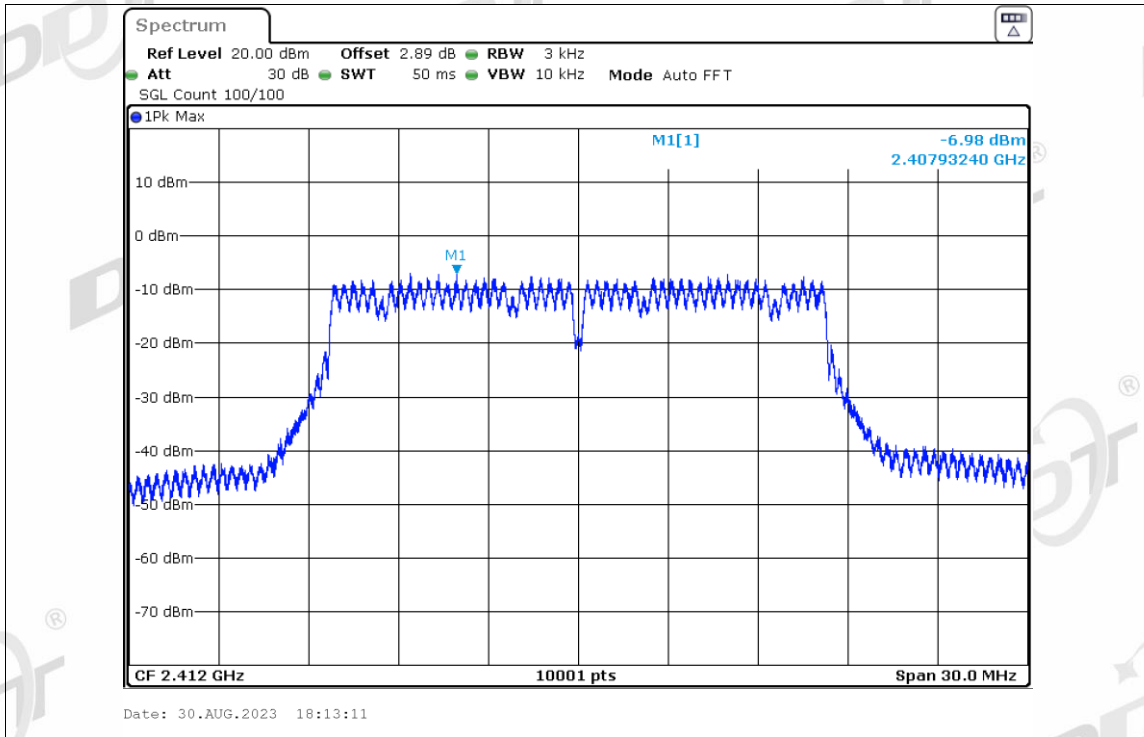


PSD NVNT g 54M 2437MHz Ant1

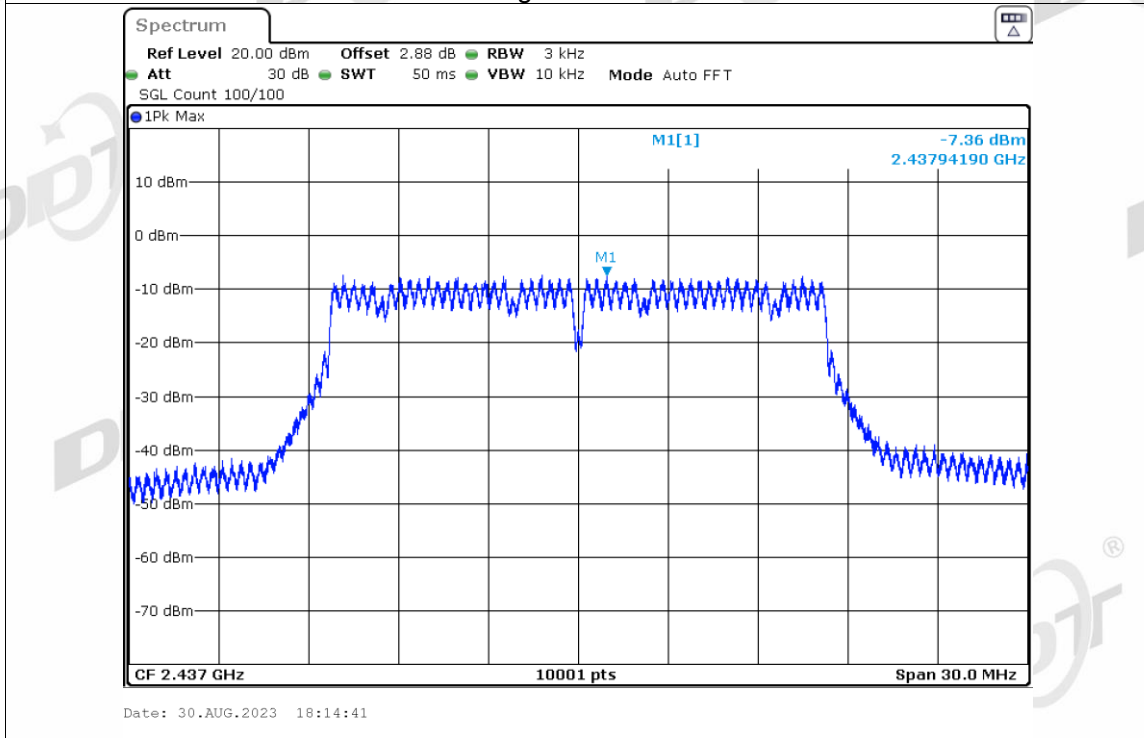


PSD NVNT g 54M 2462MHz Ant1

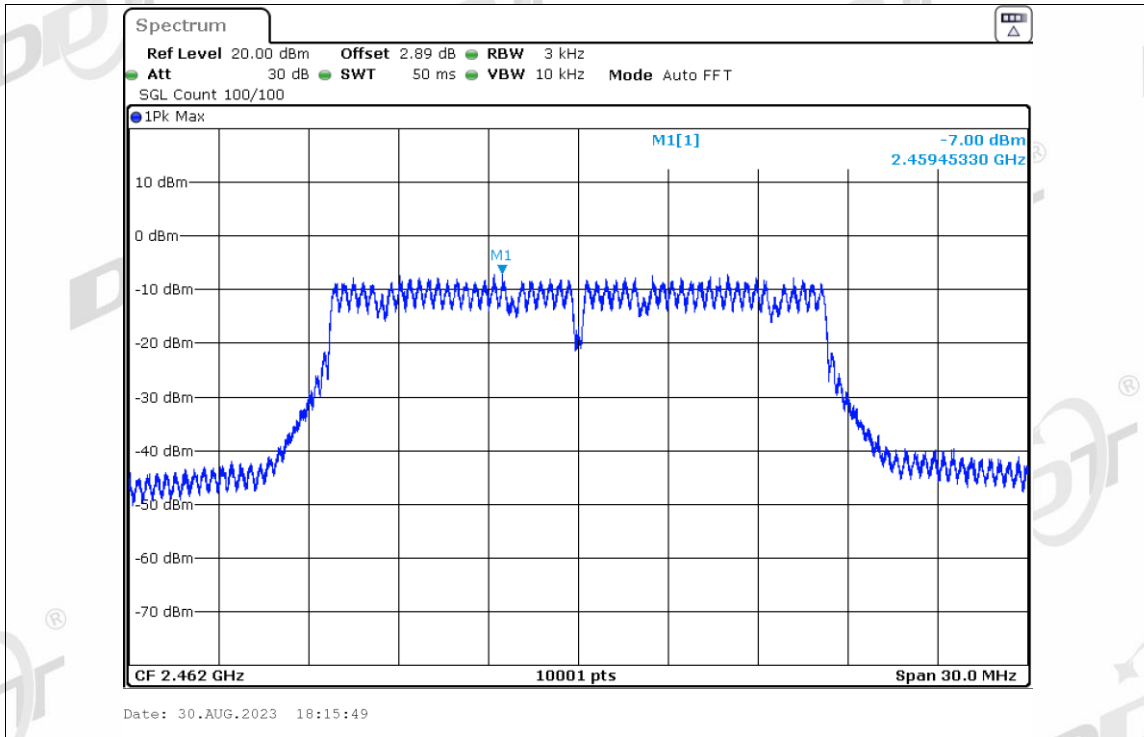


PSD NVNT g 6M 2412MHz Ant1

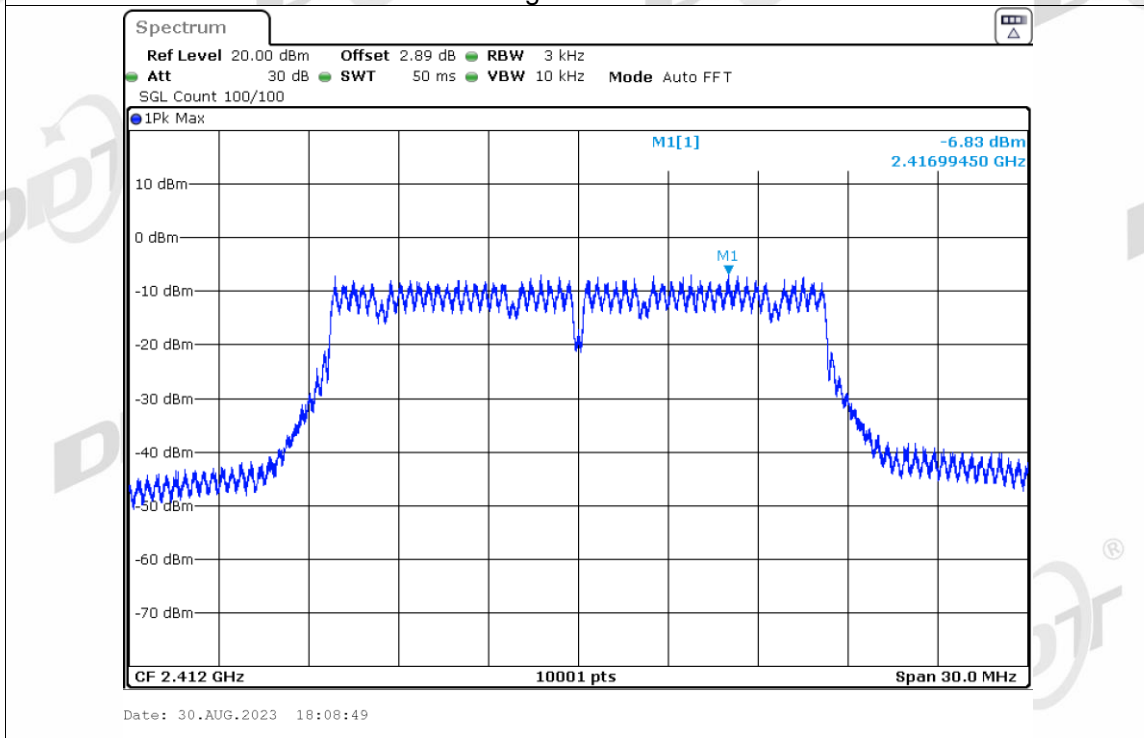


PSD NVNT g 6M 2437MHz Ant1

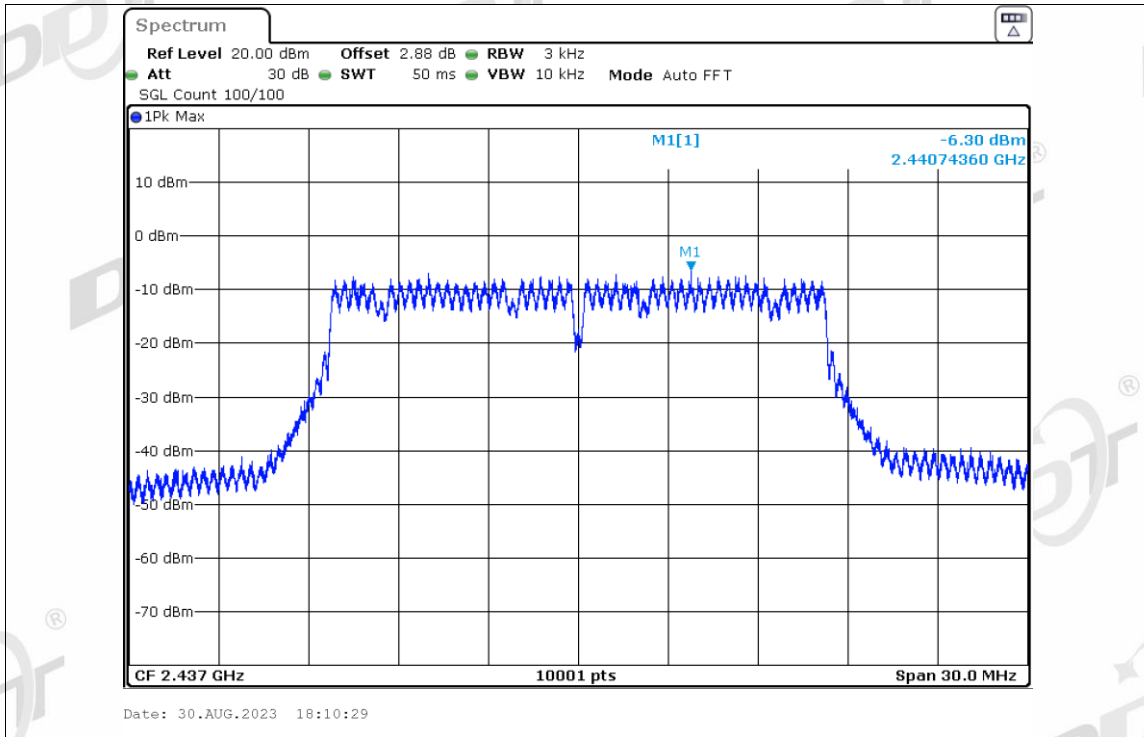


PSD NVNT g 6M 2462MHz Ant1

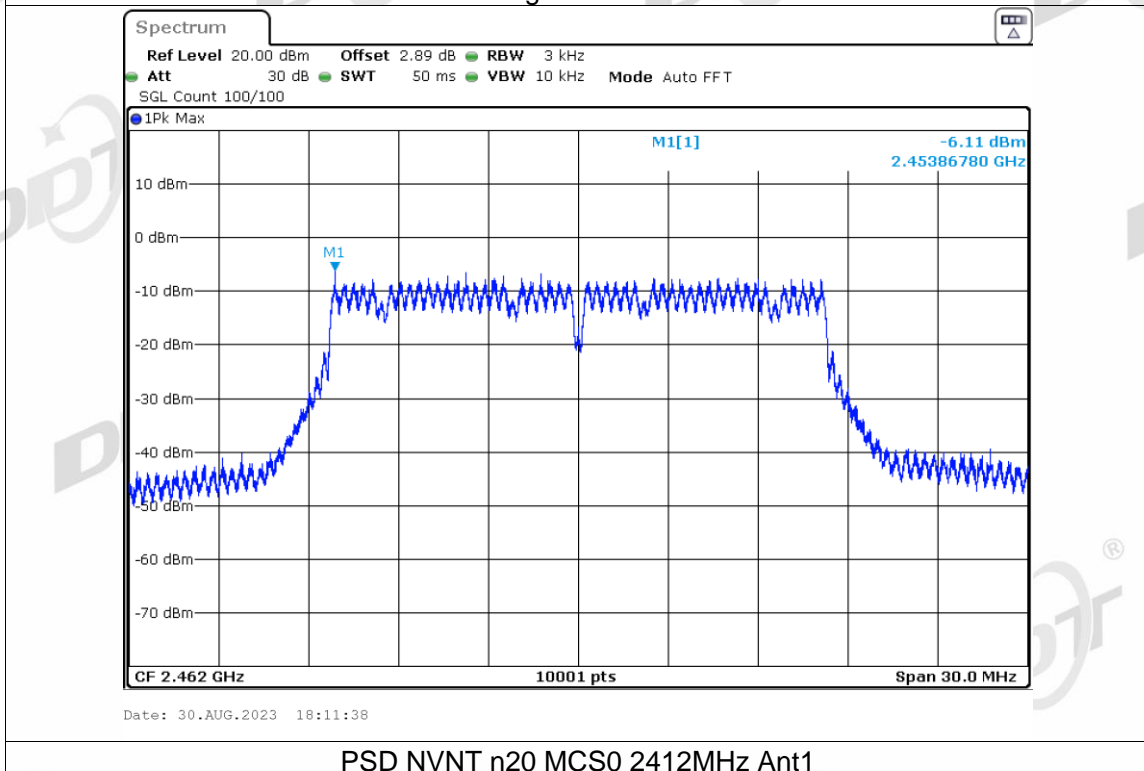


PSD NVNT n20 MCS0 2412MHz Ant1

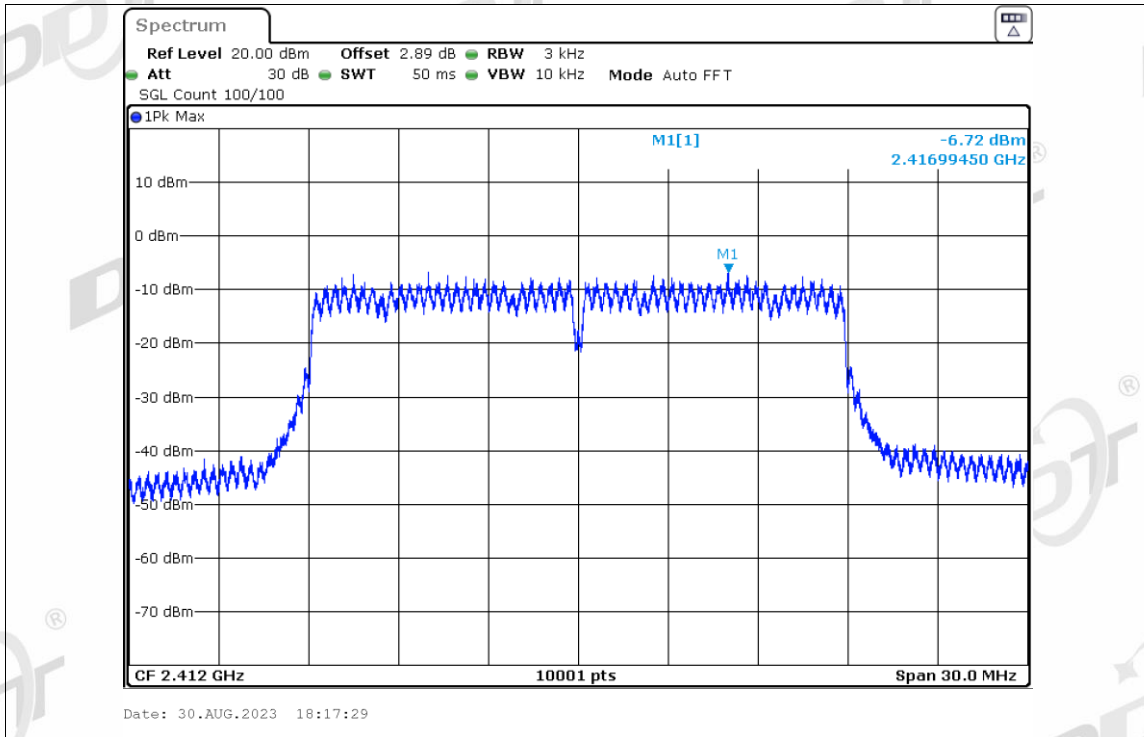


PSD NVNT n20 MCS0 2437MHz Ant1

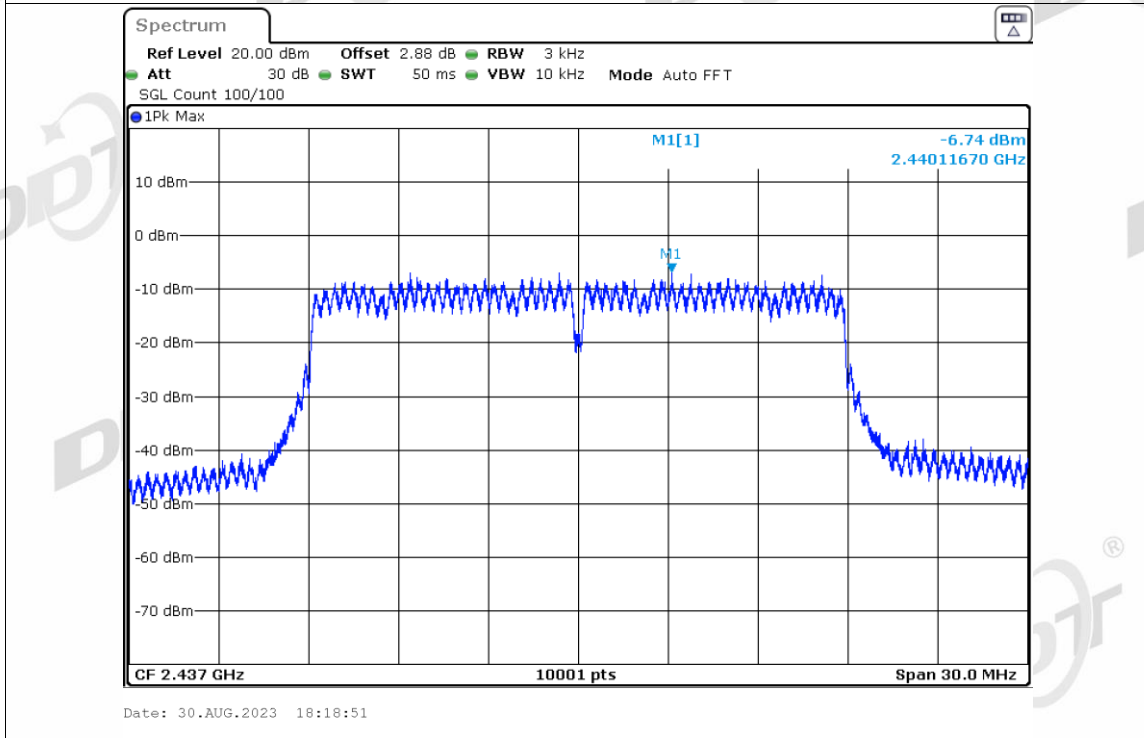


PSD NVNT n20 MCS0 2462MHz Ant1

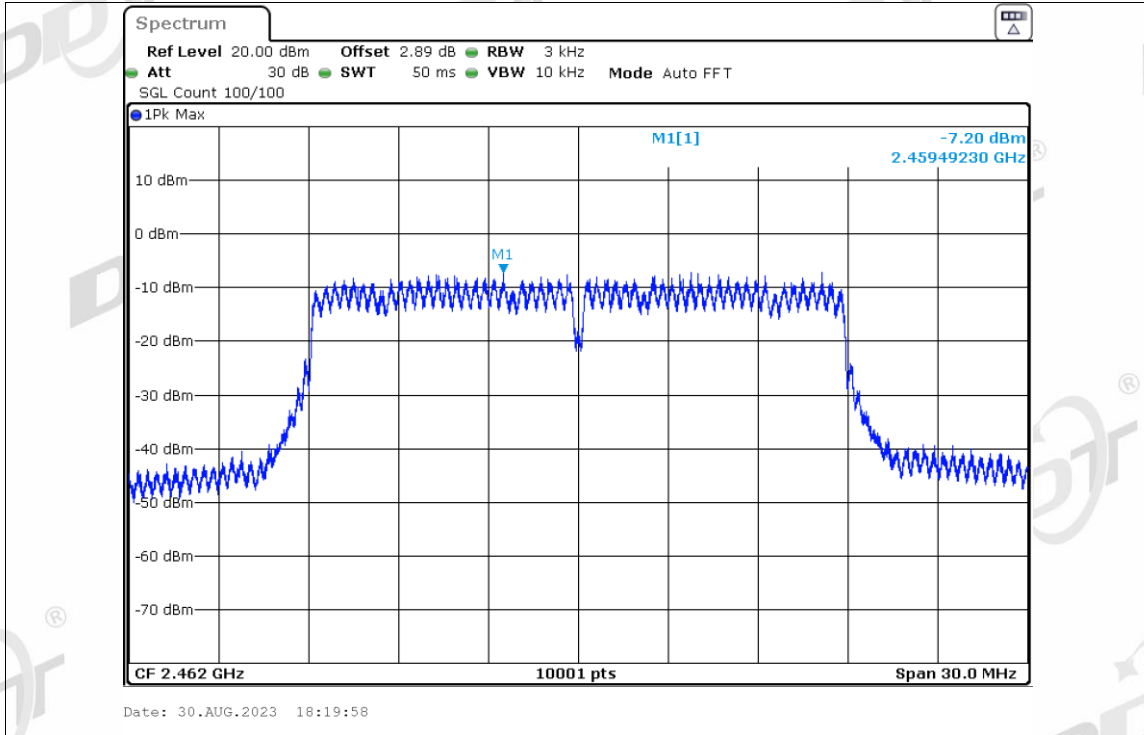


PSD NVNT n20 MCS7 2412MHz Ant1

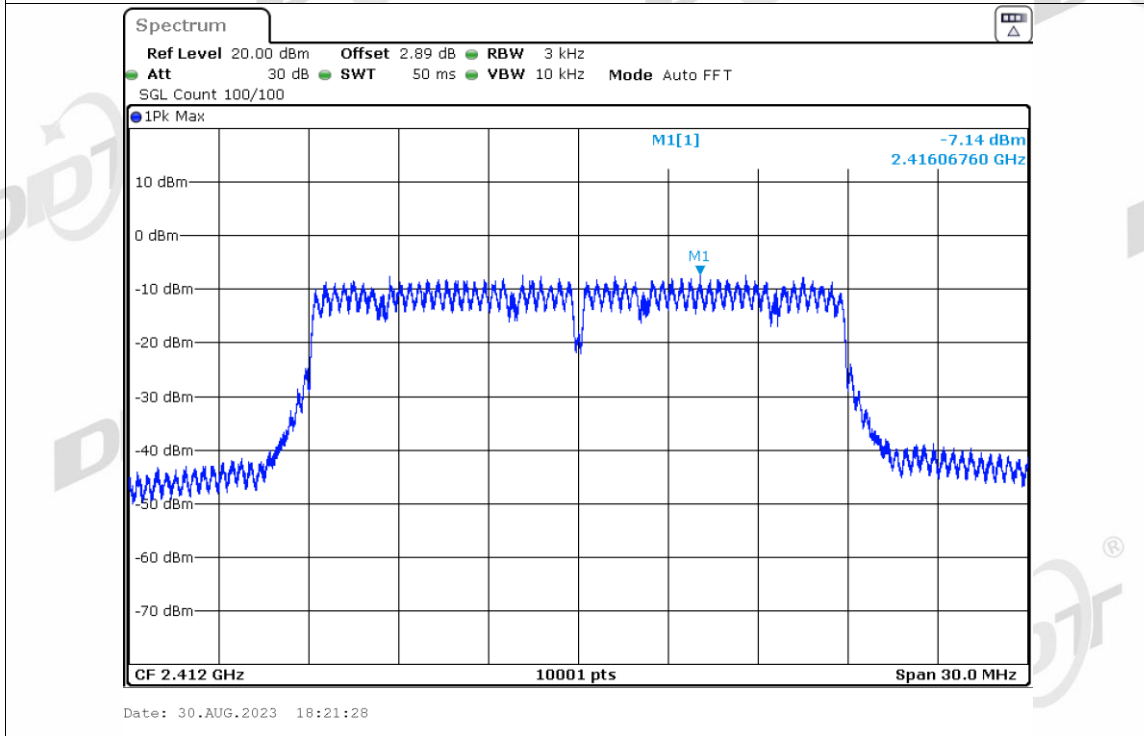

PSD NVNT n20 MCS7 2437MHz Ant1

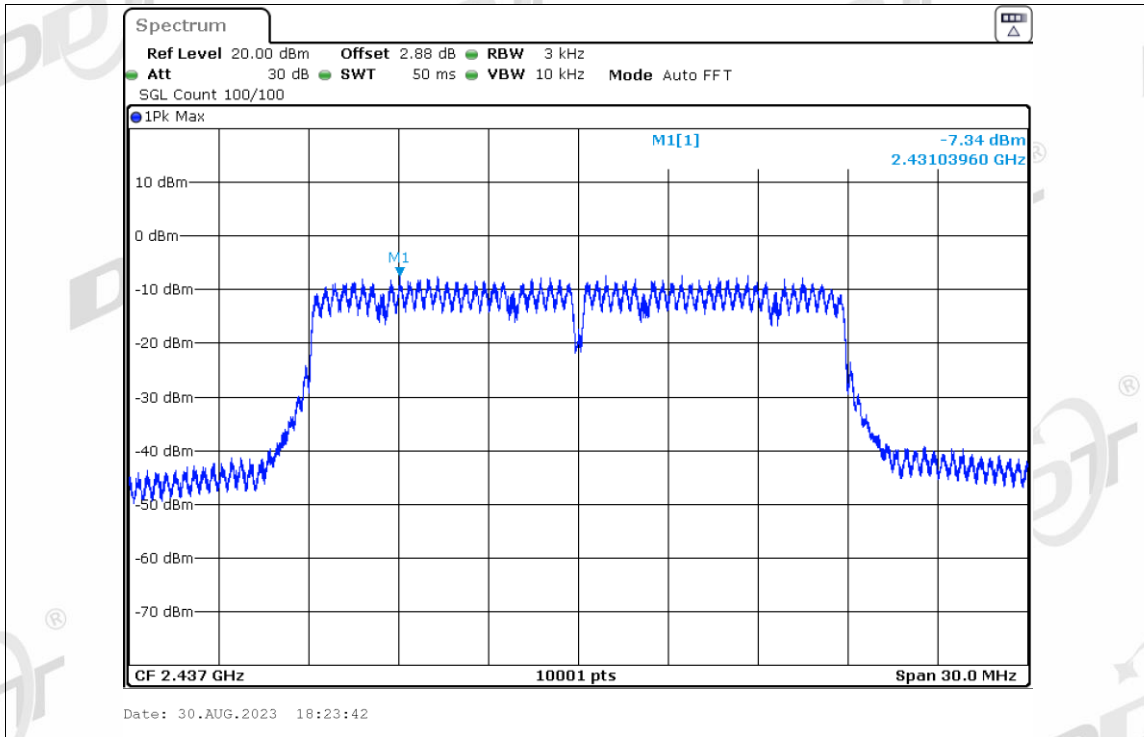

PSD NVNT n20 MCS7 2462MHz Ant1

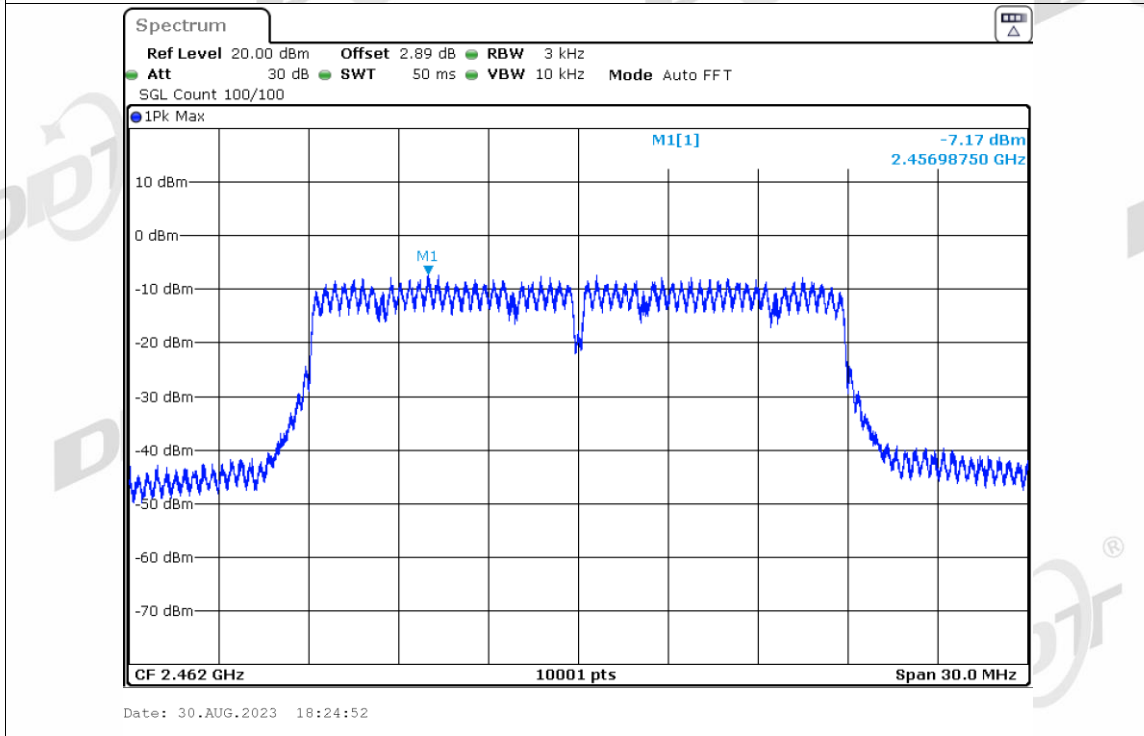

7. Band Edge Compliance (Conducted Method)

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	DTS Channel center frequency
RBW:	100 kHz
VBW:	300 kHz
Span	1.5 times the DTS bandwidth
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:


RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

7.4. Test result


EUT Set Mode	CH or Frequency	Ant1 Result (dBm)	EUT Set Mode	CH or Frequency	Ant1 Result (dBm)
11b	CH1	Pass	11n HT 20	CH1	Pass
	CH11	Pass		CH11	Pass
11g	CH1	Pass	11n HT 40	CH3	--
	CH11	Pass		CH9	--

7.5. original test data

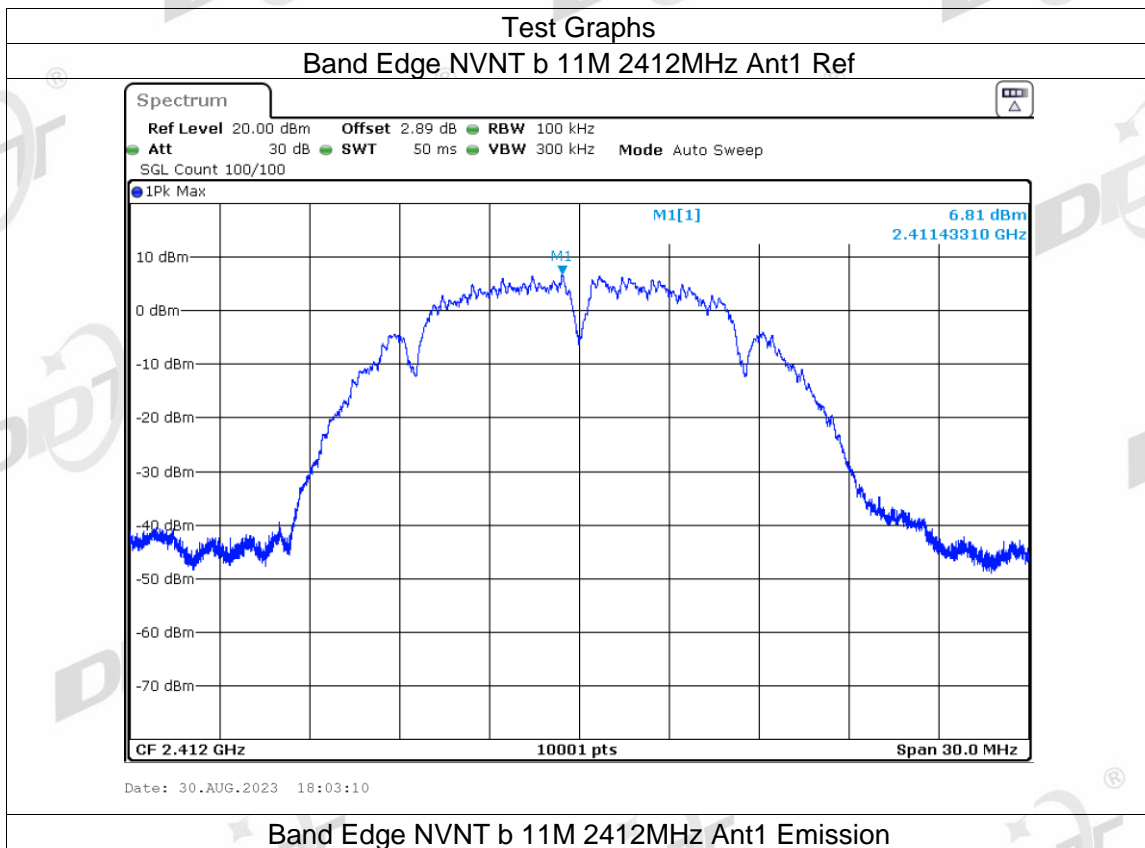


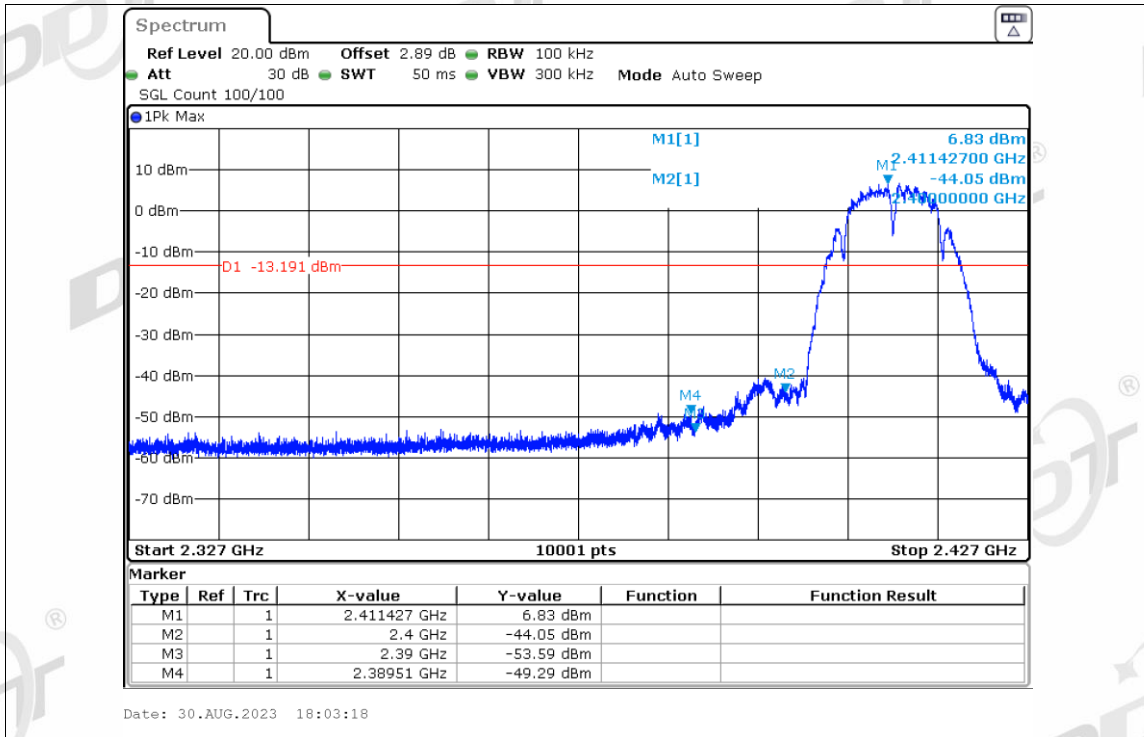


Band Edge NVNT b 11M 2462MHz Ant1 Ref

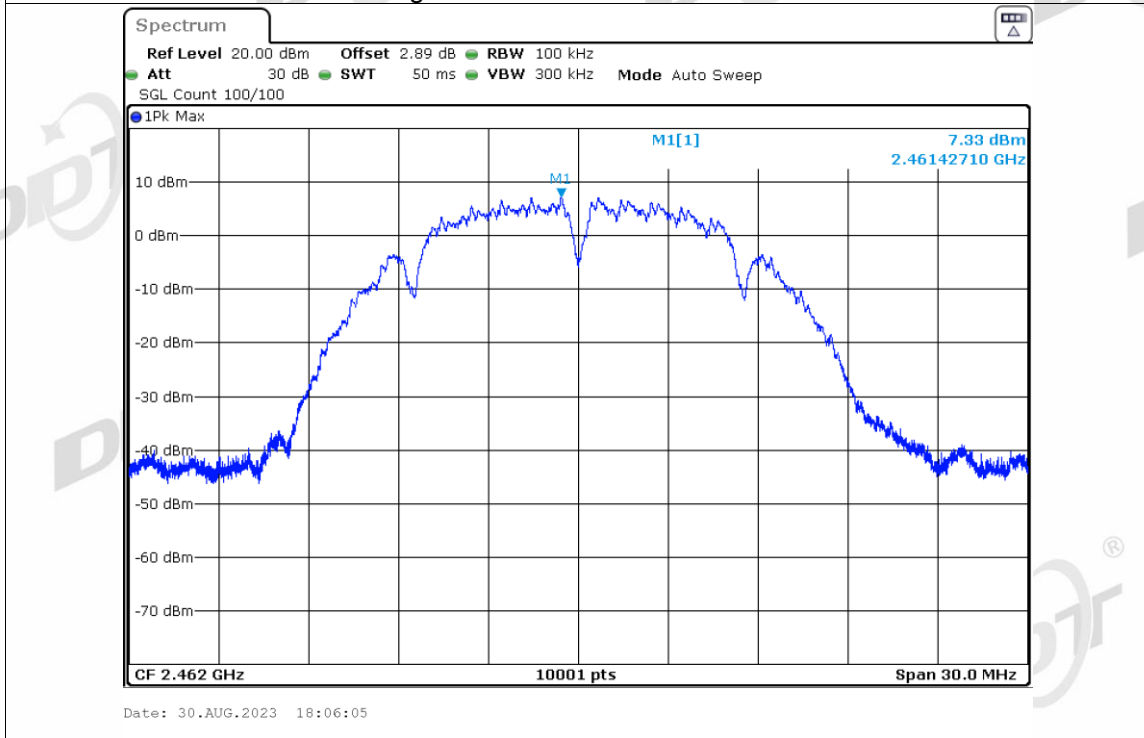


Band Edge NVNT b 11M 2462MHz Ant1 Emission

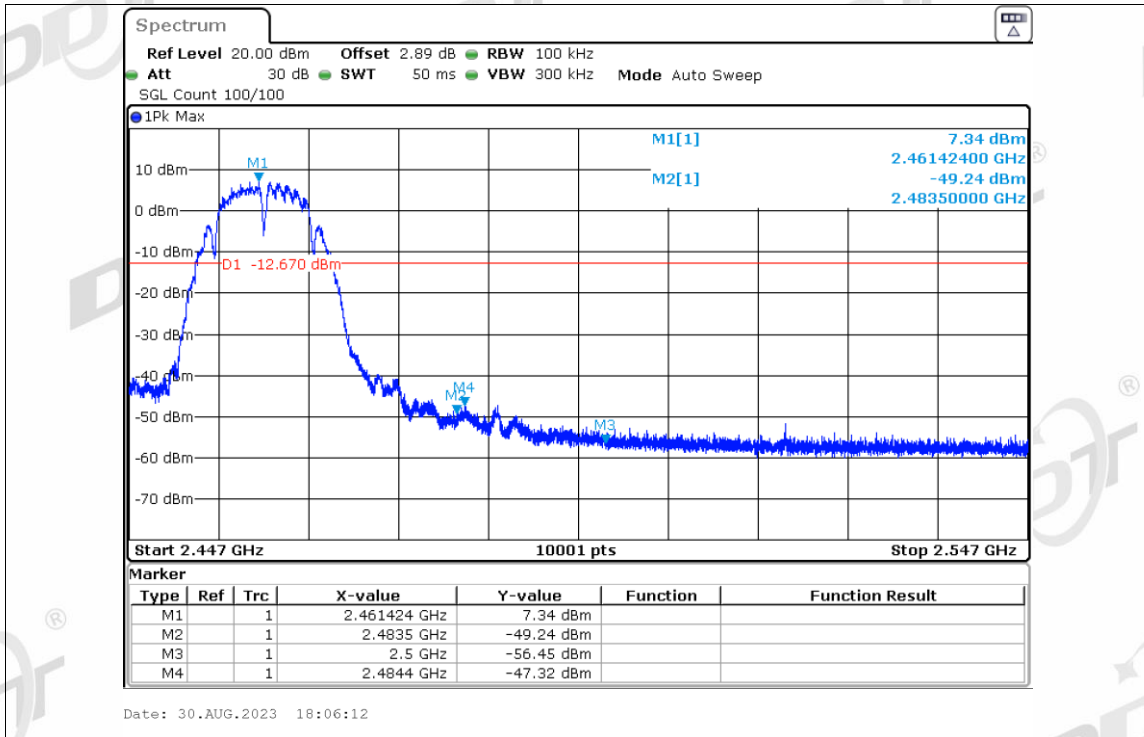


Band Edge NVNT b 1M 2412MHz Ant1 Ref

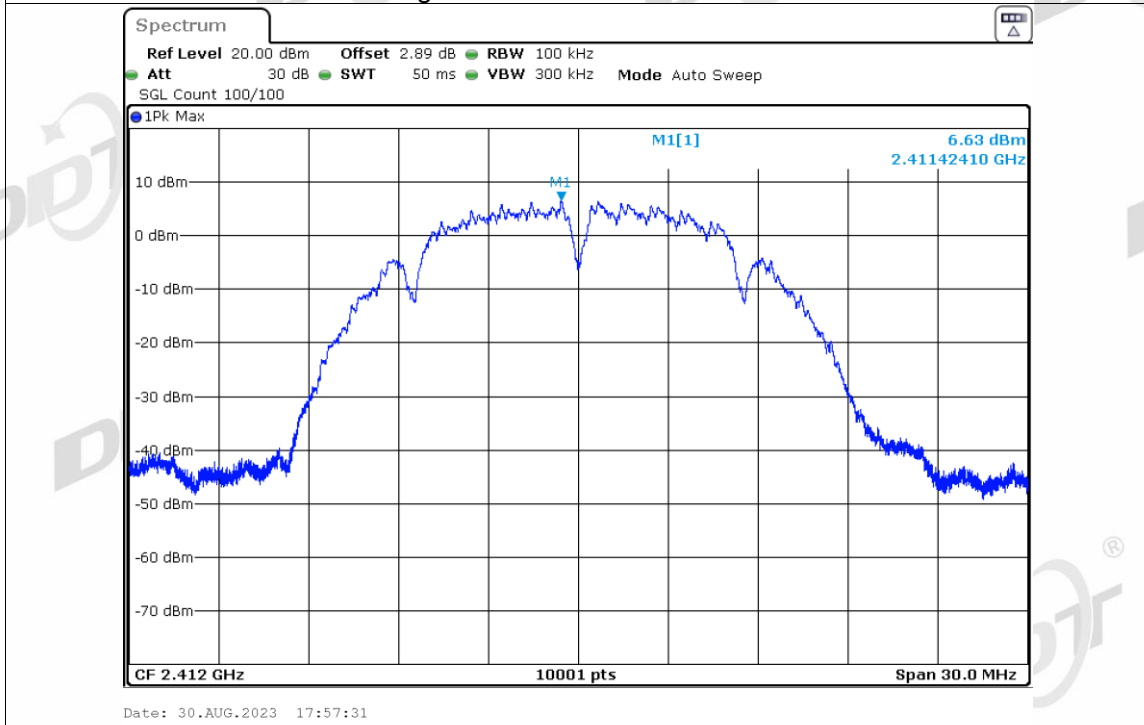


Band Edge NVNT b 1M 2412MHz Ant1 Emission

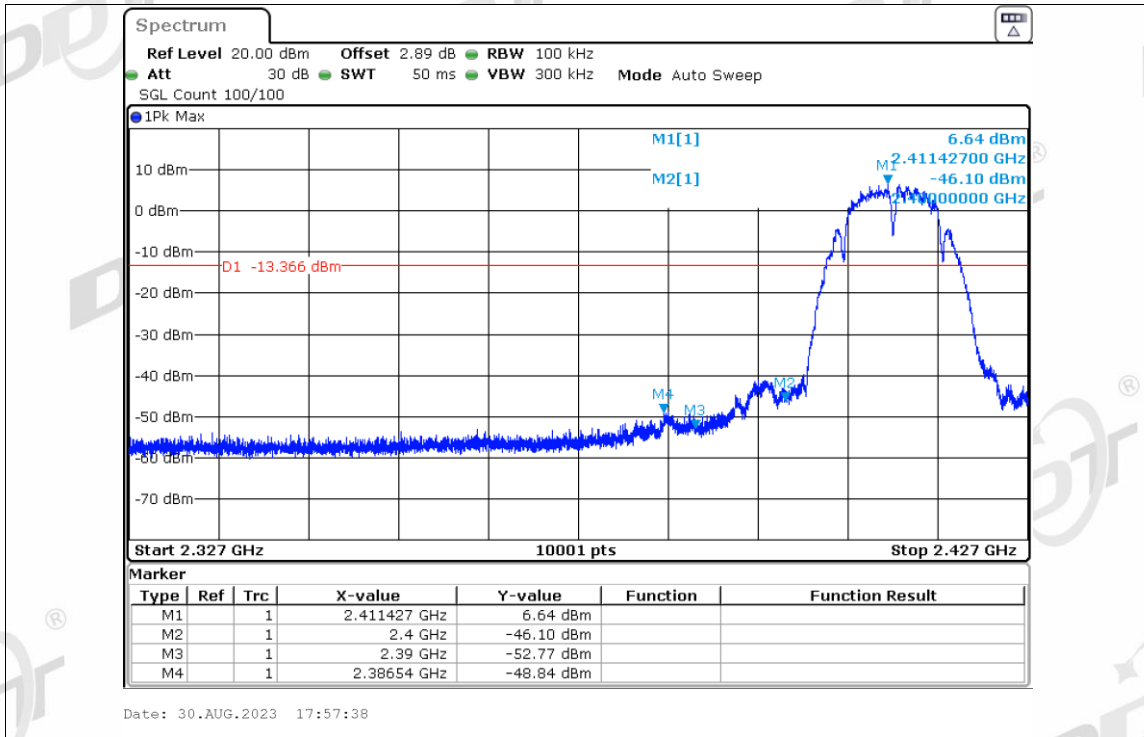


Band Edge NVNT b 1M 2462MHz Ant1 Ref

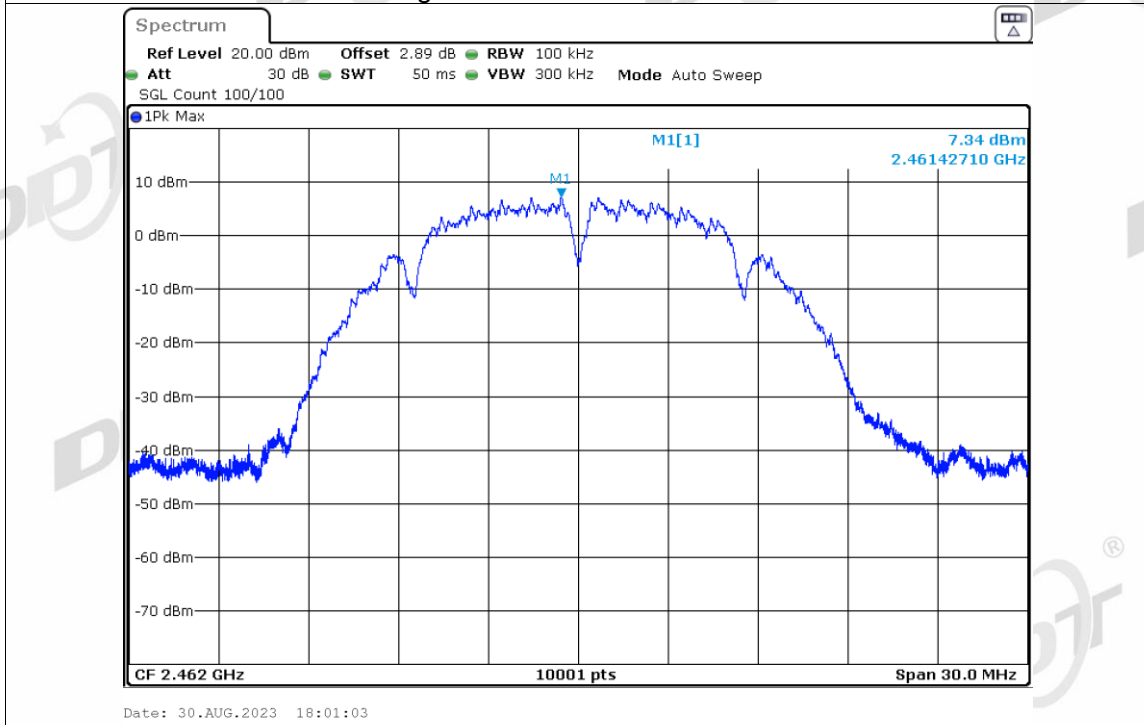

Band Edge NVNT b 1M 2462MHz Ant1 Emission

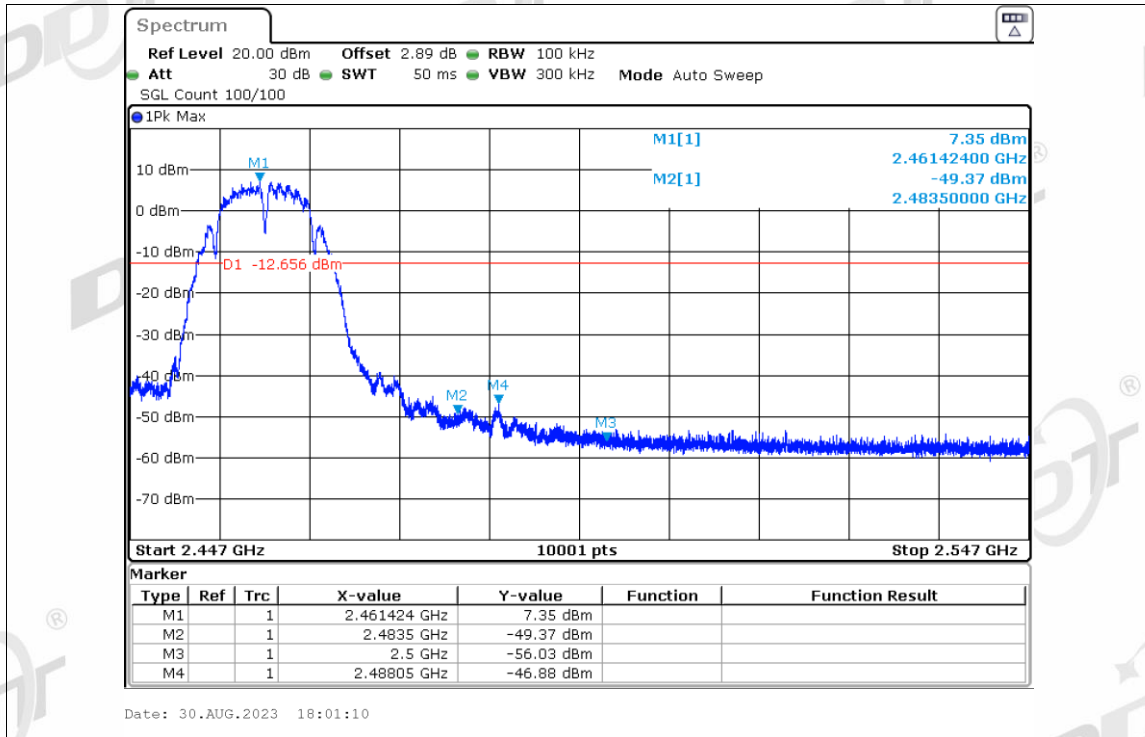

Band Edge NVNT g 54M 2412MHz Ant1 Ref

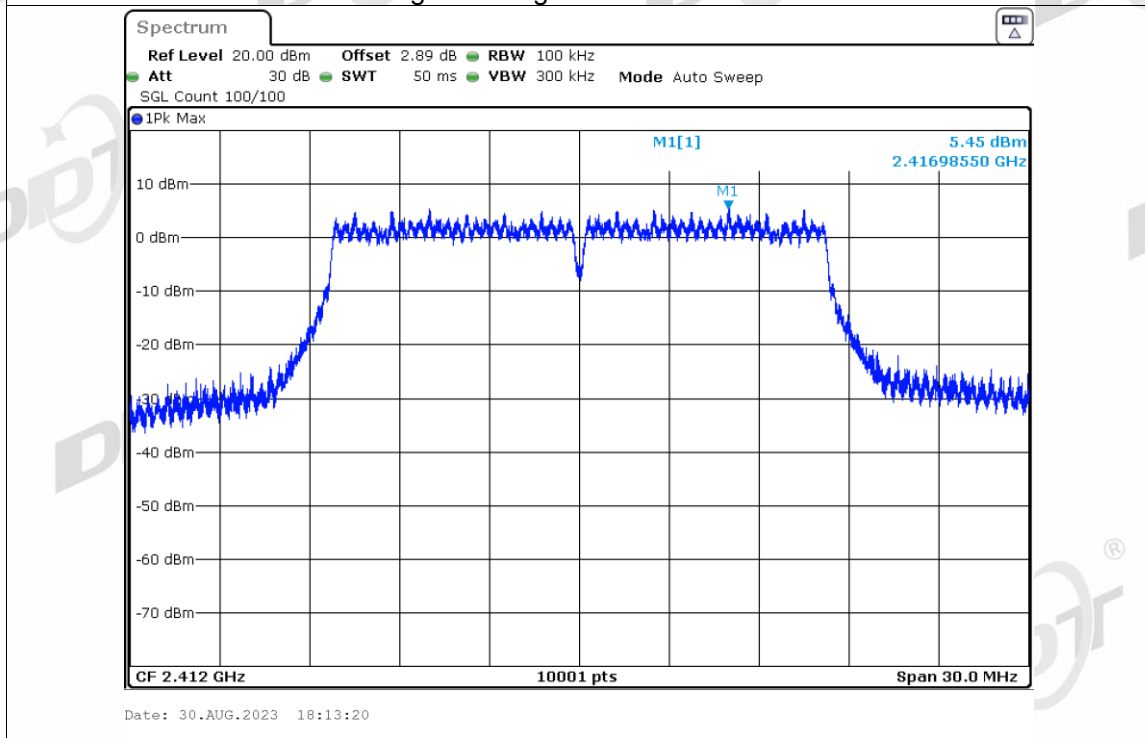

Band Edge NVNT g 54M 2412MHz Ant1 Emission