

TEST REPORT

Reference No...... : WTS20S12100744W001
FCC ID : 2AUJ3MIR-IR300
Applicant..... : SHENZHEN MULTI IR TECHNOLOGY CO., LTD
Address..... : 5th-7th Floor, Building B, No. 8 North District, Shangxue Technology Park, Bantian Street, Longgang, Shenzhen, China
Manufacturer : The same as above
Address..... : The same as above
Product..... : WiFi PIR Motion Detector
Model(s) : MIR-IR300-WF
Brand Name : N/A
Standards..... : FCC CFR47 Part 15.247: 2018
Date of Receipt sample : 2020-12-23
Date of Test : 2020-12-24 to 2021-01-11
Date of Issue..... : 2021-01-12
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

levi xiao

levi Xiao / Project Engineer

Approved by:



Daniel Liu

Daniel Liu / Manager

2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS	2
3 REVISION HISTORY	3
4 GENERAL INFORMATION	4
4.1 GENERAL DESCRIPTION OF E.U.T.	4
4.2 DETAILS OF E.U.T.	4
4.3 CHANNEL LIST	5
4.4 TEST MODE	6
5 TEST SUMMARY	7
6 EQUIPMENT USED DURING TEST	8
6.1 EQUIPMENTS LIST	8
6.2	8
6.3 DESCRIPTION OF SUPPORT UNITS	9
6.4 MEASUREMENT UNCERTAINTY	9
6.5 TEST EQUIPMENT CALIBRATION	9
7 RADIATED EMISSIONS	10
7.1 EUT OPERATION.....	10
7.2 TEST SETUP	11
7.3 SPECTRUM ANALYZER SETUP	12
7.4 TEST PROCEDURE	13
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	13
7.6 SUMMARY OF TEST RESULTS	14
8 CONDUCTED SPURIOUS EMISSIONS	19
8.1 TEST PROCEDURE	19
8.2 TEST RESULT	20
9 BAND EDGE MEASUREMENT	30
9.1 TEST PROCEDURE.....	30
9.2 TEST RESULT	31
10 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT	34
10.1 TEST PROCEDURE:.....	34
10.2 TEST RESULT:	34
11 MAXIMUM PEAK OUTPUT POWER	45
11.1 TEST PROCEDURE:.....	45
11.2 TEST RESULT:	46
12 POWER SPECTRAL DENSITY	52
12.1 TEST PROCEDURE:.....	52
12.2 TEST RESULT:	52
13 ANTENNA REQUIREMENT	58
14 RF EXPOSURE	59
15 PHOTOGRAPHS OF TEST SETUP AND EUT	60

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS20S12100 744W001	2020-12-23	2020-12-24 to 2021-01-11	2021-01-12	original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	WiFi PIR Motion Detector
Model(s):	MIR-IR300-WF
Model Description:	N/A
Wi-Fi Specification:	2.4G-802.11b/g/n HT20
Hardware Version:	MIR-IR300 V0.2
Software Version:	V1.3
Highest frequency (Exclude Radio):	26MHz
Note:	N/A

4.2 Details of E.U.T.

Operation Frequency:	WiFi: 802.11b/g/n HT20: 2412~2462MHz
Max. RF output power:	WiFi(2.4G): 11.90dBm
Type of Modulation:	WiFi: CCK, OFDM
Antenna installation:	WiFi: internal permanent antenna
Antenna Gain:	WiFi(2.4G): -2.0dBi
Ratings:	DC 4.5V from 3*AA Battery

4.3 Channel List

WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
6dB Bandwidth	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
Band Edge	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	N/A
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

6 Equipment Used during Test

6.1 Equipments List

6.2

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2020-07-30	2021-07-29
2.	LISN	R&S	ENV216	100115	2020-07-30	2021-07-29
3.	Cable	Top	TYPE16(3.5M)	-	2020-07-30	2021-07-29
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2020-07-30	2021-07-29
2.	LISN	SCHWARZBECK	NSLK 8128	8128-259	2020-07-30	2021-07-29
3.	Limiter	CYBERTEK	EM5010	261115-001-0024	2020-07-30	2021-07-29
4.	Cable	Laplace	RF300	-	2020-07-30	2021-07-29
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP30	100091	2020-04-20	2021-04-19
2	Amplifier	Agilent	8447D	2944A10178	2020-04-20	2021-04-19
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2020-08-22	2021-08-21
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2020-04-20	2021-04-19
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2020-04-25	2021-04-24
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2020-04-20	2021-04-19
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2020-04-20	2021-04-19
8	Coaxial Cable (above 1GHz)	ZT26-NJ-NJ-8M/FA	1GHz-18GHz	NA	2020-04-20	2021-04-19
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2020-04-20	2021-04-19
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2020-04-25	2021-04-24
3	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2020-05-06	2021-05-05
4	Amplifier	ANRITSU	MH648A	M43381	2020-04-20	2021-04-19

5	Cable	HUBER+SUHNER	CBL2	525178	2020-04-20	2021-04-19
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2019-04-20	2021-04-19
2.	Spectrum Analyzer	R&S	FSP30	100091	2020-04-20	2021-04-19
3.	EXA Signal Analyzer	Malaysia Keysight	N9010A	MY50520207	2020-04-20	2021-04-19

6.3 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.4 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Conducted Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)
Conducted Spurious Emissions test	± 3.12 dB (9kHz~30MHz)
	± 4.21 dB (30M~1000MHz)
	± 5.14 dB (1000M~26500MHz)

6.5 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in WIFI link mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

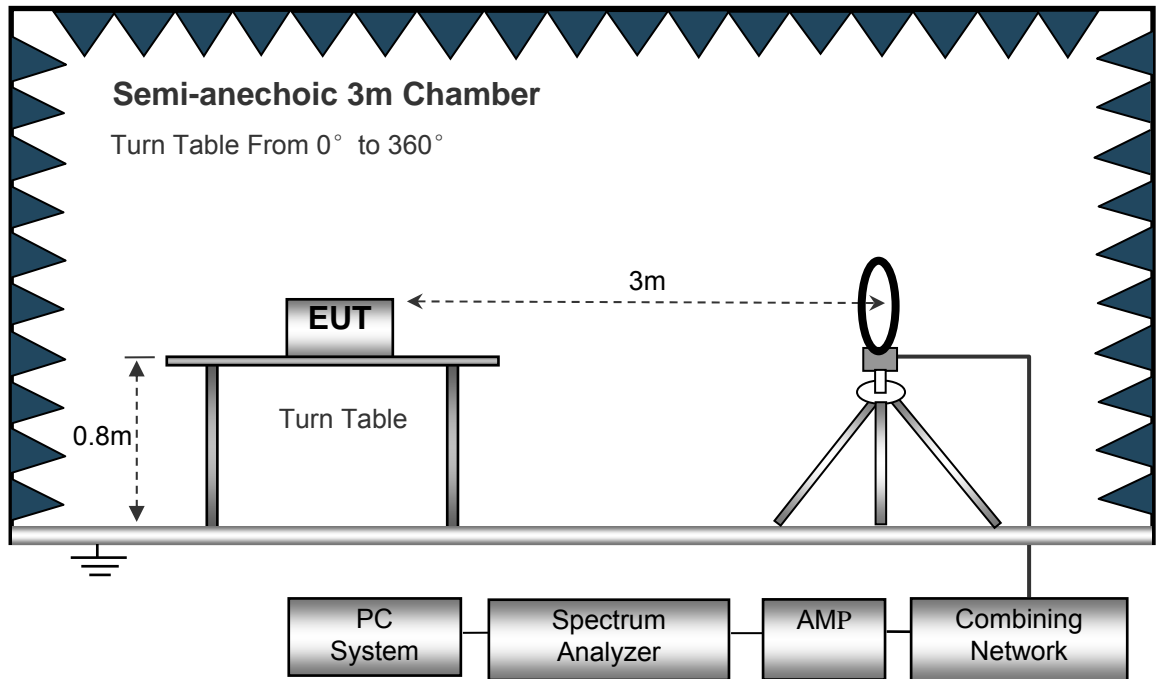

The test setup for emission measurement from 30 MHz to 1 GHz.

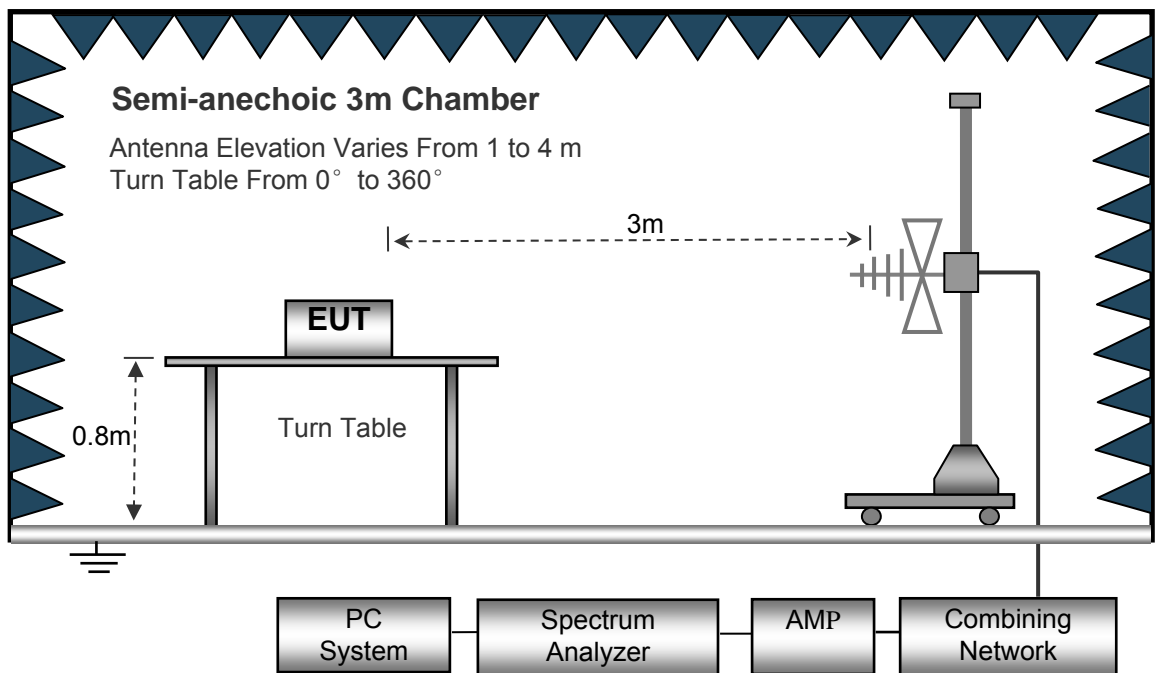

The test setup for emission measurement above 1 GHz.

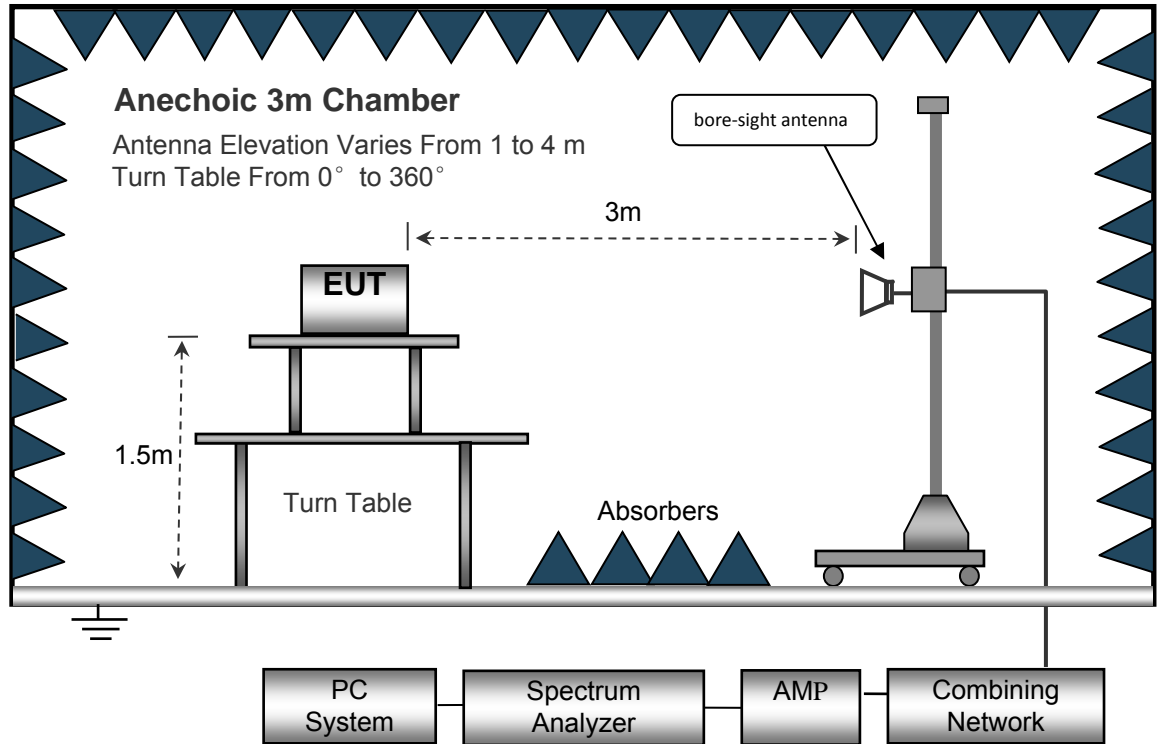

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results


Test Frequency: 9KHz~30MHz

Remark: only the worst data (802.11b/g/n Low channel mode) were recorded.

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
802.11b							
6.032	25.01	QP	21.84	40.00	6.85	29.54	-22.69
8.051	24.56	QP	21.02	40.00	5.58	29.54	-23.96
26.215	24.35	QP	20.55	40.00	4.90	29.54	-24.64
802.11g							
6.032	24.53	QP	21.84	40.00	6.37	29.54	-23.17
8.051	24.71	QP	21.02	40.00	5.73	29.54	-23.81
26.215	25.06	QP	20.55	40.00	5.61	29.54	-23.93
802.11n(HT20)							
6.032	25.17	QP	21.84	40.00	7.01	29.54	-22.53
8.051	25.03	QP	21.02	40.00	6.05	29.54	-23.49
26.215	24.42	QP	20.55	40.00	4.97	29.54	-24.57


Test Frequency : 30MHz ~ 1GHz Remark: only the worst data (802.11n HT20 Low CH mode) were reported

Low Channel – Horizontal

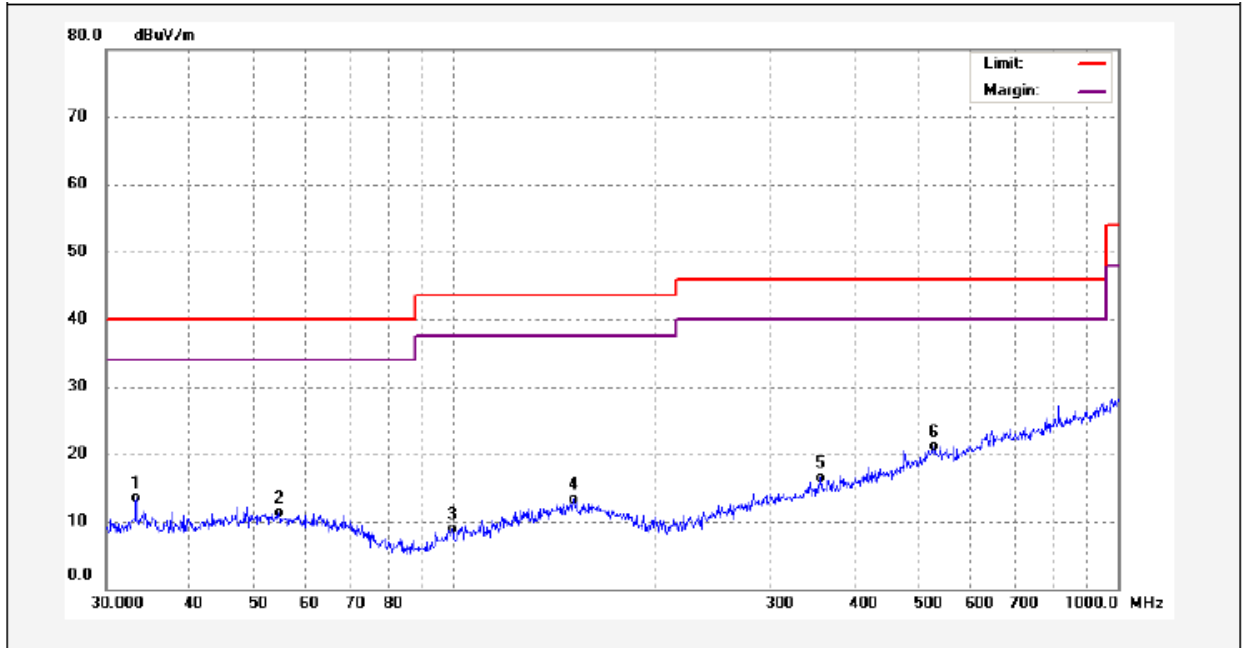

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	33.3279	31.63	-18.03	13.60	40.00	-26.40	QP	
2	54.6429	28.38	-17.04	11.34	40.00	-28.66	QP	
3	99.5281	28.28	-19.44	8.84	43.50	-34.66	QP	
4	151.5972	28.59	-15.32	13.27	43.50	-30.23	QP	
5	356.6758	29.97	-13.51	16.46	46.00	-29.54	QP	
6	528.2458	29.56	-8.46	21.10	46.00	-24.90	QP	


Low Channel – Vertical

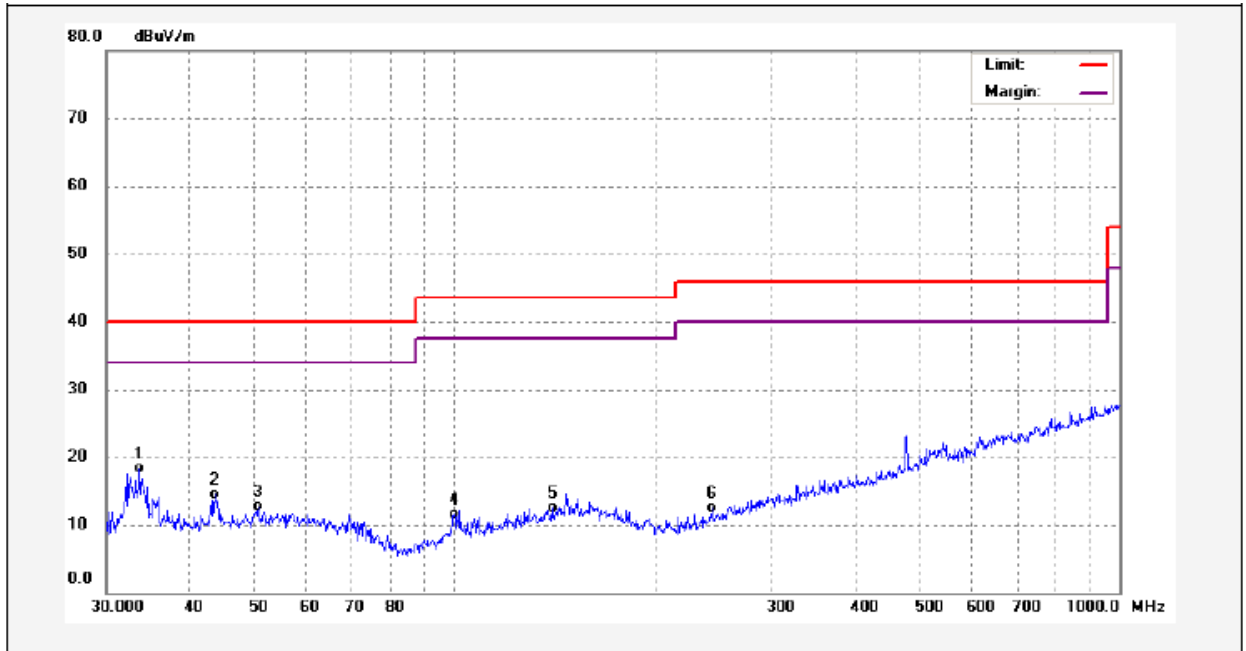

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	33.6802	36.29	-18.01	18.28	40.00	-21.72	QP	
2	43.6584	31.89	-17.46	14.43	40.00	-25.57	QP	
3	50.7637	29.56	-16.88	12.68	40.00	-27.32	QP	
4	99.8777	30.87	-19.36	11.51	43.50	-31.99	QP	
5	140.3421	28.42	-15.83	12.59	43.50	-30.91	QP	
6	244.2321	29.55	-16.96	12.59	46.00	-33.41	QP	


Test Frequency : Above 1GHzRemark: only the worst data (802.11n HT20 Low CH mode) were reported

Low Channel – Horizontal

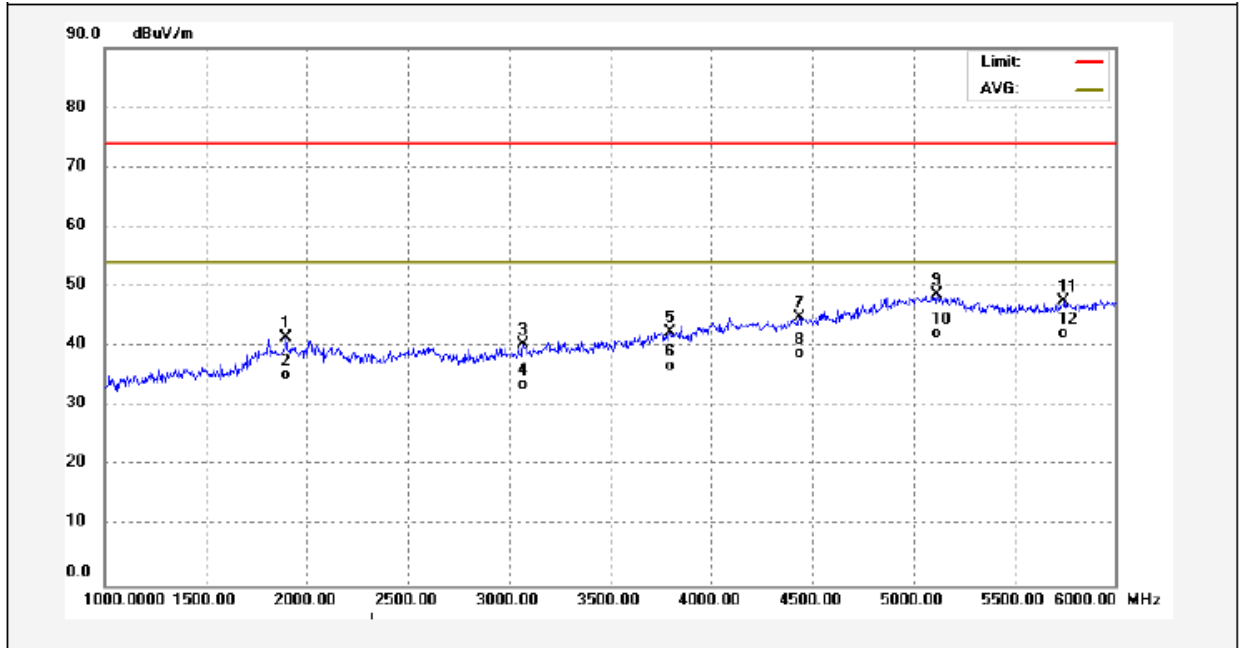

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1895.000	50.81	-9.21	41.60	74.00	-32.40	peak	
2	1895.000	44.41	-9.21	35.20	54.00	-18.80	AVG	
3	3070.000	47.71	-7.30	40.41	74.00	-33.59	peak	
4	3070.000	40.95	-7.30	33.65	54.00	-20.35	AVG	
5	3795.000	49.13	-6.72	42.41	74.00	-31.59	peak	
6	3795.000	43.57	-6.72	36.85	54.00	-17.15	AVG	
7	4435.000	50.57	-5.70	44.87	74.00	-29.13	peak	
8	4435.000	44.60	-5.70	38.90	54.00	-15.10	AVG	
9	5115.000	52.63	-3.81	48.82	74.00	-25.18	peak	
10	5115.000	45.91	-3.81	42.10	54.00	-11.90	AVG	
11	5745.000	50.26	-2.71	47.55	74.00	-26.45	peak	
12	5745.000	45.01	-2.71	42.30	54.00	-11.70	AVG	

Low Channel – Vertical

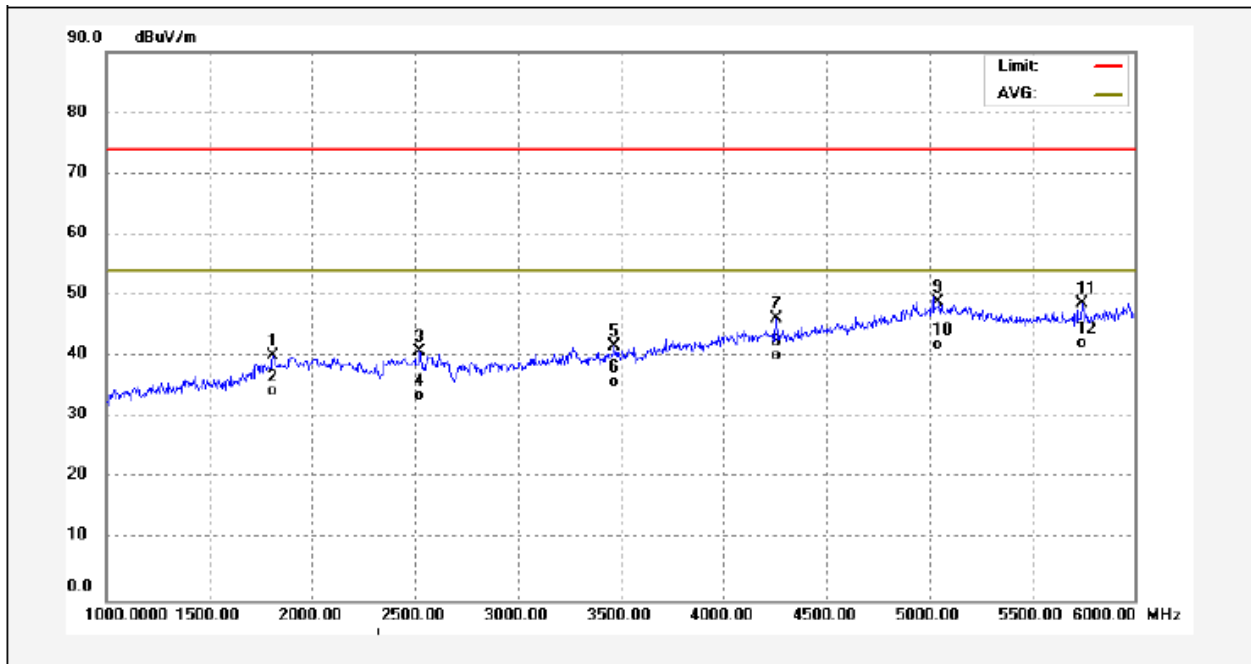

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1810.000	51.75	-11.64	40.11	74.00	-33.89	peak	
2	1810.000	45.94	-11.64	34.30	54.00	-19.70	AVG	
3	2525.000	53.03	-12.13	40.90	74.00	-33.10	peak	
4	2525.000	45.75	-12.13	33.62	54.00	-20.38	AVG	
5	3470.000	51.05	-9.32	41.73	74.00	-32.27	peak	
6	3470.000	45.12	-9.32	35.80	54.00	-18.20	AVG	
7	4255.000	52.16	-6.03	46.13	74.00	-27.87	peak	
8	4255.000	46.23	-6.03	40.20	54.00	-13.80	AVG	
9	5045.000	50.34	-1.51	48.83	74.00	-25.17	peak	
10	5045.000	43.51	-1.51	42.00	54.00	-12.00	AVG	
11	5745.000	51.29	-2.57	48.72	74.00	-25.28	peak	
12	5745.000	44.70	-2.57	42.13	54.00	-11.87	AVG	

8 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to ≈ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW $\approx [3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.


Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

8.2 Test Result


9KHz – 30MHz

802.11b


Low Channel

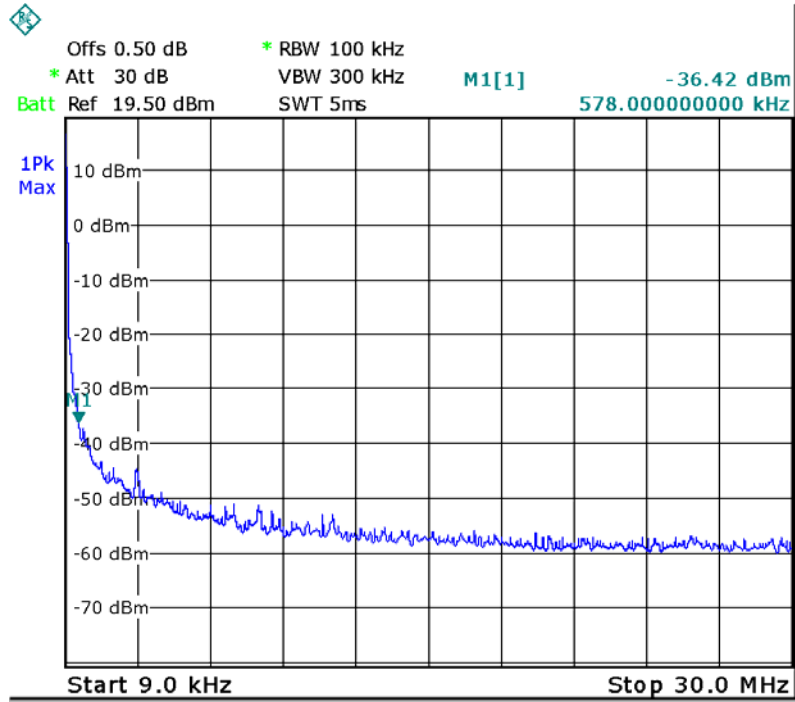

Middle Channel

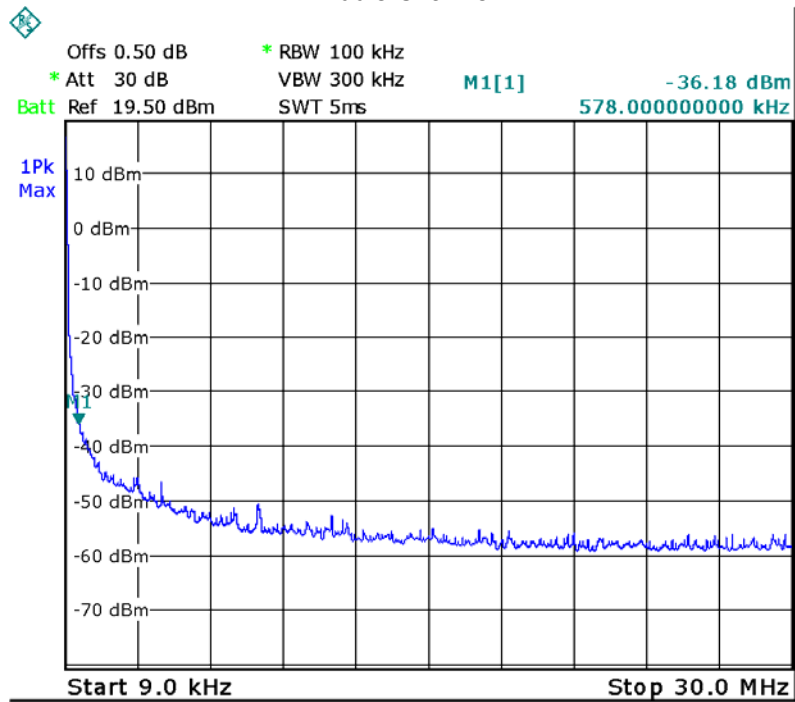


High Channel

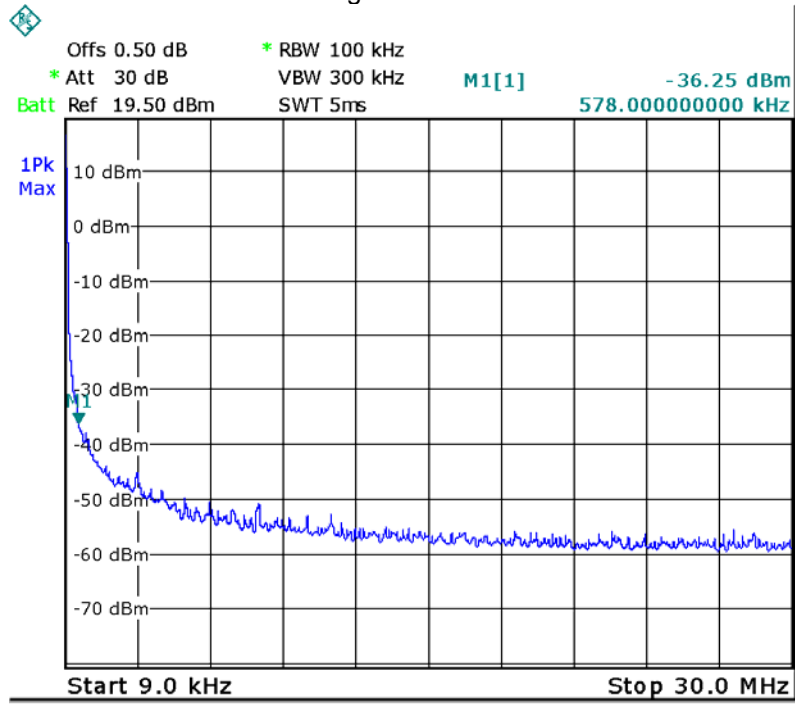


802.11g


Low Channel

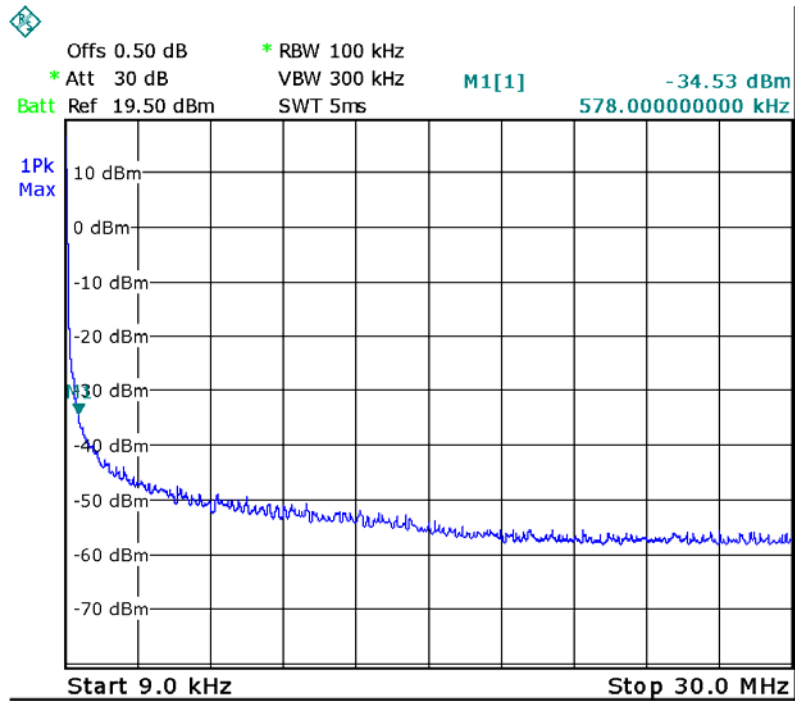

Middle Channel

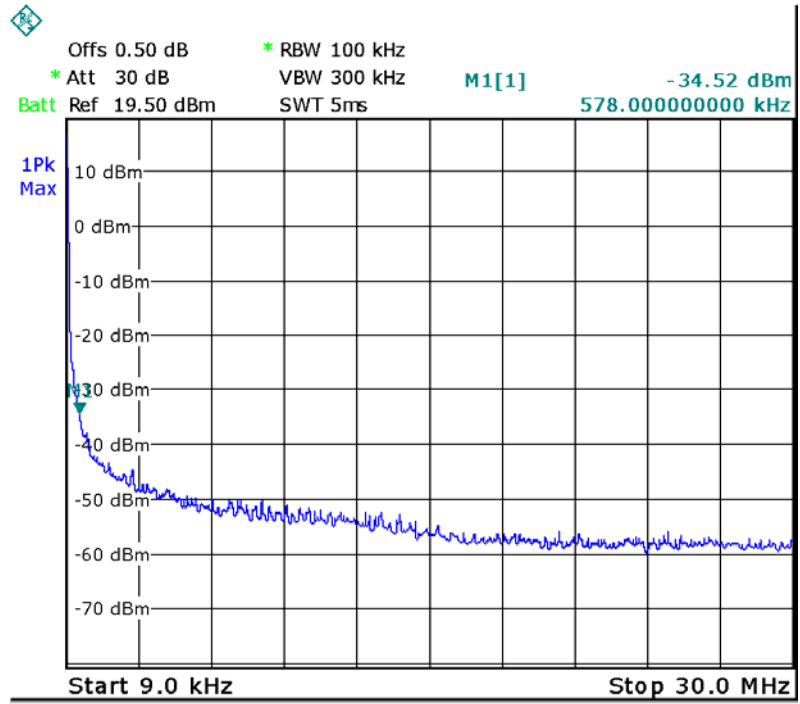


High Channel

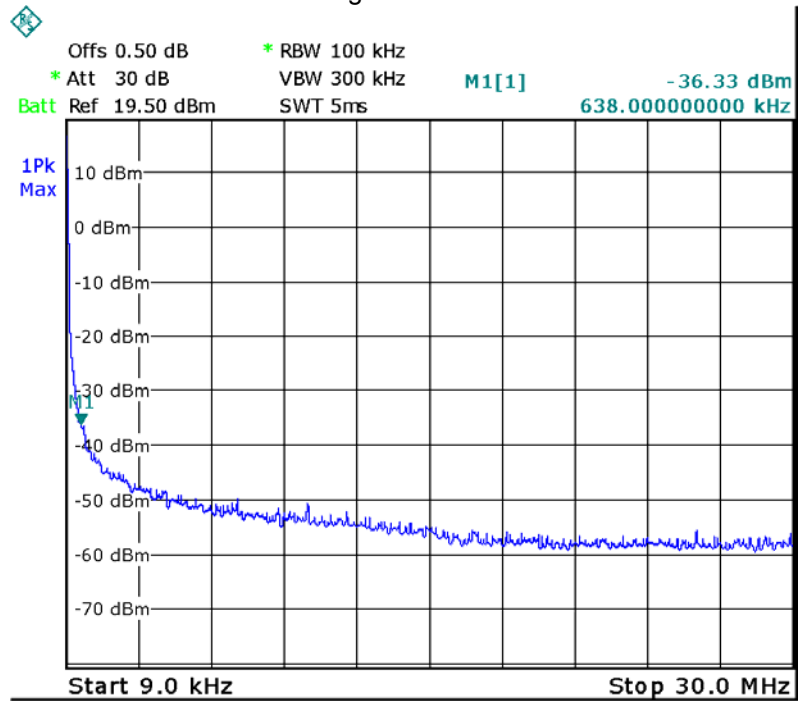



802.11n HT20

Low Channel

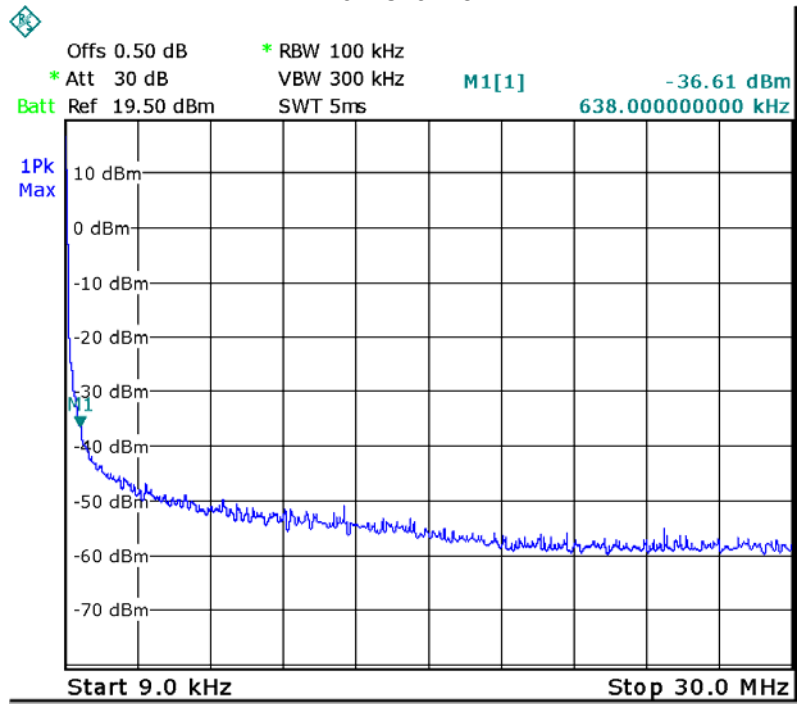

Middle Channel

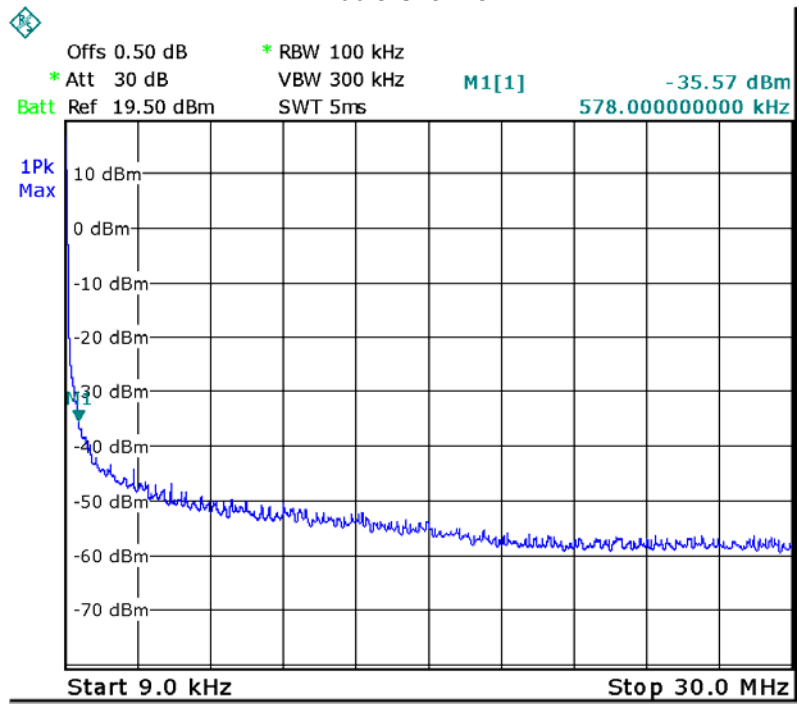

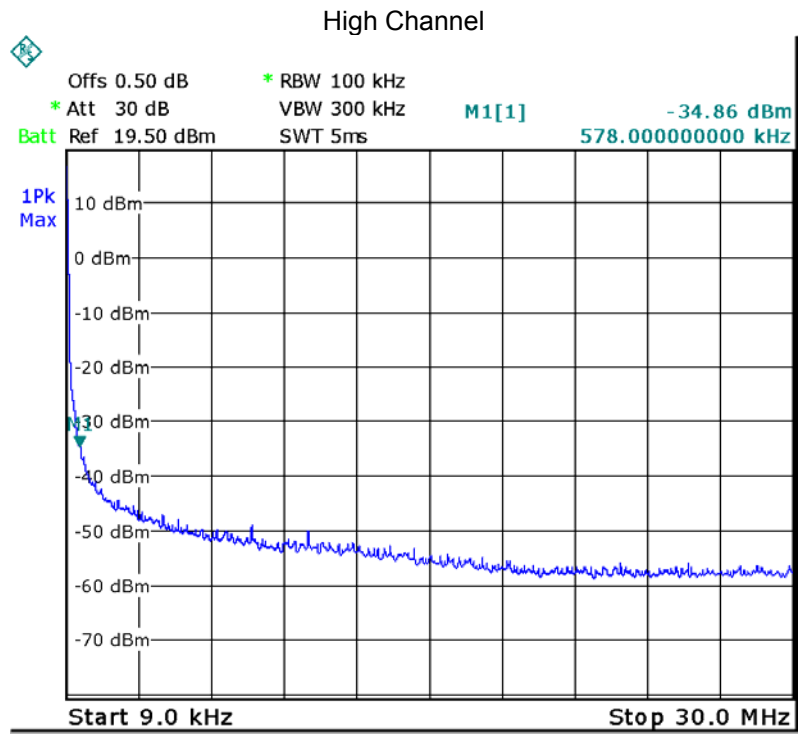


Above 30MHz

802.11b


Low Channel

Fundamental

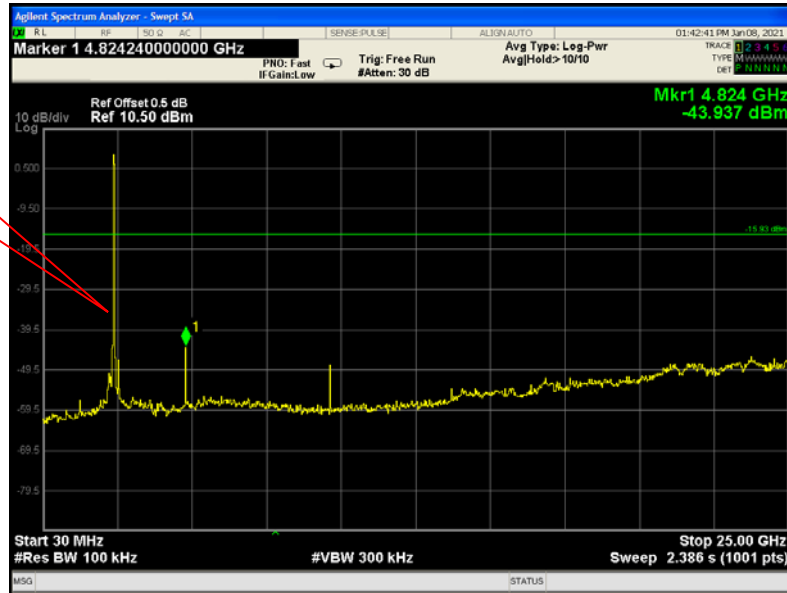


Middle Channel

Fundamental

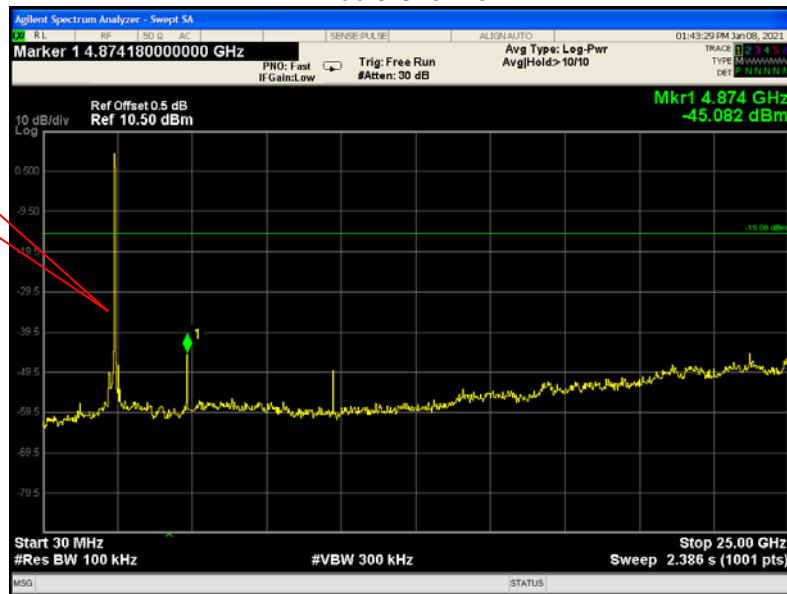

High Channel


Fundamental

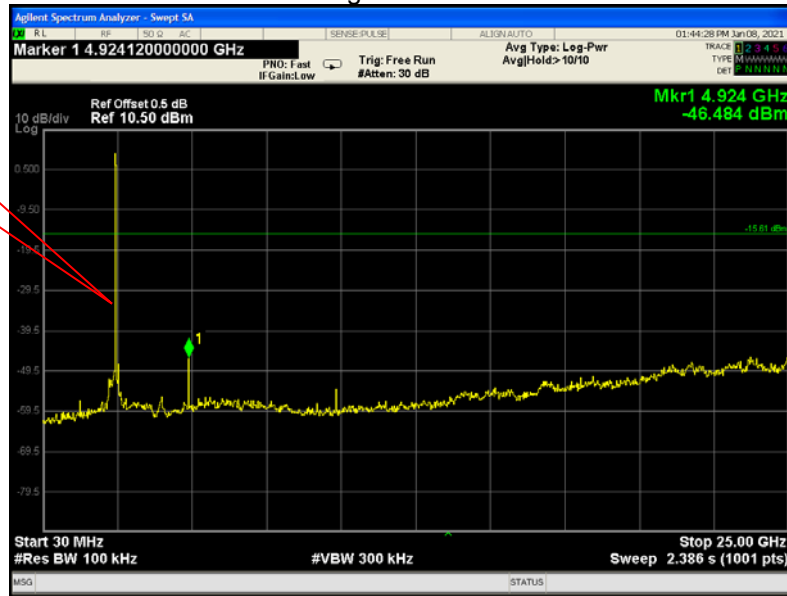

802.11g


Low Channel

Fundamental

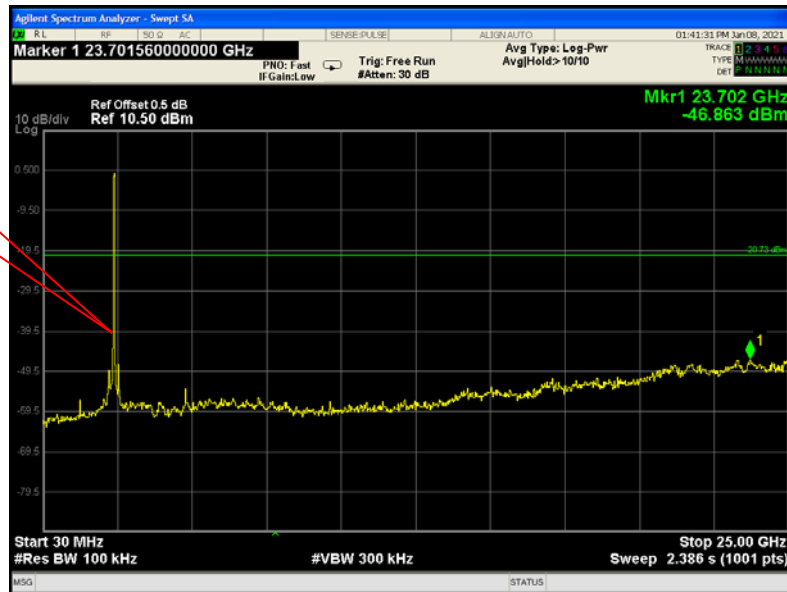


Middle Channel

Fundamental

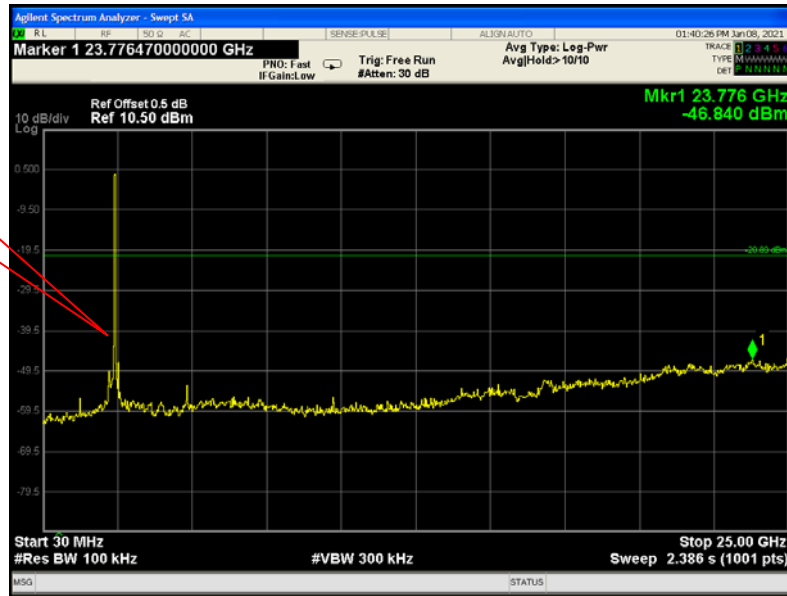

High Channel


Fundamental

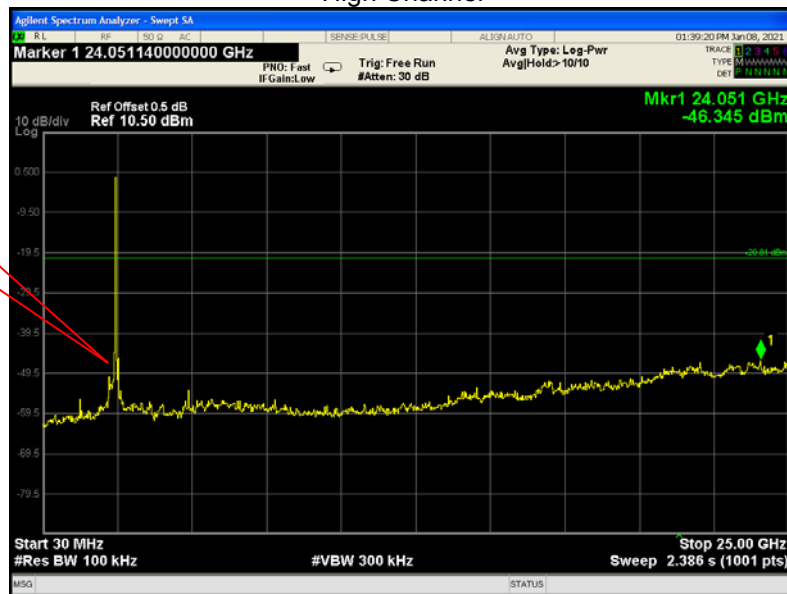

802.11n HT20

Low Channel

Fundamental

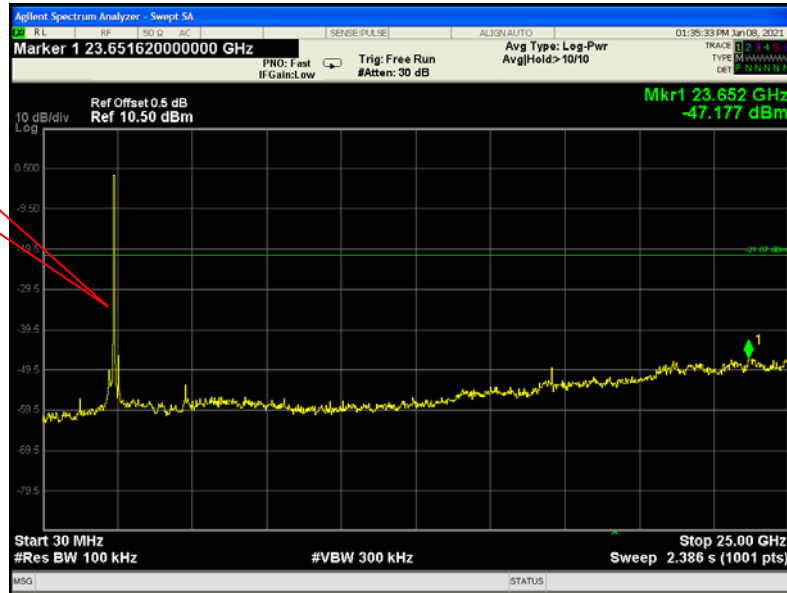


Middle Channel

Fundamental



High Channel

Fundamental

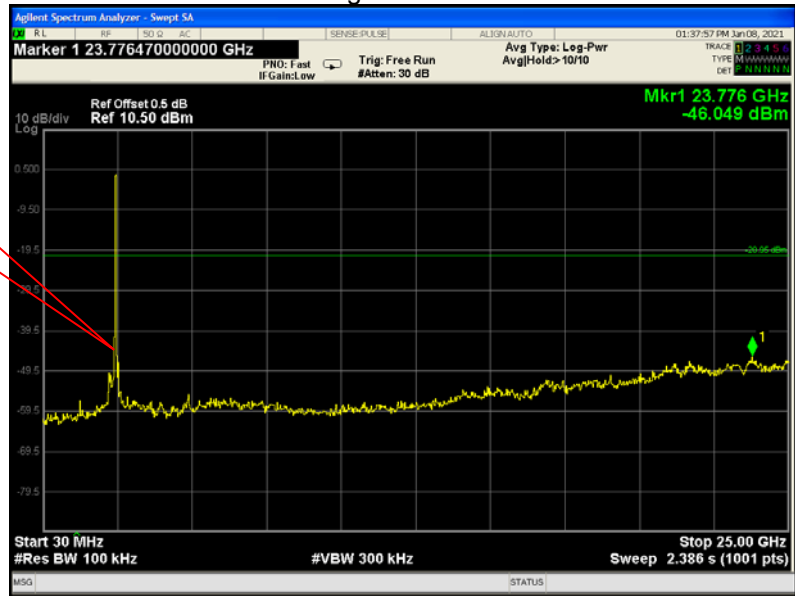

9 Band Edge Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

Test Limit: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



Test Mode: Transmitting

9.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.2 Test Result


Test result plots shown as follows:

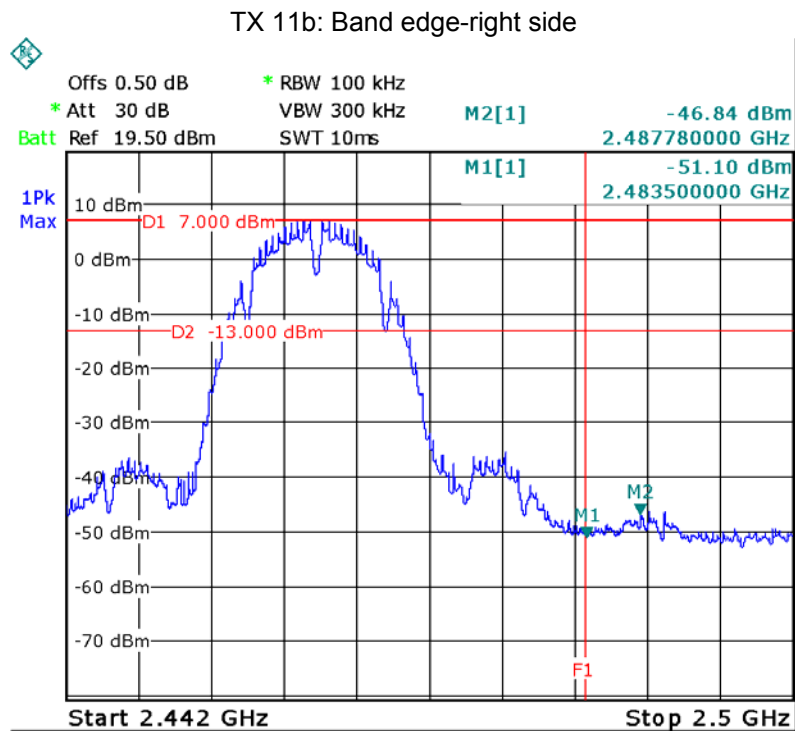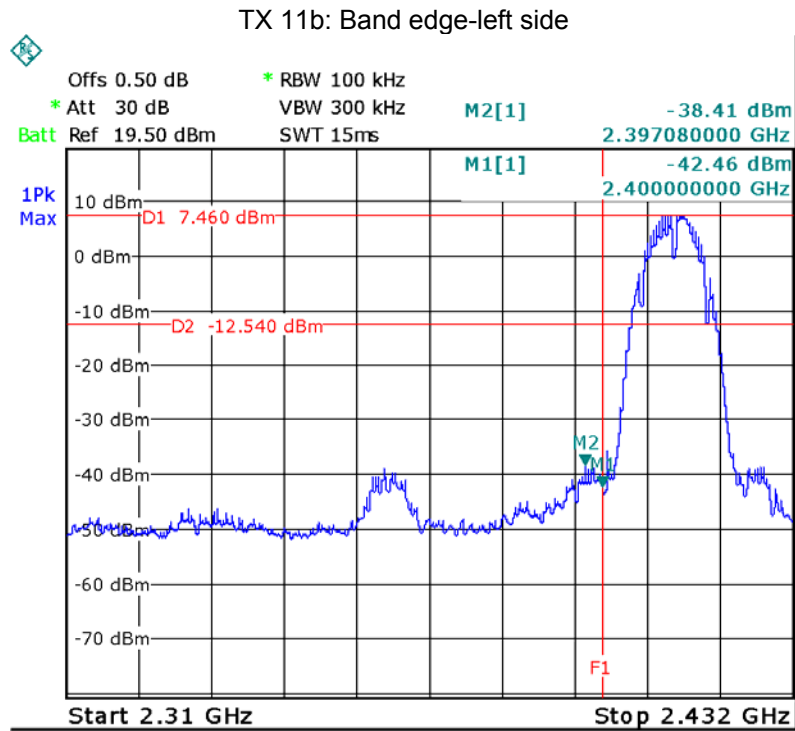


TX 11g: Band edge-left side

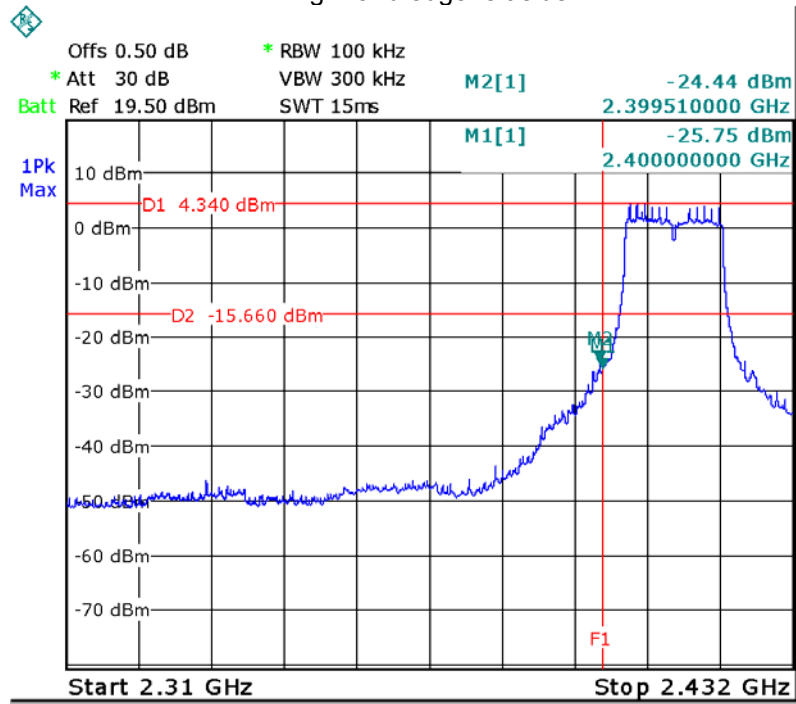


TX 11g: Band edge-right side

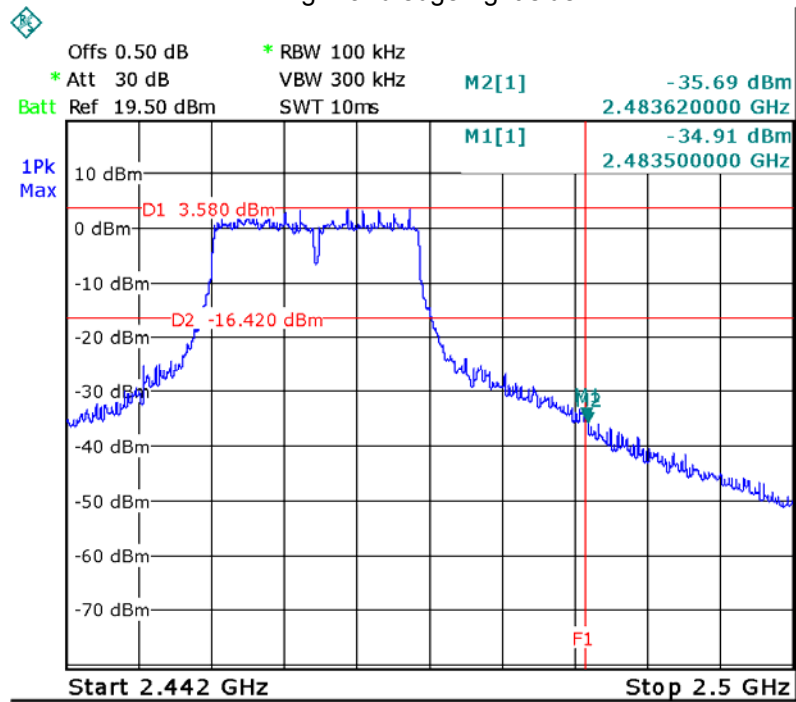

TX 11n HT20: Band edge-left side

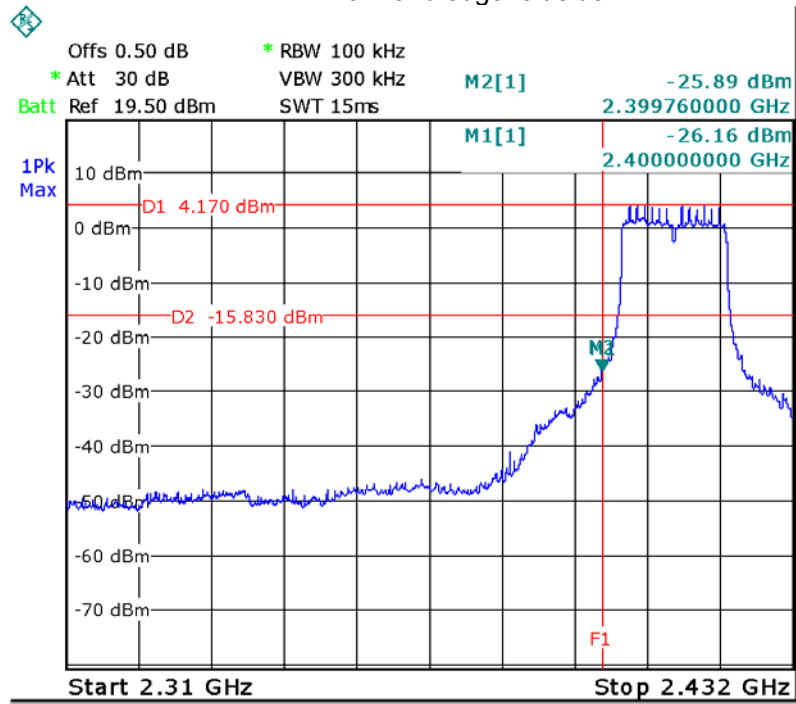

TX 11n HT20: Band edge-right side

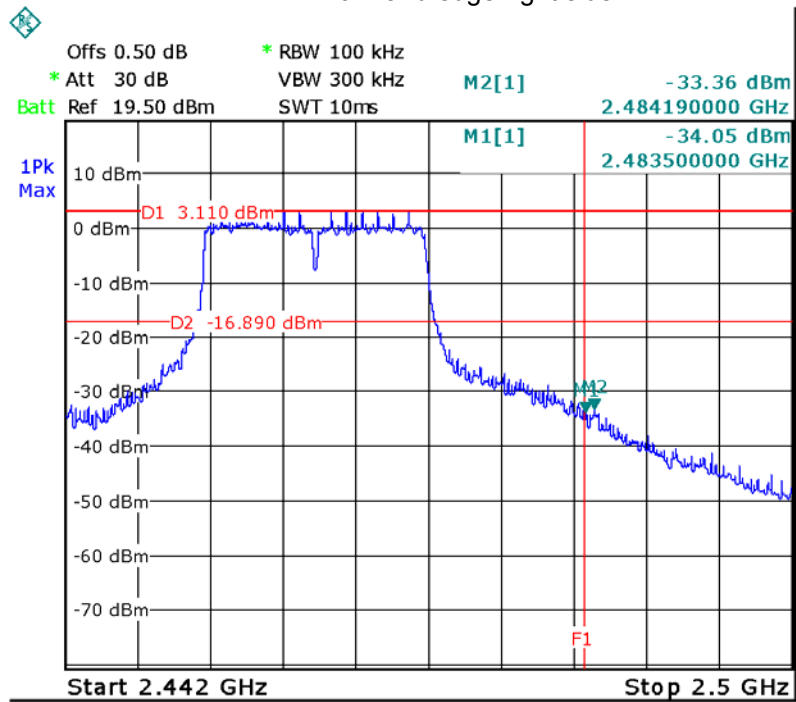

10 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;

ANSI C63.10:2013

10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


10.2 Test Result:

Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	9.102	12.519
	Channel 6	8.974	12.519
	Channel 11	9.006	12.487
TX 11g	Channel 1	16.417	16.517
	Channel 6	16.467	16.517
	Channel 11	16.417	16.517
TX 11n HT20	Channel 1	17.353	17.623
	Channel 6	17.623	17.623
	Channel 11	17.623	17.677


Test result plot:



6dB Bandwidth



Mode: TX 11b channel 1

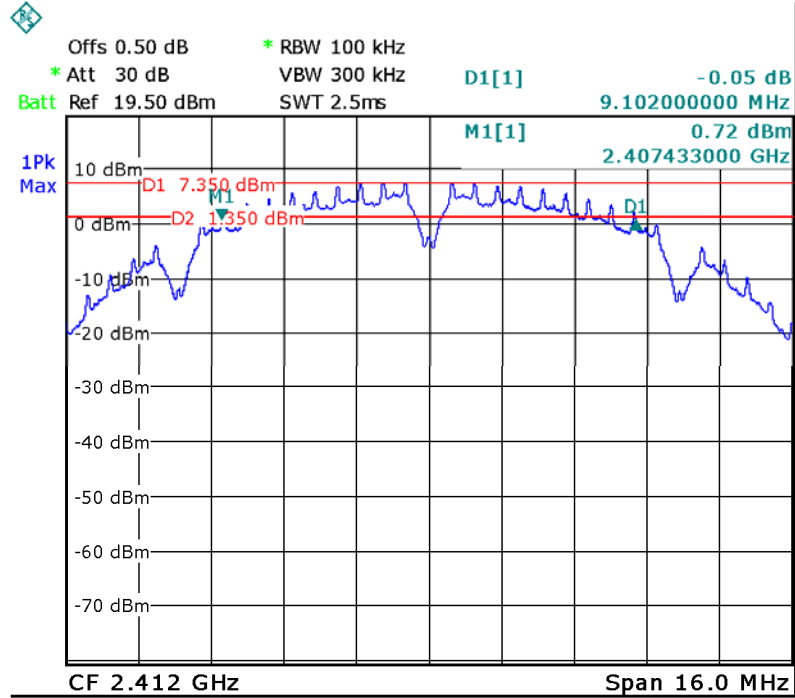


Mode: TX 11b channel 6

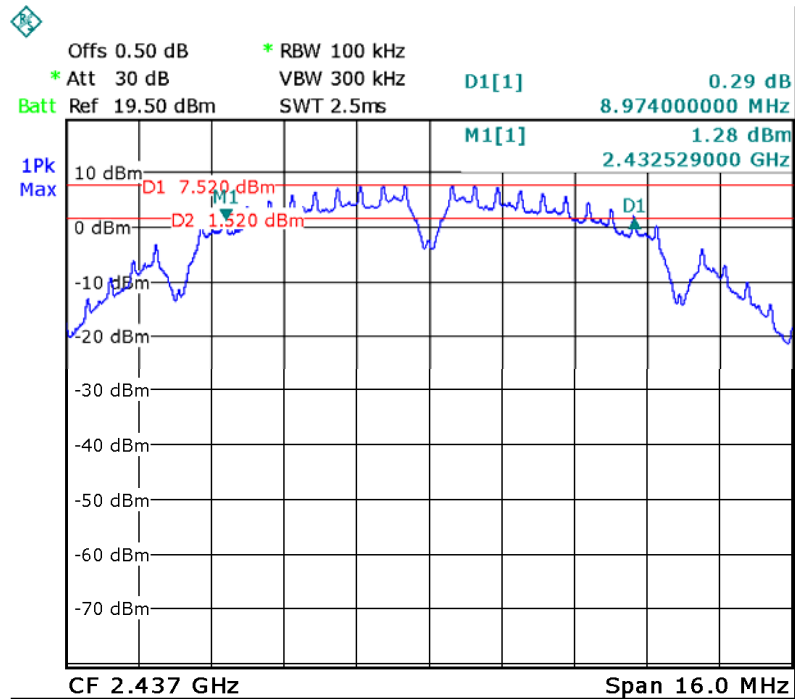

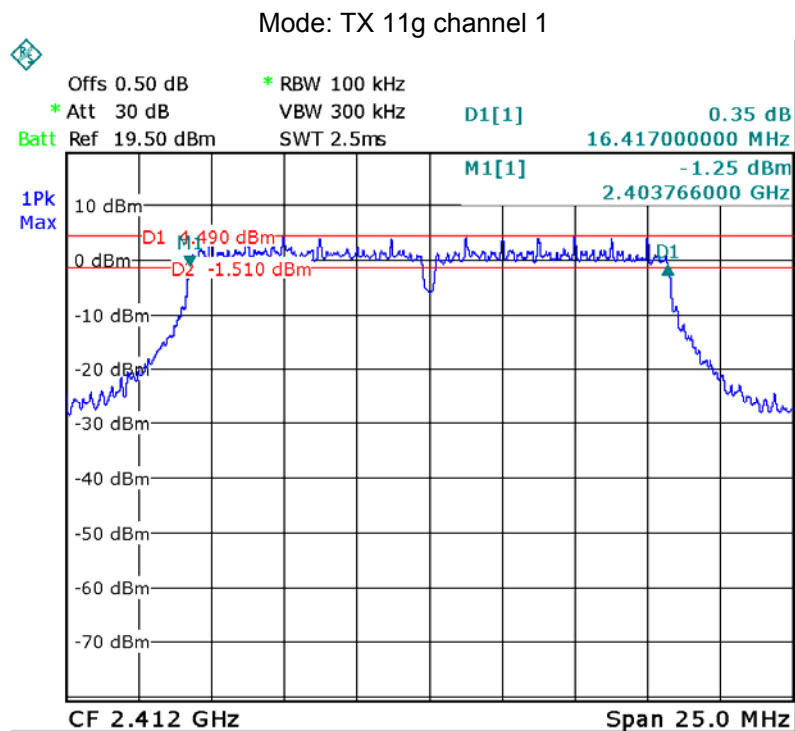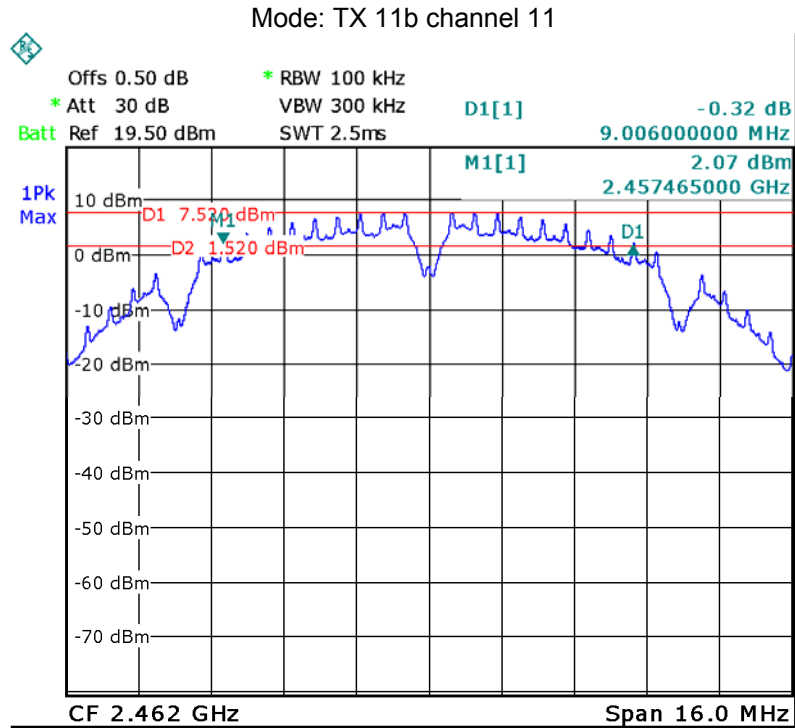


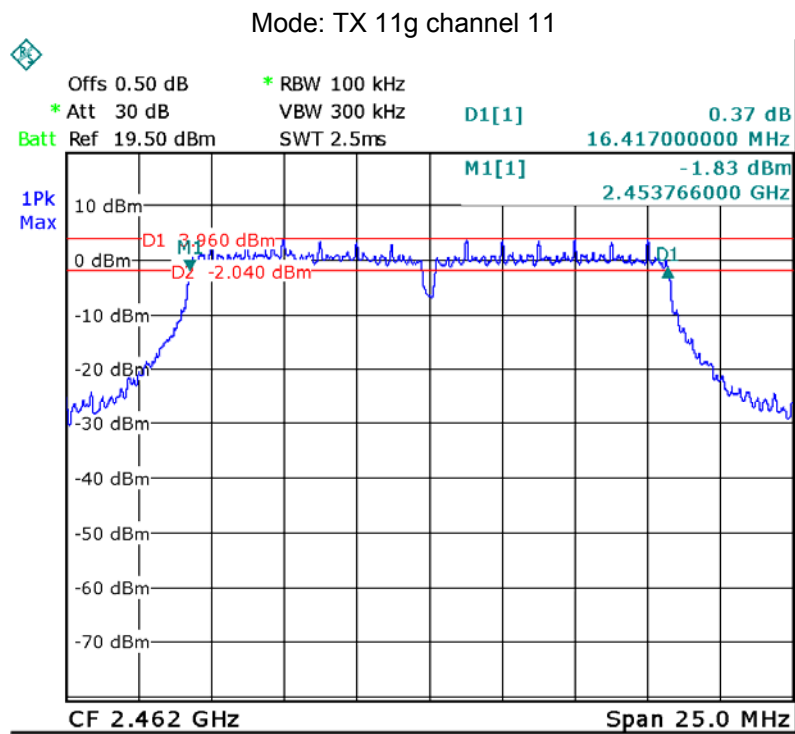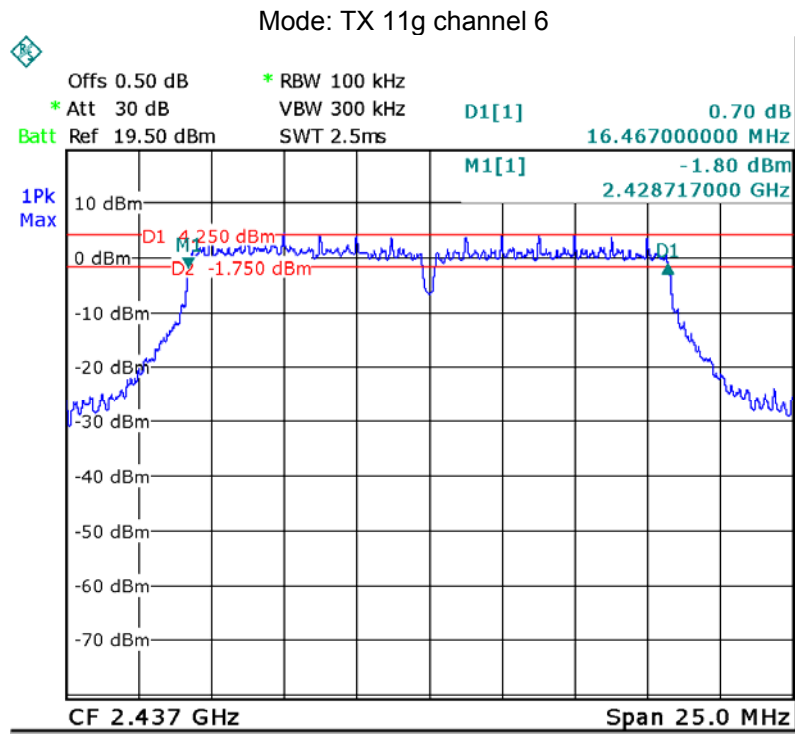


Mode: TX 11n HT20 channel 1

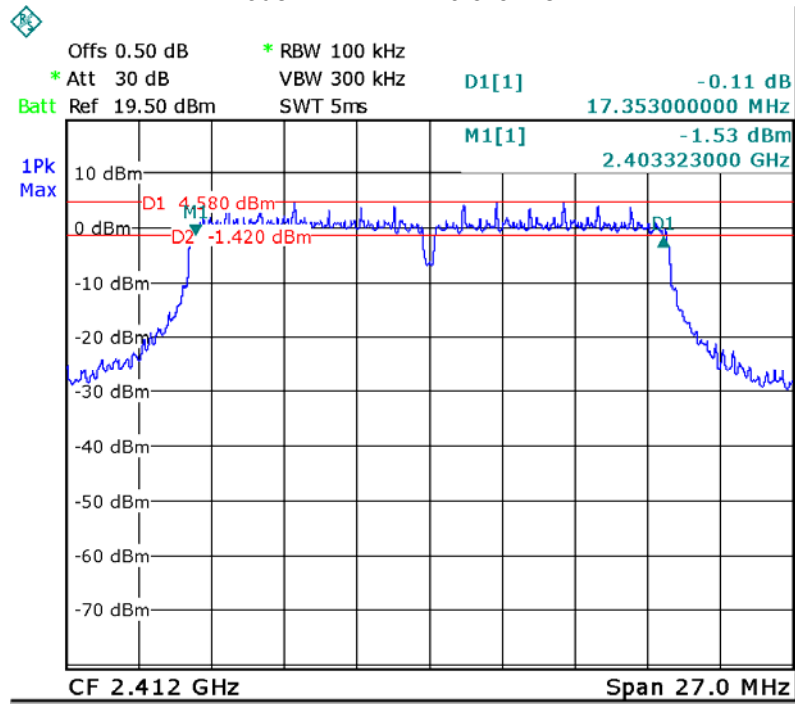


Mode: TX 11n HT20 channel 6

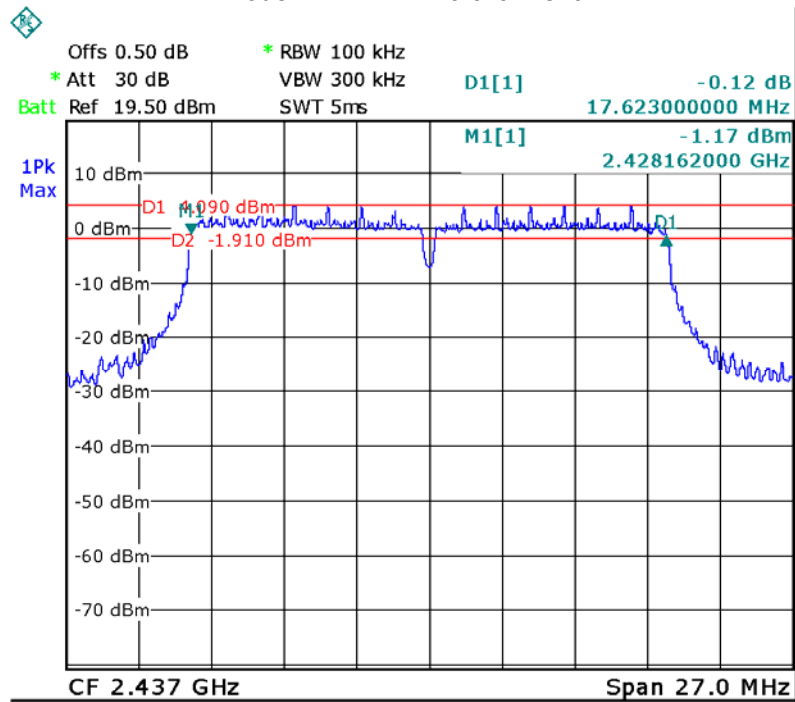

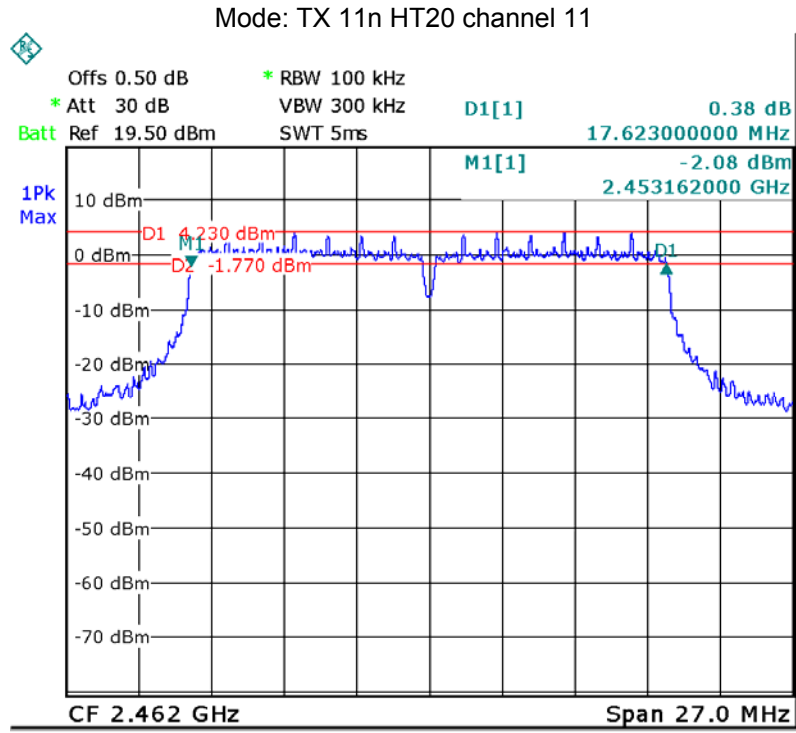


99% Bandwidth


Mode: TX 11b channel 1

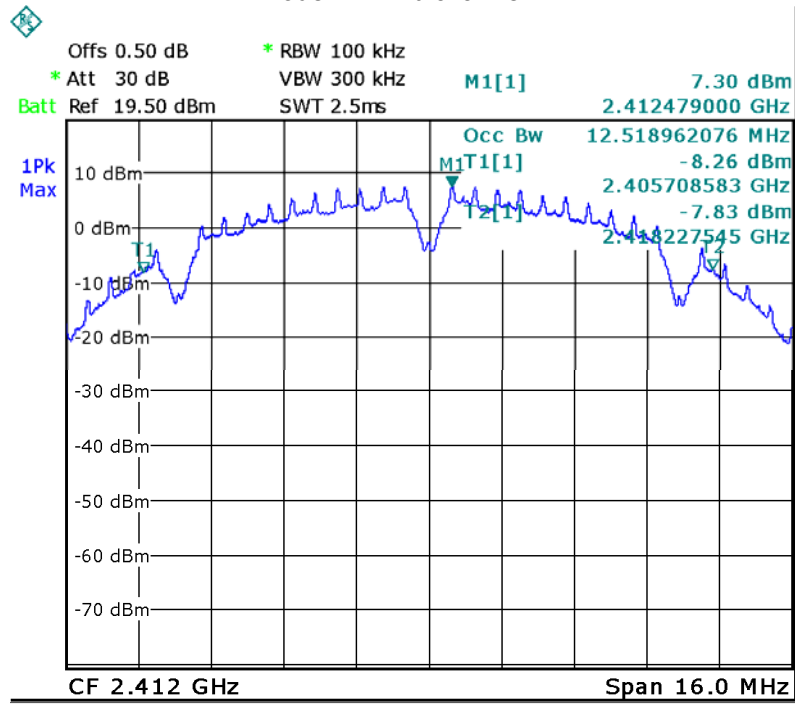


Mode: TX 11b channel 6

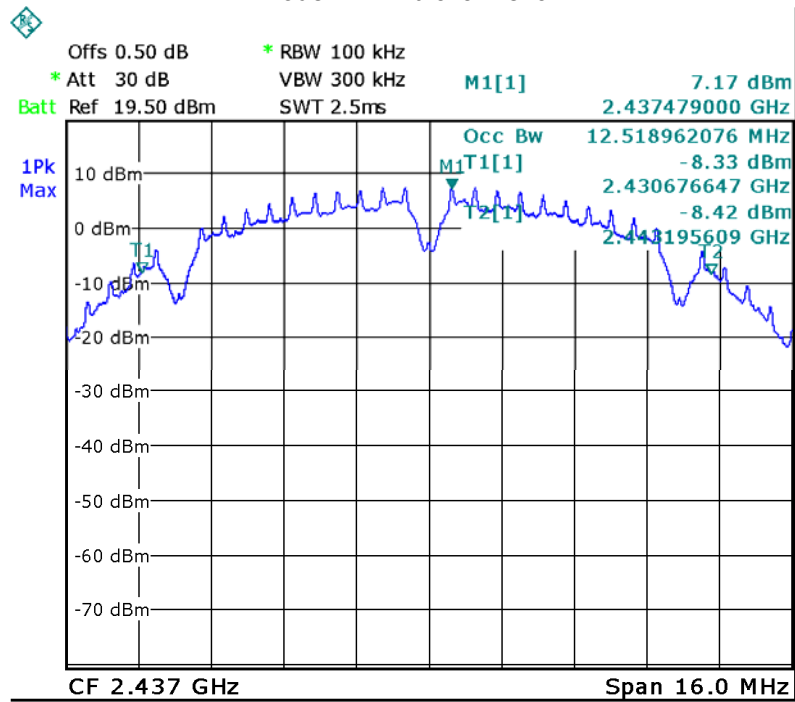


Mode: TX 11b channel 11

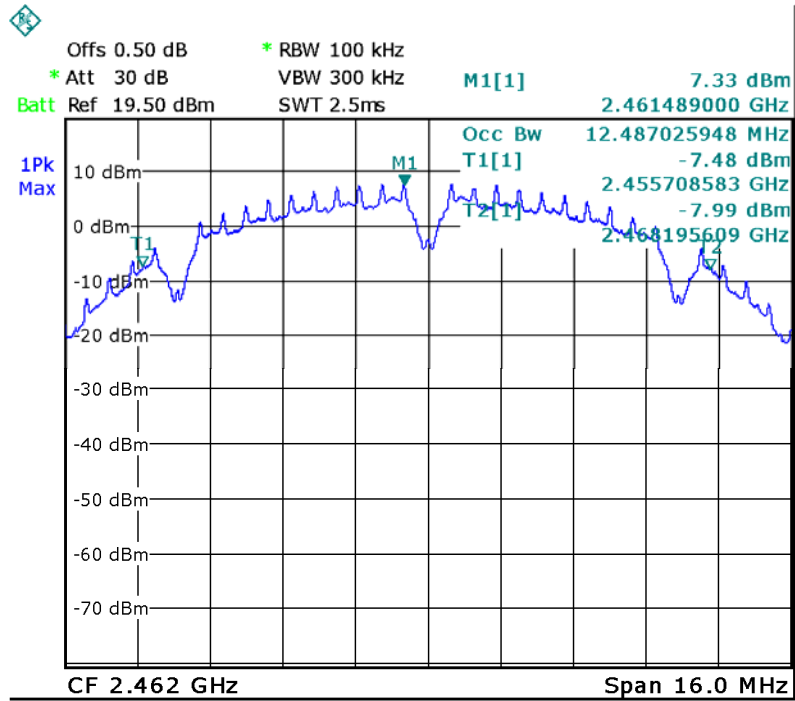


Mode: TX 11g channel 1

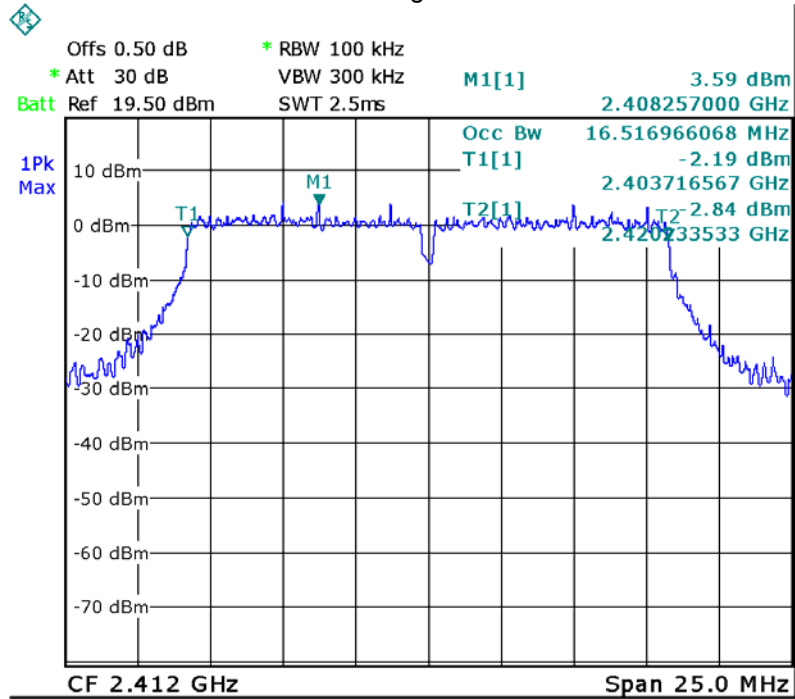


Mode: TX 11g channel 6

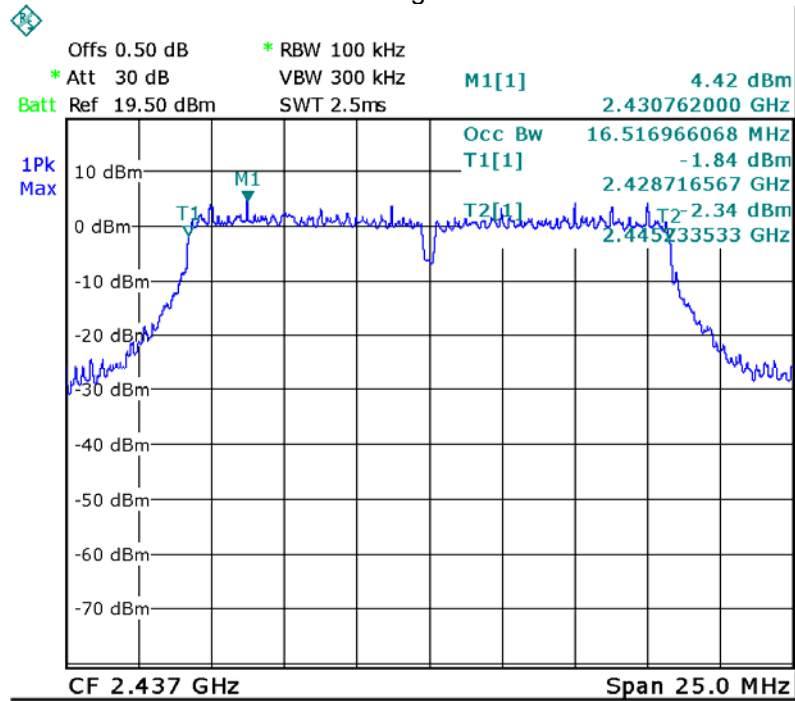


Mode: TX 11g channel 11

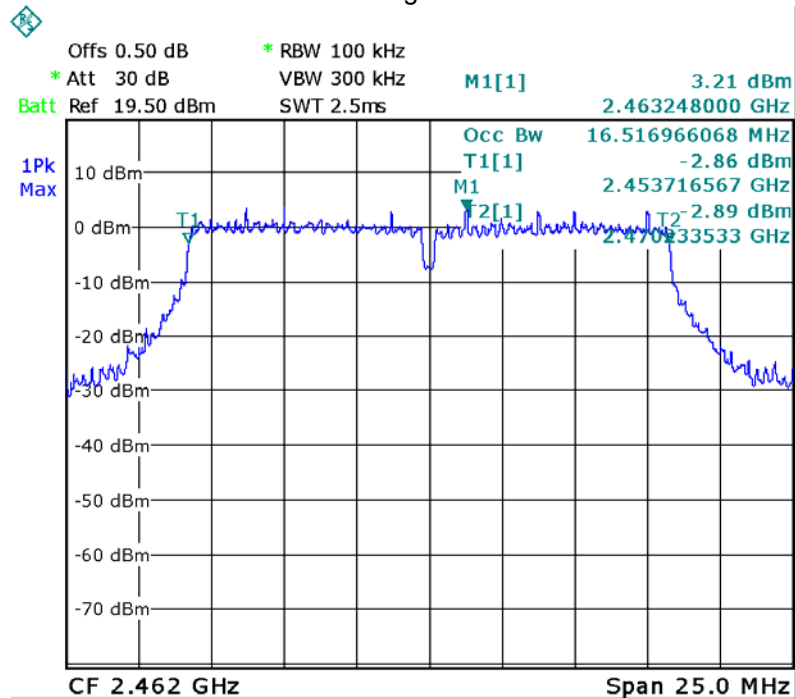


Mode: TX 11n HT20 channel 1

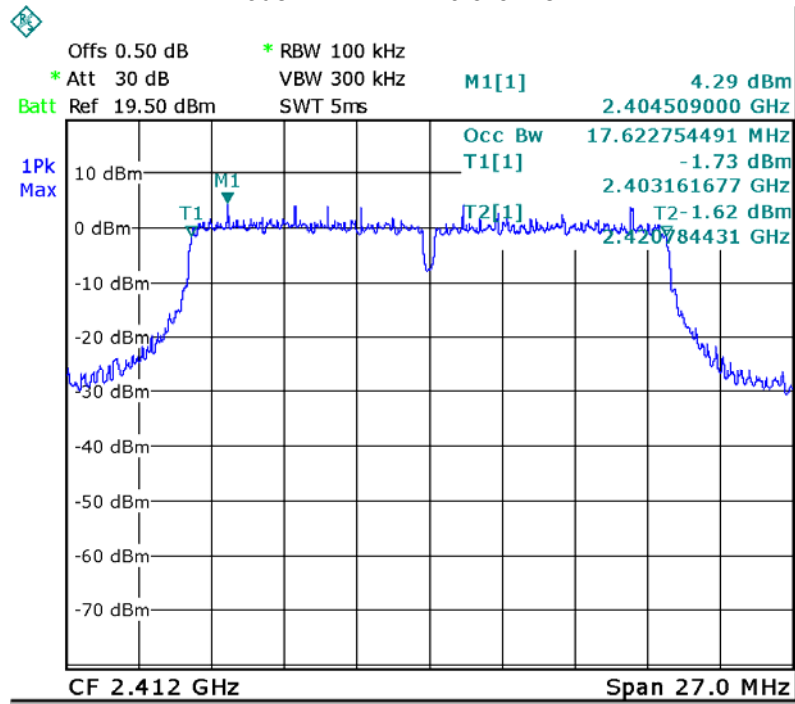

Mode: TX 11n HT20 channel 6

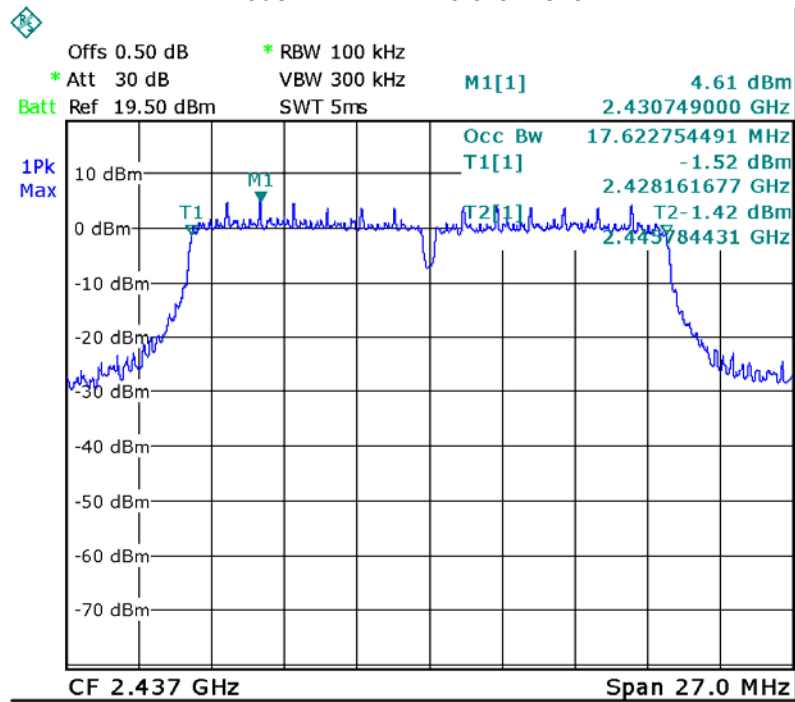

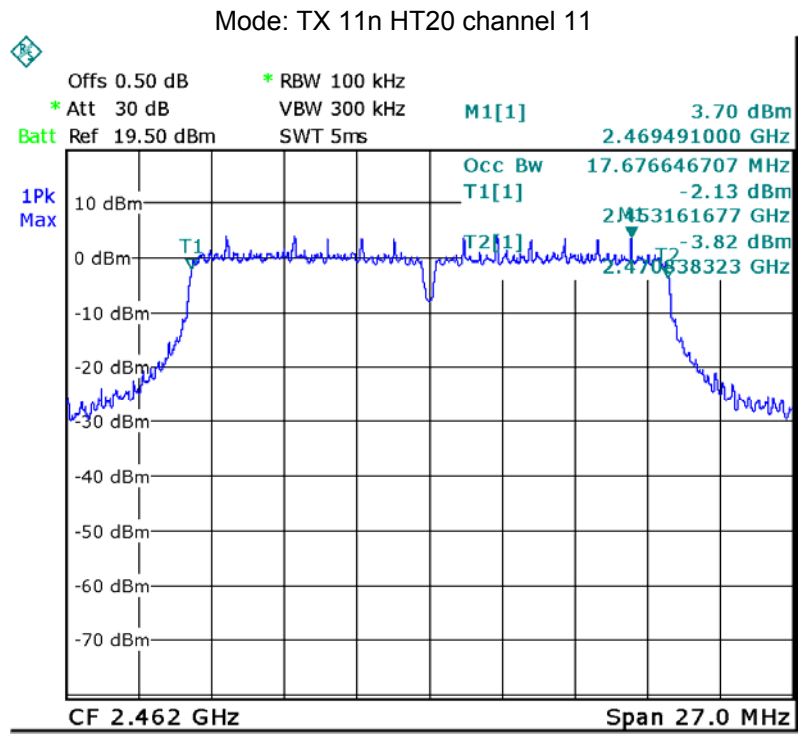

11 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

11.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018

section 8.3.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the $RBW \geq DTS$ bandwidth.
- b) Set $VBW \geq 3 \times RBW$.
- c) Set span $\geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 8.3.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.


- a) Set the $RBW = 1\%$ to 5% of the OBW, not to exceed 1 MHz..
- b) Set the $VBW \geq 3 \times RBW$
- c) Set the span $\geq 1.5 \times OBW$.
- d) Detector = RMS.
- e) Sweep time = auto couple.
- f) trigger = free run..
- g) Number of points in sweep $\geq [2 \times \text{span} / RBW]$. (This gives bin-to-bin spacing $\geq RBW / 2$, so that narrowband signals are not lost between frequency bins.)
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum..

11.2 Test Result:


Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
TX 11b	Low-2412	11.90	1W/30dBm
	Middle-2437	11.76	1W/30dBm
	High-2462	10.61	1W/30dBm
TX 11g	Low-2412	11.09	1W/30dBm
	Middle-2437	11.27	1W/30dBm
	High-2462	10.87	1W/30dBm
TX 11n HT20	Low-2412	11.49	1W/30dBm
	Middle-2437	11.38	1W/30dBm
	High-2462	10.94	1W/30dBm

Test Plot


Mode: TX 11b channel 1

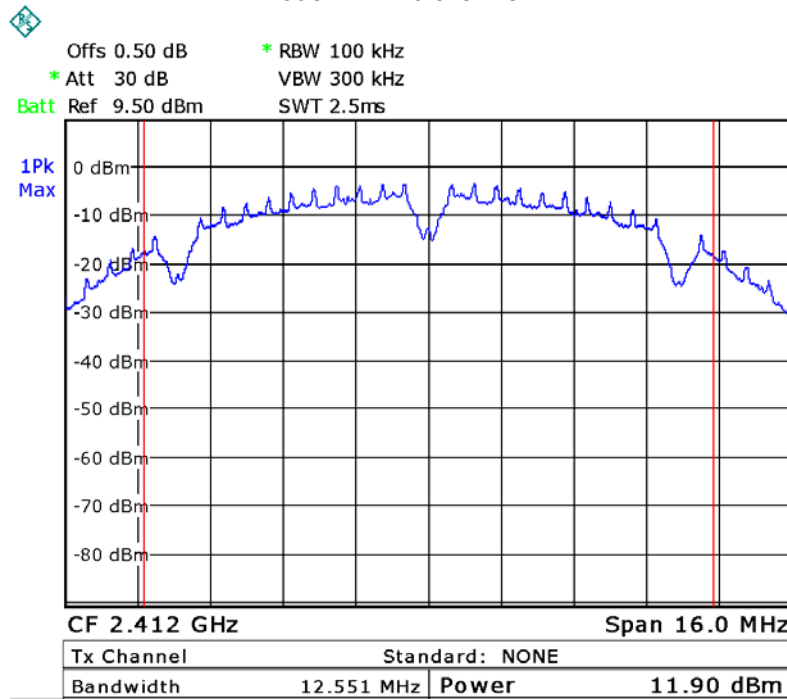


Mode: TX 11b channel 6

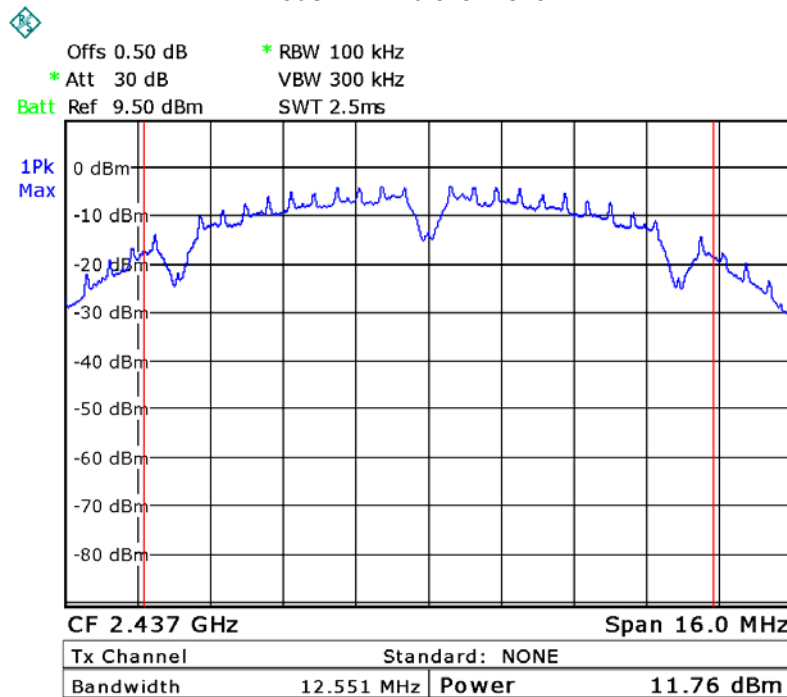


Mode: TX 11b channel 11

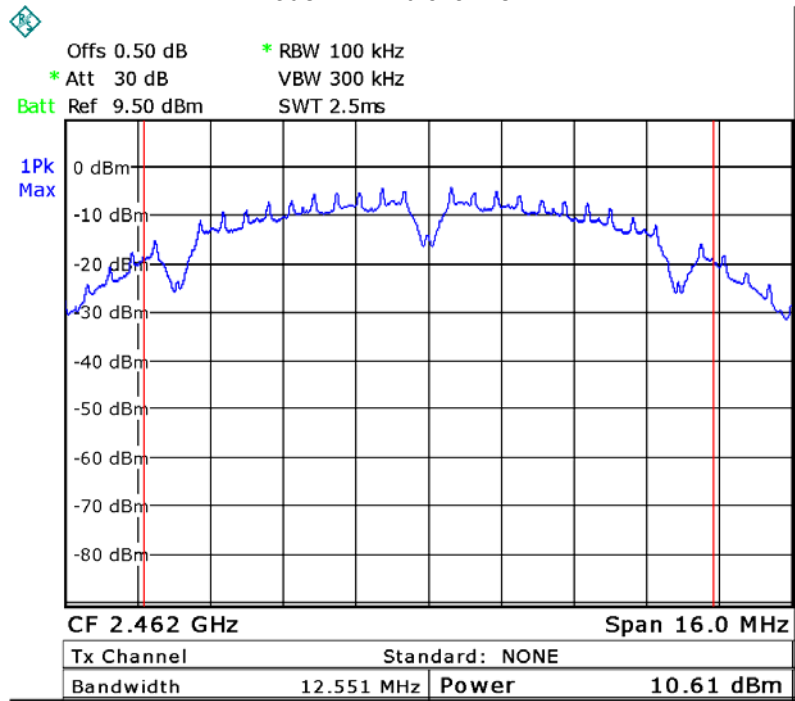


Mode :TX 11g channel 1

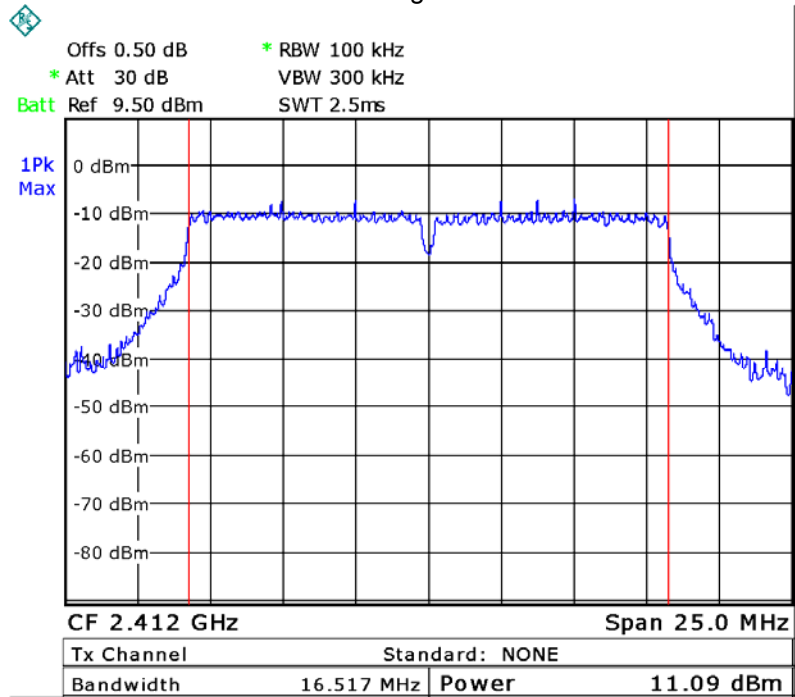


Mode :TX 11g channel 6

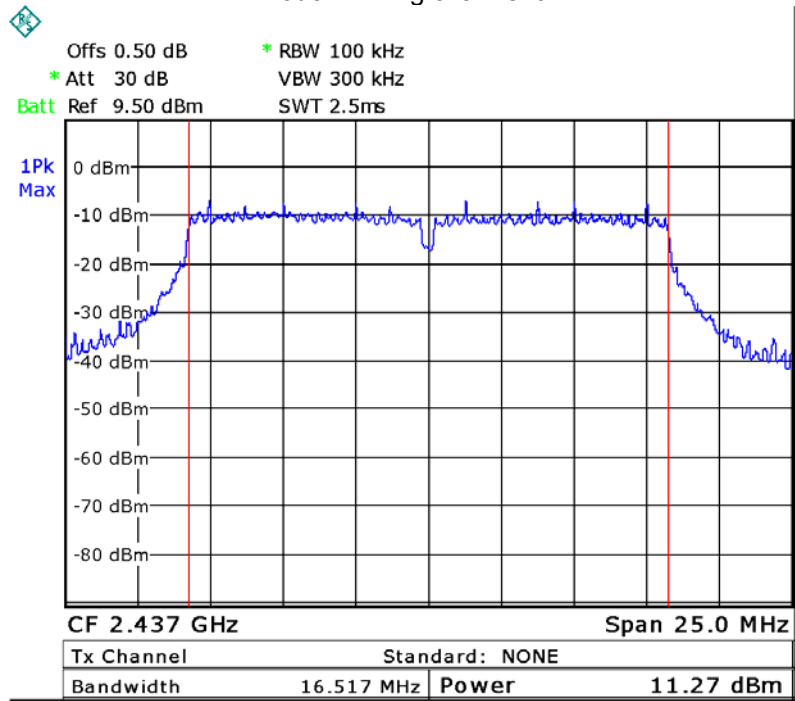


Mode :TX 11g channel 11

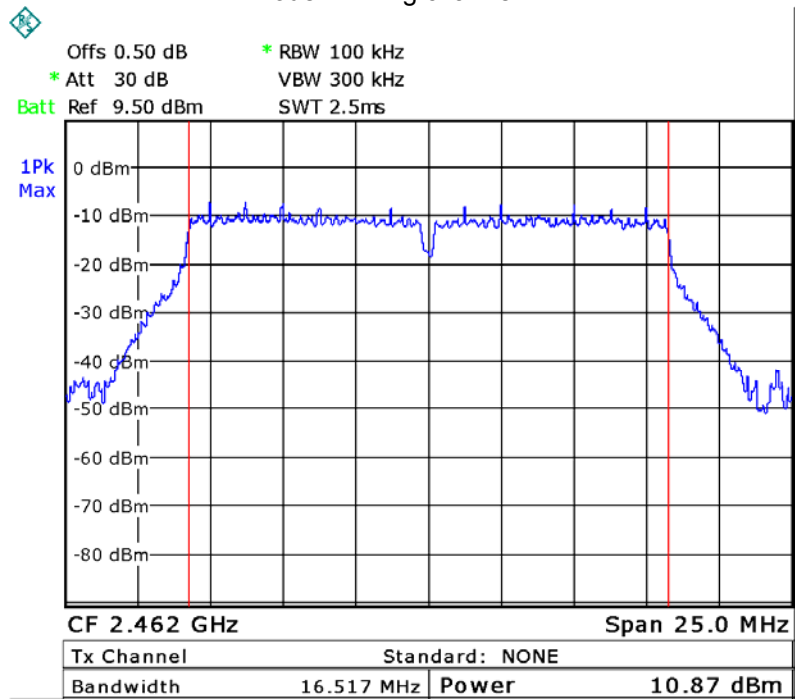


Mode: TX 11n HT20 channel 1

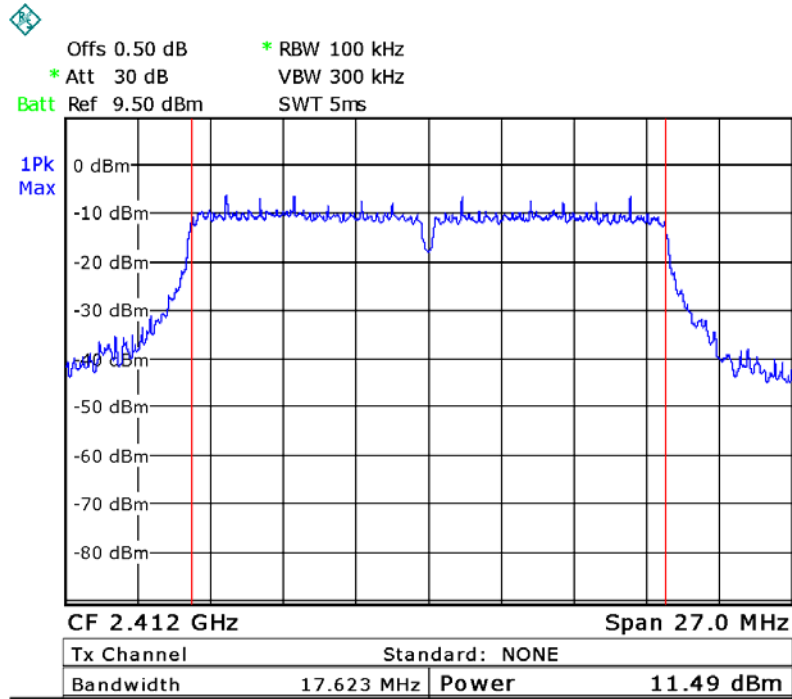

Mode: TX 11n HT20 channel 6

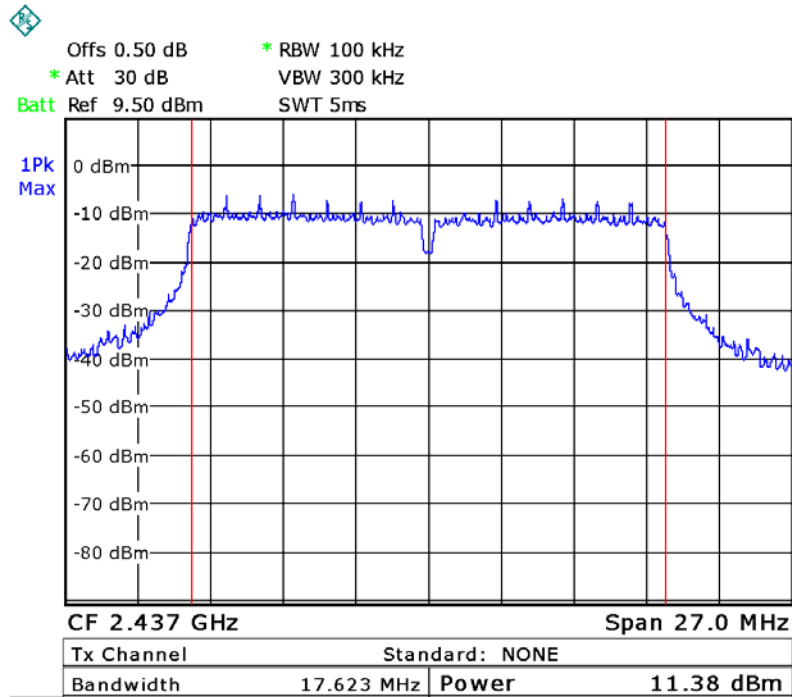

Mode: TX 11n HT20 channel 11

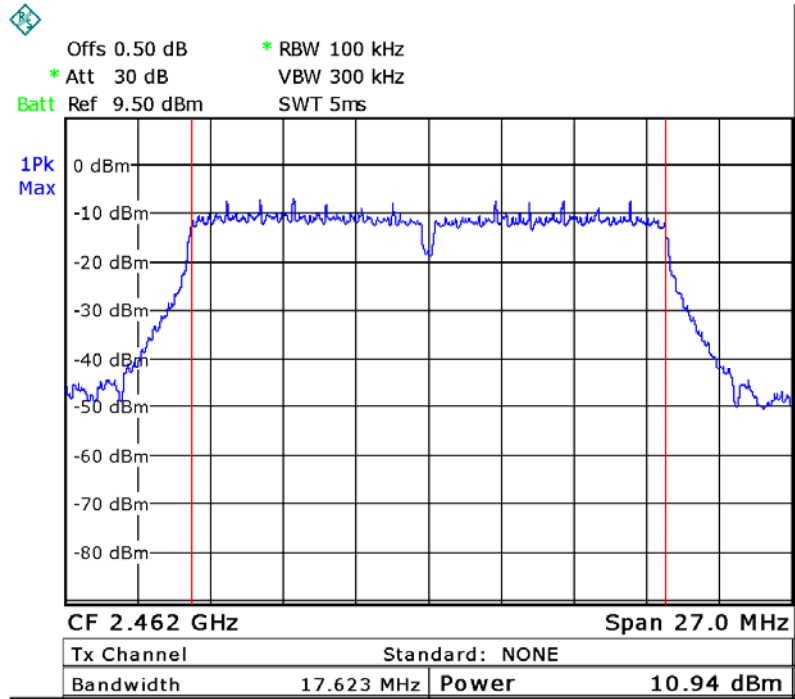

12 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

12.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v04 April 5, 2017 section 10.2


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.

12.2 Test Result:


Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
TX 11b	Low-2412	-7.37	8dBm per 3kHz
	Middle-2437	-6.92	8dBm per 3kHz
	High-2462	-7.25	8dBm per 3kHz
TX 11g	Low-2412	-9.16	8dBm per 3kHz
	Middle-2437	-9.87	8dBm per 3kHz
	High-2462	-10.50	8dBm per 3kHz
TX 11n HT20	Low-2412	-9.84	8dBm per 3kHz
	Middle-2437	-9.56	8dBm per 3kHz
	High-2462	-8.80	8dBm per 3kHz



Test Plot



Mode: TX 11b channel 1

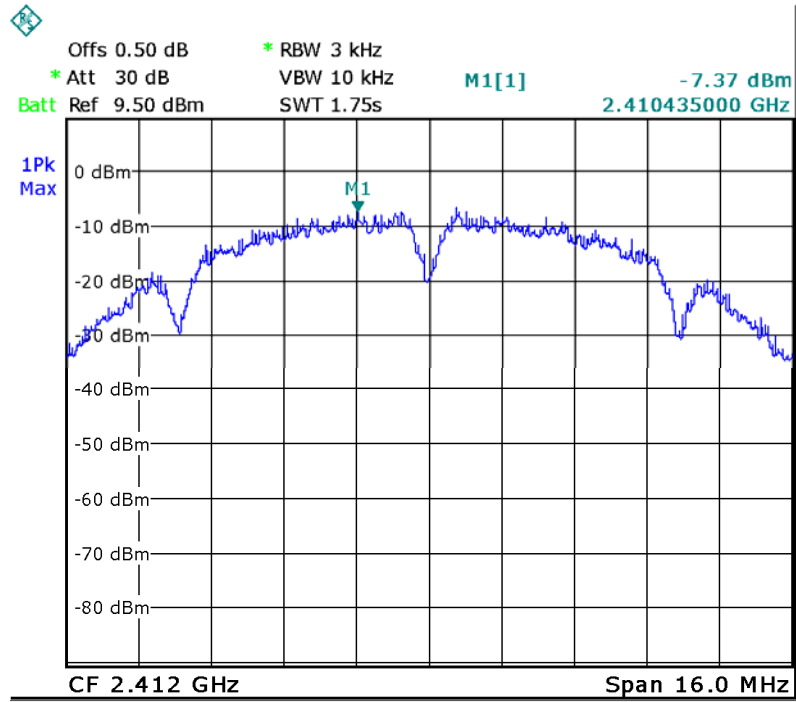


Mode: TX 11b channel 6

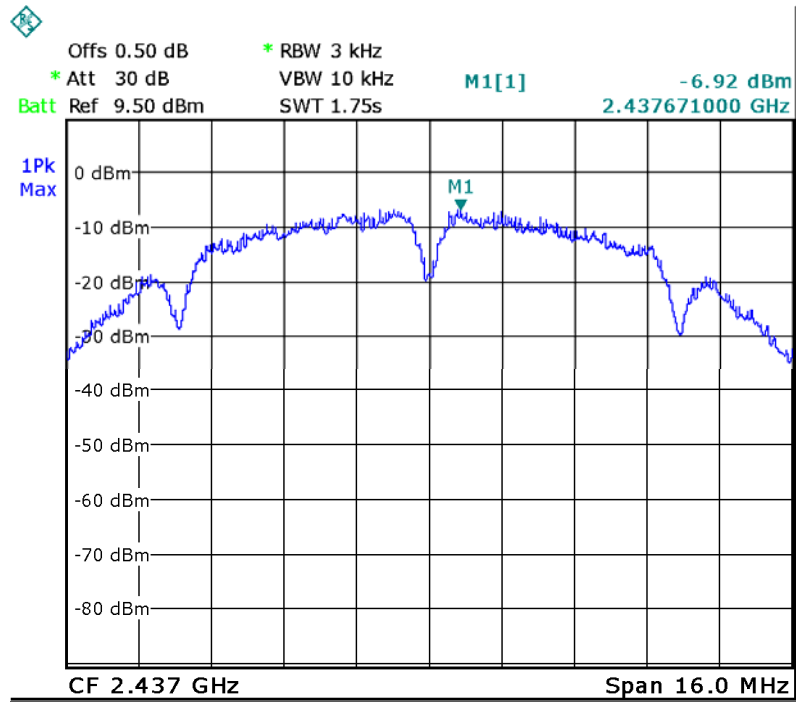

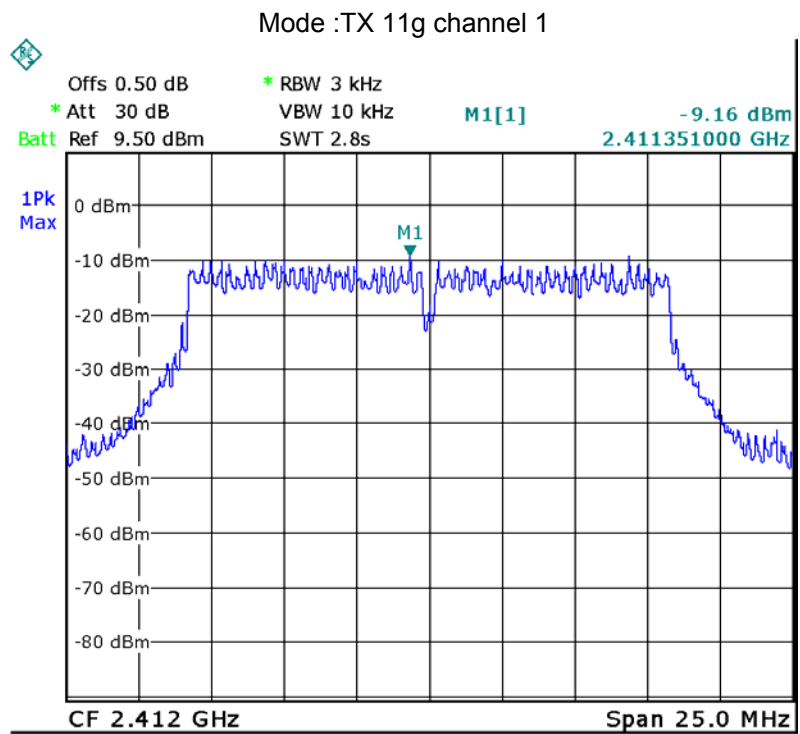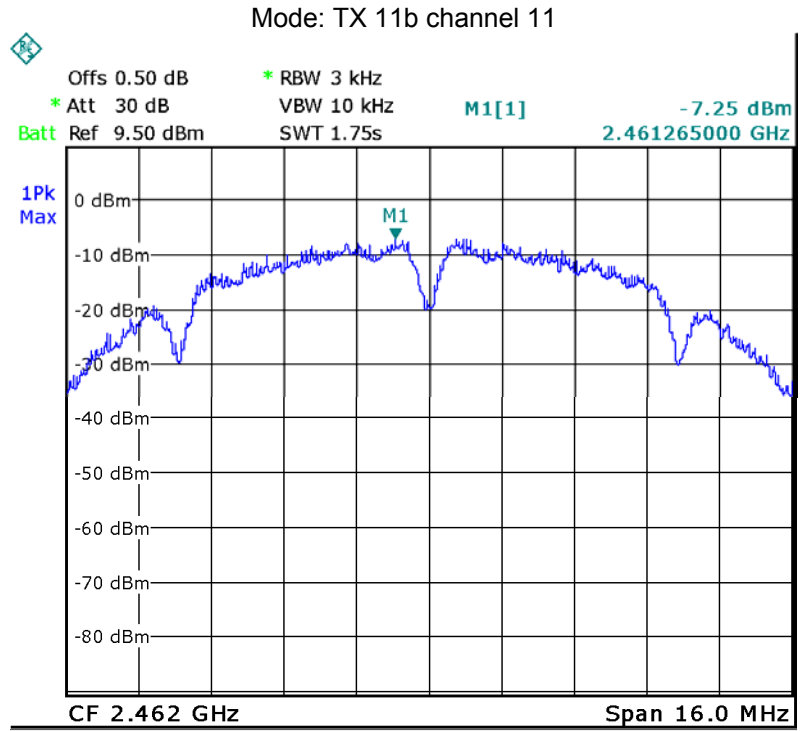


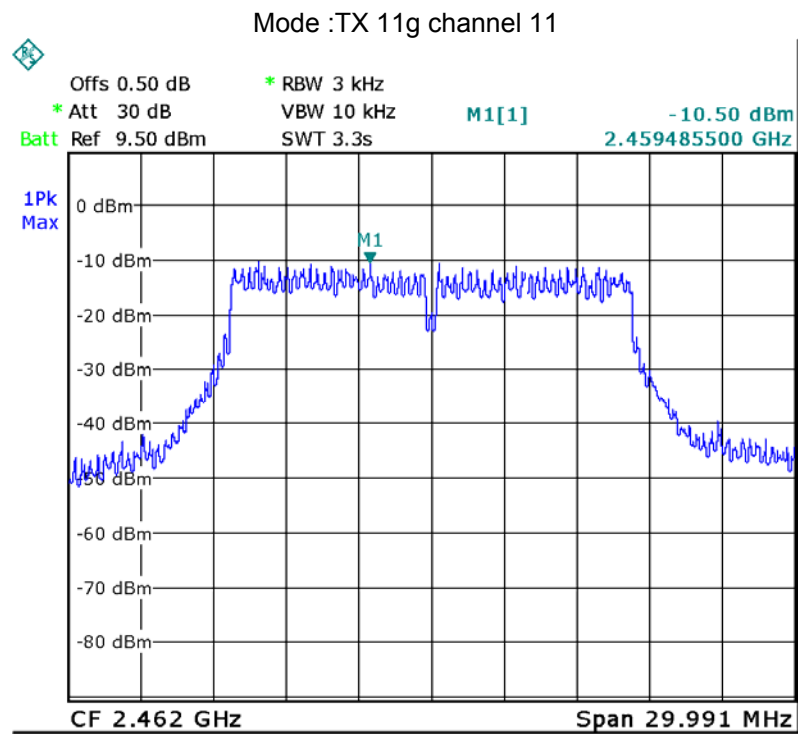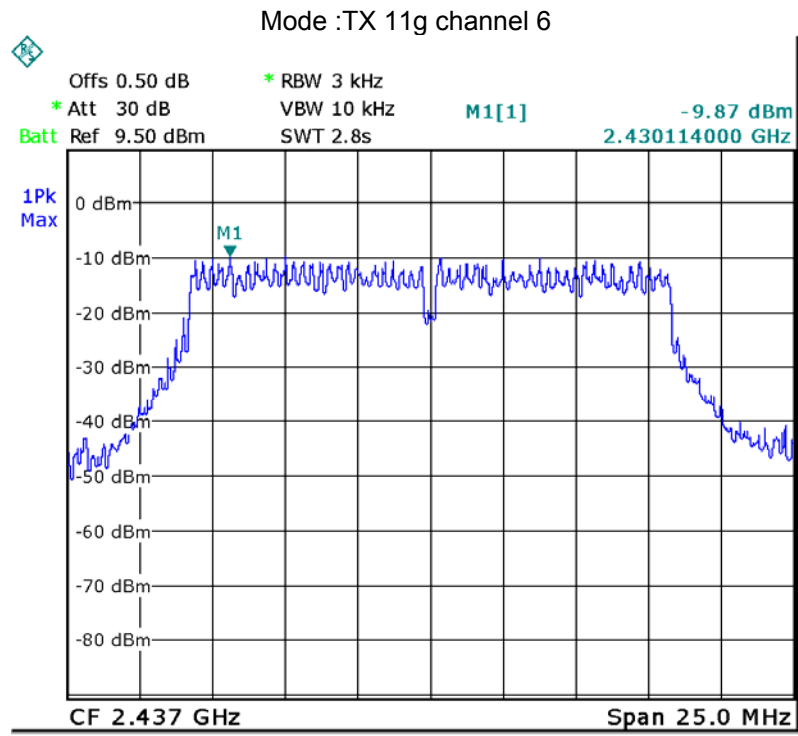


Mode: TX 11n HT20 channel 1

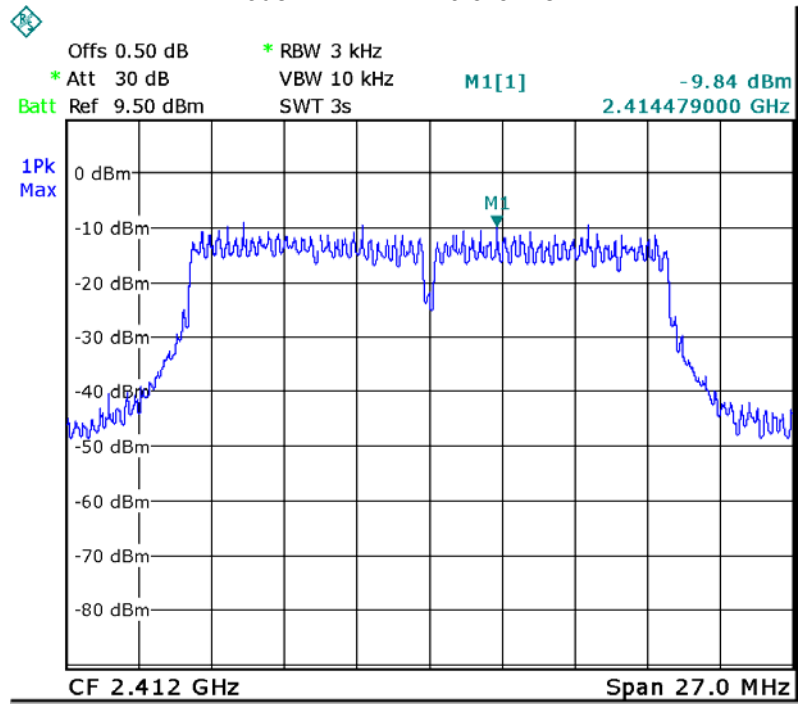

Mode: TX 11n HT20 channel 6

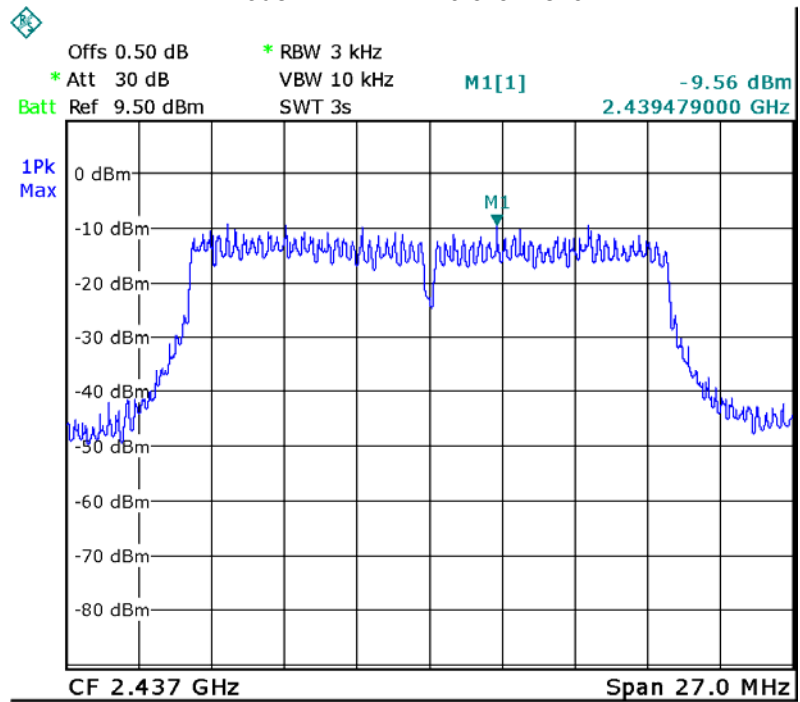

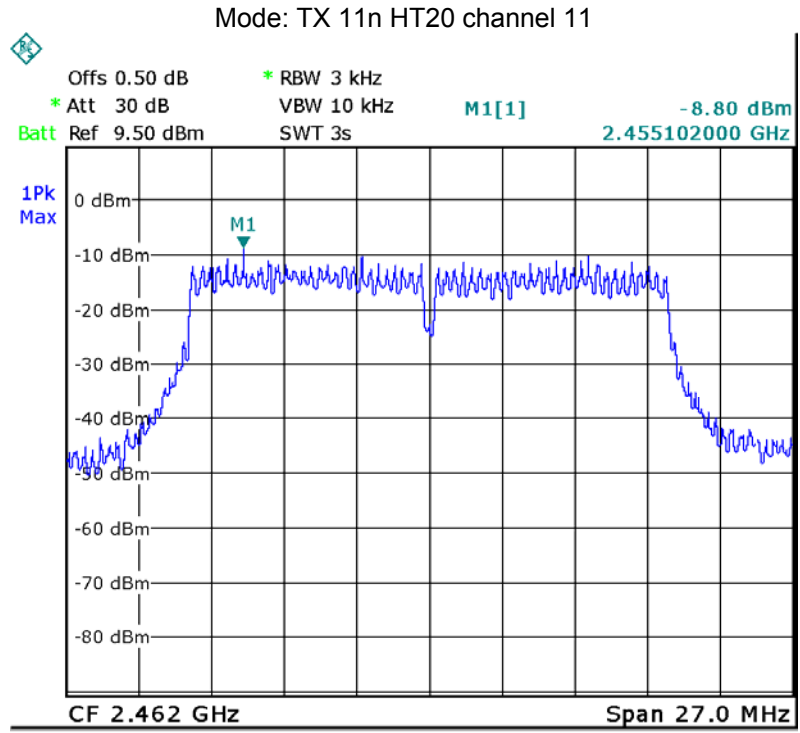

13 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

14 RF Exposure

Remark: refer to MPE test report: WTS20S12100744W002.

15 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-MIR-IR300-WF-Photos.

=====**End of Report**=====