



## TEST REPORT

### FCC Rules Part 15.247

**Report Reference No.....: MTWG22030166-R**

**FCC ID.....: 2AUK4-GMR15W**

Compiled by

( position+printed name+signature)..: File administrators Alisa Luo

*Alisa*

Supervised by

( position+printed name+signature)..: Test Engineer Sunny Deng

*Sunny*

Approved by

( position+printed name+signature)..: Manager Yvette Zhou

*Yvette*

Date of issue.....: **March 23,2022**

**Representative Laboratory Name. : Shenzhen Most Technology Service Co., Ltd.**

Address.....: No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park,  
Nanshan, Shenzhen, Guangdong, China.

**Applicant's name.....: MAXXSONICS USA,INC.**

Address.....: 851 E Park Ave. Libertyville ILUnited States 60048.

**Test specification/ Standard.....: FCC Rules Part 15.247**

TRF Originator.....: Shenzhen Most Technology Service Co., Ltd.

**Shenzhen Most Technology Service Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description.....: MARINE**

Trade Mark.....: MBQUART

Manufacturer.....: **MAXXSONICS USA,INC.**

Model/Type reference.....: GMR1.5W

Listed Models .....: MDR2.0,MDR2.0W,GMR1.5B,RVM2.0,RVDVD3.0,RVM7.0

Modulation Type.....: GFSK, π/4DQPSK, 8DPSK

Operation Frequency.....: From 2402MHz to 2480MHz

Hardware Version.....: 1121-M3BAMP-MB04.sch-1

Software Version.....: 2021.06.29V1

Rating.....: DC12V

Result.....: **PASS**

# TEST REPORT

Equipment under Test : MARINE

Model /Type : GMR1.5W

Listed Models : MDR2.0,MDR2.0W,GMR1.5B,RVM2.0,RVDVD3.0,RVM7.0

Remark : Only with different model names.

Applicant : **MAXXSONICS USA,INC.**

Address : 851 E Park Ave. Libertyville ILUnited States 60048.

Manufacturer : **MAXXSONICS USA,INC.**

Address : 851 E Park Ave. Libertyville ILUnited States 60048.

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b>1</b>	<b>REVISION HISTORY .....</b>	<b>4</b>
<b>2</b>	<b>TEST STANDARDS .....</b>	<b>5</b>
<b>3</b>	<b>SUMMARY .....</b>	<b>6</b>
<b>3.1</b>	<b>General Remarks</b>	<b>6</b>
<b>3.2</b>	<b>Product Description</b>	<b>6</b>
<b>3.3</b>	<b>Equipment Under Test</b>	<b>6</b>
<b>3.4</b>	<b>Short description of the Equipment under Test (EUT)</b>	<b>6</b>
<b>3.5</b>	<b>EUT operation mode</b>	<b>7</b>
<b>3.6</b>	<b>Block Diagram of Test Setup</b>	<b>7</b>
<b>3.7</b>	<b>Test Item (Equipment Under Test) Description*</b>	<b>7</b>
<b>3.8</b>	<b>Auxiliary Equipment (AE) Description</b>	<b>7</b>
<b>3.9</b>	<b>Antenna Information*</b>	<b>7</b>
<b>3.10</b>	<b>Related Submittal(s) / Grant (s)</b>	<b>8</b>
<b>3.11</b>	<b>Modifications</b>	<b>8</b>
<b>4</b>	<b>TEST ENVIRONMENT .....</b>	<b>9</b>
<b>4.1</b>	<b>Address of the test laboratory</b>	<b>9</b>
<b>4.2</b>	<b>Environmental conditions</b>	<b>9</b>
<b>4.3</b>	<b>Summary of measurement results</b>	<b>10</b>
<b>4.4</b>	<b>Statement of the measurement uncertainty</b>	<b>10</b>
<b>4.5</b>	<b>Equipments Used during the Test</b>	<b>11</b>
<b>5</b>	<b>TEST CONDITIONS AND RESULTS .....</b>	<b>12</b>
<b>5.1</b>	<b>AC Power Conducted Emission</b>	<b>12</b>
<b>5.2</b>	<b>Radiated Emission</b>	<b>13</b>
<b>5.3</b>	<b>Maximum Peak Output Power</b>	<b>19</b>
<b>5.4</b>	<b>20dB Bandwidth</b>	<b>20</b>
<b>5.5</b>	<b>Frequency Separation</b>	<b>23</b>
<b>5.6</b>	<b>Number of hopping frequency</b>	<b>26</b>
<b>5.7</b>	<b>Time of Occupancy (Dwell Time)</b>	<b>28</b>
<b>5.8</b>	<b>Spurious RF Conducted Emission</b>	<b>31</b>
<b>5.9</b>	<b>Pseudorandom Frequency Hopping Sequence</b>	<b>37</b>
<b>5.10</b>	<b>Antenna Requirement</b>	<b>38</b>
<b>6</b>	<b>TEST SETUP PHOTOS OF THE EUT .....</b>	<b>39</b>
<b>7</b>	<b>PHOTOS OF THE EUT .....</b>	<b>40</b>

**1 Revision History**

<b>Revision</b>	<b>Issue Date</b>	<b>Revisions</b>	<b>Revised By</b>
00	2022-03-23	Initial Issue	Alisa Luo

## **2 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

### 3 SUMMARY

#### 3.1 General Remarks

Date of receipt of test sample	:	2022.03.11
Testing commenced on	:	2022.03.11
Testing concluded on	:	2022.03.23

#### 3.2 Product Description

Product Name:	MARINE
Model/Type reference:	GMR1.5W
Power Supply:	DC12V
Testing sample ID:	MT22030129
<b>Bluetooth :</b>	
Supported Type:	Bluetooth BR/EDR
Modulation:	GFSK, $\pi$ /4DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB antenna
Antenna gain:	-2dBi

#### 3.3 Equipment Under Test

##### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 230V / 50 Hz	<input type="radio"/> 120V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC12V

#### 3.4 Short description of the Equipment under Test (EUT)

This is a MARINE Device For more details, refer to the user's manual of the EUT.


### 3.5 EUT operation mode

The Applicant provides communication tools software(Engineer mode) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

#### Operation Frequency:

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
38	2440
39	2441
40	2442
⋮	⋮
77	2479
78	2480

### 3.6 Block Diagram of Test Setup

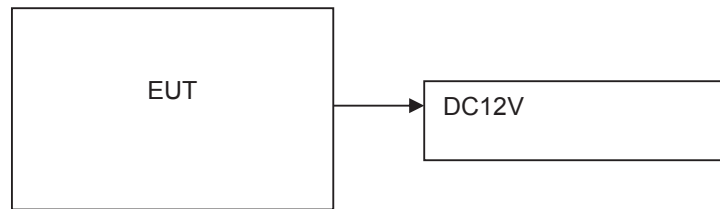

### 3.7 Test Item (Equipment Under Test) Description\*

Short designation	EUT Name	EUT Description	Serial number	Hardware status	Software status
EUT A					
EUT B					

\*: declared by the applicant. According to customers information EUTs A and B are the same devices.

### 3.8 Auxiliary Equipment (AE) Description

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE 1				
AE 2	-			

### 3.9 Antenna Information\*

Short designation	Antenna Name	Antenna Type	Frequency Range	Serial number	Antenna Peak Gain
Antenna 1	---	PCB antenna	2.4 – 2.5 GHz	---	-2dBi
Antenna 2					

\*: declared by the applicant.

### **3.10 Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for the device filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

### **3.11 Modifications**

No modifications were implemented to meet testing criteria.



## 4 TEST ENVIRONMENT

### 4.1 Address of the test laboratory

#### Shenzhen Most Technology Service Co., Ltd.

No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China.  
The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

#### Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Designation No.: CN1315

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

#### A2LA-Lab Cert. No.: 6343.01

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### 4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	23 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

AC Main Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

### 4.3 Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Test result
§15.247(a)(1)	Carrier Frequency separation	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Middle	Compliant
§15.247(a)(1)	Number of Hopping channels	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Full	GFSK 8DPSK	<input checked="" type="checkbox"/> Full	Compliant
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Middle	Compliant
§15.247(a)(1)	Spectrum bandwidth of aFHSS system 20dB bandwidth	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.247(b)(1)	Maximum output power	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.247(d)	Band edge compliance conducted	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	Compliant
§15.205	Band edge compliance radiated	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	Compliant
§15.247(d)	TX spurious emissions conducted	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.247(d)	TX spurious emissions radiated	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.209(a)	TX spurious Emissions radiated Below 1GHz	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Middle	Compliant
§15.107(a) §15.207	Conducted Emissions 9KHz-30 MHz	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Middle	N/A

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report

### 4.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Most Technology Service Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.5 Equipments Used during the Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware versions	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	100093	/	2021/04/19	1 Year
2	Three-phase artificial power network	Schwarzback Mess	NNLK8129	8129178	/	2021/04/19	1 Year
3.	Receiver	R&S	ESCI	100492	V3.0-10-2	2021/04/7	1 Year
4	Receiver	R&S	ESPI	101202	V3.0-10-2	2021/04/7	1 Year
5	Spectrum analyzer	Agilent	9020A	MT-E306	A14.16	2021/04/7	1 Year
6	Bilong Antenna	Sunol Sciences	JB3	A121206	/	2021/03/14	1 Year
7	Horn antenna	HF Antenna	HF Antenna	MT-E158	/	2021/04/7	1 Year
8	Loop antenna	Beijing Daze	ZN30900B	/	/	2021/04/16	1 Year
9	Horn antenna	R&S	OBH100400	26999002	/	2021/04/16	1 Year
10	Wireless Communication Test Set	R&S	CMW500	/	CMW-BASE-3.7.21	2021/04/15	1 Year
11	Spectrum analyzer	R&S	FSP	100019	V4.40 SP2	2021/04/15	1 Year
12	High gain antenna	Schwarzbeck	LB-180400KF	MT-E389	/	2021/03/14	1 Year
13	Preamplifier	Schwarzbeck	BBV 9743	MT-E390	/	2021/03/14	1 Year
14	Pre-amplifier	EMCI	EMC051845S E	MT-E391	/	2021/03/14	1 Year
15	Pre-amplifier	Agilent	83051A	MT-E392	/	2021/03/14	1 Year
16	High pass filter unit	Tonscend	JS0806-F	MT-E393	/	2021/03/14	1 Year
17	RF Cable(below1GHz)	Times	9kHz-1GHz	MT-E394	/	2021/03/14	1 Year
18	RF Cable(above 1GHz)	Times	1-40G	MT-E395	/	2021/03/14	1 Year
19	RF Cable (9KHz-40GHz)	Tonscend	170660	N/A	/	2021/03/14	1 Year

Note: The Cal.Interval was one year.

## 5 TEST CONDITIONS AND RESULTS

### 5.1 AC Power Conducted Emission

#### TEST CONFIGURATION

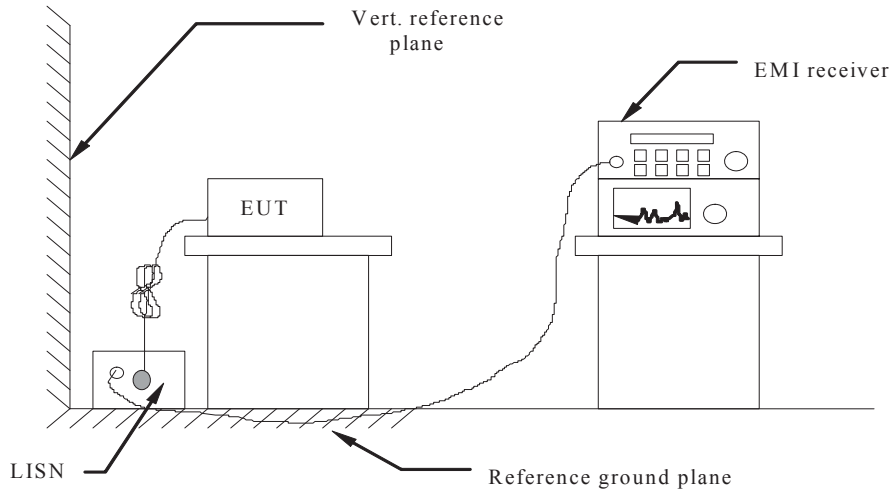

#### TEST PROCEDURE

1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.

2 Support equipment, if needed, was placed as per ANSI C63.10-2013

3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013

4 The EUT received DC 12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

5 All support equipments received AC power from a second LISN, if any.

6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.

7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.


#### TEST RESULTS

N/A


## 5.2 Radiated Emission

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

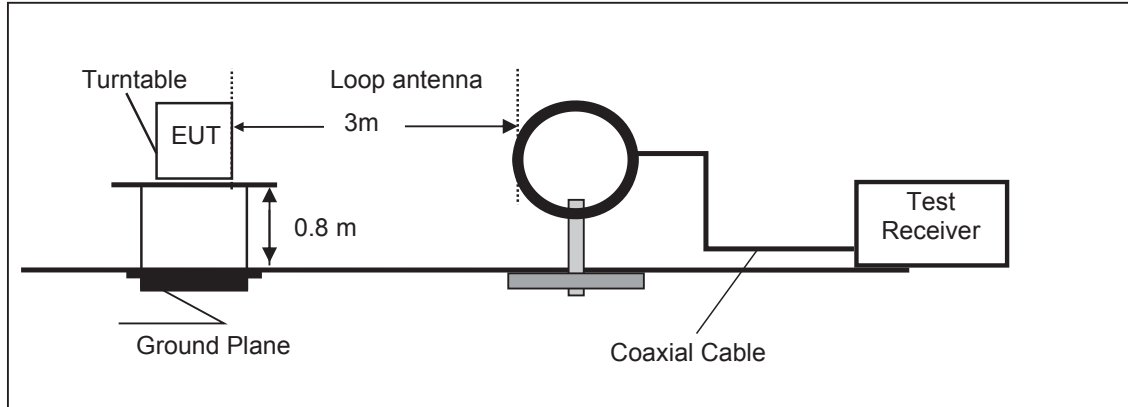

Frequency range 30MHz – 1000MHz

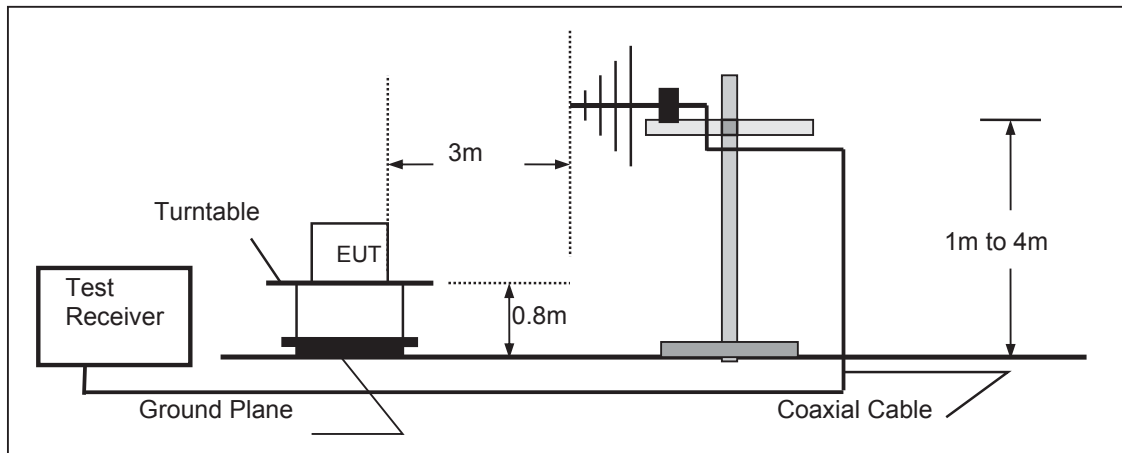

Frequency range above 1GHz-25GHz

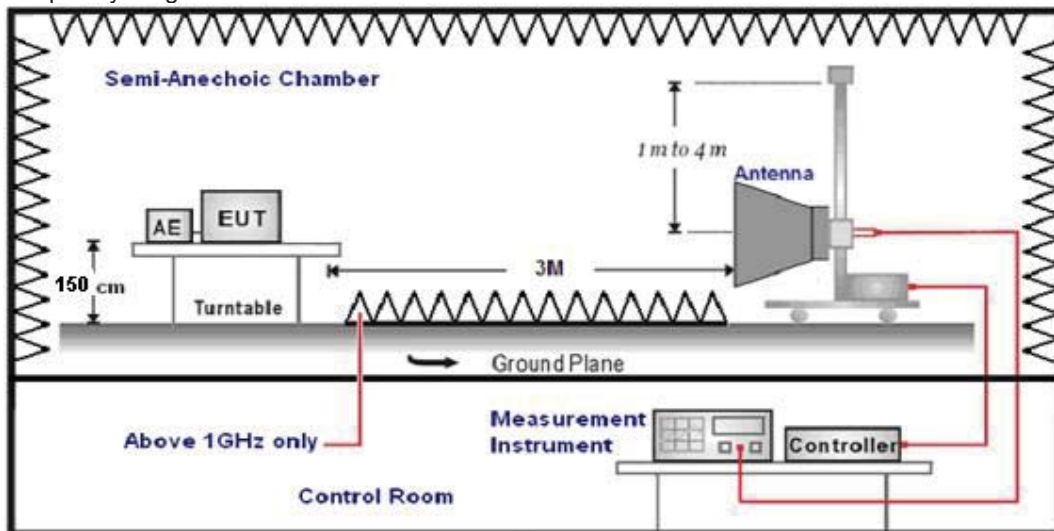

**TEST PROCEDURE**

- The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 25GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

**RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.


Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

**TEST RESULTS**


Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. We measured Radiated Emission at GFSK,  $\pi/4$  DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode.
3. For below 1GHz testing recorded worst at GFSK DH5 middle channel.
4. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
5. Remark: Result=Reading value+Factor

**For 30MHz-1GHz**

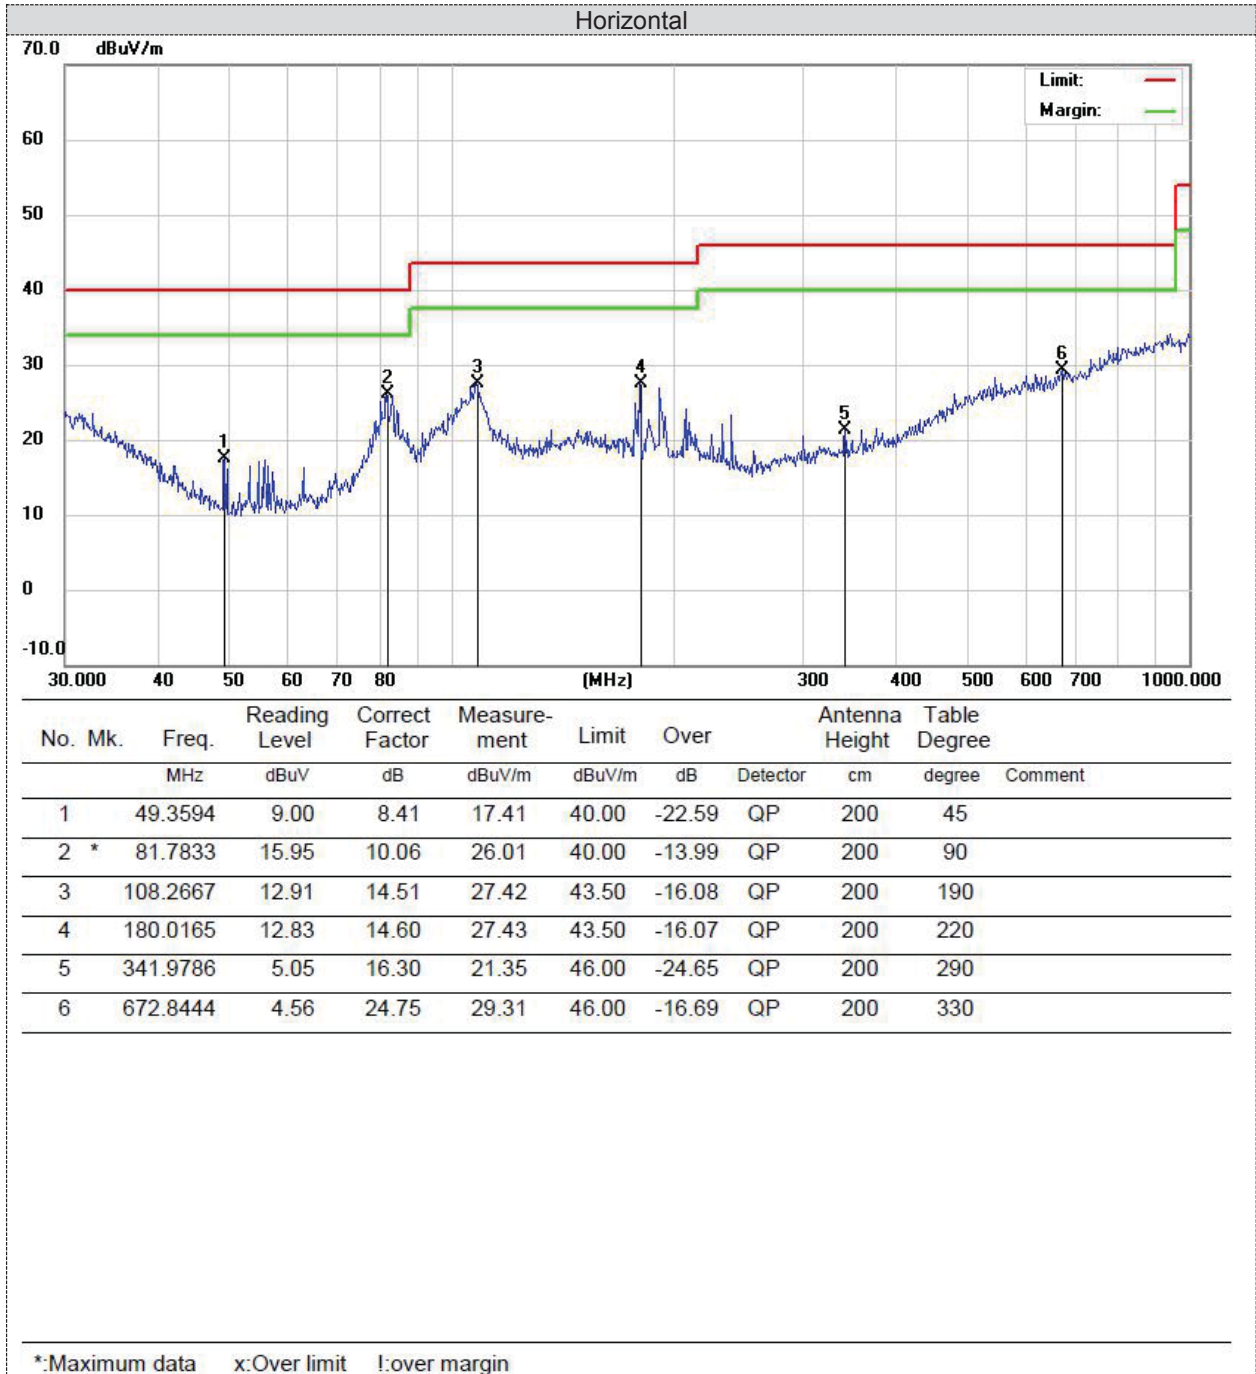



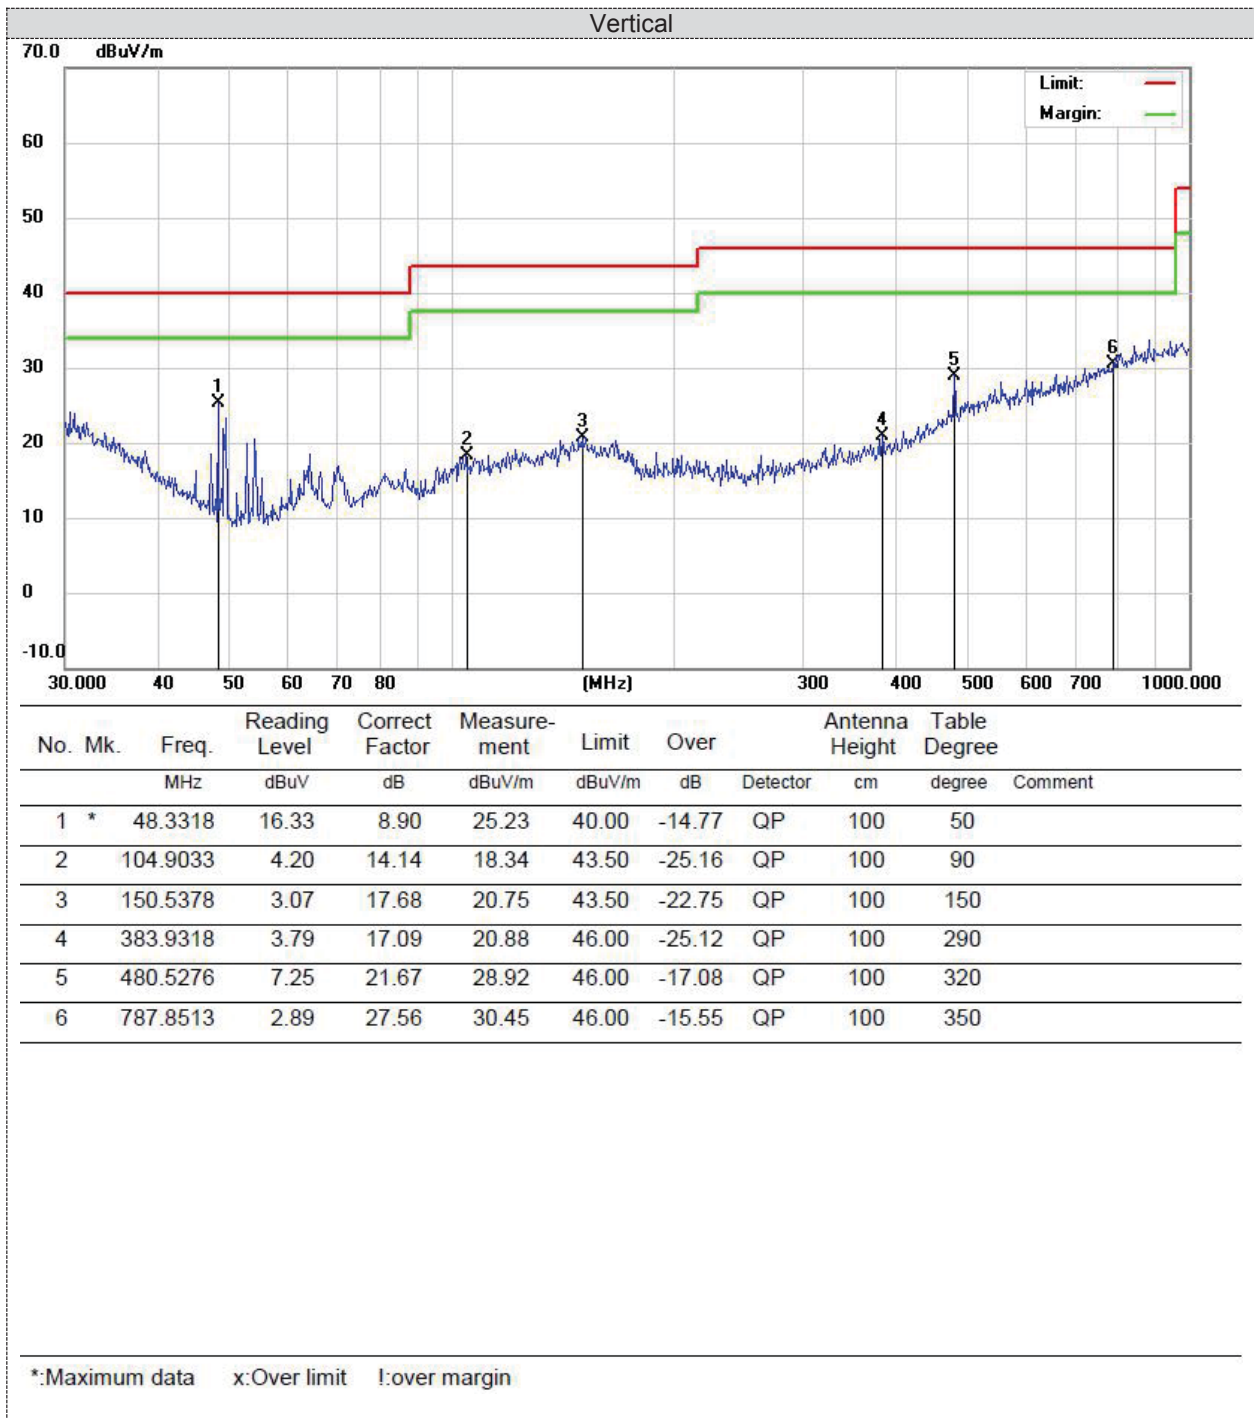



**For 1GHz to 25GHz**

Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

**GFSK (above 1GHz)**

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804	57.64	PK	74	16.36	55.74	31.42	6.98	36.5	1.9
4804	43.6	AV	54	10.4	41.7	31.42	6.98	36.5	1.9
7206	55.56	PK	74	18.44	44.96	37.03	8.87	35.3	10.6
7206	42.25	AV	54	11.75	31.65	37.03	8.87	35.3	10.6

Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804	53.5	PK	74	20.5	51.6	31.42	6.98	36.5	1.9
4804	45.29	AV	54	8.71	43.39	31.42	6.98	36.5	1.9
7206	53.91	PK	74	20.09	43.31	37.03	8.87	35.3	10.6
7206	42.71	AV	54	11.29	32.11	37.03	8.87	35.3	10.6

Frequency(MHz):			2441		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882	52.96	PK	74	21.04	50.9	30.98	7.58	36.5	2.06
4882	43.75	AV	54	10.25	41.69	30.98	7.58	36.5	2.06
7323	52.1	PK	74	21.9	41.18	37.66	8.56	35.3	10.92
7323	43.02	AV	54	10.98	32.1	37.66	8.56	35.3	10.92

Frequency(MHz):			2441		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882	52.47	PK	74	21.53	50.41	30.98	7.58	36.5	2.06
4882	44.64	AV	54	9.36	42.58	30.98	7.58	36.5	2.06
7323	55.46	PK	74	18.54	44.54	37.66	8.56	35.3	10.92
7323	41.46	AV	54	12.54	30.54	37.66	8.56	35.3	10.92

Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960	54.08	PK	74	19.92	51.01	31.47	7.8	36.2	3.07
4960	45.34	AV	54	8.66	42.27	31.47	7.8	36.2	3.07
7440	52.19	PK	74	21.81	40.45	38.32	8.72	35.3	11.74
7440	44.62	PK	54	9.38	32.88	38.32	8.72	35.3	11.74

Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960	54.61	PK	74	19.39	51.54	31.47	7.8	36.2	3.07
4960	44.25	AV	54	9.75	41.18	31.47	7.8	36.2	3.07
7440	55.83	PK	74	18.17	44.09	38.32	8.72	35.3	11.74
7440	43.75	PK	54	10.25	32.01	38.32	8.72	35.3	11.74

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier

3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

**Results of Band Edges Test (Radiated)**

Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

**GFSK**

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390	56.11	PK	74	17.89	61.52	27.49	3.32	36.22	-5.41
2390	41.34	AV	54	12.66	46.75	27.49	3.32	36.22	-5.41
Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390	59.4	PK	74	14.6	64.81	27.49	3.32	36.22	-5.41
2390	41.15	AV	54	12.85	46.56	27.49	3.32	36.22	-5.41
Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.5	54.62	PK	74	19.38	60.13	27.45	3.38	36.34	-5.51
2483.5	41.09	AV	54	12.91	46.6	27.45	3.38	36.34	-5.51
Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.5	58.13	PK	74	15.87	63.64	27.45	3.38	36.34	-5.51
2483.5	40.73	AV	54	13.27	46.24	27.45	3.38	36.34	-5.51

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)- Pre-amplifier
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.

### 5.3 Maximum Peak Output Power

#### Limit

The Maximum Peak Output Power Measurement is 125mW (20.97).

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the powersensor.

#### Test Configuration



#### Test Results

Type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	0.12	20.97	Pass
	39	0.39		
	78	-1.02		
$\pi/4$ DQPSK	00	0.62	20.97	Pass
	39	0.54		
	78	0.25		
8DPSK	00	0.04	20.97	Pass
	39	-0.23		
	78	0.41		

Note: 1.The test results including the cable lose.

## 5.4 20dB Bandwidth

### Limit

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### Test Configuration



### Test Results

Modulation	Channel	20dB bandwidth (MHz)	Result
GFSK	CH00	1.020	Pass
	CH39	1.036	
	CH78	1.025	
$\pi/4$ DQPSK	CH00	1.361	
	CH39	1.362	
	CH78	1.361	
8DPSK	CH00	1.346	
	CH39	1.344	
	CH78	1.346	

Test plot as follows: