




<b>EMC TEST REPORT</b> <b>FCC 47 CFR Part 15B, ISED ICES-003 Issue 6</b>	
<b>Report Reference No</b>	G0M-1907-8351-EF0115B-V01
<b>Testing Laboratory</b>	Eurofins Product Service GmbH
<b>Address</b>	Storkower Str. 38c 15526 Reichenwalde Germany
<b>Accreditation</b>	 <p>DAkkS - Registration number : D-PL-12092-01-03 (ISED) ISED Testing Laboratory site: 3470A-2 DAkkS - Registration number : D-PL-12092-01-04 (FCC) FCC Filed Test Laboratory, Reg.-No.: 96970</p>
<b>Applicant</b>	EMUGE-Werk Richard Glimpel GmbH & Co. KG
<b>Address</b>	Nürnberger Straße 96-100 91207 Lauf GERMANY
<b>Test Specification</b>	
<b>Standard</b>	47 CFR Part 15 Subpart B ISED ICES-003 Issue 6 ANSI C63.4:2014
<b>Non-Standard Test Method</b>	None
<b>Equipment under Test (EUT):</b>	
<b>Product Description</b>	Spannzangen-Aufnahme mit integrierter Übersetzung und Impulszähler
<b>Model(s)</b>	Speedsyncro®-Modular-NFC
<b>Additional Model(s)</b>	None
<b>Brand Name(s)</b>	None
<b>Hardware Version(s)</b>	V.31
<b>Software Version(s)</b>	V0.9
<b>FCC-ID</b>	2AUL9-F376
<b>IC</b>	-/-
<b>Test Result</b>	<b>PASSED</b>

<b>Possible test case verdicts:</b>		
required by standard but not tested	N/T	
not required by standard	N/R	
required by standard but not appl. to test object	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
<b>Testing:</b>		
Date of receipt of test item	2019-08-05	
<b>Report:</b>		
Compiled by	Matthias Handrik	
Tested by (+ signature) (Responsible for Test)	Matthias Handrik	 .....
Approved by (+ signature) (Head of Lab)	Christian Weber	 .....
Date of Issue	2019-10-11	
Total number of pages	25	
<b>General Remarks:</b>		
<p>The test results presented in this report relate only to the object tested.</p> <p>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p>		
<b>Additional Comments:</b>		

**ABBREVIATIONS AND ACRONYMS**

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
T <sub>NOM</sub>	Nominal operating temperature
V <sub>NOM</sub>	Nominal supply voltage

**VERSION HISTORY**

Version History			
Version	Issue Date	Remarks	Revised By
01	2019-10-11	Initial Release	

**REPORT INDEX**

<b>1</b>	<b>Equipment (Test Item) Under Test.....</b>	<b>6</b>
1.1	Equipment Ports.....	7
1.2	Equipment Photos - Internal.....	8
1.3	Equipment Photos - External.....	10
1.4	Support Equipment.....	12
1.5	Operational Modes.....	13
1.6	EUT Configuration.....	14
1.7	Sample emission level calculation.....	15
<b>2</b>	<b>Result Summary.....</b>	<b>16</b>
2.1	Test Conditions and Results - Radiated emissions acc. to ANSI C63.4.....	17



## 1 Equipment (Test Item) Under Test

Description	Spannzangen-Aufnahme mit integrierter Übersetzung und Impulszähler	
Model	Speedsyncro®-Modular-NFC	
Additional Model(s)	None	
Brand Name(s)	None	
Serial Number(s)	unspecified	
Hardware Version(s)	V.31	
Software Version(s)	V0.9	
FCC-ID	2AUL9-F376	
IC	-/-	
Class	Class B	
Equipment type	Table top	
Highest internal frequency [MHz]	13.56	
Radio Module	Type	NFC module
	Model	Unspecified
	Manufacturer	Unspecified
	FCC-ID	Unspecified
	IC	Unspecified
Supply Voltage	$V_{NOM}$	3.6 VDC Lithium-thionyl chloride (Li-SOCl <sub>2</sub> )
AC/DC-Adaptor	None	
Manufacturer	EMUGE-Werk Richard Glimpel GmbH & Co. KG Nürnberger Straße 96-100 91207 Lauf GERMANY	

## 1.1 Equipment Ports


Name	Type	Attributes	Comment
None			
Description:			
AC	AC mains power input/output port		
DC	DC power input/output port		
BAT	DC power input port connected to external battery		
IO	Input/Output port		
TP	Telecommunication port		
NE	Non-electrical port		

## 1.2 Equipment Photos - Internal

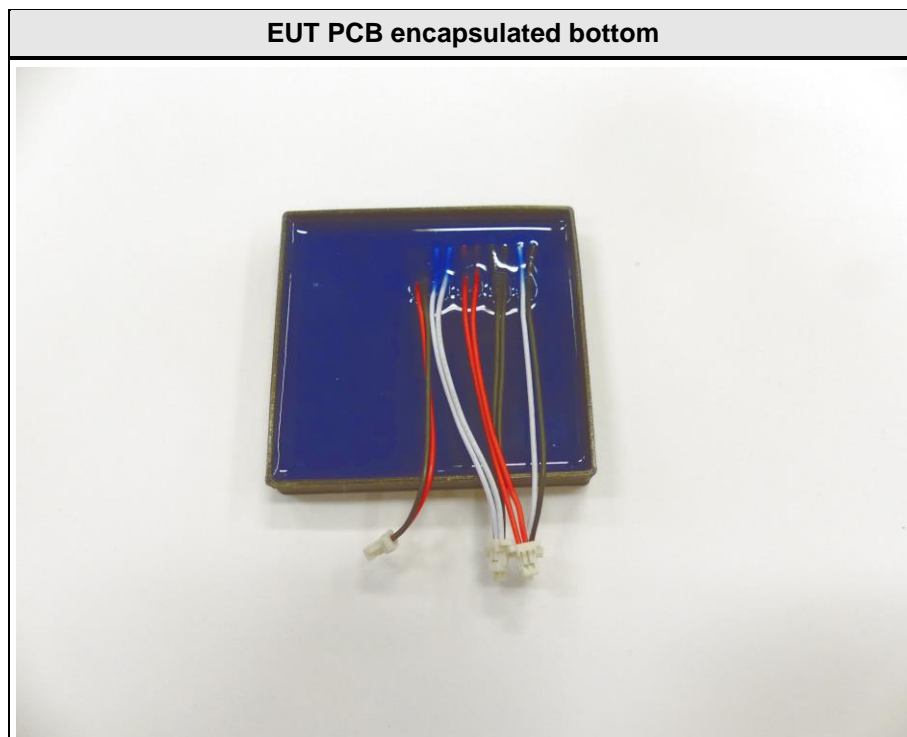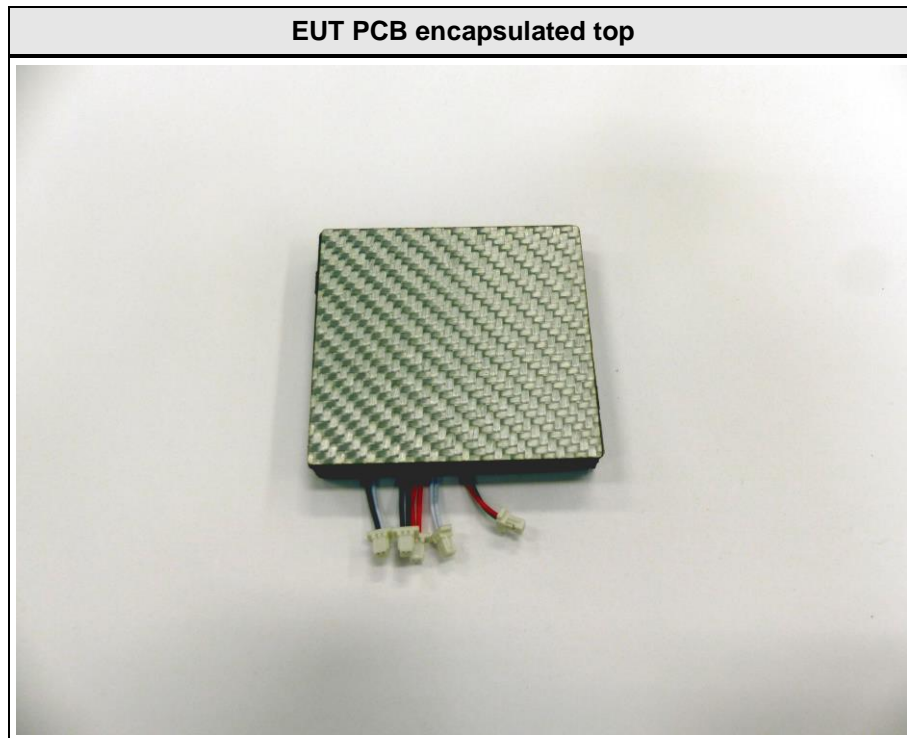





**EUT PCB top**

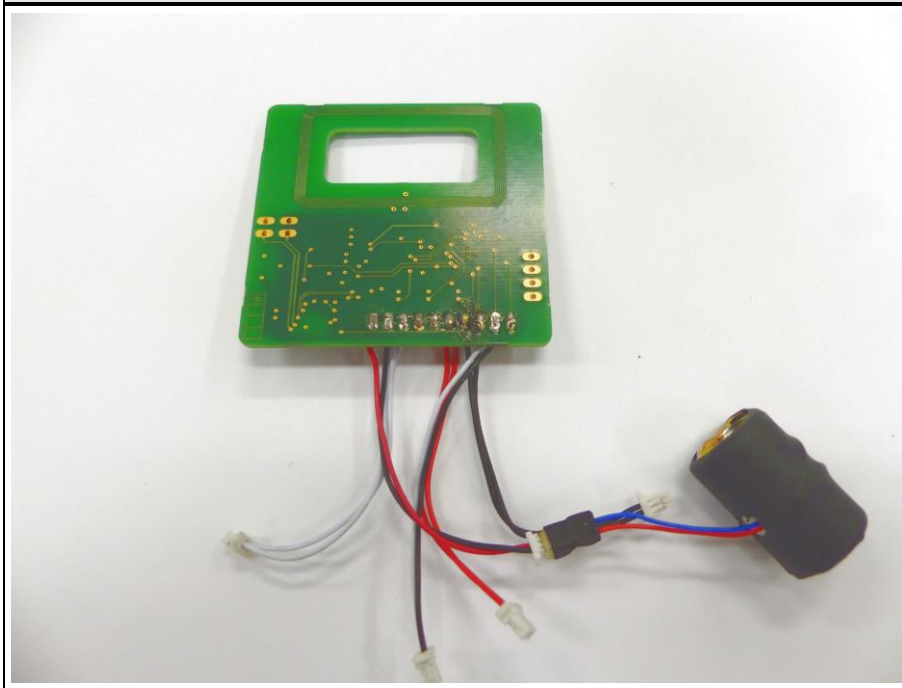


**EUT PCB bottom**

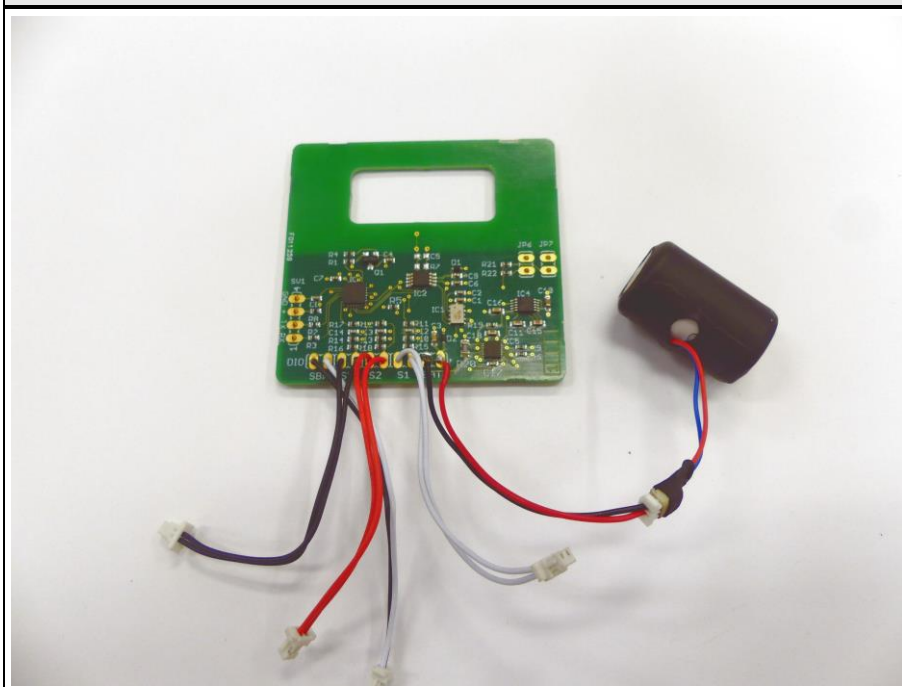


### 1.3 Equipment Photos - External

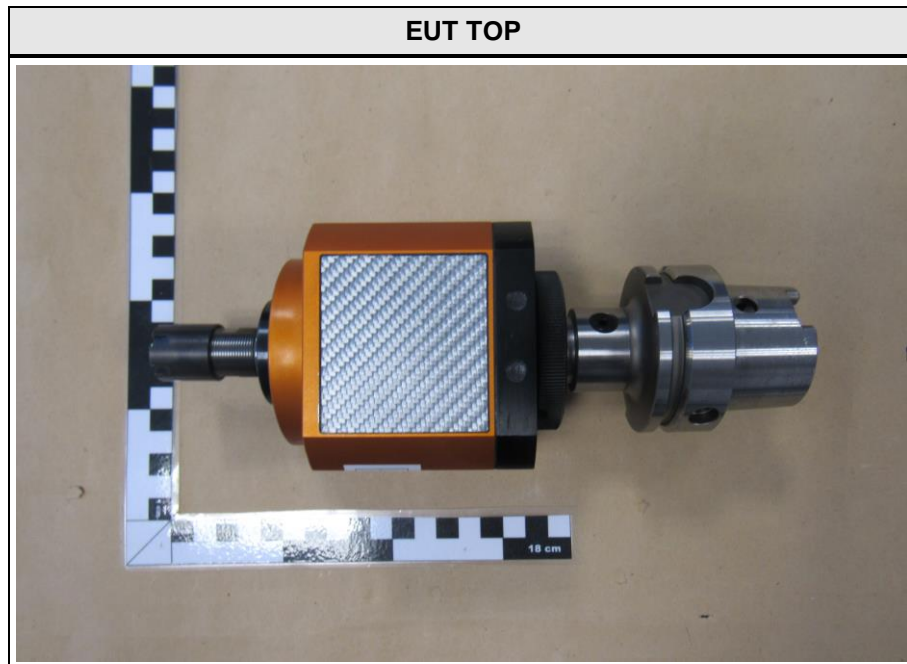

EUT BACK

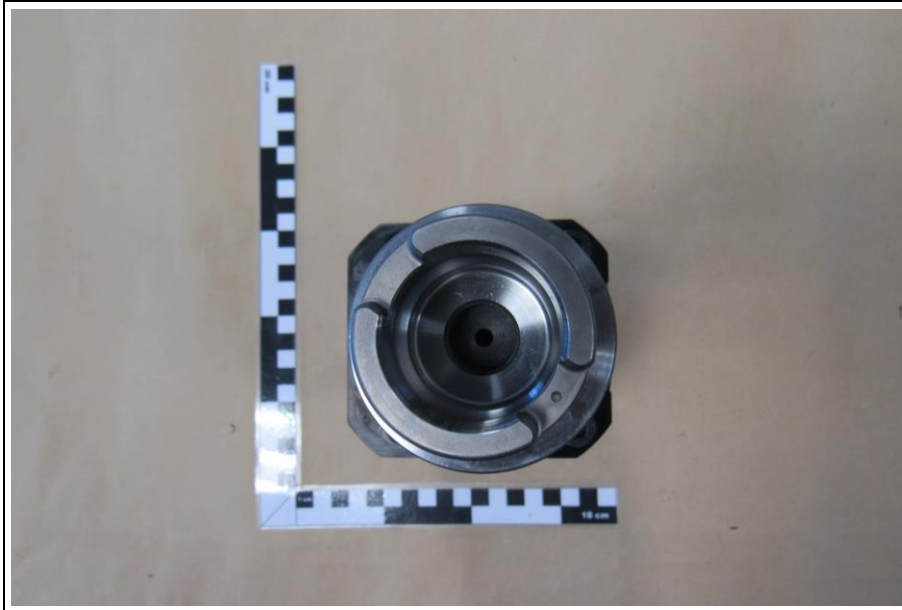

EUT FRONT

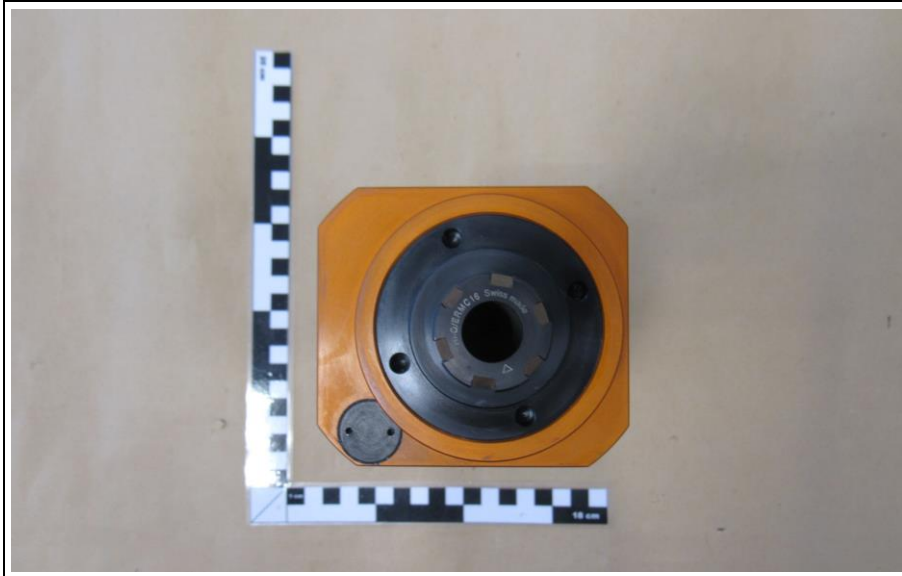

**1.4 Support Equipment**

Product Type	Device	Manufacturer	Model	Comment
MON	Smartphone	Samsung	Galaxy S4	
MON	Android App	EMUGE	V0.9	
Description:				
AE	Auxiliary Equipment			
SIM	Simulator			
MON	Monitoring Equipment			
CBL	Connecting Cable			
Comment:				

### 1.5 Operational Modes

Mode #	Description
1	EUT wait for read out DATA via NFC to smartphone.
Comment:	

## 1.6 EUT Configuration

Configuration #	Description
1	EUT powered via internal battery.
Comment:	

### 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyser in dBµV. Any external preamplifiers used are taken into account through internal analyser settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyser. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyser (dB}\mu\text{V)} + \text{A.F. (dB/m)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	=	Net Reading	:	Net reading - FCC limit	=	Margin
+21.5 dBµV + 26 dB/m		= 47.5 dBµV/m		47.5 dBµV/m - 57.0 dBµV/m		= -9.5 dB

## 2 Result Summary

FCC 47 CFR Part 15B, ISED ICES-003 Issue 6				
Reference	Requirement	Reference Method	Result	Remarks
Emission				
FCC 15.109 ICES-003, 8, 6.1	Radiated emissions	ANSI C63.4:2014	PASS	
FCC 15.107 ICES-003, 8, 6.2	AC power line conducted emissions	ANSI C63.4:2014	N/R	
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object







## 2.1 Test Conditions and Results - Radiated emissions acc. to ANSI C63.4

### 2.1.1 Information

Test Information	
Reference	FCC 15.109, ICES-003, 8, 6.1
Reference method	ANSI C63.4:2014 Section 8
Equipment class	Class B
Equipment type	Table top
Highest internal frequency [MHz]	13.56
Measurement range	30 MHz to 1 GHz
Temperature [°C]	23
Humidity [%]	68
Operator	Matthias Handrik
Date	2019-08-29

### 2.1.2 Setup

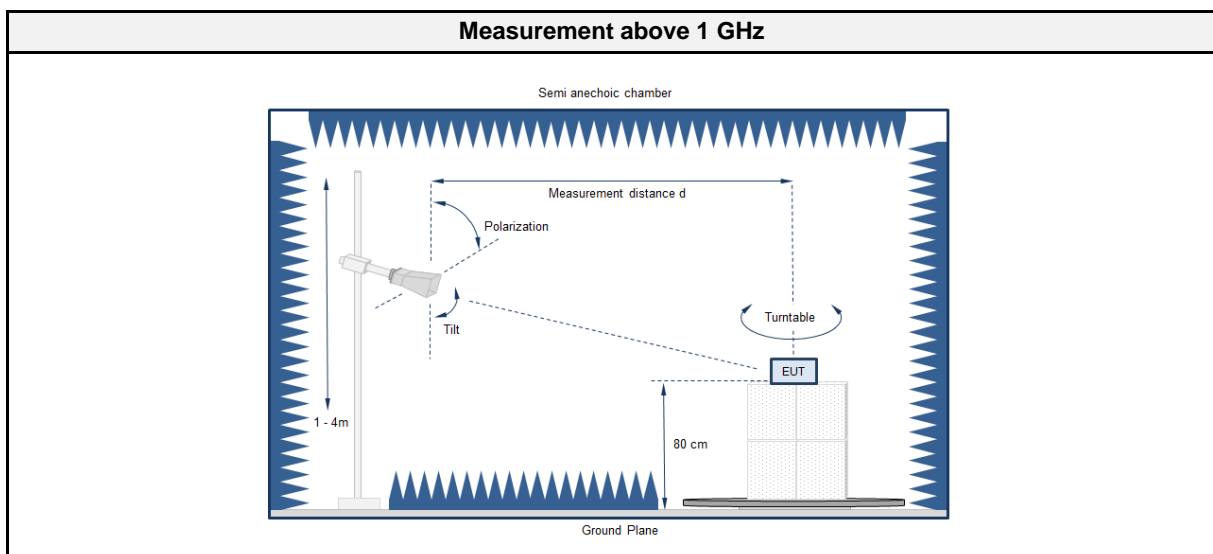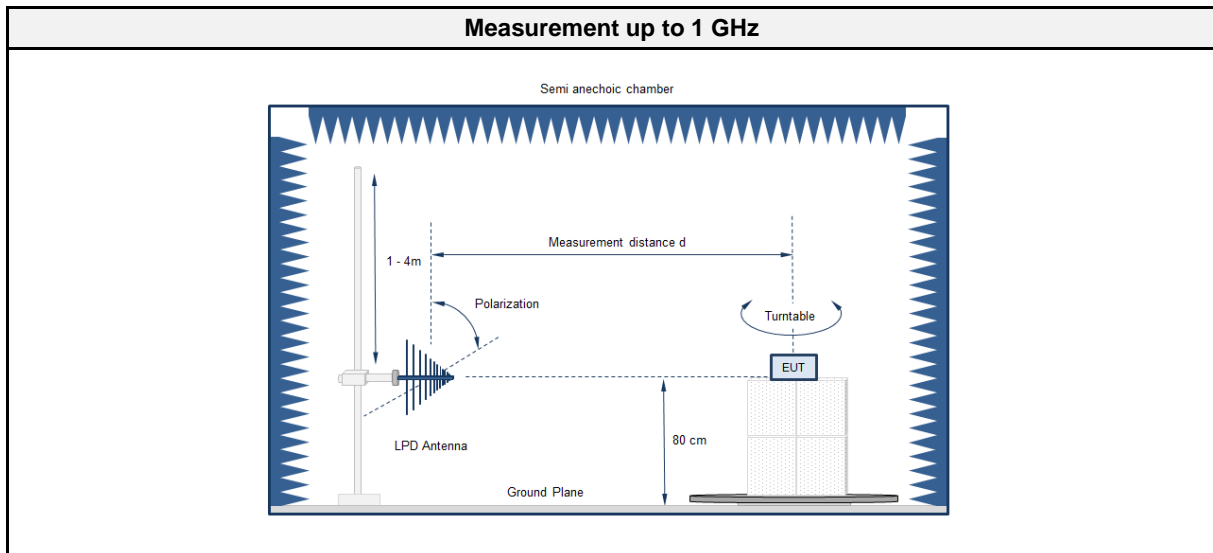

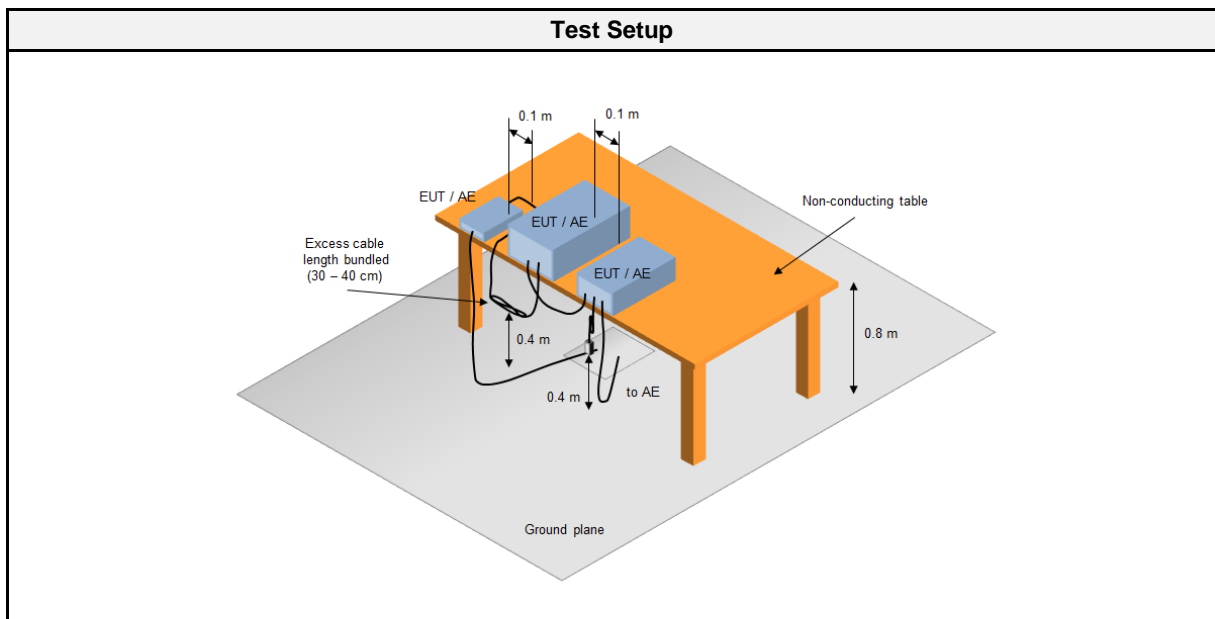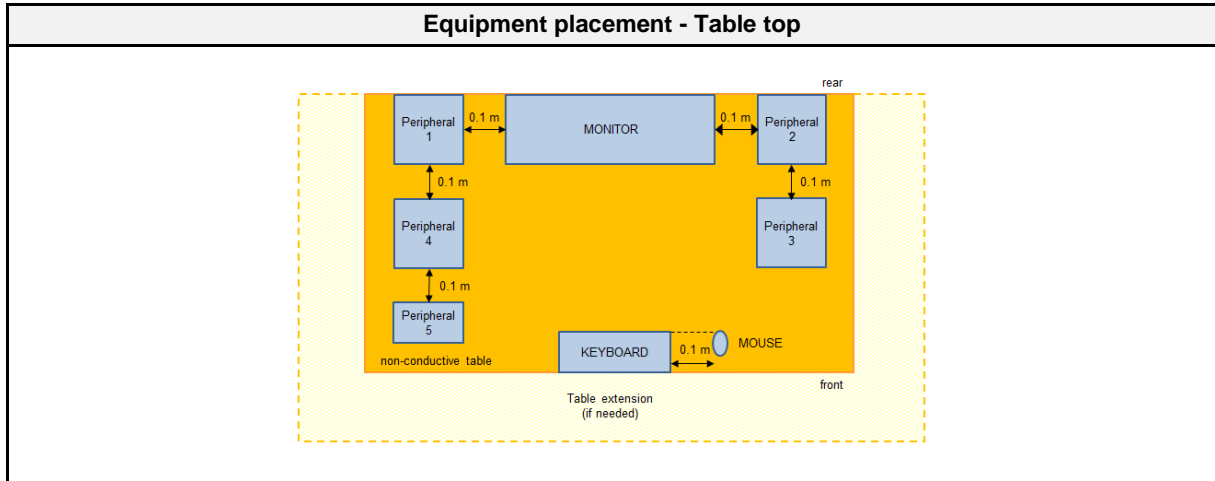

2.1.3 Equipment

Test Software			
Description	Manufacturer	Name	Version
EMC Software	DARE Instruments	Radimation	2016.1.10

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic chamber	Frankonia	AC1	EF00062	2018-07	2021-07
EMI Test Receiver	Rohde & Schwarz Vertriebs GmbH	ESR7	EF00943	2019-07	2020-07
Biconical Antenna	R&S	HK 116	EF00030	2019-04	2022-04
LPD Antenna	R&S	HL 223	EF00187	2019-05	2022-05

## 2.1.4 Procedure

<b>Exploratory measurement</b>	
1.	The EUT was placed on a non-conductive table at a height of 0.8m.
2.	The EUT and support equipment, if needed, were set up to simulate typical usage.
3.	Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.
4.	The antenna was placed at a distance of 3 or 10 m.
5.	The received signal was monitored at the measurement receiver.
6.	This procedure has to be performed in both antenna polarizations, horizontal and vertical.
7.	The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3

<b>Final measurement</b>	
1.	The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver.
2.	A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast.
3.	The EUT and cable arrangement were based on the exploratory measurement results.
4.	Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.
5.	The test data of the worst-case conditions were recorded and shown on the next pages.

## 2.1.5 Limits



<b>Class B @ 3 m</b>		
Frequency [MHz]	Detector	Limit [dB $\mu$ V/m]
30 - 88	Quasi-peak	40
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46
960 - 1000	Quasi-peak	54
> 1000	Peak Average	74 54


<b>Class A @ 10 m</b>		
Frequency [MHz]	Detector	Limit [dB $\mu$ V/m]
30 - 88	Quasi-peak	39
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46.5
960 - 1000	Quasi-peak	49.5
> 1000	Peak Average	69.5 49.5

## 2.1.6 Results

<b>Test Results</b>			
Operational mode	EUT Configuration	Verdict	Remark
1	1	PASS	

2.1.7 Setup Photos

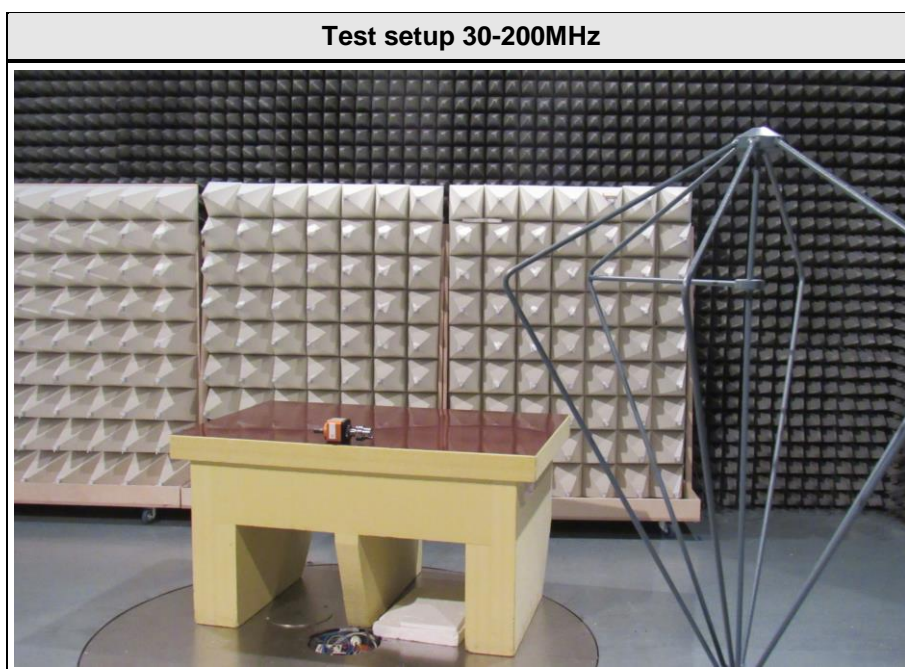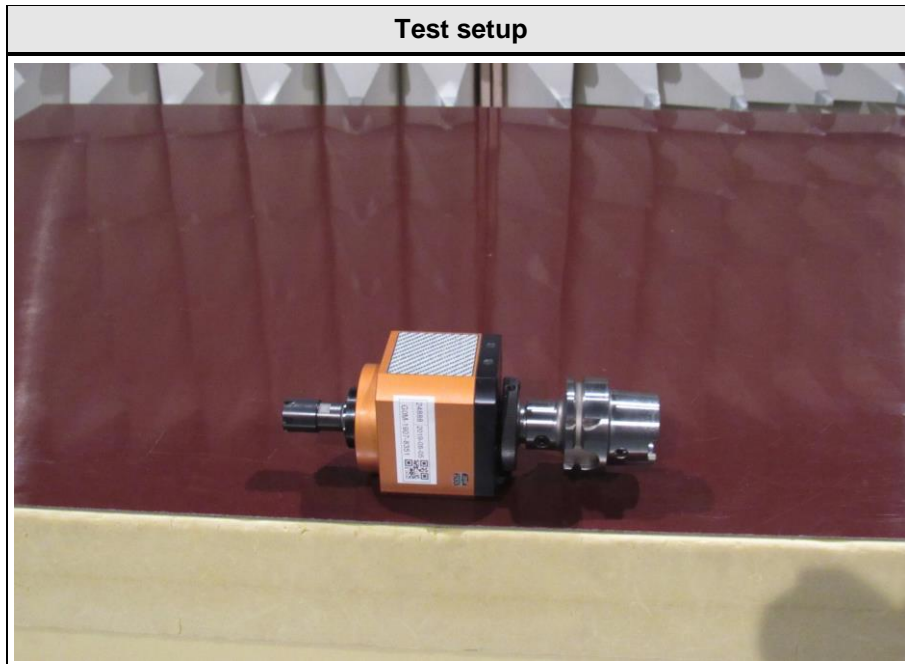

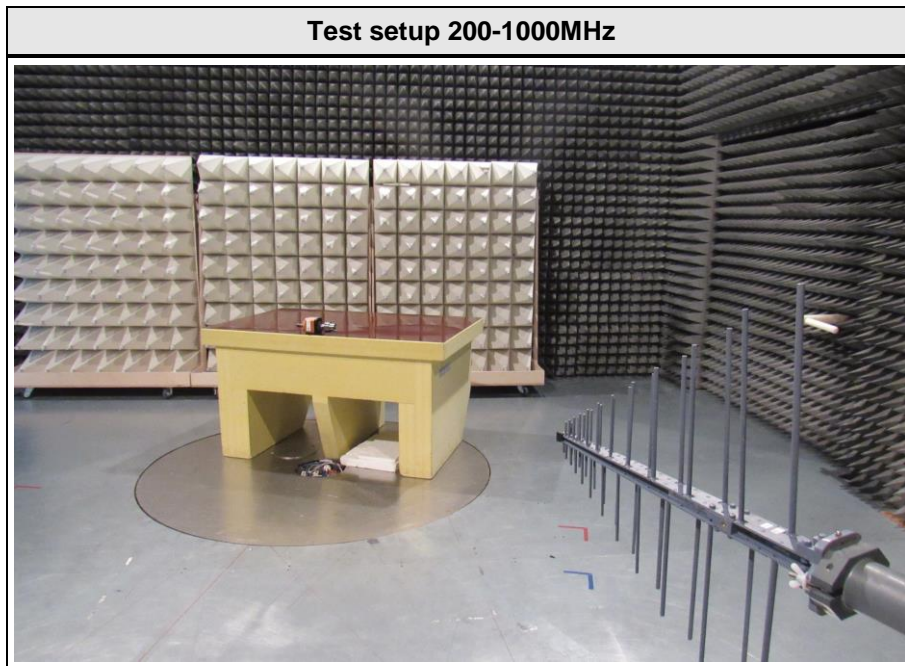


2.1.8 Records

**Radiated emissions according to FCC Part 15b**

Project number: G0M-1907-8351

Applicant:	EMUGE-Werke Richard Glimpel GmbH & Co. KG
EUT Name:	Spannzangen-Aufnahme mit intergrieter Übersetzung und Impulszähler
Model:	Speedsyncro® -Modular-NFC
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Handrik
Test Conditions:	Tnom: 23°C, Unom: 3.6 V DC (Li-SOCI2)
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3m
Mode:	mode# 1
Test Date:	2019-08-29
Note:	

Index 3

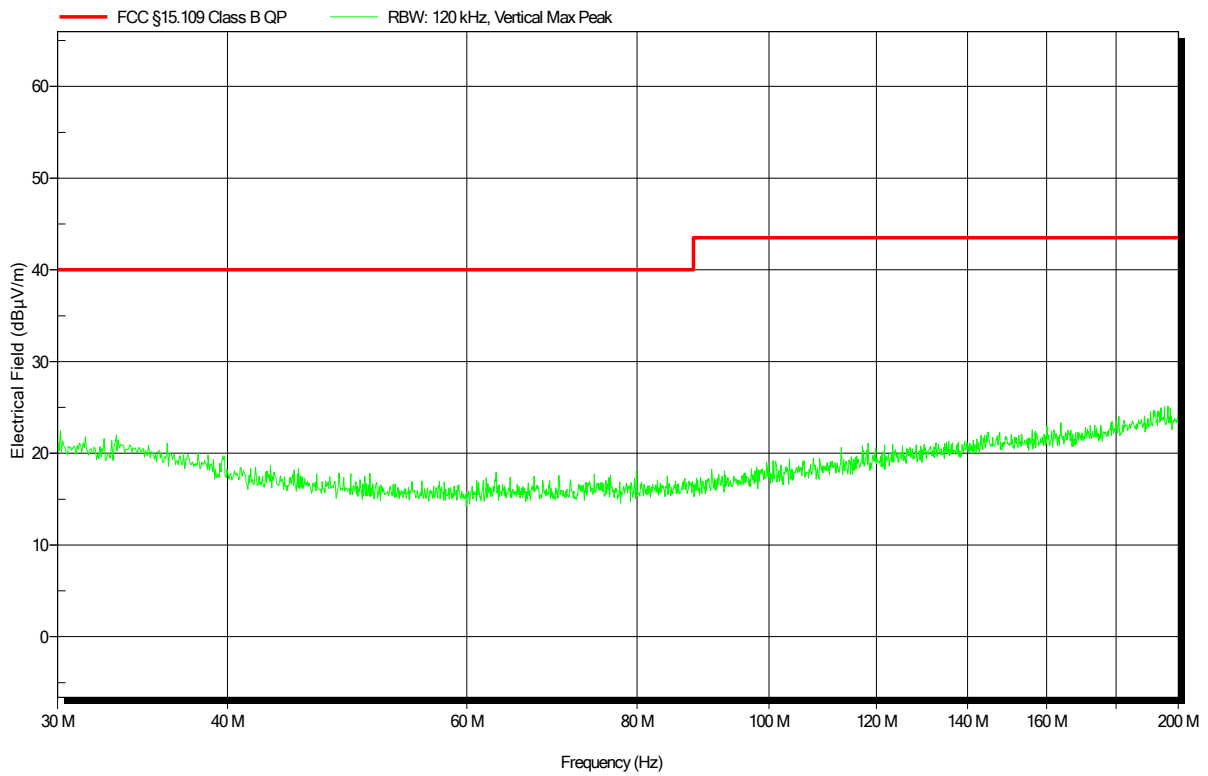


### Radiated emissions according to FCC Part 15b

Project number: G0M-1907-8351

Applicant: EMUGE-Werke Richard Glimpel GmbH & Co. KG  
 EUT Name: Spannzangen-Aufnahme mit intergrieter Übersetzung und Impulszähler  
 Model: Speedsyncro® -Modular-NFC  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Handrik  
 Test Conditions: Tnom: 23°C, Unom: 3.6 V DC (Li-SOCl2)  
 Antenna: Rohde & Schwarz HK 116, Horizontal  
 Measurement distance: 3m  
 Mode: mode# 1  
 Test Date: 2019-08-29  
 Note:

Index 4

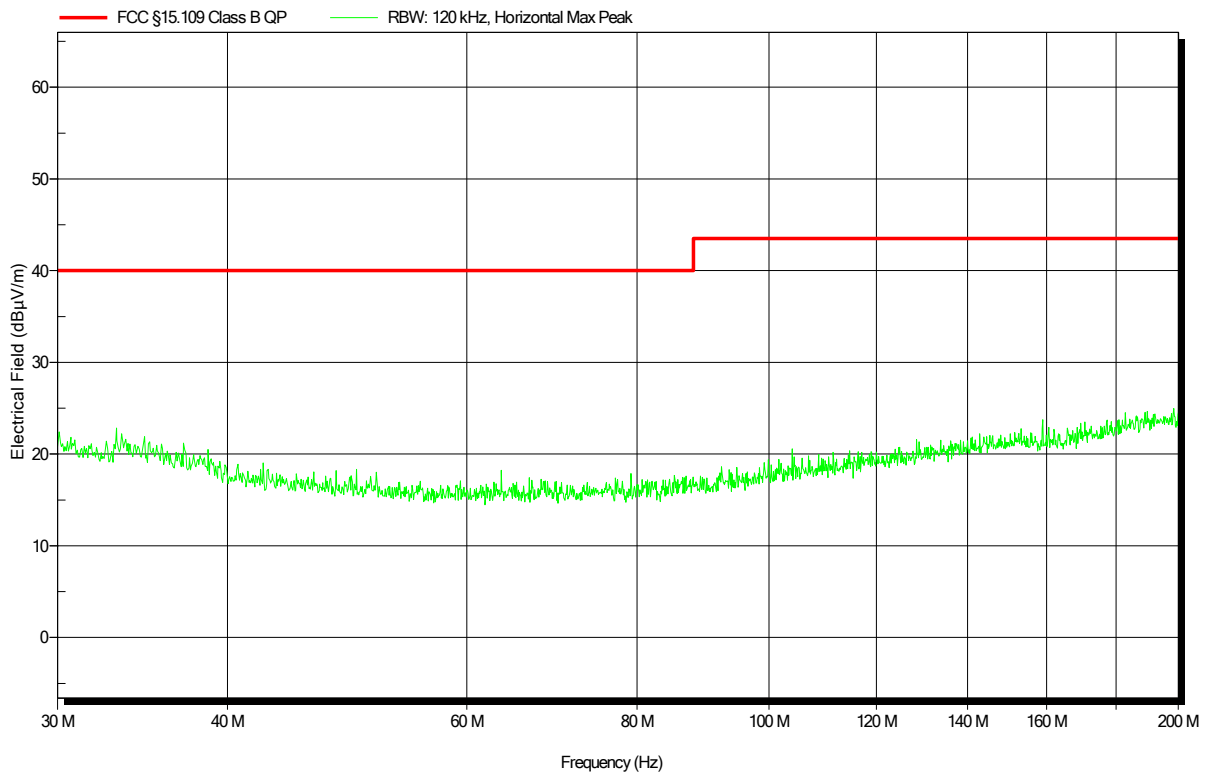


**Radiated emissions according to FCC Part 15b**

Project number: G0M-1907-8351

Applicant: EMUGE-Werke Richard Glimpel GmbH & Co. KG  
 EUT Name: Spannzangen-Aufnahme mit intergrieter Übersetzung und Impulszähler  
 Model: Speedsyncro® -Modular-NFC  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Handrik  
 Test Conditions: Tnom: 23°C, Unom: 3.6 V DC (Li-SOCl2)  
 Antenna: Rohde & Schwarz HL 223, Vertical  
 Measurement distance: 3m  
 Mode: mode# 1  
 Test Date: 2019-08-29  
 Note:

Index 5

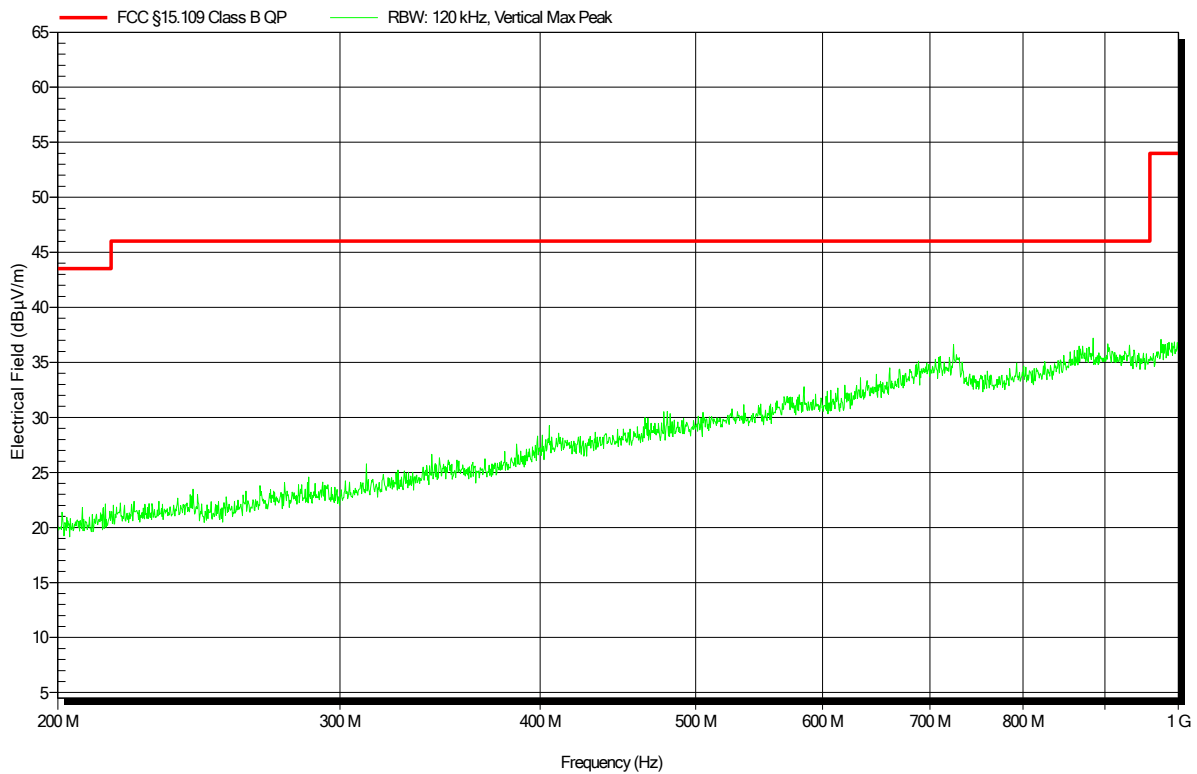



**Radiated emissions according to FCC Part 15b**

Project number: G0M-1907-8351

Applicant: EMUGE-Werke Richard Glimpel GmbH & Co. KG  
 EUT Name: Spannzangen-Aufnahme mit intergrieter Übersetzung und Impulszähler  
 Model: Speedsyncro® -Modular-NFC  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Handrik  
 Test Conditions: Tnom: 23°C, Unom: 3.6 V DC (Li-SOC12)  
 Antenna: Rohde & Schwarz HL 223, Horizontal  
 Measurement distance: 3m  
 Mode: mode# 1  
 Test Date: 2019-08-29  
 Note:

Index 6

