

TEST REPORT

Reference No. : WTS19S09062313W002
FCC ID..... : 2AUMC-GC338169
Applicant : RIF6 LLC
Address : 7th Floor, 37 East 18th Street, New York 10003, New York, United States
Manufacturer : AJS Electronics Limited
Address : 15/F, Liuchuang Building II, No. 29, South Ring Road, South Area Hi-Tech Zone, Nanshan District, Shenzhen, China
Product : Sound Bar
Model(s)..... : RIF030079N
Additional Model(s) : FS68H-2.1, FS18H-2.1, FS22H-2.1, FS23H-2.1, FS32H-2.1, FS33H-2.1, FS52H-2.1, FS62H-2.1, FS63H-2.1, FS69H-2.1, FS82H-2.1, FS83H-2.1, FS18HS, FS21HS, FS22HS, FS23HS, FS32HS, FS33HS, FS52HS, FS62HS, FS63HS, FS68HS, FS69HS, FS72HS, FS82HS, FS83HS
Standards : FCC CFR47 Part 1.1307:2019
FCC CFR47 Part 2.1093.:2019
Date of Receipt sample : 2019-09-06
Date of Test : 2019-09-15 to 2019-10-14
Date of Issue : 2019-10-16
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Test site/Test Location:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Frank Yin

Frank Yin / Test Engineer


Approved by:

 Philo Zhong

Philo Zhong / Manager

1 Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation, the certification number is 4243.01) of USA, CNAS (China National Accreditation Service for Conformity Assessment, the registration number is L3110) of China. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CEC(California energy efficiency), ISED (Innovation, Science and Economic Development Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek(ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.

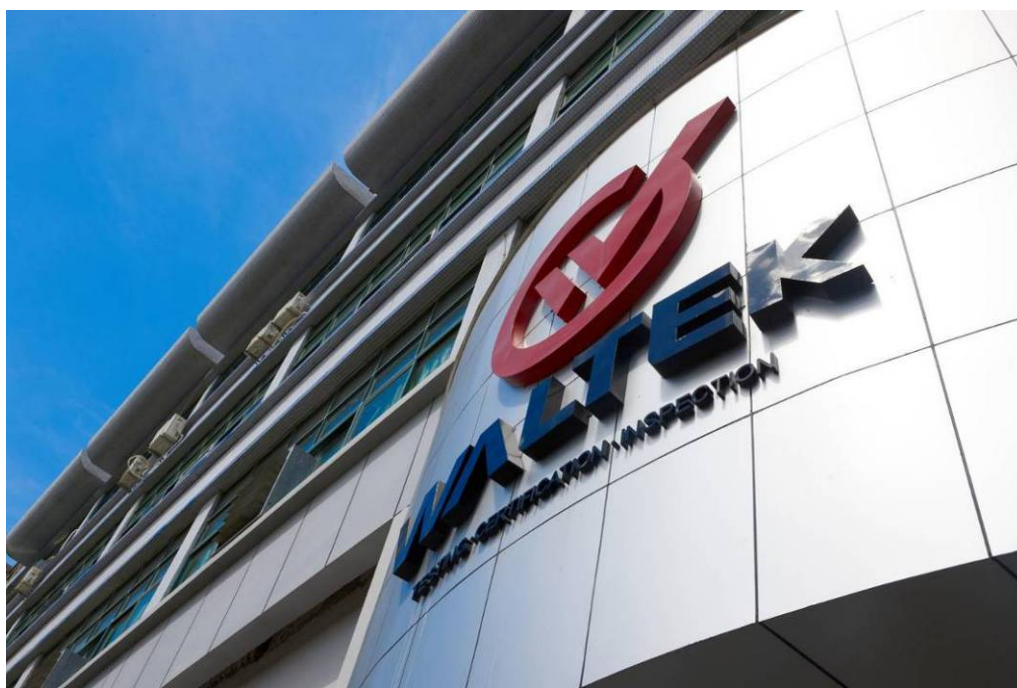

Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. ElectroMagnetic Compatibility(EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

1.1 Test Facility

A. Accreditations for Conformity Assessment (International)

1. Requirements for Conformity Assessment (International)			
Country/Region	Scope Covered By	Scope	Note
USA	ISO/IEC 17025	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.			

B.TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd.	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

2 Contents

	Page
COVER PAGE.....	1
1 LABORATORIES INTRODUCTION.....	2
1.1 TEST FACILITY.....	3
2 CONTENTS	4
3 REVISION HISTORY	5
4 GENERAL INFORMATION.....	6
4.1 GENERAL DESCRIPTION OF E.U.T	6
4.2 DETAILS OF E.U.T.....	6
5 FCC ID: 2AUMC-GC338169. RF EXPOSURE REPORT.....	7
5.1 REQUIREMENTS.....	7
5.2 THE PROCEDURES / LIMIT.....	7
5.3 RESULT: COMPLIANCE	7

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS19S09062313W002	2019-09-06	2019-09-15 to 2019-10-14	2019-10-16	original	-	Valid

4 General Information

4.1 General Description of E.U.T

Product	Sound Bar
Model(s):	RIF030079N, FS68H-2.1, FS18H-2.1, FS22H-2.1, FS23H-2.1, FS32H-2.1, FS33H-2.1, FS52H-2.1, FS62H-2.1, FS63H-2.1, FS69H-2.1, FS82H-2.1, FS83H-2.1, FS18HS, FS21HS, FS22HS, FS23HS, FS32HS, FS33HS, FS52HS, FS62HS, FS63HS, FS68HS, FS69HS, FS72HS, FS82HS, FS83HS
Model(s) Difference:	Only the model names are different. The model: RIF030079N is test sample.
Operation Frequency:	2402-2480MHz, 79(EDR) Channels in total
Antenna installation:	PCB Printed Antenna
Antenna Gain:	0dBi
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK

4.2 Details of E.U.T

Ratings	Input: 120V~, 60Hz, 80W
----------------	-------------------------

5 FCC ID: 2AUMC-GC338169. RF Exposure Report

Test Requirement: FCC Part 1.1307

Evaluation Method FCC Part 2.1093 & KDB 447498 D01 General RF Exposure Guidance v06

5.1 Requirements

1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\frac{[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]}{\leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR where}}$$

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz
2. Power and distance are rounded to the nearest mW and mm before calculation
3. The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

5.2 The procedures / limit

Conducted Peak power(dBm)	Conducted Peak power(mW)	Source-based time-averaged maximum conducted output power(mW)	Minimum test separation distance required for the exposure conditions (mm)	SAR Test Exclusion Thresholds Calculation Value	SAR Test Exclusion Thresholds Limit	Result
2.75	1.88	1.88	5	0.592	3.0	Compliance

Remark: Max. duty factor is 100%

Low Chanel: $f=2402\text{MHz}=2.402\text{GHz}$, so $\sqrt{f(\text{GHz})}=1.550$

High Chanel: $f=2480\text{MHz}=2.480\text{GHz}$, so $\sqrt{f(\text{GHz})}=1.575$

5.3 Result: Compliance

No SAR measurement is required.

=====End of Report=====