

## TEST REPORT

**Product** : headsup  
**Trade mark** : Revsmart  
**Model/Type reference** : R01, RXY ( the first "X" can be a number from 0 to 9, and the second "Y" can be a number from 0 to 9 )  
**Serial Number** : N/A  
**Report Number** : EED32L00236701  
**FCC ID** : 2AUNPHEADSUP-R01  
**Date of Issue:** : Sep. 29, 2019  
**Test Standards** : 47 CFR Part 15 Subpart C  
**Test result** : PASS

Prepared for:

**REVSMART WEARABLE HK CO LTD**  
**22/F., 3 Lockhart Road, Wanchai, Hongkong**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**

Tested By:

*mark.chen.*

Mark Chen

Compiled by:

*Sunlight Sun*

Sunlight Sun

Reviewed by:

*Ware Xin*

Ware Xin

Approved by:

*Kevin Yang*

Kevin Yang

Date:

Sep. 29, 2019

Check No.:3096309266



## 2 Version

Version No.	Date	Description
00	Sep. 29, 2019	Original

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.

Model No.: R01, RXY

( the first "X" can be a number from 0 to 9, and the second "Y" can be a number from 0 to 9 )

Only the model R01 was tested, The main difference is only the type of microphone and the appearance of product, some models are uses the ECM microphone, while the others model are uses the microphone of MEMS. Other aspects such as Bluetooth chip, power amplifier, RF circuit, power management circuit are the same, and also share the same PCB.


## 4 Content

<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 VERSION</b> .....	<b>2</b>
<b>3 TEST SUMMARY</b> .....	<b>3</b>
<b>4 CONTENT</b> .....	<b>4</b>
<b>5 TEST REQUIREMENT</b> .....	<b>5</b>
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
<b>6 GENERAL INFORMATION</b> .....	<b>7</b>
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	8
6.4 DESCRIPTION OF SUPPORT UNITS.....	9
6.5 TEST LOCATION.....	9
6.6 DEVIATION FROM STANDARDS.....	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.9 MEASUREMENT UNCERTAINTY(95% CONFIDENCE LEVELS, K=2).....	9
<b>7 EQUIPMENT LIST</b> .....	<b>10</b>
<b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b> .....	<b>14</b>
EUT Duty Cycle.....	15
Appendix A): 20dB Occupied Bandwidth.....	16
Appendix B): Carrier Frequency Separation.....	24
Appendix C): Dwell Time.....	29
Appendix D): Hopping Channel Number.....	34
Appendix E): Conducted Peak Output Power.....	37
Appendix F): Band-edge for RF Conducted Emissions.....	42
Appendix G): RF Conducted Spurious Emissions.....	48
Appendix H) Pseudorandom Frequency Hopping Sequence.....	59
Appendix I) Antenna Requirement.....	60
Appendix J) AC Power Line Conducted Emission.....	61
Appendix K) Restricted bands around fundamental frequency (Radiated).....	64
Appendix L) Radiated Spurious Emissions.....	89
<b>PHOTOGRAPHS OF TEST SETUP</b> .....	<b>95</b>
<b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b> .....	<b>97</b>

## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Conducted test setup

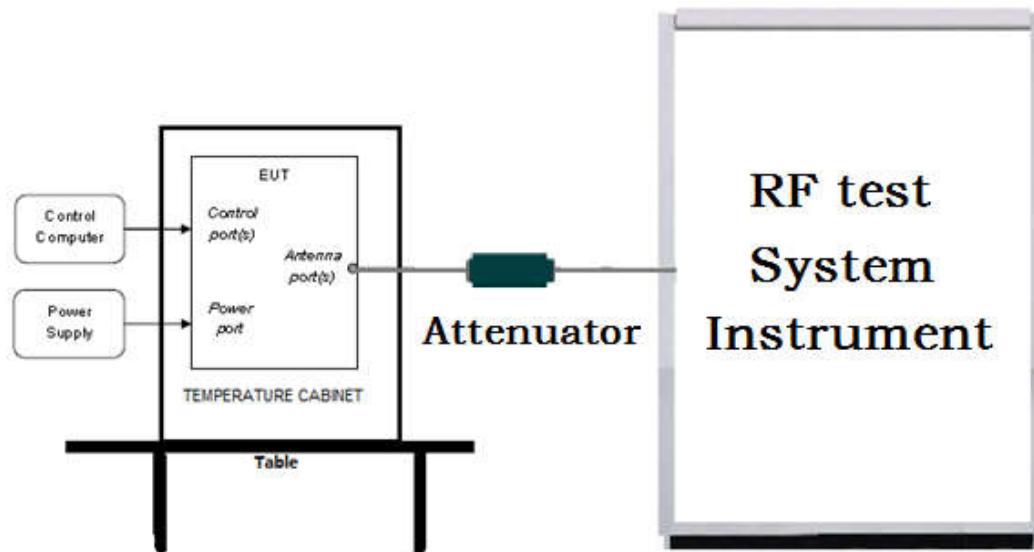

#### 5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

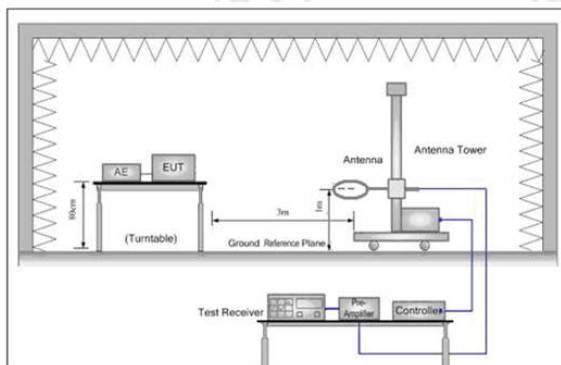


Figure 1. Below 30MHz

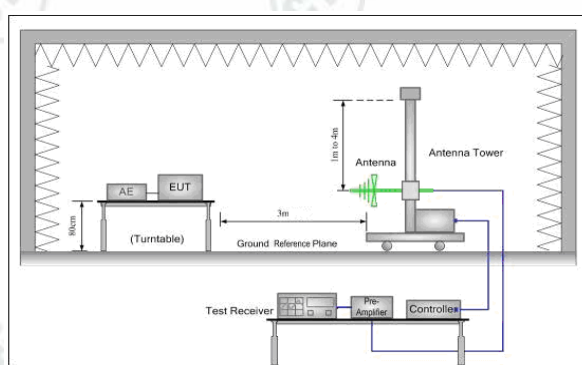


Figure 2. 30MHz to 1GHz


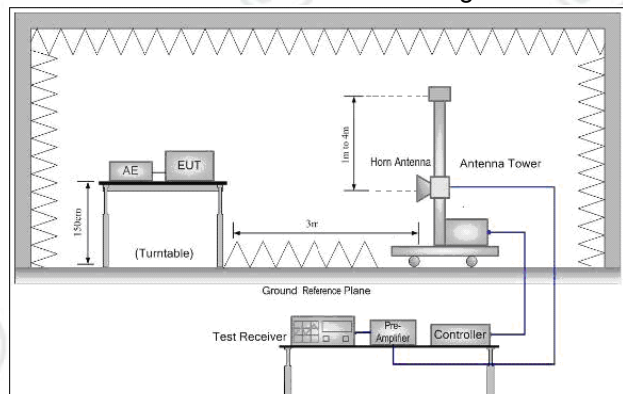


Figure 3. Above 1GHz



### 5.1.3 For Conducted Emissions test setup

#### Conducted Emissions setup

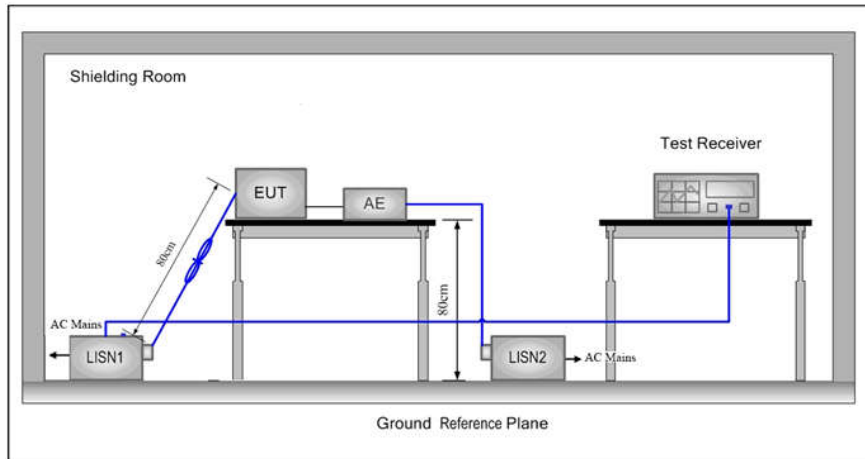

## 5.2 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

## 5.3 Test Condition

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/π/4DQPSK/ 8DPSK(DH1,DH3,DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz

## 6 General Information

### 6.1 Client Information

Applicant:	REVSMART WEARABLE HK CO LTD
Address of Applicant:	22/F., 3 Lockhart Road, Wanchai, Hongkong
Manufacturer:	REVSMART WEARABLE HK CO LTD
Address of Manufacturer:	22/F., 3 Lockhart Road, Wanchai, Hongkong
Factory:	Dongguan YouHong Electronics Co.,Ltd
Address of Factory:	No 152, Xin Yuan 1st Road, Song Bo Lang Industrial Park, Dalang Town, Dongguan City, Guangdong Province, P.R.C

### 6.2 General Description of EUT

Product Name:	headsup	
Model No.(EUT):	R01, RXY ( the first "X" can be a number from 0 to 9, and the second "Y" can be a number from 0 to 9 )	
Test Model No:	R01	
Tark mark:	Revsmart	
<i>EUT Supports Radios application</i>	BT 5.0 Dual mode 2402MHz to 2480MHz	
Power Supply:	Battery	420 mAh 3.7V.
Sample Received Date:	Aug. 26, 2019	
Sample tested Date:	Aug. 26, 2019 to Sep. 27, 2019	

### 6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	5.0
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Test Power Grade:	GFSK : L:20 M:0 H:0 $\pi/4$ DQPSK : L:20 M:0 H:10 8DPSK : L:30 M:10 H:10
Test Software of EUT:	BlueTest3
Antenna Type:	PCB antenna
Antenna Gain:	-0.76 dBi
Test Voltage:	DC 3.7V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		



## 6.4 Description of Support Units

The EUT has been tested independently

## 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China518101

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

## 6.6 Deviation from Standards

None.

## 6.7 Abnormalities from Standard Conditions

None.

## 6.8 Other Information Requested by the Customer

None.

## 6.9 Measurement Uncertainty(95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

## 7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-01-2019	02-29-2020
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-01-2019	02-29-2020
Signal Generator	Keysight	N5182B	MY53051549	03-01-2019	02-29-2020
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-09-2019	01-08-2020
DC Power	Keysight	E3642A	MY54426035	03-01-2019	02-29-2020
PC-1	Lenovo	R4960d	---	03-01-2019	02-29-2020
BT&WI-FI Automatic control	R&S	OSP120	101374	03-01-2019	02-29-2020
RF control unit	JS Tonscend	JS0806-2	15860006	03-01-2019	02-29-2020
RF control unit	JS Tonscend	JS0806-1	15860004	03-01-2019	02-29-2020
RF control unit	JS Tonscend	JS0806-4	158060007	03-01-2019	02-29-2020
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	03-01-2019	02-29-2020
Temperature/Humidity Indicator	biaozhi	HM10	1804186	10-12-2018	10-11-2019

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-20-2019	05-19-2020
Temperature/ Humidity Indicator	Defu	TH128	/	06-14-2019	06-13-2020
Communication test set	Agilent	E5515C	GB47050 534	03-01-2019	02-28-2022
Communication test set	R&S	CMW500	152394	03-01-2019	02-29-2020
LISN	R&S	ENV216	100098	05-08-2019	05-07-2020
LISN	schwarzbeck	NNLK8121	8121-529	05-08-2019	05-07-2020
Voltage Probe	R&S	ESH2-Z3 0299.7810.5 6	100042	06-13-2017	06-12-2020
Current Probe	R&S	EZ-17 816.2063.03	100106	05-20-2019	05-19-2020
ISN	TESEQ	ISN T800	30297	01-16-2019	01-15-2020
Barometer	changchun	DYM3	1188	06-20-2019	06-19-2020

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-401	12-21-2018	12-20-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-26-2019	07-25-2020
Microwave Preamplifier	Agilent	8449B	3008A024 25	07-12-2019	07-11-2020
Microwave Preamplifier	Tonscend	EMC051845 SE	980380	01-16-2019	01-15-2020
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D- 1869	04-25-2018	04-24-2021
Horn Antenna	ETS- LINDGREN	3117	00057410	06-05-2018	06-04-2021
Double ridge horn antenna	A.H.SYSTEMS	SAS-574	374	06-05-2018	06-04-2021
Pre-amplifier	A.H.SYSTEMS	PAP-1840-60	6041.604 2	07-26-2019	07-25-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B- 076	04-25-2018	04-24-2021
Spectrum Analyzer	R&S	FSP40	100416	04-28-2019	04-27-2020
Receiver	R&S	ESCI	100435	05-20-2019	05-19-2020
Receiver	R&S	ESCI7	100938- 003	11-23-2018	11-22-2019
-Multi device Controller	matur	NCD/070/107 11112	---	01-09-2019	01-08-2020
LISN	Schwarzbeck	NNBM8125	81251547	05-08-2019	05-07-2020
LISN	Schwarzbeck	NNBM8125	81251548	05-08-2019	05-07-2020
Signal Generator	Agilent	E4438C	MY45095 744	03-01-2019	02-29-2020
Signal Generator	Keysight	E8257D	MY53401 106	03-01-2019	02-29-2020
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	10-12-2018	10-11-2019
Communication test set	Agilent	E5515C	GB47050 534	03-01-2019	02-28-2022
Cable line	Fulai(7M)	SF106	5219/6A	01-09-2019	01-08-2020
Cable line	Fulai(6M)	SF106	5220/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5216/6A	01-09-2019	01-08-2020
Cable line	Fulai(3M)	SF106	5217/6A	01-09-2019	01-08-2020
Communication test set	R&S	CMW500	104466	01-18-2019	01-17-2020
High-pass filter	Sinoscite	FL3CX03WG 18NM12- 0398-002	---	01-09-2019	01-08-2020
High-pass filter	MICRO- TRONICS	SPA-F- 63029-4	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA0 9CL12-0395- 001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX01CA0 8CL12-0393- 001	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA0 4CL12-0396- 002	---	01-09-2019	01-08-2020
band rejection filter	Sinoscite	FL5CX02CA0 3CL12-0394- 001	---	01-09-2019	01-08-2020

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	06-19-2019	06-18-2020
Receiver	Keysight	N9038A	MY57290136	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-27-2019	03-26-2020
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-27-2019	03-26-2020
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-075	04-25-2018	04-24-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-829	04-25-2018	04-24-2021
Communication Antenna	Schwarzbeck	CLSA 0110L	1014	02-14-2019	02-13-2020
Biconical antenna	Schwarzbeck	VUBA 9117	9117-381	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-22-2019	5-21-2020
Communication test set	R&S	CMW500	102898	01-18-2019	01-17-2020
Preamplifier	EMCI	EMC001330	980563	05-08-2019	05-07-2020
Preamplifier	Agilent	8449B	3008A02425	07-12-2019	07-11-2020
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-30-2019	04-29-2020
Signal Generator	KEYSIGHT	E8257D	MY53401106	03-01-2019	02-29-2020
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-09-2019	01-08-2020
Cable line	Times	EMC104-NMNM-1000	SN160710	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-09-2019	01-08-2020
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-09-2019	01-08-2020
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-09-2019	01-08-2020



## 8 Radio Technical Requirements Specification

### Reference documents for testing:


No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)

### EUT Duty Cycle

Duty Cycle			
Configuration	TX ON(ms)	TX ALL(ms)	Duty Cycle(%)
BDR-1Mbps	2.907	3.751	77.50%
EDR-3Mbps	2.917	3.750	77.79%

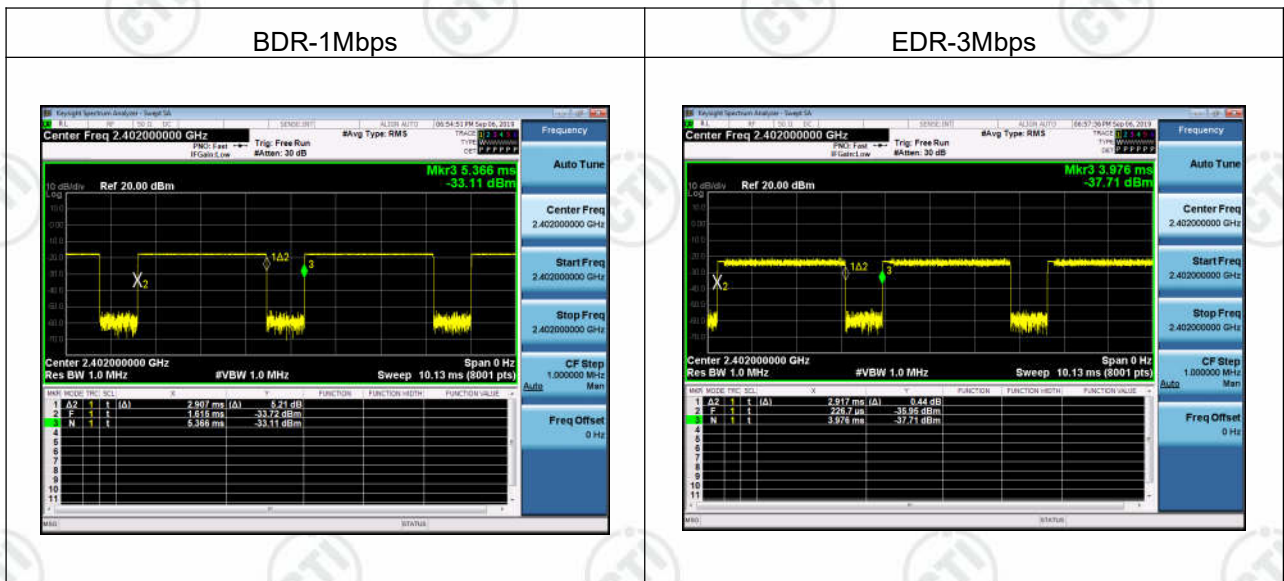

## Appendix A): 20dB Occupied Bandwidth Test Limit

According to §15.247(a) (1),

**20 dB Bandwidth** : For reporting purposes only.


**Occupied Bandwidth(99%)** : For reporting purposes only.

### Test Procedure

Test method Refer as Section 8.1 and ANSI C63.10: 2013 clause 7.8.7,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =30kHz, VBW = 100kHz and Detector = Peak, to measurement 20dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.
- 6.

### Test Setup






**Test Result**

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	0.9518	0.87397	PASS
GFSK	MCH	0.9505	0.86471	PASS
GFSK	HCH	0.9497	0.86784	PASS
$\pi$ /4DQPSK	LCH	1.257	1.1992	PASS
$\pi$ /4DQPSK	MCH	1.264	1.5749	PASS
$\pi$ /4DQPSK	HCH	1.255	1.3509	PASS
8DPSK	LCH	1.225	1.1586	PASS
8DPSK	MCH	1.230	1.2508	PASS
8DPSK	HCH	1.228	1.2561	PASS
DH5	LCH	1.106	0.95455	PASS
DH5	MCH	1.113	0.95114	PASS
DH5	HCH	1.115	0.95315	PASS
2DH5	LCH	1.384	1.2632	PASS
2DH5	MCH	1.383	1.2620	PASS
2DH5	HCH	1.383	1.2583	PASS
3DH5	LCH	1.368	1.2427	PASS
3DH5	MCH	1.368	1.2362	PASS
3DH5	HCH	1.368	1.2374	PASS

**Test Graph**



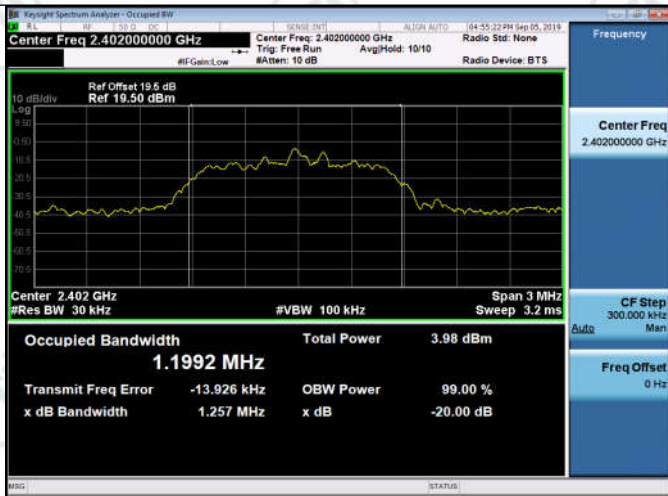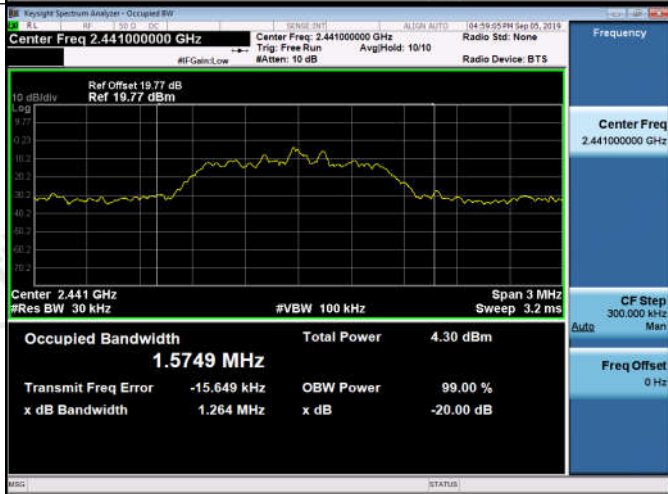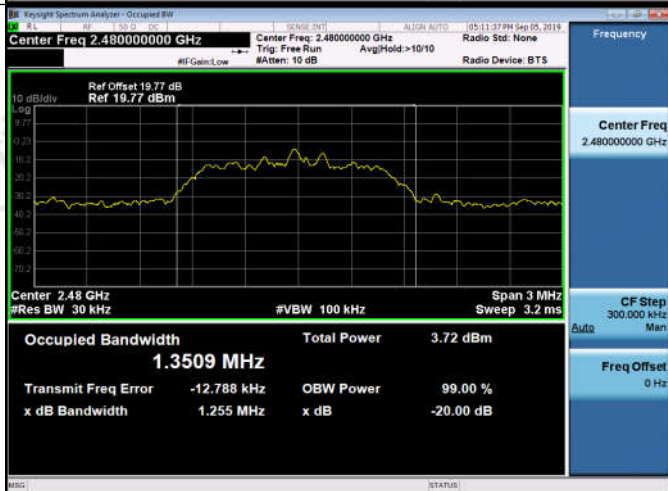


<p><math>\pi/4</math>DQPSK/LCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth 1.1992 MHz</p> <p>Total Power 3.98 dBm</p> <p>Transmit Freq Error -13.926 kHz</p> <p>x dB Bandwidth 1.257 MHz</p>
<p><math>\pi/4</math>DQPSK/MCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth 1.5749 MHz</p> <p>Total Power 4.30 dBm</p> <p>Transmit Freq Error -15.649 kHz</p> <p>x dB Bandwidth 1.264 MHz</p>
<p><math>\pi/4</math>DQPSK/HCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz</p> <p>Occupied Bandwidth 1.3509 MHz</p> <p>Total Power 3.72 dBm</p> <p>Transmit Freq Error -12.788 kHz</p> <p>x dB Bandwidth 1.255 MHz</p>

<p>8DPSK/LCH</p>	 <p>Center Freq: 2.40200000 GHz</p> <p>Occupied Bandwidth: 1.1586 MHz</p> <p>Total Power: 5.06 dBm</p> <p>Transmit Freq Error: -20.384 kHz</p> <p>x dB Bandwidth: 1.225 MHz</p>
<p>8DPSK/MCH</p>	 <p>Center Freq: 2.44100000 GHz</p> <p>Occupied Bandwidth: 1.2508 MHz</p> <p>Total Power: 4.58 dBm</p> <p>Transmit Freq Error: -28.543 kHz</p> <p>x dB Bandwidth: 1.230 MHz</p>
<p>8DPSK/HCH</p>	 <p>Center Freq: 2.48000000 GHz</p> <p>Occupied Bandwidth: 1.2561 MHz</p> <p>Total Power: 4.33 dBm</p> <p>Transmit Freq Error: -27.538 kHz</p> <p>x dB Bandwidth: 1.228 MHz</p>

Graphs

<p>DH5/LCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <p>Occupied Bandwidth 954.55 kHz Total Power 2.41 dBm</p> <p>Transmit Freq Error -6.125 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.106 MHz x dB -20.00 dB</p>
<p>DH5/MCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz Center Freq: 2.441000000 GHz Radio Std: None</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.441 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <p>Occupied Bandwidth 951.14 kHz Total Power 11.1 dBm</p> <p>Transmit Freq Error -33.658 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.113 MHz x dB -20.00 dB</p>
<p>DH5/HCH</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Radio Std: None</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <p>Occupied Bandwidth 953.15 kHz Total Power 10.5 dBm</p> <p>Transmit Freq Error -35.353 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.115 MHz x dB -20.00 dB</p>
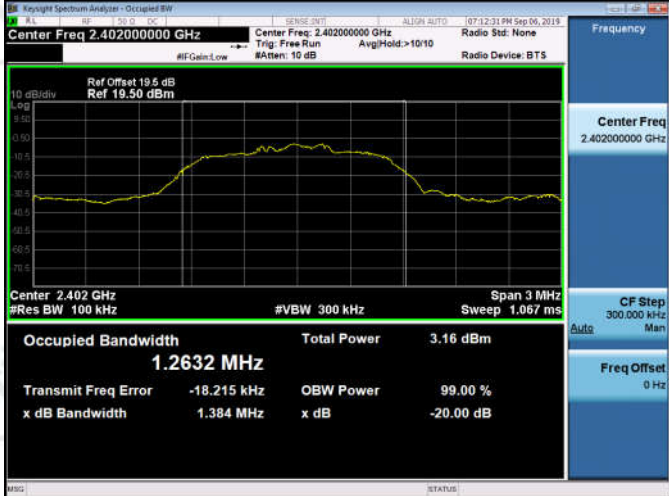
<p>2DH5/LCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.40200000 GHz</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>Center 2.402 GHz #Res BW 100 kHz</p> <p>Span 3 MHz Sweep 1.067 ms</p> <p>Occupied Bandwidth: 1.2632 MHz</p> <p>Total Power: 3.16 dBm</p> <p>Transmit Freq Error: -18.215 kHz</p> <p>x dB Bandwidth: 1.384 MHz</p>
<p>2DH5/MCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.44100000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.441 GHz #Res BW 100 kHz</p> <p>Span 3 MHz Sweep 1.067 ms</p> <p>Occupied Bandwidth: 1.2620 MHz</p> <p>Total Power: 6.99 dBm</p> <p>Transmit Freq Error: -30.021 kHz</p> <p>x dB Bandwidth: 1.383 MHz</p>
<p>2DH5/HCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.48000000 GHz</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.48 GHz #Res BW 100 kHz</p> <p>Span 3 MHz Sweep 1.067 ms</p> <p>Occupied Bandwidth: 1.2583 MHz</p> <p>Total Power: 6.35 dBm</p> <p>Transmit Freq Error: -28.074 kHz</p> <p>x dB Bandwidth: 1.383 MHz</p>



<p>3DH5/LCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None</p> <p>Ref Offset 19.5 dB Ref 19.50 dBm</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <p>Occupied Bandwidth Total Power 3.47 dBm</p> <p>1.2427 MHz</p> <p>Transmit Freq Error -20.493 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.368 MHz x dB -20.00 dB</p>
<p>3DH5/MCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz Center Freq: 2.441000000 GHz Radio Std: None</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.441 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <p>Occupied Bandwidth Total Power 7.28 dBm</p> <p>1.2362 MHz</p> <p>Transmit Freq Error -30.970 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.368 MHz x dB -20.00 dB</p>
<p>3DH5/HCH</p>	 <p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Radio Std: None</p> <p>Ref Offset 19.77 dB Ref 19.77 dBm</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 1.067 ms</p> <p>Occupied Bandwidth Total Power 6.62 dBm</p> <p>1.2374 MHz</p> <p>Transmit Freq Error -30.992 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.368 MHz x dB -20.00 dB</p>



## Appendix B): Carrier Frequency Separation

### Test Limit

According to §15.247(a)(1),


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

### Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Sweep = auto.  
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency

### Test Setup






**Result Table**




Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	0.986	PASS
GFSK	MCH	1.084	PASS
GFSK	HCH	0.904	PASS
$\pi/4$ DQPSK	LCH	1.066	PASS
$\pi/4$ DQPSK	MCH	1.140	PASS
$\pi/4$ DQPSK	HCH	1.088	PASS
8DPSK	LCH	1.166	PASS
8DPSK	MCH	1.026	PASS
8DPSK	HCH	0.974	PASS

**Test Graph**

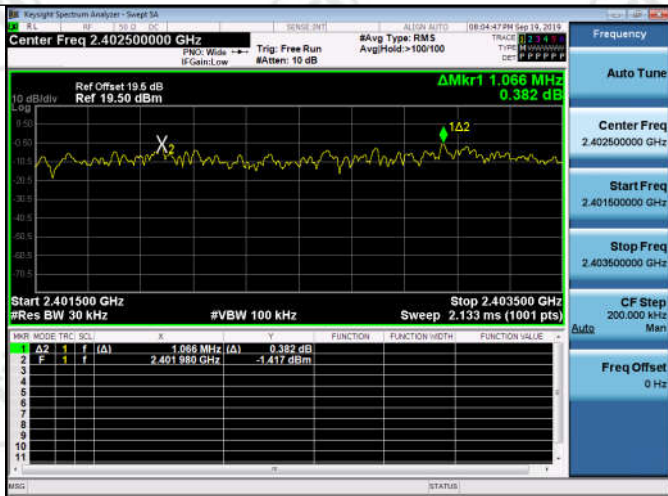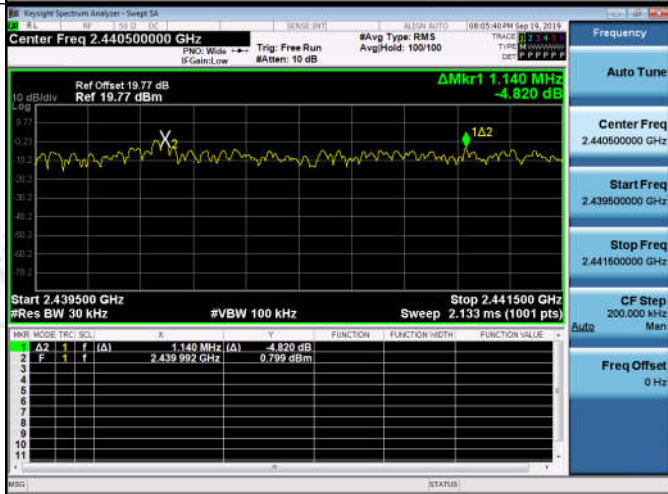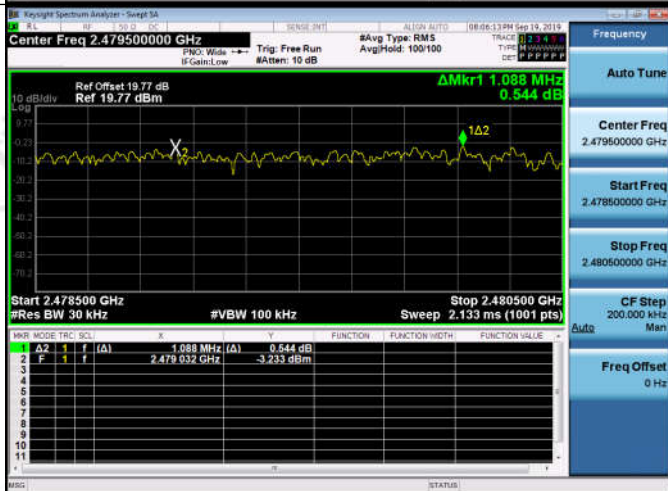

<p><math>\pi/4</math>DQPSK/LCH</p>	
<p><math>\pi/4</math>DQPSK/MCH</p>	
<p><math>\pi/4</math>DQPSK/HCH</p>	

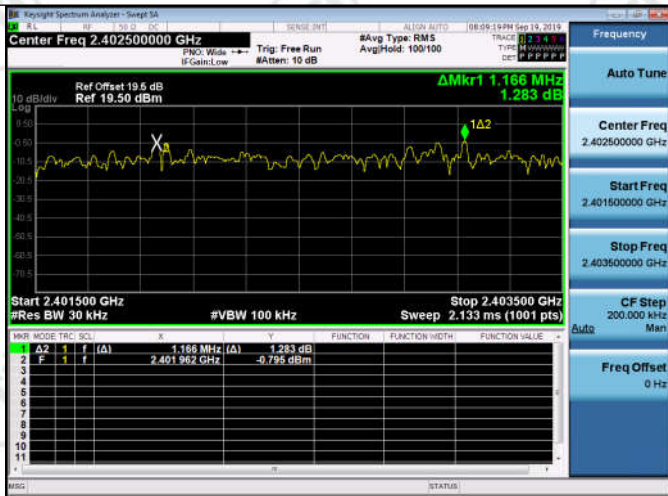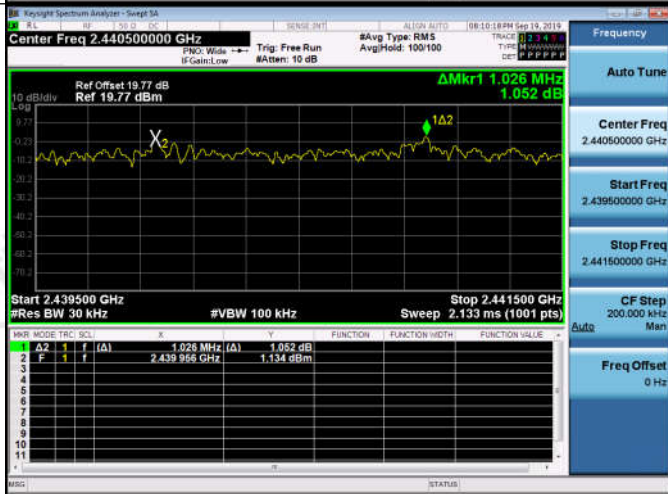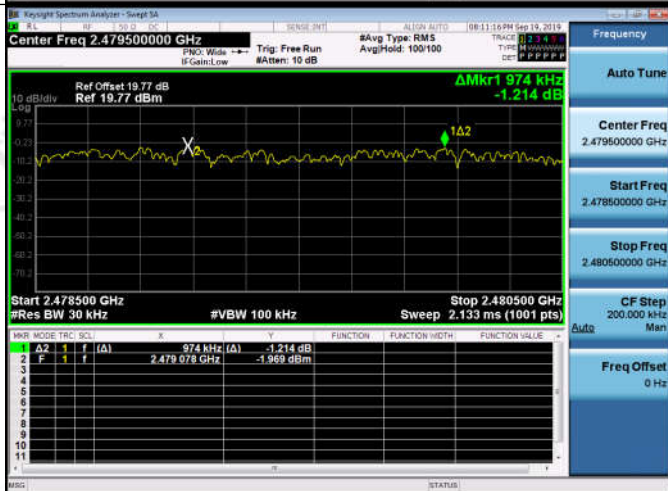

<p>8DPSK/LCH</p>	
<p>8DPSK/MCH</p>	
<p>8DPSK/HCH</p>	



## Appendix C): Dwell Time Test Limit


According to §15.247(a)(1)(iii),

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. *Set the spectrum analyzer as RBW, VBW=1MHz, Sweep = 1 ms*

### Test Setup

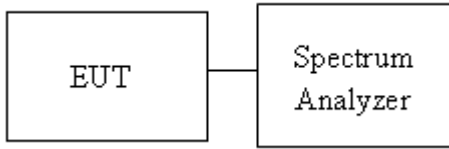

**Result Table**




Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.4015333	320	0.128	0.32	PASS
GFSK	DH1	MCH	0.402797	320	0.129	0.32	PASS
GFSK	DH1	HCH	0.402797	320	0.129	0.32	PASS
GFSK	DH3	LCH	1.65807	160	0.265	0.66	PASS
GFSK	DH3	MCH	1.65807	160	0.265	0.66	PASS
GFSK	DH3	HCH	1.6568	160	0.265	0.66	PASS
GFSK	DH5	LCH	2.898	106.7	0.309	0.77	PASS
GFSK	DH5	MCH	2.8796	106.7	0.307	0.77	PASS
GFSK	DH5	HCH	2.8796	106.7	0.307	0.77	PASS

**Test Graph**





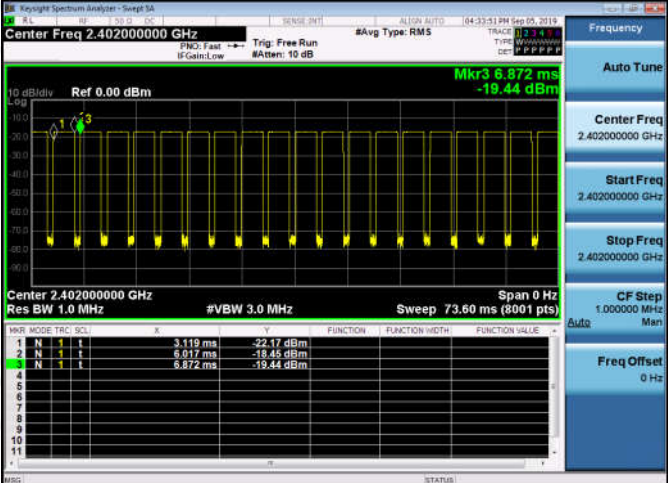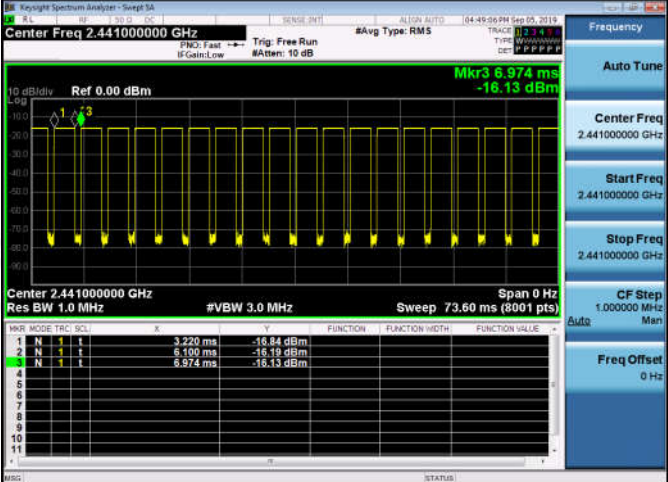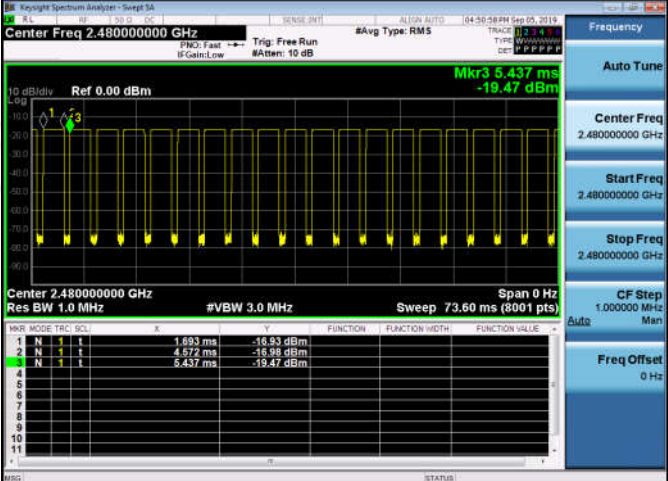

<p>GFSK_DH5/LCH</p>	 <p>Center Freq 2.40200000 GHz</p> <p>Mkr3 6.872 ms -19.44 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>1</td> <td>3.119 ms</td> <td>-22.17 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>1</td> <td>6.012 ms</td> <td>-18.45 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>1</td> <td>6.872 ms</td> <td>-19.44 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	1	3.119 ms	-22.17 dBm				2	N	1	1	6.012 ms	-18.45 dBm				3	N	1	1	6.872 ms	-19.44 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	1	3.119 ms	-22.17 dBm																																
2	N	1	1	6.012 ms	-18.45 dBm																																
3	N	1	1	6.872 ms	-19.44 dBm																																
<p>GFSK_DH5/MCH</p>	 <p>Center Freq 2.44100000 GHz</p> <p>Mkr3 6.974 ms -18.13 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>1</td> <td>3.226 ms</td> <td>-18.84 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>1</td> <td>6.100 ms</td> <td>-18.19 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>1</td> <td>6.974 ms</td> <td>-18.13 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	1	3.226 ms	-18.84 dBm				2	N	1	1	6.100 ms	-18.19 dBm				3	N	1	1	6.974 ms	-18.13 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	1	3.226 ms	-18.84 dBm																																
2	N	1	1	6.100 ms	-18.19 dBm																																
3	N	1	1	6.974 ms	-18.13 dBm																																
<p>GFSK_DH5/HCH</p>	 <p>Center Freq 2.48000000 GHz</p> <p>Mkr3 5.437 ms -19.47 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>1</td> <td>1.893 ms</td> <td>-16.93 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>1</td> <td>4.572 ms</td> <td>-18.98 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>1</td> <td>5.437 ms</td> <td>-19.47 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	1	1.893 ms	-16.93 dBm				2	N	1	1	4.572 ms	-18.98 dBm				3	N	1	1	5.437 ms	-19.47 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	1	1.893 ms	-16.93 dBm																																
2	N	1	1	4.572 ms	-18.98 dBm																																
3	N	1	1	5.437 ms	-19.47 dBm																																



## Appendix D): Hopping Channel Number Test Limit

According to §15.247(a)(1)(iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz, RBW = 100KHz, VBW = 300KHz.
4. Max hold, view and count how many channel in the band.


### Test Setup

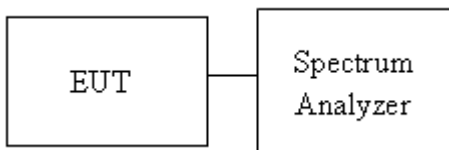

**Result Table**

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

**Test Graph**

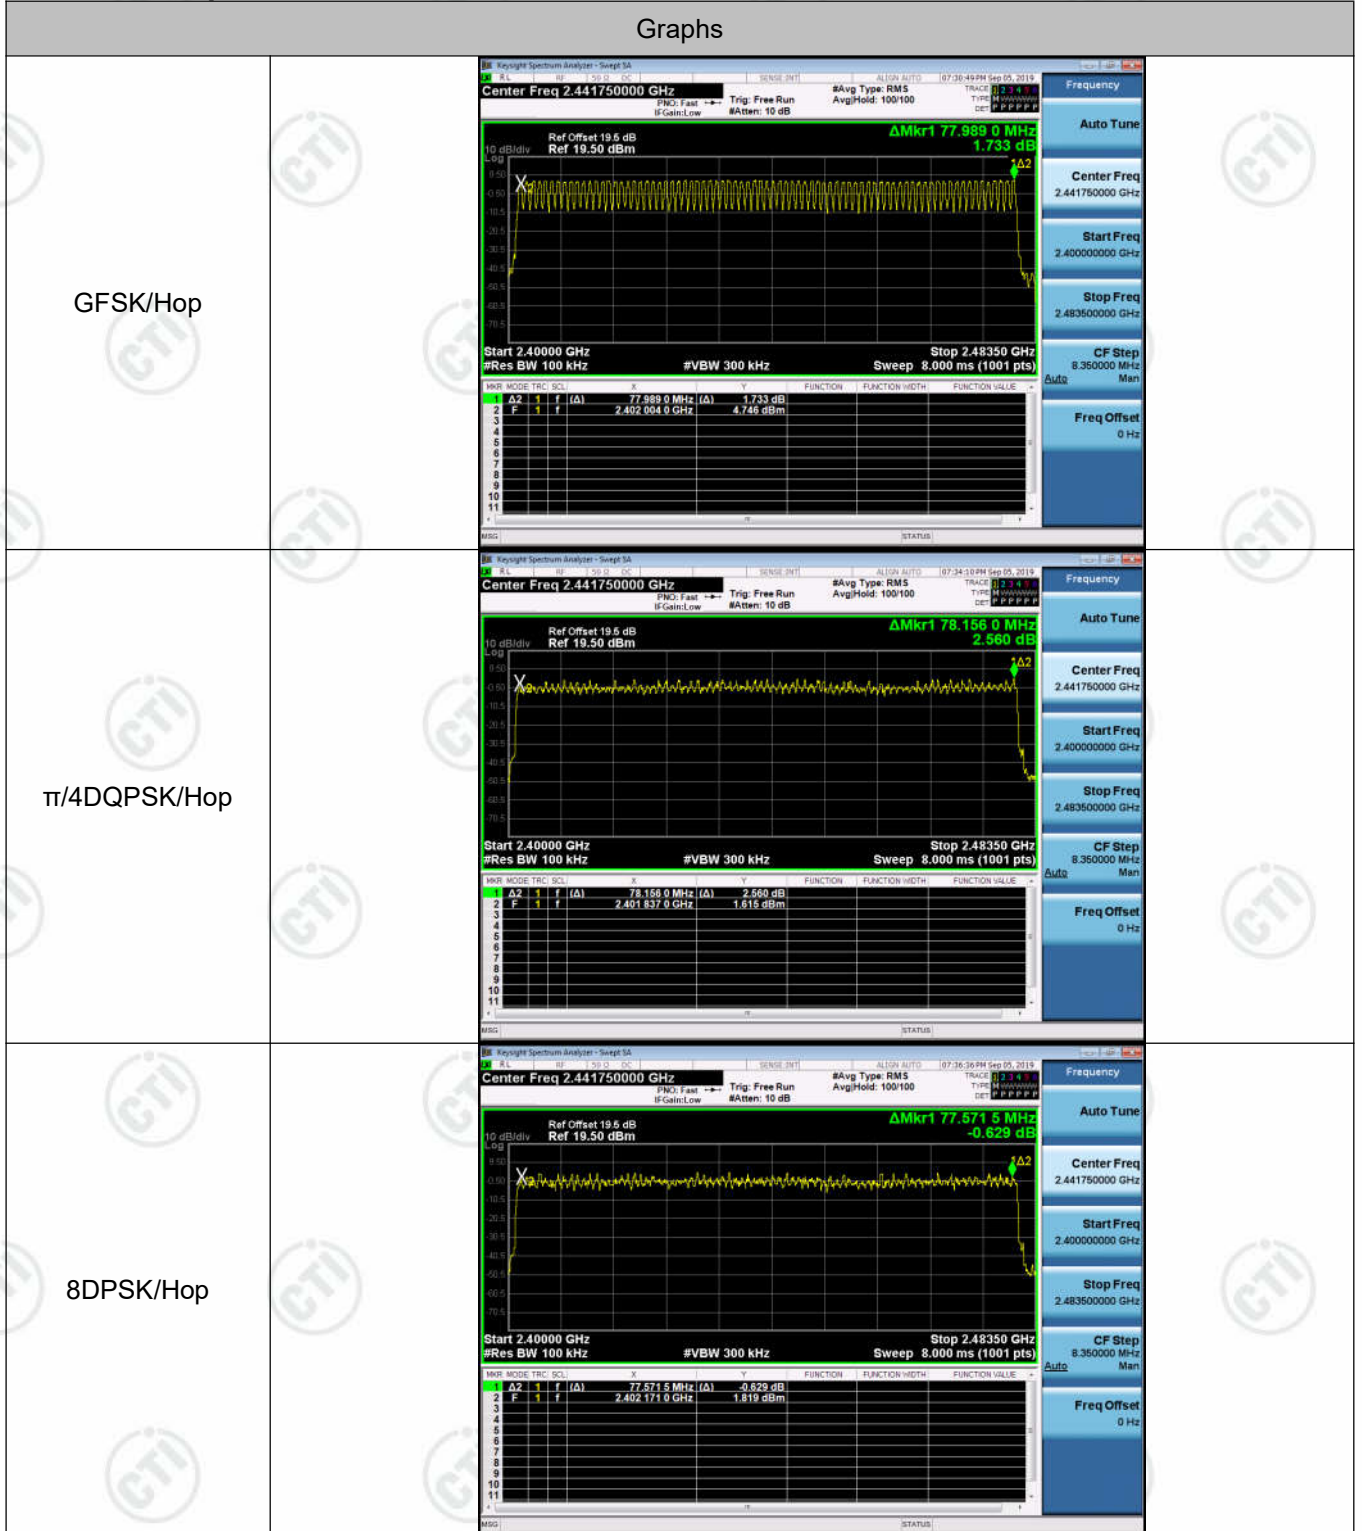

## Appendix E): Conducted Peak Output Power Test Limit

According to §15.247(b)(1).

### Peak output power:

#### FCC

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi: 21dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi: 21dBm [ Limit = 30 – (DG – 6)]
-------	---

**Average output power:** For reporting purposes only.

### Test Procedure

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

### Test Setup







**Result Table**


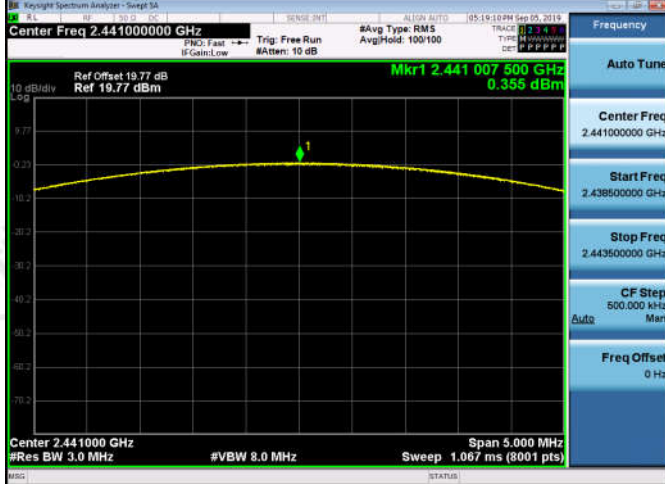
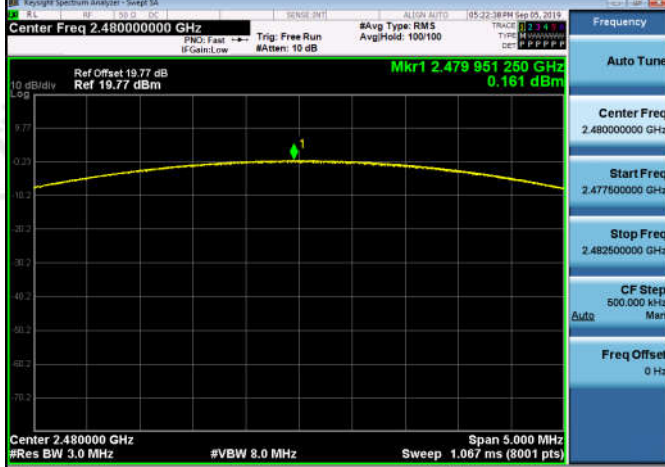
Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	2.589	PASS
GFSK	MCH	4.189	PASS
GFSK	HCH	3.373	PASS
$\pi/4$ DQPSK	LCH	-0.850	PASS
$\pi/4$ DQPSK	MCH	0.224	PASS
$\pi/4$ DQPSK	HCH	-0.608	PASS
8DPSK	LCH	-0.215	PASS
8DPSK	MCH	0.355	PASS
8DPSK	HCH	0.161	PASS

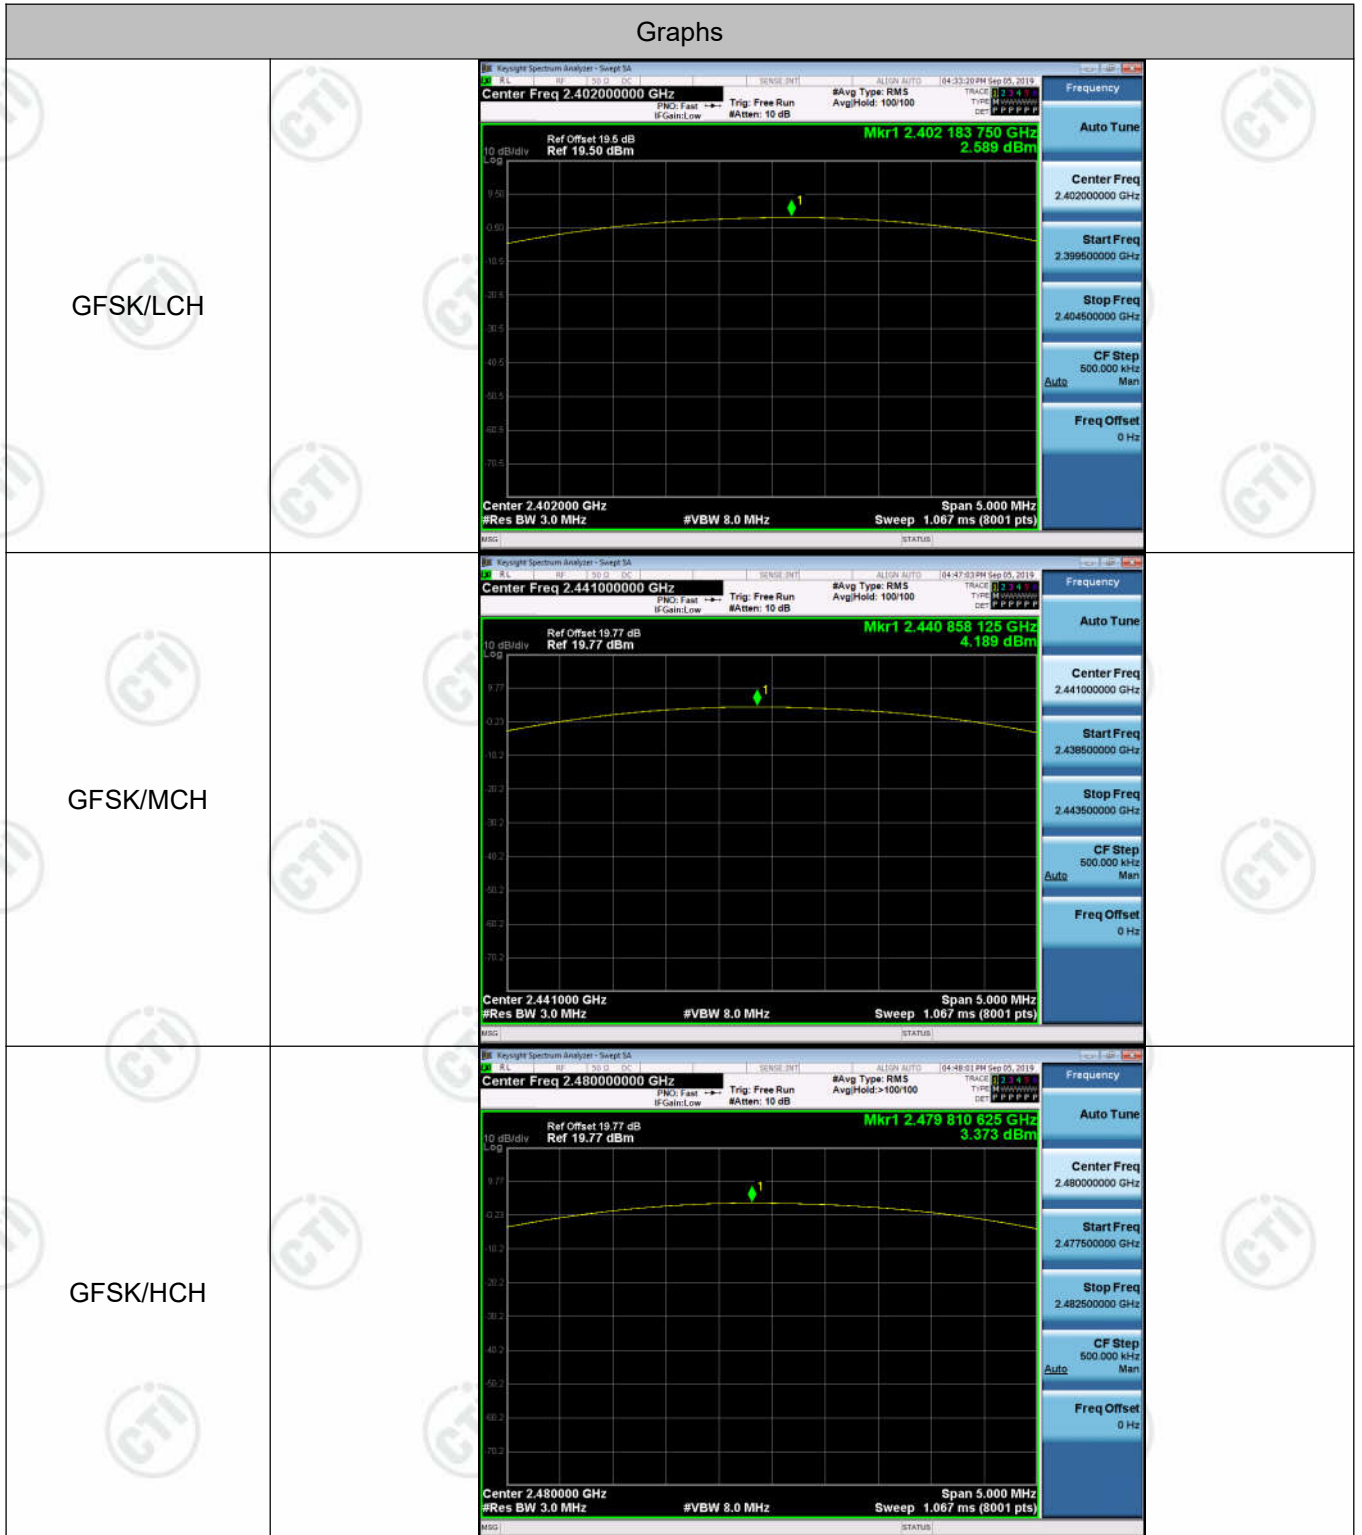

**Test Graph**



<p><math>\pi/4</math>DQPSK/LCH</p>	 <p>Center Freq 2.40200000 GHz Mkr1 2.402 016 250 GHz -0.850 dBm Ref Offset 19.5 dB Ref 19.50 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.399600000 GHz</p> <p>Stop Freq 2.404600000 GHz</p> <p>CF Step 500.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p><math>\pi/4</math>DQPSK/MCH</p>	 <p>Center Freq 2.44100000 GHz Mkr1 2.440 770 625 GHz 0.224 dBm Ref Offset 19.77 dB Ref 19.77 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.441000000 GHz</p> <p>Start Freq 2.438600000 GHz</p> <p>Stop Freq 2.443600000 GHz</p> <p>CF Step 500.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p><math>\pi/4</math>DQPSK/HCH</p>	 <p>Center Freq 2.48000000 GHz Mkr1 2.479 849 375 GHz -0.608 dBm Ref Offset 19.77 dB Ref 19.77 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.477600000 GHz</p> <p>Stop Freq 2.482600000 GHz</p> <p>CF Step 500.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>

<p>8DPSK/LCH</p>	 <p>Center Freq 2.40200000 GHz Mkr1 2.401 973 750 GHz -0.215 dBm Ref Offset 19.5 dB Ref 19.50 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.40200000 GHz</p> <p>Start Freq 2.39960000 GHz</p> <p>Stop Freq 2.40460000 GHz</p> <p>CF Step 500.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>8DPSK/MCH</p>	 <p>Center Freq 2.44100000 GHz Mkr1 2.441 007 500 GHz 0.355 dBm Ref Offset 19.77 dB Ref 19.77 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.44100000 GHz</p> <p>Start Freq 2.43860000 GHz</p> <p>Stop Freq 2.44360000 GHz</p> <p>CF Step 500.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>8DPSK/HCH</p>	 <p>Center Freq 2.48000000 GHz Mkr1 2.479 951 250 GHz 0.161 dBm Ref Offset 19.77 dB Ref 19.77 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 5.000 MHz Sweep 1.067 ms (8001 pts)</p>	<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.48000000 GHz</p> <p>Start Freq 2.47760000 GHz</p> <p>Stop Freq 2.48260000 GHz</p> <p>CF Step 500.000 kHz Auto Man</p> <p>Freq Offset 0 Hz</p>

## Appendix F): Band-edge for RF Conducted Emissions Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

### Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with normal hopping mode.

### Test Setup




**Result Table**

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	2.186	Off	-58.151	-17.81	PASS
			6.308	On	-44.927	-13.69	PASS
GFSK	HCH	2480	4.026	Off	-53.182	-15.97	PASS
			6.792	On	-42.823	-13.21	PASS
$\pi/4$ DQPSK	LCH	2402	-3.343	Off	-60.206	-23.34	PASS
			3.250	On	-49.100	-16.75	PASS
$\pi/4$ DQPSK	HCH	2480	-3.556	Off	-57.344	-23.56	PASS
			4.384	On	-43.660	-15.62	PASS
8DPSK	LCH	2402	-2.796	Off	-59.025	-22.8	PASS
			2.472	On	-48.999	-17.53	PASS
8DPSK	HCH	2480	-3.316	Off	-55.300	-23.32	PASS
			4.386	On	-43.553	-15.61	PASS






**Test Graph**

**Graphs**

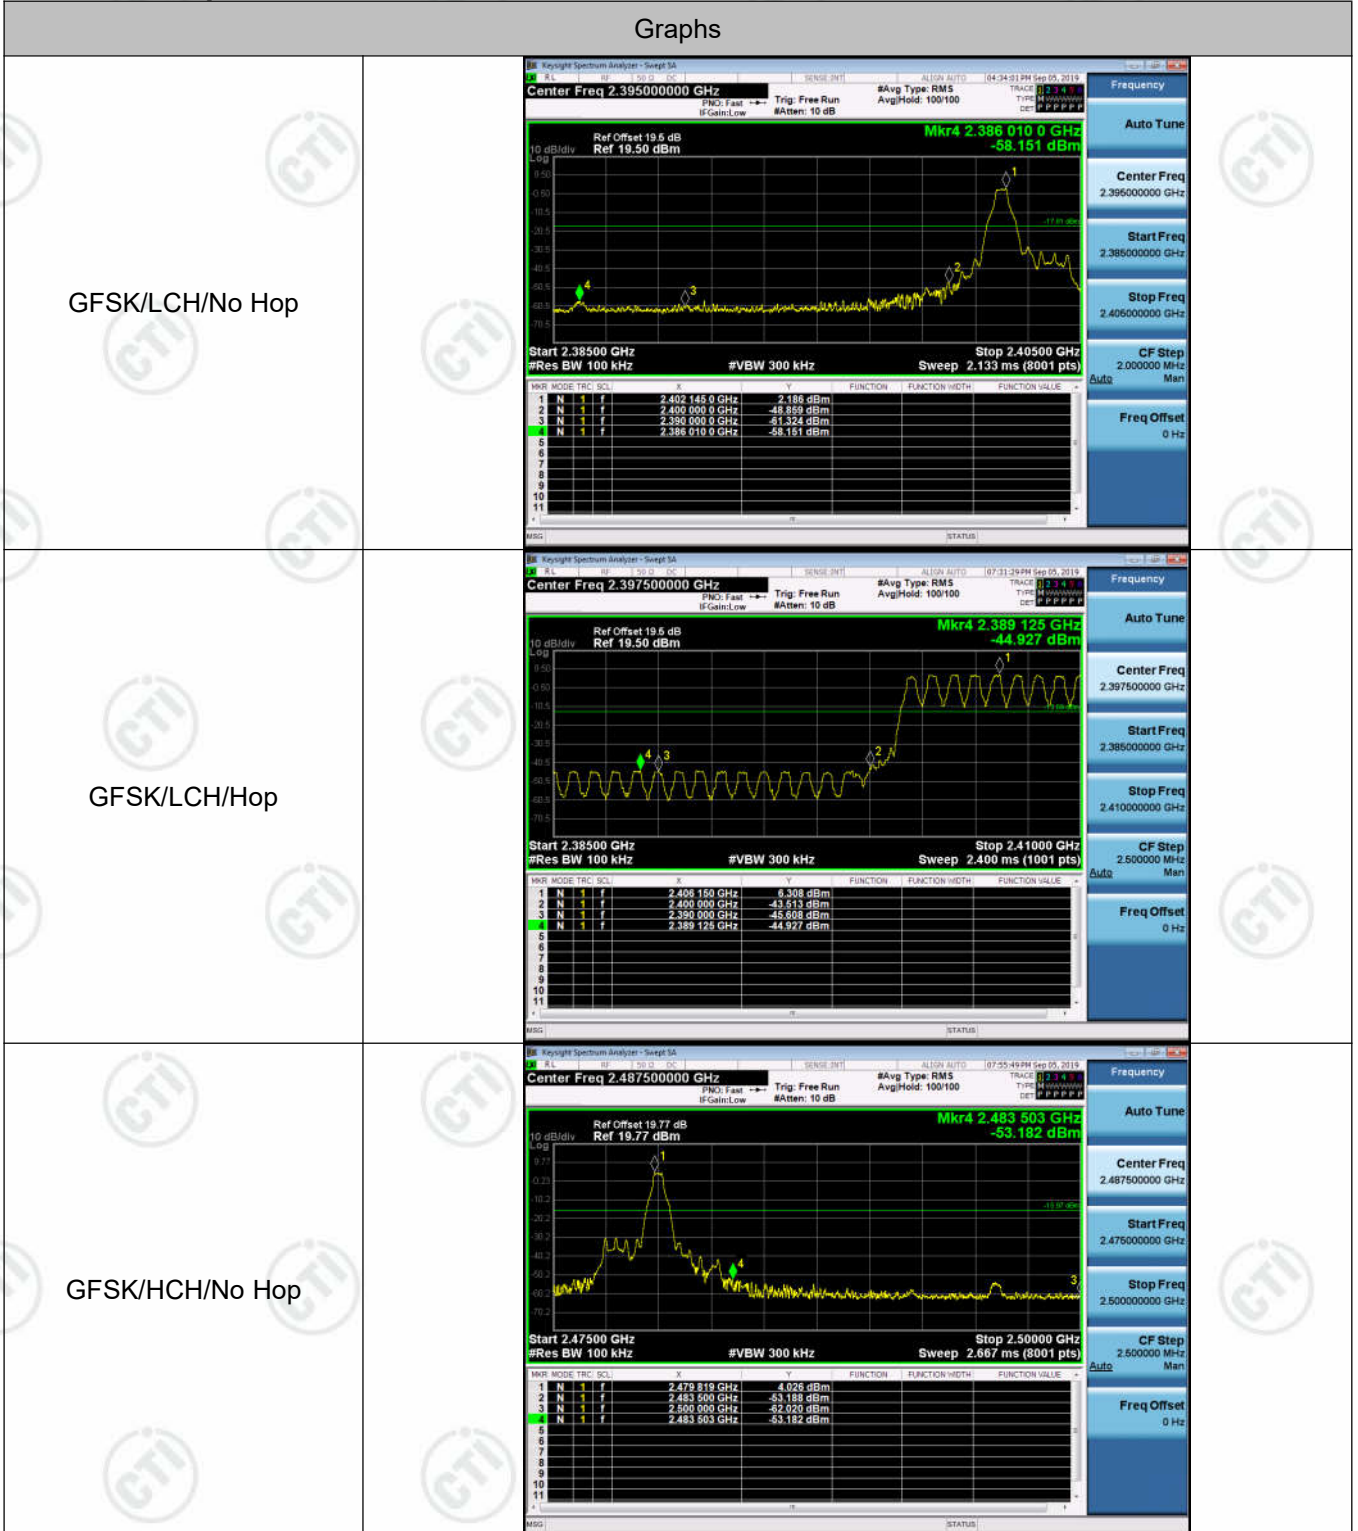

<p>GFSK/HCH/Hop</p>		
<p><math>\pi/4</math>DQPSK/LCH/No Hop</p>		
<p><math>\pi/4</math>DQPSK/LCH/Hop</p>		
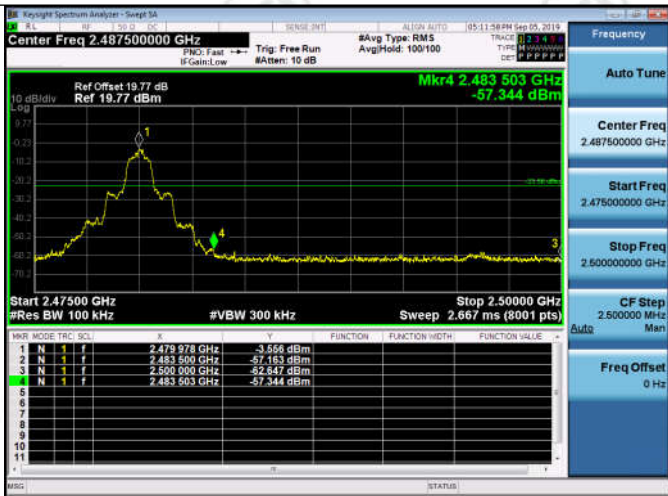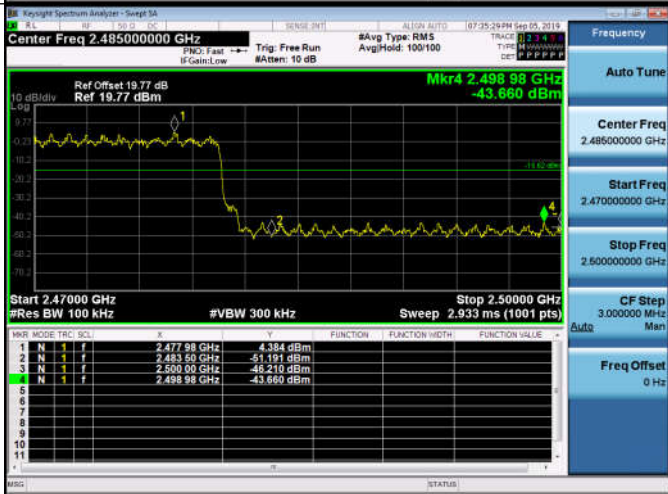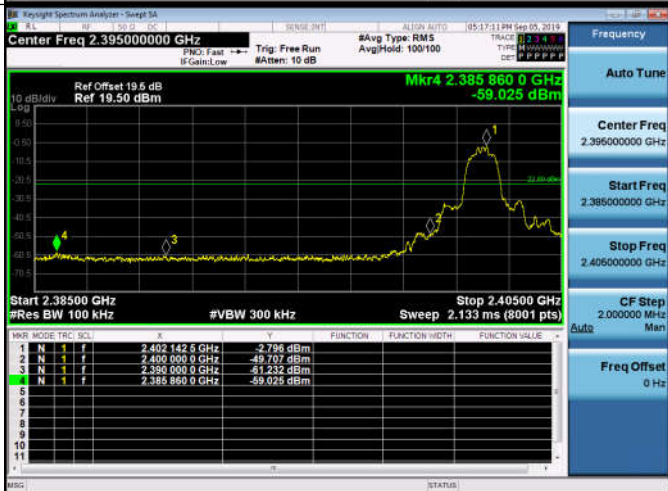
<p><math>\pi/4</math>DQPSK/HCH/No Hop</p>		
<p><math>\pi/4</math>DQPSK/HCH/Hop</p>		
<p>8DPSK/LCH/No Hop</p>		



<p>8DPSK/LCH/Hop</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.397500000 GHz</p> <p>Start Freq 2.385000000 GHz</p> <p>Stop Freq 2.410000000 GHz</p> <p>CF Step 2500000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>8DPSK/HCH/No Hop</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.487500000 GHz</p> <p>Start Freq 2.475000000 GHz</p> <p>Stop Freq 2.500000000 GHz</p> <p>CF Step 2500000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>8DPSK/HCH/Hop</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.485000000 GHz</p> <p>Start Freq 2.470000000 GHz</p> <p>Stop Freq 2.500000000 GHz</p> <p>CF Step 3000000 MHz</p> <p>Freq Offset 0 Hz</p>