

GSM850_GPRS10_Left Cheek_190

DUT: EUT

Communication System: GPRS 850-2slots; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: H835 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.743 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.93 V/m; Power Drift = -0.045 dB

Peak SAR (extrapolated) = 0.863 W/kg

SAR(1 g) = 0.667 mW/g; SAR(10 g) = 0.492 mW/g

Maximum value of SAR (measured) = 0.740 mW/g

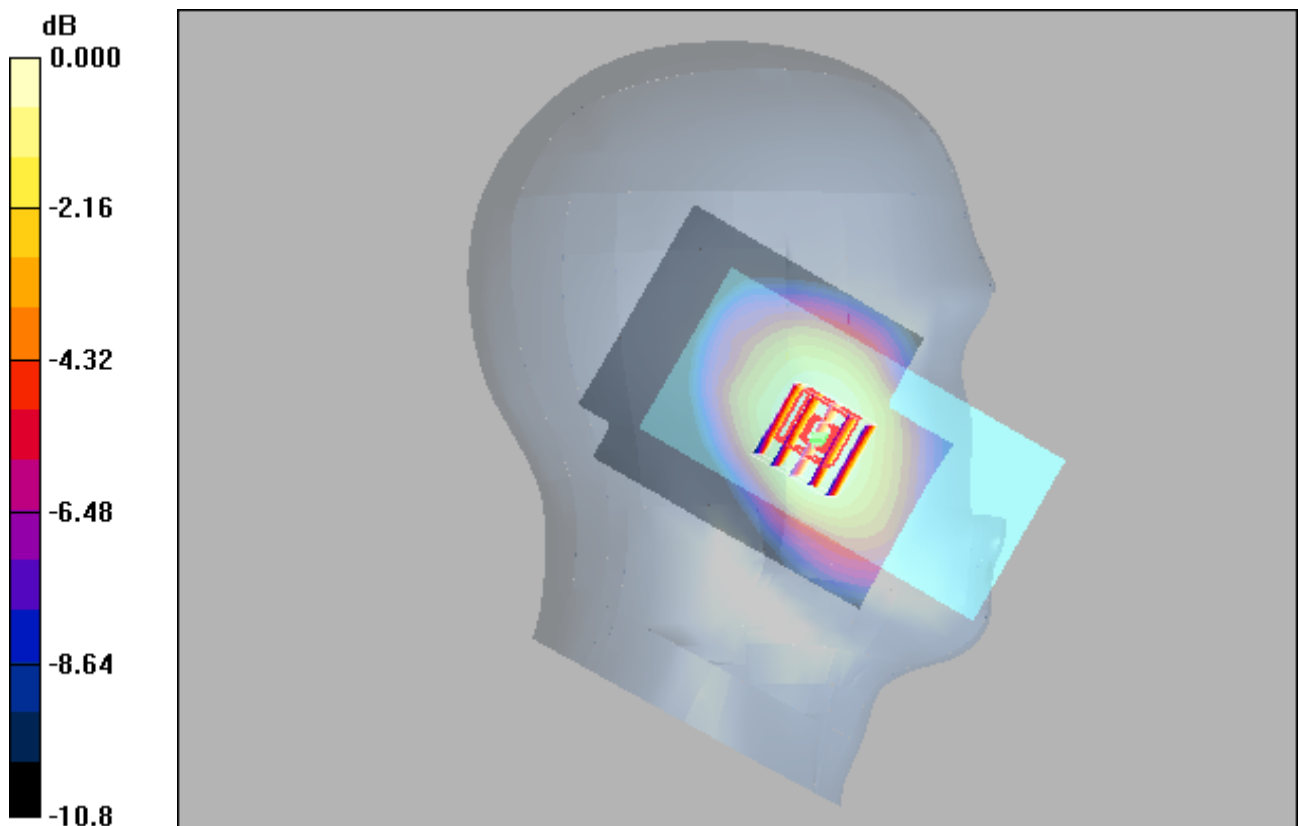

0 dB = 0.740mW/g

GSM1900_GPRS10_Right Cheek_810

DUT: EUT


Communication System: GPRS1900-2slots; Frequency: 1909.8 MHz; Duty Cycle: 1:4
 Medium: H1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.28 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 14.9 V/m; Power Drift = 0.303 dB
 Peak SAR (extrapolated) = 1.76 W/kg
SAR(1 g) = 0.877 mW/g; SAR(10 g) = 0.471 mW/g
 Maximum value of SAR (measured) = 1.00 mW/g

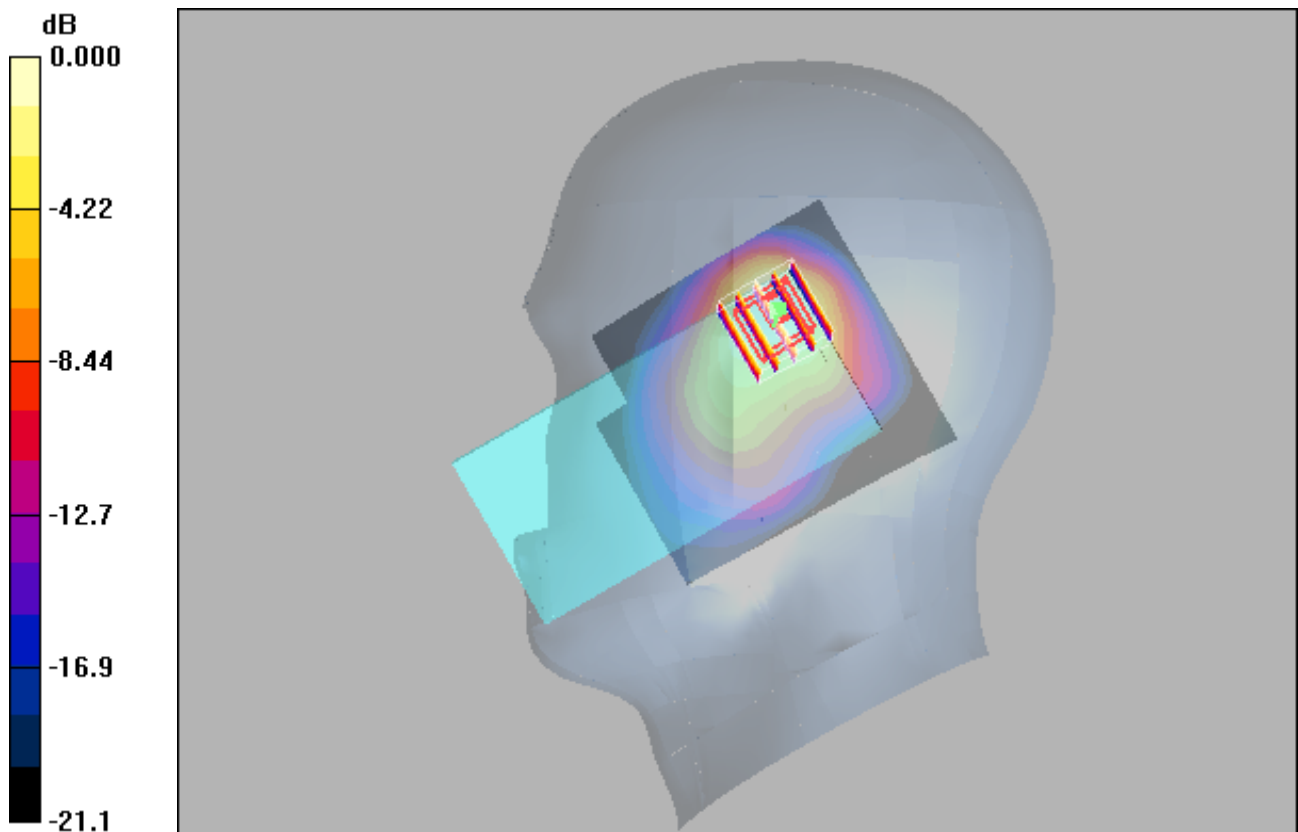

0 dB = 1.00mW/g

WCDMA II_RMC12.2K_Right Cheek_9538

DUT: EUT


Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium: H1900 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 39.3$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 1.14 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 14.1 V/m; Power Drift = -0.024 dB
 Peak SAR (extrapolated) = 1.52 W/kg
SAR(1 g) = 0.752 mW/g; SAR(10 g) = 0.395 mW/g
 Maximum value of SAR (measured) = 0.864 mW/g

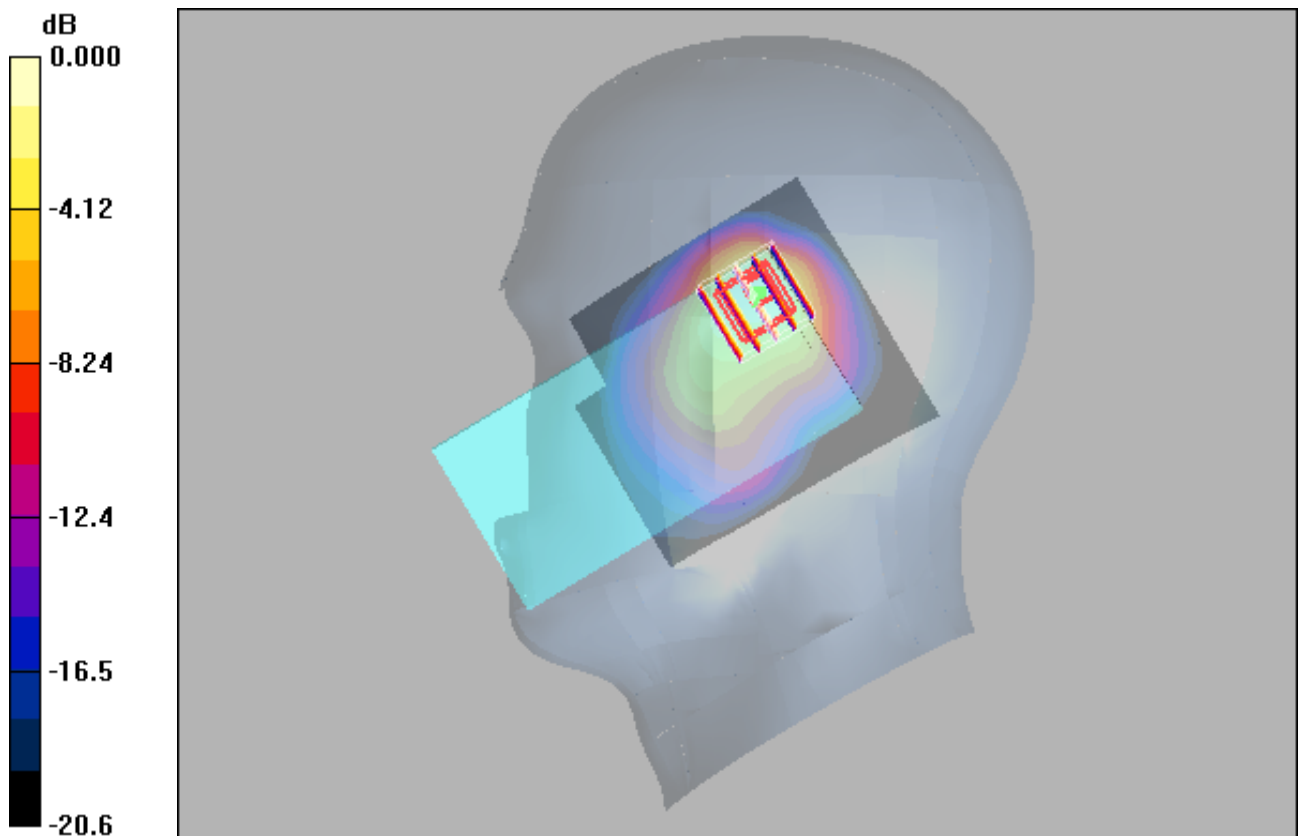

0 dB = 0.864mW/g

WCDMA IV_RMC12.2K_Right Cheek_1312

DUT: EUT


Communication System: WCDMA Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.27$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.36, 5.36, 5.36); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.829 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.9 V/m; Power Drift = -0.127 dB
Peak SAR (extrapolated) = 1.14 W/kg
SAR(1 g) = 0.525 mW/g; SAR(10 g) = 0.274 mW/g
Maximum value of SAR (measured) = 0.594 mW/g

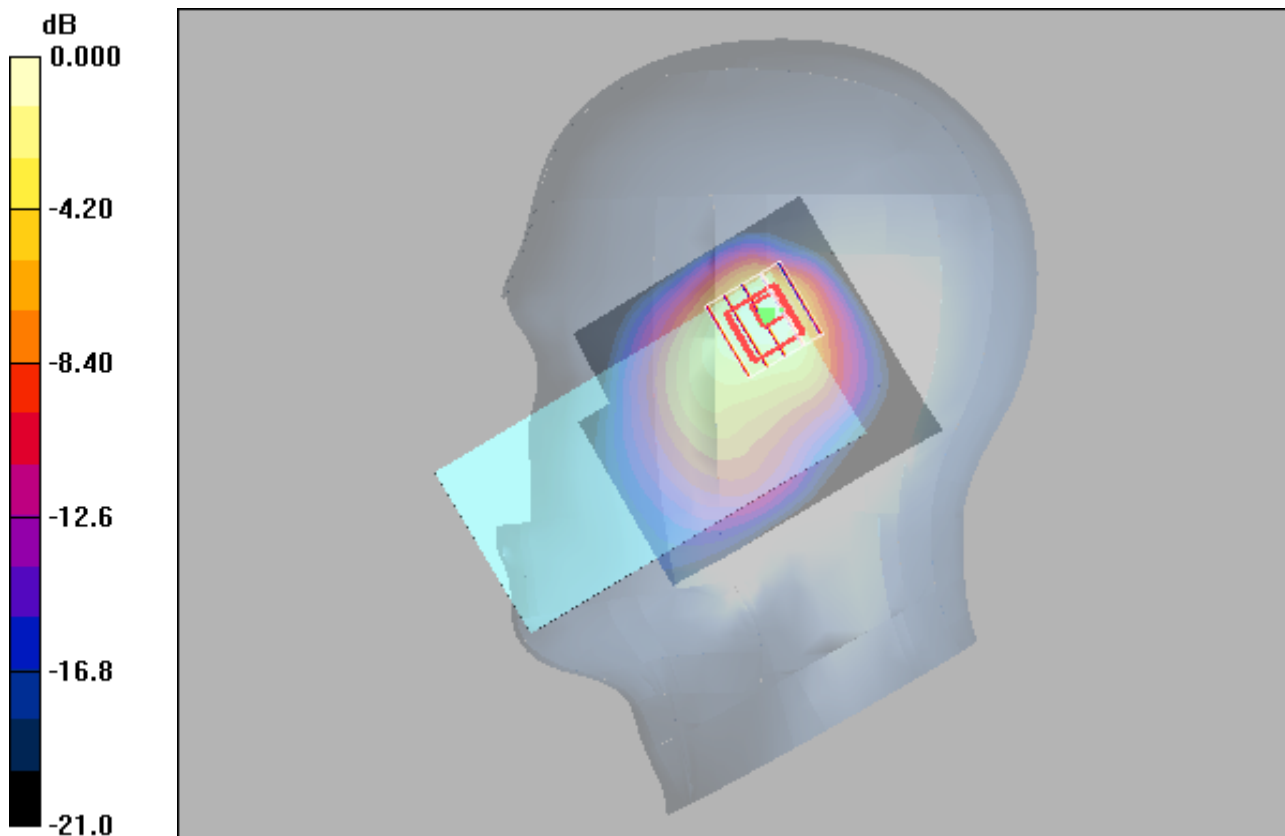

0 dB = 0.594mW/g

WCDMA V_RMC12.2K_Left Cheek_4132

DUT: EUT


Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium: H835 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.913 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.266 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 6.10 V/m; Power Drift = -0.192 dB
 Peak SAR (extrapolated) = 0.312 W/kg
SAR(1 g) = 0.241 mW/g; SAR(10 g) = 0.177 mW/g
 Maximum value of SAR (measured) = 0.267 mW/g

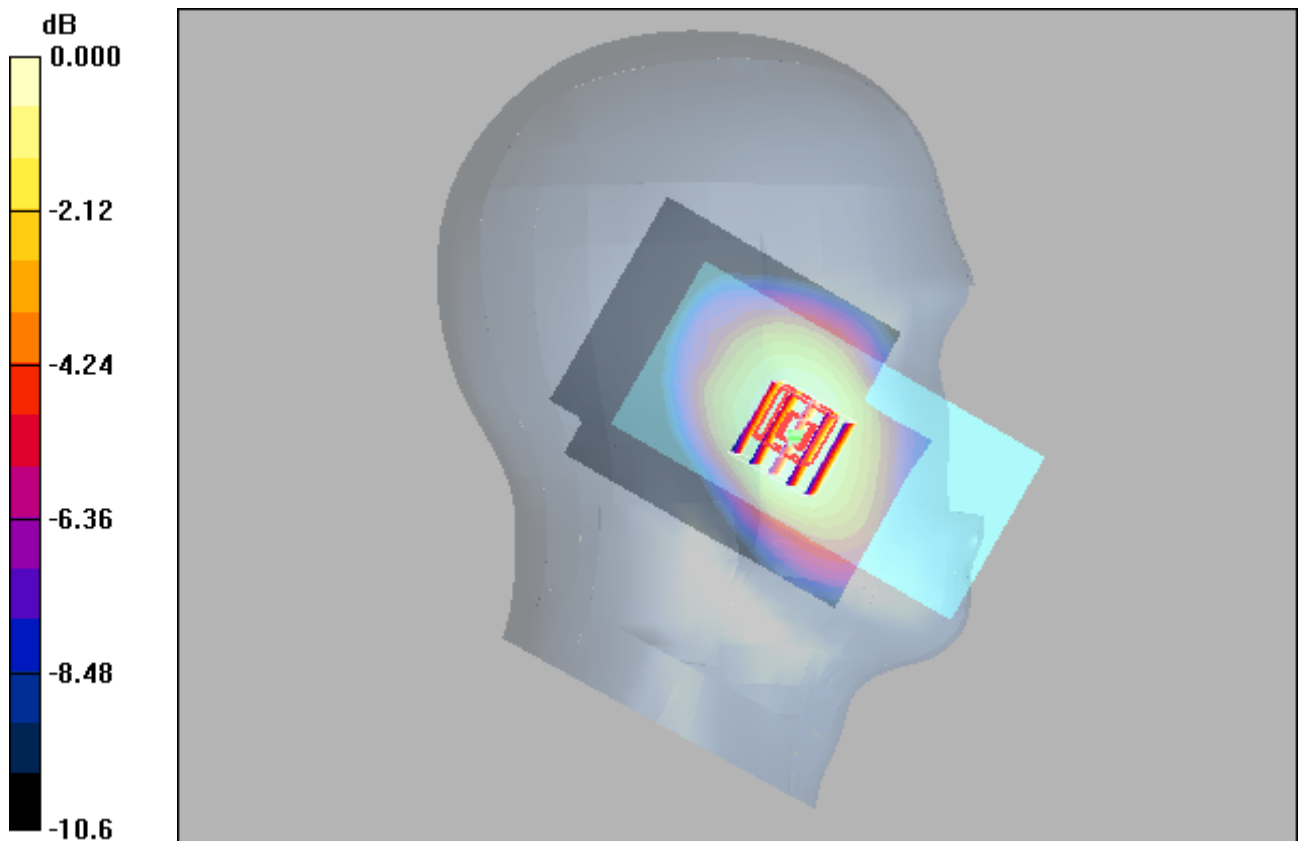

0 dB = 0.267mW/g

LTE 2_QPSK20M_1_50_Right Cheek_18700

DUT: EUT


Communication System: LTE Band 2; Frequency: 1860 MHz; Duty Cycle: 1:1
 Medium: H1900 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 1.04 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 12.9 V/m; Power Drift = 0.039 dB
 Peak SAR (extrapolated) = 1.38 W/kg
SAR(1 g) = 0.694 mW/g; SAR(10 g) = 0.370 mW/g
 Maximum value of SAR (measured) = 0.803 mW/g

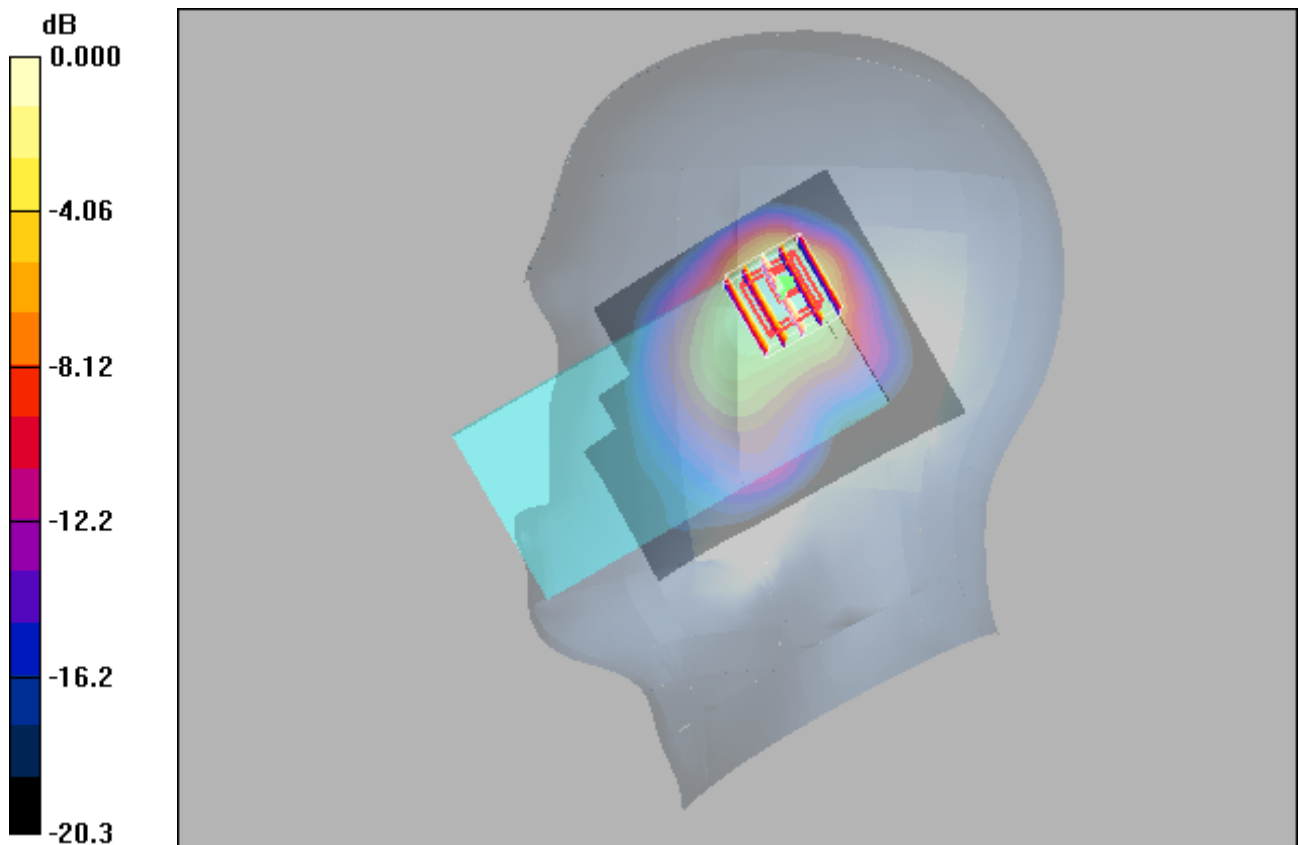

0 dB = 0.803mW/g

LTE 5_QPSK10M_1_25_Left Cheek_20450

DUT: EUT

Communication System: LTE Band5; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 829 \text{ MHz}$; $\sigma = 0.915 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.253 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.87 V/m; Power Drift = -0.102 dB

Peak SAR (extrapolated) = 0.302 W/kg

SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.170 mW/g

Maximum value of SAR (measured) = 0.258 mW/g

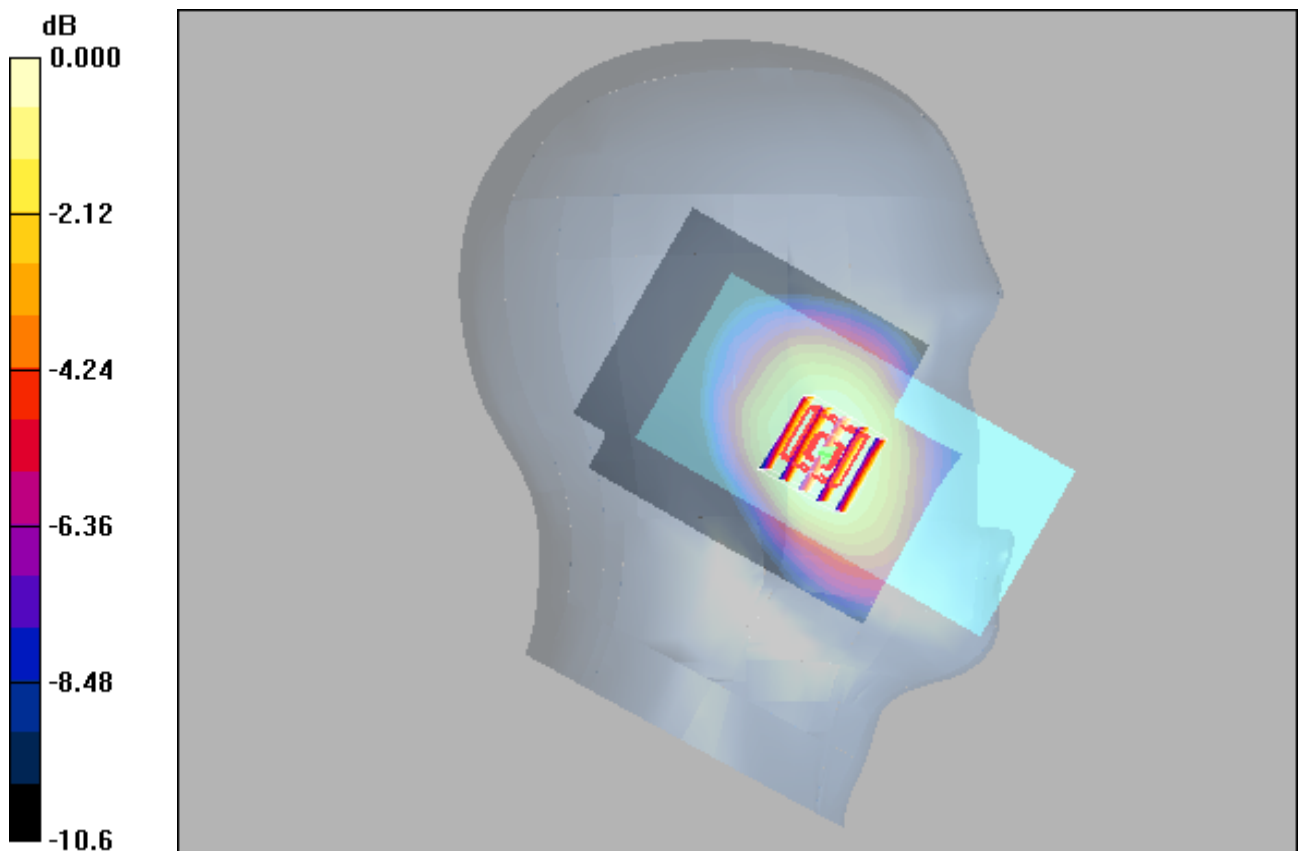

0 dB = 0.258mW/g

LTE 12_QPSK10M_1_25_Left Cheek_23095

DUT: EUT

Communication System: LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.85$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.28, 6.28, 6.28); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.184 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.47 V/m; Power Drift = 0.049 dB

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.166 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.183 mW/g

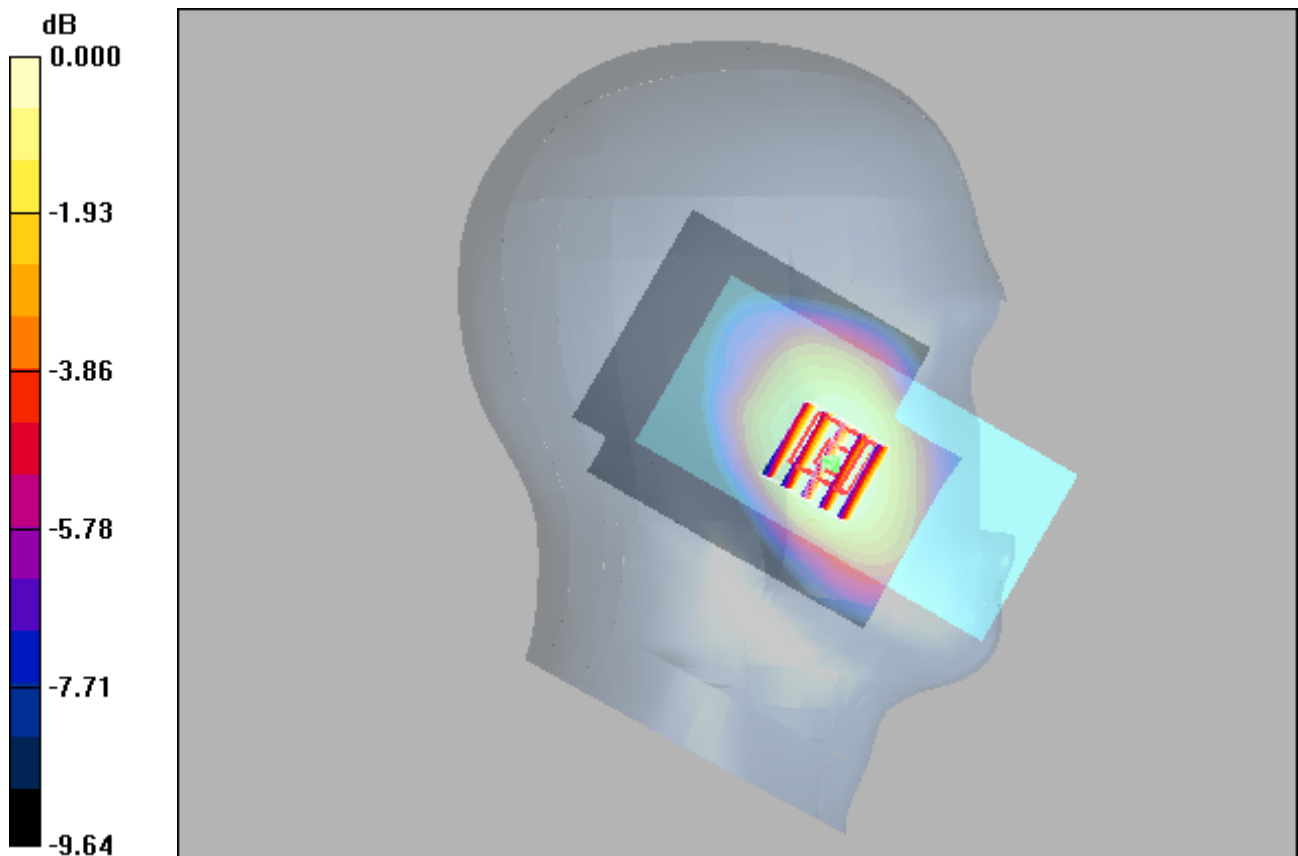

0 dB = 0.183mW/g

LTE 30_QPSK10M_1_25_Right Cheek_27710

DUT: EUT

Communication System: LTE 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: H2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.68$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.82, 4.82, 4.82); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x91x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.814 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = 0.129 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.530 mW/g; SAR(10 g) = 0.261 mW/g

Maximum value of SAR (measured) = 0.686 mW/g

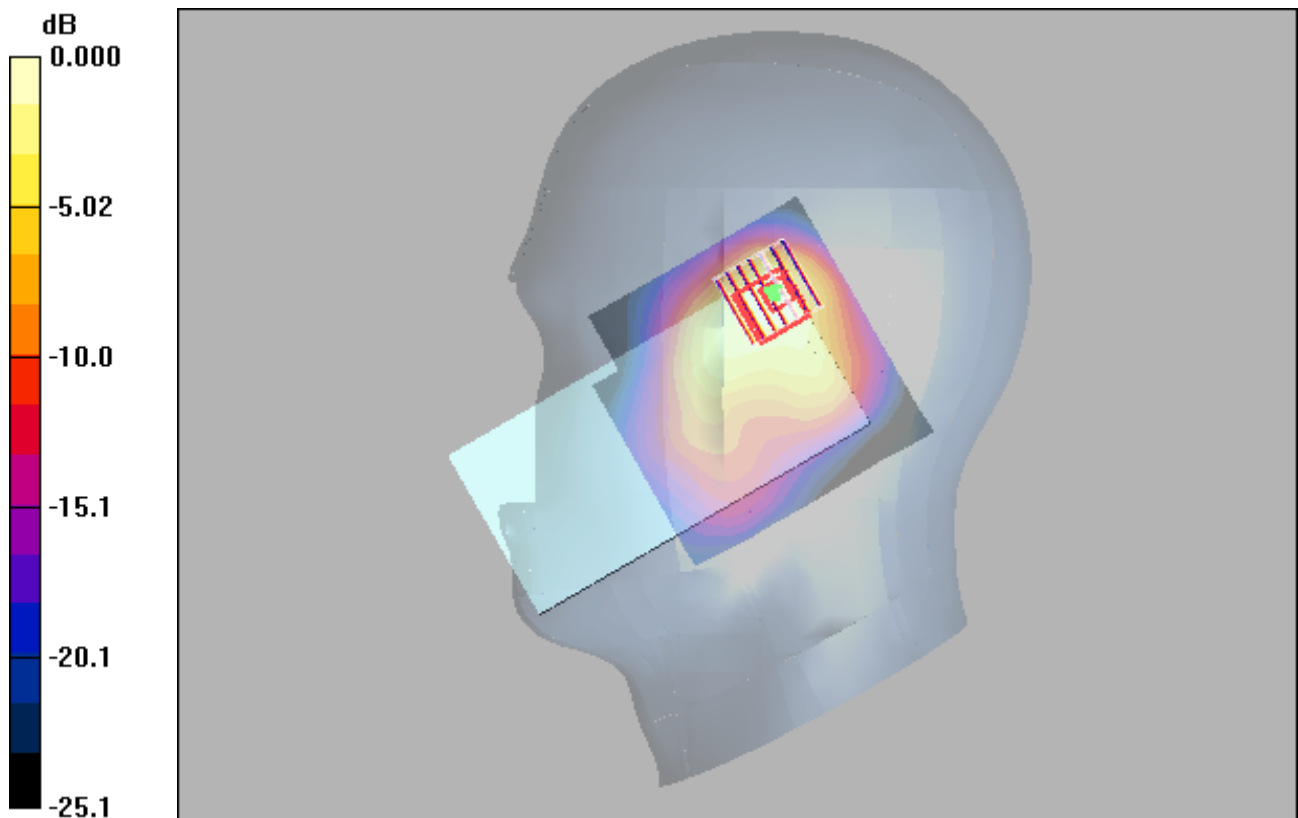

0 dB = 0.686mW/g

LTE 66_QPSK20M_1_50_Right Cheek_132322

DUT: EUT


Communication System: LTE 66; Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium: H1750 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.31$ mho/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.36, 5.36, 5.36); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.691 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 13.4 V/m; Power Drift = 0.039 dB
 Peak SAR (extrapolated) = 1.01 W/kg
SAR(1 g) = 0.500 mW/g; SAR(10 g) = 0.269 mW/g
 Maximum value of SAR (measured) = 0.571 mW/g

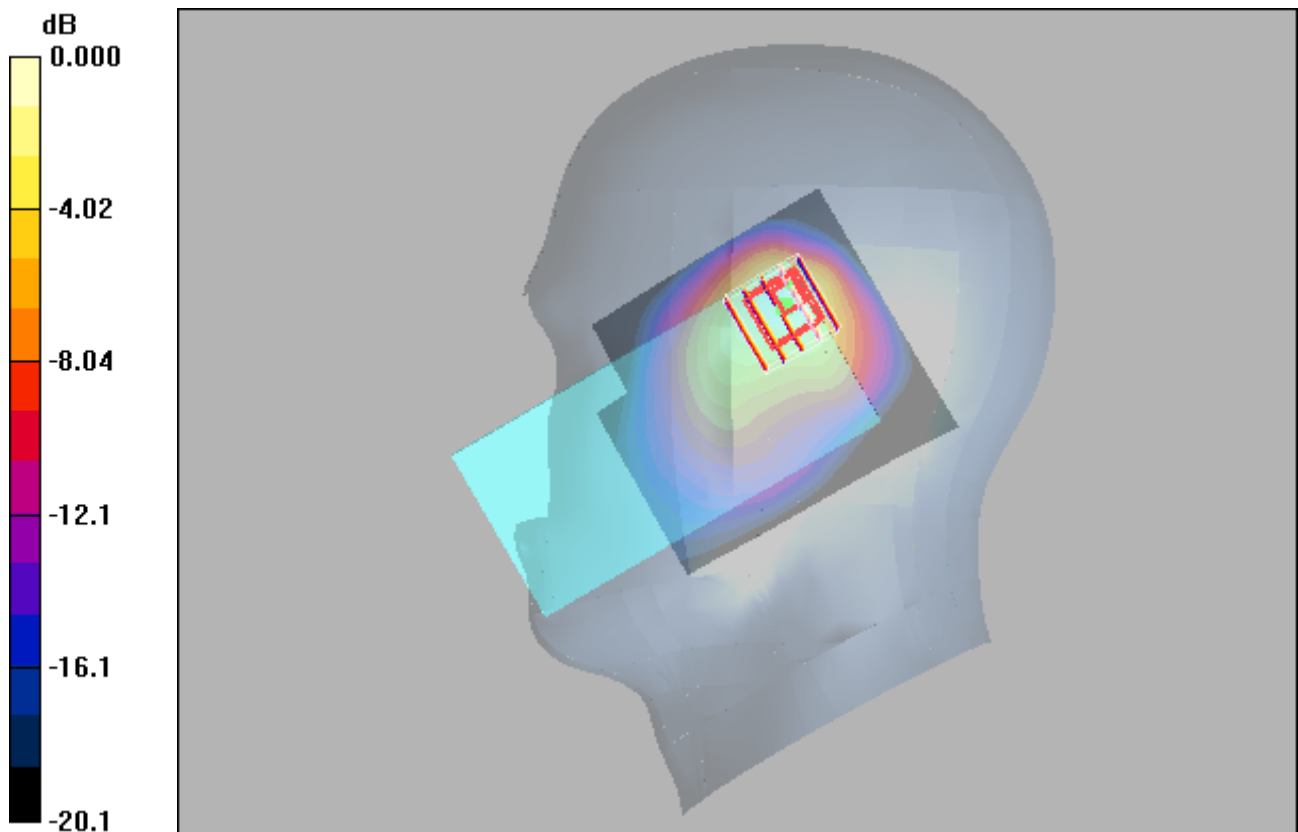

0 dB = 0.571mW/g

EDR_DH5_Left Cheek_78

DUT: EUT

Communication System: BT; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (81x61x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.190 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.28 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.324 W/kg

SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.056 mW/g

Maximum value of SAR (measured) = 0.191 mW/g

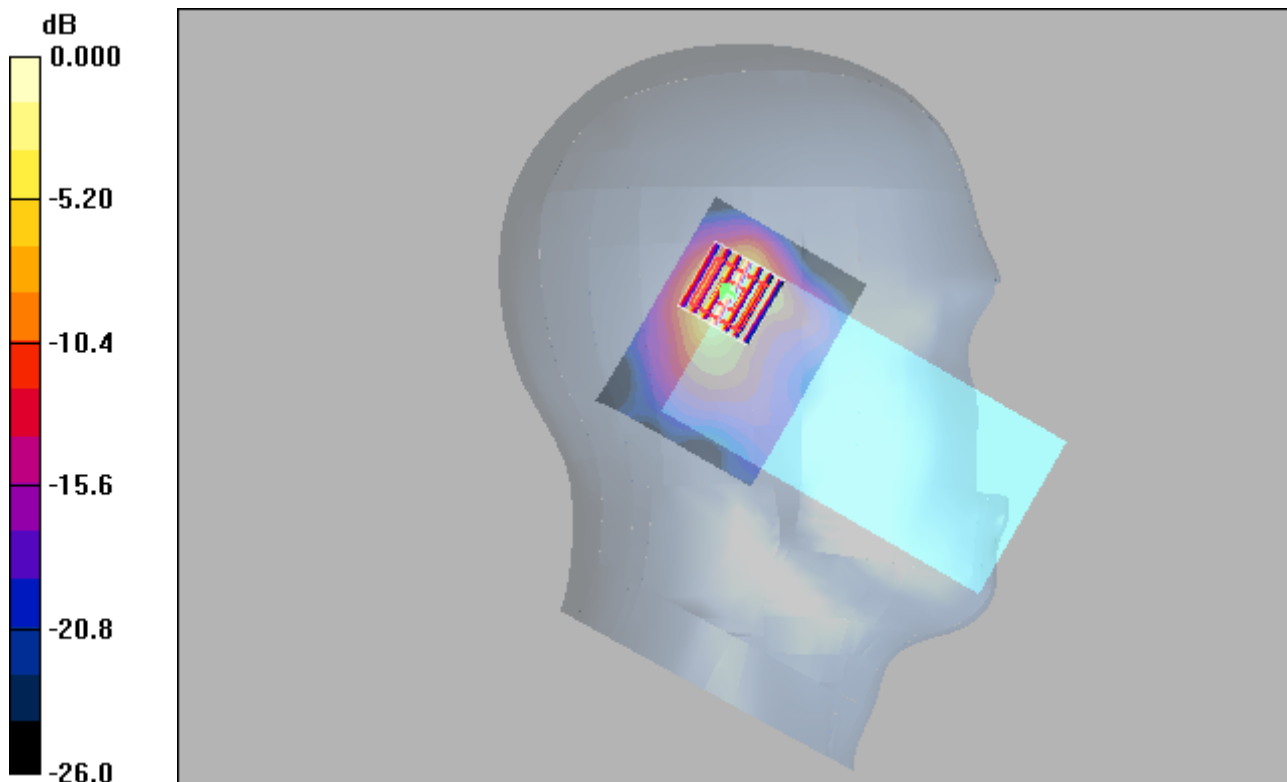

0 dB = 0.191mW/g

WIFI 2.4G_802.11b_Left Tilted_13

DUT: EUT


Communication System: Wlan 802.11b; Frequency: 2472 MHz; Duty Cycle: 1:1
 Medium: H2450 Medium parameters used: $f = 2472$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x91x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (interpolated) = 0.861 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 11.6 V/m; Power Drift = 0.177 dB
 Peak SAR (extrapolated) = 1.45 W/kg
SAR(1 g) = 0.609 mW/g; SAR(10 g) = 0.240 mW/g
 Maximum value of SAR (measured) = 0.825 mW/g

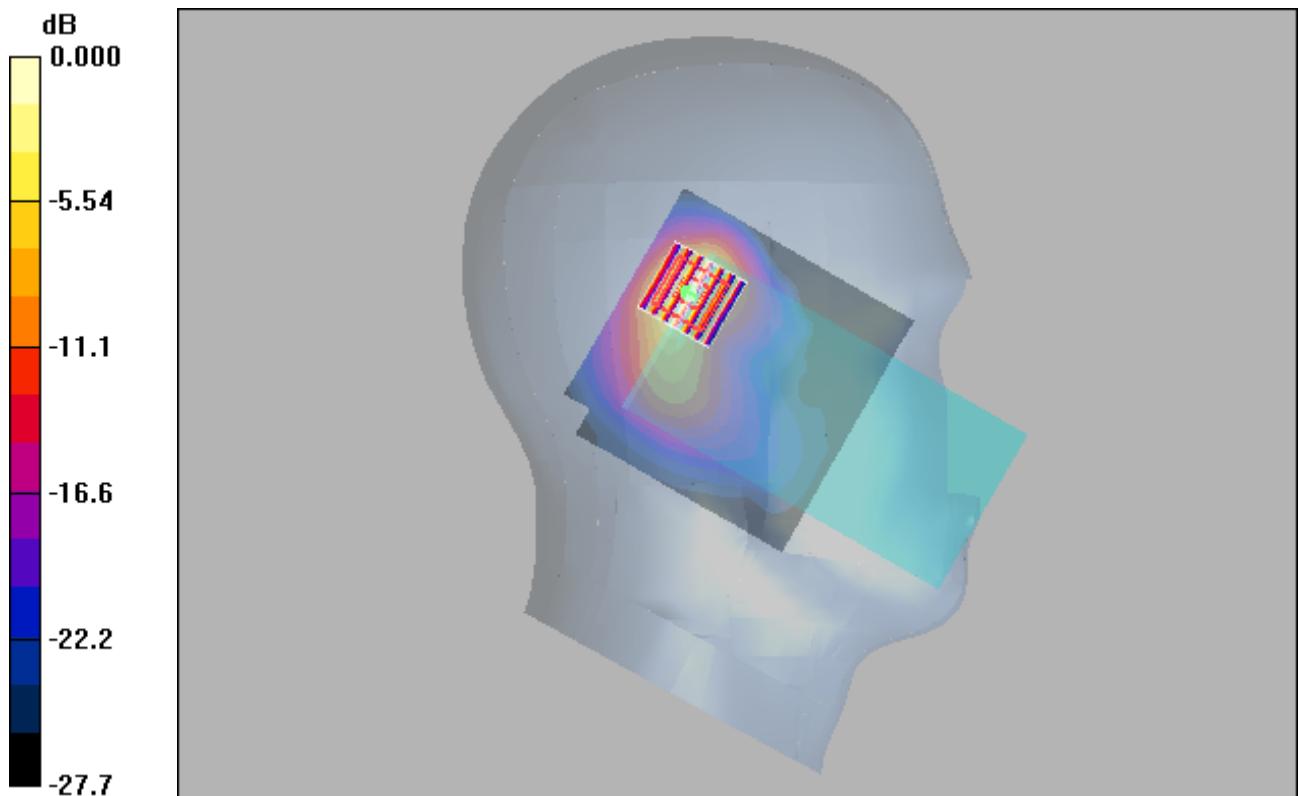

0 dB = 0.825mW/g

WIFI 5G_802.11a_Right Tilted_44

DUT: EUT

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5220$ MHz; $\sigma = 4.81$ mho/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (101x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.519 mW/g


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.30 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.307 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.638 mW/g

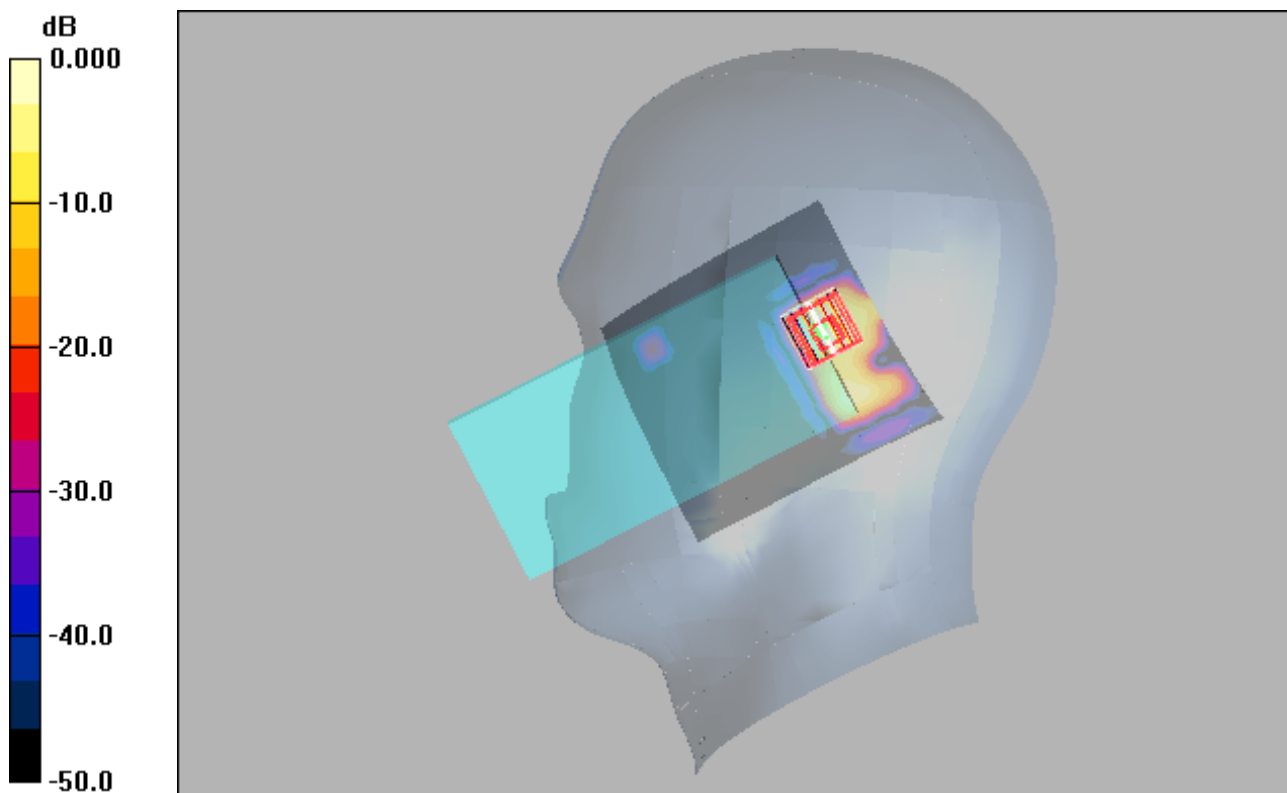

0 dB = 0.638mW/g

WIFI 5G_802.11a_Right Tilted_64

DUT: EUT

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5320$ MHz; $\sigma = 4.92$ mho/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (101x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.638 mW/g


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.21 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 3.40 W/kg

SAR(1 g) = 0.371 mW/g; SAR(10 g) = 0.095 mW/g

Maximum value of SAR (measured) = 0.803 mW/g

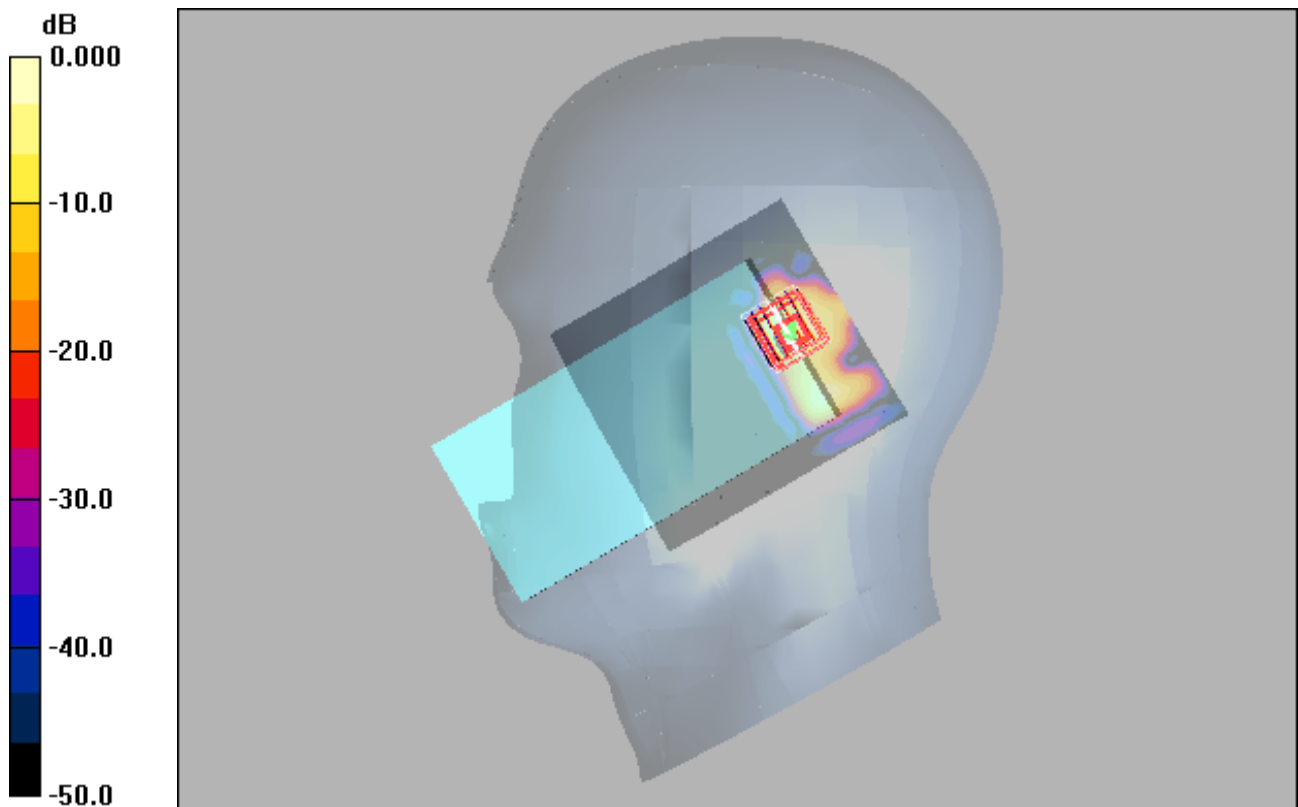

0 dB = 0.803mW/g

WIFI 5G_802.11a_Right Cheek_140

DUT: EUT

Communication System: 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1.08

Medium: H5800 Medium parameters used: $f = 5700$ MHz; $\sigma = 5.39$ mho/m; $\epsilon_r = 34.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (101x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.678 mW/g


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.75 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 0.483 mW/g; SAR(10 g) = 0.118 mW/g

Maximum value of SAR (measured) = 1.13 mW/g

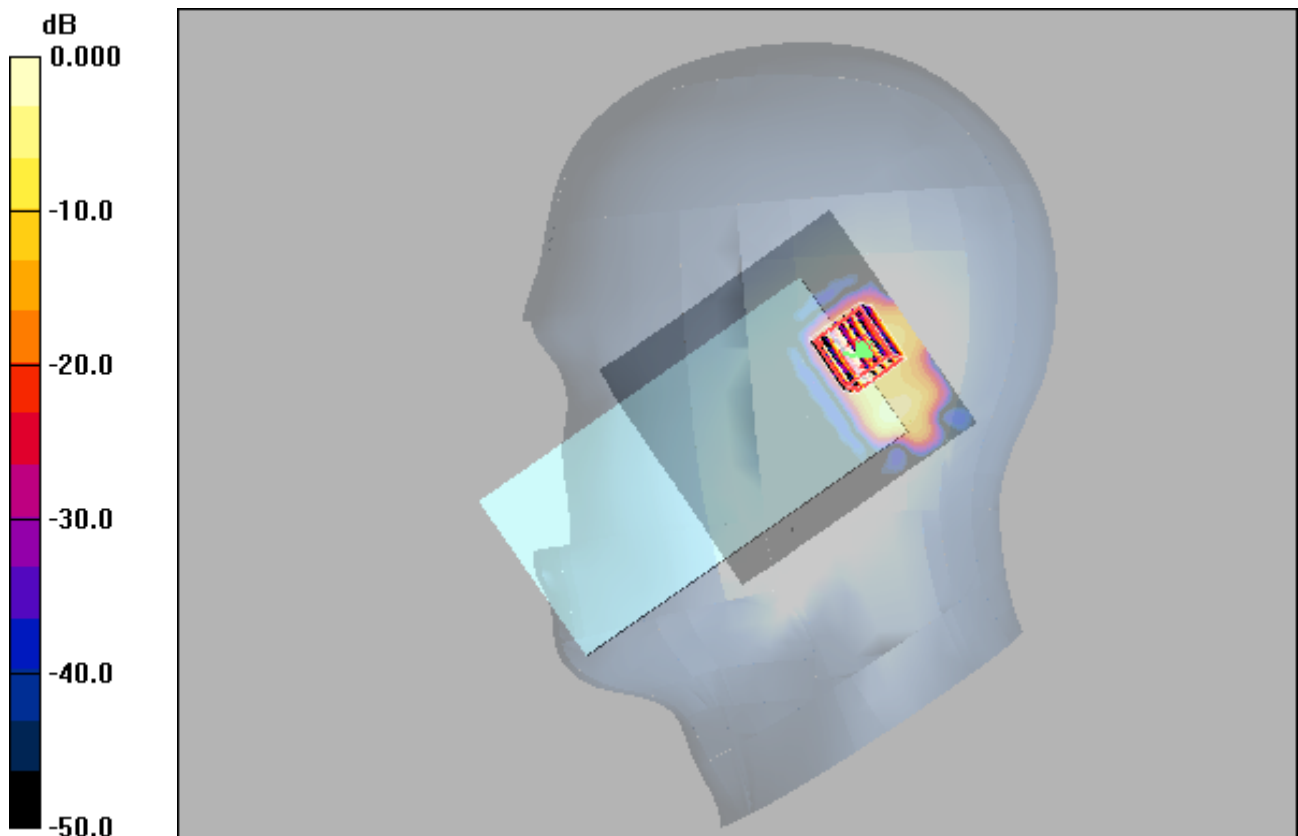

0 dB = 1.13mW/g

WIFI 5G_802.11a_Right Tilted_157

DUT: EUT

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1.08

Medium: H5800 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.4$ mho/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (101x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.00 mW/g


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 8.65 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 0.500 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

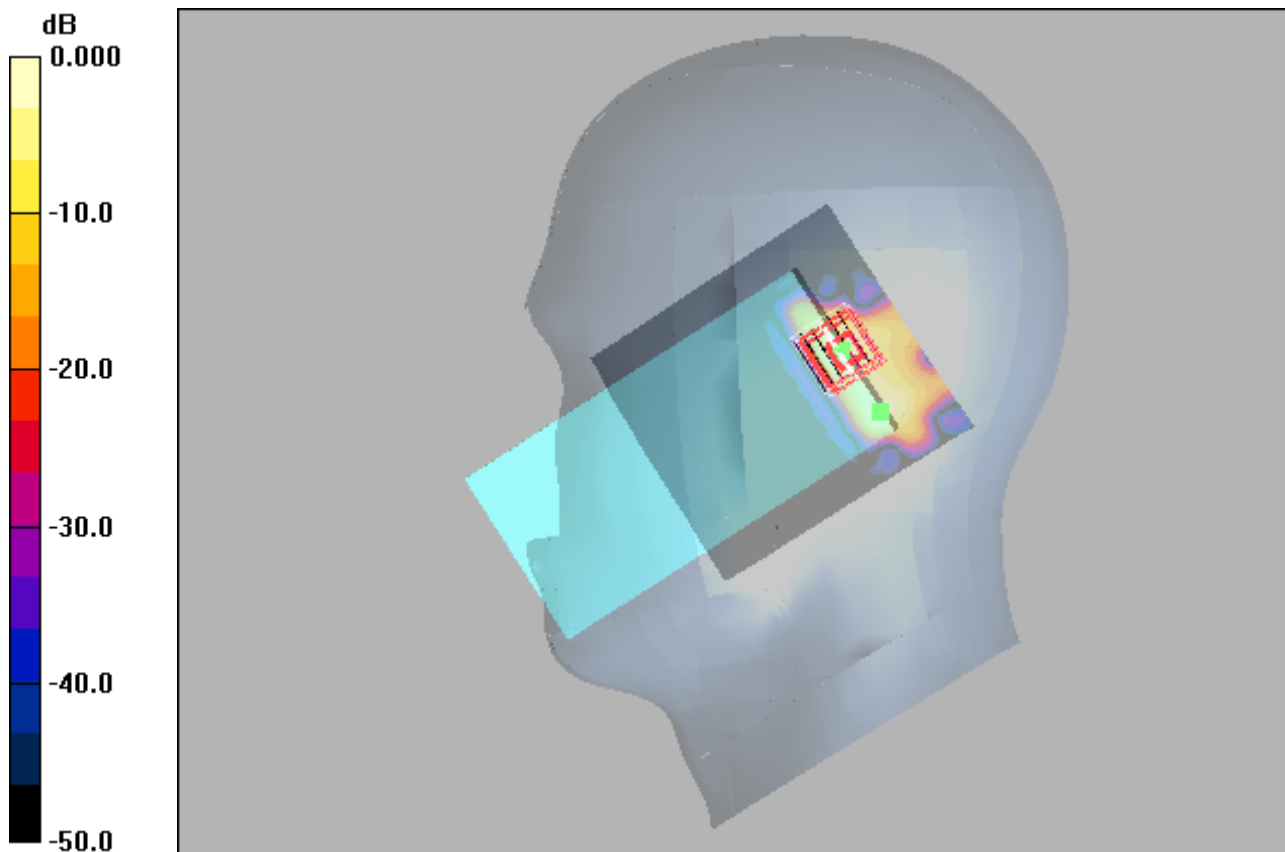

0 dB = 1.11mW/g

GSM850_GPRS10_Front Face_10MM_190

DUT: EUT

Communication System: GPRS 850-2slots; Frequency: 836.6 MHz;Duty Cycle: 1:4

Medium: H835 Medium parameters used: $f = 837$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.570 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.3 V/m; Power Drift = -0.095 dB

Peak SAR (extrapolated) = 0.651 W/kg

SAR(1 g) = 0.509 mW/g; SAR(10 g) = 0.380 mW/g

Maximum value of SAR (measured) = 0.560 mW/g

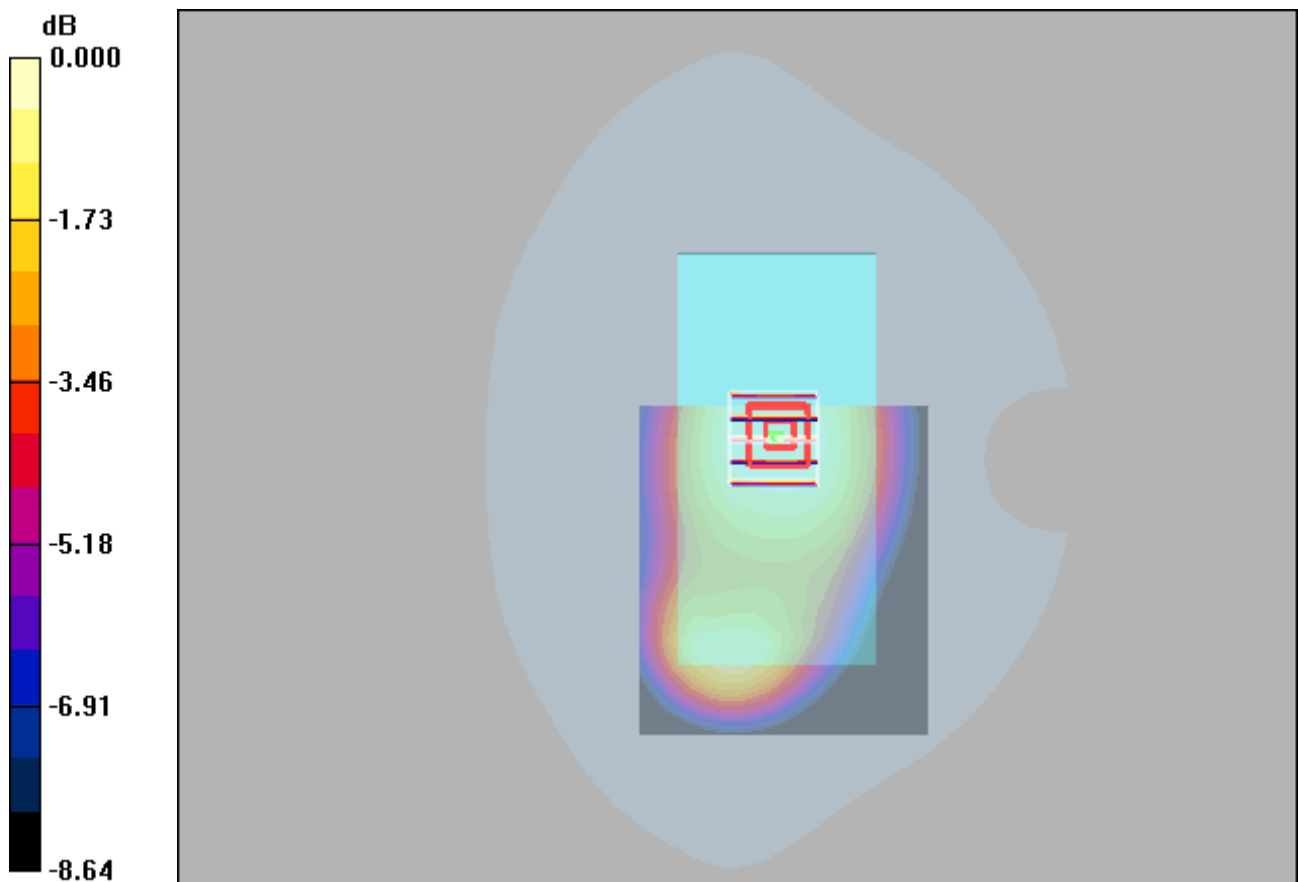

0 dB = 0.560mW/g

GSM1900_GPRS10_Rear Face_10MM_810

DUT: EUT


Communication System: GPRS1900-2slots; Frequency: 1909.8 MHz; Duty Cycle: 1:4
 Medium: H1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.796 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 14.0 V/m; Power Drift = -0.116 dB
 Peak SAR (extrapolated) = 1.11 W/kg
SAR(1 g) = 0.579 mW/g; SAR(10 g) = 0.334 mW/g
 Maximum value of SAR (measured) = 0.699 mW/g

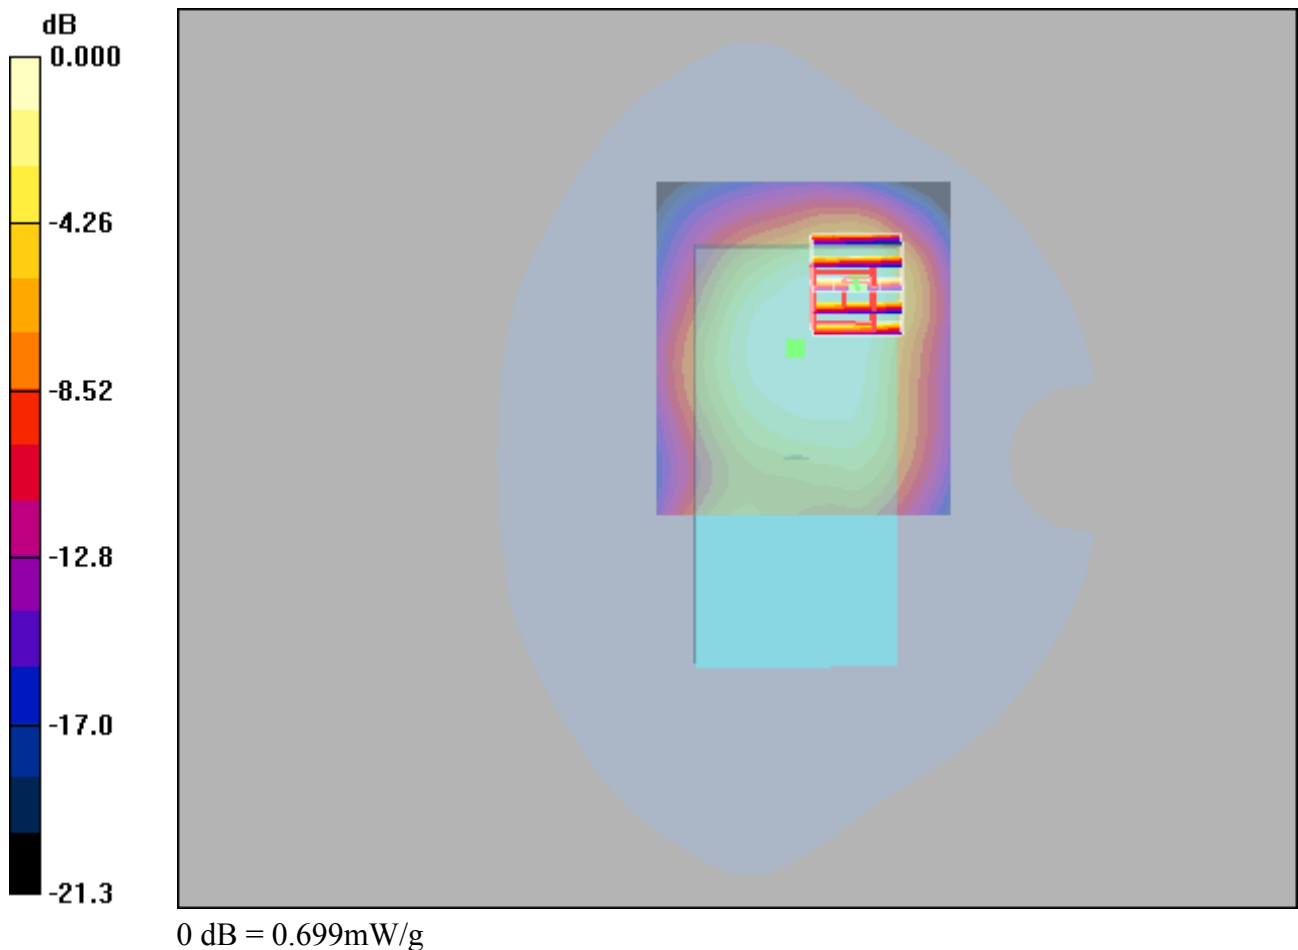

WCDMA II_RMC12.2K_Rear Face_10MM_9262

DUT: EUT


Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
 Medium: H1900 Medium parameters used: $f = 1852.4 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.769 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 14.1 V/m; Power Drift = -0.031 dB
 Peak SAR (extrapolated) = 0.953 W/kg
SAR(1 g) = 0.639 mW/g; SAR(10 g) = 0.419 mW/g
 Maximum value of SAR (measured) = 0.732 mW/g

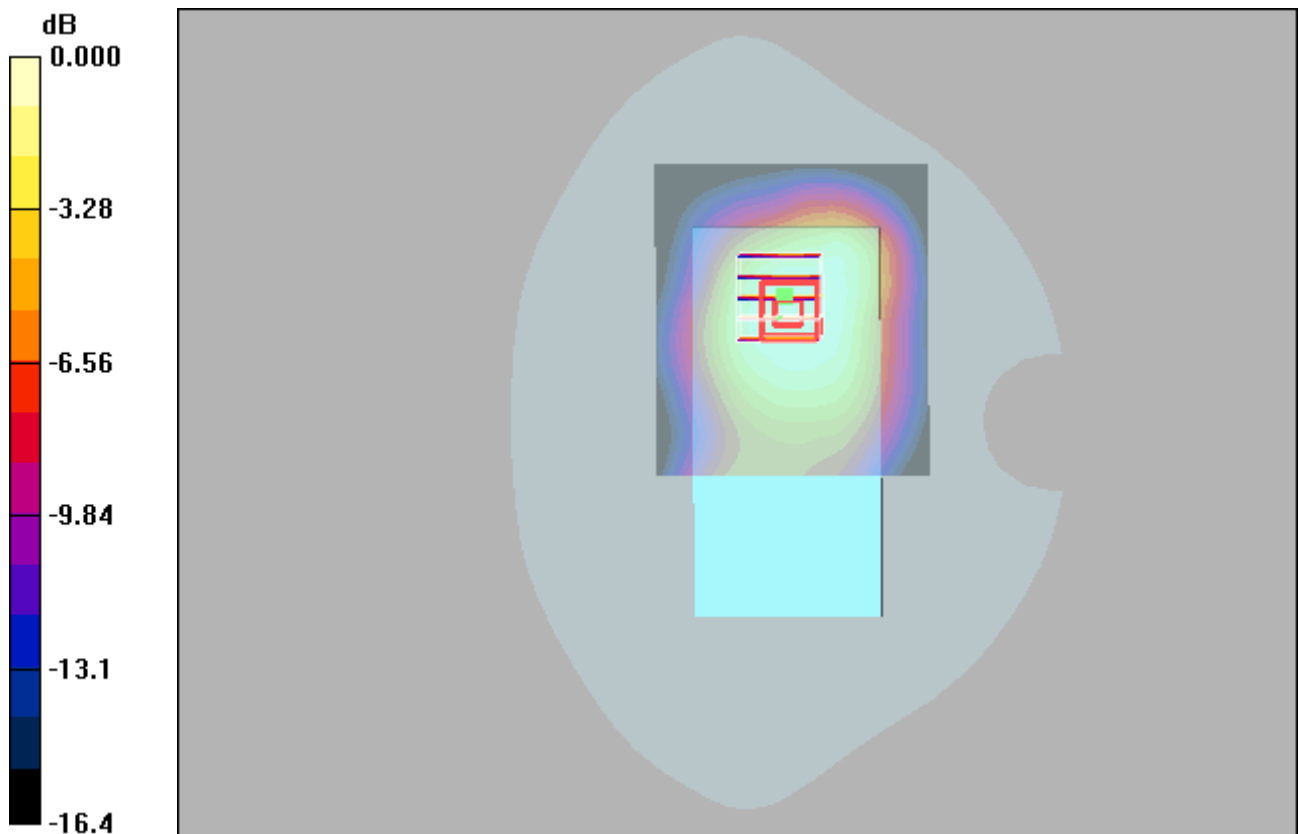

0 dB = 0.732mW/g

WCDMA IV_RMC12.2K_Rear Face_10MM_1312

DUT: EUT


Communication System: WCDMA Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1
 Medium: H1750 Medium parameters used: $f = 1712.4 \text{ MHz}$; $\sigma = 1.27 \text{ mho/m}$; $\epsilon_r = 39.9$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.36, 5.36, 5.36); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.765 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 9.32 V/m; Power Drift = -0.058 dB
 Peak SAR (extrapolated) = 0.970 W/kg
SAR(1 g) = 0.627 mW/g; SAR(10 g) = 0.402 mW/g
 Maximum value of SAR (measured) = 0.721 mW/g

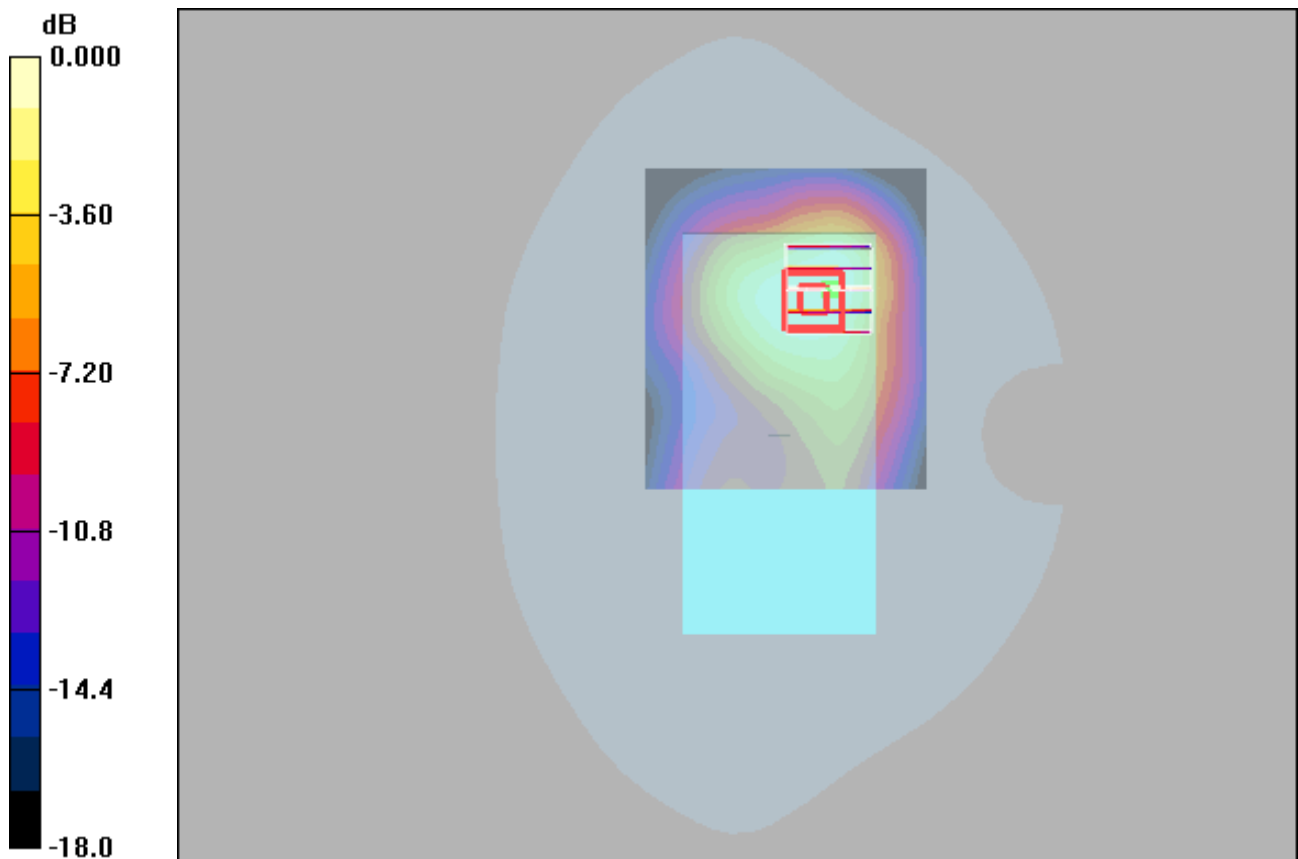

0 dB = 0.721mW/g

WCDMA V_RMC12.2K_Rear Face_10MM_4132

DUT: EUT


Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium: H835 Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.913$ mho/m; $\epsilon_r = 39.6$;
 $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.344 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.8 V/m; Power Drift = -0.162 dB
Peak SAR (extrapolated) = 0.396 W/kg
SAR(1 g) = 0.306 mW/g; SAR(10 g) = 0.228 mW/g
Maximum value of SAR (measured) = 0.338 mW/g

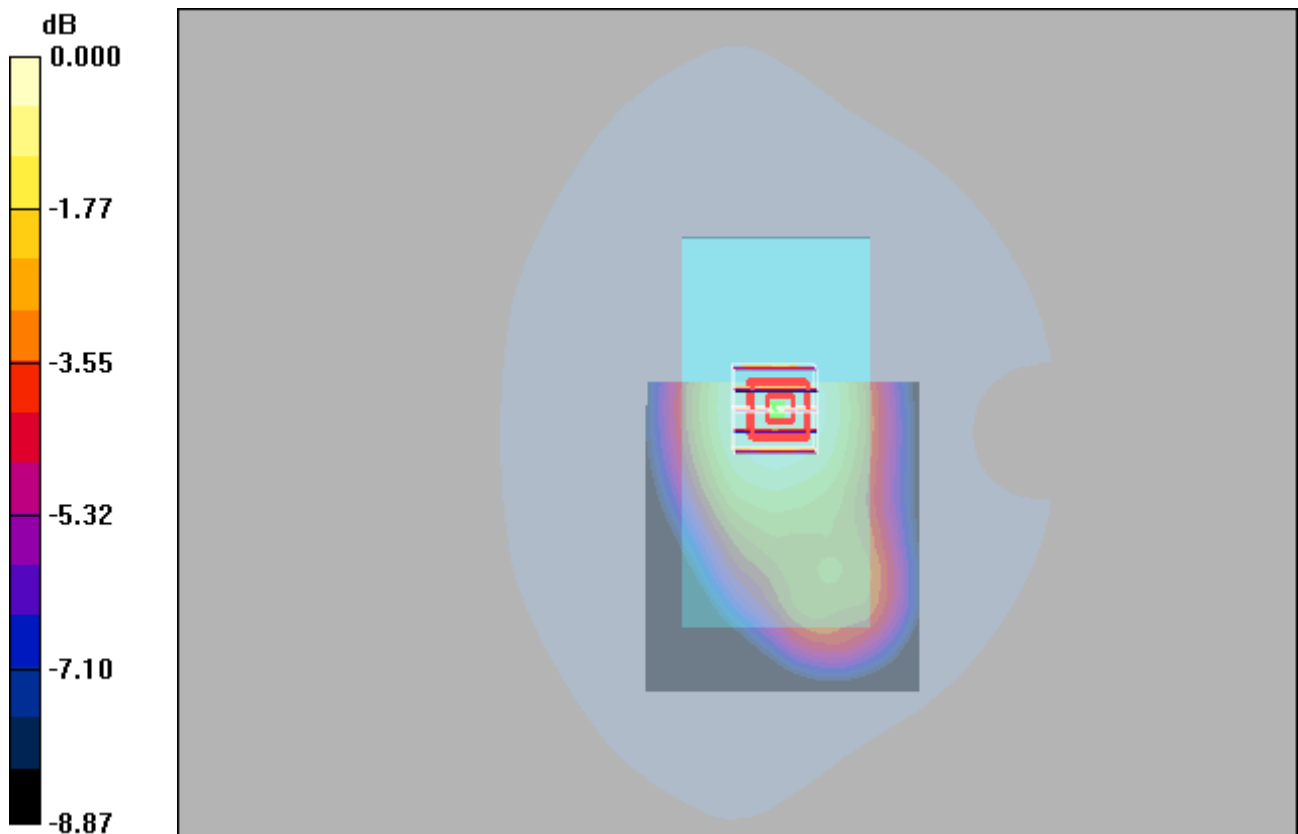

0 dB = 0.338mW/g

LTE 2_QPSK20M_1_50_Rear Face_10MM_18700

DUT: EUT


Communication System: LTE Band 2; Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.718 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.0 V/m; Power Drift = -0.058 dB
Peak SAR (extrapolated) = 0.896 W/kg
SAR(1 g) = 0.598 mW/g; SAR(10 g) = 0.394 mW/g
Maximum value of SAR (measured) = 0.686 mW/g

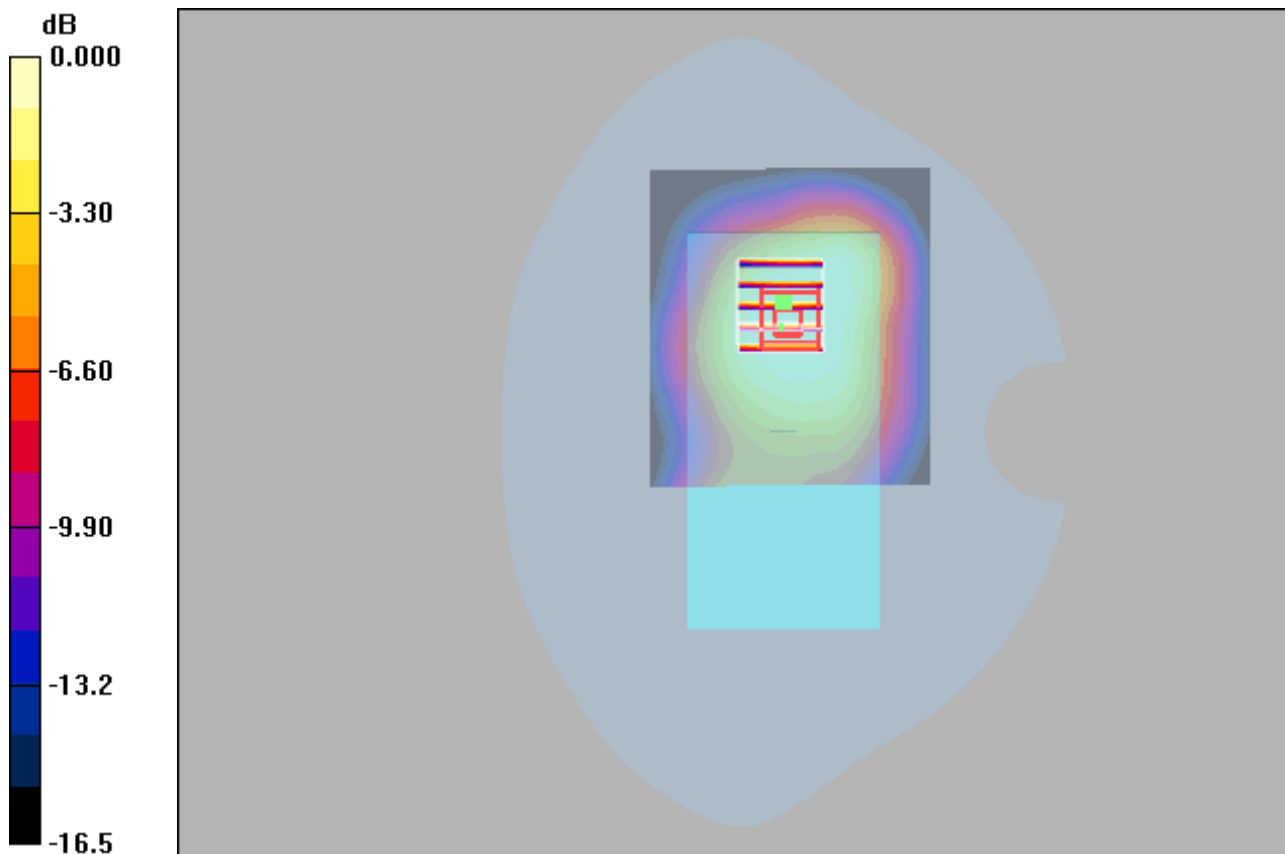

0 dB = 0.686mW/g

LTE 5_QPSK10M_1_25_Rear Face_10MM_20450

DUT: EUT

Communication System: LTE FDD 10M-Band 5; Frequency: 829 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 829$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.297 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.4 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.272 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.301 mW/g

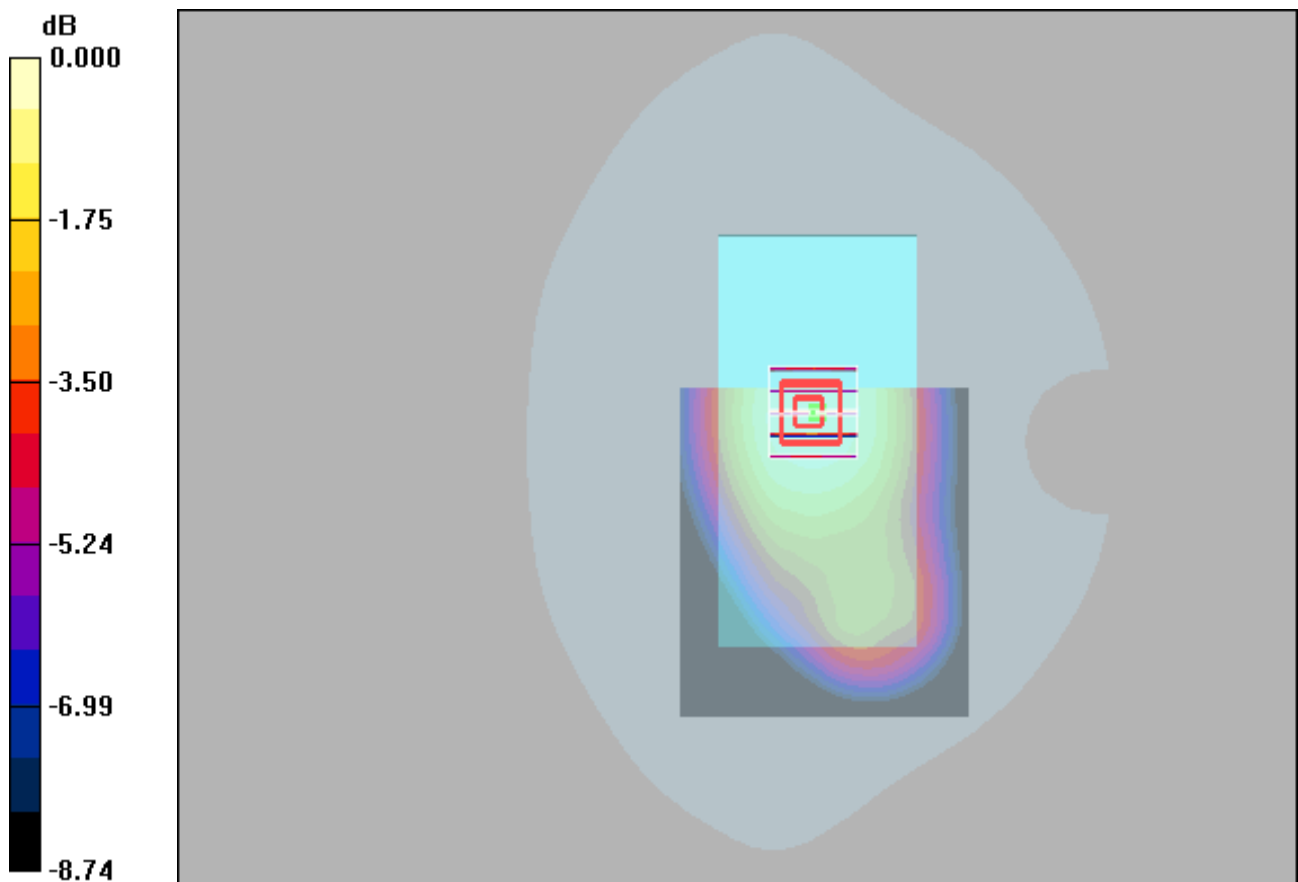

0 dB = 0.301mW/g

LTE 12_QPSK10M_1_25_Rear Face_10MM_23095

DUT: EUT

Communication System: LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.85$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.28, 6.28, 6.28); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.263 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.237 mW/g; SAR(10 g) = 0.180 mW/g

Maximum value of SAR (measured) = 0.261 mW/g

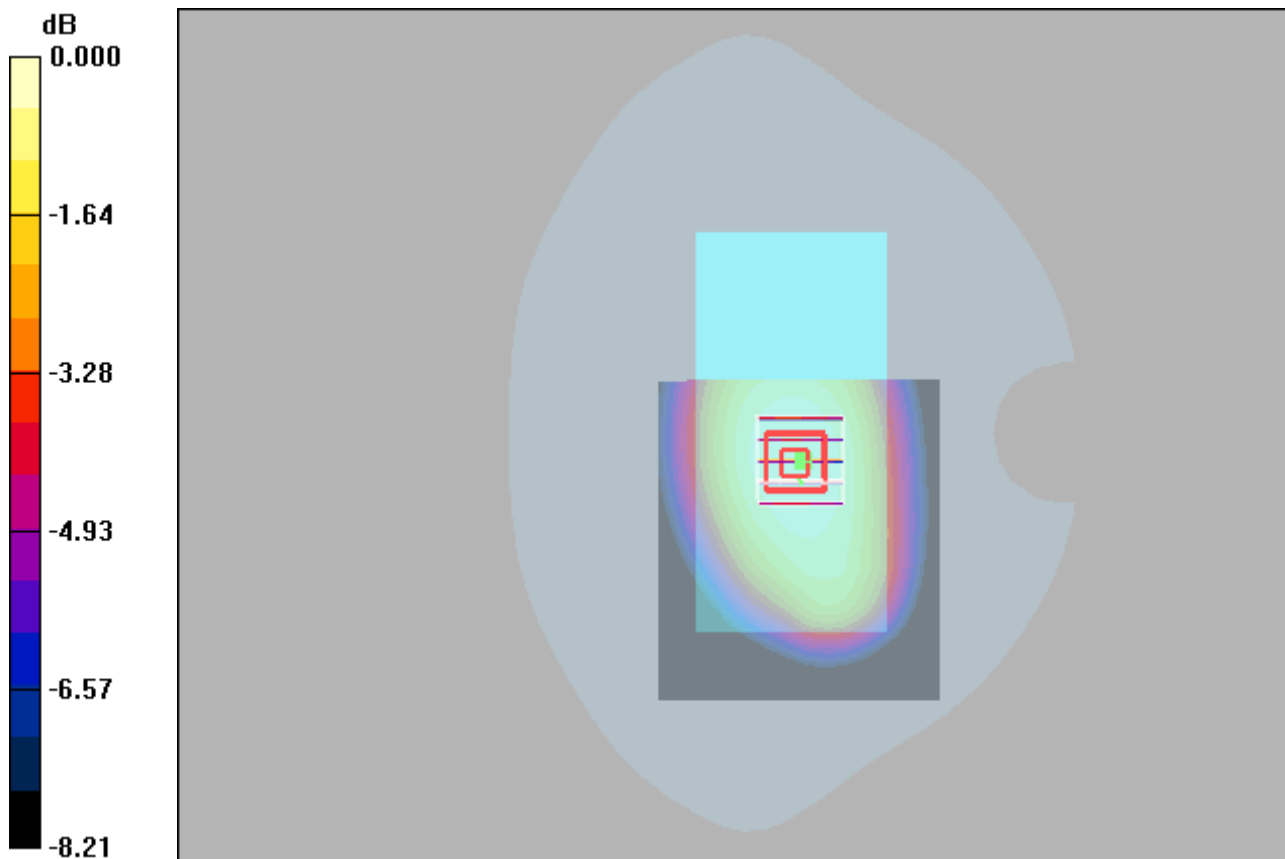

0 dB = 0.261mW/g

LTE 30_QPSK5M_1_13_Rear Face_10MM_27735

DUT: EUT


Communication System: LTE 30&5M; Frequency: 2312.5 MHz; Duty Cycle: 1:1
Medium: H2300 Medium parameters used: $f = 2312.5$ MHz; $\sigma = 1.68$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.82, 4.82, 4.82); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x91x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.585 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 13.1 V/m; Power Drift = 0.007 dB
Peak SAR (extrapolated) = 0.934 W/kg
SAR(1 g) = 0.447 mW/g; SAR(10 g) = 0.237 mW/g
Maximum value of SAR (measured) = 0.570 mW/g

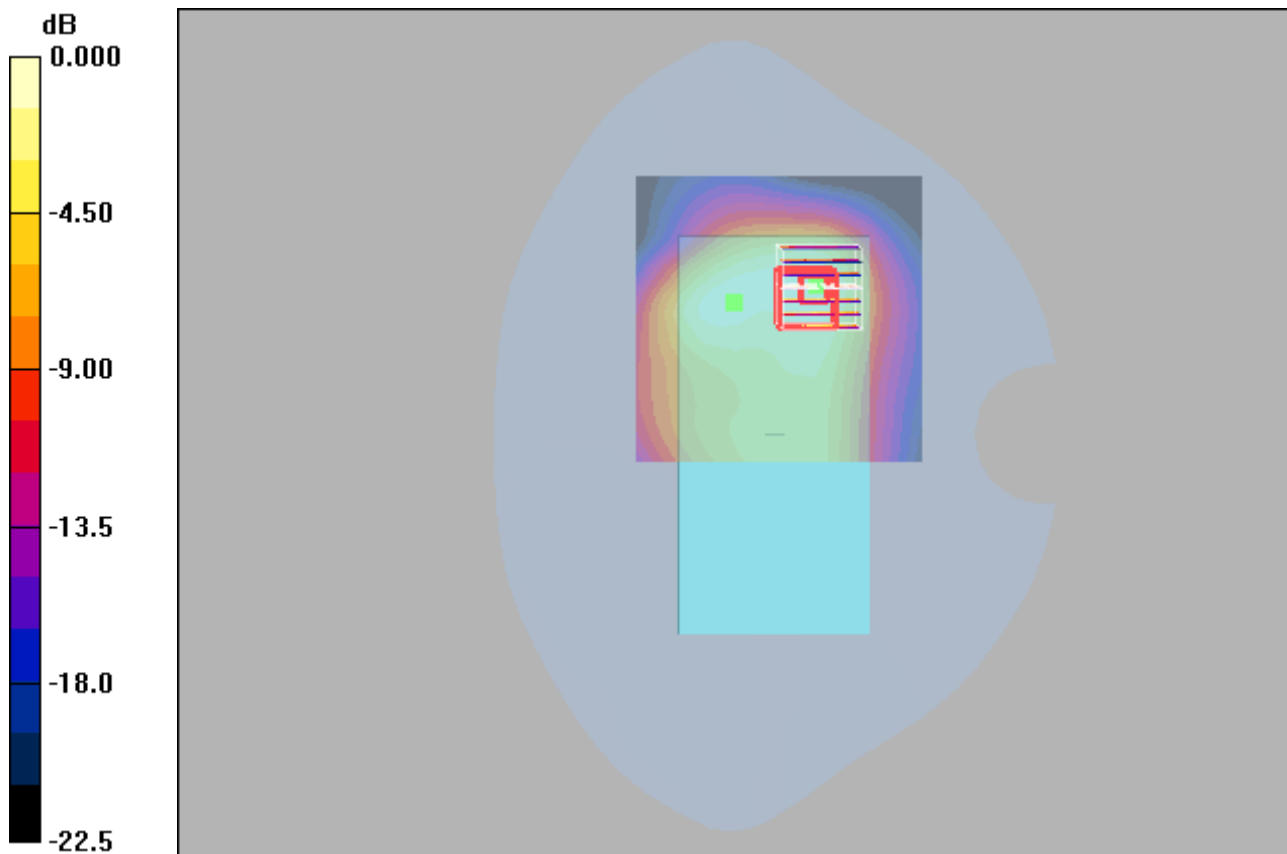

0 dB = 0.570mW/g

LTE 66_QPSK20M_1_50_Rear Face_10MM_132572

DUT: EUT


Communication System: LTE Band 66&QPSK20M; Frequency: 1770 MHz;Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.36, 5.36, 5.36); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.763 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.0 V/m; Power Drift = -0.054 dB
Peak SAR (extrapolated) = 0.950 W/kg
SAR(1 g) = 0.641 mW/g; SAR(10 g) = 0.416 mW/g
Maximum value of SAR (measured) = 0.734 mW/g

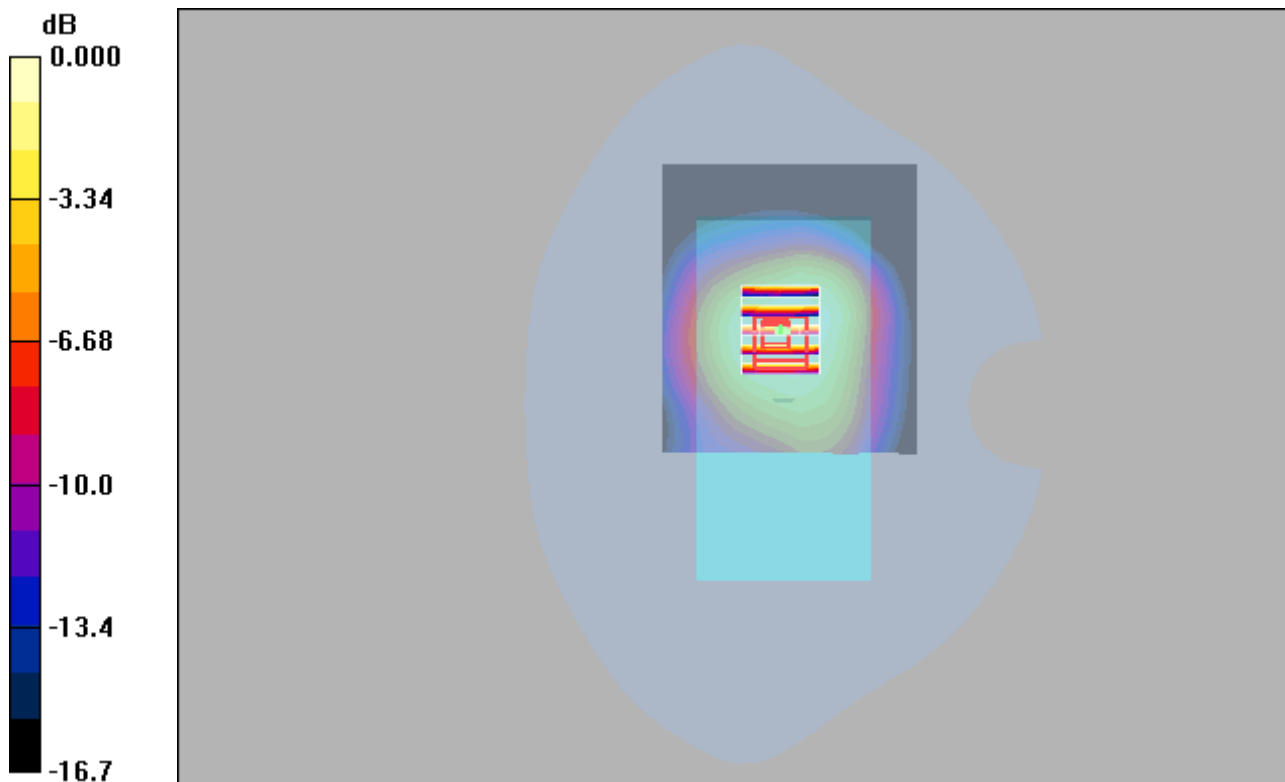

0 dB = 0.734mW/g

EDR_DH5_Rear Face_10MM_78

DUT: EUT

Communication System: BT; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x91x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.053 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.28 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 0.084 W/kg

SAR(1 g) = 0.041 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.053 mW/g

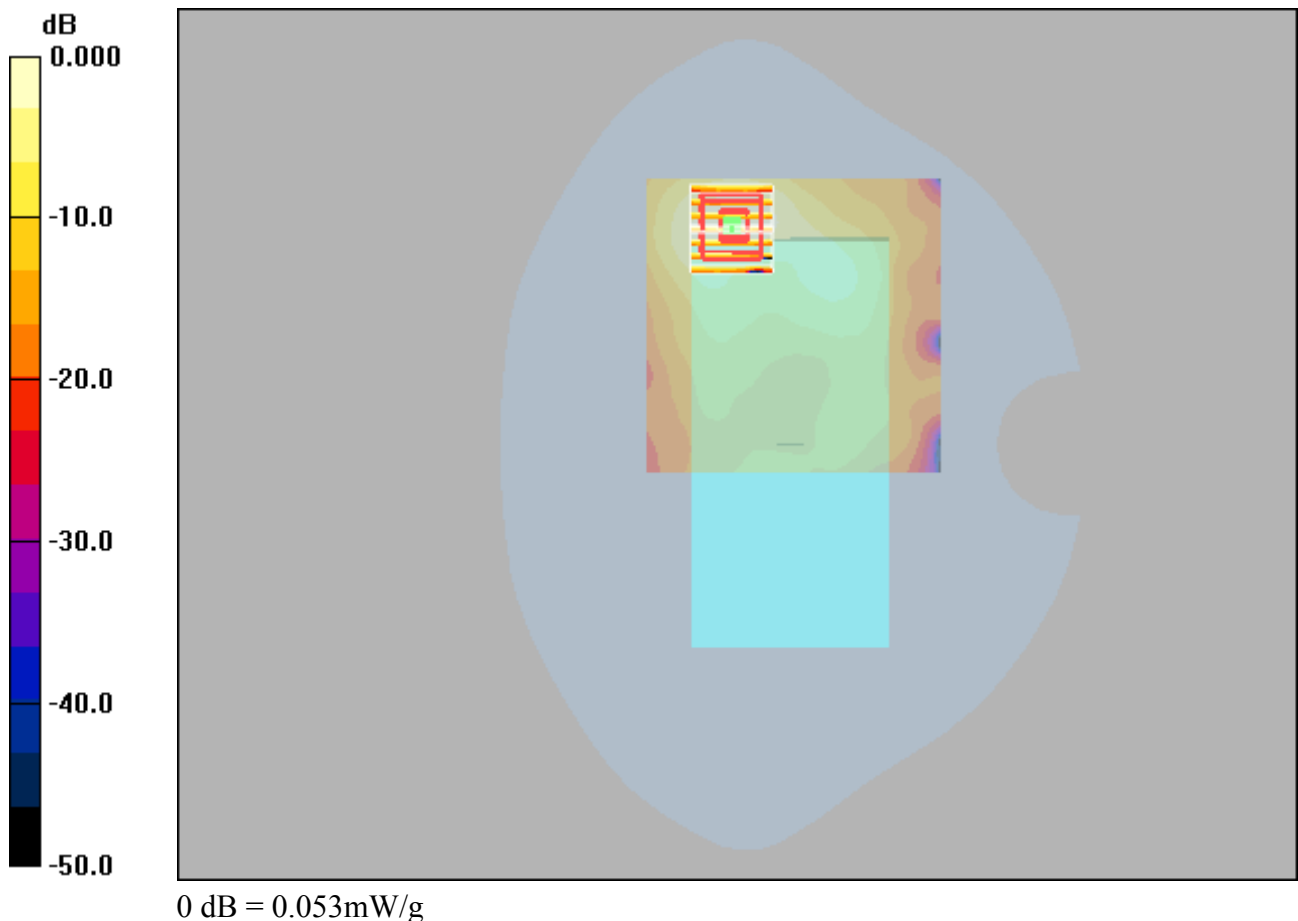

WIFI 2.4G_802.11b_Rear Face_10mm_13

DUT: EUT


Communication System: Wlan 802.11b; Frequency: 2472 MHz; Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2472$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x91x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.204 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.42 V/m; Power Drift = 0.077 dB
Peak SAR (extrapolated) = 0.327 W/kg
SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.073 mW/g
Maximum value of SAR (measured) = 0.199 mW/g

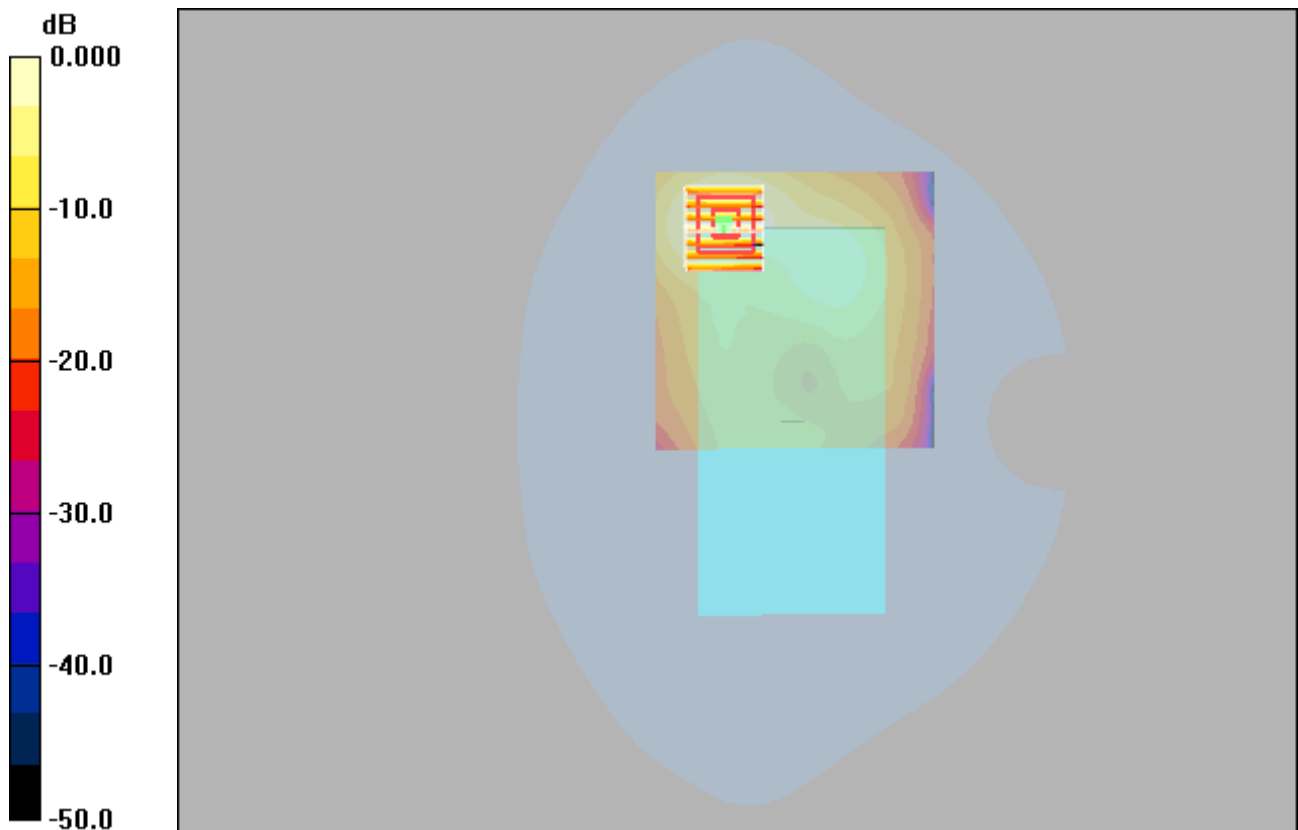

0 dB = 0.199mW/g

WIFI 5G_802.11a_Rear Face_10mm_44

DUT: EUT

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5220$ MHz; $\sigma = 4.81$ mho/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (101x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.562 mW/g


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.20 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.042 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.093 mW/g

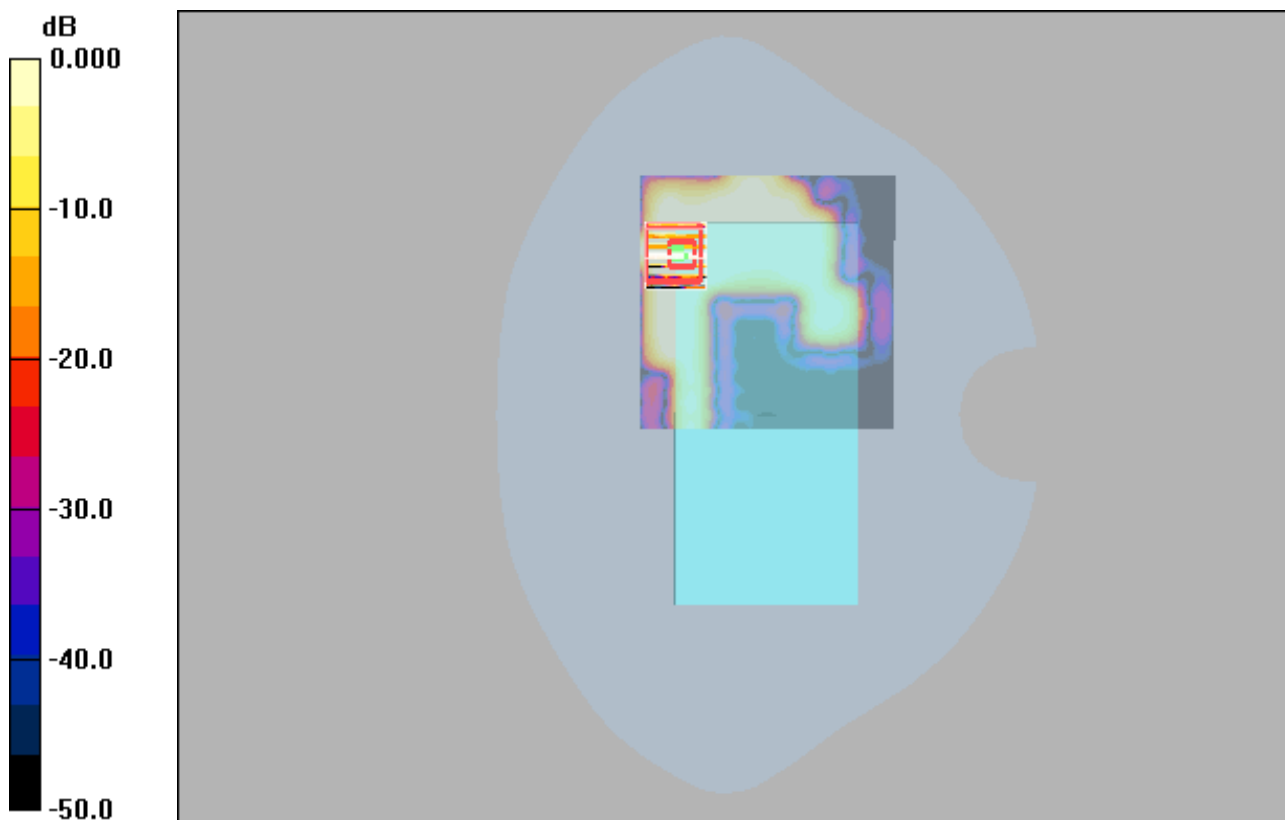

WIFI 5G_802.11a_Rear Face_10mm_64

DUT: EUT

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5320$ MHz; $\sigma = 4.92$ mho/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (101x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.160 mW/g


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.13 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 0.389 W/kg

SAR(1 g) = 0.065 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.147 mW/g

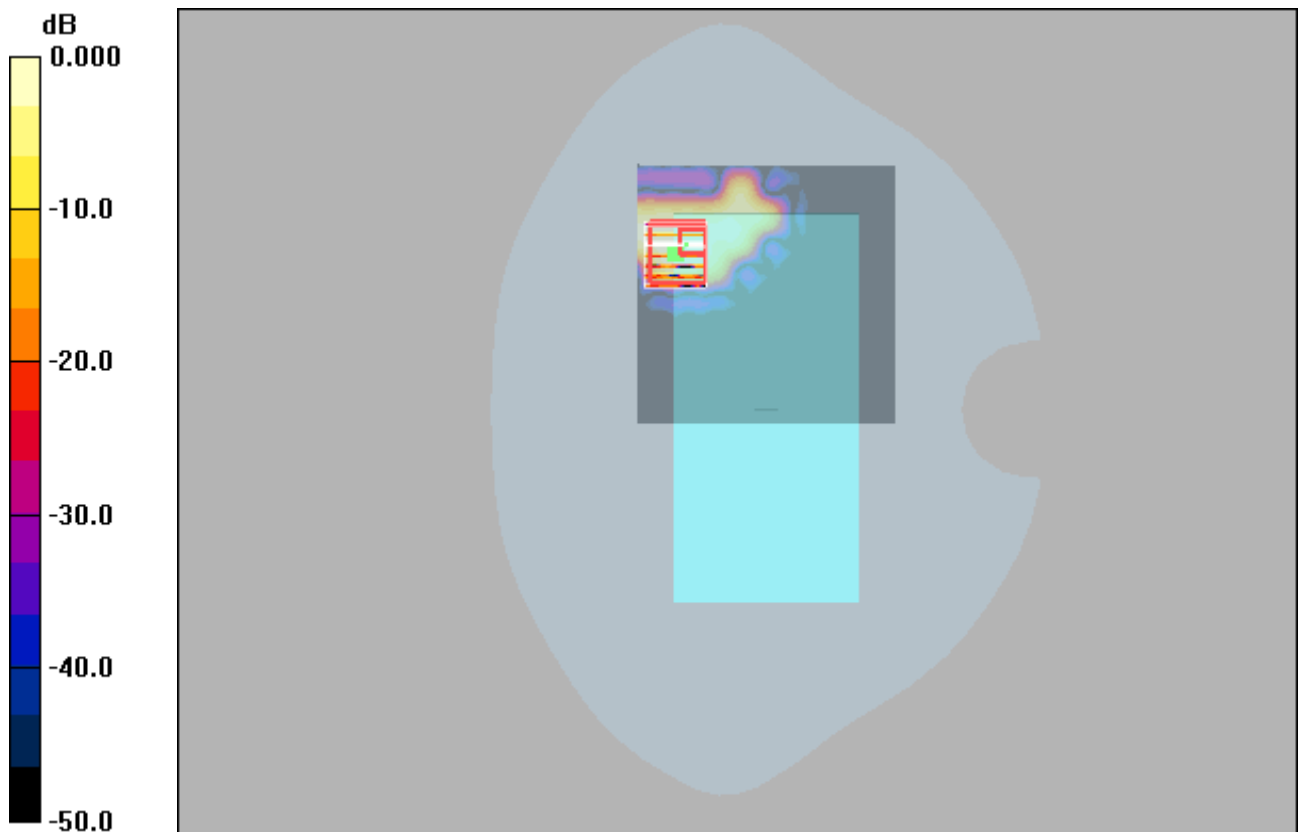

WIFI 5G_802.11a_Rear Face_10mm_140

DUT: EUT

Communication System: 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1.08

Medium: H5800 Medium parameters used: $f = 5700$ MHz; $\sigma = 5.39$ mho/m; $\epsilon_r = 34.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (101x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.18 mW/g


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.55 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.527 mW/g

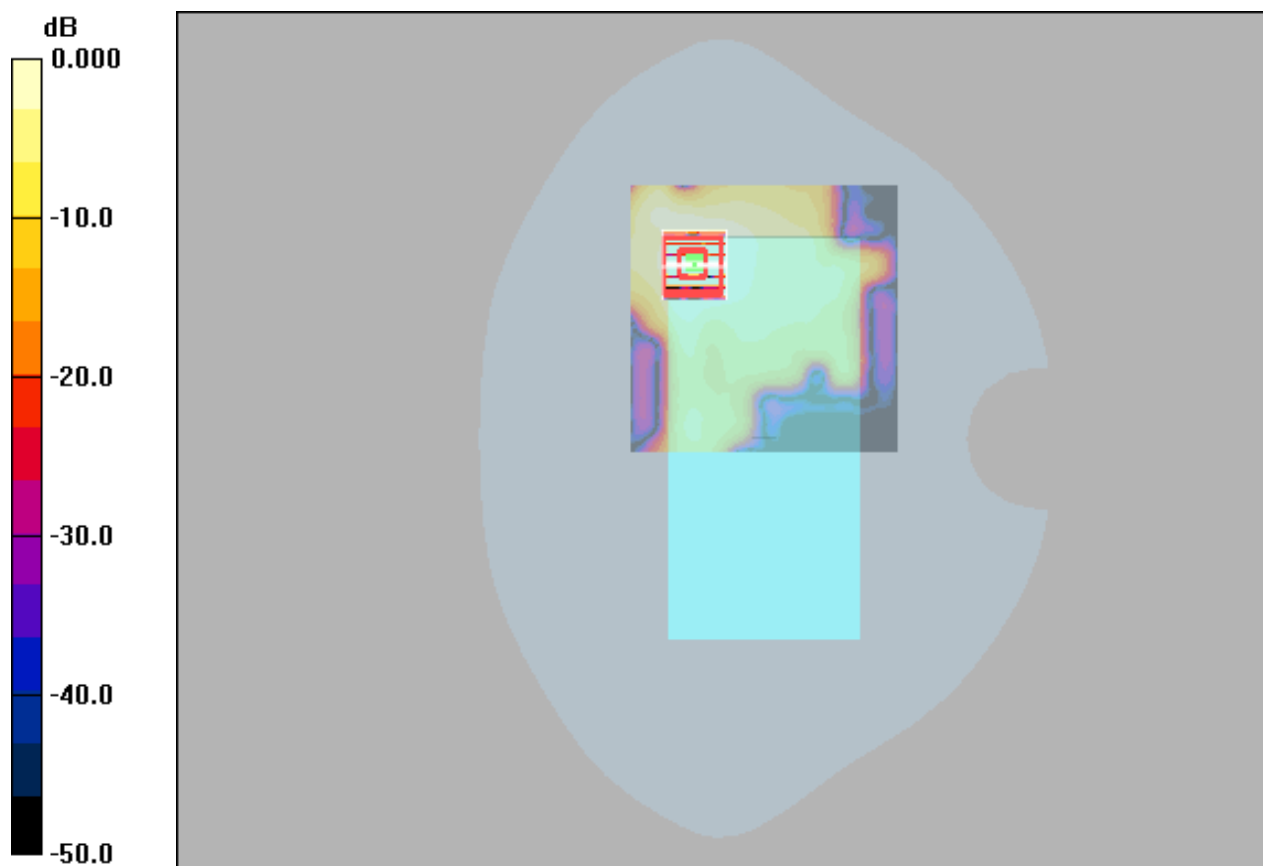

0 dB = 0.527mW/g

WIFI 5G_802.11a_Rear Face_10mm_157

DUT: EUT

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1.08

Medium: H5800 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.4$ mho/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (101x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.265 mW/g


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.291 V/m; Power Drift = 0.091 dB

Peak SAR (extrapolated) = 0.546 W/kg

SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.294 mW/g

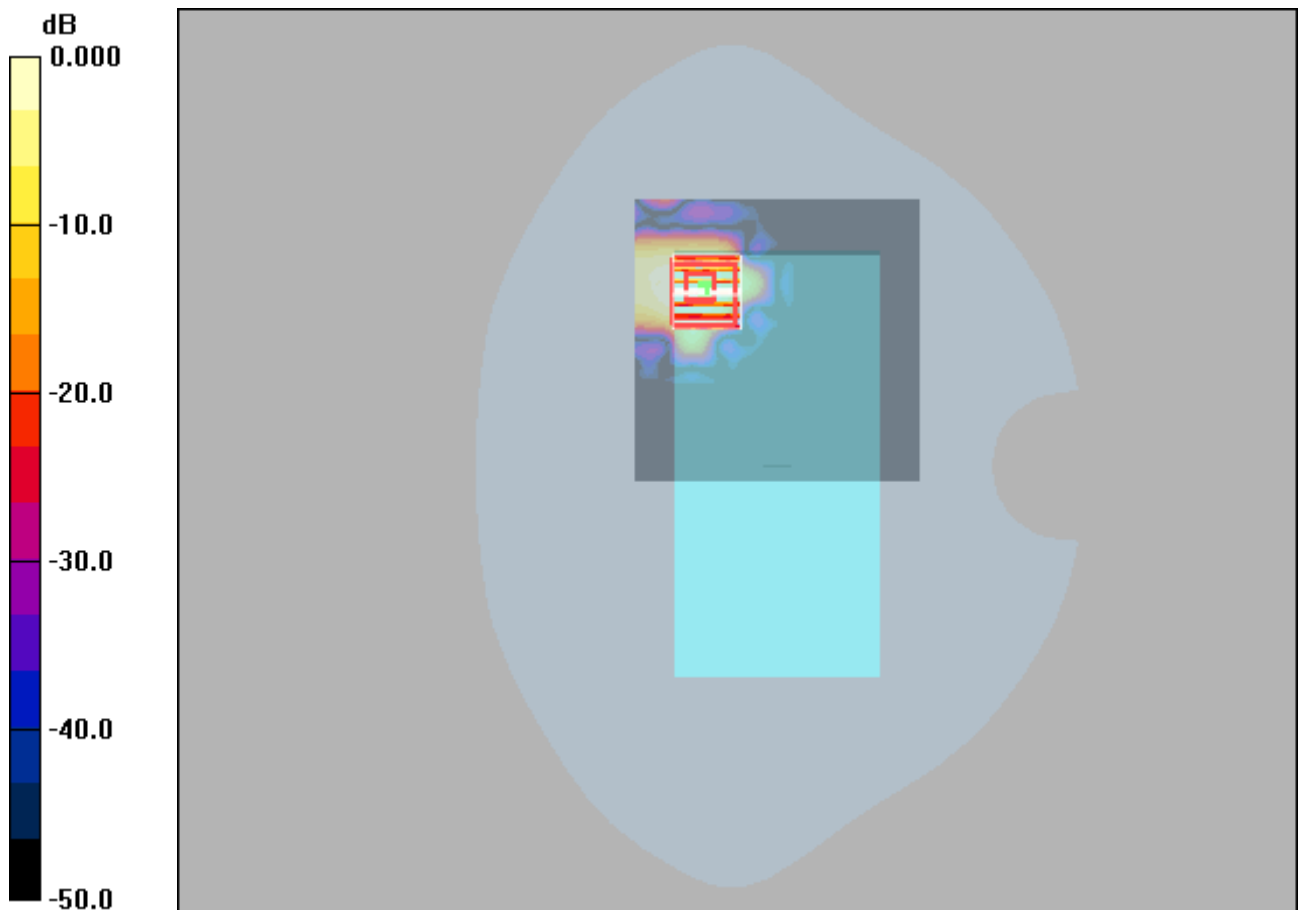

0 dB = 0.294mW/g

GSM850_GPRS10_Left Side_10MM_190

DUT: EUT

Communication System: GPRS 850-2slots; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: H835 Medium parameters used: $f = 837$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.12, 6.12, 6.12); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.622 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.2 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.780 W/kg

SAR(1 g) = 0.547 mW/g; SAR(10 g) = 0.373 mW/g

Maximum value of SAR (measured) = 0.632 mW/g

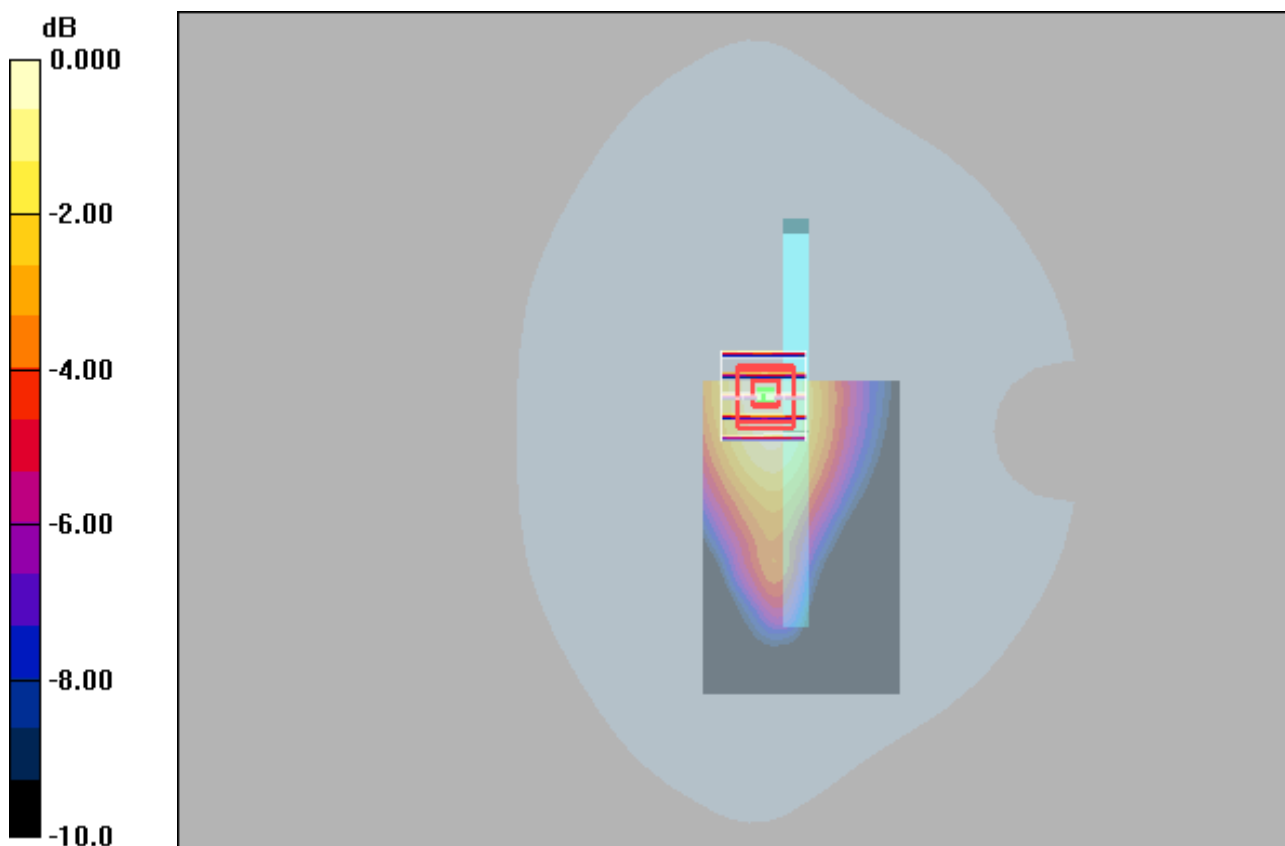

0 dB = 0.632mW/g

LTE 12_QPSK10M_1_25_Left Side_10MM_23095

DUT: EUT

Communication System: LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.85$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.28, 6.28, 6.28); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.292 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.1 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 0.367 W/kg

SAR(1 g) = 0.259 mW/g; SAR(10 g) = 0.181 mW/g

Maximum value of SAR (measured) = 0.296 mW/g

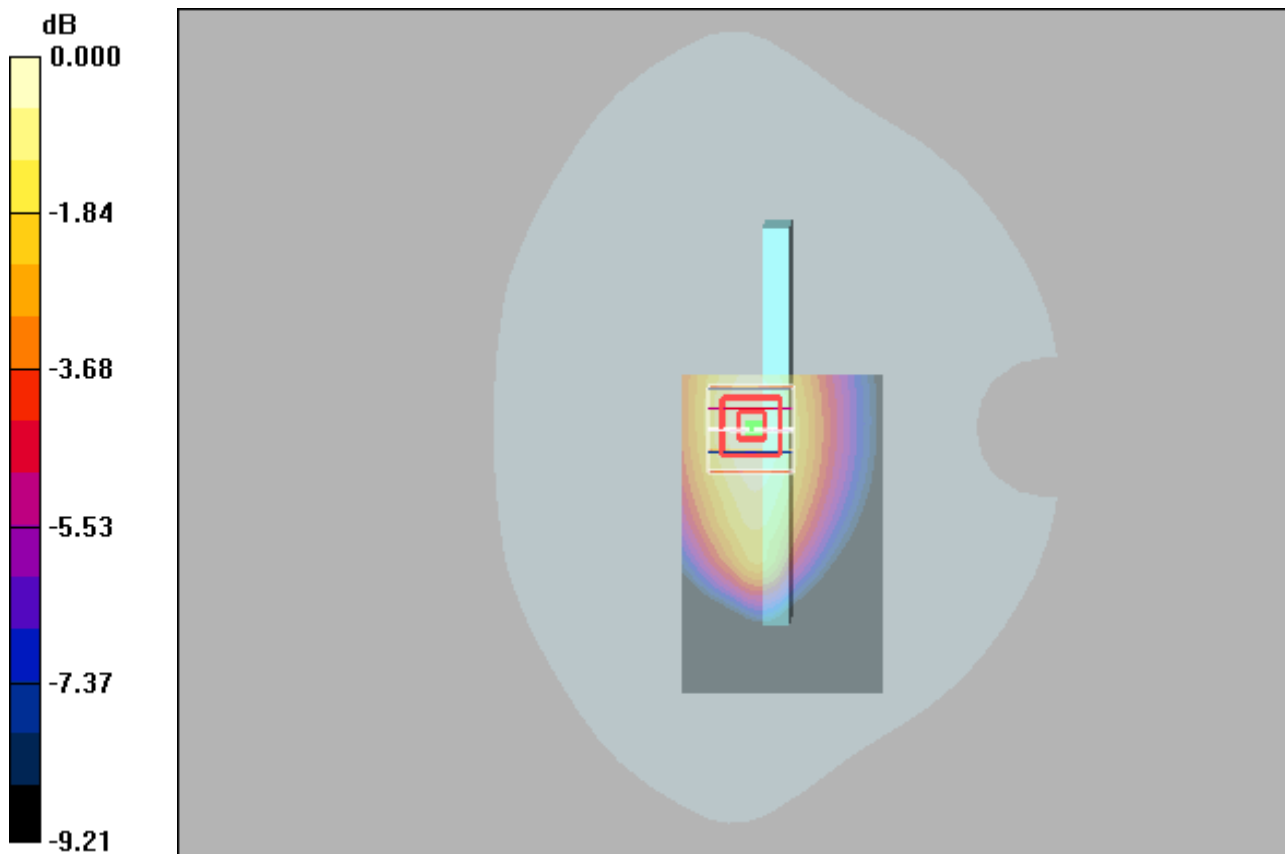

0 dB = 0.296mW/g

LTE 30_QPSK10M_1_25_Front Face_10MM_27710

DUT: EUT

Communication System: LTE 30; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: H2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.68$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.82, 4.82, 4.82); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x91x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.481 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.692 W/kg

SAR(1 g) = 0.370 mW/g; SAR(10 g) = 0.206 mW/g

Maximum value of SAR (measured) = 0.463 mW/g

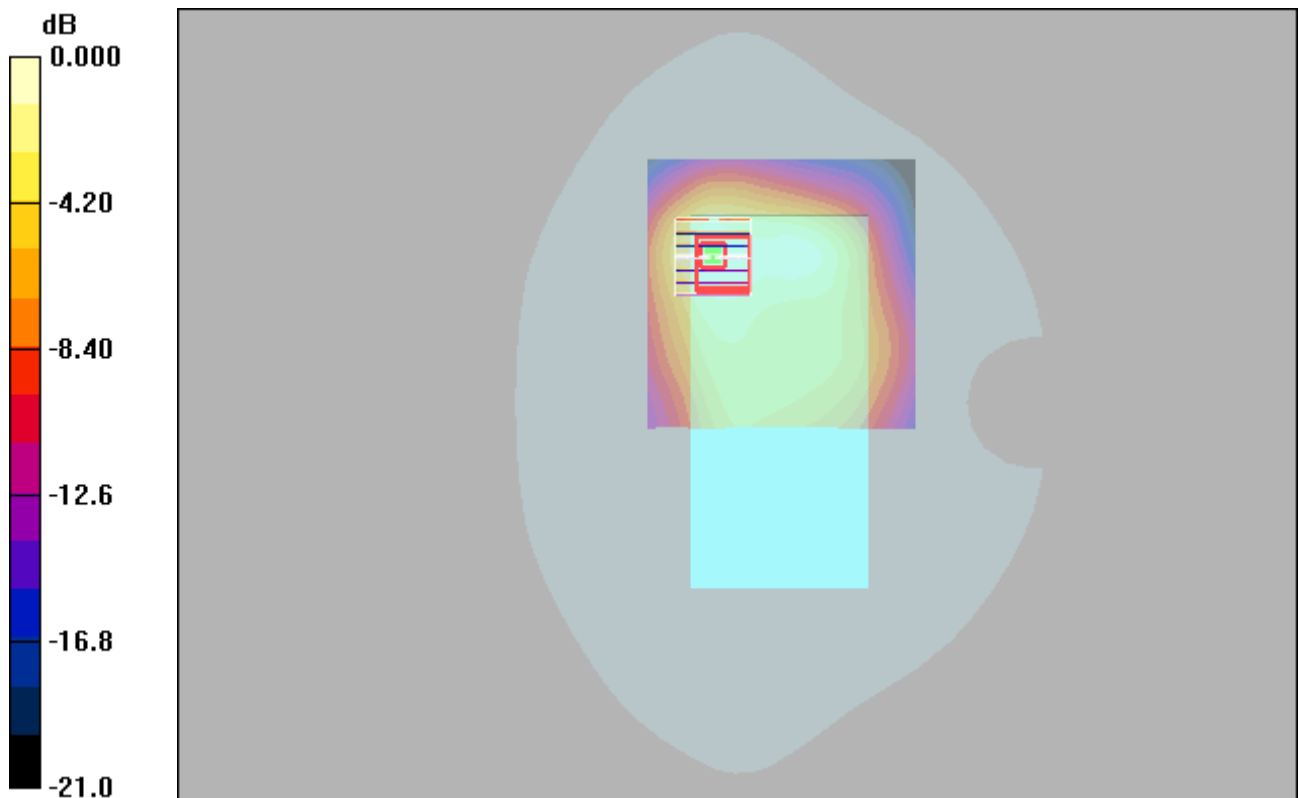

0 dB = 0.463mW/g

EDR_DH5_Top Side_10MM_78

DUT: EUT

Communication System: BT; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 37.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x91x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.071 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.01 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.051 mW/g; SAR(10 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.068 mW/g

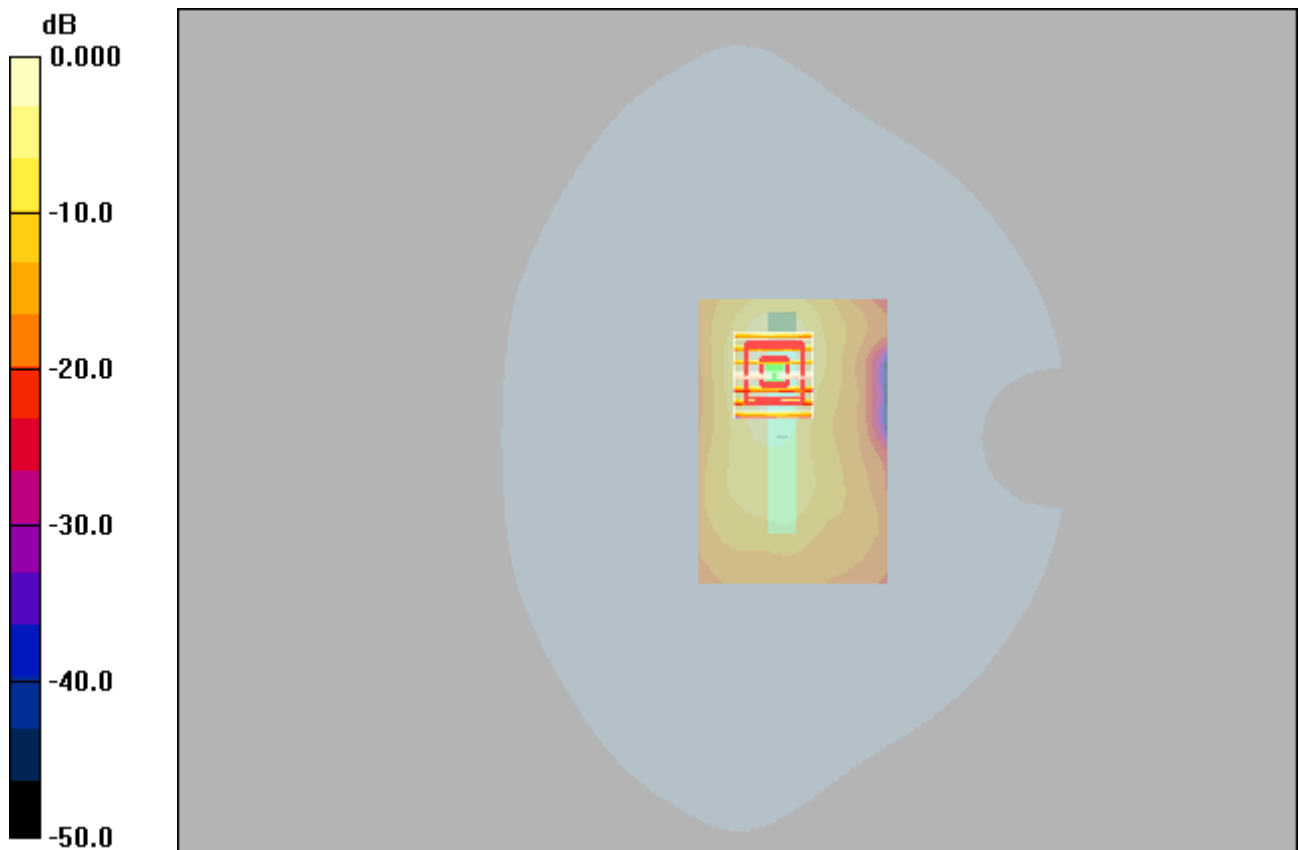

0 dB = 0.068mW/g

WIFI 5G_802.11a_Top Side_10mm_44

DUT: EUT

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5220$ MHz; $\sigma = 4.81$ mho/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.256 mW/g


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.53 V/m; Power Drift = -0.162 dB

Peak SAR (extrapolated) = 0.451 W/kg

SAR(1 g) = 0.123 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.243 mW/g

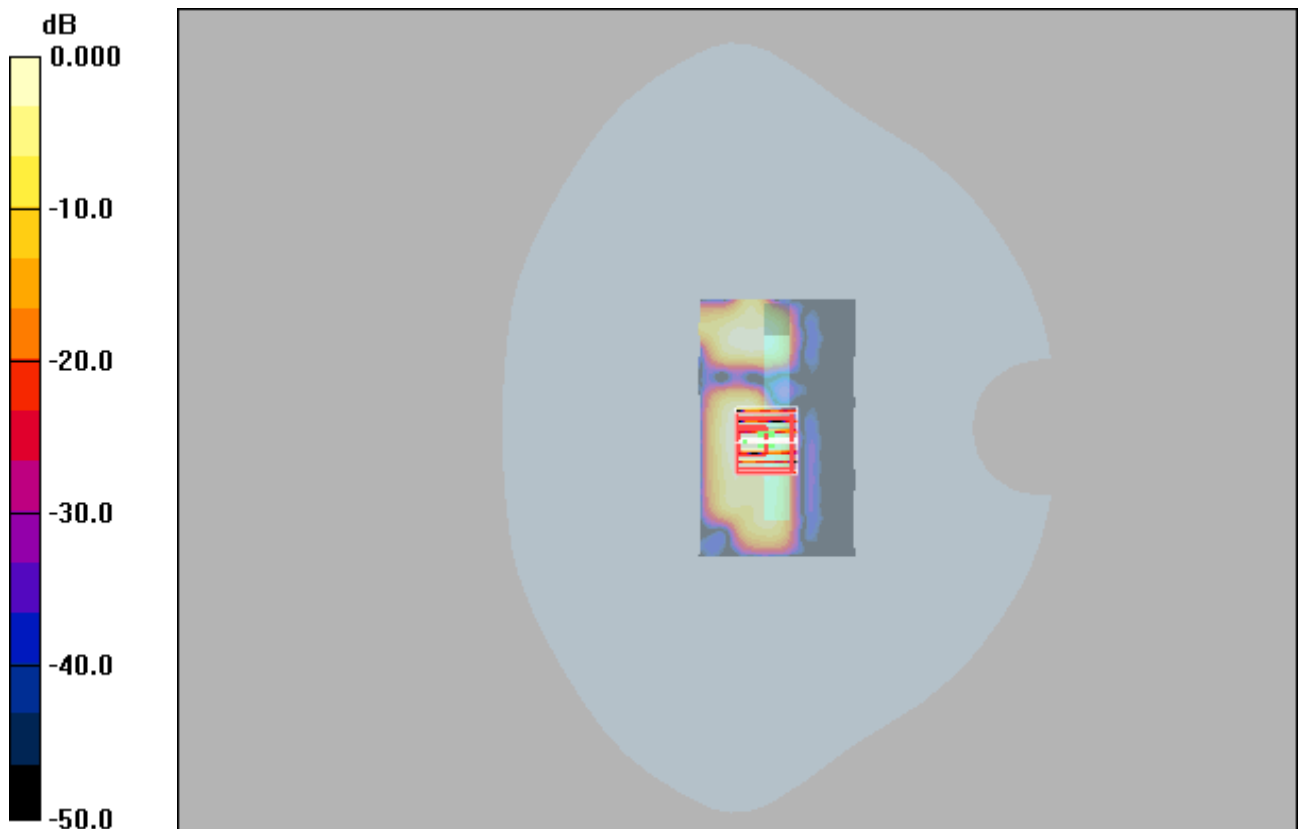

0 dB = 0.243mW/g

WIFI 5G_802.11a_Top Side_10mm_64

DUT: EUT

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5320$ MHz; $\sigma = 4.92$ mho/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.243 mW/g


Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.01 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.086 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.202 mW/g

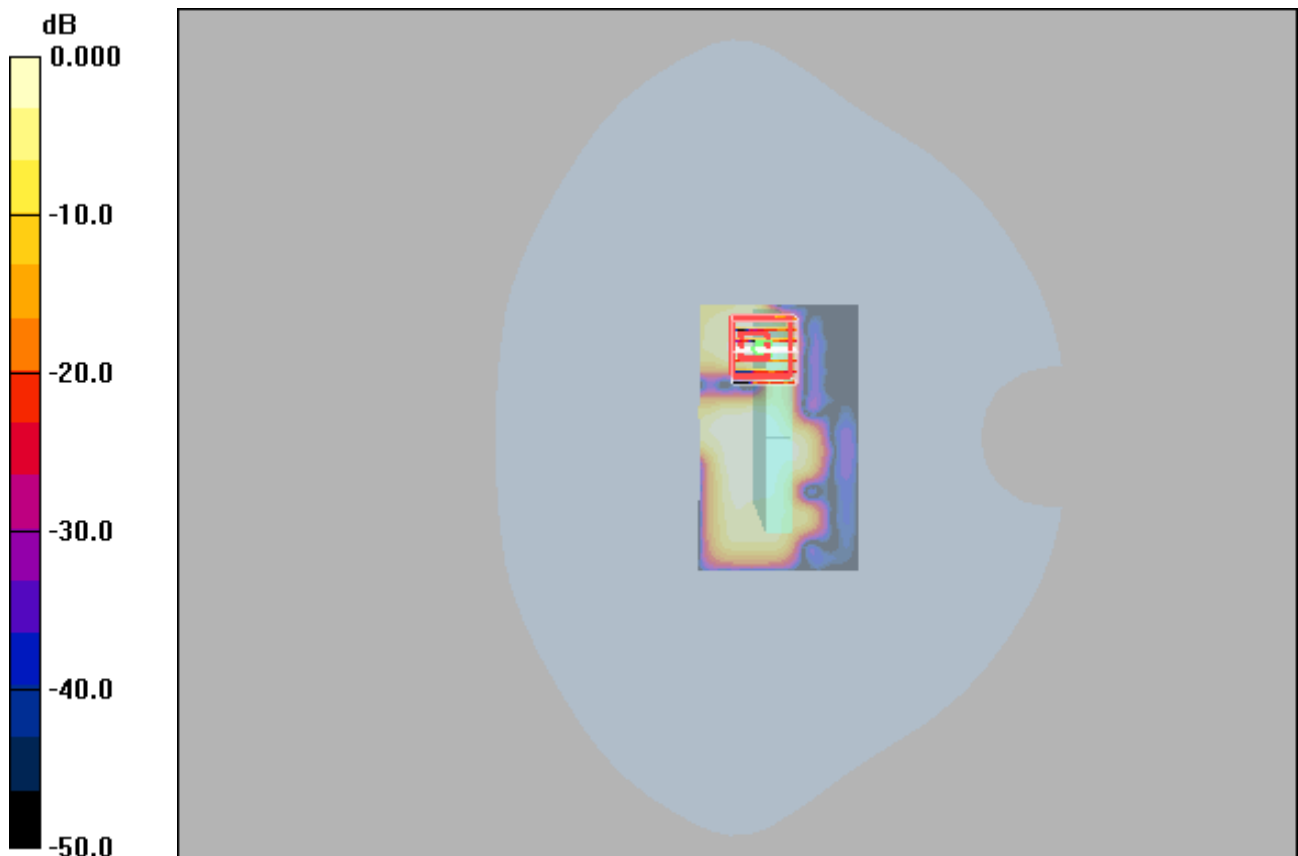

0 dB = 0.202mW/g