


TEST REPORT

Report No.....: CHTEW22070013 Report Verification: 

Project No.....: SHT2206065001EW

FCC ID.....: 2AUPG-Q-668

Applicant's name.....: Shenzhen Crony Electronic Technology Co., Ltd.

Address.....: 2201, Huichao Technology Building, Jinhai Road, Yantian Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong

Test item description.....: Emergency Two Way Radios

Trade Mark.....: QNIGLO

Model/Type reference.....: Q-668

Listed Model(s).....: Q-668 Plus

Standard.....: FCC CFR Title 47 Part 15 Subpart B

Date of receipt of test sample.....: Jun.27, 2022

Date of testing.....: Jun.28, 2022- Jul.01, 2022

Date of issue.....: Jul.04, 2022

Result.....: PASS

Compiled by
(Position-Printed name-Signature): File administrators Fanghui Zhu

Supervised by
(Position-Printed name-Signature): Project Engineer Caspar Chen

Approved by
(position+printed name+signature)...: RF Manager Hans Hu

Fanghui Zhu

Caspar Chen

Hans Hu

Testing Laboratory Name.....: Shenzhen Huatongwei International Inspection Co., Ltd.

Address.....: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely corresponds to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY.....</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
<u>4.</u>	<u>TEST CONFIGURATION.....</u>	<u>7</u>
4.1.	EUT operation mode	7
4.2.	Support unit used in test configuration	7
4.3.	Environmental conditions	7
4.4.	Statement of the measurement uncertainty	7
4.5.	Equipments Used during the Test	8
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>9</u>
5.1.	Conducted Emissions	9
5.2.	Radiated Emissions	12
<u>6.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>18</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>19</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC CFR Title 47 Part 15 Subpart B](#) - Unintentional Radiators

[ANSI C63.4: 2014](#) – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

1.2. Report version

Revision No.	Date of issue	Description
N/A	2022-07-04	Original

2. TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Conducted Emissions	15.107(a)	Pass	Quanhai Deng
Radiated Emissions	15.109(a)	Pass	Hongtao Meng

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	Shenzhen Crony Electronic Technology Co., Ltd.
Address:	2201, Huichao Technology Building, Jinhai Road, Yantian Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong
Manufacturer:	Shenzhen Crony Electronic Technology Co., Ltd.
Address:	2201, Huichao Technology Building, Jinhai Road, Yantian Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong

3.2. Product Description

Main unit	
Name of EUT:	Emergency Two Way Radios
Trade Mark:	QNIGLO
Model/Type reference:	Q-668
Listed Model(s)	Q-668 Plus
Power supply:	DC 3.7V from Rechargeable Li-ion battery
Hardware version:	01V03
Software version:	01V01

3.3. Radio Specification Description

FRS receive frequency Range:	Main channel: (462MHz)	462.5500, 462.5750, 462.6000, 462.6250, 462.6500, 462.6750, 462.7000, 462.7250MHz
	Interstitial channel: (462MHz)	462.5625, 462.5875, 462.6125, 462.6375, 462.6625, 462.6875, 462.7125 MHz
	Interstitial channel: (467MHz)	467.5675, 467.5875, 467.6125, 467.6375, 467.6625, 467.6875, 467.7125MHz
FM receive frequency Range:	88MHz~108MHz	
Weather receive frequency Range:	CH ₁ :163.275MHz, CH ₂ :162.550MHz, CH ₃ :162.400MHz, CH ₄ :162.475MHz, CH ₅ :164.425MHz, CH ₆ :162.450MHz, CH ₇ :162.500MHz, CH ₈ :162.525MHz, CH ₉ :161.650MHz, CH ₁₀ :161.775MHz,	

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Connect information:	Tel: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC	762235

4. TEST CONFIGURATION

4.1. EUT operation mode

Test mode	Describe
Charging mode	Keep the EUT in charging mode, but the EUT shut down.
FRS receive mode	Keep the EUT in receiving mode at 462.6375MHz, but don't charging.
FM receive mode	Keep the EUT in receiving mode at 98MHz, but don't charging.
Weather receive mode	Keep the EUT in receiving mode at 163.275MHz, but don't charging.

Test item	Pretest mode	Worse case mode
Conducted emissions	Charging mode, all receive mode	Charging mode
Radiated emissions	Charging mode, all receive mode	FRS receive mode

Only show the test data for worse case mode on the test report.

4.2. Support unit used in test configuration

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?			
✓ Yes			
Item	Equipment	Trade Name	Model No.
1	AC/DC Adapte	HUAWEI	HW-050200C01
2	Mobile phone	Xiaomi	Mi 11

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

Test	Frequency range	Measurement uncertainty
Radiated Emission	30~1000MHz	4.90 dB
Radiated Emission	1~18GHz	4.96 dB
Conducted Disturbance	0.15~30MHz	3.02 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.5. Equipments Used during the Test

● Conducted Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2021/09/14	2022/09/13
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2021/09/17	2022/09/16
●	Pulse Limiter	R&S	HTWE0193	ESH3-Z2	101447	2021/09/16	2022/09/15
●	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLEX_142	EF-NM-BNCM-2M	2021/09/17	2022/09/16
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated Emission-6th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2022/09/29
●	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2021/09/14	2022/09/13
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2020/04/28	2023/04/27
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2021/11/05	2022/11/04
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2022/02/25	2023/02/24
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX104	501184/4	2022/02/25	2023/02/24
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-7th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2018/09/27	2022/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2021/09/13	2022/09/12
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2022/02/28	2023/02/27
●	RF Connection Cable	HUBER+SUHNER	HTWE0126-01	RE-7-FH	N/A	2022/03/04	2023/03/03
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Conducted Emissions


LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.107:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

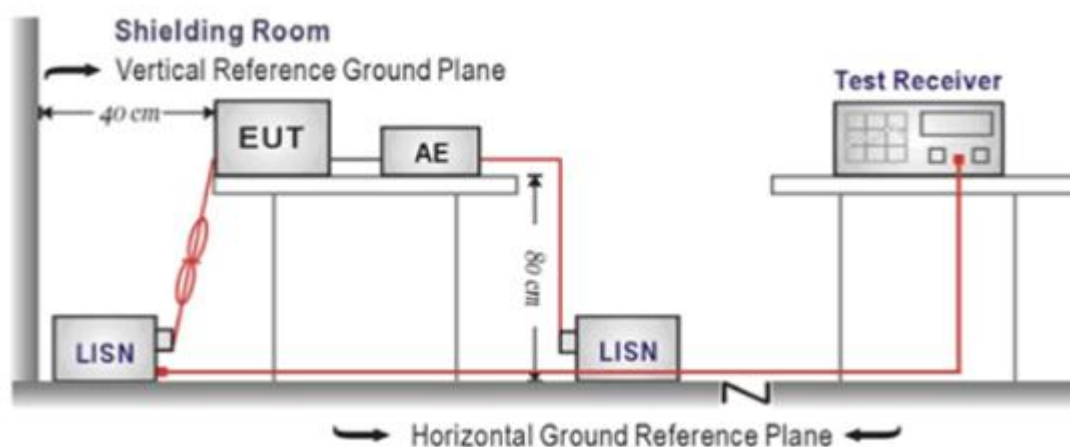

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.4:2014
2. The EUT was placed on a plat form of nominal size, 1 m by 1.5 m, raised 10 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 10 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50ohm / 50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:


Please refer to the clause 4.1

TEST RESULTS

☒ Passed ☐ Not Applicable

Test Line:


L

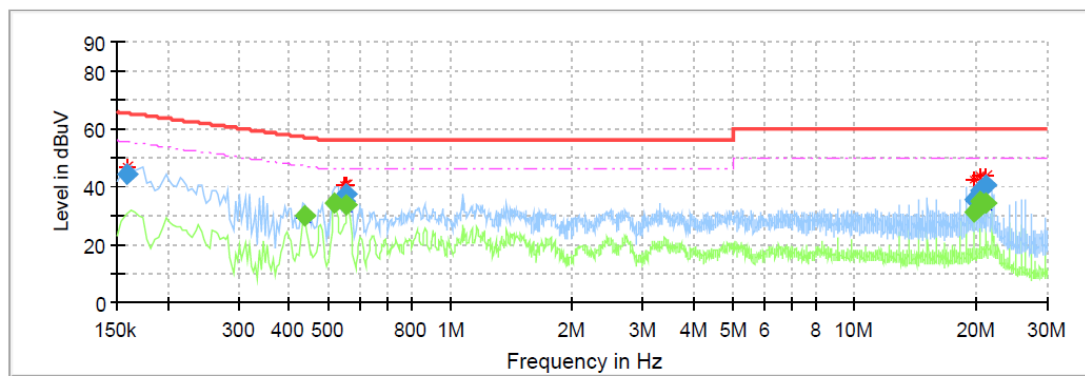

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.159500	44.64	---	65.49	20.85	L1	10.1
0.435500	---	29.84	47.15	17.30	L1	10.1
0.519500	---	34.20	46.00	11.80	L1	10.1
0.548500	34.91	---	56.00	21.09	L1	10.1
0.551500	37.70	---	56.00	18.30	L1	10.1
0.555500	---	33.44	46.00	12.56	L1	10.1
19.735500	---	30.98	50.00	19.02	L1	10.8
19.747500	35.33	---	60.00	24.67	L1	10.8
20.487500	38.63	---	60.00	21.37	L1	10.8
20.495500	---	34.76	50.00	15.24	L1	10.8
21.247500	---	34.54	50.00	15.46	L1	10.8
21.267500	40.47	---	60.00	19.53	L1	10.8

Test Line:

N

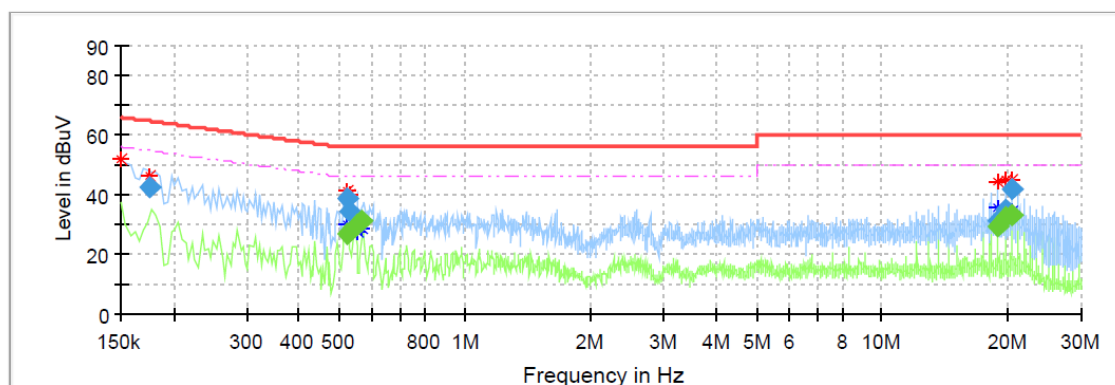

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.175500	42.48	---	64.70	22.22	N	10.1
0.523500	38.72	---	56.00	17.28	N	10.1
0.523500	---	27.01	46.00	18.99	N	10.1
0.527500	34.63	---	56.00	21.37	N	10.1
0.555500	---	30.29	46.00	15.71	N	10.1
0.563500	---	31.15	46.00	14.85	N	10.1
18.955500	---	29.61	50.00	20.39	N	10.7
18.955500	31.06	---	60.00	28.94	N	10.7
19.715500	---	32.65	50.00	17.35	N	10.7
19.735500	34.98	---	60.00	25.02	N	10.7
20.459500	42.04	---	60.00	17.96	N	10.7
20.479500	---	33.22	50.00	16.78	N	10.7

5.2. Radiated Emissions


LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.109


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION

➤ 30MHz ~ 1GHz

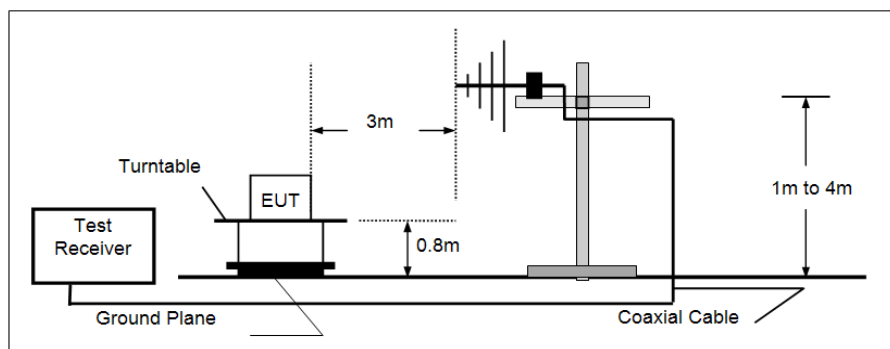

➤ Above 1GHz

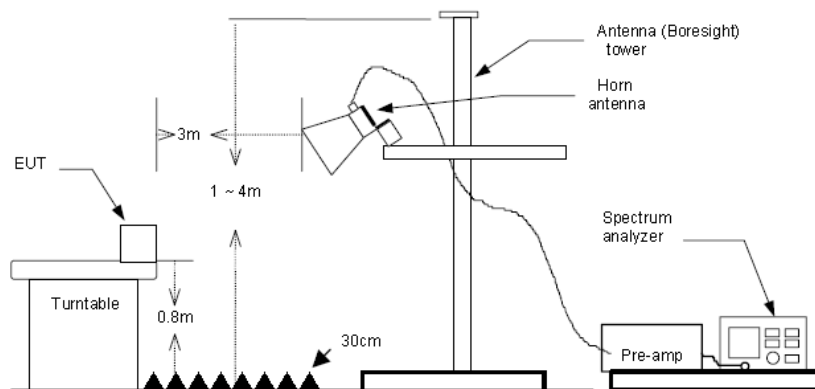

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.4:2014.
2. The EUT is placed on a turn table which is 0.8 meter above ground.
3. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
4. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
5. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1GHz,
RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1GHz to 5th harmonic, RBW=1MHz, VBW=3MHz

TEST MODE:

Please refer to the clause 4.1


TEST RESULTS

☒ **Passed** ☐ **Not Applicable**


Note: Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
The emission levels of frequency above 6GHz are very lower than limit and not show in test report.

Polarization:

Horizontal

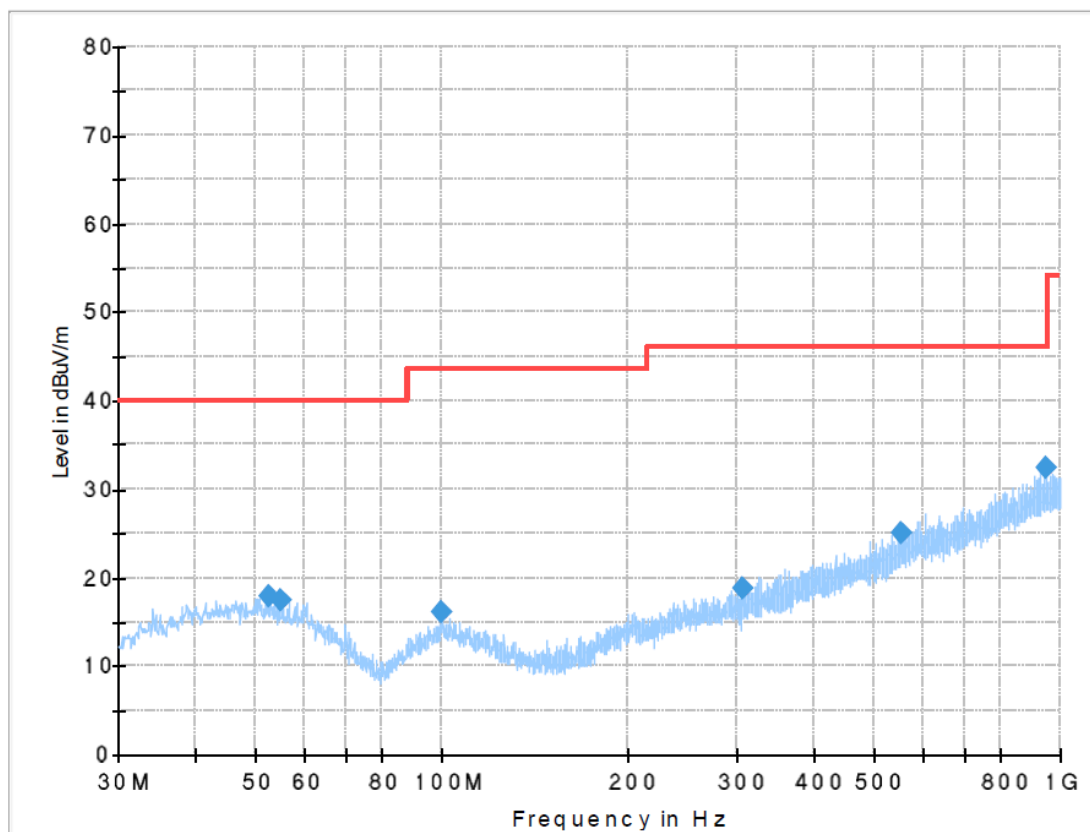


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
52.673750	17.77	40.00	22.23	100.0	H	309.0	-9.4
55.098750	17.32	40.00	22.68	300.0	H	51.0	-9.6
100.082500	16.13	43.50	27.37	100.0	H	172.0	-10.7
306.813750	18.75	46.00	27.25	100.0	H	72.0	-7.2
553.072500	25.09	46.00	20.91	100.0	H	149.0	-0.3
948.590000	32.46	46.00	13.54	300.0	H	211.0	7.2

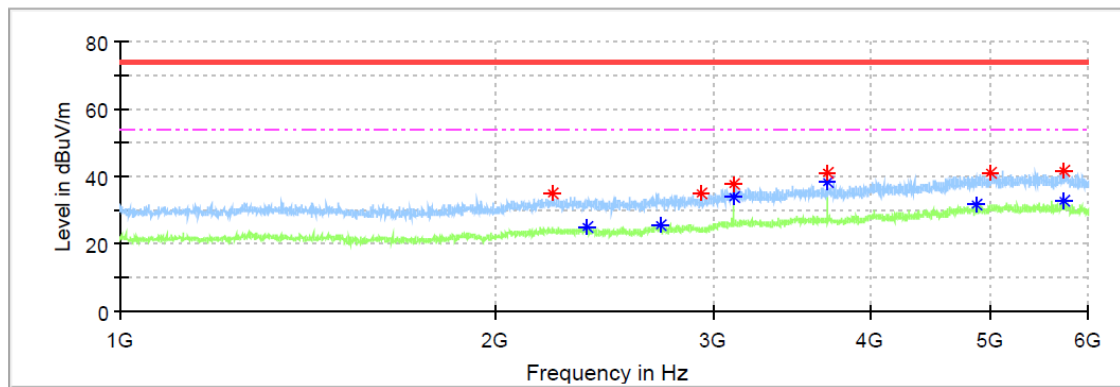


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3699.375000	41.27	---	74.00	32.73	150.0	H	51.0	-1.2
3699.375000	---	38.26	54.00	15.74	150.0	H	51.0	-1.2
2715.000000	---	25.67	54.00	28.33	150.0	H	79.0	-4.1
3112.500000	37.82	---	74.00	36.18	150.0	H	92.0	-3.0
3112.500000	---	33.65	54.00	20.35	150.0	H	92.0	-3.0
4885.000000	---	31.94	54.00	22.06	150.0	H	176.0	5.3
2371.875000	---	24.99	54.00	29.01	150.0	H	190.0	-4.9
2228.750000	35.14	---	74.00	38.86	150.0	H	217.0	-5.0
5733.125000	---	32.76	54.00	21.24	150.0	H	231.0	7.7
2929.375000	34.84	---	74.00	39.16	150.0	H	250.0	-3.8
4999.375000	41.11	---	74.00	32.89	150.0	H	347.0	5.7
5728.750000	41.80	---	74.00	32.20	150.0	H	347.0	7.7

Polarization:

Vertical

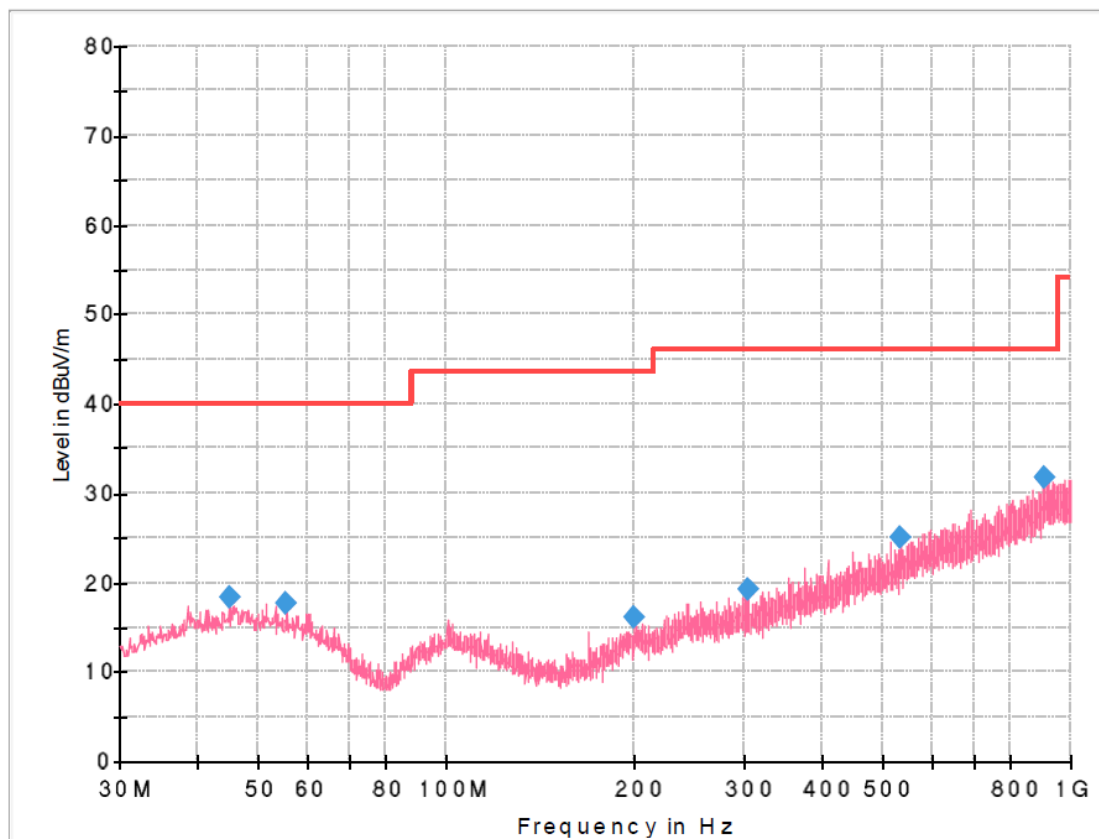

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.913750	18.38	40.00	21.63	100.0	V	39.0	-9.4
55.462500	17.69	40.00	22.31	100.0	V	276.0	-9.6
200.598750	16.12	43.50	27.38	100.0	V	80.0	-10.1
305.480000	19.20	46.00	26.80	100.0	V	214.0	-7.2
535.855000	25.12	46.00	20.88	100.0	V	130.0	-0.9
911.245000	31.73	46.00	14.27	100.0	V	329.0	6.7

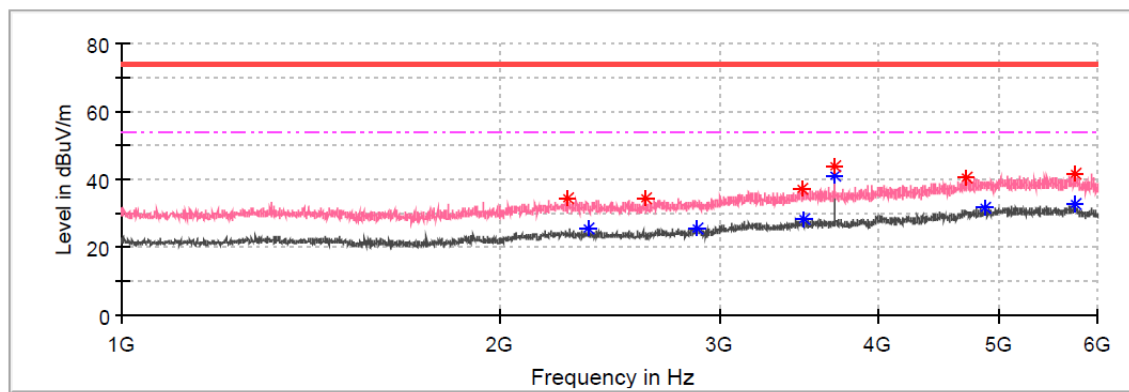

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3503.750000	---	28.26	54.00	25.74	150.0	V	1.0	-1.4
3699.375000	43.76	---	74.00	30.24	150.0	V	31.0	-1.2
3699.375000	---	41.14	54.00	12.86	150.0	V	31.0	-1.2
2870.000000	---	25.71	54.00	28.29	150.0	V	59.0	-3.7
2264.375000	34.43	---	74.00	39.57	150.0	V	87.0	-5.0
4708.125000	40.80	---	74.00	33.20	150.0	V	101.0	4.1
5756.250000	---	32.85	54.00	21.15	150.0	V	142.0	7.8
2614.375000	34.65	---	74.00	39.35	150.0	V	170.0	-4.9
5753.125000	41.52	---	74.00	32.48	150.0	V	198.0	7.8
3480.625000	37.43	---	74.00	36.57	150.0	V	212.0	-1.5
4879.375000	---	31.89	54.00	22.11	150.0	V	240.0	5.3
2351.875000	---	25.35	54.00	28.65	150.0	V	324.0	-4.9

6. TEST SETUP PHOTOS OF THE EUT

Conducted Emissions (AC Mains)



Radiated Emissions (30MHz-1GHz)



Radiated Emissions (Above 1GHz)



7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Refer to the test report No.: CHTEW22070012

-----End of Report-----