



# FCC SAR TEST REPORT

Report No.: STS1910040H01

Issued for

CO-COMM SERVICIOS TELECOMUNICACIONES S.L.

Serrano Galvache 56, Edif. Abedul 4A, Madrid, Spain

<b>Product Name:</b>	3G/2G Fixed Wireless Phone
<b>Brand Name:</b>	CO-COMM
<b>Model Name:</b>	F700
<b>Series Model:</b>	N/A
<b>FCC ID:</b>	2AUR3-F700
<b>Test Standard:</b>	ANSI/IEEE Std. C95.1
	FCC 47 CFR Part 2 ( 2.1093)
	IEEE 1528: 2013
<b>Max. Report SAR (1g):</b>	Body: 1.247 W/kg

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com





### Test Report Certification

**Applicant's name** .....: CO-COMM SERVICIOS TELECOMUNICACIONES S.L.

Address .....: Serrano Galvache 56, Edif. Abedul 4A, Madrid, Spain

**Manufacture's Name** .....: CO-COMM SERVICIOS TELECOMUNICACIONES S.L.

Address .....: Serrano Galvache 56, Edif. Abedul 4A, Madrid, Spain

#### Product description

Product name .....: 3G/2G Fixed Wireless Phone

Brand name .....: CO-COMM

Model name .....: F700

Series Model.....: N/A

**Standards** .....: ANSI/IEEE Std. C95.1-1992  
FCC 47 CFR Part 2 ( 2.1093)  
IEEE 1528: 2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

**Date of Test** .....:

Date (s) of performance of tests .....: 13 Nov. 2019~15 Nov. 2019

Date of Issue.....: 18 Nov. 2019

Test Result.....: **Pass**

Testing Engineer : Aaron Bu.  
( Aaron Bu)

Technical Manager : Jason Lu  
(Jason Lu)

Authorized Signatory : Vita Li  
(Vita Li)





## Table of Contents

<b>1.General Information</b>	<b>5</b>
1.1 EUT Description	5
1.2 Test Environment	6
1.3 Test Factory	6
<b>2.Test Standards And Limits</b>	<b>7</b>
<b>3. SAR Measurement System</b>	<b>8</b>
3.1 Definition Of Specific Absorption Rate (SAR)	8
3.2 SAR System	8
<b>4. Tissue Simulating Liquids</b>	<b>11</b>
4.1 Simulating Liquids Parameter Check	11
<b>5. SAR System Validation</b>	<b>13</b>
5.1 Validation System	13
5.2 Validation Result	13
<b>6. SAR Evaluation Procedures</b>	<b>14</b>
<b>7. EUT Antenna Location Sketch</b>	<b>15</b>
7.1 SAR test exclusion consider table	16
<b>8. EUT Test Position</b>	<b>18</b>
8.1 Body-worn Position Conditions:	18
<b>9. Uncertainty</b>	<b>19</b>
9.1 Measurement Uncertainty	19
9.2 System validation Uncertainty	20
<b>10. Conducted Power Measurement</b>	<b>21</b>
10.1 Test Result	21
10.2 Tune-up Power	24
<b>11. EUT And Test Setup Photo</b>	<b>25</b>
11.1 EUT Photo	25
11.2 Setup Photo	28
<b>12. SAR Result Summary</b>	<b>32</b>
12.1 Body-worn SAR	32
12.2 repeated SAR measurement	34
<b>13. Equipment List</b>	<b>37</b>
<b>Appendix A. System Validation Plots</b>	<b>38</b>
<b>Appendix B. SAR Test Plots</b>	<b>42</b>
<b>Appendix C. Probe Calibration And Dipole Calibration Report</b>	<b>48</b>



### Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	18 Nov. 2019	STS1910040H01	ALL	Initial Issue

Note: **Format version** of the report -V01





### 1.General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

#### 1.1 EUT Description

Product Name	3G/2G Fixed Wireless Phone		
Brand Name	CO-COMM		
Model Name	F700		
Series Model	N/A		
FCC ID	2AUR3-F700		
Model Difference	N/A		
Battery	Rated Voltage: 3.7V; Charge Limit: 4.2V; Capacity: 1050mAh		
Device Category	Portable		
Product stage	Production unit		
RF Exposure Environment	General Population / Uncontrolled		
IMEI	356685100005261		
Hardware Version	F700Dv1.3		
Software Version	F700vMX020.0.0		
Frequency Range	GSM 850:824.2~848.8MHz PCS1900:1850.2~1909.8MHz WCDMA Band II:1852.4~1907.6MHz WCDMA Band V:826.4~846.6MHz Bluetooth:2402~ 2480MHz		
Max. Reported SAR(1g): (Limit:1.6W/kg)	Band	Mode	Body (W/kg)
	PCB	GSM 850	0.612
	PCB	GPRS 850	1.034
	PCB	GSM 1900	0.631
	PCB	GPRS 1900	1.095
	PCB	WCDMA Band II	1.247
	PCB	WCDMA Band V	0.718
1-g Sum SAR	DSS	Bluetooth <sup>Note</sup>	0.167
FCC Equipment Class	PCS Licensed Transmitter Part 15 Spread Spectrum Transmitter (DSS)		
Operating Mode:	GSM: GSM Voice; GPRS Class 12; WCDMA:RMC,HSDPA,HSUPA Release 6; Bluetooth: V4.0 + EDR (GFSK, π/4DQPSK, 8DPSK) ; BLE		
Antenna Specification:	GSM,WCDMA: PIFA Antenna BT: PIFA Antenna		
SIM Card	Only single card		
Hotspot Mode:	Not Support		
DTM Mode:	Not Support		
Note: 1. Bluetooth SAR was estimated 2. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power			



## 1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

## 1.3 Test Factory

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration No.: 625569

IC Registration No.: 12108A

A2LA Certificate No.: 4338.01





## 2. Test Standards And Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
8	FCC KDB 616217 D04 v01r02	SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers

### (A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

### (B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

**Population/Uncontrolled Environments:** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Occupational/Controlled Environments:** are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

<p><b>NOTE</b></p> <p><b>GENERAL POPULATION/UNCONTROLLED EXPOSURE</b></p> <p><b>PARTIAL BODY LIMIT</b></p> <p><b>1.6 W/kg</b></p>
---

### 3. SAR Measurement System

#### 3.1 Definition Of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,  
ρ is the mass density of the tissue and E is the RMS electrical field strength.

#### 3.2 SAR System

MVG SAR System Diagram:

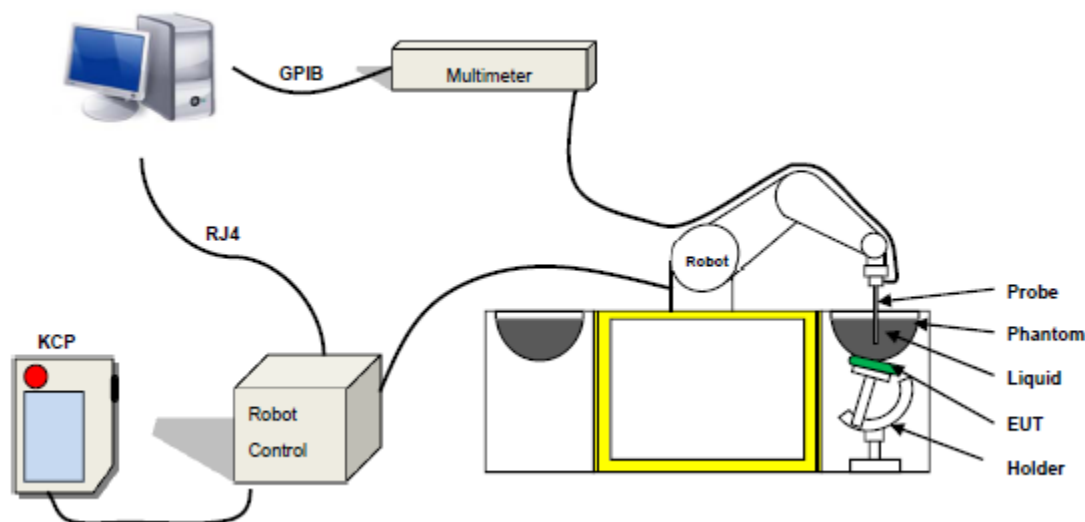

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue



The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The Open SAR software computes the results to give a SAR value in a 1g or 10g mass.

### 3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 14/16 EP309 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter: 5 mm
- Length of Individual Dipoles: 4.5 mm
- Maximum external diameter: 8 mm
- Distance between dipole/probe extremity : 8 mm (repeatability better than +/- 2.7mm)
- Probe linearity:  $0 \pm 2.27\%$  ( $\pm 0.10\text{dB}$ )
- Axial Isotropy:  $< 0.10\text{ dB}$
- Spherical Isotropy:  $< 0.10\text{ dB}$
- Calibration range: 400 MHz to 3 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than  $30^\circ$



Figure 1-MVG COMOSAR Dosimetric E field Dipole

### 3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

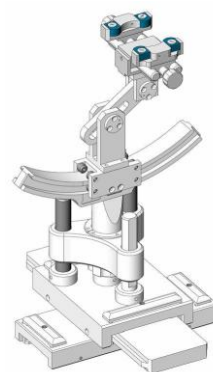


Figure-SN 32/14 SAM115



Figure-SN 32/14 SAM116

### 3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of  $\pm 0.5$  mm would produce a SAR uncertainty of  $\pm 20$  %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



## 4. Tissue Simulating Liquids

### 4.1 Simulating Liquids Parameter Check

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

#### Head Tissue

Frequency (MHz)	cellulose	DGBE	HEC	NaCl	Preventol	Sugar	X100	Water	Conductivity	Permittivity
	%	%	%	%	%	%	%	%	$\sigma$	$\epsilon_r$
750	0.2	/	/	1.4	0.2	57.0	/	41.1	0.89	41.9
835	0.2	/	/	1.4	0.2	57.9	/	40.3	0.90	41.5
900	0.2	/	/	1.4	0.2	57.9	/	40.3	0.97	41.5
1800	/	44.5	/	0.3	/	/	30.45	55.2	1.4	40.0
1900	/	44.5	/	0.3	/	/	30.45	55.2	1.4	40.0
2000	/	44.5	/	0.3	/	/	/	55.2	1.4	40.0
2450	/	44.9	/	0.1	/	/	/	55.0	1.80	39.2
2600	/	45.0	/	0.1	/	/	/	54.9	1.96	39.0

#### Body Tissue

Frequency (MHz)	cellulose	DGBE	HEC	NaCl	Preventol	Sugar	X100	Water	Conductivity	Permittivity
	%	%	%	%	%	%	%	%	$\sigma$	$\epsilon_r$
750	0.2	/	/	0.9	0.1	47.2	/	51.7	0.96	55.5
835	0.2	/	/	0.9	0.1	48.2	/	50.8	0.97	55.2
900	0.2	/	/	0.9	0.1	48.2	/	50.8	1.05	55.0
1800	/	29.4	/	0.4	/	/	30.45	70.2	1.52	53.3
1900	/	29.4	/	0.4	/	/	30.45	70.2	1.52	53.3
2000	/	29.4	/	0.4	/	/	/	70.2	1.52	53.3
2450	/	31.3	/	0.1	/	/	/	68.6	1.95	52.7
2600	/	31.7	/	0.1	/	/	/	68.2	2.16	52.3

Tissue dielectric parameters for head and body phantoms

Frequency	$\epsilon_r$		$\sigma$ S/m	
	Head	Body	Head	Body
	300	45.3	58.2	0.87
450	43.5	56.7	0.87	0.94
900	41.5	55.0	0.97	1.05
1450	40.5	54.0	1.20	1.30
1800	40.0	53.3	1.40	1.52
2450	39.2	52.7	1.80	1.95
3000	38.5	52.0	2.40	2.73
5800	35.3	48.2	5.27	6.00

**LIQUID MEASUREMENT RESULTS**

Date	Ambient condition		Body Simulating Liquid		Parameters	Target	Measured	Deviation [%]	Limited [%]
	Temp. [°C]	Humidity [%]	Frequency	Temp. [°C]					
2019-11-13	23.1	43	835 MHz	22.9	Permittivity:	55.20	56.49	2.34	± 5
					Conductivity	0.97	0.95	-2.06	± 5
2019-11-15	23.2	42	1900 MHz	22.9	Permittivity:	53.30	52.96	-0.64	± 5
					Conductivity	1.52	1.54	1.32	± 5




## 5. SAR System Validation

### 5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

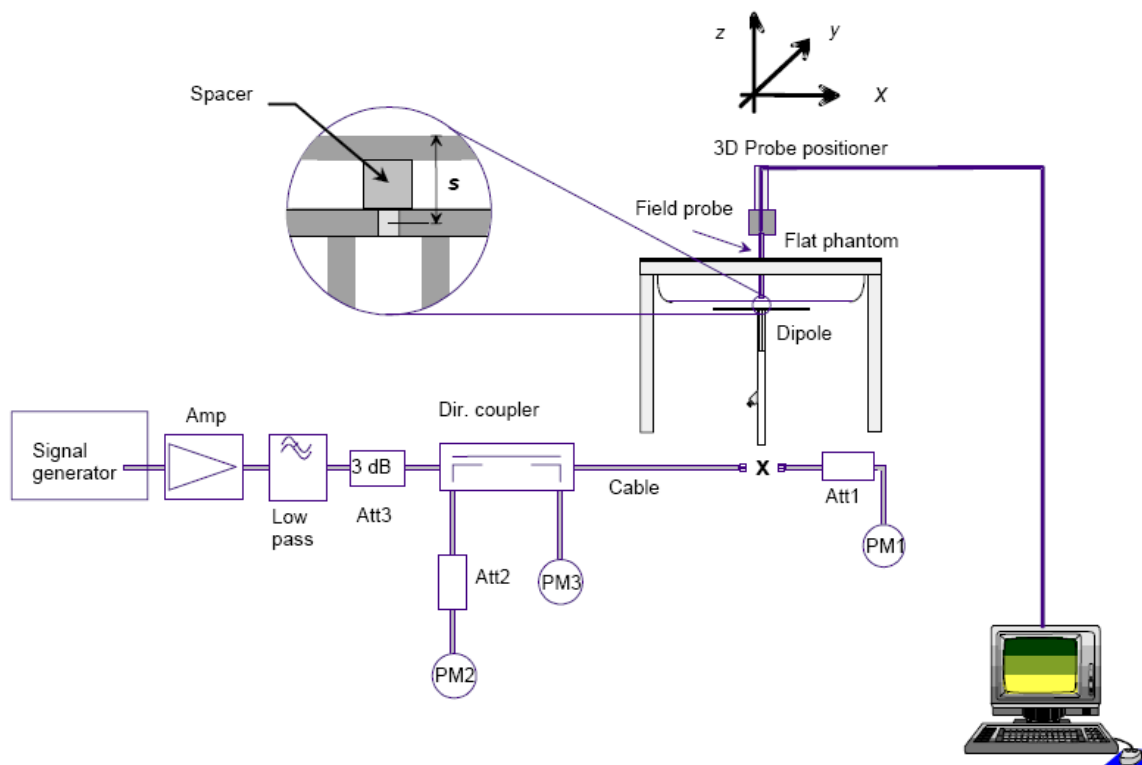

### 5.2 Validation Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %.

Freq.(MHz)	Power(mW)	Tested Value (W/Kg)	Normalized SAR (W/kg)	Target(W/Kg)	Tolerance(%)	Date
835 Body	100	0.947	9.47	9.56	-0.94	2019-11-13
1900 Body	100	4.155	41.55	39.7	4.66	2019-11-15

Note:

1. The tolerance limit of System validation  $\pm 10\%$ .
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



## 6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8\*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.


Area Scan & Zoom Scan:

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR -distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r01 quoted below.


When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

## 7. EUT Antenna Location Sketch

It is a 3G/2G Fixed Wireless Phone

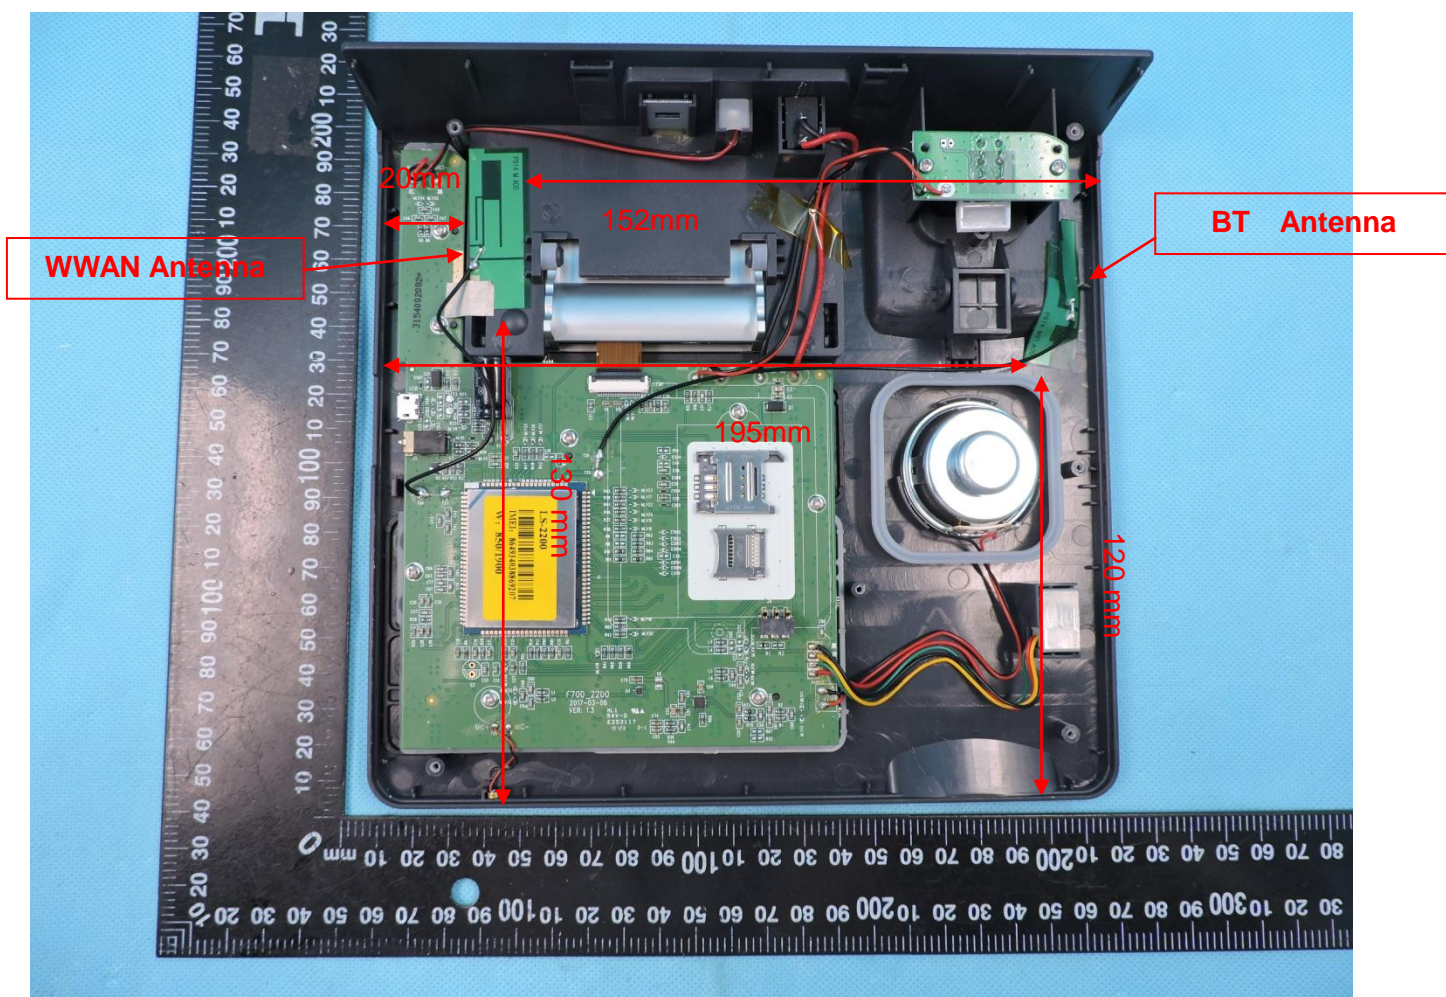

Note 1: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.

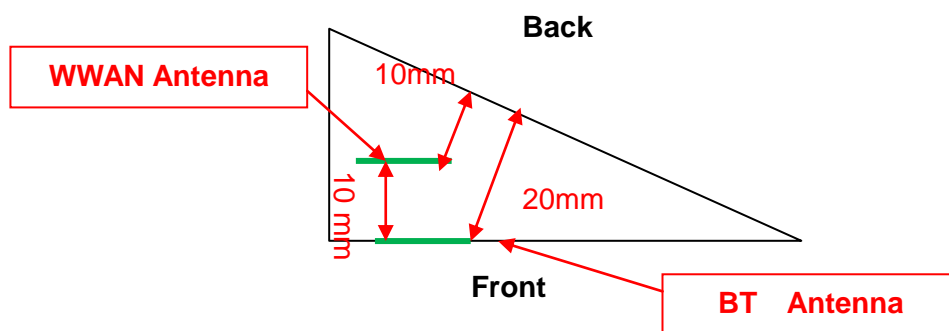

Band	Test position configurations					
	Front	Back	Right edge	Left edge	Top edge	Bottom edge
BT	0mm	20mm	195mm	0mm	10mm	120mm
WWAN	10 mm	10 mm	20 mm	152 mm	10mm	130 mm



### 7.1 SAR test exclusion consider table

According with FCC KDB 447498 D01, appendix A, <SAR test exclusion thresholds for 100MHz ~6GHz and ≤50mm> table, this device SAR test configurations consider as following:

Band	Mode	Max. Peak Power							
		dBm	mW	Front Side	Back Side	Left Edge	Right Edge	Top Edge	Bottom Edge
GSM 850	Distance to User			10mm	10mm	152mm	20mm	10m	130m
	exclusion threshold			33	33	721	66	33	609
	QPSK	33.61	2296	Yes	Yes	Yes	Yes	Yes	Yes
GSM 1900	Distance to User			10mm	10mm	152mm	20mm	10m	130m
	exclusion threshold			22	22	1109	44	22	909
	QPSK	26.99	500	Yes	Yes	No	Yes	Yes	No
GPRS 850	Distance to User			10mm	10mm	152mm	20mm	10m	130m
	exclusion threshold			33	33	721	66	33	609
	QPSK	32.27	1585	Yes	Yes	Yes	Yes	Yes	Yes
GPRS 1900	Distance to User			10mm	10mm	152mm	20mm	10m	130m
	exclusion threshold			22	22	1109	44	22	909
	QPSK	26.80	479	Yes	Yes	No	No	No	Yes
WCDMA Band II	Distance to User			10mm	10mm	152mm	20mm	10m	130m
	exclusion threshold			22	22	1109	44	22	909
	QPSK	22.68	185	Yes	Yes	No	Yes	Yes	No
WCDMA Band IV	Distance to User			10mm	10mm	152mm	20mm	10m	130m
	exclusion threshold			33	33	721	66	33	609
	QPSK	23.06	202	Yes	Yes	No	Yes	Yes	No
Bluetooth	Distance to User			<5mm	20mm	<5mm	10 mm	10mm	120mm
	exclusion threshold			10	38	10	19	19	796
	QPSK	5.93	4	No	No	No	No	No	No



**Note:**


1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. per KDB 447498 D01, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <25mm, 25mm is user to determine SAR exclusion threshold
4. per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance  $\leq 50\text{mm}$  are determined by:  
$$\left[ \frac{\text{max.power of channel, including tune-up tolerance, Mw}}{\text{min. test separation distance, mm}} \right] \cdot \sqrt{f(\text{GHz})} \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 $f(\text{GHz})$  is the RF channel transmit frequency in GHz. Power and distance are rounded to the nearest mW and mm before calculation. The result is rounded to one decimal place for comparison  
For <50mm distance, we just calculate mW of the exclusion threshold value(3.0) to do compare
5. per KDB 447498 D01, at 100 MHz to 6GHz and for test separation distances >50mm, the SAR test exclusion threshold is determined according to the following
  - a) [threshold at 50mm in step 1] + (test separation distance - 50mm) \* (f (MHz)/150) mW, at 100 MHz to 1500 MHz
  - b) [threshold at 50mm in step 1] + (test separation distance - 50mm) \* 10 mW at > 1500MHz and  $\leq 6\text{GHz}$
6. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8. for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode, thus the SAR can be excluded.
7. Per KDB 616217 D04, SAR evaluation for the front surface of tablet display screens are generally not necessary.

## 8. EUT Test Position

This EUT was tested in Front Face and Rear Face.

### 8.1 Body-worn Position Conditions:

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported SAR* for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest *reported SAR* configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

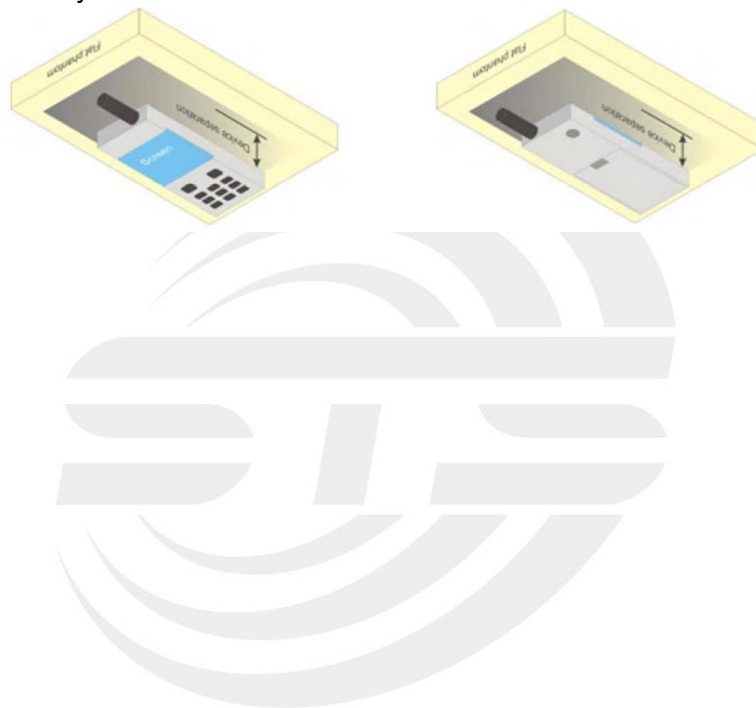



## 9. Uncertainty

### 9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
<b>Measurement System</b>								
Probe calibration	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	0.695	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.28	0.28	∞
Hemispherical Isotropy	1.045	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.43	0.43	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Readout Electronics	0.021	N	1	1	1	0.021	0.021	∞
Response Time	0	R	$\sqrt{3}$	1	1	0	0	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient conditions-Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
<b>Test sample Related</b>								
Test sample positioning	2.6	N	1	1	1	2.6	2.6	∞
Device holder uncertainty	3	N	1	1	1	3	3	∞
SAR drift measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
<b>Phantom and tissue parameters</b>								
Phantom uncertainty (shape and thickness uncertainty)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				9.79	9.59	
Expanded Uncertainty (95% Confidence interval)		K=2				19.58	19.18	



### 9.2 System validation Uncertainty

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
<b>Measurement System</b>								
Probe calibration	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	0.695	R	$\sqrt{3}$	1	1	0.40	0.40	∞
Hemispherical Isotropy	1.045	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	0.021	N	1	1	1	0.021	0.021	∞
Response Time	0.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-Processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
<b>System validation source</b>								
Deviation of experimental dipole from numerical dipole	5.0	N	1	1	1	5.00	5.00	∞
Input power and SAR drift measurement	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Other source contribution Uncertainty	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
<b>Phantom and set-up</b>								
Phantom uncertainty (shape and thickness uncertainty)	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				9.718	9.517	
Expanded Uncertainty (95% Confidence interval)		K=2				19.44	19.04	



## 10. Conducted Power Measurement

### 10.1 Test Result

Burst Average Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	33.61	33.61	33.53	26.86	26.99	26.91
GPRS (GMSK, 1-Slot)	33.60	33.58	33.50	26.96	26.97	26.93
GPRS (GMSK, 2-Slot)	33.11	33.15	33.04	26.52	26.54	26.45
GPRS (GMSK, 3-Slot)	32.67	32.73	32.57	26.08	26.08	26.03
GPRS (GMSK, 4-Slot)	32.26	32.27	32.11	25.66	25.67	25.57
EGPRS(8PSK, 1-Slot)	-	-	-	-	-	-
EGPRS(8PSK, 2-Slot)	-	-	-	-	-	-
EGPRS(8PSK, 3-Slot)	-	-	-	-	-	-
EGPRS(8PSK, 4-Slot)	-	-	-	-	-	-

Remark: GPRS, CS4 coding scheme. EGPRS, MCS5 coding scheme.  
 Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link  
 Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link  
 Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link

Fram- Average Power(dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	24.58	24.58	24.50	17.83	17.96	17.88
GPRS (GMSK, 1-Slot)	24.57	24.55	24.47	17.93	17.94	17.90
GPRS (GMSK, 2-Slot)	27.09	27.13	27.02	20.50	20.52	20.43
GPRS (GMSK, 3-Slot)	28.41	28.47	28.31	21.82	21.82	21.77
GPRS (GMSK, 4-Slot)	29.25	29.26	29.10	22.65	22.66	22.56
EGPRS(8PSK, 1-Slot)	-	-	-	-	-	-
EGPRS(8PSK, 2-Slot)	-	-	-	-	-	-
EGPRS(8PSK, 3-Slot)	-	-	-	-	-	-
EGPRS(8PSK, 4-Slot)	-	-	-	-	-	-

Remark :

- SAR testing was performed on the maximum frame-averaged power mode.
- The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:  
 Frame-averaged power = Burst averaged power (1 TX Slot) – 9.03 dB  
 Frame-averaged power = Burst averaged power (2 TX Slots) – 6.02 dB  
 Frame-averaged power = Burst averaged power (3 TX Slots) - 4.26 dB  
 Frame-averaged power = Burst averaged power (4 TX Slots) – 3.01 dB



WCDMA

Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538
Frequency (MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6
AMR 12.2Kbps	22.38	22.62	22.22	22.58	22.87	23.01
RMC 12.2Kbps	22.43	22.68	22.25	22.63	22.93	23.06
HSDPA Subtest-1	21.29	21.33	21.07	20.45	20.82	20.48
HSDPA Subtest-2	20.80	20.92	20.64	19.99	20.33	20.00
HSDPA Subtest-3	20.44	20.52	20.32	19.58	19.89	19.63
HSDPA Subtest-4	20.04	20.15	19.94	19.23	19.50	19.21
HSUPA Subtest-1	21.39	21.45	21.03	20.51	20.82	20.58
HSUPA Subtest-2	20.43	20.53	20.13	19.64	19.87	19.63
HSUPA Subtest-3	20.43	20.04	19.82	19.52	19.45	19.23
HSUPA Subtest-4	20.08	19.73	19.36	19.05	18.96	18.85
HSUPA Subtest-5	18.61	18.26	17.95	17.62	17.47	17.41

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	MAX(CM-1,0)
Note: CM=1 for $\beta c/\beta d=12/15$ , $\beta hs/\beta c=24/15$ .For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX\_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

**Bluetooth**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
GFSK(1Mbps)	0	2402	4.43
	39	2441	5.52
	78	2480	5.93
$\pi/4$ -DQPSK(2Mbps)	0	2402	2.17
	39	2441	3.20
	78	2480	3.48
8DPSK(3Mbps)	0	2402	2.16
	39	2441	3.19
	78	2480	3.53

**BLE**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
GFSK(1Mbps)	0	2402	-4.22
	19	2440	-3.37
	39	2480	-3.09



## 10.2 Tune-up Power

Mode	GSM850(AVG)	GSM1900(AVG)
GSM/PCS	33±1dBm	26±1dBm
GPRS (1 Slot)	33±1dBm	26±1dBm
GPRS (2 Slot)	33±1dBm	26±1dBm
GPRS (3 Slot)	32±1dBm	26±1dBm
GPRS (4 Slot)	32±1dBm	25±1dBm

Mode	WCDMA Band V(AVG)	WCDMA Band II(AVG)
AMR	22±1dBm	22.1±1dBm
RMC	22±1dBm	22.1±1dBm
HSDPA Subtest-1	21±1dBm	20±1dBm
HSDPA Subtest-2	20±1dBm	20±1dBm
HSDPA Subtest-3	20±1dBm	19±1dBm
HSDPA Subtest-4	20±1dBm	19±1dBm
HSUPA Subtest-1	21±1dBm	20±1dBm
HSUPA Subtest-2	20±1dBm	19±1dBm
HSUPA Subtest-3	20±1dBm	19±1dBm
HSUPA Subtest-4	20±1dBm	19±1dBm
HSUPA Subtest-5	18±1dBm	17±1dBm

Mode	BT(AVG)
GFSK	5±1dBm
$\pi/4$ -DQPSK	3±1dBm
8DPSK	3±1dBm


Mode	BLE(AVG)
GFSK	-4±1dBm



## 11. EUT And Test Setup Photo

### 11.1 EUT Photo

Front side

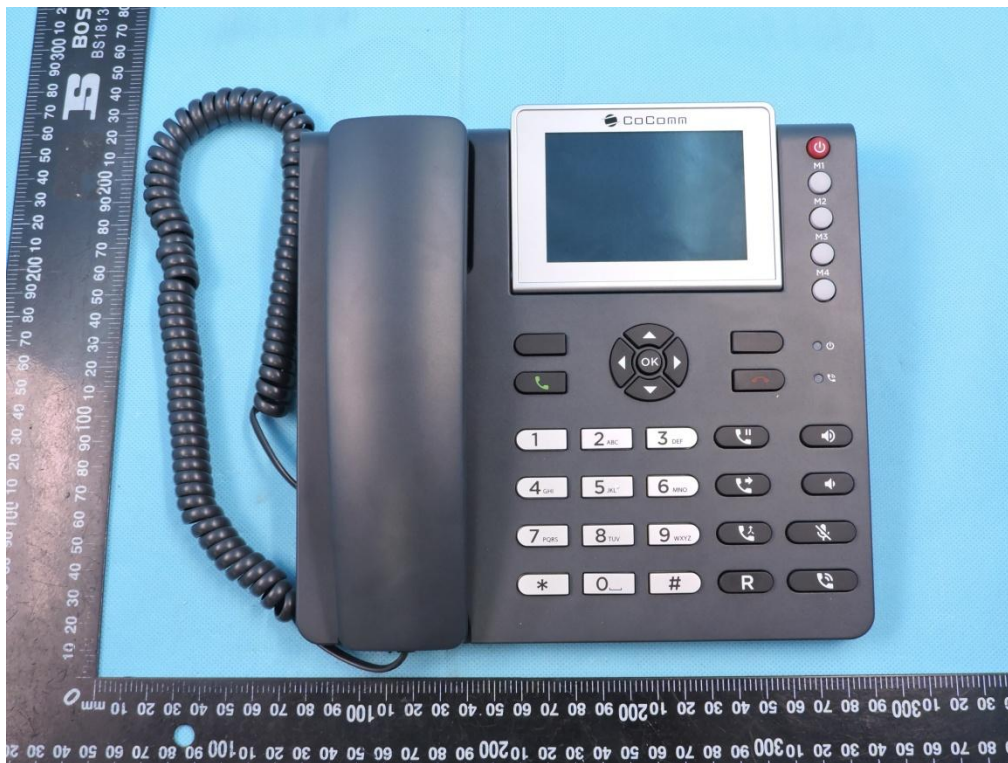

Back side



Top Edge



Bottom Edge



Left Edge



Right Edge



## 11.2 Setup Photo

Body Front side(separation distance is 0mm)



Body Back side(separation distance is 0mm)



Left Edge(separation distance is 0mm)



Right Edge(separation distance is 0mm)




Top Edge(separation distance is 0mm)



Bottom Edge(separation distance is 0mm)



Liquid depth (15 cm)

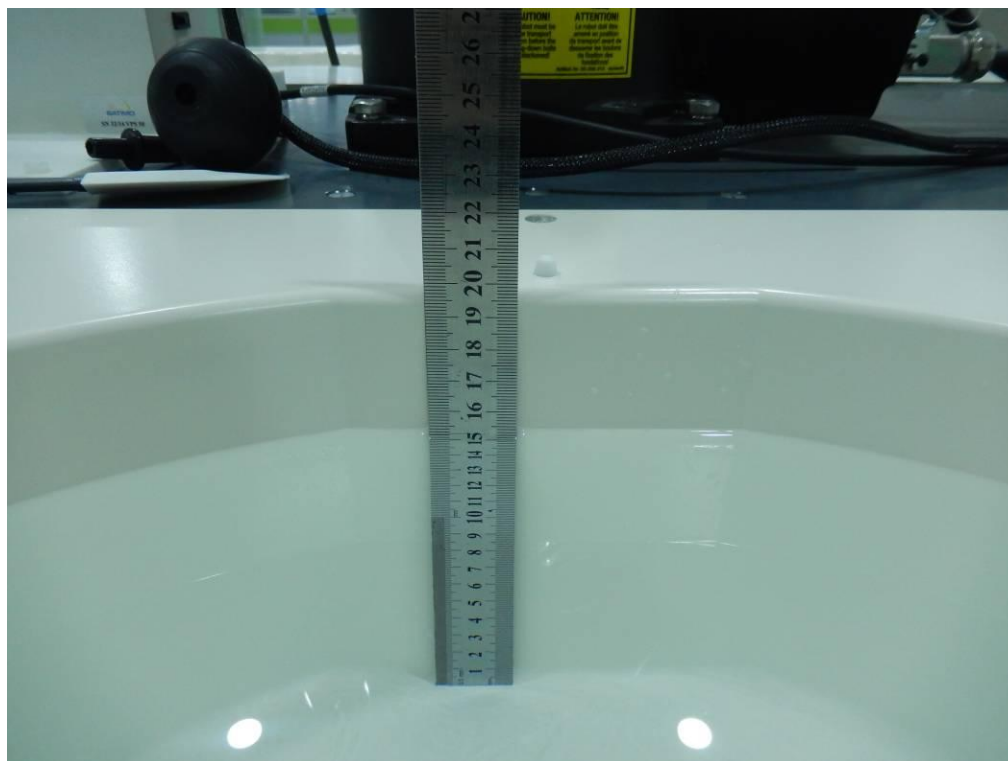



## 12. SAR Result Summary

### 12.1 Body SAR

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM 850	Voice	Front side	190	0.559	2.32	34	33.61	<b>0.612</b>	1
		Back side	190	0.302	1.93	34	33.61	0.330	/
		Left Edge	190	0.039	-3.84	34	33.61	0.043	/
		Right Edge	190	0.198	-1.59	34	33.61	0.217	/
		Top Edge	190	0.410	-0.82	34	33.61	0.449	/
		Bottom Edge	190	0.028	-2.58	34	33.61	0.031	/
GSM 850	GPRS Data-4 Slot	Front side	128	0.872	-1.10	33	32.26	<b>1.034</b>	2
		Front side	190	0.819	-0.18	33	32.27	0.969	/
		Front side	251	0.836	-1.49	33	32.57	0.923	/
		Back side	190	0.488	3.77	33	32.27	0.577	/
		Left Edge	190	0.032	3.50	33	32.27	0.038	/
		Right Edge	190	0.328	3.10	33	32.27	0.388	/
		Top Edge	190	0.710	-0.88	33	32.27	0.840	/
		Bottom Edge	190	0.017	-0.01	33	32.27	0.020	/
GSM1900	Voice	Front side	661	0.421	-2.55	27	26.99	0.422	/
		Back side	661	0.630	2.10	27	26.99	<b>0.631</b>	3
		Right Edge	661	0.165	2.88	27	26.99	0.165	/
		Top Edge	661	0.252	-2.59	27	26.99	0.253	/
GSM1900	GPRS Data-4 Slot	Front side	661	0.671	3.41	26	25.67	0.724	/
		Back side	512	1.007	-2.47	26	25.66	1.089	/
		Back side	661	1.015	0.20	26	25.67	<b>1.095</b>	4
		Back side	810	1.000	-1.24	26	25.57	1.104	/
		Right Edge	661	0.249	3.47	26	25.67	0.269	/
		Top Edge	661	0.400	-2.34	26	25.67	0.432	/
WCDMA II	RMC	Front side	9262	0.937	1.97	23.1	22.63	1.044	/
		Front side	9400	0.994	-3.01	23.1	22.93	1.034	/
		Front side	9538	1.094	-0.57	23.1	23.06	1.104	/
		Back side	9262	1.082	3.79	23.1	22.63	1.206	/
		Back side	9400	1.199	2.23	23.1	22.93	<b>1.247</b>	5
		Back side	9538	1.022	1.02	23.1	23.06	1.031	/
		Right Edge	9538	0.358	-3.61	23.1	23.01	0.365	/
		Top Edge	9538	0.620	-0.51	23.1	23.01	0.633	/
WCDMA V	RMC	Front side	4183	0.667	-1.72	23	22.68	<b>0.718</b>	6
		Back side	4183	0.427	3.87	23	22.68	0.460	/
		Right Edge	4183	0.268	3.72	23	22.68	0.288	/
		Top Edge	4183	0.525	-0.39	23	22.68	0.565	/





## Note:

1. The test separation of all above table is 0mm.
2. Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For WWAN: Scaled SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor



**Repeated SAR**

Band	Mode	Test Position	Channel	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM 850	GPRS Data-4 Slot	Front side	128	0.857	2.58	33	32.26	1.016	/
GSM1900	EGPRS Data-4 Slot	Back side	512	1.007	1.69	27	26.68	1.084	/
WCDMA II	RMC	Back side	9400	1.175	0.59	23.1	22.93	1.222	/

**12.2 repeated SAR measurement**

Band	Mode	Test Position	Channel	Original Measured SAR 1g(mW/g)	1 st Repeated SAR 1g	Ratio	Original Measured SAR 1g(mW/g)	2nd Repeated SAR 1g	Ratio
GSM 850	GPRS Data-4 Slot	Front side	GSM 850	0.872	0.857	1.02	/	/	/
GSM1900	EGPRS Data-4 Slot	Back side	GSM1900	1.015	1.007	1.01	/	/	/
WCDMA II	RMC	Back side	WCDMA II	1.199	1.175	1.02	/	/	/

**Note:**

1. Per KDB 865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/Kg.
2. Per KDB 865664 D01, if the ratio of largest to smallest SAR for the original and first repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45$ W/Kg, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$ W/Kg
4. The ratio is the difference in percentage between original and repeated measured SAR.

**Simultaneous Multi-band Transmission Evaluation:**

Application Simultaneous Transmission information:

Position	Simultaneous state
Body	1. GSM + Bluetooth
	2. WCDMA + Bluetooth

## NOTE:

1. For simultaneous transmission at body exposure position, 2 transmitters simultaneous transmission was the worst state.
3. Based upon KDB 447498 D01, BT SAR is excluded as below table.
4. If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
5. For minimum test separation distance  $\cong 50\text{mm}$ , Bluetooth standalone SAR is excluded according to  $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f} (\text{GHz}) / x] \cong 3.0$  for 1-g SAR and  $\cong 7.5$  for 10-g extremity SAR
6. The reported SAR summation is calculated based on the same configuration and test position.
7. KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
  - a)  $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f} (\text{GHz}) / x] \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ;  
Where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - b)  $0.4\text{W/Kg}$  for 1-g SAR and  $1.0\text{W/Kg}$  for 10-g SAR, when the separation distance is  $>50\text{mm}$ .


Estimated SAR		Maximum Power		Antenna to user(mm)	Frequency(GHz)	Stand alone SAR(1g) [W/kg]
		dBm	mW			
BT	Body	6	3.981	5	2.480	0.167



Simultaneous Mode	Position	Mode	Max. 1-g SAR (W/kg)	1-g Sum SAR (W/kg)
GSM + Bluetooth	Body	GSM Voice	0.631	0.798
		Bluetooth	0.167	
	Body	GSM Data	1.095	1.262
		Bluetooth	0.167	
WCDMA + Bluetooth	Body	WCDMA RMC	1.247	1.414
		Bluetooth	0.167	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

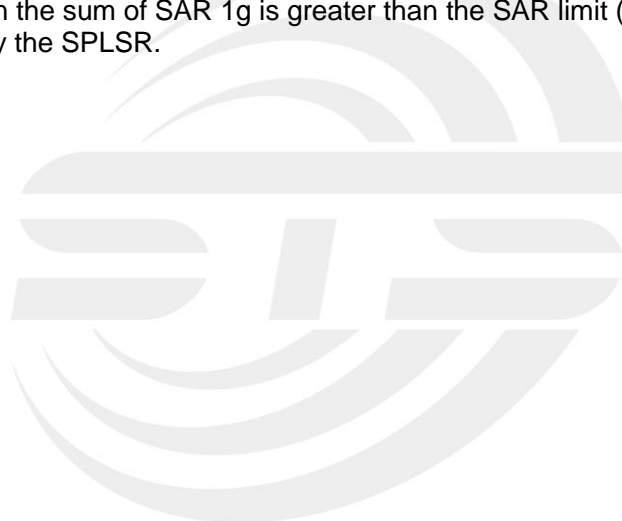



### 13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
835MHz Dipole	MVG	SID835	SN 30/14 DIP0G835-332	2017.08.15	2020.08.14
1900MHz Dipole	MVG	SID1900	SN 30/14 DIP1G900-333	2017.08.15	2020.08.14
E-Field Probe	MVG	SSE5	SN 14/16 EP309	2018.12.13	2019.12.12
Dielectric Probe Kit	MVG	SCLMP	SN 32/14 OCPG67	2018.12.01	2019.11.30
Antenna	MVG	ANTA3	SN 07/13 ZNTA52	N/A	N/A
Phantom1	MVG	SAM	SN 32/14 SAM115	N/A	N/A
Phantom2	MVG	SAM	SN 32/14 SAM116	N/A	N/A
Phone holder	MVG	N/A	SN 32/14 MSH97	N/A	N/A
Laptop holder	MVG	N/A	SN 32/14 LSH29	N/A	N/A
Attenuator	Agilent	99899	DC-18GHz	N/A	N/A
Directional coupler	Narda	4226-20	3305	N/A	N/A
Network Analyzer	Agilent	8753ES	US38432810	2019.10.11	2020.10.10
Multi Meter	Keithley	Multi Meter 2000	4050073	2019.10.11	2020.10.10
Signal Generator	Agilent	N5182A	MY50140530	2019.10.09	2020.10.08
Wireless Communication Test Set	Agilent	8960-E5515C	MY48360751	2019.10.09	2020.10.08
Wireless Communication Test Set	R&S	CMW500	117239	2019.10.09	2020.10.08
Power Amplifier	DESAY	ZHL-42W	9638	2019.10.09	2020.10.08
Power Meter	R&S	NRP	100510	2019.10.16	2020.10.15
Power Meter	Agilent	E4418B	GB43312526	2019.10.16	2020.10.15
Power Sensor	R&S	NRP-Z11	101919	2019.10.12	2020.10.11
Power Sensor	Agilent	E9301A	MY41497725	2019.10.12	2020.10.11
hygrothermograph	MiEO	HH660	N/A	2019.10.13	2020.10.12
Thermograph	Elitech	RC-4	S/N EF7176501537	2019.10.11	2020.10.10

**Note:**

Per KDB 865664 D01, Dipole SAR Validation Verification, STS LAB has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole
2. System validation with specific dipole is within 10% of calibrated value  
Return-loss in within 20% of calibrated measurement

## Appendix A. System Validation Plots

### System Performance Check Data (835MHz Body)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy =8mm, dz=5mm

Date of measurement: 2019-11-13

### Experimental conditions.


Probe	
Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity	56.49
Conductivity (S/m)	0.95
Power drift (%)	1.31
Probe	SN 14/16 EP309
ConvF:	5.90
Crest factor:	1:1

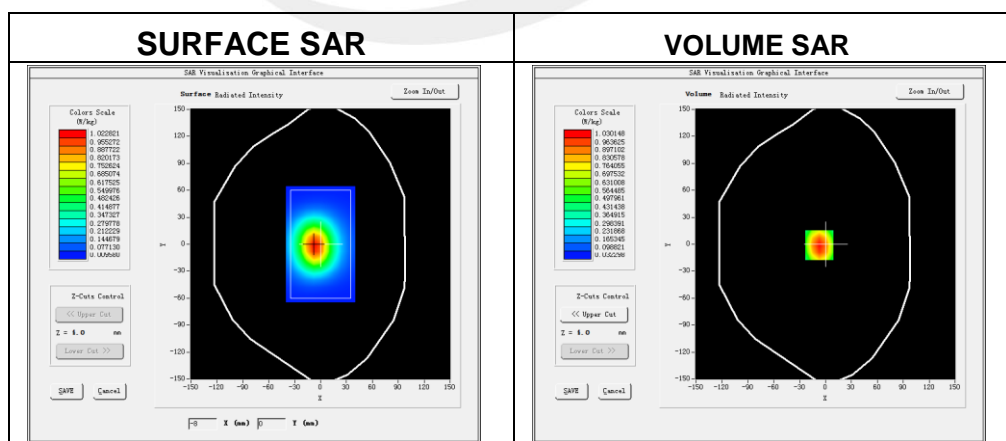

Maximum location: X=-7.00, Y=-1.00

SAR 10g (W/Kg)	0.637542
SAR 1g (W/Kg)	0.947206

### Z Axis Scan

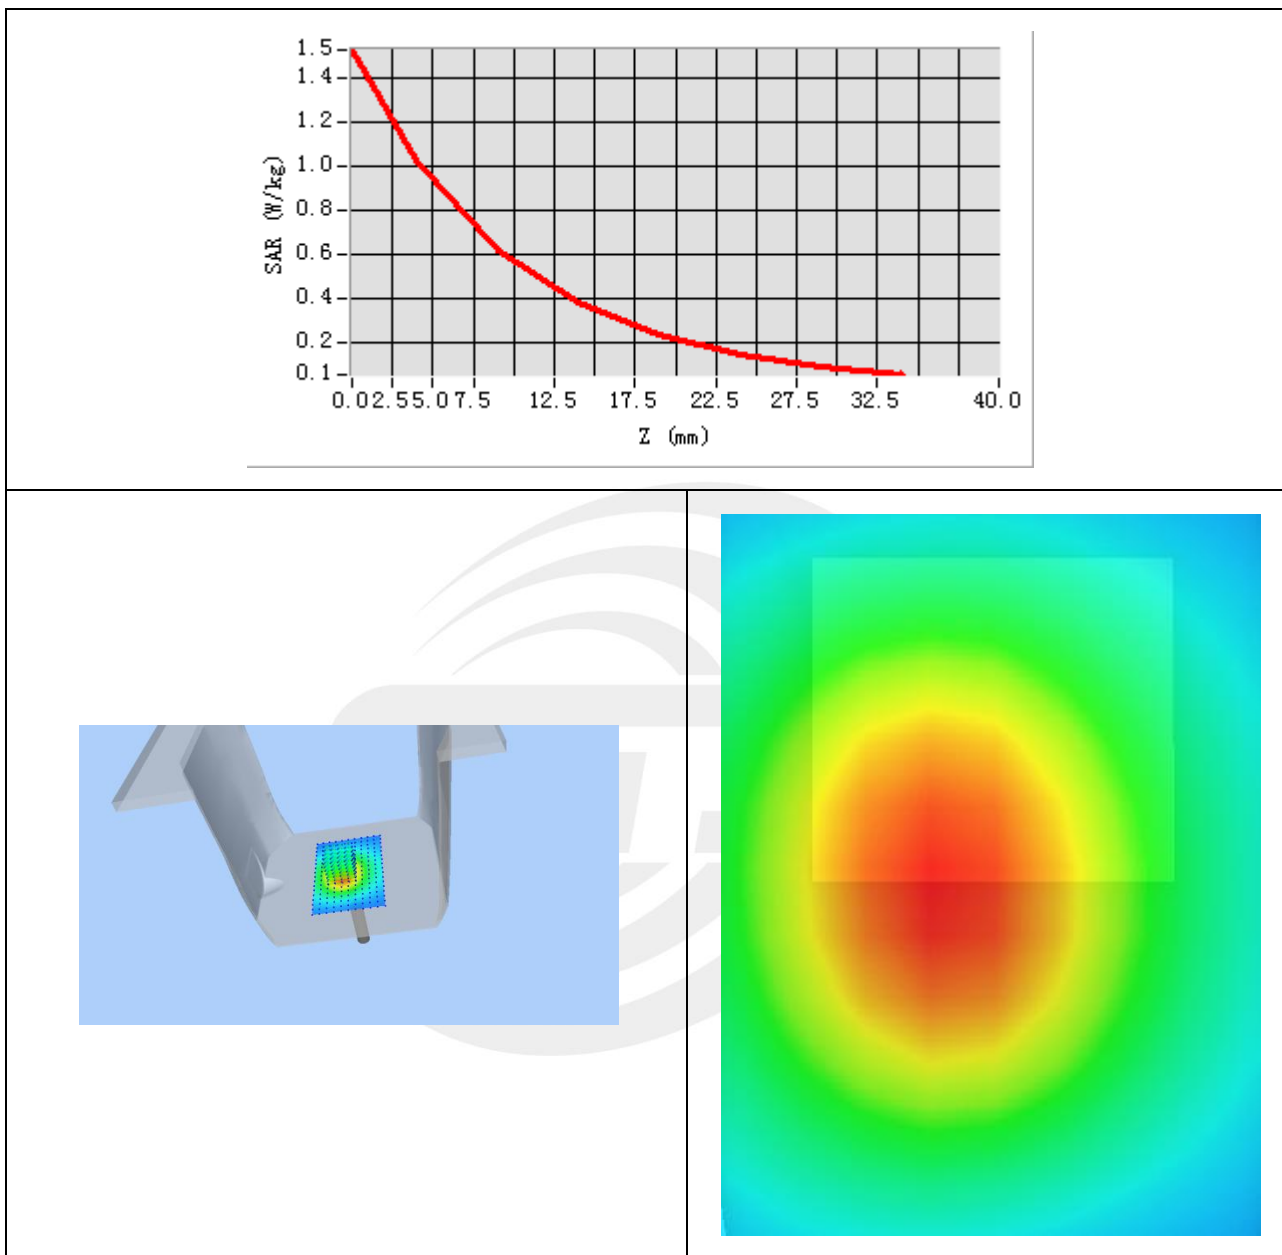



**System Performance Check Data (1900MHz Body)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy =8mm, dz=5mm

Date of measurement: 2019-11-15

**Experimental conditions.**

Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900
Relative permittivity	52.96
Conductivity (S/m)	1.54
Power drift (%)	-0.13
Probe	SN 14/16 EP309
ConvF:	5.67
Crest factor:	1:1



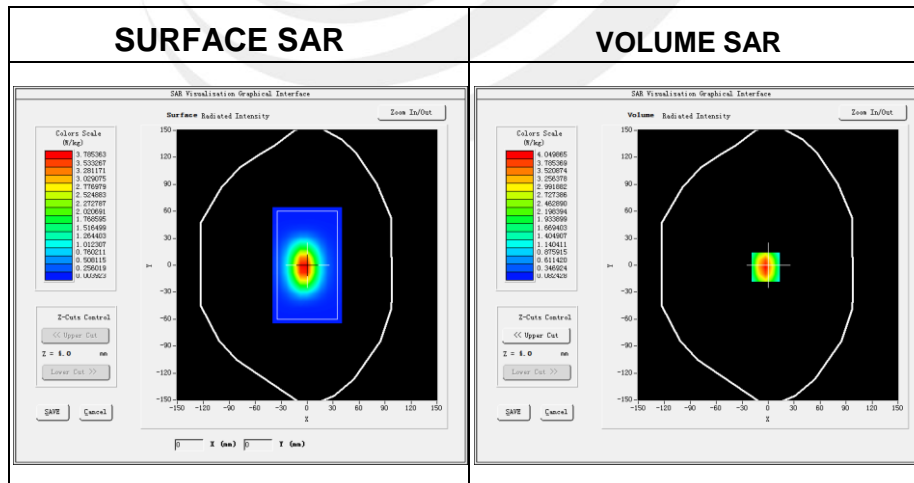


**Maximum location: X=-3.00, Y=-2.00**

SAR 10g (W/Kg)	2.184725
SAR 1g (W/Kg)	4.155492



## Z Axis Scan

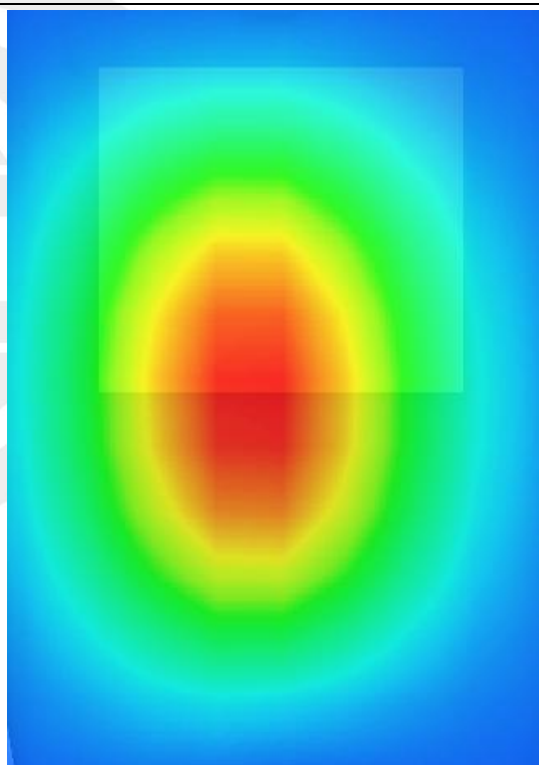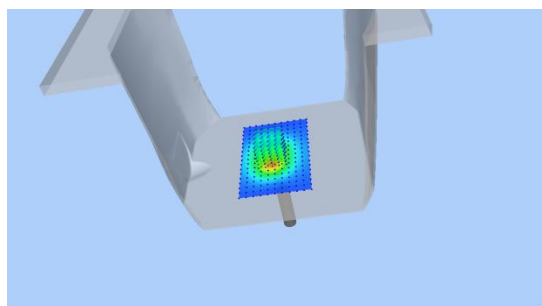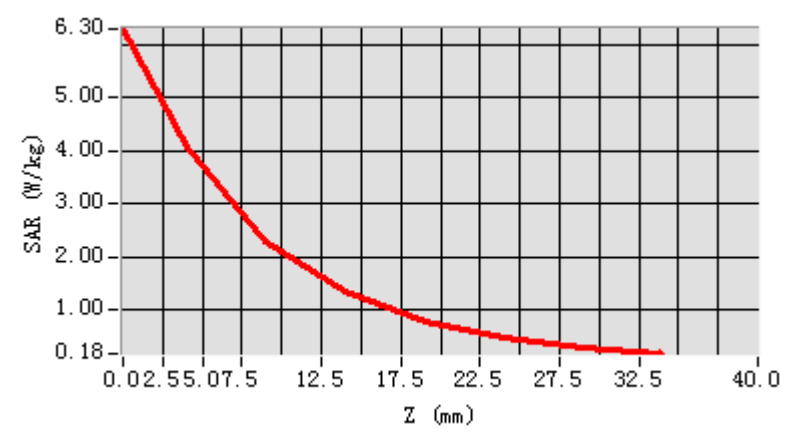

## Appendix B. SAR Test Plots


Plot 1: DUT: 3G/2G Fixed Wireless Phone; EUT Model: F700

Test Date	2019-11-13
Probe	SN 14/16 EP309
ConvF	5.74
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Front Side
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.32)
Frequency (MHz)	836.6
Relative permittivity (real part)	55.20
Conductivity (S/m)	0.97
Variation (%)	2.32

Maximum location: X=6.00, Y=-41.00

SAR Peak: 0.84 W/kg

SAR 10g (W/Kg)	0.396182
SAR 1g (W/Kg)	0.559346

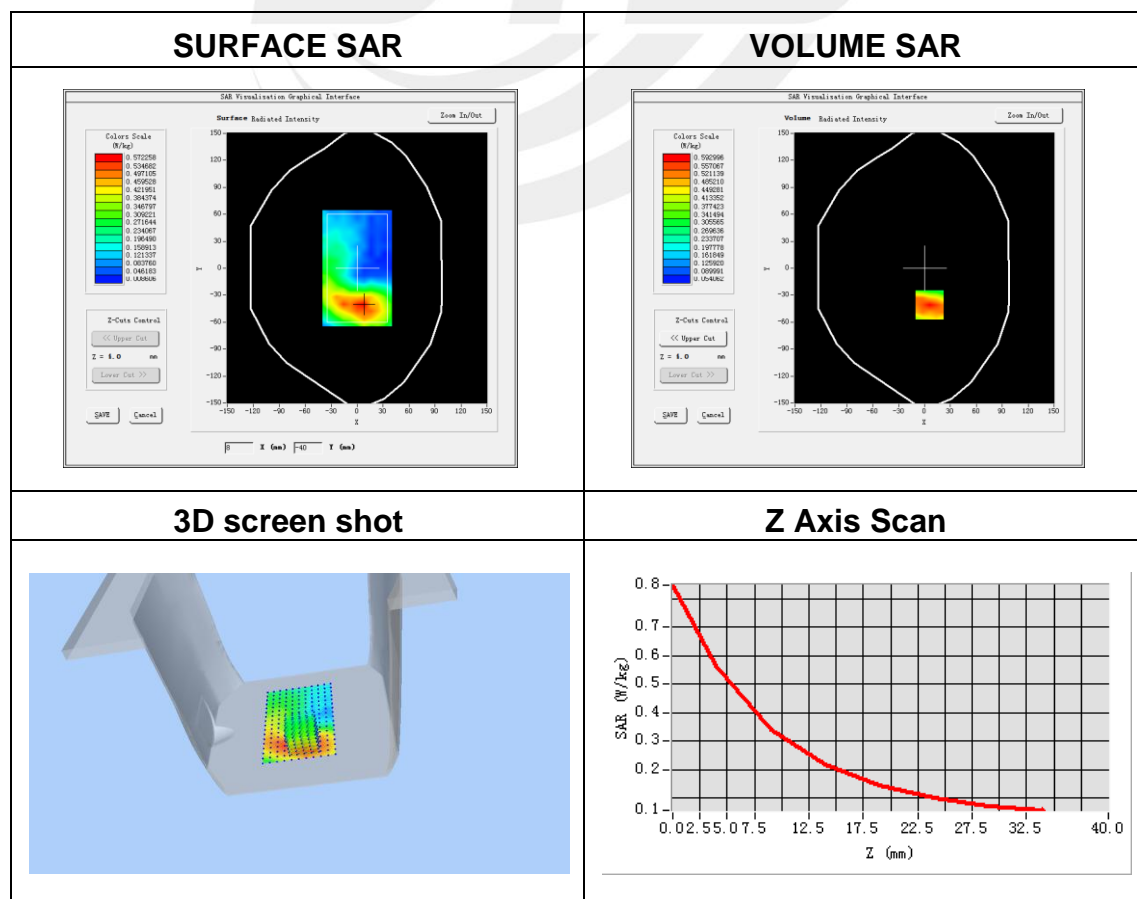


**Plot 2: DUT: 3G/2G Fixed Wireless Phone; EUT Model: F700**

Test Date	2019-11-13
Probe	SN 14/16 EP309
ConvF	5.90
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Front Side
Band	GSM850
Channels	Low
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	824.2
Relative permittivity (real part)	55.20
Conductivity (S/m)	0.97
Variation (%)	-1.10

Maximum location: X=16.00, Y=-33.00

SAR Peak: 1.16 W/kg

SAR 10g (W/Kg)	0.637130
SAR 1g (W/Kg)	0.872244

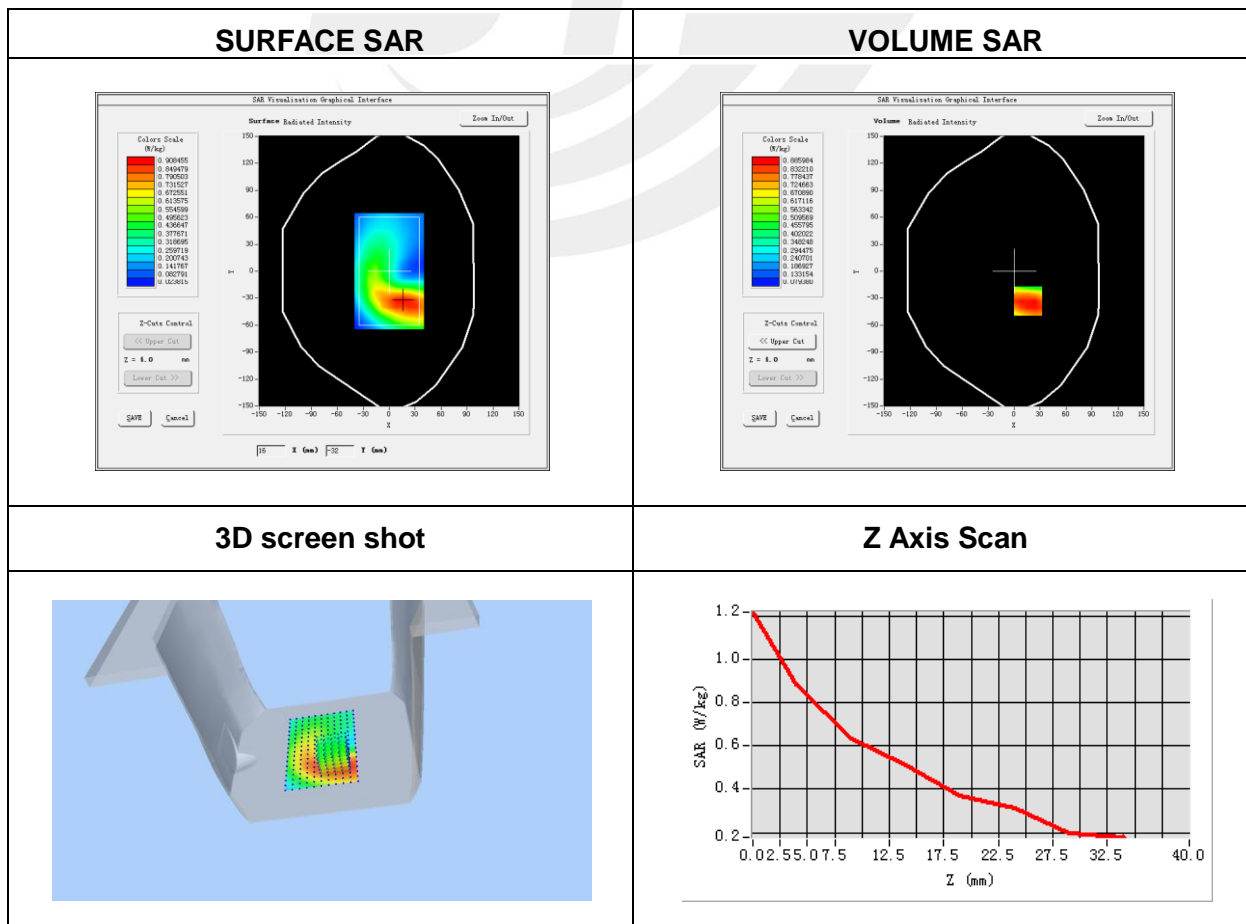


**Plot 3: DUT: 3G/2G Fixed Wireless Phone; EUT Model: F700**

Test Date	2019-11-15
Probe	SN 14/16 EP309
ConvF	5.46
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	GSM 1900
Channels	Middle
Signal	TDMA (Crest factor: 8.32)
Frequency (MHz)	1880.0
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	2.10

Maximum location: X=-14.00, Y=-25.00  
SAR Peak: 1.12 W/kg

SAR 10g (W/Kg)	0.313038
SAR 1g (W/Kg)	0.630258

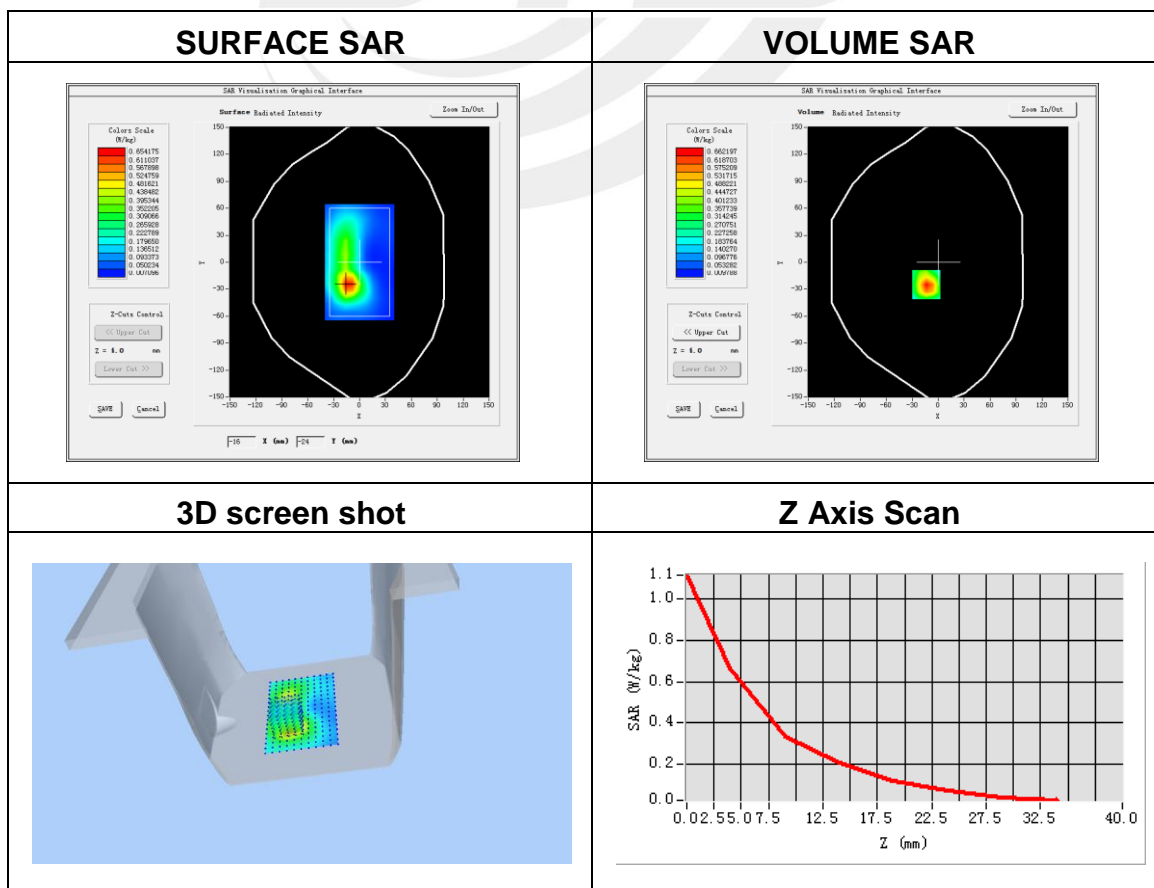


**Plot 4: DUT: 3G/2G Fixed Wireless Phone; EUT Model: F700**

Test Date	2019-11-15
Probe	SN 14/16 EP309
ConvF	5.67
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS 1900
Channels	Middle
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	1880.0
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	0.20

Maximum location: X=-3.00, Y=-18.00

SAR Peak: 1.75 W/kg

SAR 10g (W/Kg)	0.516344
SAR 1g (W/Kg)	1.015349

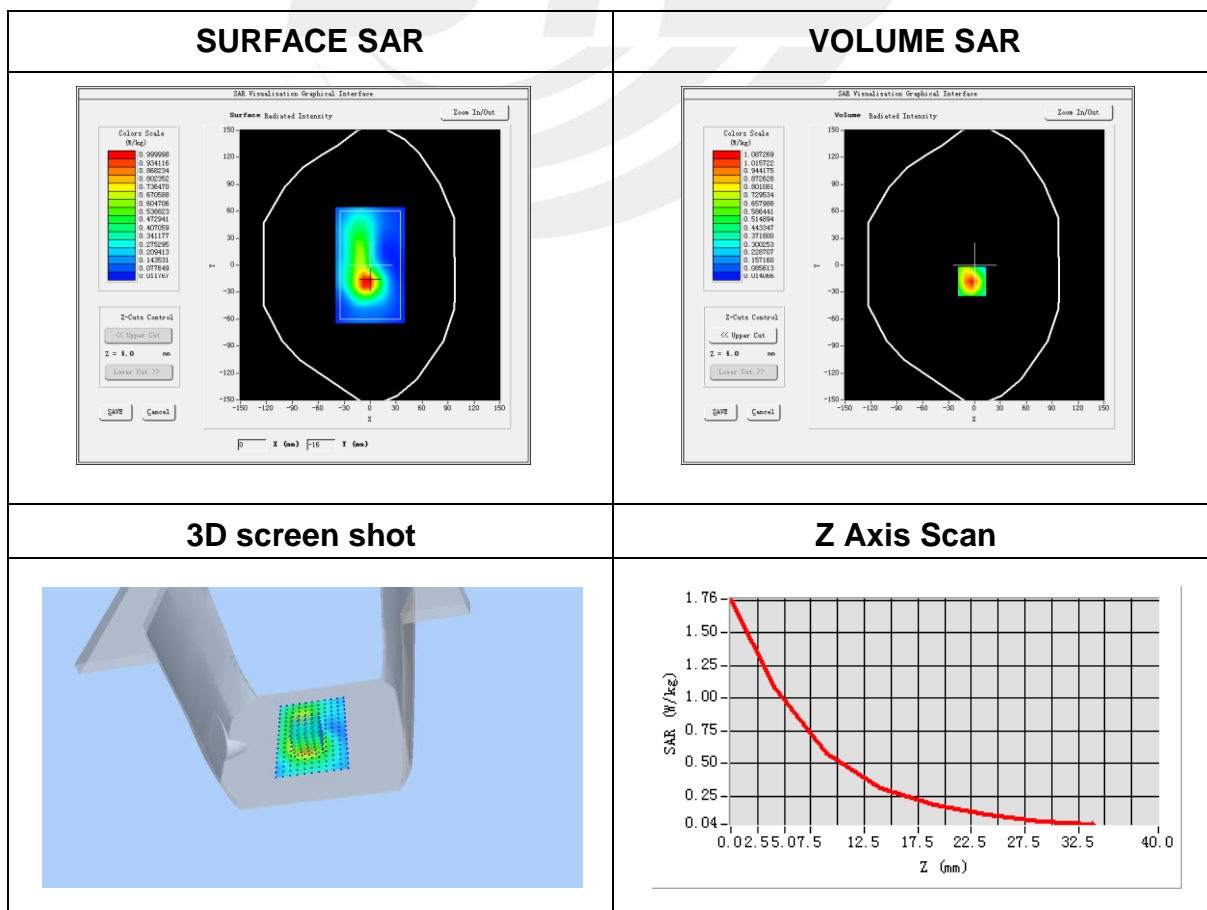


**Plot 5: DUT: 3G/2G Fixed Wireless Phone; EUT Model: F700**

Test Date	2019-11-15
Probe	SN 14/16 EP309
ConvF	5.67
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back side
Band	WCDMA II
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1880.0
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	2.23

Maximum location: X=7.00, Y=-18.00

SAR Peak: 1.93 W/kg

SAR 10g (W/Kg)	0.638684
SAR 1g (W/Kg)	1.198510

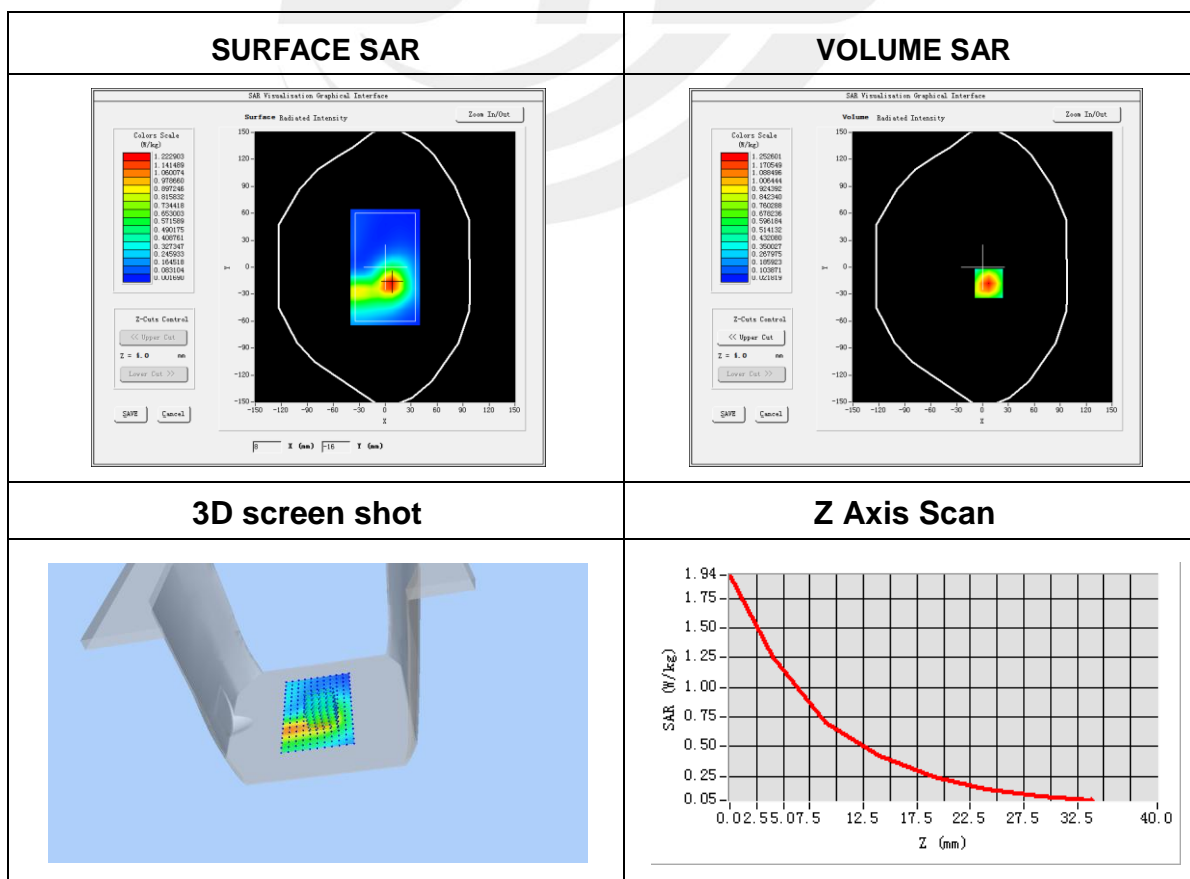


**Plot 6: DUT: 3G/2G Fixed Wireless Phone; EUT Model: F700**

Test Date	2019-11-13
Probe	SN 14/16 EP309
ConvF	5.90
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Front side
Band	WCDMA V
Channels	Middle
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	836.6
Relative permittivity (real part)	55.20
Conductivity (S/m)	0.97
Variation (%)	-1.72

Maximum location: X=23.00, Y=-32.00

SAR Peak: 0.85 W/kg

SAR 10g (W/Kg)	0.489374
SAR 1g (W/Kg)	0.667179

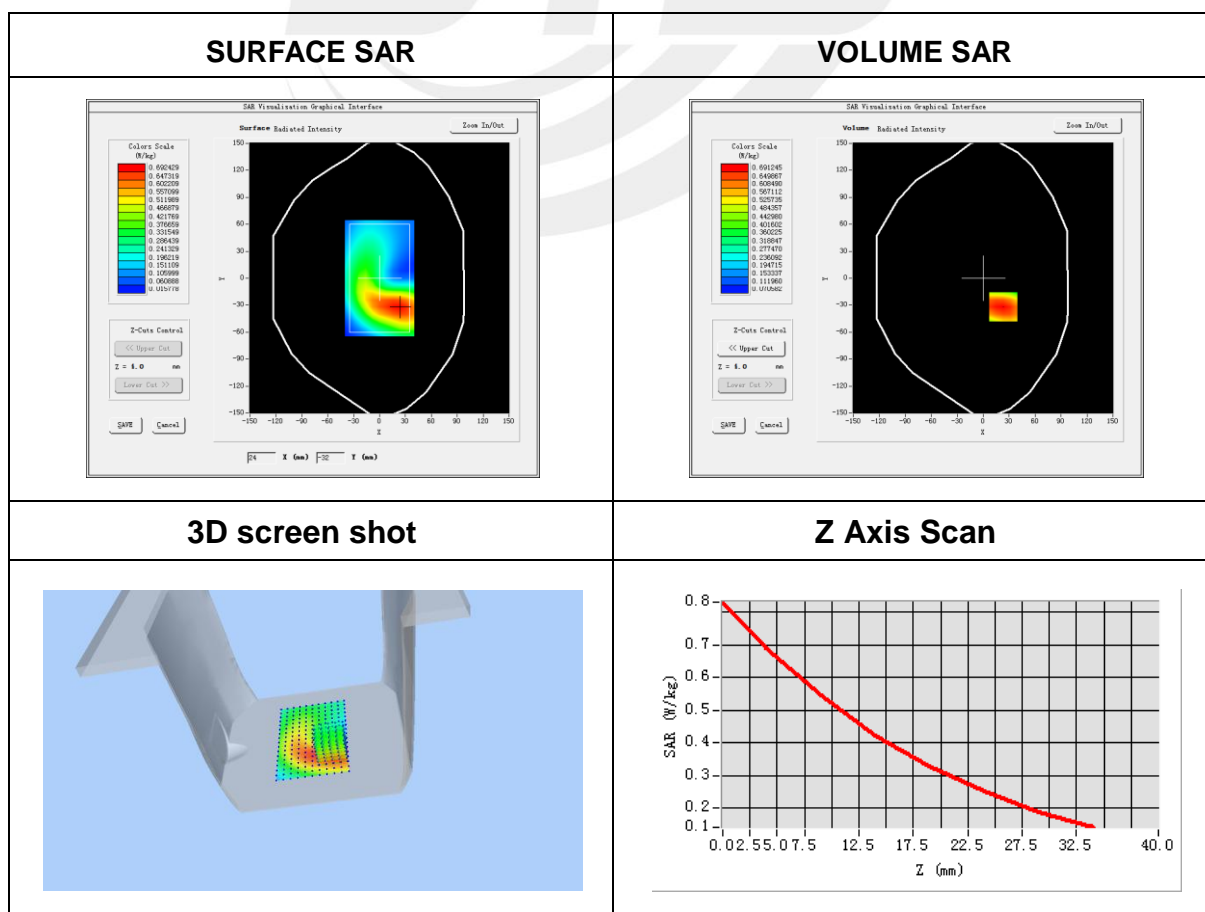



## Appendix C. Probe Calibration And Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※

