

Report No.: TMWK2108000371KR

802.11n_HT20_MIMO

CH	Frequency (MHz)	Data Rate	Power set	Avg. POWER (dBm)		TOTAL POWER (dBm)	TOTAL POWER (mW)	REQUIRED LIMIT (dBm)	RESULT
				CH 0	CH 1				
36	5180	MCS8	72	8.91	9.64	15.10	32.346	23.98	PASS
44	5220	MCS8	68	9.21	9.56	15.20	33.086	23.98	PASS
48	5240	MCS8	70	9.81	10.32	15.88	38.729	23.98	PASS
52	5260	MCS8	default	14.54	13.92	20.05	101.133	23.76	PASS
60	5300	MCS8	default	14.65	13.94	20.12	102.739	23.8	PASS
64	5320	MCS8	default	14.92	14.38	20.47	111.334	23.81	PASS
100	5500	MCS8	default	11.16	10.87	16.83	48.143	23.79	PASS
116	5580	MCS8	default	11.76	11.25	17.32	53.956	23.8	PASS
140	5700	MCS8	default	11.39	12.04	17.54	56.690	23.83	PASS
149	5745	MCS8	default	10.58	12.61	17.52	56.499	29.97	PASS
157	5785	MCS8	default	11.07	13.56	18.30	67.592	29.97	PASS
165	5825	MCS8	default	11.62	13.74	18.62	72.711	29.97	PASS

802.11n_HT40_MIMO

CH	Frequency (MHz)	Data Rate	Power set	Avg. POWER (dBm)		TOTAL POWER (dBm)	TOTAL POWER (mW)	REQUIRED LIMIT (dBm)	RESULT
				CH 0	CH 1				
38	5190	MCS8	82	11.04	12.25	17.65	58.185	23.98	PASS
46	5230	MCS8	82	12.08	11.67	17.84	60.826	23.98	PASS
54	5270	MCS8	default	13.16	13.09	19.09	81.026	23.98	PASS
62	5310	MCS8	default	13.71	13.29	19.47	88.433	23.98	PASS
102	5510	MCS8	default	9.85	9.77	15.77	37.768	23.98	PASS
110	5550	MCS8	default	10.07	9.68	15.84	38.375	23.98	PASS
134	5670	MCS8	default	10.02	10.53	16.24	42.107	23.98	PASS
151	5755	MCS8	default	10.28	13.11	17.88	61.413	29.97	PASS
159	5795	MCS8	default	11.13	12.77	17.99	62.922	29.97	PASS

Report No.: TMWK2108000371KR

802.11ac_VHT80_MIMO

CH	Frequency (MHz)	Data Rate	Power set	Avg. POWER (dBm)		TOTAL POWER (dBm)	TOTAL POWER (mW)	REQUIRED LIMIT (dBm)	RESULT
				CH 0	CH 1				
42	5210	MCS0	default	13.57	13.21	17.41	55.090	23.98	PASS
58	5290	MCS0	default	13.45	13.19	17.34	54.187	23.98	PASS
106	5530	MCS0	default	10.05	9.57	13.83	24.175	23.98	PASS
122	5610	MCS0	default	9.91	10.32	14.14	25.923	23.98	PASS
155	5775	MCS0	default	9.86	12.31	15.27	33.671	29.97	PASS

Report No.: TMWK2108000371KR

IC AVG Power:

802.11a_2Tx

CH	Frequency (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (dBm)	TOTAL POWER (mW)	REQUIRED LIMIT (dBm)	RESULT
		CH 0	CH 1				
52	5260	17.27	16.15	20.20	104.711	23.13	PASS
60	5300	16.89	16.23	20.03	100.610	23.14	PASS
64	5320	16.81	16.19	19.96	99.196	23.14	PASS
100	5500	13.08	12.78	16.39	43.516	23.13	PASS
116	5580	12.89	12.62	16.21	41.793	23.14	PASS
140	5700	14.26	13.58	17.39	54.792	23.14	PASS
149	5745	13.31	14.78	17.56	57.027	29.97	PASS
157	5785	13.58	15.34	18.00	63.131	29.97	PASS
165	5825	14.03	15.32	18.18	65.715	29.97	PASS

802.11n_HT20_MIMO

CH	Frequency (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (dBm)	TOTAL POWER (mW)	REQUIRED LIMIT (dBm)	RESULT
		CH 0	CH 1				
52	5260	14.54	13.92	20.05	101.133	23.45	PASS
60	5300	14.65	13.94	20.12	102.739	23.45	PASS
64	5320	14.92	14.38	20.47	111.334	23.46	PASS
100	5500	11.16	10.87	16.83	48.143	23.45	PASS
116	5580	11.76	11.25	17.32	53.956	23.45	PASS
140	5700	11.39	12.04	17.54	56.690	23.46	PASS
149	5745	10.58	12.61	17.52	56.499	29.97	PASS
157	5785	11.07	13.56	18.30	67.592	29.97	PASS
165	5825	11.62	13.74	18.62	72.711	29.97	PASS

Report No.: TMWK2108000371KR

802.11n_HT40_MIMO

CH	Frequency (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (dBm)	TOTAL POWER (mW)	REQUIRED LIMIT (dBm)	RESULT
		CH 0	CH 1				
54	5270	13.16	13.09	19.09	81.026	23.98	PASS
62	5310	13.71	13.29	19.47	88.433	23.98	PASS
102	5510	9.85	9.77	15.77	37.768	23.98	PASS
110	5550	10.07	9.68	15.84	38.375	23.98	PASS
134	5670	10.02	10.53	16.24	42.107	23.98	PASS
151	5755	10.28	13.11	17.88	61.413	29.97	PASS
159	5795	11.13	12.77	17.99	62.922	29.97	PASS

802.11ac_VHT80_MIMO

CH	Frequency (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (dBm)	TOTAL POWER (mW)	REQUIRED LIMIT (dBm)	RESULT
		CH 0	CH 1				
58	5290	13.45	13.19	17.34	54.187	23.98	PASS
106	5530	10.05	9.57	13.83	24.175	23.98	PASS
122	5610	9.91	10.32	14.14	25.923	23.98	PASS
155	5775	9.86	12.31	15.27	33.671	29.97	PASS

Report No.: TMWK2108000371KR

IC EIRP Power:
802.11a_2TX

CH	Frequency (MHz)	TOTAL POWER (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	REQUIRED LIMIT (dBm)	RESULT
36	5180	14.74	5.14	19.88	97.287	22.13	PASS
44	5220	15.56	5.14	20.70	117.591	22.14	PASS
48	5240	15.34	5.14	20.48	111.615	22.14	PASS
52	5260	20.20	5.14	25.34	341.972	29.13	PASS
60	5300	20.03	5.14	25.17	328.581	29.14	PASS
64	5320	19.96	5.14	25.10	323.963	29.14	PASS
100	5500	16.39	5.17	21.56	143.103	29.13	PASS
116	5580	16.21	5.17	21.38	137.436	29.14	PASS
140	5700	17.39	5.17	22.56	180.186	29.14	PASS

802.11n_HT20_MIMO

CH	Frequency (MHz)	TOTAL POWER (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	REQUIRED LIMIT (dBm)	RESULT
36	5180	15.10	5.14	20.24	105.638	22.44	PASS
44	5220	15.20	5.14	20.34	108.054	22.45	PASS
48	5240	15.88	5.14	21.02	126.484	22.46	PASS
52	5260	20.05	5.14	25.19	330.288	29.45	PASS
60	5300	20.12	5.14	25.26	335.535	29.45	PASS
64	5320	20.47	5.14	25.61	363.602	29.46	PASS
100	5500	16.83	5.17	22.00	158.318	29.45	PASS
116	5580	17.32	5.17	22.49	177.434	29.45	PASS
140	5700	17.54	5.17	22.71	186.424	29.46	PASS

Report No.: TMWK2108000371KR

802.11n_HT40_MIMO

CH	Frequency (MHz)	TOTAL POWER (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	REQUIRED LIMIT (dBm)	RESULT
38	5190	17.65	5.14	22.79	190.024	23.01	PASS
46	5230	17.84	5.14	22.98	198.651	23.01	PASS
54	5270	19.09	5.14	24.23	264.619	30	PASS
62	5310	19.47	5.14	24.61	288.812	30	PASS
102	5510	15.77	5.17	20.94	124.201	30	PASS
110	5550	15.84	5.17	21.01	126.196	30	PASS
134	5670	16.24	5.17	21.41	138.470	30	PASS

802.11ac_VHT80_MIMO

CH	Frequency (MHz)	TOTAL POWER (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (mW)	REQUIRED LIMIT (dBm)	RESULT
42	5210	17.41	5.14	22.55	179.918	23.01	PASS
58	5290	17.34	5.14	22.48	176.969	30	PASS
106	5530	13.83	5.17	19.00	79.500	30	PASS

Report No.: TMWK2108000371KR

4.4 POWER SPECTRAL DENSITY

4.4.1 Test Limit

According to §15.407 (a)(1), 15.407(a)(2) and 15.407(a)(3)

According to RSS-247 section 6.2.1.1, section 6.2.2.1, section 6.2.3.1 and section 6.2.4.1

UNII-1:

FCC: The maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

IC: The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

UNII-2a and 2c:

The maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

UNII-3:

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

UNII-1 Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 11 dBm/MHz <input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 10 dBm/MHz for IC <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 11 – (DG – 6)]
UNII-2a Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 11 dBm/MHz <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 11 – (DG – 6)]
UNII-2c Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 11 dBm/MHz <input type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 11 – (DG – 6)]
UNII-3 Limit	<input type="checkbox"/> Antenna not exceed 6 dBi : 30 dBm/500kHz <input checked="" type="checkbox"/> Antenna with DG greater than 6 dBi : [Limit = 30 – (DG – 6)]


Report No.: TMWK2108000371KR

4.4.2 Test Procedure

Test method Refer as KDB 789033 D02

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. UNII-1, UNII-2a and UNII-2c, SA set RBW = 1MHz, VBW = 3MHz and Detector = RMS, to measurement Power Density.
4. UNII-3, SA set RBW = 300kHz, VBW = 1MHz and Detector = RMS, to measurement Power Density
5. The path loss and Duty Factor were compensated to the results for each measurement by SA.
6. Mark the maximum level.
7. Measure and record the result of power spectral density. in the test report.

4.4.3 Test Setup

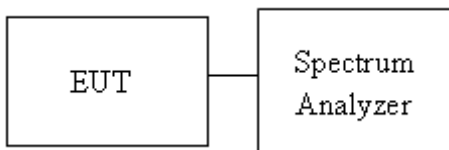

4.4.4 Test Result

Temperature: 20.3 ~ 25.8°C

Humidity: 54 ~ 61% RH

Tested by: Lance Chen

Test date: August 19 ~ 23, 2021

Report No.: TMWK2108000371KR

UNII-1 5150-5250 MHz						
POWER DENSITY 802.11a MODE						
Frequency (MHz)	Chain 0 PSD (dBm/MHz)	Chain 1 PSD (dBm/MHz)	Duty Factor (dB)	Total Corr'd PSD(dBm/MHz)	FCC Limit	Margin (dB)
5180	0.521	0.800	0.44	4.11	11.00 dBm/MHz	-6.89
5220	1.001	1.294	0.44	4.60	11.00 dBm/MHz	-6.40
5240	1.233	1.269	0.44	4.70	11.00 dBm/MHz	-6.30

POWER DENSITY 802.11n HT20 MODE						
Frequency (MHz)	Chain 0 PSD (dBm/MHz)	Chain 1 PSD (dBm/MHz)	Duty Factor (dB)	Total Corr'd PSD(dBm/MHz)	FCC Limit	Margin (dB)
5180	-1.327	-1.059	2.80	4.62	11.00 dBm/MHz	-6.38
5220	-2.067	-1.268	2.80	4.16	11.00 dBm/MHz	-6.84
5240	-1.289	-1.068	2.80	4.63	11.00 dBm/MHz	-6.37

POWER DENSITY 802.11n HT40 MODE						
Frequency (MHz)	Chain 0 PSD (dBm/MHz)	Chain 1 PSD (dBm/MHz)	Duty Factor (dB)	Total Corr'd PSD(dBm/MHz)	FCC Limit	Margin (dB)
5190	-2.595	-0.317	2.95	4.65	11.00 dBm/MHz	-6.35
5230	-1.489	-1.517	2.95	4.46	11.00 dBm/MHz	-6.54

POWER DENSITY 802.11ac VHT80 MODE						
Frequency (MHz)	Chain 0 PSD (dBm/MHz)	Chain 1 PSD (dBm/MHz)	Duty Factor (dB)	Total Corr'd PSD(dBm/MHz)	FCC Limit	Margin (dB)
5210	-4.045	-4.292	1.01	-0.15	11.00 dBm/MHz	-11.15

UNII-1 5150-5250 MHz					
EIRP spectral density 802.11a MODE					
Freq. (MHz)	PSD (dBm/MHz)	Ant. Gain (dBi)	EIRP PSD (dBm/MHz)	IC Limit (dBm/MHz)	Margin (dB)
5180	4.11	5.14	9.25	10	-0.75
5220	4.60	5.14	9.74	10	-0.26
5240	4.70	5.14	9.84	10	-0.16

EIRP spectral density 802.11n HT20 MODE					
Freq. (MHz)	PSD (dBm/MHz)	Ant. Gain (dBi)	EIRP PSD (dBm/MHz)	IC Limit (dBm/MHz)	Margin (dB)
5180	4.62	5.14	9.76	10	-0.24
5220	4.16	5.14	9.30	10	-0.70
5240	4.63	5.14	9.77	10	-0.23

EIRP spectral density 802.11n HT40 MODE					
Freq. (MHz)	PSD (dBm/MHz)	Ant. Gain (dBi)	EIRP PSD (dBm/MHz)	IC Limit (dBm/MHz)	Margin (dB)
5190	4.65	5.14	9.79	10	-0.21
5230	4.46	5.14	9.60	10	-0.40

EIRP spectral density 802.11ac VHT80 MODE					
Freq. (MHz)	PSD (dBm/MHz)	Ant. Gain (dBi)	EIRP PSD (dBm/MHz)	IC Limit (dBm/MHz)	Margin (dB)
5210	-0.15	5.14	4.99	10	-5.01

Report No.: TMWK2108000371KR

UNII-2a 5250-5350 MHz						
POWER DENSITY 802.11a MODE						
Frequency (MHz)	Chain 0 PPSD (dBm/MHz)	Chain 1 PPSD (dBm/MHz)	Duty Factor (dB)	Total Corr'd PSD(dBm/MHz)	Limit	Margin (dB)
5260	3.939	3.397	0.44	7.13	11.00 dBm/MHz	-3.87
5300	4.333	3.579	0.44	7.42	11.00 dBm/MHz	-3.58
5320	3.728	3.751	0.44	7.19	11.00 dBm/MHz	-3.81

POWER DENSITY 802.11n HT20 MODE						
Frequency (MHz)	Chain 0 PPSD (dBm/MHz)	Chain 1 PPSD (dBm/MHz)	Duty Factor (dB)	Total Corr'd PSD(dBm/MHz)	Limit	Margin (dB)
5260	2.886	2.706	2.80	8.61	11.00 dBm/MHz	-2.39
5300	2.794	3.036	2.80	8.73	11.00 dBm/MHz	-2.27
5320	2.882	3.026	2.80	8.76	11.00 dBm/MHz	-2.24

POWER DENSITY 802.11n HT40 MODE						
Frequency (MHz)	Chain 0 PPSD (dBm/MHz)	Chain 1 PPSD (dBm/MHz)	Duty Factor (dB)	Total Corr'd PSD(dBm/MHz)	Limit	Margin (dB)
5270	-0.715	-0.655	2.95	5.28	11.00 dBm/MHz	-5.72
5310	-1.014	-0.304	2.95	5.32	11.00 dBm/MHz	-5.68

POWER DENSITY 802.11ac VHT80 MODE						
Frequency (MHz)	Chain 0 PPSD (dBm/MHz)	Chain 1 PPSD (dBm/MHz)	Duty Factor (dB)	Total Corr'd PSD(dBm/MHz)	Limit	Margin (dB)
5290	-3.907	-4.618	1.01	-0.23	11.00 dBm/MHz	-11.23

Report No.: TMWK2108000371KR

UNII-2c 5470-5725 MHz						
POWER DENSITY 802.11a MODE						
Frequency (MHz)	Chain 0 PPSD (dBm/MHz)	Chain 1 PPSD (dBm/MHz)	Duty Factor (dB)	Total Corr'd PSD(dBm/MHz)	Limit	Margin (dB)
5500	0.483	0.338	0.44	3.86	11.00 dBm/MHz	-7.14
5580	1.095	1.046	0.44	4.52	11.00 dBm/MHz	-6.48
5700	1.057	1.872	0.44	4.93	11.00 dBm/MHz	-6.07

POWER DENSITY 802.11n HT20 MODE						
Frequency (MHz)	Chain 0 PPSD (dBm/MHz)	Chain 1 PPSD (dBm/MHz)	Duty Factor (dB)	Total Corr'd PSD(dBm/MHz)	Limit	Margin (dB)
5500	-0.553	-1.013	2.80	5.03	11.00 dBm/MHz	-5.97
5580	-0.742	-0.464	2.80	5.21	11.00 dBm/MHz	-5.79
5700	-1.024	-0.154	2.80	5.24	11.00 dBm/MHz	-5.76

POWER DENSITY 802.11n HT40 MODE						
Frequency (MHz)	Chain 0 PPSD (dBm/MHz)	Chain 1 PPSD (dBm/MHz)	Duty Factor (dB)	Total Corr'd PSD(dBm/MHz)	Limit	Margin (dB)
5510	-4.159	-4.050	2.95	1.86	11.00 dBm/MHz	-9.14
5550	-3.820	-4.436	2.95	1.84	11.00 dBm/MHz	-9.16
5670	-3.732	-4.000	2.95	2.10	11.00 dBm/MHz	-8.90

POWER DENSITY 802.11ac VHT80 MODE						
Frequency (MHz)	Chain 0 PPSD (dBm/MHz)	Chain 1 PPSD (dBm/MHz)	Duty Factor (dB)	Total Corr'd PSD(dBm/MHz)	Limit	Margin (dB)
5530	-7.894	-7.675	1.01	-3.76	11.00 dBm/MHz	-14.76
5610	-8.429	-8.141	1.01	-4.26	11.00 dBm/MHz	-15.26

UNII-3 5725-5825 MHz							
POWER DENSITY 802.11a MODE							
Frequency (MHz)	Chain 0 PPSD (dBm/300kHz)	Chain 1 PPSD (dBm/300kHz)	Duty Factor (dB)	10log (500kHz/RBW) Factor(dB)	Total Corr'd PSD (dBm/500kHz)	Limit	Margin (dB)
5745	-4.701	-2.097	0.44	2.22	2.46	29.97 dBm/500kHz	-27.51
5785	-3.995	-1.617	0.44	2.22	3.03	29.97 dBm/500kHz	-26.94
5825	-3.920	-1.749	0.44	2.22	2.97	29.97 dBm/500kHz	-27.00

POWER DENSITY 802.11n HT20 MODE							
Frequency (MHz)	Chain 0 PPSD (dBm/300kHz)	Chain 1 PPSD (dBm/300kHz)	Duty Factor (dB)	10log (500kHz/RBW) Factor(dB)	Total Corr'd PSD (dBm/500kHz)	Limit	Margin (dB)
5745	-5.531	-5.073	2.80	2.22	2.73	29.97 dBm/500kHz	-27.24
5785	-4.556	-4.906	2.80	2.22	3.30	29.97 dBm/500kHz	-26.67
5825	-5.231	-4.708	2.80	2.22	3.07	29.97 dBm/500kHz	-26.90

POWER DENSITY 802.11n HT40 MODE							
Frequency (MHz)	Chain 0 PPSD (dBm/300kHz)	Chain 1 PPSD (dBm/300kHz)	Duty Factor (dB)	10log (500kHz/RBW) Factor(dB)	Total Corr'd PSD (dBm/500kHz)	Limit	Margin (dB)
5755	-9.053	-7.263	2.95	2.22	0.11	29.97 dBm/500kHz	-29.86
5795	-8.003	-7.316	2.95	2.22	0.53	29.97 dBm/500kHz	-29.44

POWER DENSITY 802.11ac VHT80 MODE							
Frequency (MHz)	Chain 0 PPSD (dBm/300kHz)	Chain 1 PPSD (dBm/300kHz)	Duty Factor (dB)	10log (500kHz/RBW) Factor(dB)	Total Corr'd PSD (dBm/500kHz)	Limit	Margin (dB)
5775	-12.678	-13.281	1.01	2.22	-6.73	29.97 dBm/500kHz	-36.70

Report No.: TMWK2108000371KR


Test Data

UNII-1 IEEE 802.11a mode- chain 0

Low CH



Mid CH

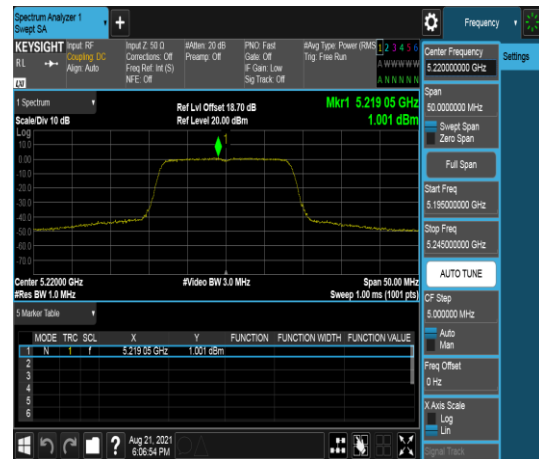


High CH




UNII-1 IEEE 802.11a mode- chain 1

Low CH

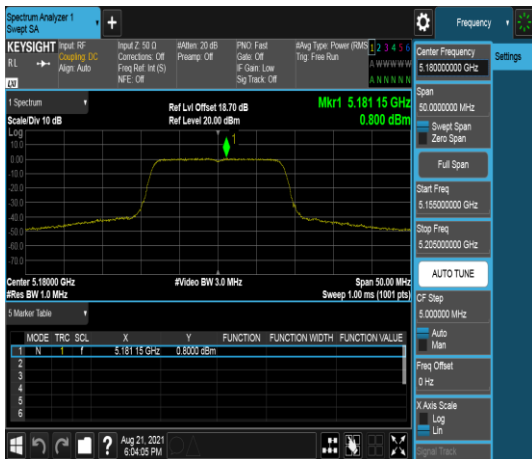

Mid CH

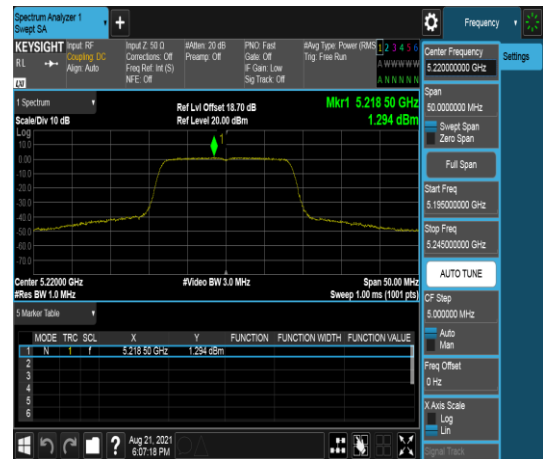

High CH



Report No.: TMWK2108000371KR

UNII-1 IEEE 802.11n HT20 mode- chain 0

Low CH



Mid CH



High CH



Report No.: TMWK2108000371KR

UNII-1 IEEE 802.11n HT20 mode- chain 1

Low CH



Mid CH



High CH



Report No.: TMWK2108000371KR

UNII-1 IEEE 802.11n HT40 mode- chain 0

Low CH



High CH



UNII-1 IEEE 802.11n HT40 mode- chain 1

Low CH



High CH



Report No.: TMWK2108000371KR

UNII-1 IEEE 802.11ac VHT80 mode- chain 0

Low CH



UNII-1 IEEE 802.11ac VHT80 mode- chain 1

Low CH



Report No.: TMWK2108000371KR

Test Data

UNII-2a IEEE 802.11a mode- chain 0

Low CH



Mid CH




High CH




Report No.: TMWK2108000371KR

UNII-2a IEEE 802.11a mode- chain 1

Low CH

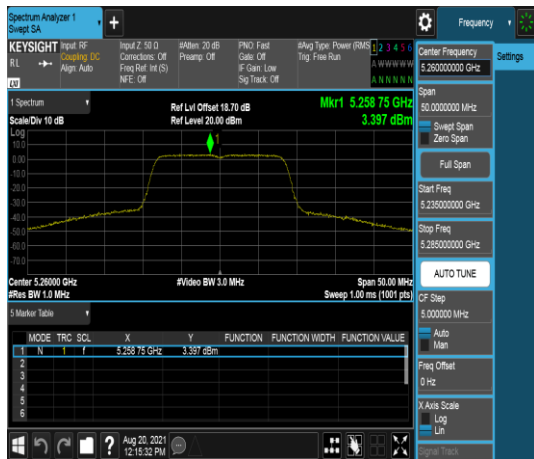

Mid CH

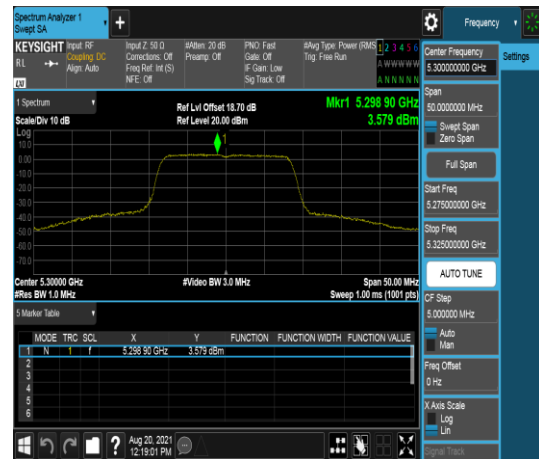

High CH



Report No.: TMWK2108000371KR

UNII-2a IEEE 802.11n HT20 mode- chain 0

Low CH



Mid CH




High CH




Report No.: TMWK2108000371KR

UNII-2a IEEE 802.11n HT20 mode- chain 1

Low CH

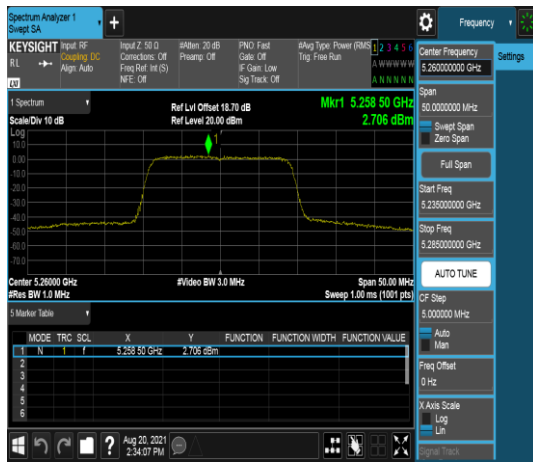


Mid CH

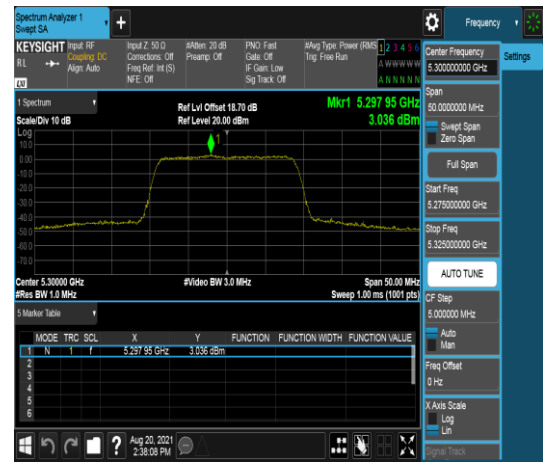

High CH



Report No.: TMWK2108000371KR

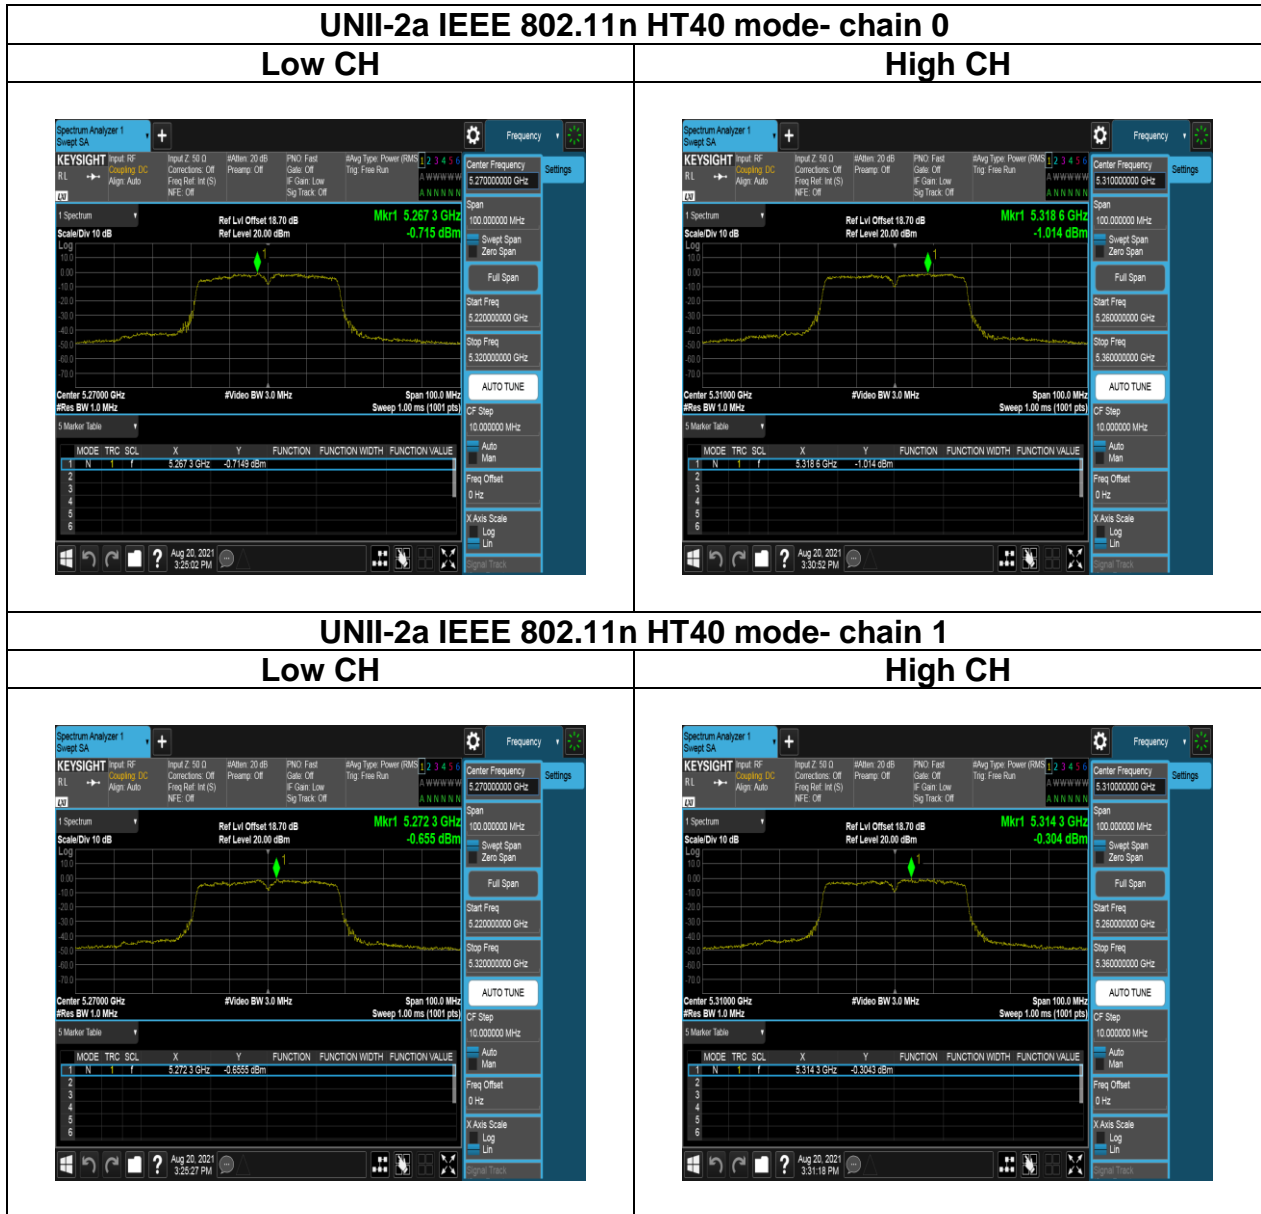

Report No.: TMWK2108000371KR

UNII-2a IEEE 802.11ac VHT80 mode- chain 0

Low CH



UNII-2a IEEE 802.11ac VHT80 mode- chain 1

Low CH




Report No.: TMWK2108000371KR


Test Data

UNII-2c IEEE 802.11a mode- chain 0

Low CH

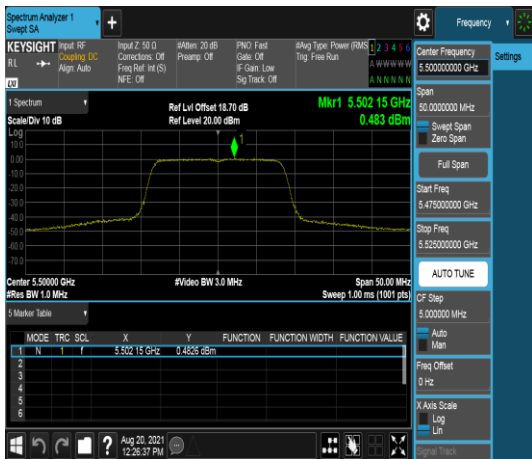


Mid CH

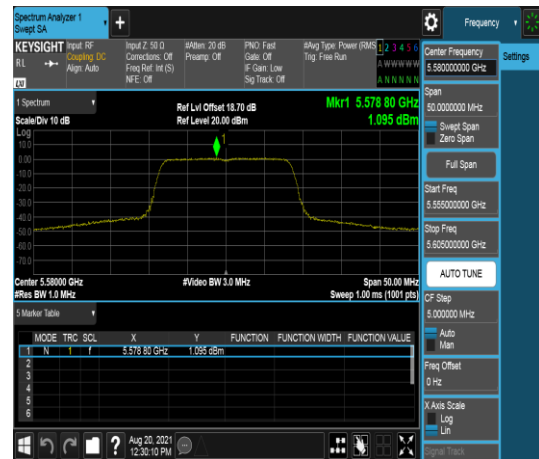

High CH



Report No.: TMWK2108000371KR

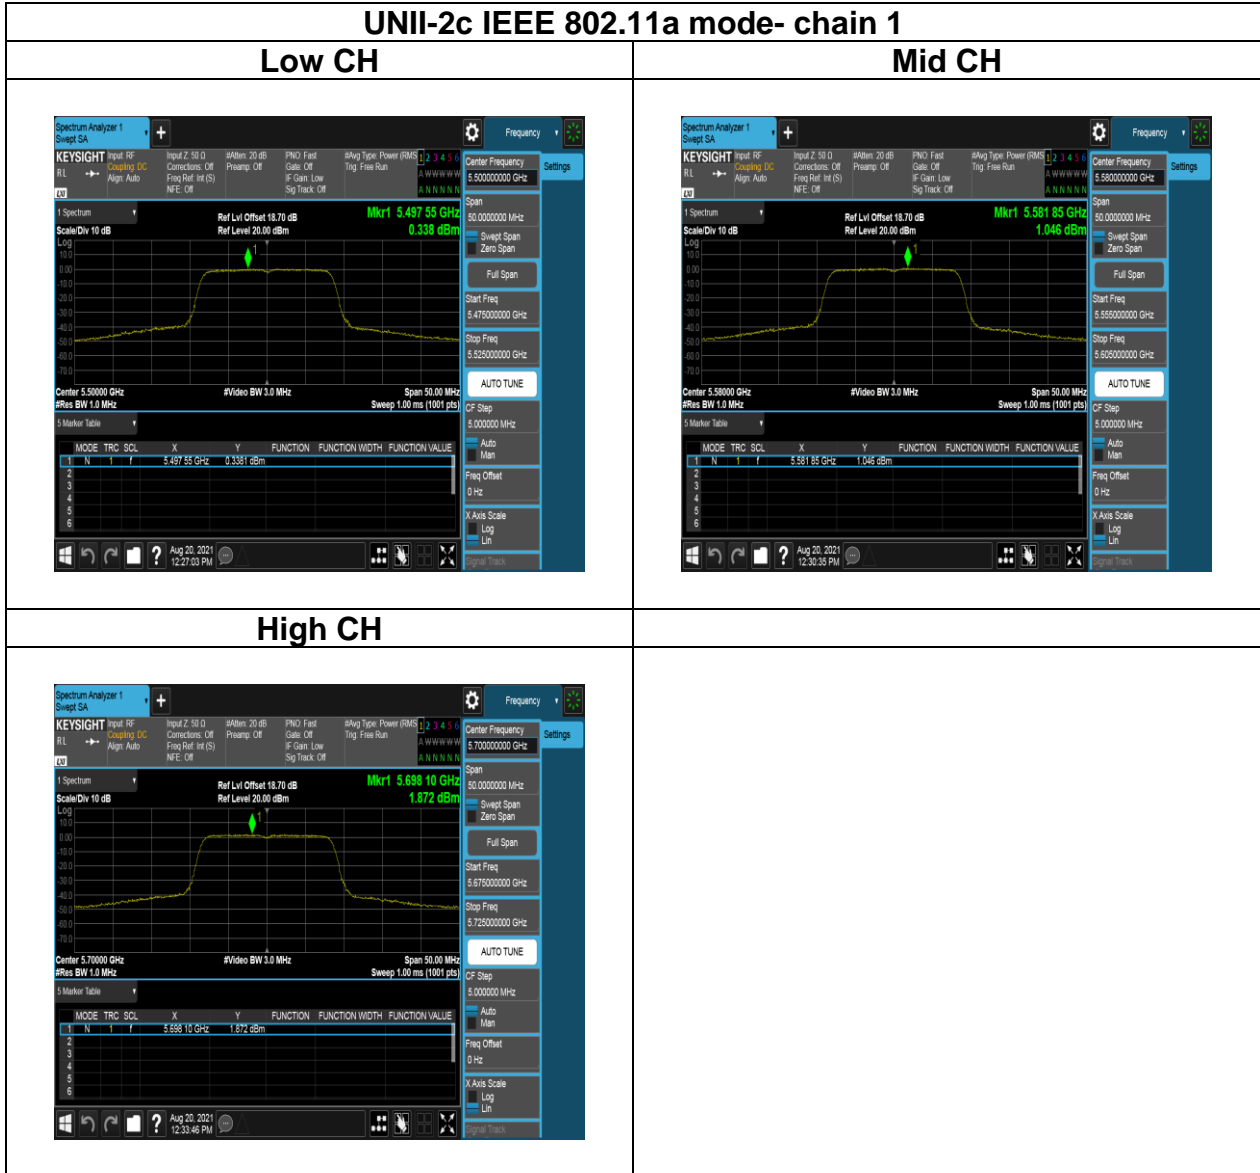

Report No.: TMWK2108000371KR

UNII-2c IEEE 802.11n HT20 mode- chain 0

Low CH



Mid CH



High CH



Report No.: TMWK2108000371KR

UNII-2c IEEE 802.11n HT20 mode- chain 1

Low CH



Mid CH



High CH



Report No.: TMWK2108000371KR

UNII-2c IEEE 802.11n HT40 mode- chain 0


Low CH



Mid CH



High CH

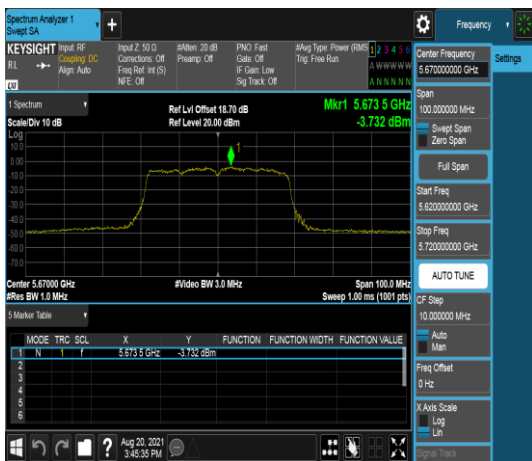

Report No.: TMWK2108000371KR

UNII-2c IEEE 802.11n HT40 mode- chain 1

Low CH



Mid CH




High CH



UNII-2c IEEE 802.11ac VHT80 mode- chain 0

Low CH

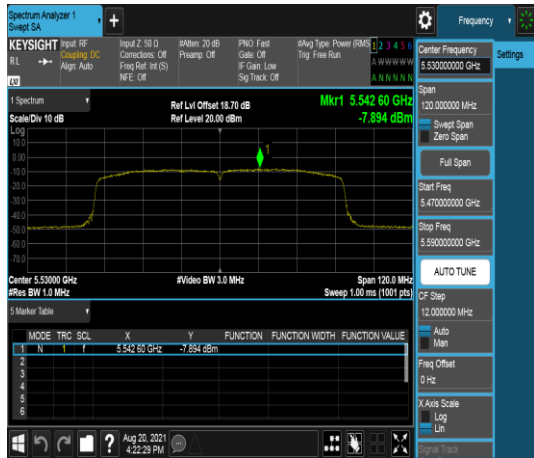

High CH



UNII-2c IEEE 802.11ac VHT80 mode- chain 1

Low CH



High CH



Report No.: TMWK2108000371KR

Test Data

UNII-3 IEEE 802.11a mode- chain 0

Low CH



Mid CH



High CH



Report No.: TMWK2108000371KR

UNII-3 IEEE 802.11a mode- chain 1

Low CH



Mid CH



High CH



UNII-3 IEEE 802.11n HT20 mode- chain 0

Low CH



Mid CH



High CH



Report No.: TMWK2108000371KR

UNII-3 IEEE 802.11n HT20 mode- chain 1

Low CH



Mid CH



High CH

