

FCC Test Report (2.4GHz WLAN)

Report No.: RFBHKO-WTW-P21110131

FCC ID: 2AUS4-NFF1

Test Model: NF-F1

Received Date: 2021/11/3

Test Date: 2021/11/11 ~ 2021/11/27

Issued Date: 2021/12/15

Applicant: Neatframe AS

Address: Martin Linges vei 25 Fornebu 1364 Norway

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

FCC Registration /

Designation Number: 198487 / TW2021



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results.....	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal	11
3.4 Description of Support Units	12
3.4.1 Configuration of System under Test	12
3.5 General Description of Applied Standards and References	13
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement.....	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement	14
4.1.2 Test Instruments	15
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard	16
4.1.5 Test Setup.....	17
4.1.6 EUT Operating Conditions.....	18
4.1.7 Test Results	19
4.2 Conducted Emission Measurement	33
4.2.1 Limits of Conducted Emission Measurement	33
4.2.2 Test Instruments	33
4.2.3 Test Procedures.....	34
4.2.4 Deviation from Test Standard	34
4.2.5 Test Setup.....	34
4.2.6 EUT Operating Conditions.....	34
4.2.7 Test Results	35
4.3 6dB Bandwidth Measurement	37
4.3.1 Limits of 6dB Bandwidth Measurement.....	37
4.3.2 Test Setup.....	37
4.3.3 Test Instruments	37
4.3.4 Test Procedure	37
4.3.5 Deviation from Test Standard	37
4.3.6 EUT Operating Conditions.....	37
4.3.7 Test Result	38
4.4 Conducted Output Power Measurement.....	40
4.4.1 Limits of Conducted Output Power Measurement	40
4.4.2 Test Setup.....	40
4.4.3 Test Instruments	40
4.4.4 Test Procedures.....	40
4.4.5 Deviation from Test Standard	40
4.4.6 EUT Operating Conditions.....	40
4.4.7 Test Results	41
4.5 Power Spectral Density Measurement.....	45
4.5.1 Limits of Power Spectral Density Measurement	45
4.5.2 Test Setup.....	45
4.5.3 Test Instruments	45
4.5.4 Test Procedure	45
4.5.5 Deviation from Test Standard	45

4.5.6 EUT Operating Condition	45
4.5.7 Test Results	46
4.6 Conducted Out of Band Emission Measurement.....	49
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	49
4.6.2 Test Setup.....	49
4.6.3 Test Instruments	49
4.6.4 Test Procedure	49
4.6.5 Deviation from Test Standard	49
4.6.6 EUT Operating Condition	49
4.6.7 Test Results	49
5 Pictures of Test Arrangements.....	58
Annex A- Band Edge Measurement	59
Appendix – Information of the Testing Laboratories	63

Release Control Record

Issue No.	Description	Date Issued
RFBHKO-WTW-P21110131	Original release.	2021/12/15

1 Certificate of Conformity

Product: Video conferencing device

Brand: neat.

Test Model: NF-F1

Sample Status: Engineering sample

Applicant: Neatframe AS

Test Date: 2021/11/11 ~ 2021/11/27

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by :



, Date:

2021/12/15

Jessica Cheng / Senior Specialist

Approved by :



, Date:

2021/12/15

Jeremy Lin / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -3.45dB at 0.59600MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.96dB at 2483.50MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	Pass	Meet the requirement of limit.
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is ipex not a standard connector.

Note:

1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. For 2.4GHz band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	3.00 dB
Conducted Emissions	9kHz ~ 40GHz	2.63 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	2.38 dB
	30MHz ~ 1GHz	5.70 dB
Radiated Emissions above 1 GHz	Above 1GHz	5.21 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Video conferencing device
Brand	neat.
Test Model	NF-F1
Status of EUT	Engineering sample
Power Supply Rating	AC Input: 100-240V~ 50/60Hz, 2.5A
Modulation Type	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM for OFDMA
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b:11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n (HT20/HT40): up to 300Mbps VHT20/VHT40: up to 400Mbps 802.11ax: up to 573.5Mbps
Operating Frequency	2412MHz ~ 2462MHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7
Output Power	247.765mW
Antenna Type	Refer to note as below
Antenna Connector	Refer to note as below
Accessory Device	N/A
Data Cable Supplied	Non-shielded AC 3-Pin cable (3.0m)

Note:

1. WLAN 2.4GHz & WLAN 5GHz & Bluetooth technologies cannot transmit at same time.

2. The EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	TX Function
802.11b	2TX
802.11g	2TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX
VHT20	2TX
VHT40	2TX
802.11ax (HE20)	2TX
802.11ax (HE40)	2TX

* The bandwidth and modulation are similar for HT20/HT40 on 802.11n mode and VHT20/VHT40 on 256QAM mode and HE20/HE40 on 802.11ax mode. Therefore the investigated worst case is the representative mode in test report. (Final test mode refer section 3.2.1)

3. The following antennas were provided to the EUT.

Ant. 1 Gain (dBi)	Ant. 2 Gain (dBi)	Antenna Type	Antenna Connector
3.21	3.36	PCB	ipex

4. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20), VHT20, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40), VHT40, 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE≥1G: Radiated Emission above 1GHz & Bandedge Measurement

PLC: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
-	802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
-	802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11g	1 to 11	1	OFDM	BPSK	6

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11g	1 to 11	1	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5
-	VHT20	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
-	VHT40	3 to 9	3, 6, 9	OFDM	BPSK	MCS0
-	802.11ax (HE20)	1 to 11	1, 6, 11	OFDMA	BPSK	MCS0
-	802.11ax (HE40)	3 to 9	3, 6, 9	OFDMA	BPSK	MCS0

* 802.11n (HT20), 802.11n (HT40), VHT20, VHT40 are for Conducted Power Measurement only.

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE≥1G	23deg. C, 69%RH	120Vac, 60Hz	Ian Chang
RE<1G	25deg. C, 70%RH	120Vac, 60Hz	Jed Wu
PLC	25deg. C, 75%RH	120Vac, 60Hz	Ian Chang
APCM	25deg. C, 76%RH	120Vac, 60Hz	Pirair Hsieh

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.
 If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = 100%

802.11g: Duty cycle = $2.26\text{ms}/2.5\text{ms} = 0.904$, Duty factor = $10 * \log(1/0.904) = 0.44\text{dB}$


802.11ax (HE20): Duty cycle = 100%

802.11ax (HE40): Duty cycle = 100%


802.11b




802.11g

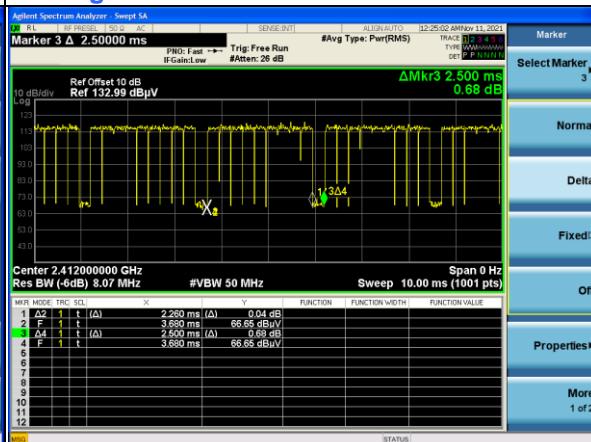

802.11ax (HE20)

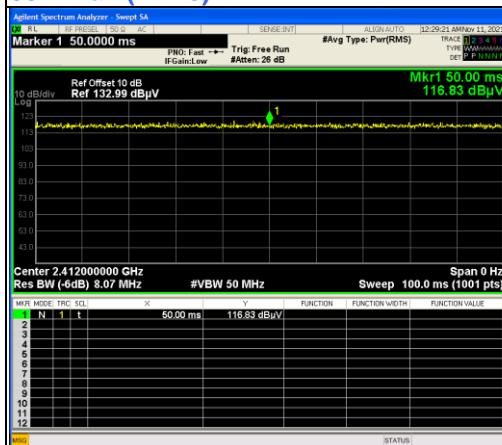

802.11ax (HE40)

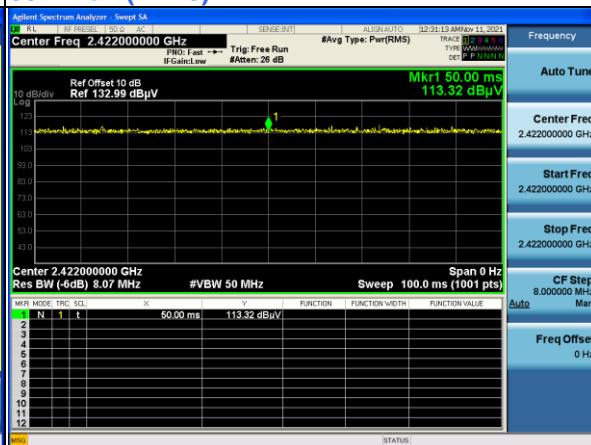


3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Type-C to HDMI adapter	DELL	DPQANBC067	N/A	N/A	Provided by Lab
B.	LCD Monitor	ASUS	MG28U	N/A	N/A	Provided by Lab
C.	Earphone /Mic.	Oppo	L1516	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/ No)	Cores (Qty.)	Remarks
1.	HDMI cable	1	2	Y	0	Provided by Lab
2.	AC cable	1	3	N	0	Supplied by applicant
3.	Audio cable	1	1.2	N	0	Provided by Lab

3.4.1 Configuration of System under Test

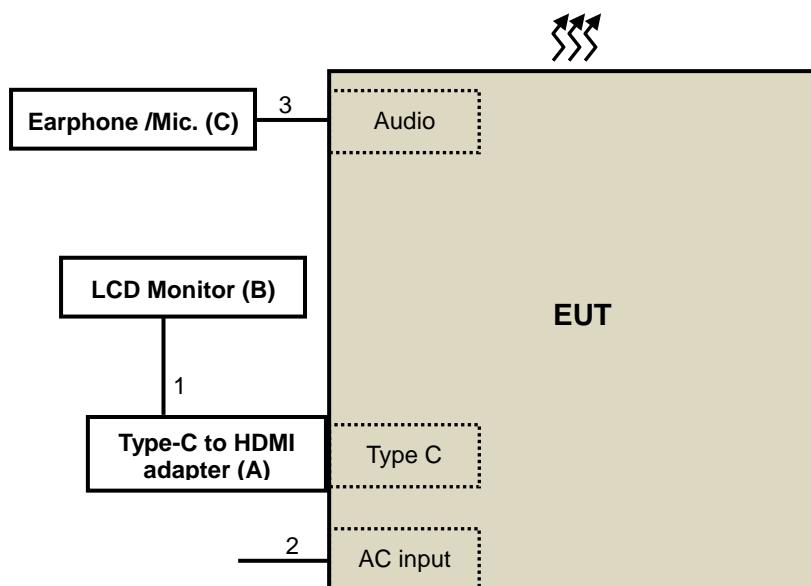

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

Description & Manufacturer	Model no.	Serial No.	Calibrated Date	Calibrated Until
Test Receiver Agilent	N9038A	MY51210129	2021/3/12	2022/3/11
Software BVADT	ADT_Radiated_V8.7.08	NA	NA	NA
Software BVADT	ADT_RF Test Software V6.6.5.4	NA	NA	NA
Auto Control System(Antenna Tower, Table, Controller) ADT	SC100+AT100+TT100	0306	NA	NA
Pre_Amplifier EMCI	EMC001340	980269	2021/6/29	2022/6/28
LOOP ANTENNA EMCI	LPA600	270	2021/9/2	2023/9/1
RF Coaxial Cable Pacific	8D-FB	Cable-CH6-02	2021/7/13	2022/7/12
Pre_Amplifier HP	8447D	2432A03504	2021/2/18	2022/2/17
Bi-log Broadband Antenna Schwarzbeck	VULB9168	139	2021/11/1	2022/10/31
Attenuator Mini-Circuits	UNAT-5+	PAD-CH6-01	2021/7/13	2022/7/12
RF Coaxial Cable Pacific	8D-FB	Cable-CH6-02	2021/7/13	2022/7/12
Antenna(Horn) EMCO	3115	00028257	2020/11/22 2021/11/14	2021/11/21 2022/11/13
Test Receiver Agilent	N9038A	MY51210129	2021/3/12	2022/3/11
Pre-amplifier HP	8449B	3008A01201	2021/2/19	2022/2/18
RF Coaxial Cable NEAT BAR PROER SUHNER	SF-102	Cable-CH6-01	2021/7/8	2022/7/7
Highpass filter Wainwright Instruments	WHK 3.1/18G-10SS	SN 8	2021/5/28	2022/5/27
Fix tool for Boresight	BAF-01	5	NA	NA
Pre_Amplifier MITEQ	AMF-6F-260400-33-8P	892164	2021/2/19	2022/2/18
Antenna(Horn) Schwarzbeck	BBHA-9170	BBHA9170190	2020/11/22 2021/11/14	2021/11/21 2022/11/13
Spectrum Analyzer R&S	FSV40	101544	2021/5/24	2022/5/23
RF Coaxial Cable WOKEN	WC01	Cable-CH10-03	2021/7/8	2022/7/7
RF Coaxial Cable Rosnol	K1K50-UP0279-K1K50-3000	Cable-CH10(3m)-04	2021/7/8	2022/7/7
Highpass filter SUHNER	11SH10-7000/T18000-O/OP	SN 4	2021/5/28	2022/5/27

- NOTE:**
1. The calibration interval of the above test instruments is 12/24 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in LK - 966 chamber 1.
 4. Tested Date: 2021/11/11 ~ 2021/11/26

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
(802.11b: RBW = 1MHz, VBW = 10Hz; 802.11g: RBW = 1MHz, VBW = 470Hz;
802.11ax (HE20): RBW = 1MHz, VBW = 10Hz; 802.11ax (HE40): RBW = 1MHz, VBW = 10Hz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

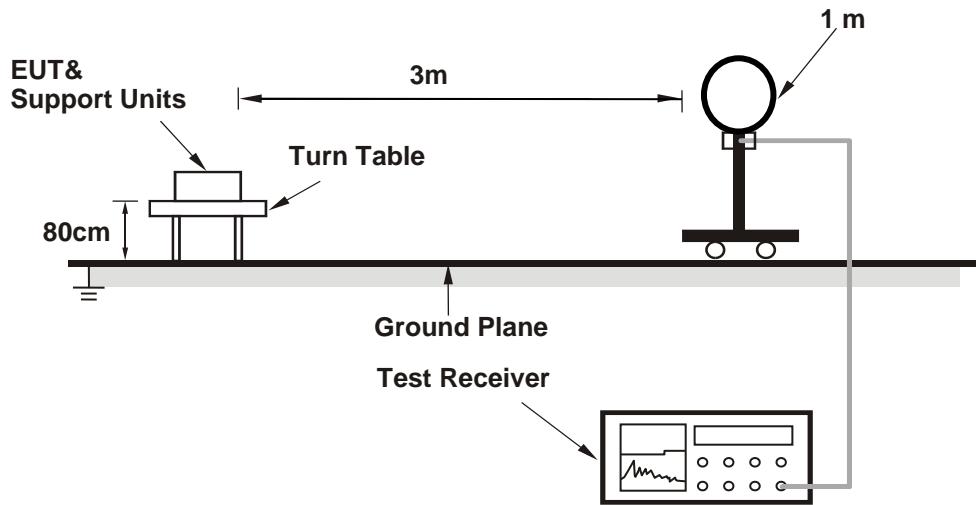

For Radiated emission 30MHz to 1GHz

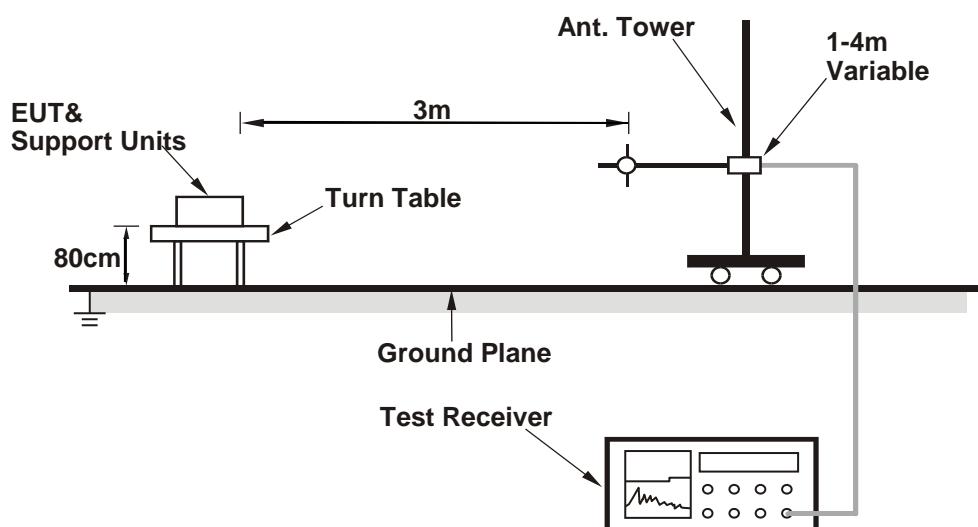

For Radiated emission above 1GHz

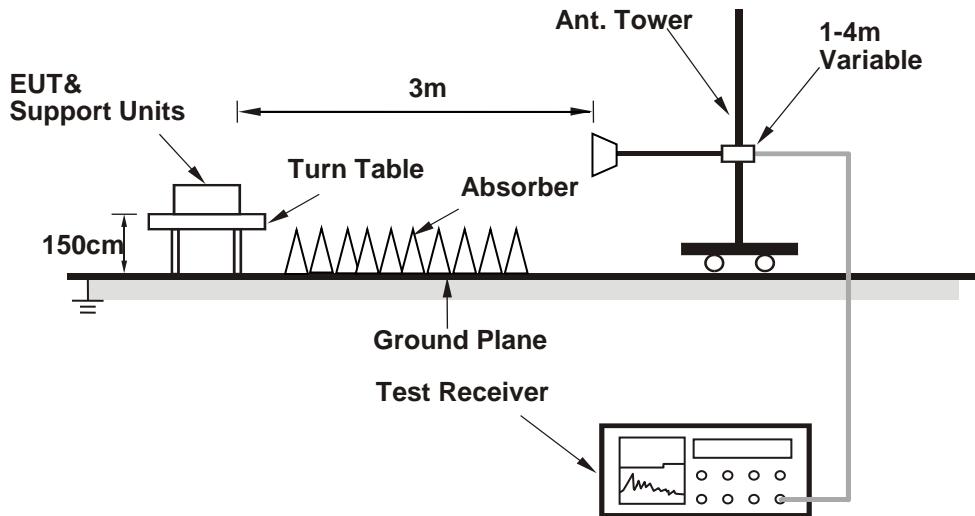

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Set the EUT under transmission condition continuously at specific channel frequency.
- Video camera of EUT captured video image, then sent messages to ext. monitor.
- The necessary accessories enable the system in full functions.

4.1.7 Test Results

ABOVE 1GHz DATA

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.71 PK	74.00	-21.29	3.78 H	216	54.99	-2.28
2	2390.00	41.36 AV	54.00	-12.64	3.78 H	216	43.64	-2.28
3	*2412.00	109.13 PK			3.78 H	216	111.32	-2.19
4	*2412.00	107.23 AV			3.78 H	216	109.42	-2.19
5	4824.00	45.83 PK	74.00	-28.17	3.54 H	162	40.17	5.66
6	4824.00	34.44 AV	54.00	-19.56	3.54 H	162	28.78	5.66

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.74 PK	74.00	-22.26	1.49 V	146	54.02	-2.28
2	2390.00	40.10 AV	54.00	-13.90	1.49 V	146	42.38	-2.28
3	*2412.00	107.22 PK			4.00 V	146	109.41	-2.19
4	*2412.00	105.39 AV			4.00 V	146	107.58	-2.19
5	4824.00	45.31 PK	74.00	-28.69	2.65 V	314	39.65	5.66
6	4824.00	33.30 AV	54.00	-20.70	2.65 V	314	27.64	5.66

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.98 PK			3.69 H	215	111.13	-2.15
2	*2437.00	107.09 AV			3.69 H	215	109.24	-2.15
3	4874.00	46.21 PK	74.00	-27.79	1.98 H	25	40.52	5.69
4	4874.00	34.35 AV	54.00	-19.65	1.98 H	25	28.66	5.69
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.29 PK			1.52 V	156	109.44	-2.15
2	*2437.00	105.48 AV			1.52 V	156	107.63	-2.15
3	4874.00	45.05 PK	74.00	-28.95	2.65 V	148	39.36	5.69
4	4874.00	33.12 AV	54.00	-20.88	2.65 V	148	27.43	5.69

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.17 PK			3.65 H	213	111.23	-2.06
2	*2462.00	108.10 AV			3.65 H	213	110.16	-2.06
3	2483.50	54.18 PK	74.00	-19.82	3.65 H	213	56.12	-1.94
4	2483.50	41.43 AV	54.00	-12.57	3.65 H	213	43.37	-1.94
5	4924.00	46.13 PK	74.00	-27.87	2.85 H	44	40.36	5.77
6	4924.00	34.51 AV	54.00	-19.49	2.85 H	44	28.74	5.77

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.78 PK			1.51 V	157	109.84	-2.06
2	*2462.00	105.22 AV			1.51 V	157	107.28	-2.06
3	2483.50	51.56 PK	74.00	-22.44	1.51 V	157	53.50	-1.94
4	2483.50	40.74 AV	54.00	-13.26	1.51 V	157	42.68	-1.94
5	4924.00	45.09 PK	74.00	-28.91	1.88 V	145	39.32	5.77
6	4924.00	33.23 AV	54.00	-20.77	1.88 V	145	27.46	5.77

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.54 PK	74.00	-22.46	3.42 H	230	53.82	-2.28
2	2390.00	41.48 AV	54.00	-12.52	3.42 H	230	43.76	-2.28
3	*2412.00	108.34 PK			3.42 H	230	110.53	-2.19
4	*2412.00	99.85 AV			3.42 H	230	102.04	-2.19
5	4824.00	45.92 PK	74.00	-28.08	1.85 H	241	40.26	5.66
6	4824.00	34.32 AV	54.00	-19.68	1.85 H	241	28.66	5.66
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	50.88 PK	74.00	-23.12	1.56 V	155	53.16	-2.28
2	2390.00	40.90 AV	54.00	-13.10	1.56 V	155	43.18	-2.28
3	*2412.00	106.27 PK			1.56 V	155	108.46	-2.19
4	*2412.00	98.17 AV			1.56 V	155	100.36	-2.19
5	4824.00	45.02 PK	74.00	-28.98	2.51 V	162	39.36	5.66
6	4824.00	32.85 AV	54.00	-21.15	2.51 V	162	27.19	5.66

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.10 PK			3.46 H	241	110.25	-2.15
2	*2437.00	100.17 AV			3.46 H	241	102.32	-2.15
3	4874.00	45.94 PK	74.00	-28.06	1.96 H	35	40.25	5.69
4	4874.00	33.95 AV	54.00	-20.05	1.96 H	35	28.26	5.69
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.31 PK			1.51 V	147	108.46	-2.15
2	*2437.00	98.11 AV			1.51 V	147	100.26	-2.15
3	4874.00	44.94 PK	74.00	-29.06	1.78 V	225	39.25	5.69
4	4874.00	33.31 AV	54.00	-20.69	1.78 V	225	27.62	5.69

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.22 PK			3.37 H	214	111.28	-2.06
2	*2462.00	100.96 AV			3.37 H	214	103.02	-2.06
3	2483.50	60.84 PK	74.00	-13.16	3.37 H	214	62.78	-1.94
4	2483.50	47.55 AV	54.00	-6.45	3.37 H	214	49.49	-1.94
5	4924.00	46.23 PK	74.00	-27.77	1.85 H	265	40.46	5.77
6	4924.00	34.29 AV	54.00	-19.71	1.85 H	265	28.52	5.77
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.46 PK			1.53 V	163	108.52	-2.06
2	*2462.00	98.63 AV			1.53 V	163	100.69	-2.06
3	2483.50	58.31 PK	74.00	-15.69	1.53 V	163	60.25	-1.94
4	2483.50	45.24 AV	54.00	-8.76	1.53 V	163	47.18	-1.94
5	4924.00	44.93 PK	74.00	-29.07	2.62 V	159	39.16	5.77
6	4924.00	33.26 AV	54.00	-20.74	2.62 V	159	27.49	5.77

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	52.50 PK	74.00	-21.50	3.41 H	228	54.78	-2.28
2	2390.00	42.11 AV	54.00	-11.89	3.41 H	228	44.39	-2.28
3	*2412.00	109.06 PK			3.41 H	228	111.25	-2.19
4	*2412.00	97.66 AV			3.41 H	228	99.85	-2.19
5	4824.00	46.18 PK	74.00	-27.82	1.87 H	49	40.52	5.66
6	4824.00	34.29 AV	54.00	-19.71	1.87 H	49	28.63	5.66
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	51.18 PK	74.00	-22.82	1.54 V	147	53.46	-2.28
2	2390.00	41.24 AV	54.00	-12.76	1.54 V	147	43.52	-2.28
3	*2412.00	107.44 PK			1.54 V	147	109.63	-2.19
4	*2412.00	95.45 AV			1.54 V	147	97.64	-2.19
5	4824.00	45.17 PK	74.00	-28.83	2.14 V	156	39.51	5.66
6	4824.00	33.00 AV	54.00	-21.00	2.14 V	156	27.34	5.66

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.26 PK			3.46 H	231	111.41	-2.15
2	*2437.00	97.81 AV			3.46 H	231	99.96	-2.15
3	4874.00	46.26 PK	74.00	-27.74	1.85 H	195	40.57	5.69
4	4874.00	34.02 AV	54.00	-19.98	1.85 H	195	28.33	5.69
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.42 PK			1.49 V	163	109.57	-2.15
2	*2437.00	95.17 AV			1.49 V	163	97.32	-2.15
3	4874.00	45.43 PK	74.00	-28.57	1.96 V	345	39.74	5.69
4	4874.00	33.30 AV	54.00	-20.70	1.96 V	345	27.61	5.69

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.55 PK			3.66 H	218	111.61	-2.06
2	*2462.00	98.55 AV			3.66 H	218	100.61	-2.06
3	2483.50	62.87 PK	74.00	-11.13	3.66 H	218	64.81	-1.94
4	2483.50	50.51 AV	54.00	-3.49	3.66 H	218	52.45	-1.94
5	4924.00	45.96 PK	74.00	-28.04	1.69 H	215	40.19	5.77
6	4924.00	34.33 AV	54.00	-19.67	1.69 H	215	28.56	5.77
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.34 PK			1.52 V	168	109.40	-2.06
2	*2462.00	96.09 AV			1.52 V	168	98.15	-2.06
3	2483.50	60.17 PK	74.00	-13.83	1.52 V	168	62.11	-1.94
4	2483.50	48.42 AV	54.00	-5.58	1.52 V	168	50.36	-1.94
5	4924.00	45.13 PK	74.00	-28.87	2.22 V	185	39.36	5.77
6	4924.00	32.93 AV	54.00	-21.07	2.22 V	185	27.16	5.77

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.27 PK	74.00	-16.73	3.79 H	214	59.55	-2.28
2	2390.00	46.26 AV	54.00	-7.74	3.79 H	214	48.54	-2.28
3	*2422.00	107.12 PK			3.79 H	214	109.29	-2.17
4	*2422.00	95.80 AV			3.79 H	214	97.97	-2.17
5	4844.00	45.85 PK	74.00	-28.15	1.78 H	167	40.16	5.69
6	4844.00	34.35 AV	54.00	-19.65	1.78 H	167	28.66	5.69
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.59 PK	74.00	-19.41	1.55 V	148	56.87	-2.28
2	2390.00	43.68 AV	54.00	-10.32	1.55 V	148	45.96	-2.28
3	*2422.00	105.46 PK			1.55 V	148	107.63	-2.17
4	*2422.00	93.72 AV			1.55 V	148	95.89	-2.17
5	4844.00	45.16 PK	74.00	-28.84	1.23 V	352	39.47	5.69
6	4844.00	33.24 AV	54.00	-20.76	1.23 V	352	27.55	5.69

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.26 PK			3.69 H	220	109.41	-2.15
2	*2437.00	95.73 AV			3.69 H	220	97.88	-2.15
3	4874.00	45.96 PK	74.00	-28.04	1.92 H	238	40.27	5.69
4	4874.00	33.88 AV	54.00	-20.12	1.92 H	238	28.19	5.69
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	105.54 PK			1.55 V	167	107.69	-2.15
2	*2437.00	93.13 AV			1.55 V	167	95.28	-2.15
3	4874.00	45.12 PK	74.00	-28.88	2.88 V	251	39.43	5.69
4	4874.00	33.30 AV	54.00	-20.70	2.88 V	251	27.61	5.69

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	108.16 PK			3.70 H	209	110.27	-2.11
2	*2452.00	97.09 AV			3.70 H	209	99.20	-2.11
3	2483.50	64.13 PK	74.00	-9.87	3.70 H	209	66.07	-1.94
4	2483.50	52.04 AV	54.00	-1.96	3.70 H	209	53.98	-1.94
5	4904.00	46.26 PK	74.00	-27.74	1.63 H	236	40.55	5.71
6	4904.00	34.35 AV	54.00	-19.65	1.63 H	236	28.64	5.71
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	106.23 PK			1.56 V	158	108.34	-2.11
2	*2452.00	95.53 AV			1.56 V	158	97.64	-2.11
3	2483.50	62.27 PK	74.00	-11.73	1.56 V	158	64.21	-1.94
4	2483.50	49.22 AV	54.00	-4.78	1.56 V	158	51.16	-1.94
5	4904.00	45.07 PK	74.00	-28.93	2.74 V	187	39.36	5.71
6	4904.00	33.02 AV	54.00	-20.98	2.74 V	187	27.31	5.71

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.


BELOW 1GHz WORST-CASE DATA

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	66.62	26.05 QP	40.00	-13.95	1.88 H	55	34.12	-8.07
2	94.41	24.44 QP	43.50	-19.06	1.69 H	294	36.41	-11.97
3	172.35	23.13 QP	43.50	-20.37	1.72 H	311	29.77	-6.64
4	305.04	24.71 QP	46.00	-21.29	1.81 H	216	28.72	-4.01
5	349.08	26.25 QP	46.00	-19.75	2.17 H	138	29.51	-3.26
6	463.54	28.84 QP	46.00	-17.16	2.26 H	5	29.47	-0.63

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

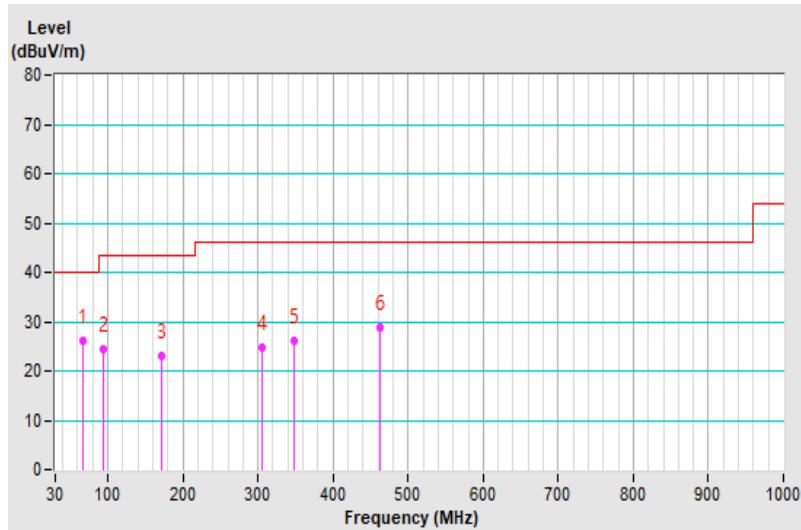


RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.53	30.87 QP	40.00	-9.13	2.43 V	166	39.56	-8.69
2	48.62	27.62 QP	40.00	-12.38	2.53 V	164	34.40	-6.78
3	90.67	26.31 QP	43.50	-17.19	1.27 V	360	38.60	-12.29
4	167.64	29.09 QP	43.50	-14.41	1.66 V	37	35.41	-6.32
5	316.63	26.04 QP	46.00	-19.96	1.85 V	360	29.67	-3.63
6	366.78	26.39 QP	46.00	-19.61	2.19 V	132	29.20	-2.81

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

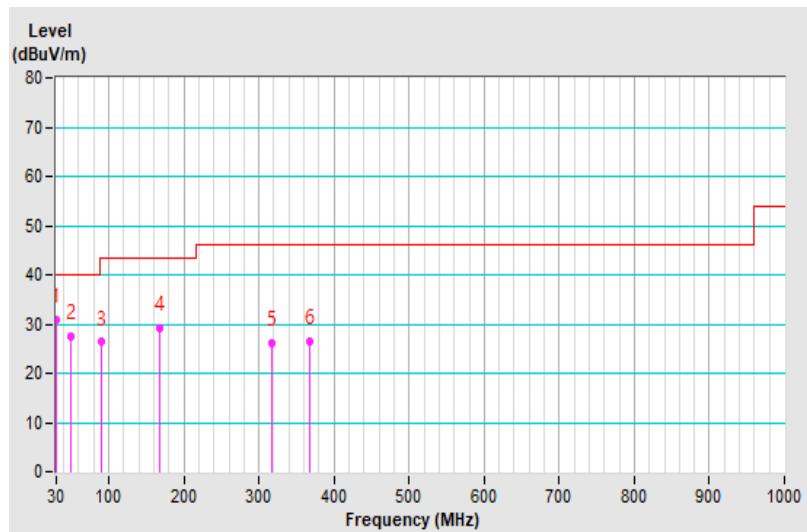

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model no.	Serial No.	Calibrated Date	Calibrated Until
Test Receiver ESR3 R&S	ESR3	102412	2021/1/29	2022/1/28
LISN SCHWARZBECK	NSLK 8128	8128-244	2021/11/11	2022/11/10
LISN SCHWARZBECK	NNLK8129	8129229	2021/5/20	2022/5/19
DC LISN SCHWARZBECK	NNLK 8121	8121-808	2021/4/18	2022/4/17
LISN SCHWARZBECK	NNLK 8121	8121-731	2021/4/28	2022/4/27
LISN R&S	ENV216	101196	2021/4/26	2022/4/25
LISN R&S	ESH3-Z5	100220	2020/12/1	2021/11/30
LISN R&S	ESH3-Z6	844950/018	2021/7/25	2022/7/24
DC LISN R&S	ESH3-Z6	100219	2021/7/25	2022/7/24
High Voltage Probe Schwarzbeck	TK9420	00982	2021/1/8	2022/1/7
RF Coaxial Cable Commate	5D-FB	Cable-CO5-01	2021/1/29	2022/1/28
Attenuator STI	STI02-2200-10	NO.4	2021/9/3	2022/9/2
50 Ohms Terminator LYNICS	0900510	E1-01-305	2021/2/17	2022/2/16
Isolation Transformer Erika Fiedler	D-65396	017	2021/9/9	2022/9/8
Software BVADT	Cond_V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in Linkou Conduction05
3. The VCCI Site Registration No. C-11093.
4. Tested Date: 2021/11/27

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

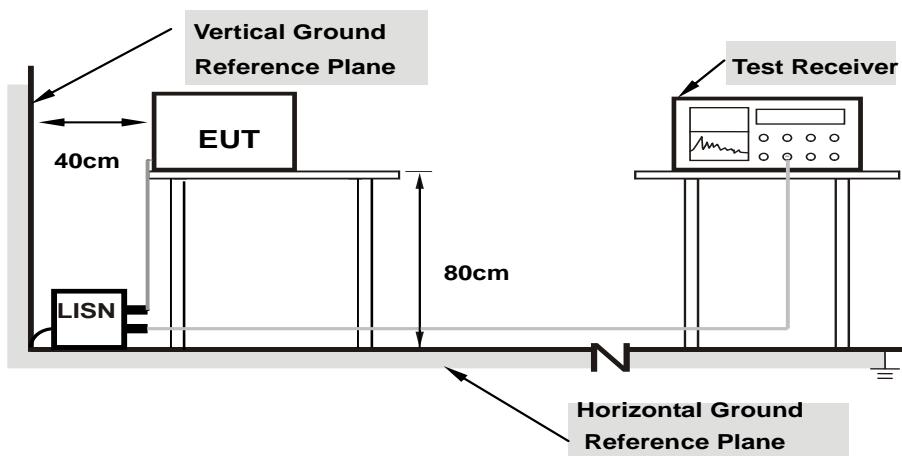

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as Item 4.1.6.


4.2.7 Test Results

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.88	45.05	32.64	54.93	42.52	66.00	56.00	-11.07	-13.48
2	0.24164	9.88	46.63	35.21	56.51	45.09	62.04	52.04	-5.53	-6.95
3	0.47060	9.91	39.37	22.75	49.28	32.66	56.50	46.50	-7.22	-13.84
4	0.59600	9.92	42.63	32.54	52.55	42.46	56.00	46.00	-3.45	-3.54
5	1.04800	9.95	32.05	19.06	42.00	29.01	56.00	46.00	-14.00	-16.99
6	7.67200	10.14	21.87	14.63	32.01	24.77	60.00	50.00	-27.99	-25.23
7	20.02400	10.45	21.23	15.23	31.68	25.68	60.00	50.00	-28.32	-24.32

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

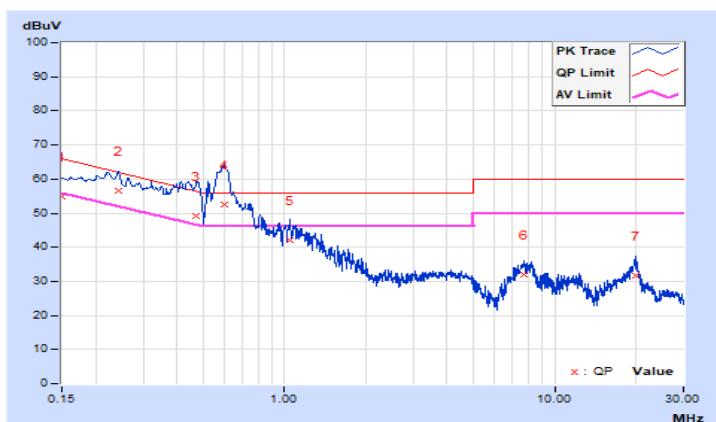


RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15770	9.89	42.53	24.29	52.42	34.18	65.58	55.58	-13.16	-21.40
2	0.22200	9.89	43.75	25.97	53.64	35.86	62.74	52.74	-9.10	-16.88
3	0.42577	9.91	37.96	20.92	47.87	30.83	57.33	47.33	-9.46	-16.50
4	0.60000	9.93	40.43	23.06	50.36	32.99	56.00	46.00	-5.64	-13.01
5	1.22000	9.97	20.66	5.55	30.63	15.52	56.00	46.00	-25.37	-30.48
6	7.62000	10.15	20.60	13.21	30.75	23.36	60.00	50.00	-29.25	-26.64
7	20.00400	10.47	21.21	14.73	31.68	25.20	60.00	50.00	-28.32	-24.80

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

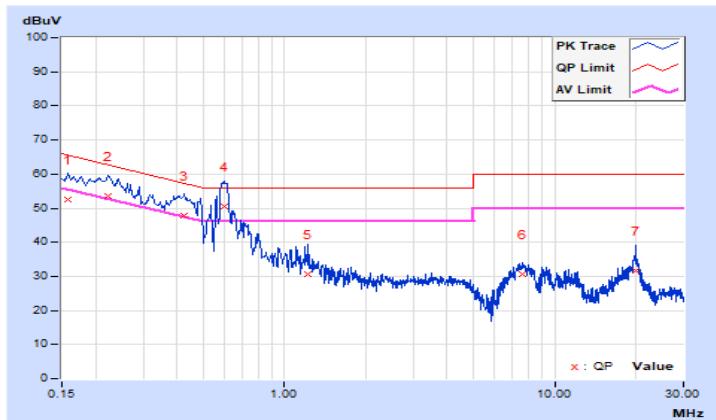

4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Description & Manufacturer	Model no.	Serial No.	Calibrated Date	Calibrated Until
Spectrum Analyzer R&S	FSV40	101042	2021/9/9	2022/9/8

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in LK - Oven
 3. Tested Date: 2021/11/26

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	8.09	8.08	0.5	Pass
6	2437	8.11	9.08	0.5	Pass
11	2462	8.08	8.15	0.5	Pass

802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.33	16.34	0.5	Pass
6	2437	16.33	16	0.5	Pass
11	2462	16.13	15.94	0.5	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	18.84	18.71	0.5	Pass
6	2437	18.79	18.74	0.5	Pass
11	2462	18.79	18.63	0.5	Pass

802.11ax (HE40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	37.58	37.77	0.5	Pass
6	2437	37.98	37.66	0.5	Pass
9	2452	37.66	37.54	0.5	Pass

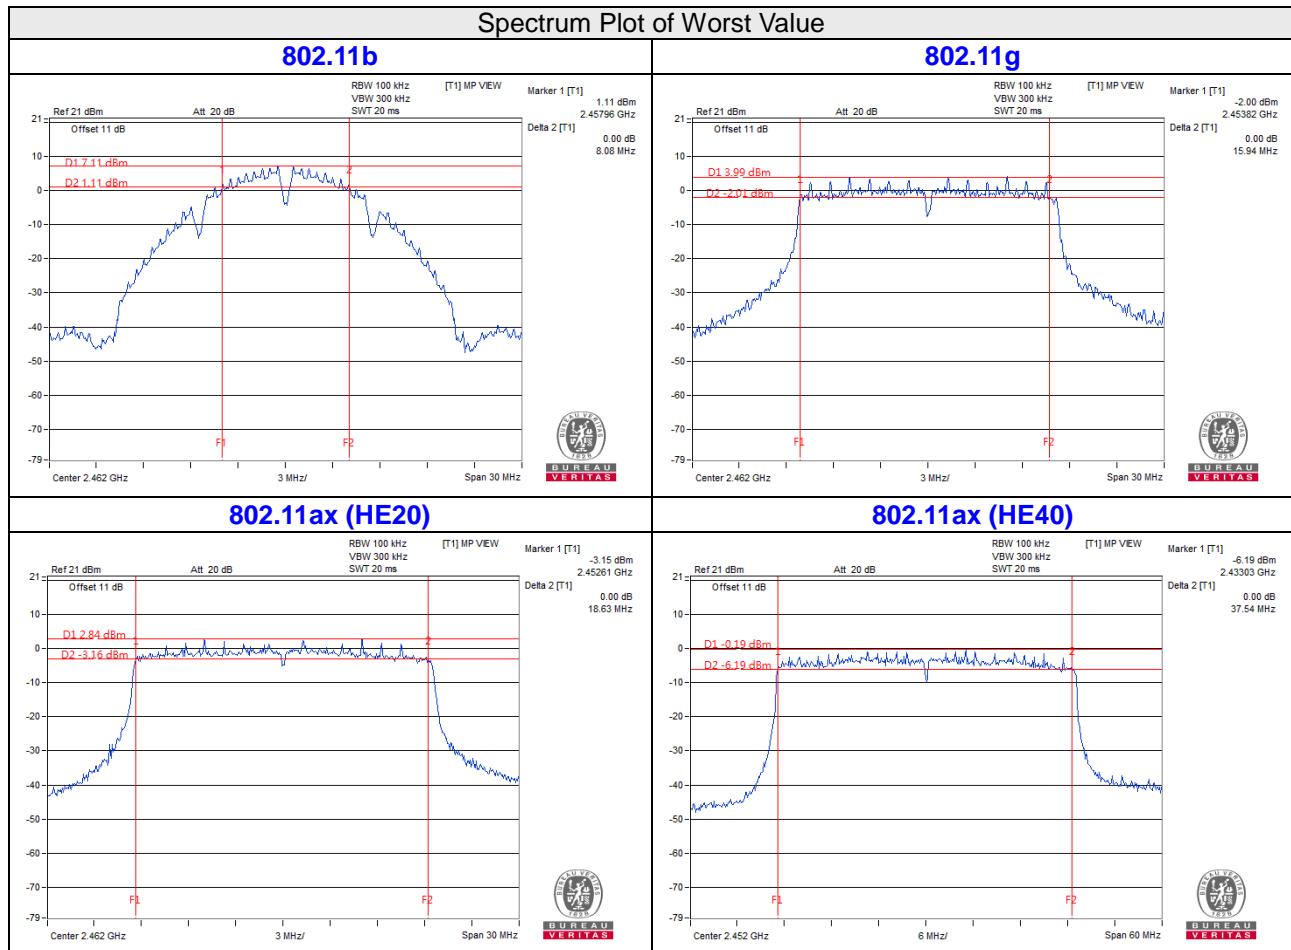

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Description & Manufacturer	Model no.	Serial No.	Calibrated Date	Calibrated Until
Pulse Power Sensor Anritsu	MA2411B	0738404	2021/4/15	2022/4/14
Peak Power meter Anritsu	ML2495A	0842014	2021/4/15	2022/4/14

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in LK - Oven
 3. Tested Date: 2021/11/26

4.4.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

FOR PEAK POWER

802.11b

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	19.47	19.43	176.212	22.46	30	Pass
6	2437	19.06	19.60	171.739	22.35	30	Pass
11	2462	18.99	19.87	176.301	22.46	30	Pass

802.11g

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.96	20.90	247.765	23.94	30	Pass
6	2437	20.63	20.70	233.101	23.68	30	Pass
11	2462	20.49	21.04	239.001	23.78	30	Pass

802.11n (HT20)

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.33	20.61	222.975	23.48	30	Pass
6	2437	19.99	20.55	213.271	23.29	30	Pass
11	2462	19.88	20.95	221.726	23.46	30	Pass

802.11n (HT40)

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	20.29	20.41	216.806	23.36	30	Pass
6	2437	20.07	20.66	218.037	23.39	30	Pass
9	2452	20.17	20.98	229.306	23.60	30	Pass

VHT20

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.39	20.68	226.346	23.55	30	Pass
6	2437	20.06	20.58	215.679	23.34	30	Pass
11	2462	19.92	20.99	223.778	23.50	30	Pass

VHT40

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	20.34	20.43	218.551	23.40	30	Pass
6	2437	20.09	20.70	219.584	23.42	30	Pass
9	2452	20.22	21.00	231.089	23.64	30	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.41	20.71	227.661	23.57	30	Pass
6	2437	20.08	20.63	217.47	23.37	30	Pass
11	2462	19.94	21.02	225.102	23.52	30	Pass

802.11ax (HE40)

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	20.37	20.45	219.81	23.42	30	Pass
6	2437	20.13	20.74	221.615	23.46	30	Pass
9	2452	20.26	21.03	232.935	23.67	30	Pass

FOR AVERAGE POWER
802.11b

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	17.05	17.08	101.75	20.08
6	2437	16.68	17.21	99.16	19.96
11	2462	16.63	17.48	102.001	20.09

802.11g

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	14.40	14.56	56.118	17.49
6	2437	14.05	14.55	53.92	17.32
11	2462	14.04	14.78	55.412	17.44

802.11n (HT20)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	13.06	13.32	41.708	16.20
6	2437	12.75	13.25	39.971	16.02
11	2462	12.70	13.67	41.902	16.22

802.11n (HT40)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
3	2422	13.15	13.30	42.033	16.24
6	2437	12.93	13.55	42.28	16.26
9	2452	13.05	13.67	43.465	16.38

VHT20

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	13.08	13.36	42.001	16.23
6	2437	12.77	13.32	40.402	16.06
11	2462	12.72	13.74	42.366	16.27

VHT40

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
3	2422	13.20	13.32	42.371	16.27
6	2437	13.00	13.57	42.704	16.30
9	2452	13.10	13.73	44.022	16.44

802.11ax (HE20)

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	13.10	13.40	42.295	16.26
6	2437	12.82	13.34	40.72	16.10
11	2462	12.74	13.77	42.616	16.30

802.11ax (HE40)


Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
3	2422	13.23	13.37	42.765	16.31
6	2437	13.04	13.62	43.152	16.35
9	2452	13.14	13.76	44.375	16.47

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm in any 3 kHz.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.3.3 to get information of above instrument.

4.5.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-8.22	3.01	-5.21	7.7	Pass
	6	2437	-8.19	3.01	-5.18	7.7	Pass
	11	2462	-7.97	3.01	-4.96	7.7	Pass
1	1	2412	-7.6	3.01	-4.59	7.7	Pass
	6	2437	-7.02	3.01	-4.01	7.7	Pass
	11	2462	-8.16	3.01	-5.15	7.7	Pass

Note:

- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is measure value add 10 log (N_{ANT}) dB.
- Directional gain = $10 \log[(10^{\text{Chain0/20}} + 10^{\text{Chain1/20}})^2 / 2] = 6.3 \text{dBi} > 6 \text{dBi}$, so the power density limit shall be reduced to $8-(6.3-6)=7.7 \text{dBm/3kHz}$.

802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-11.84	3.01	-8.83	7.7	Pass
	6	2437	-11.54	3.01	-8.53	7.7	Pass
	11	2462	-11.21	3.01	-8.2	7.7	Pass
1	1	2412	-13.2	3.01	-10.19	7.7	Pass
	6	2437	-12.44	3.01	-9.43	7.7	Pass
	11	2462	-12.57	3.01	-9.56	7.7	Pass

Note:

- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is measure value add 10 log (N_{ANT}) dB.
- Directional gain = $10 \log[(10^{\text{Chain0/20}} + 10^{\text{Chain1/20}})^2 / 2] = 6.3 \text{dBi} > 6 \text{dBi}$, so the power density limit shall be reduced to $8-(6.3-6)=7.7 \text{dBm/3kHz}$.

802.11ax (HE20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-12.89	3.01	-9.88	7.7	Pass
	6	2437	-13.28	3.01	-10.27	7.7	Pass
	11	2462	-12.79	3.01	-9.78	7.7	Pass
1	1	2412	-13.18	3.01	-10.17	7.7	Pass
	6	2437	-12.83	3.01	-9.82	7.7	Pass
	11	2462	-12.39	3.01	-9.38	7.7	Pass

Note:


- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is measure value add 10 log (N_{ANT}) dB.
- Directional gain = $10 \log[(10^{Chain0/20} + 10^{Chain1/20})^2 / 2] = 6.3 \text{dBi} > 6 \text{dBi}$, so the power density limit shall be reduced to $8 - (6.3 - 6) = 7.7 \text{dBm/3kHz}$.

802.11ax (HE40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2422	-15.17	3.01	-12.16	7.7	Pass
	6	2437	-15.97	3.01	-12.96	7.7	Pass
	9	2452	-15.94	3.01	-12.93	7.7	Pass
1	3	2422	-14.74	3.01	-11.73	7.7	Pass
	6	2437	-15.55	3.01	-12.54	7.7	Pass
	9	2452	-14.94	3.01	-11.93	7.7	Pass

Note:

- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is measure value add 10 log (N_{ANT}) dB.
- Directional gain = $10 \log[(10^{Chain0/20} + 10^{Chain1/20})^2 / 2] = 6.3 \text{dBi} > 6 \text{dBi}$, so the power density limit shall be reduced to $8 - (6.3 - 6) = 7.7 \text{dBm/3kHz}$.

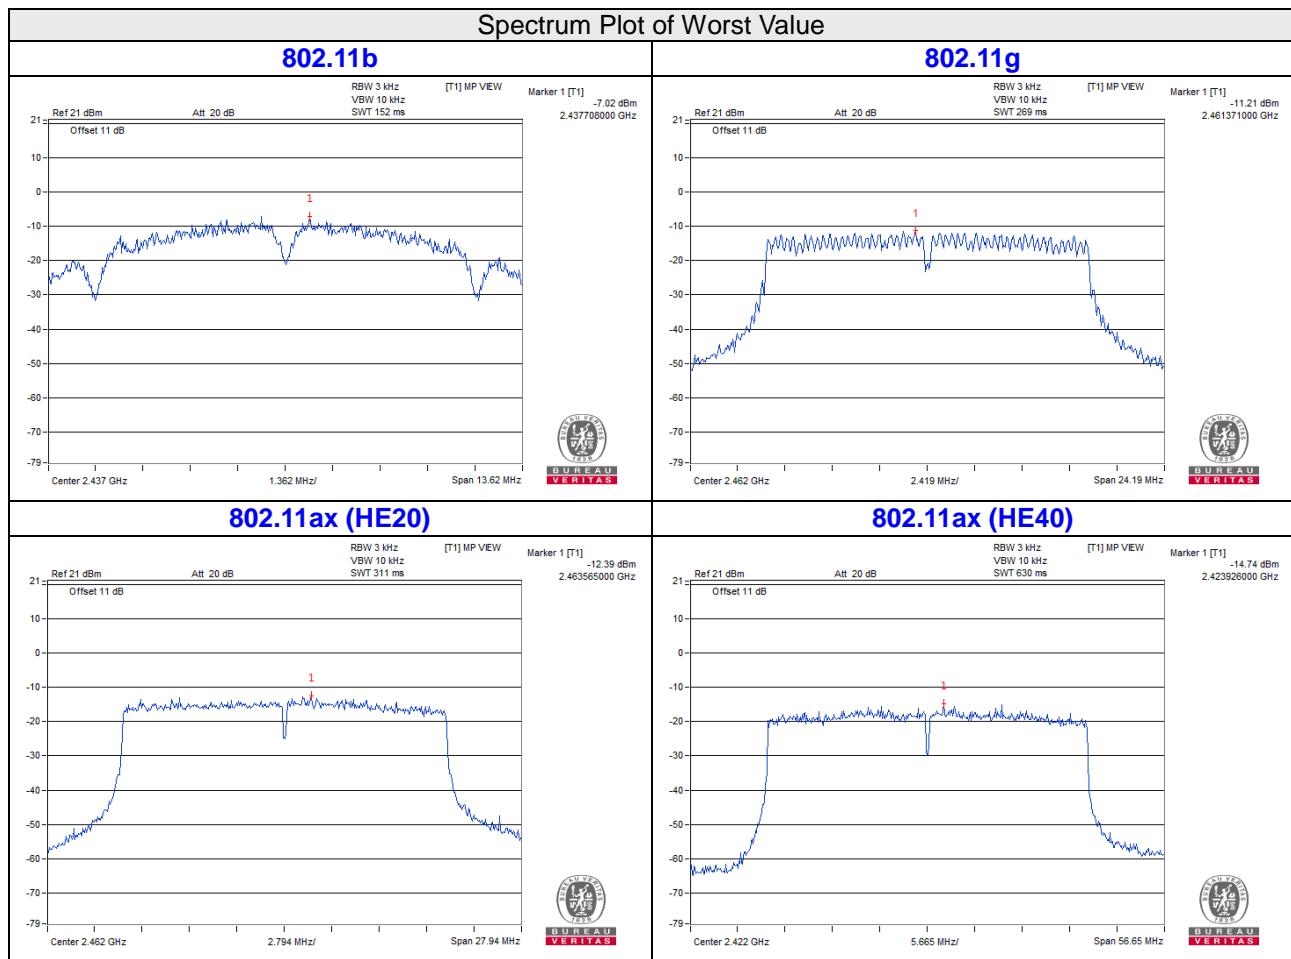


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.3.3 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.


4.6.6 EUT Operating Condition






Same as Item 4.3.6


4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b: Chain 0

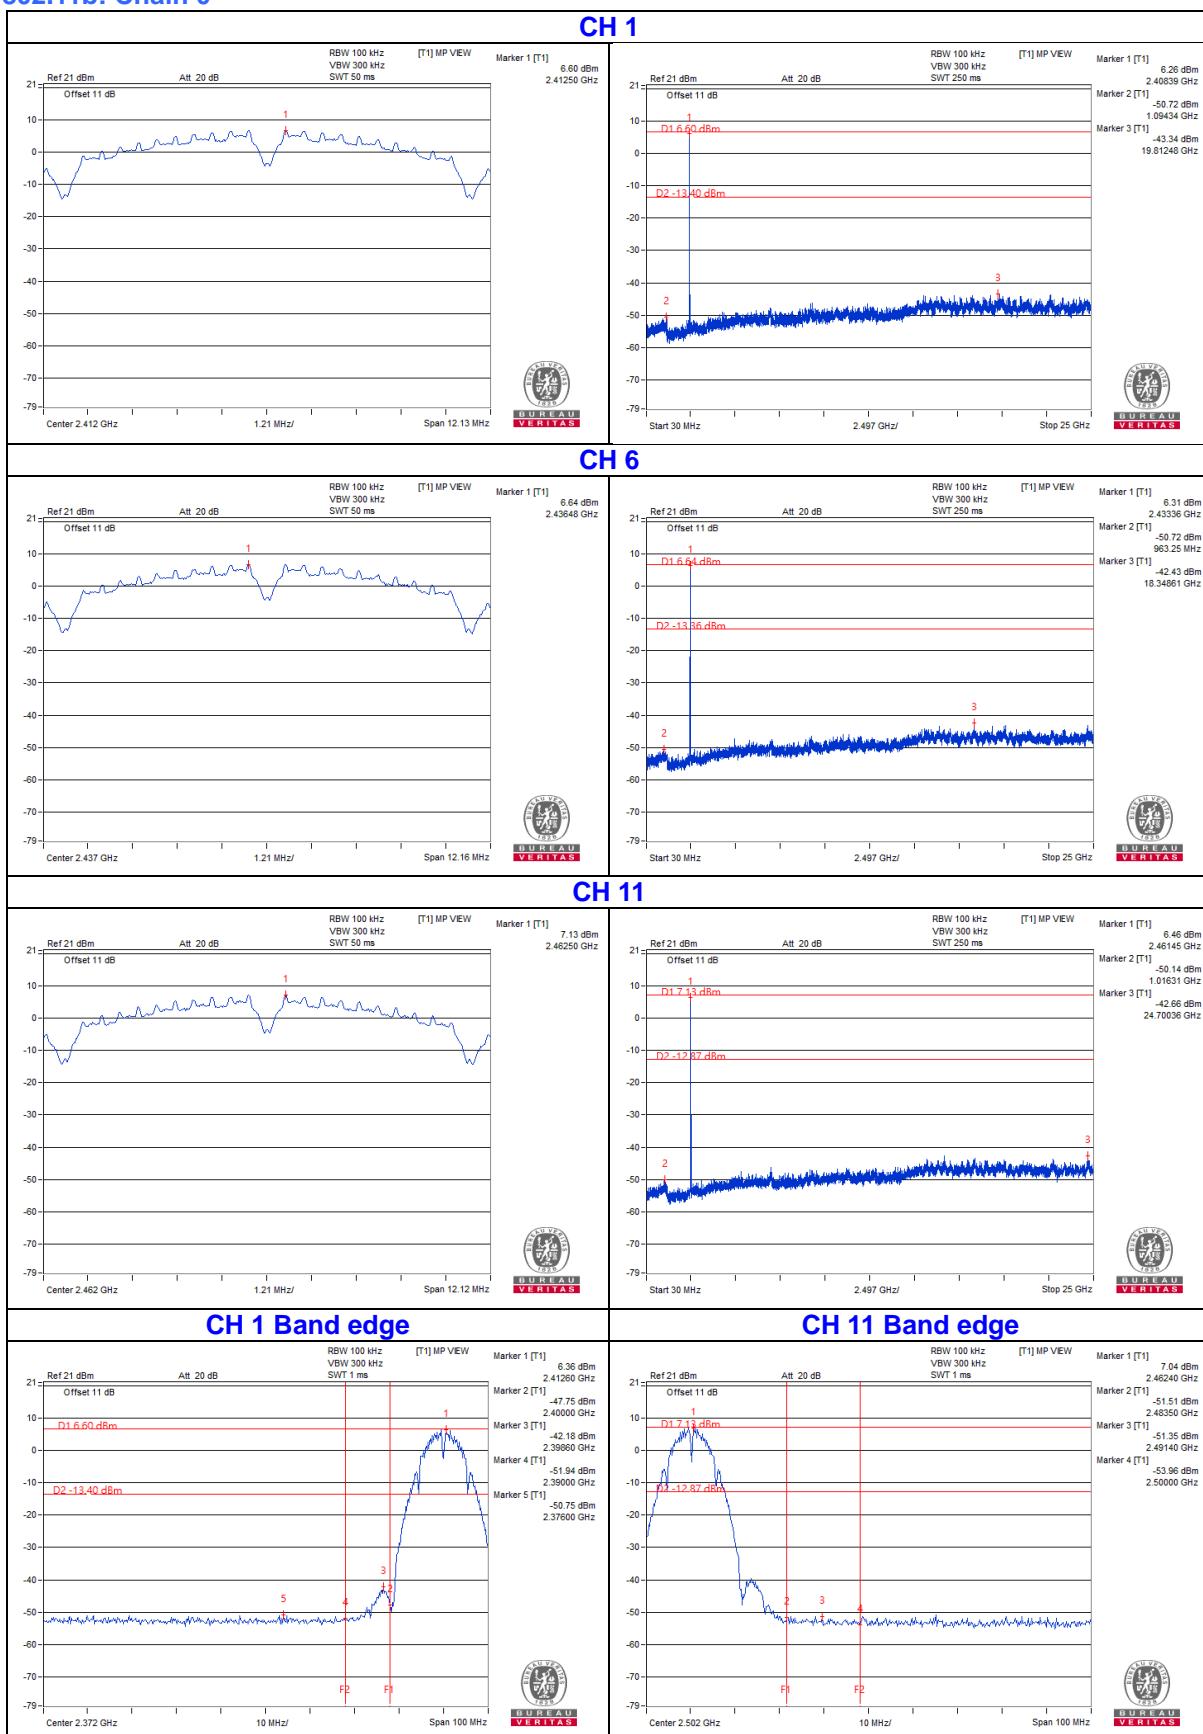


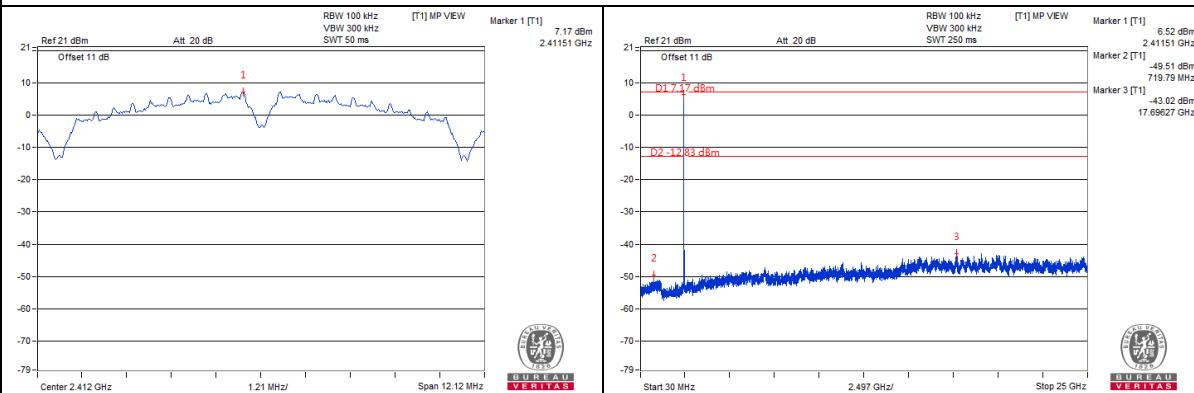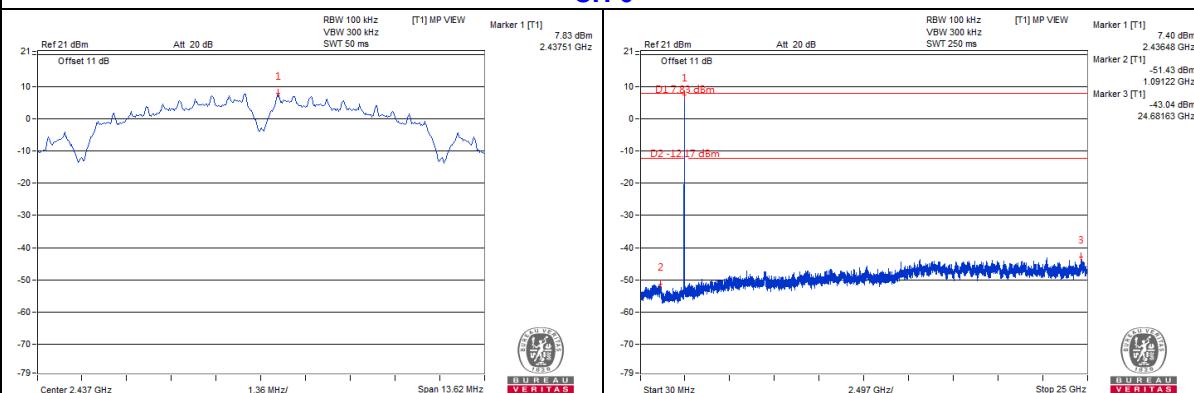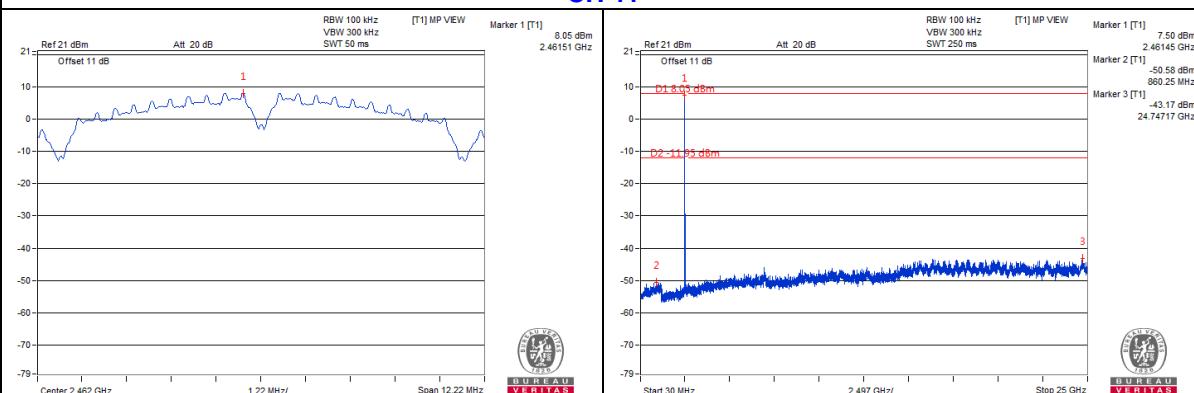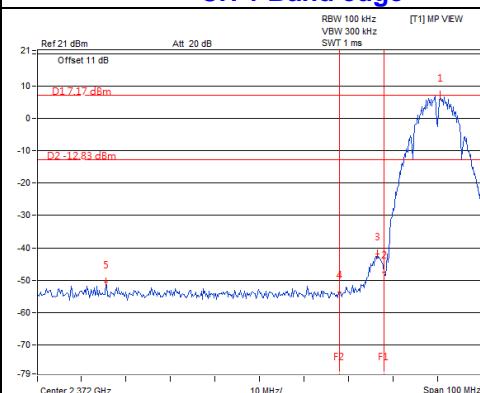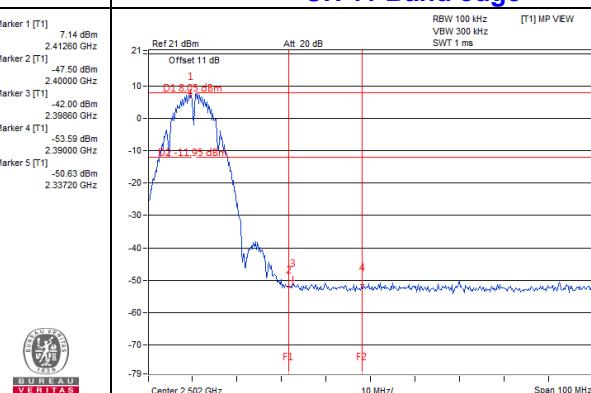802.11b: Chain 1
CH 1

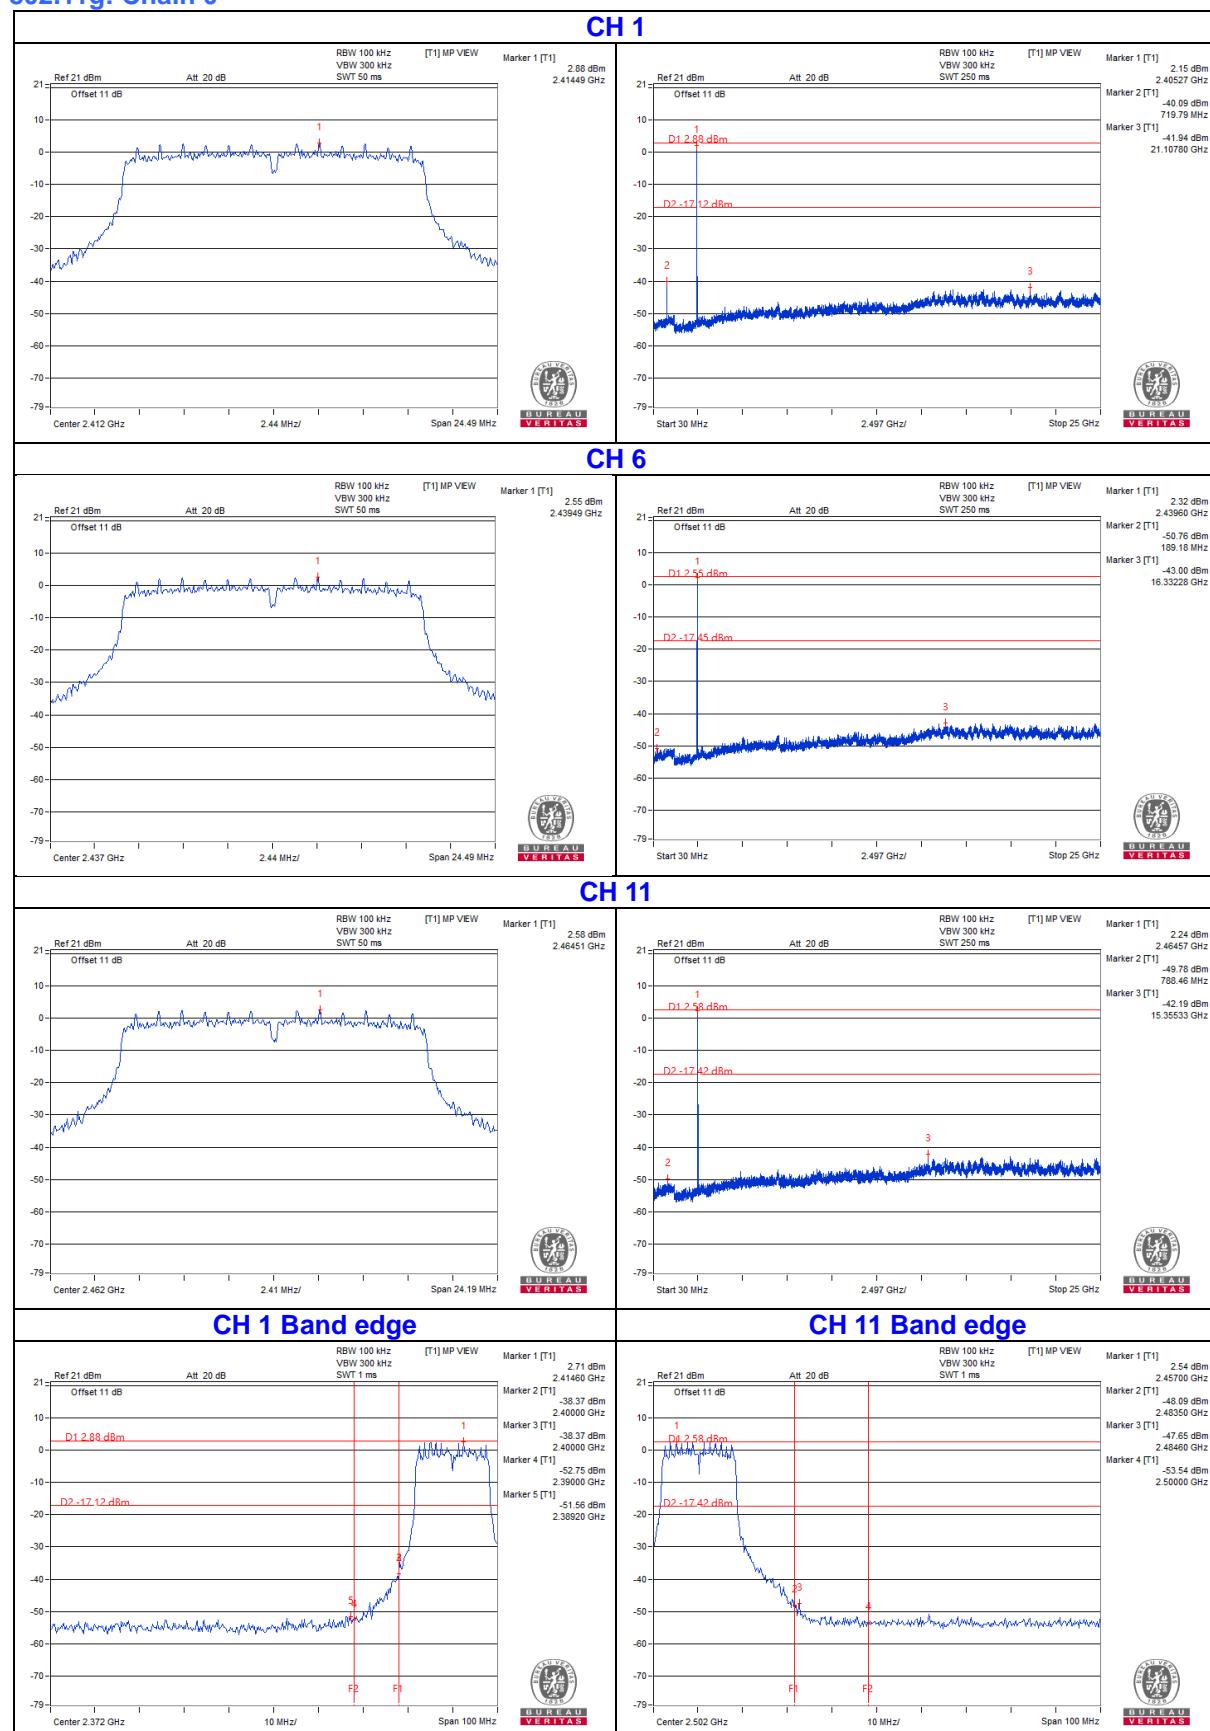CH 6

CH 11

CH 1 Band edge

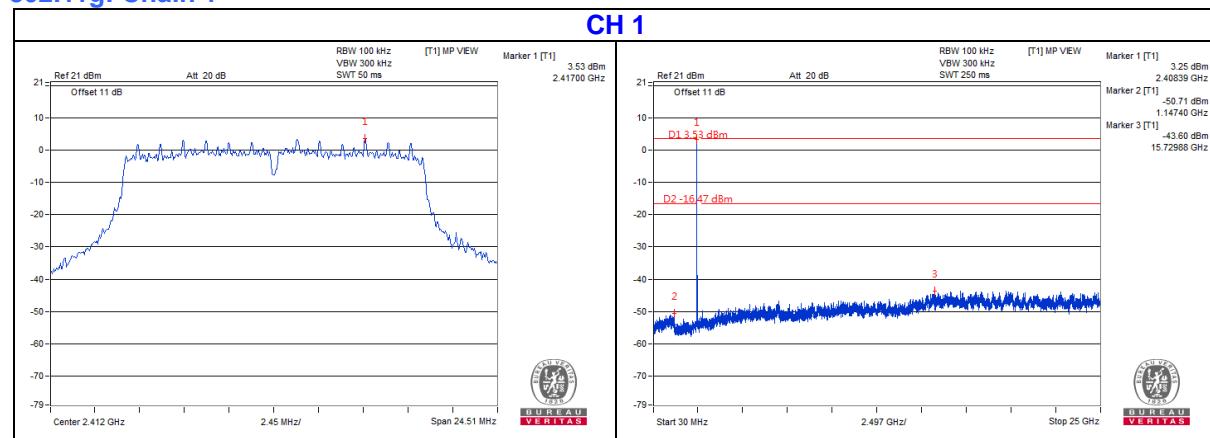CH 11 Band edge


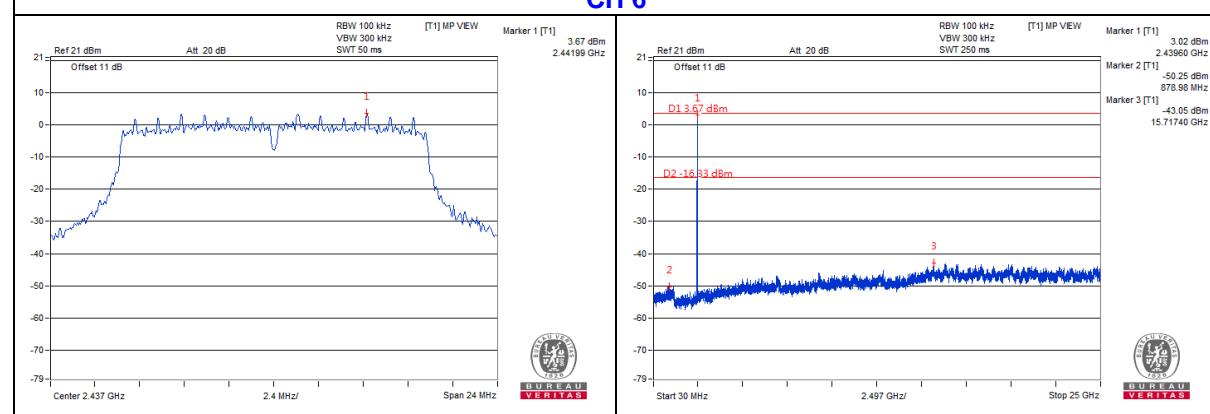
802.11g: Chain 0


802.11g: Chain 1


CH 1




CH 6




CH 11




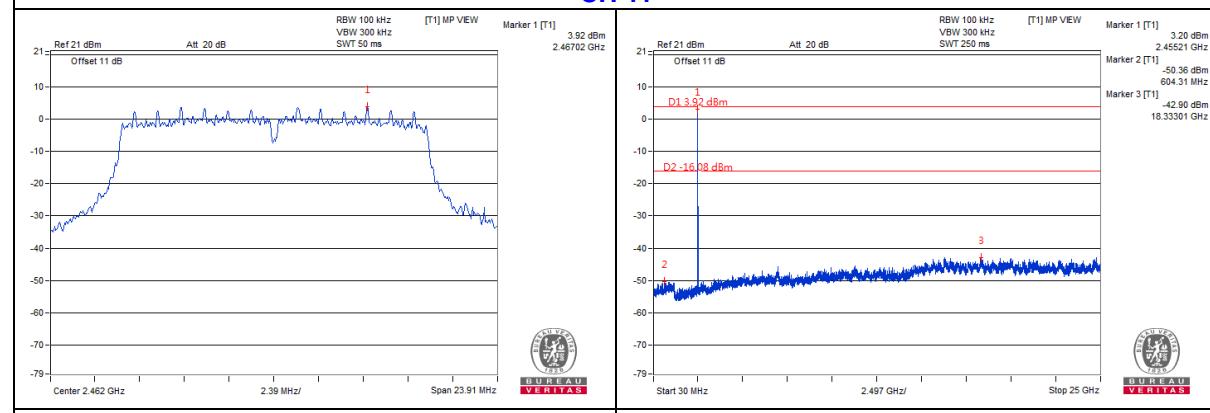






CH 1 Band edge

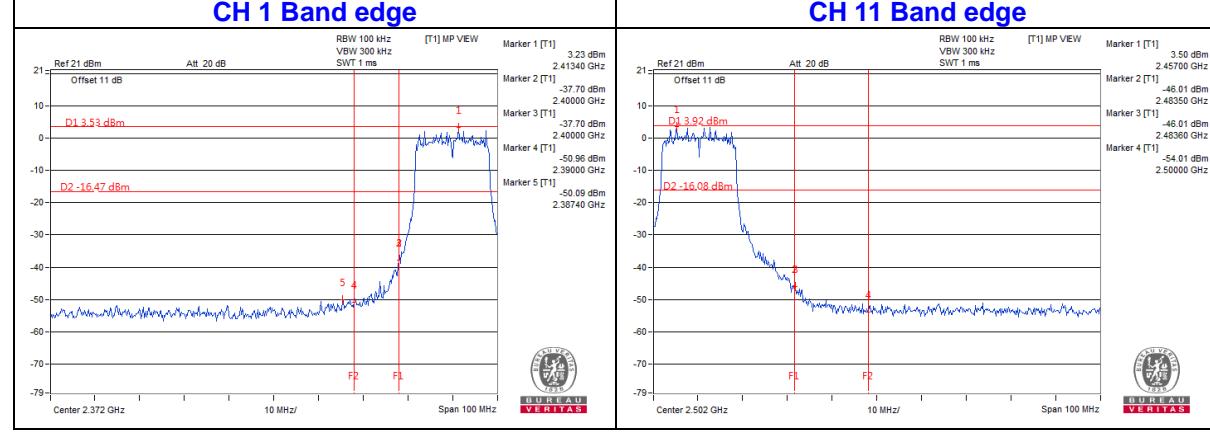

802.11ax (HE20): Chain 0

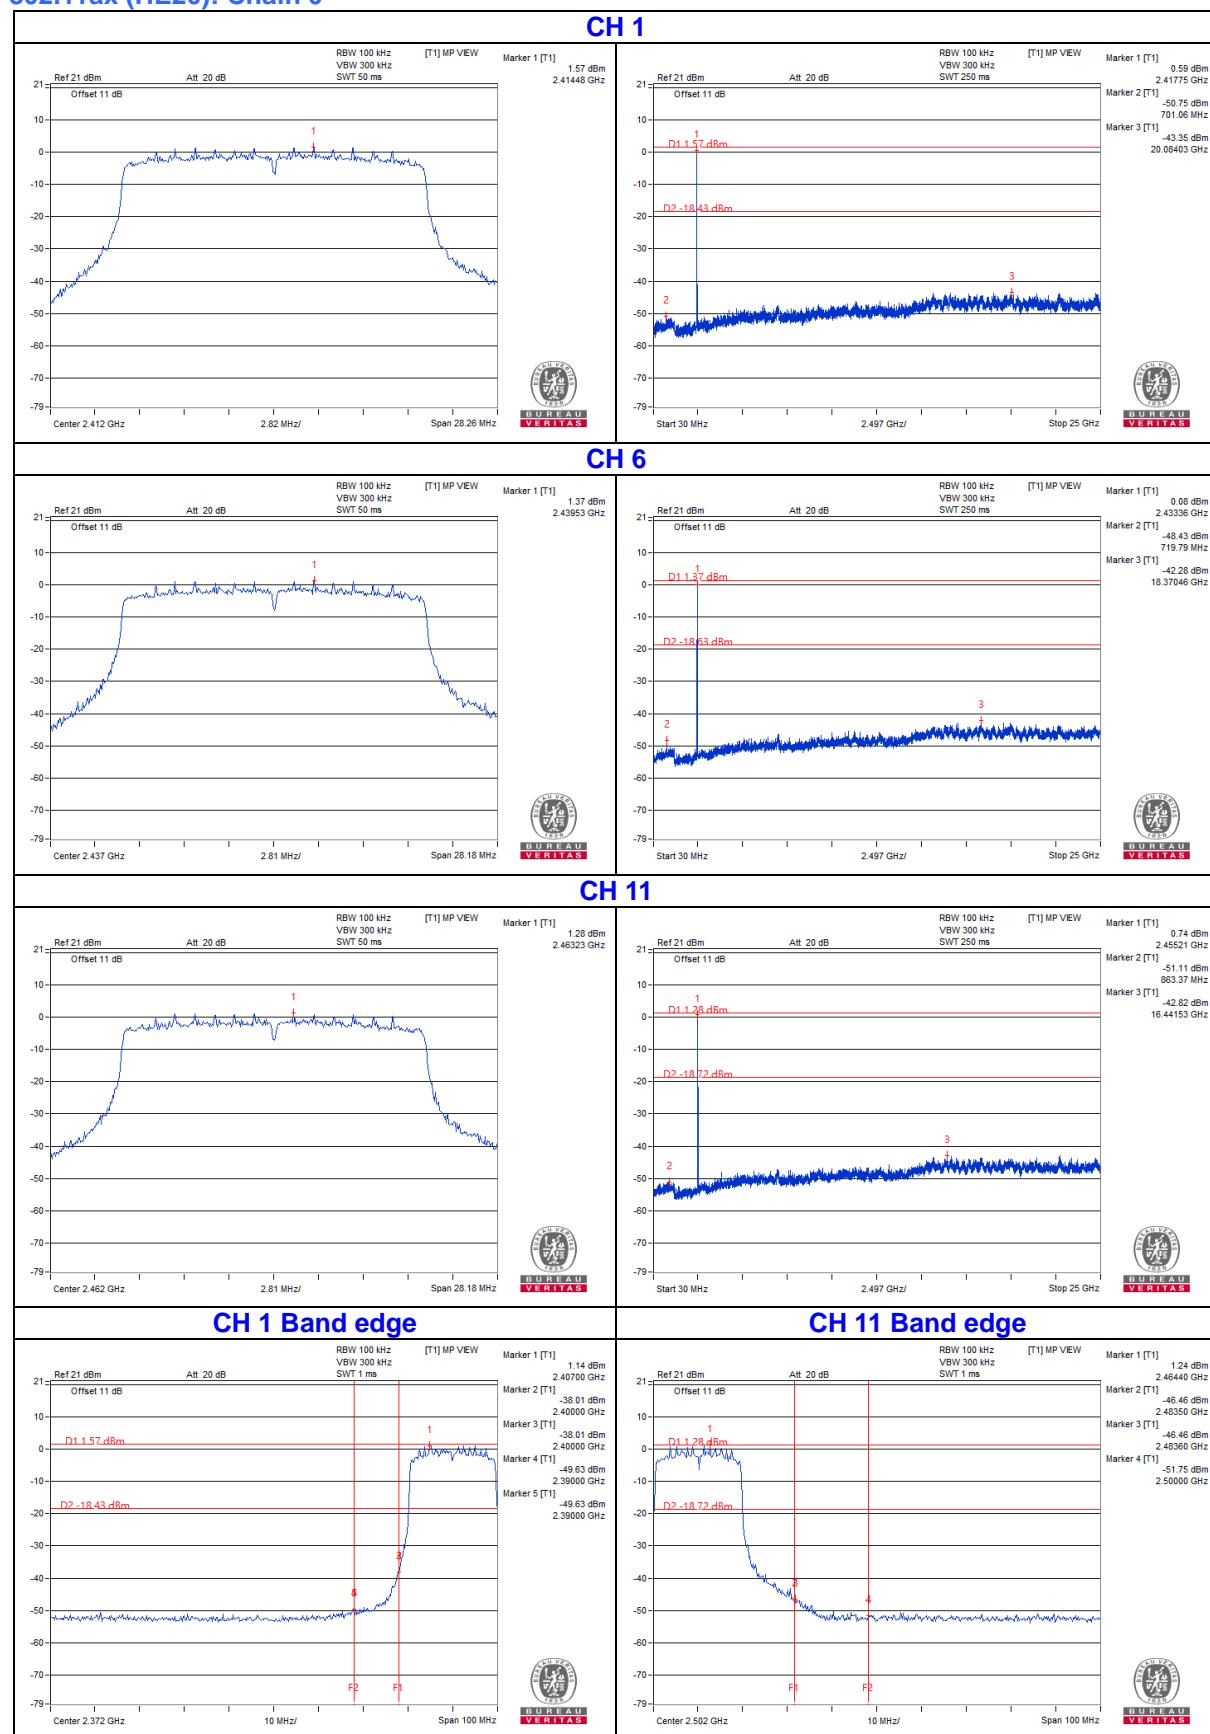


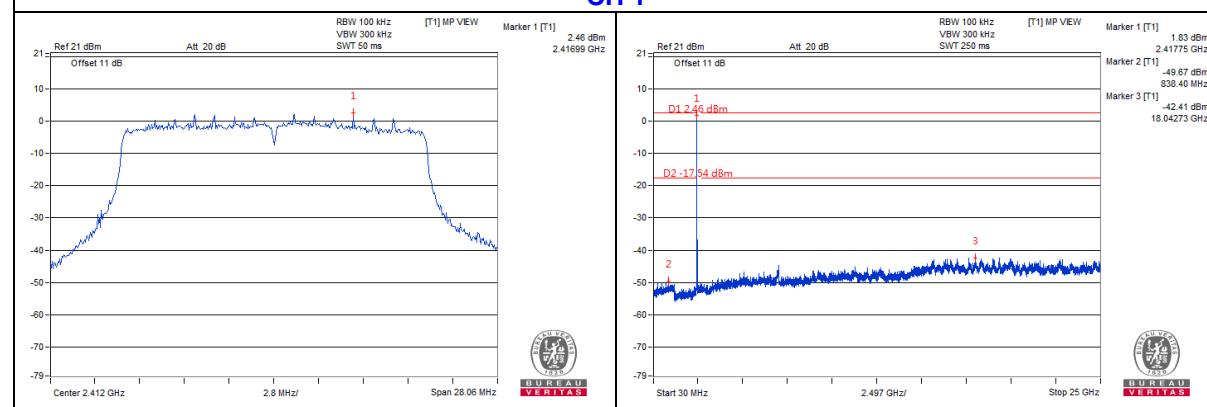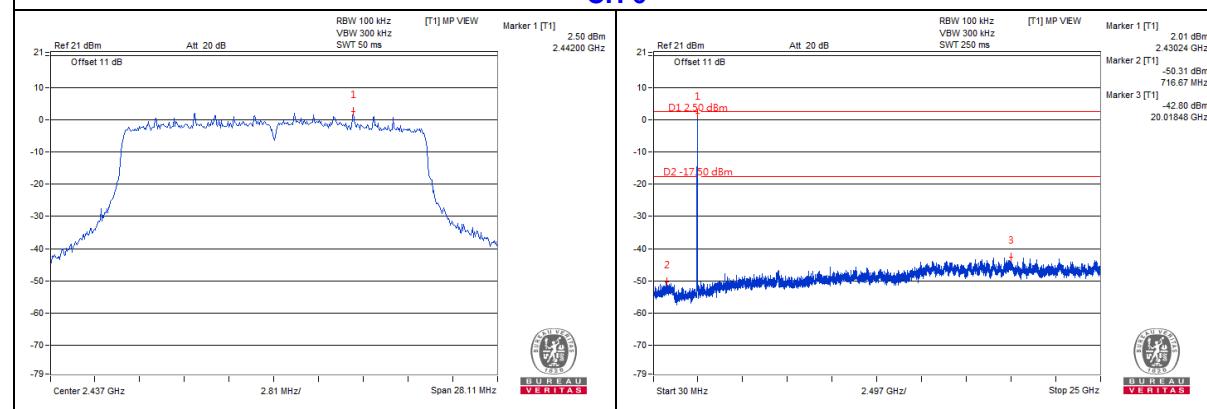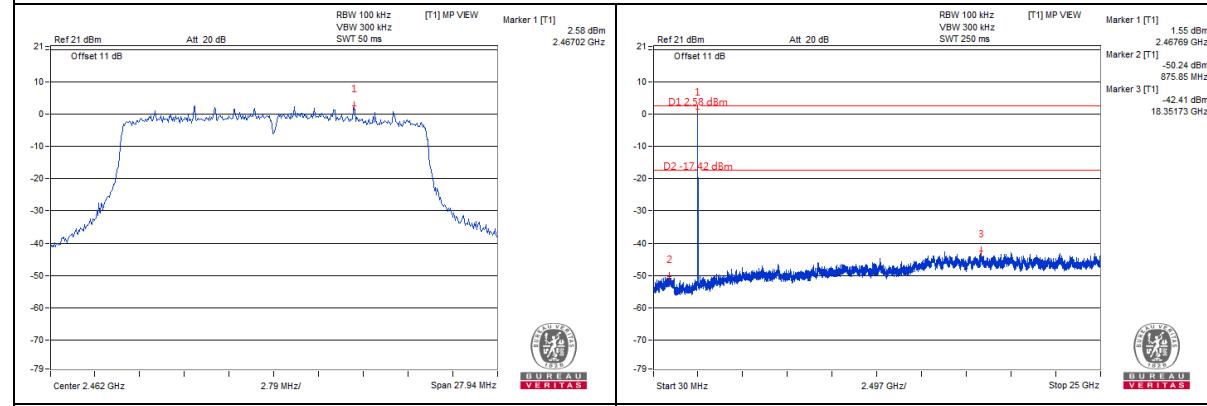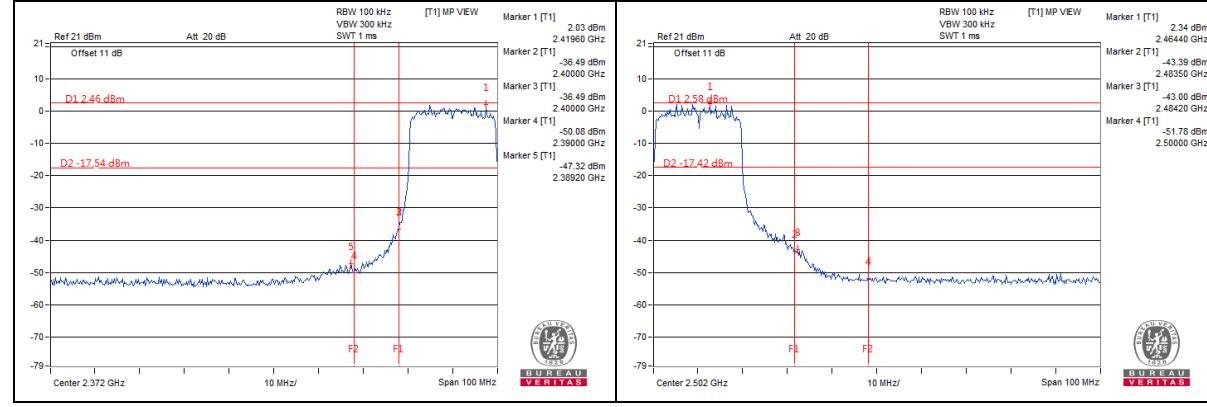802.11ax (HE20): Chain 1
CH 1

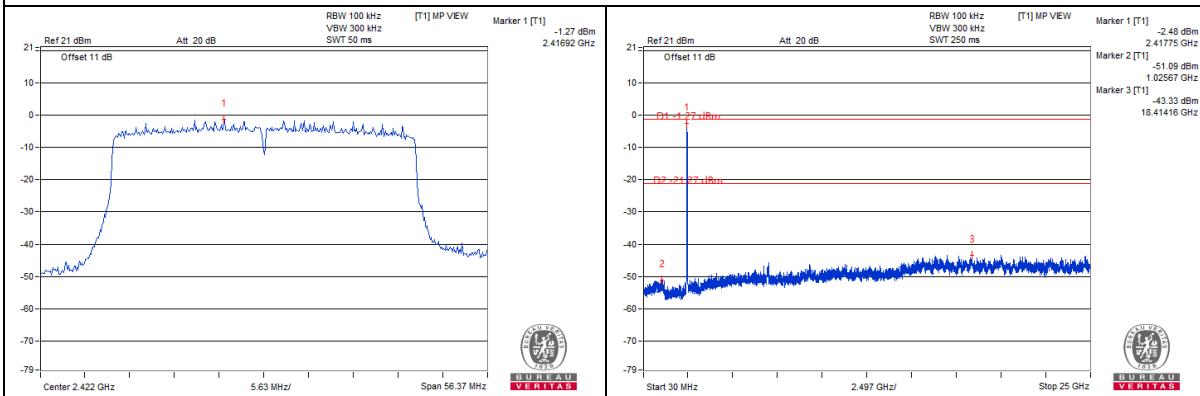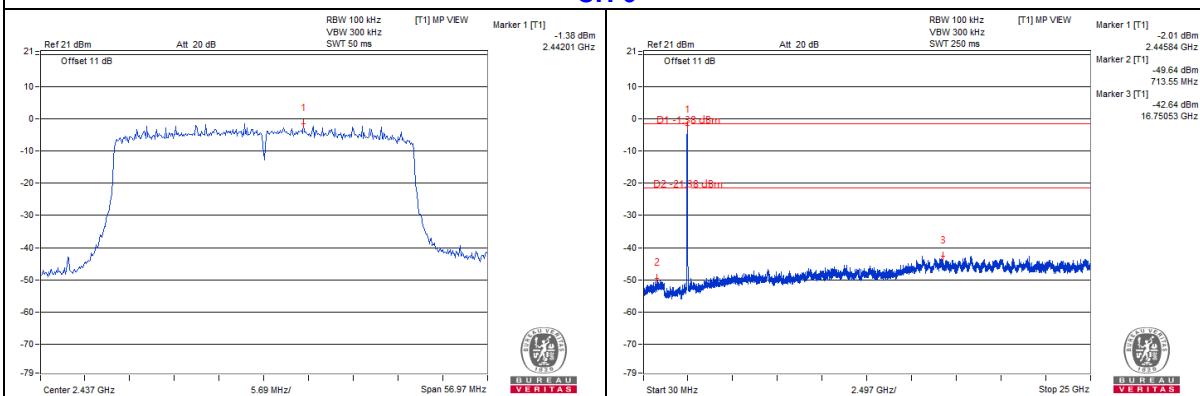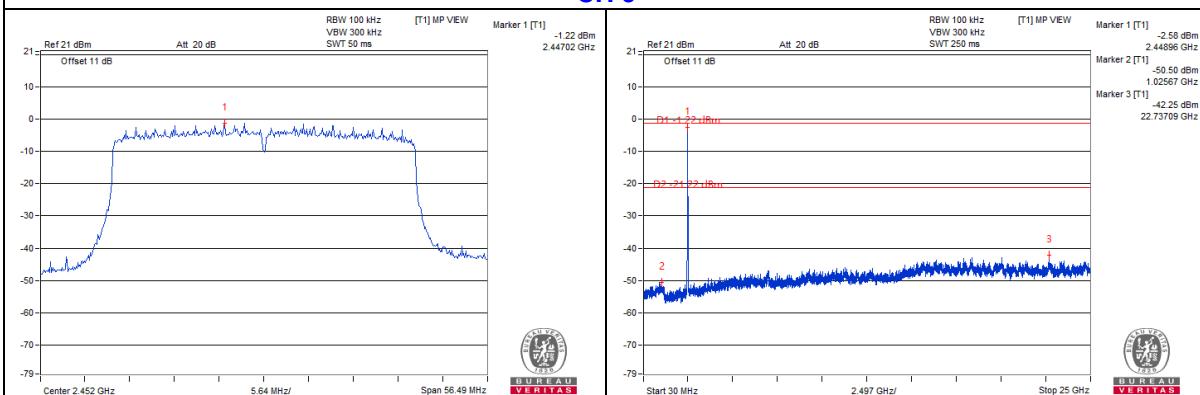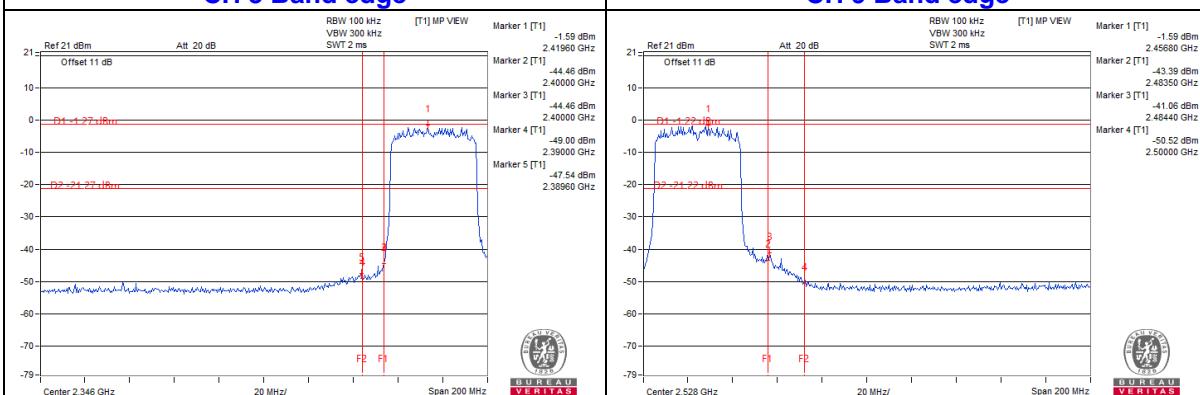CH 6

CH 11

CH 1 Band edge

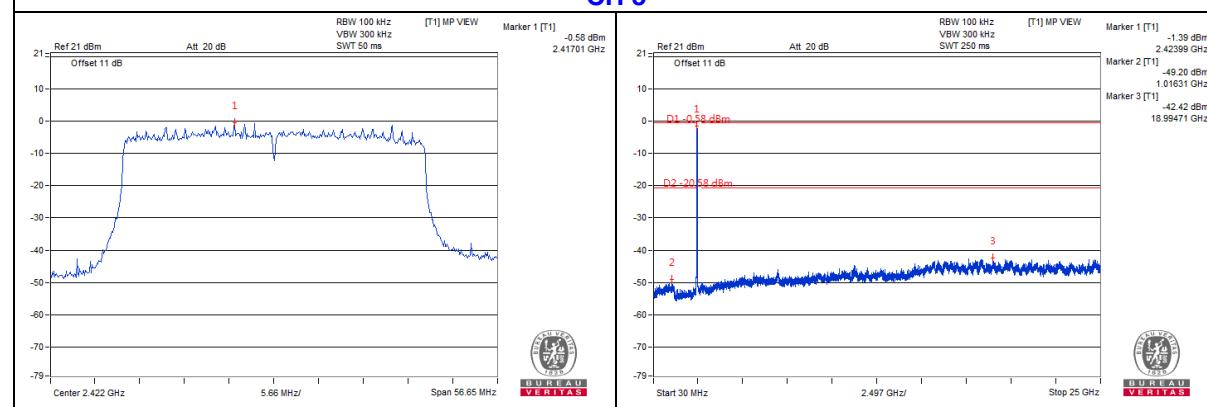
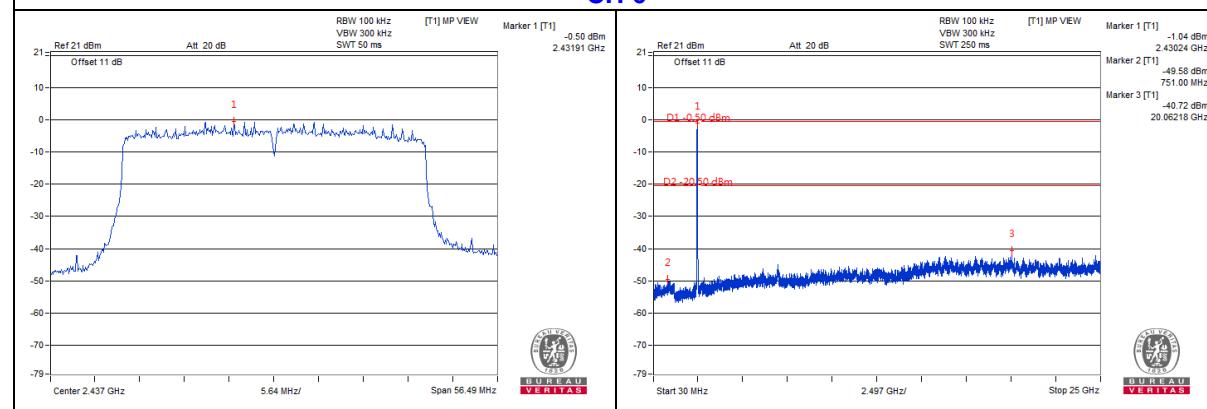
802.11ax (HE40): Chain 0
CH 3

CH 6

CH 9

CH 3 Band edge


802.11ax (HE40): Chain 1


CH 3




CH 6



CH 9

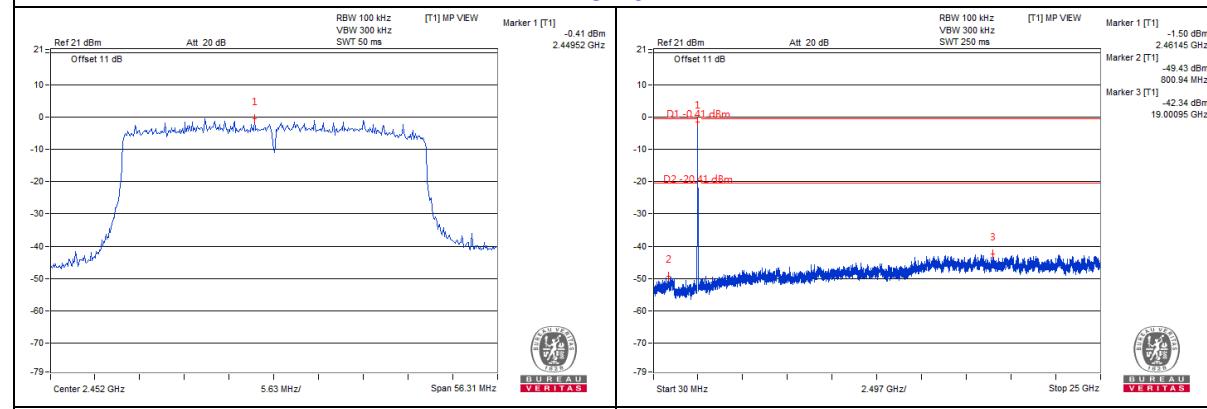


CH 3 Band edge

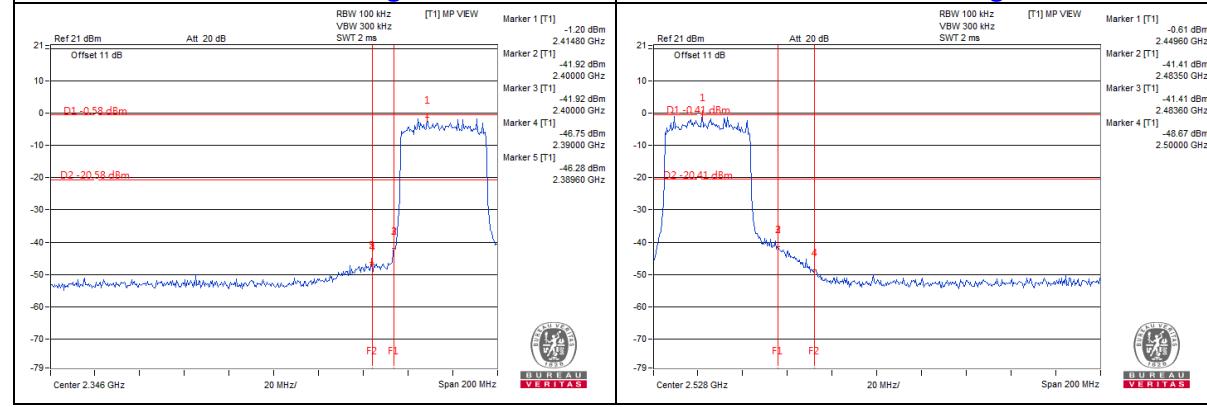



5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Band Edge Measurement

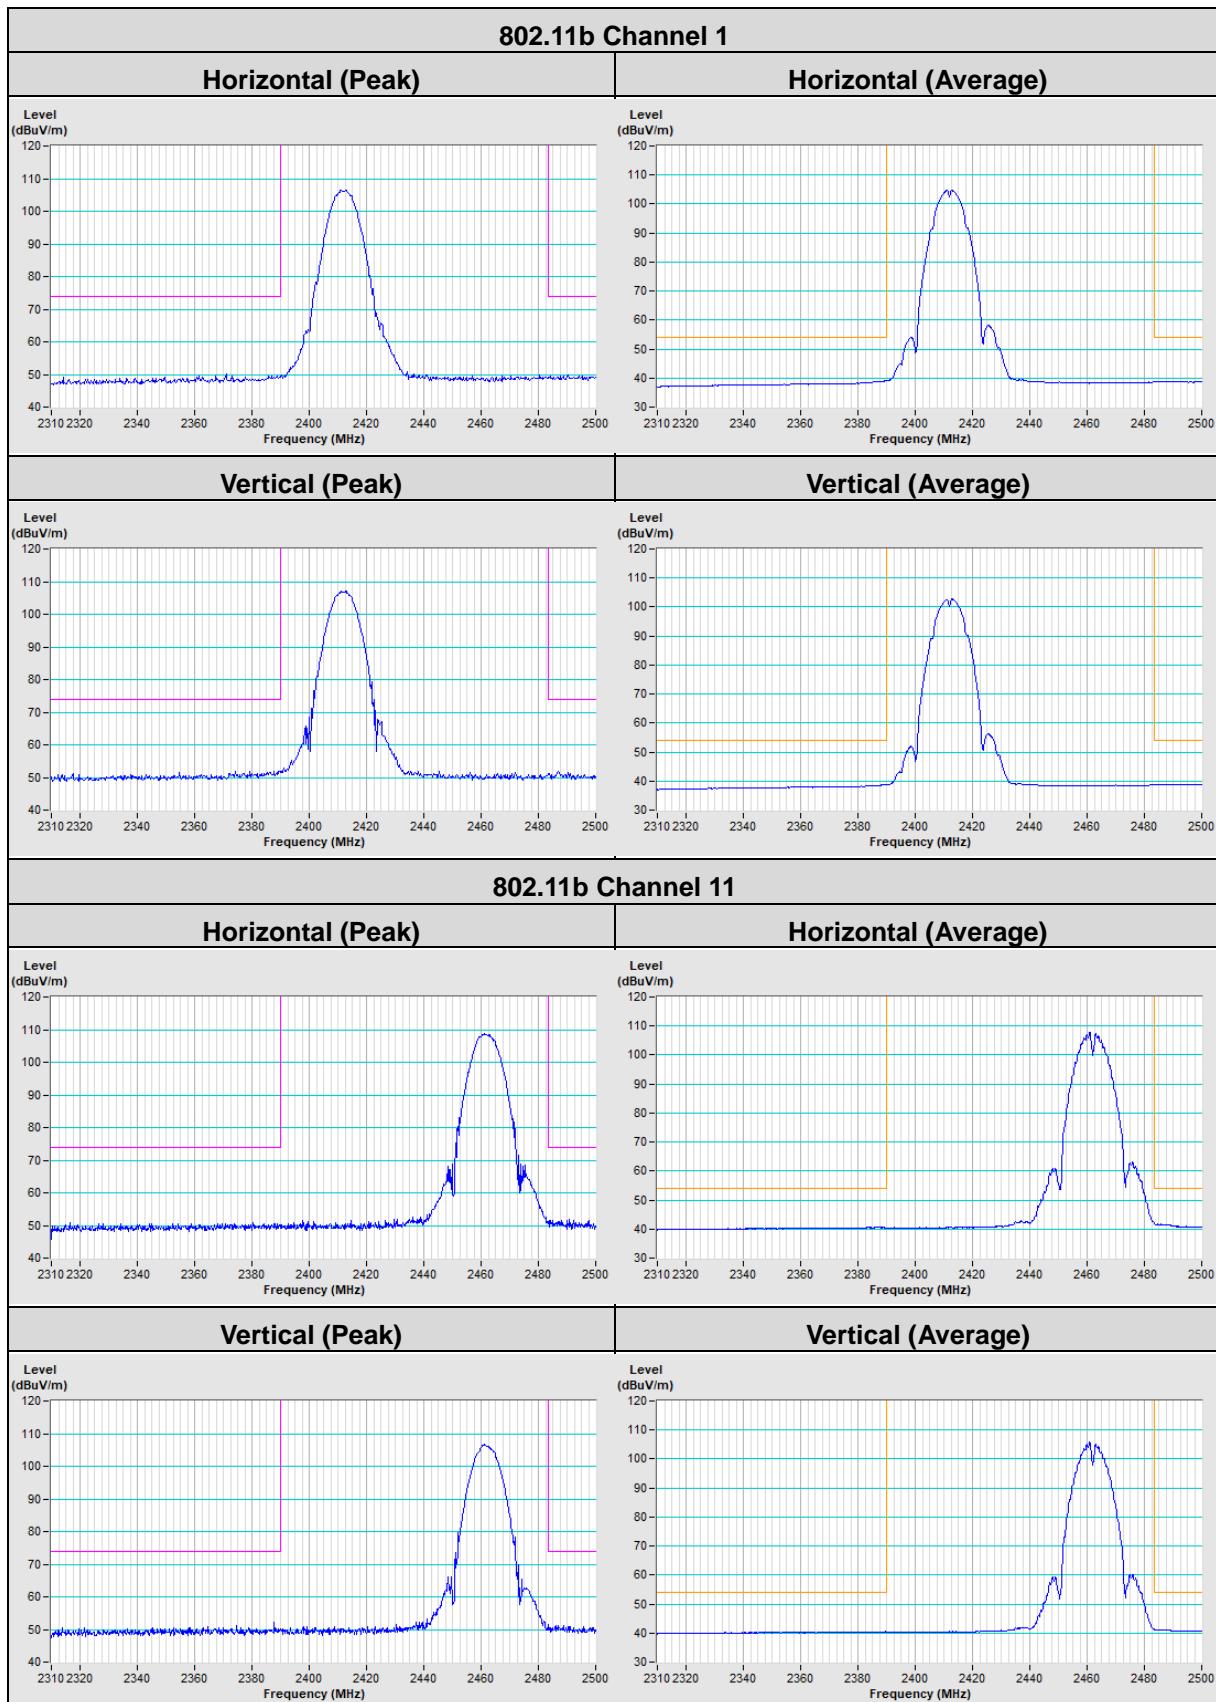

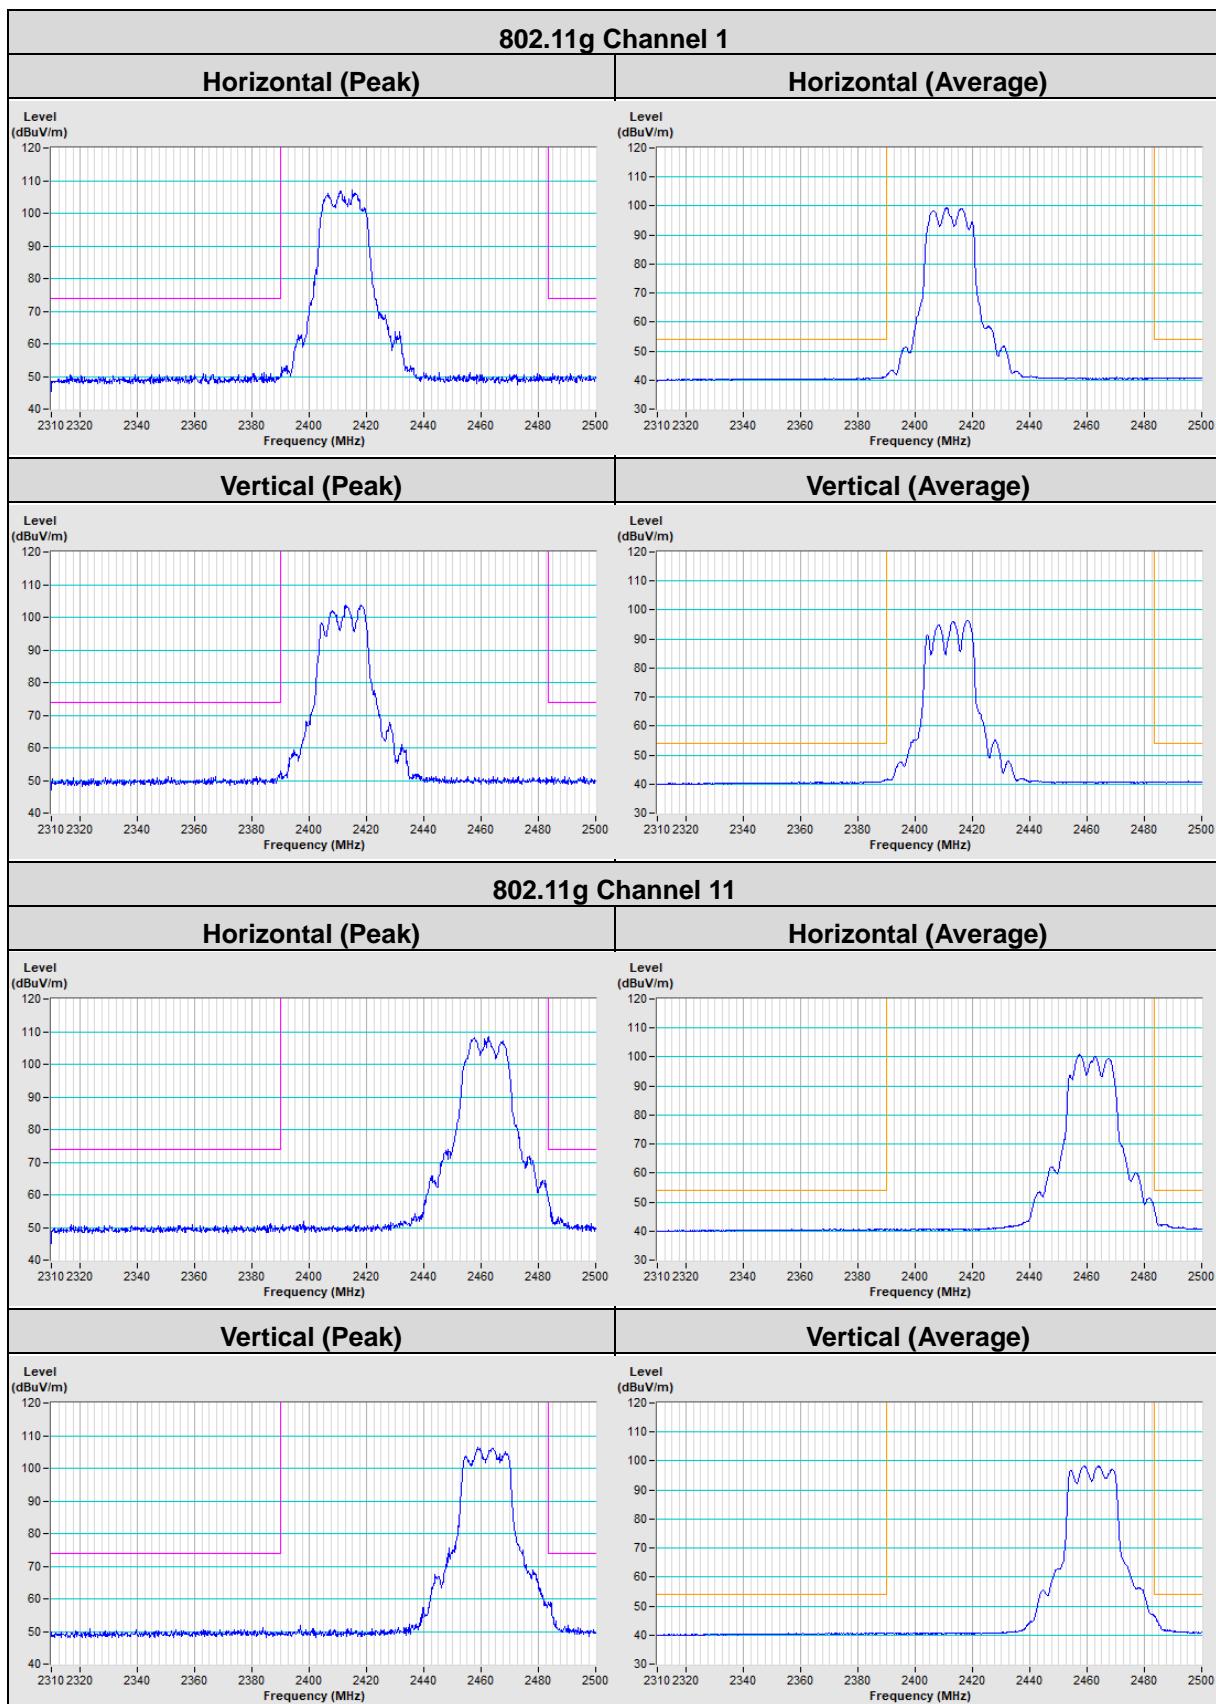

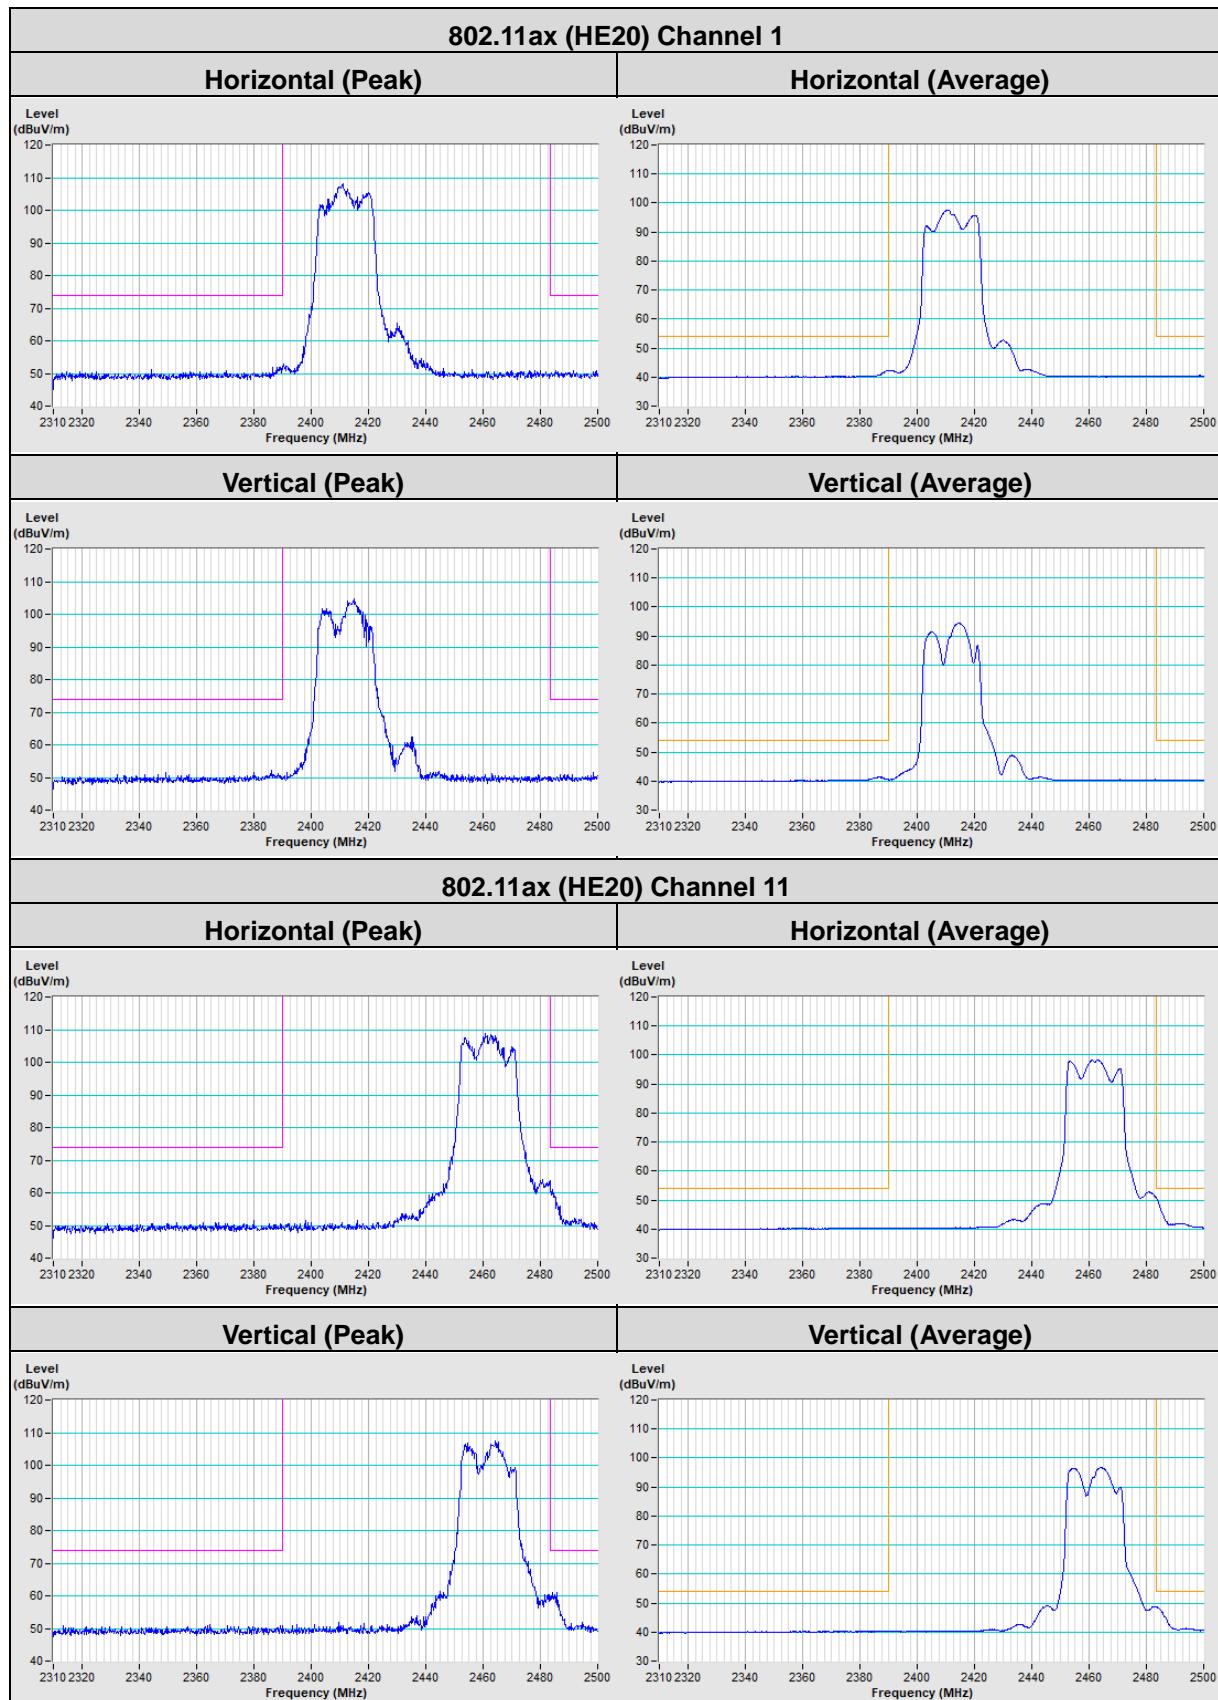

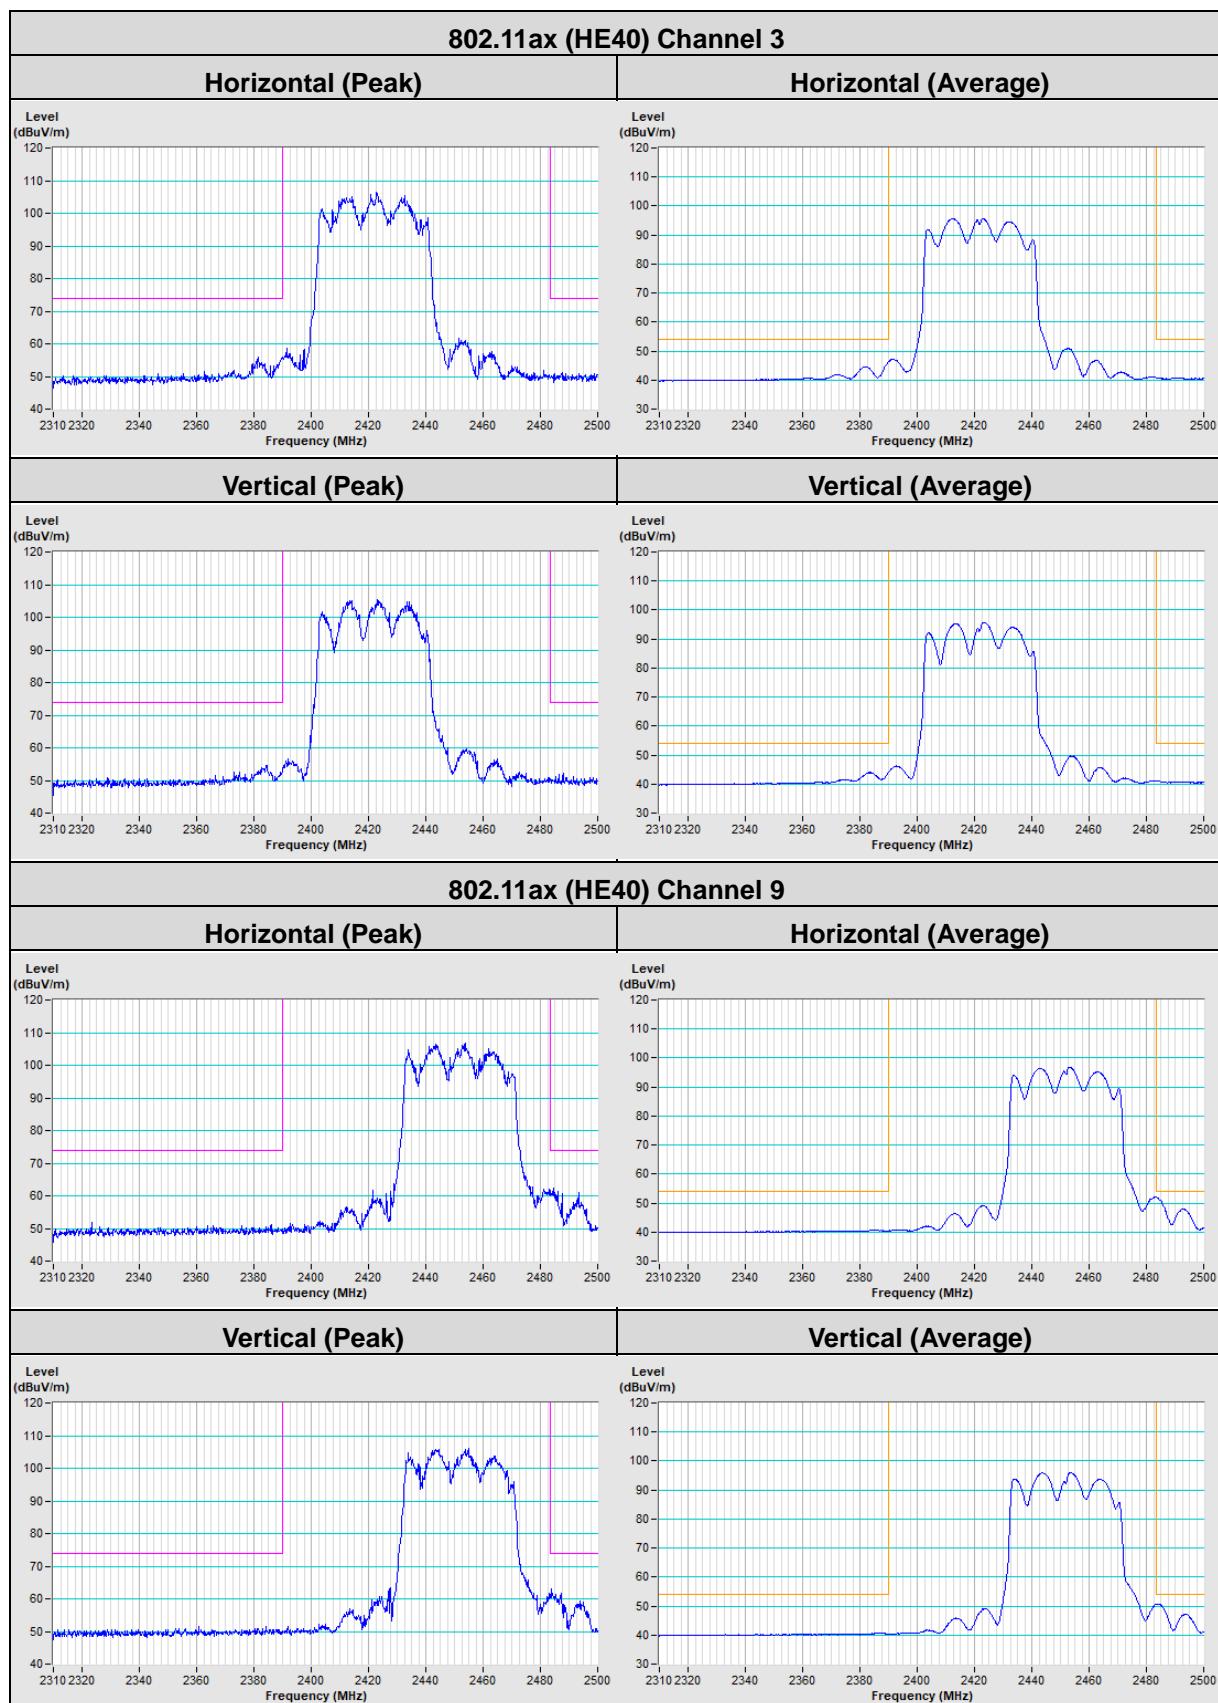

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565
Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---