



FCC TEST REPORT

Test report
On Behalf of
Eshiner New Energy Technology(Guangdong) LTD
For
Portable Folding Smart Table
Model No.: YH-300-1B, YH-330-1A, YH-200A-2A, YH-200A-4A,
YH-200A-6A, YH-120X-A, YH-120X-B, YH-120X-C, YH-400F-A,
YH-400F-B, YH-410-A, YH-410-B

FCC ID: 2AUS8-YH-300-1B

Prepared for : **Eshiner New Energy Technology(Guangdong) LTD**
Room 403, Building B1, Tian-an Cyber Park, No.1 Huangjin Road, Nancheng District,
Dongguan City, Guangdong Province, PRC

Prepared By : **Shenzhen HUAKE Testing Technology Co., Ltd.**
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China

Date of Test: **Sept. 27, 2019 ~ Oct. 09, 2019**

Date of Report: **Oct. 09, 2019**

Report Number: **HK1909202485-3E**



Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

| Channel List | | | | | | | |
|--------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (KHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 01 | 125 | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |

The EUT antenna is Coil Antenna. No antenna other than that furnished by the responsible party shall be used with the device.

2. SUMMARY OF TEST RESULTS

2.1 Test procedures according to the technical standards:

FCC KDB680106 D01 RF Exposure Wireless Charging Apps v03

| FCC CFR 47 | | | |
|--|-----------------------------------|----------|--------|
| Standard Section | Test Item | Judgment | Remark |
| FCC CFR 47 part1, 1.1310 KDB680106 D01v03 (3)(3) | Electric Field Strength (E) (V/m) | PASS | |
| | Magnetic Field Strength (H) (A/m) | PASS | |

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

| No. | Item | Uncertainty |
|-----|--|-------------------------|
| 1 | All emissions,radiated(<30M)(9KHz-30MHz) | $\pm 2.45\text{dB}$ |
| 2 | Temperature | $\pm 0.5^\circ\text{C}$ |
| 3 | Humidity | $\pm 2\%$ |



2.3 Test Instruments

| Description | Brand | Model No. | Frequency Range | Calibrated Date | Calibrated Until |
|-----------------------|-----------|-----------|-----------------|-----------------|------------------|
| Broadband Field Meter | NARDA | NBM-550 | - | Dec. 27, 2018 | Dec. 27, 2019 |
| Magnetic Field Meter | NARDA | ELT-400 | 1 – 400kHz | Dec. 27, 2018 | Dec. 27, 2019 |
| Magnetic Probe | NARDA | HF-3061 | 300kHz – 30MHz | Dec. 27, 2018 | Dec. 27, 2019 |
| Magnetic Probe | NARDA | HF-0191 | 27 – 1000MHz | Dec. 27, 2018 | Dec. 27, 2019 |
| Broadband Field Meter | NARDA | NBM-550 | - | Dec. 27, 2018 | Dec. 27, 2019 |
| Electric Field Meter | COMBINOVA | EFM 200 | 5Hz – 400kHz | Dec. 27, 2018 | Dec. 27, 2019 |
| E-Field Probe | NARDA | EF-0391 | 100kHz – 3GHz | Dec. 27, 2018 | Dec. 27, 2019 |
| E-Field Probe | NARDA | EF-6091 | 100MHz – 60GHz | Dec. 27, 2018 | Dec. 27, 2019 |

NOTE: 1. The calibration interval of the above test instruments is 12 months .



3. MAXIMUM PERMISSIBLE EXPOSURE

3.1 MAXIMUM PERMISSIBLE EXPOSURE

Limit of Maximum Permissible Exposure

| Limits for Occupational / Controlled Exposure | | | | |
|---|-----------------------------------|-----------------------------------|--|--|
| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm ²) | Averaging Time E ² , H ² or S (minutes) |
| 0.3-3.0 | 614 | 1.63 | (100)* | 6 |
| 3.0-30 | 1842 / f | 4.89 / f | (900 / f)* | 6 |
| 30-300 | 61.4 | 0.163 | 1.0 | 6 |
| 300-1500 | | | F/300 | 6 |
| 1500-100,000 | | | 5 | 6 |
| Limits for General Population / Uncontrolled Exposure | | | | |
| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm ²) | Averaging Time E ² , H ² or S (minutes) |
| 0.3-1.34 | 614 | 1.63 | (100)* | 30 |
| 1.34-30 | 824/f | 2.19/f | (180 / f)* | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | | | F/1500 | 30 |
| 1500-100,000 | | | 1 | 30 |

Note 1: f = frequency in MHz ; *Plane-wave equivalent power density


Note 2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v03

Note 3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

4. TEST PROCEDURE

a. For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device.

4.1 TEST SETUP

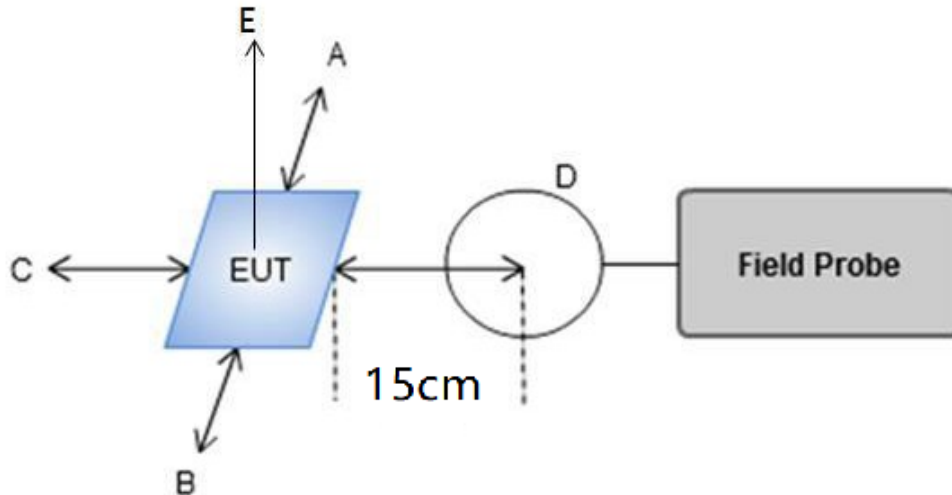

4.2 RESULT OF MAXIMUM PERMISSIBLE EXPOSURE



For Full load mode:

E-Field Strength at 15 cm from the edges surrounding the EUT (V/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|
| 0.125 | 1.15 | 1.29 | 1.24 | 1.22 | 1.17 | 614 |

H-Field Strength at 20 cm from the edges surrounding the EUT (A/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Limits Test (A/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|
| 0.125 | 0.26 | 0.23 | 0.25 | 0.22 | 0.39 | 1.63 |

For Half Load for wrist band mode:

E-Field Strength at 15 cm from the edges surrounding the EUT (V/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|
| 0.125 | 1.17 | 1.25 | 1.39 | 1.30 | 1.26 | 614 |

H-Field Strength at 20 cm from the edges surrounding the EUT (A/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Limits Test (A/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|
| 0.125 | 0.19 | 0.26 | 0.24 | 0.27 | 0.25 | 1.63 |

For Half Load for shoepod mode:

E-Field Strength at 15 cm from the edges surrounding the EUT (V/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|
| 0.125 | 1.13 | 1.12 | 1.21 | 1.26 | 1.20 | 614 |

H-Field Strength at 20 cm from the edges surrounding the EUT (A/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Limits Test (A/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|
| 0.125 | 0.25 | 0.22 | 0.16 | 0.22 | 0.23 | 1.63 |

For No load mode:

E-Field Strength at 15 cm from the edges surrounding the EUT (V/m)



| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|
| 0.125 | 1.27 | 1.12 | 1.10 | 1.23 | 1.15 | 614 |

H-Field Strength at 20 cm from the edges surrounding the EUT (A/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Limits Test (A/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|
| 0.125 | 0.19 | 0.25 | 0.17 | 0.26 | 0.25 | 1.63 |

Remark: According KDB 680106 D01 RF Exposure Wireless Charging App v03, section 5, b). The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit. The E- field evaluation conducted assuming a user separation distance of 15 cm according to the KDB 680106 D01 RF Exposure Wireless Charging App v03 section 3, c).

Result: The device comply with the RF exposure requirement according to 680106 D01 v03, section 5, b):

- (1) The operating frequency is 125kHz, is less than 1MHz.
- (2) The max Output power for each primary coil is 10W, less than 15W.
- (3) The transfer system includes only single primary and secondary coils.
- (4) Client device is placed directly in contact with the transmitter.
- (5) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.



PHOTOGRAPH OF TEST



※※※※※THE END※※※※※